




US 20100086012A1

(19) **United States**(12) **Patent Application Publication**
ROFOUGARAN et al.(10) **Pub. No.: US 2010/0086012 A1**(43) **Pub. Date: Apr. 8, 2010**(54) **CALIBRATION OF WIRELESS
COMMUNICATION DEVICE****Publication Classification**(51) **Int. Cl.**
H04B 1/40 (2006.01)(52) **U.S. Cl.** **375/219; 455/86**(75) Inventors: **AHMADREZA (REZA)
ROFOUGARAN**, NEWPORT
COAST, CA (US); **MARYAM
ROFOUGARAN**, RANCHO
PALOS VERDES, CA (US)

Correspondence Address:

GARLICK HARRISON & MARKISON
P.O. BOX 160727
AUSTIN, TX 78716-0727 (US)(73) Assignee: **BROADCOM CORPORATION**,
IRVINE, CA (US)(21) Appl. No.: **12/629,180**(22) Filed: **Dec. 2, 2009****Related U.S. Application Data**(62) Division of application No. 11/729,271, filed on Mar.
28, 2007.(60) Provisional application No. 60/906,979, filed on Mar.
14, 2007.(57) **ABSTRACT**

A wireless communication device includes an integrated circuit (IC) and an antenna system. The IC includes a baseband processing module, a network processing module, a calibration processing module, a receiver section and a transmitter section. The network processing module establishes a wireless communication protocol and operational parameters based on the wireless communication protocol. The calibration processing module generates RF receiver calibration information based on the operational parameters and RF receive feedback and generates RF transmitter calibration information based on the operational parameters and RF transmit feedback. The receiver section provides the RF receive feedback and converts an inbound RF signal into an inbound symbol stream. The transmitter section provides the RF transmit feedback and converts an outbound symbol stream into an outbound RF signal. The antenna system provides the inbound RF signal to the receiver section and receives the outbound RF signal from the transmitter section.

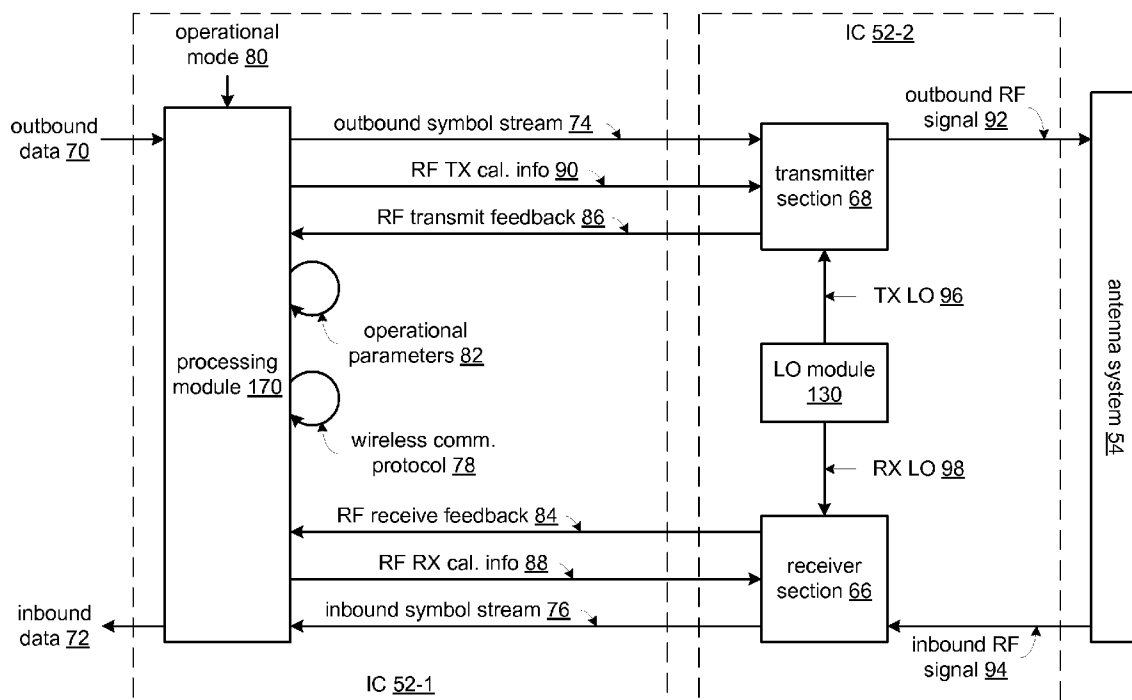

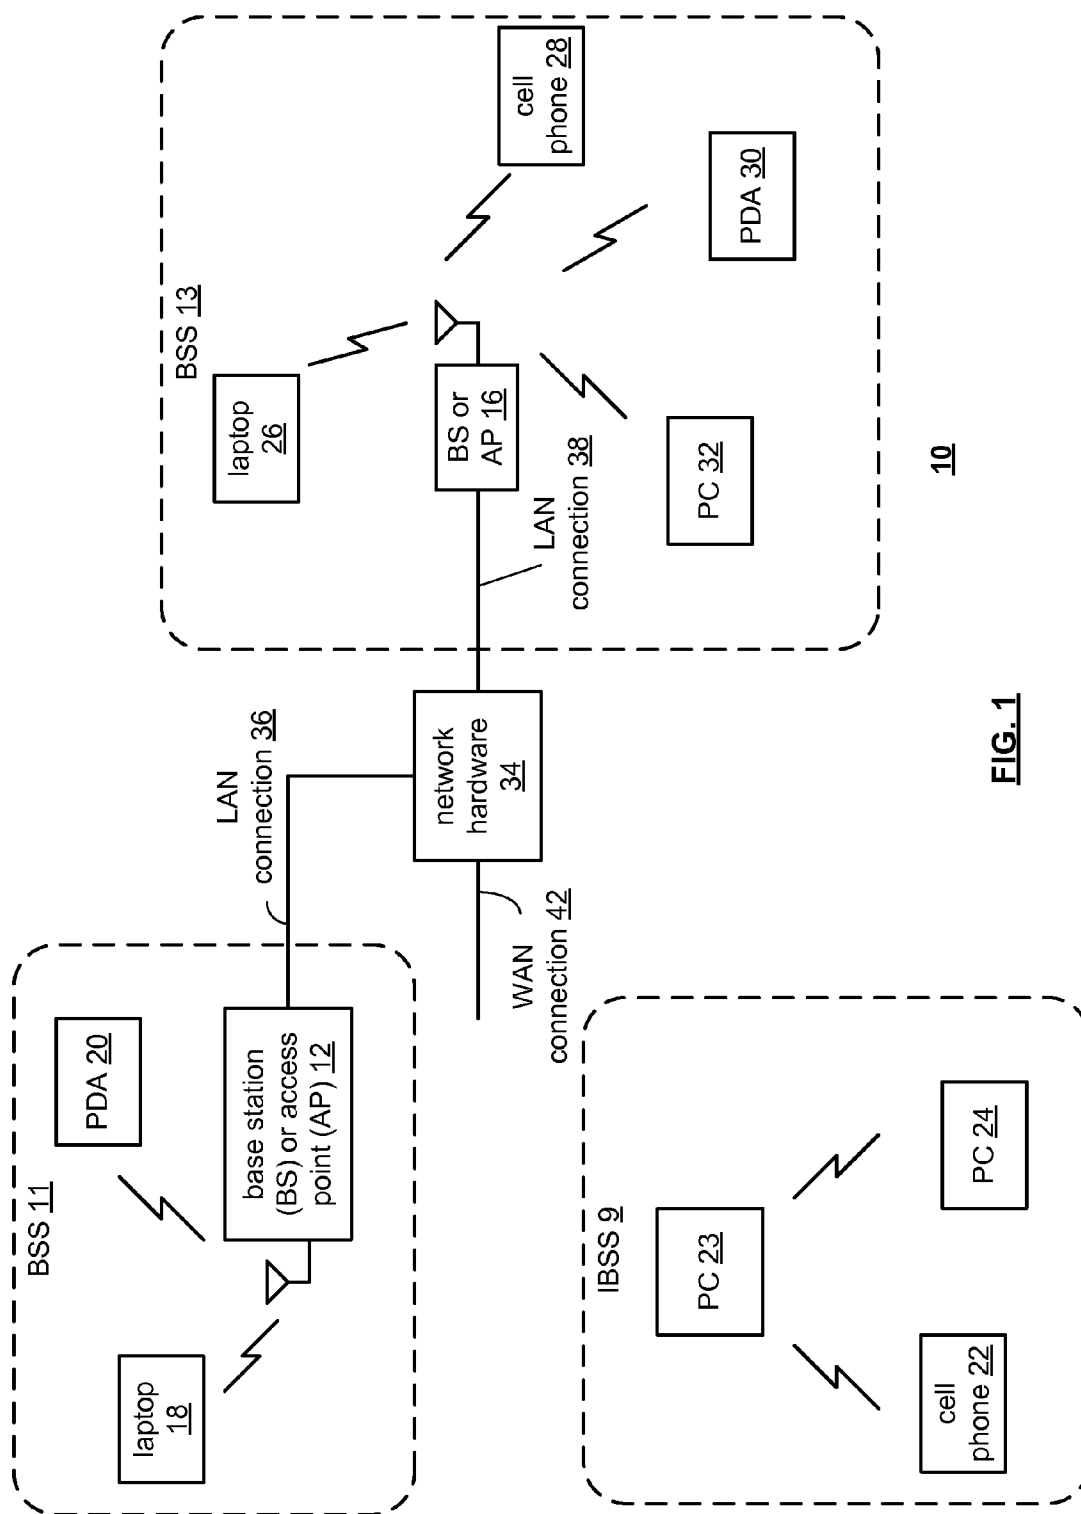


FIG. 1

10

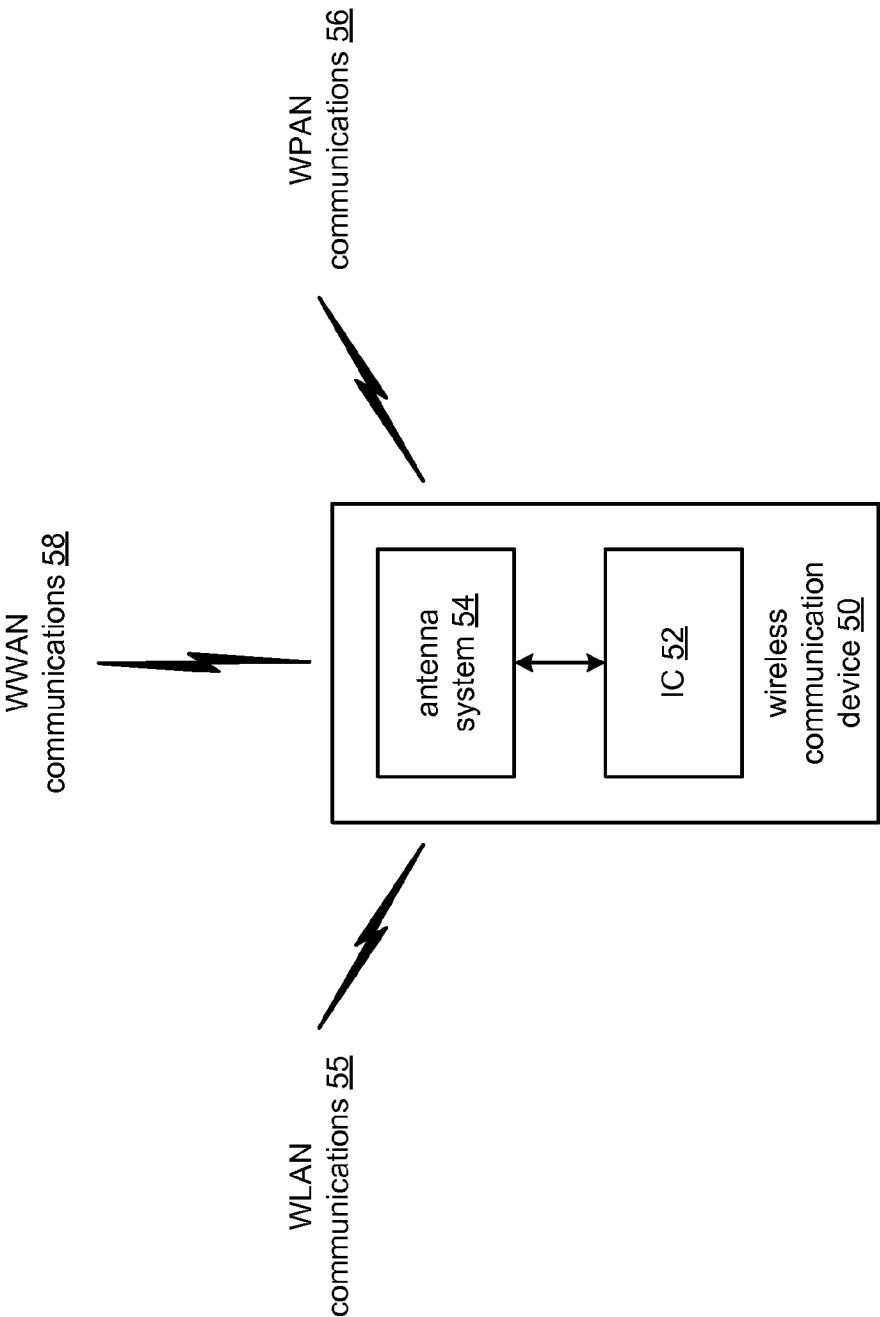


FIG. 2

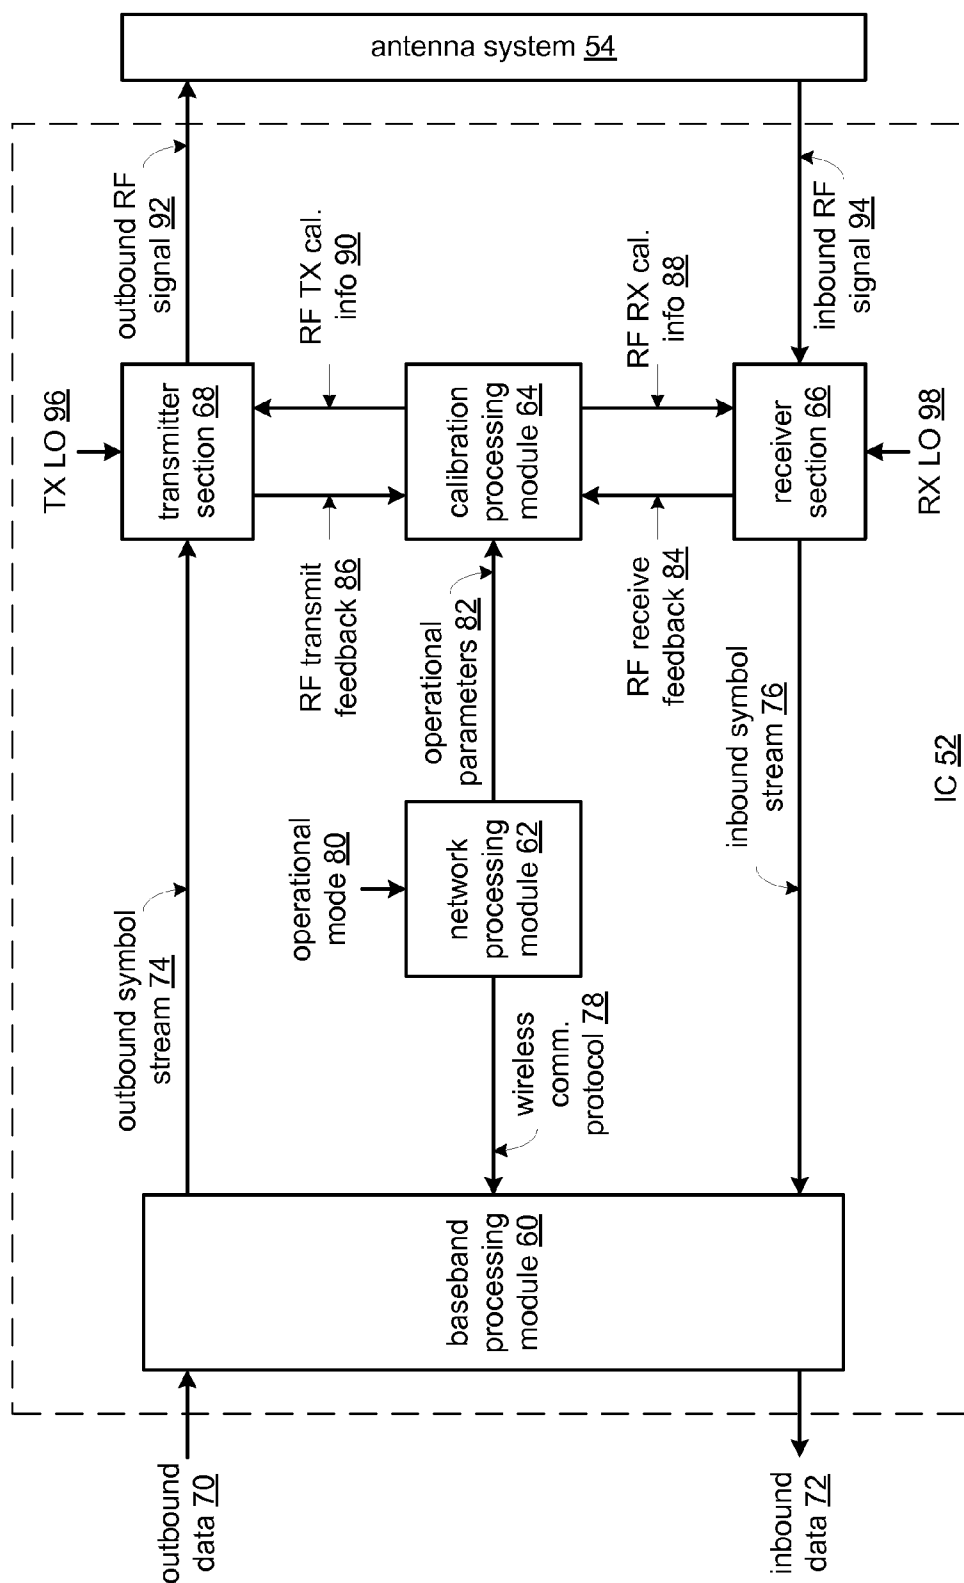


FIG. 3

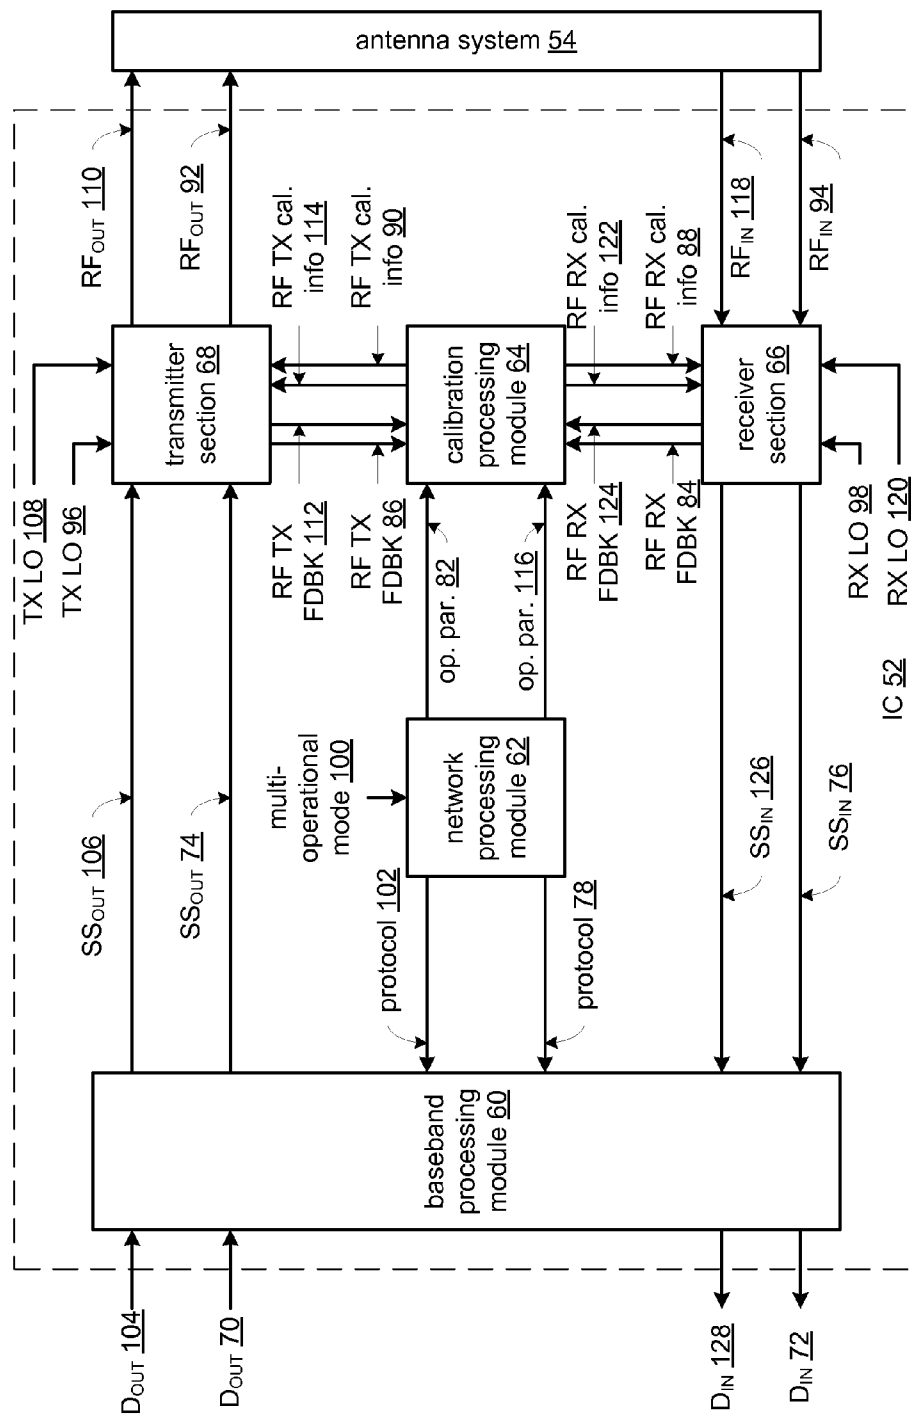


FIG. 4

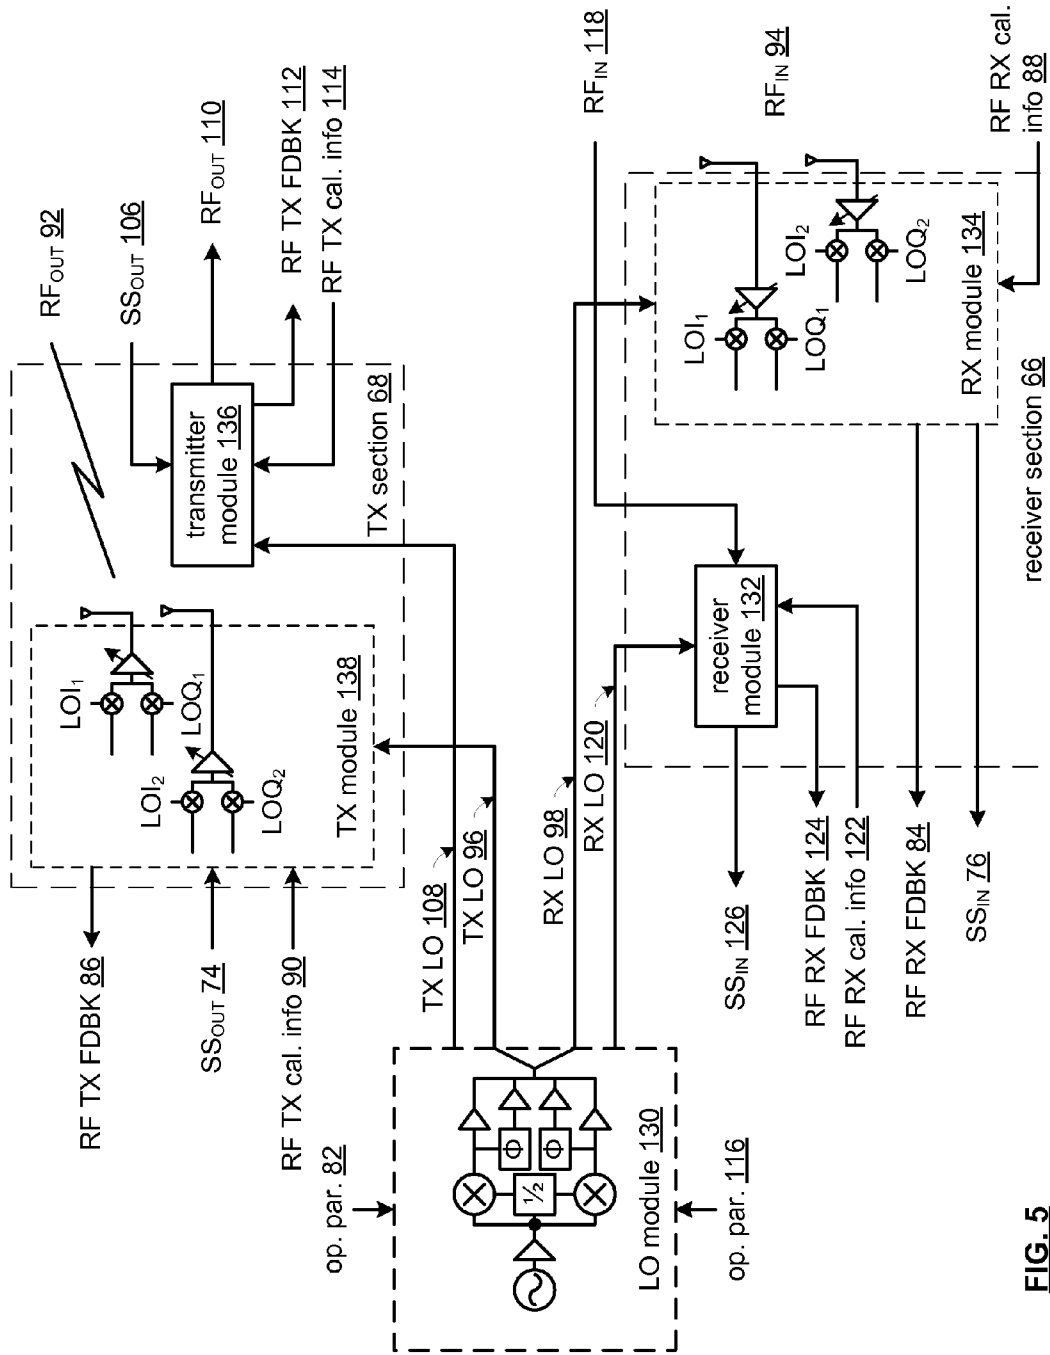


FIG. 5

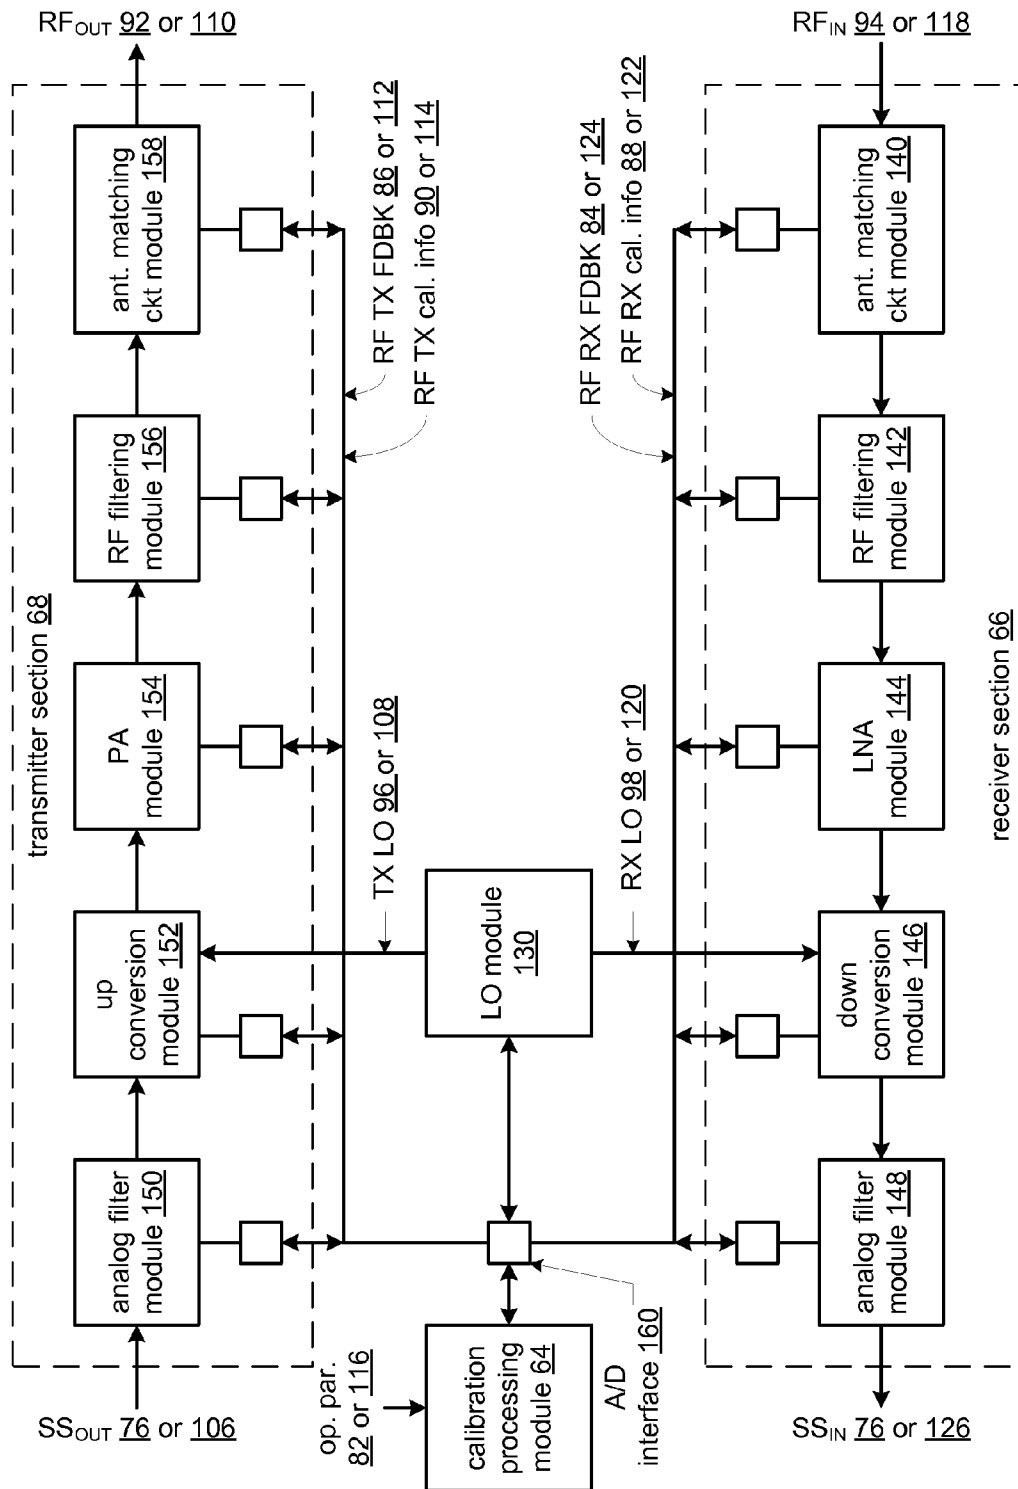


FIG. 6

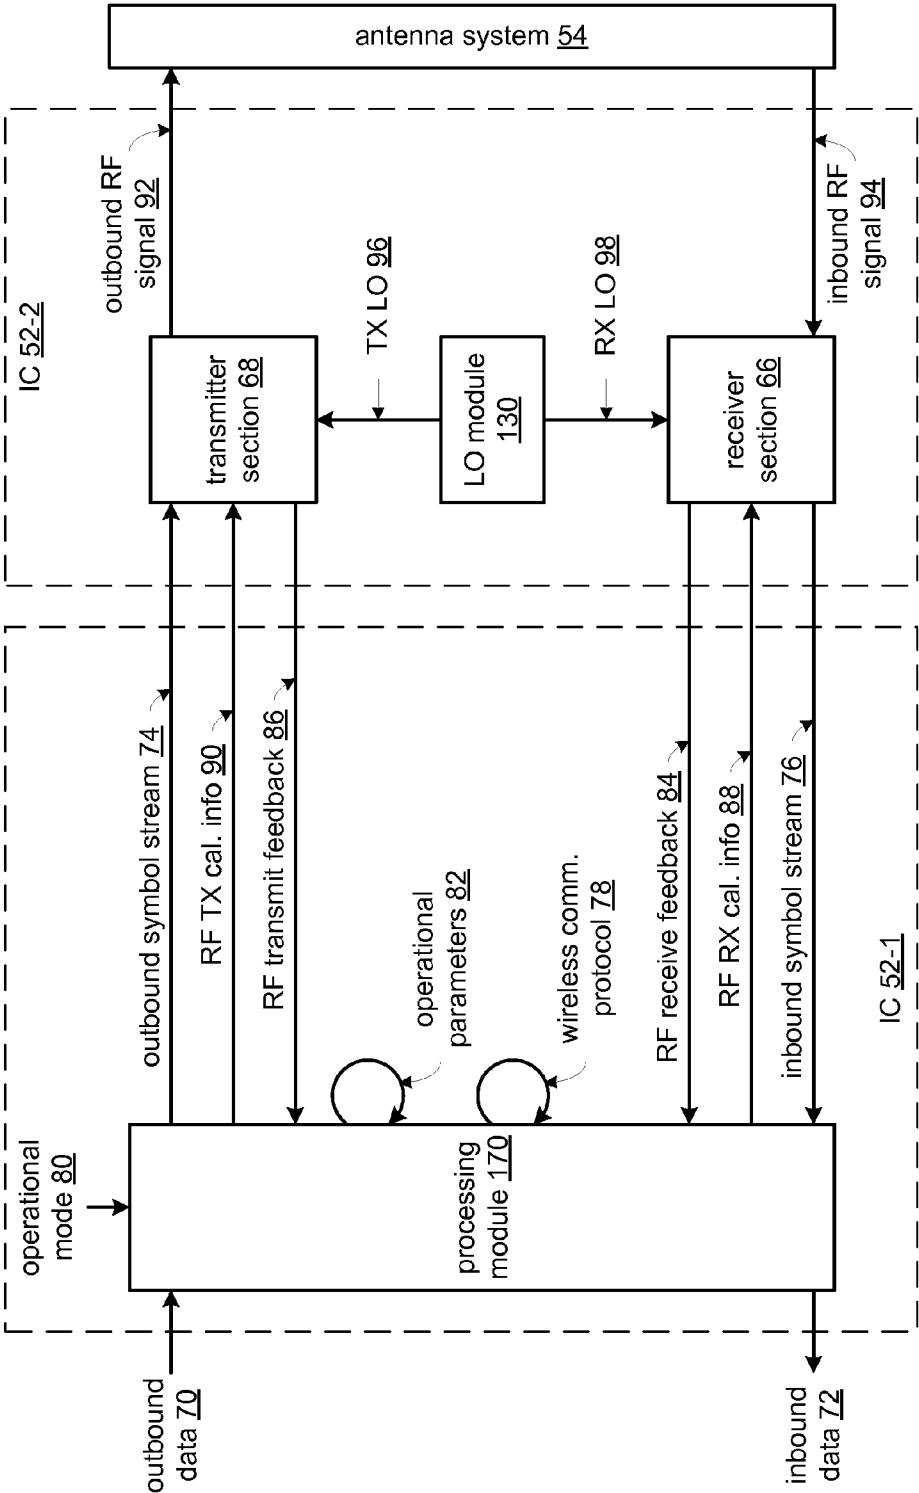


FIG. 7

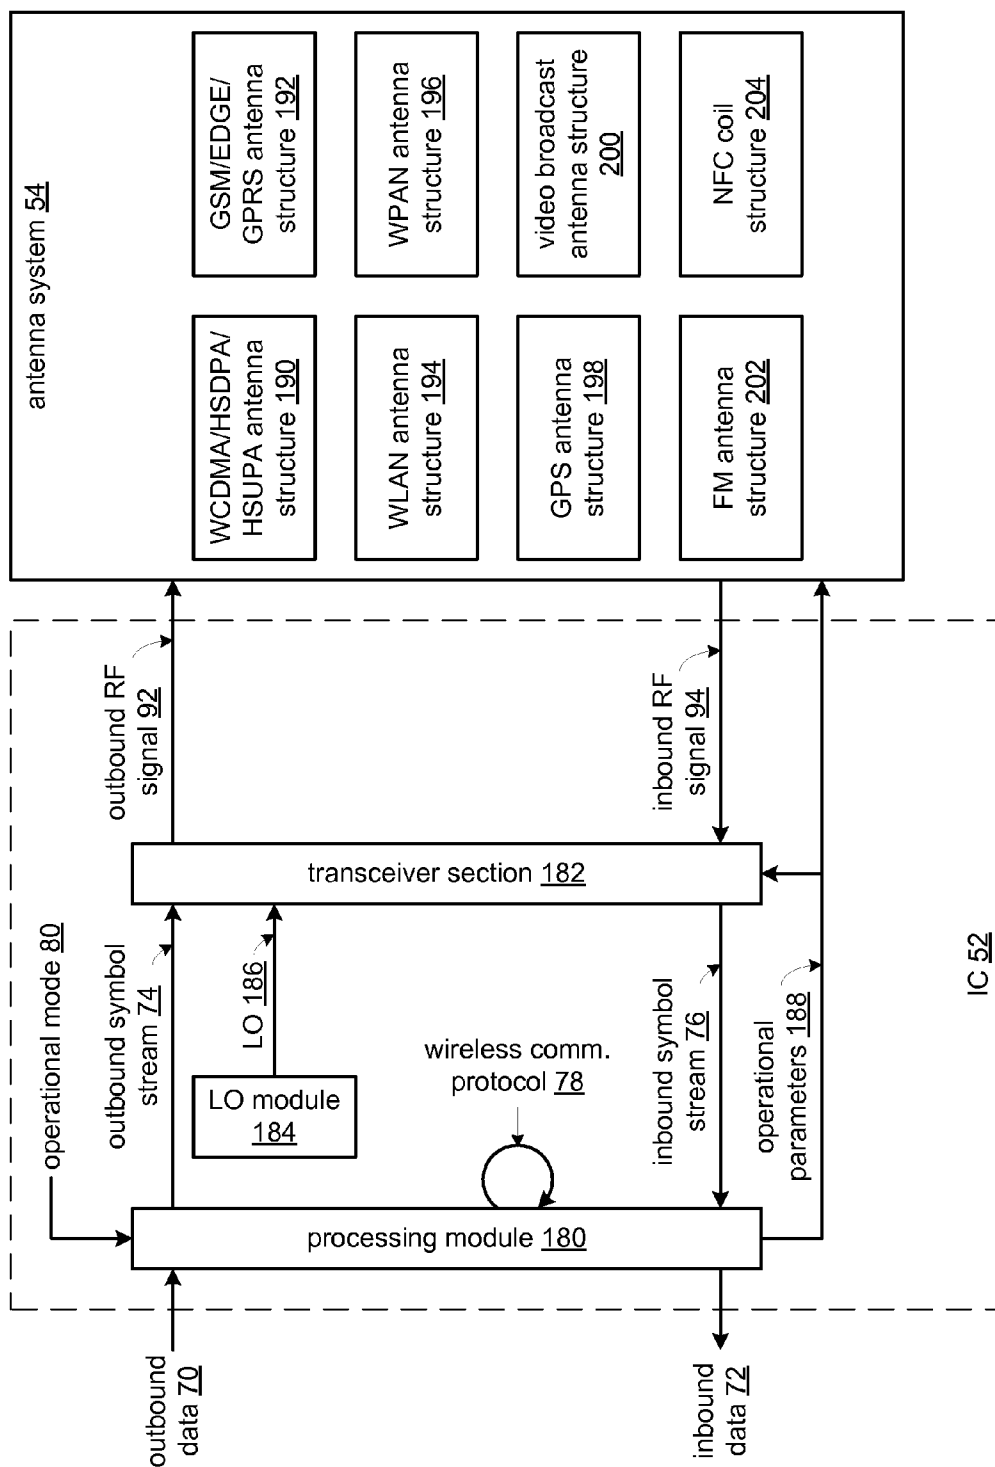


FIG. 8

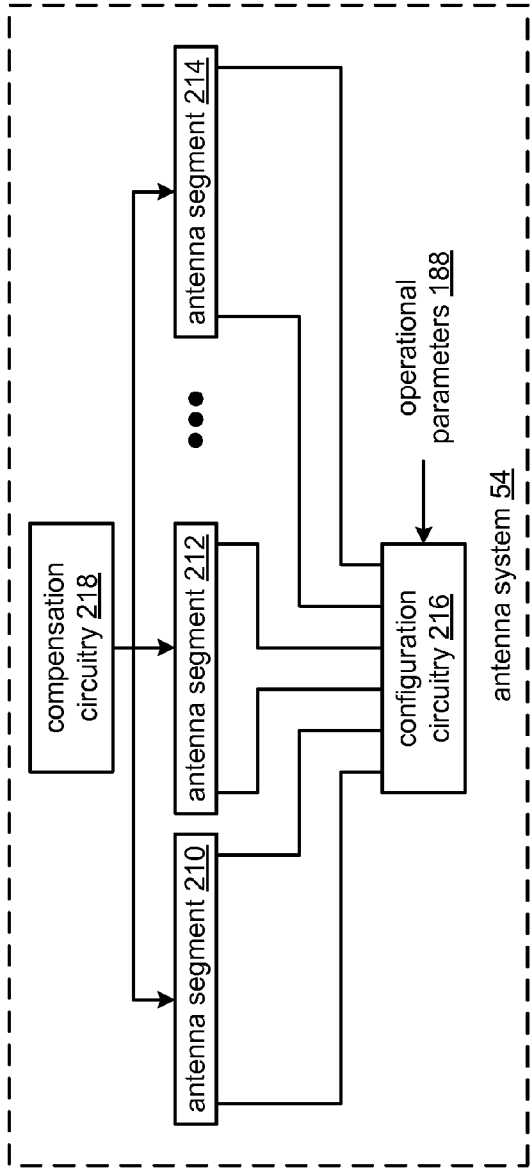


FIG. 9

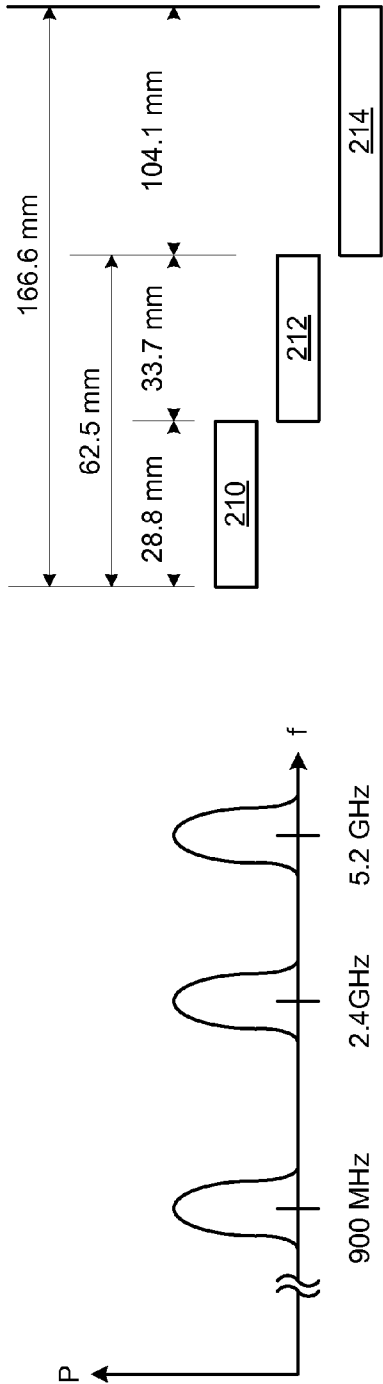


FIG. 10

FIG. 11

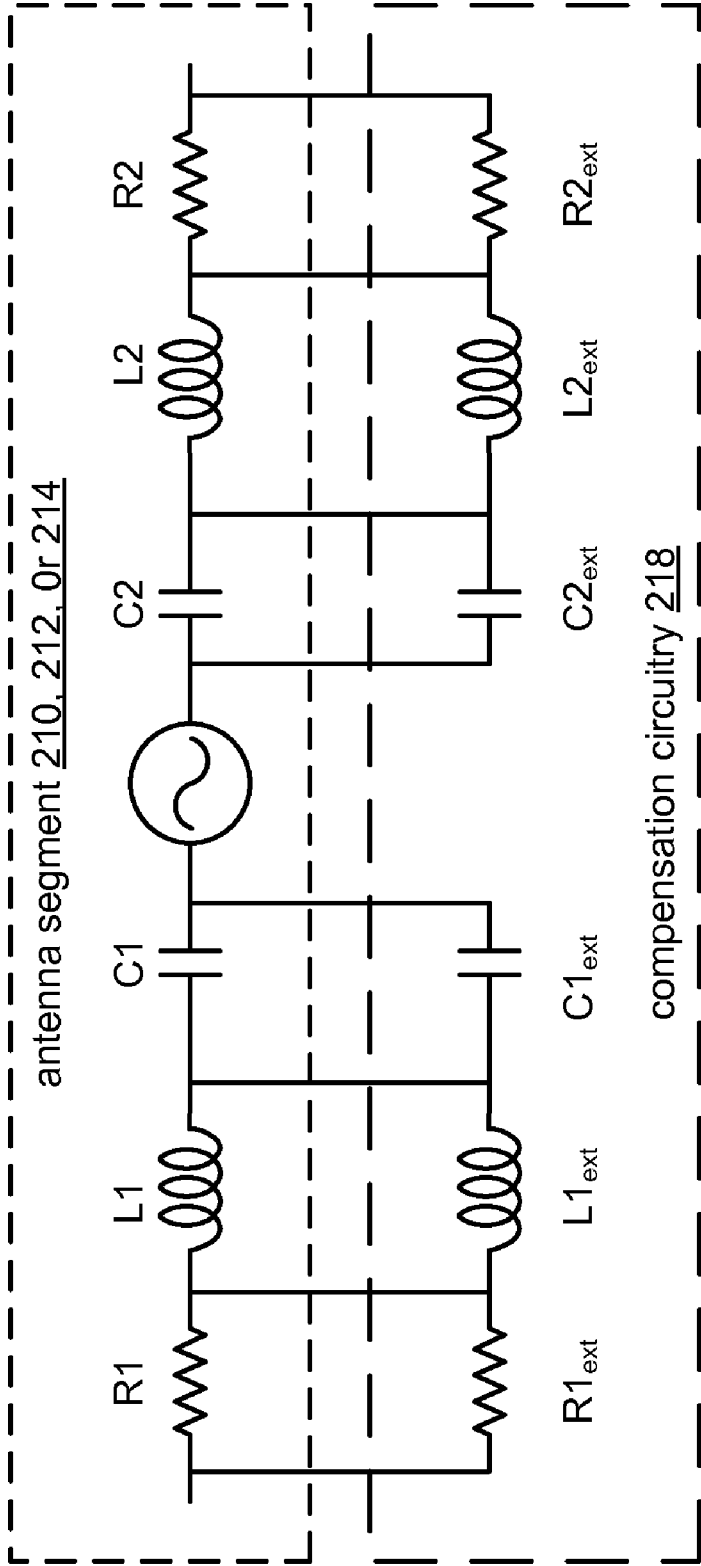


FIG. 12

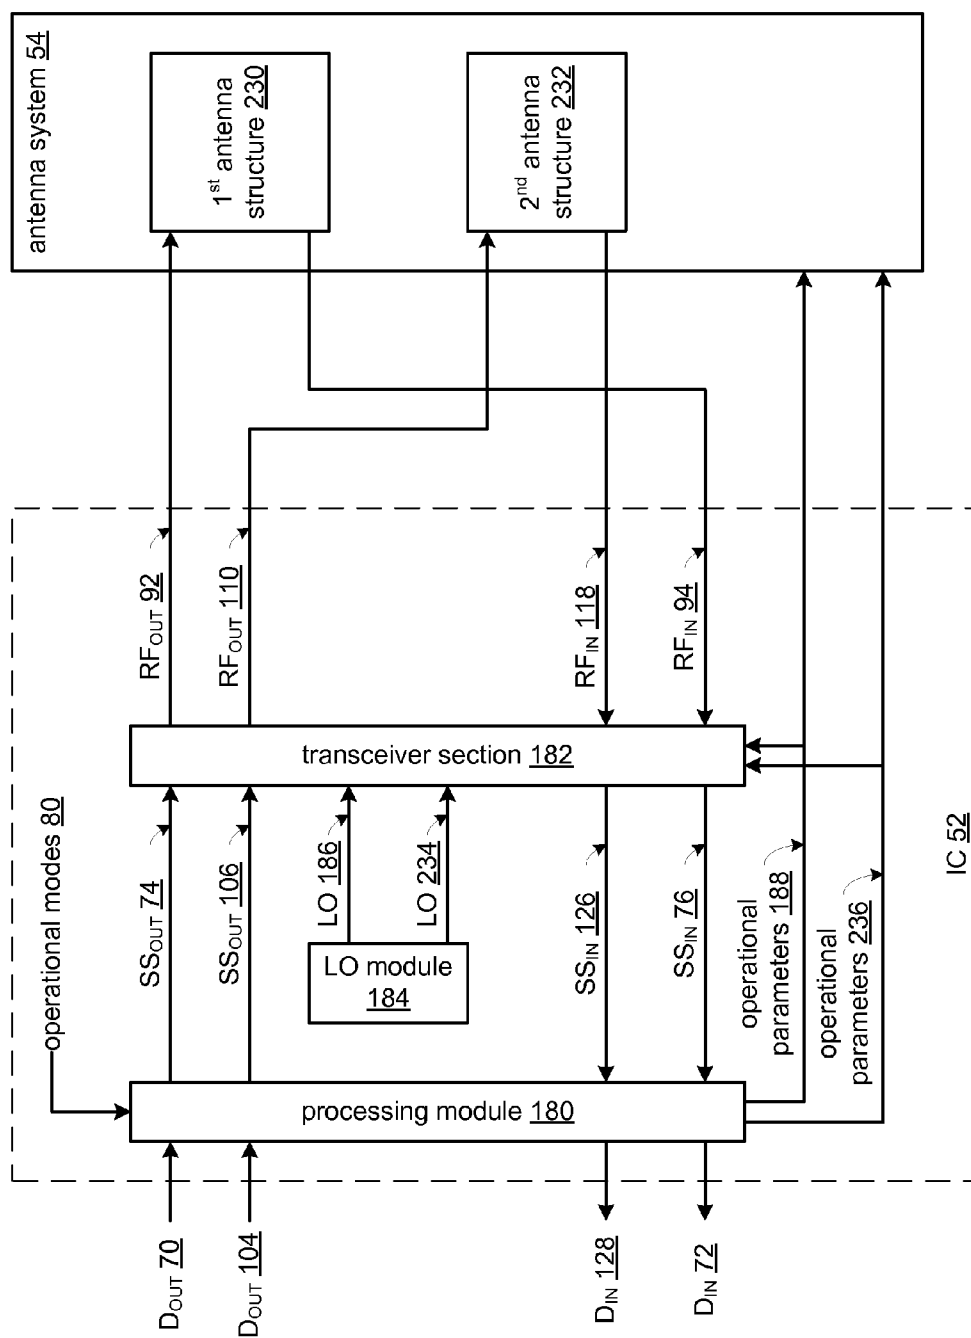


FIG. 13

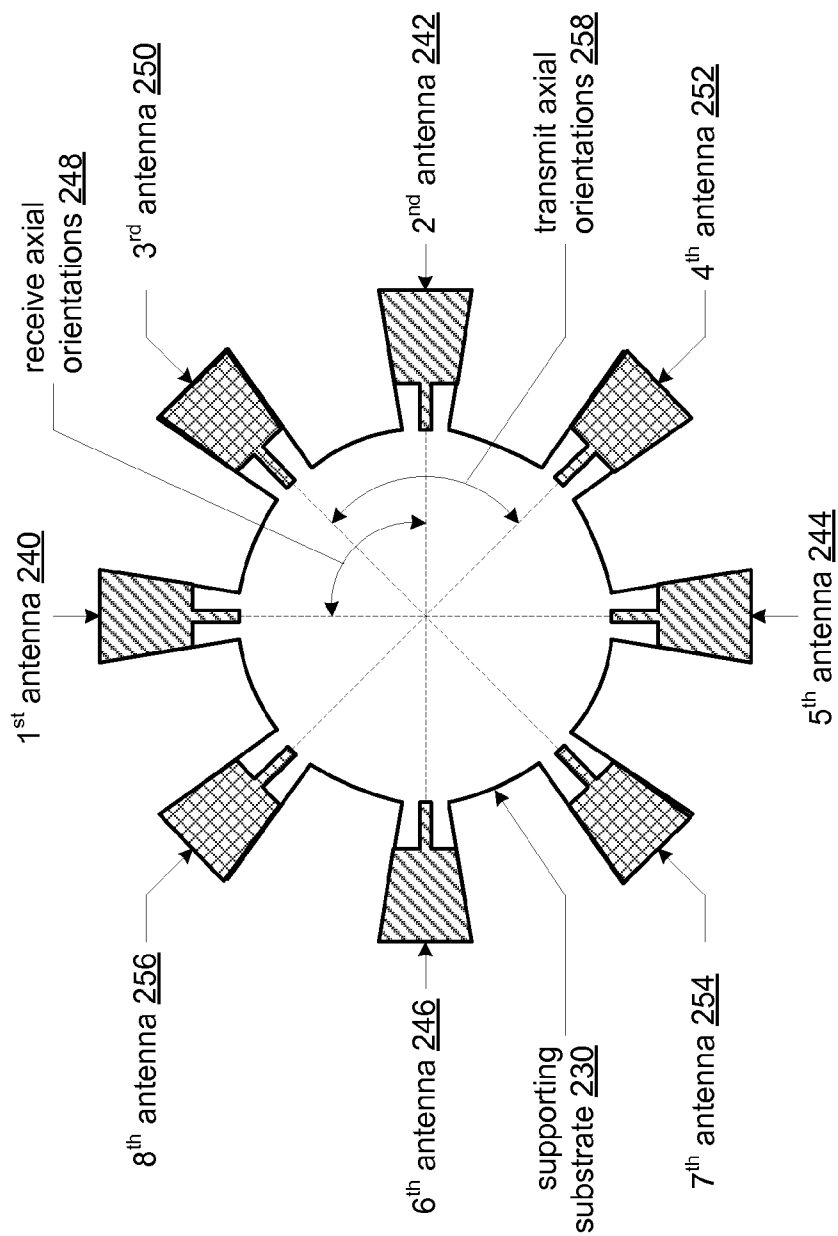


FIG. 14

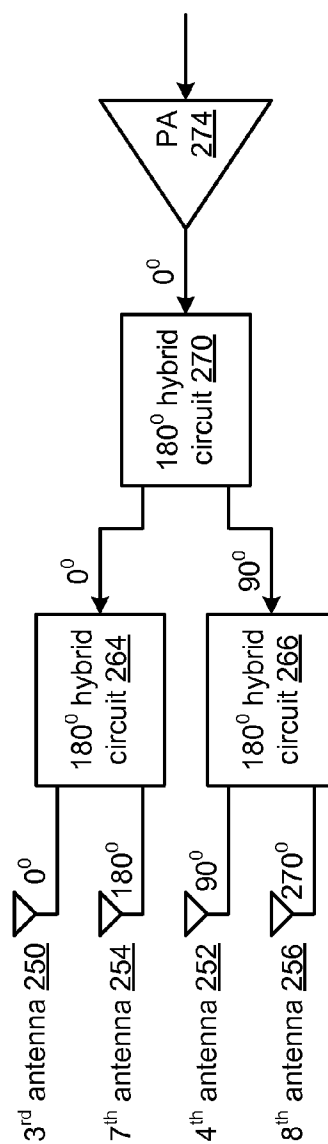
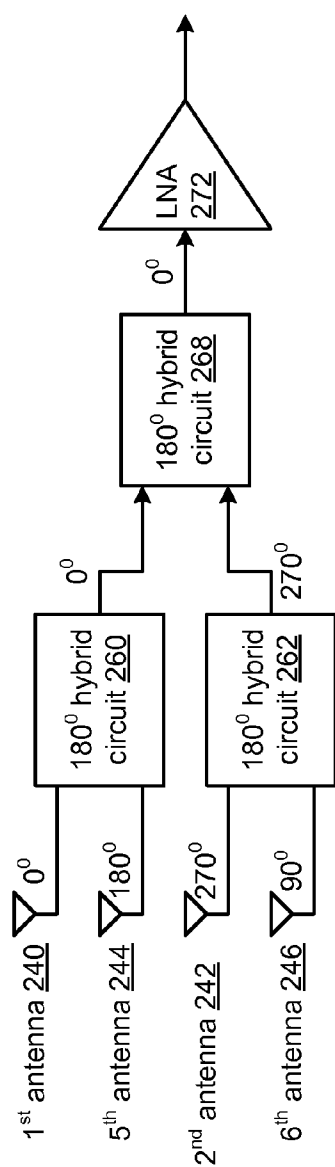


FIG. 15



FIG. 16

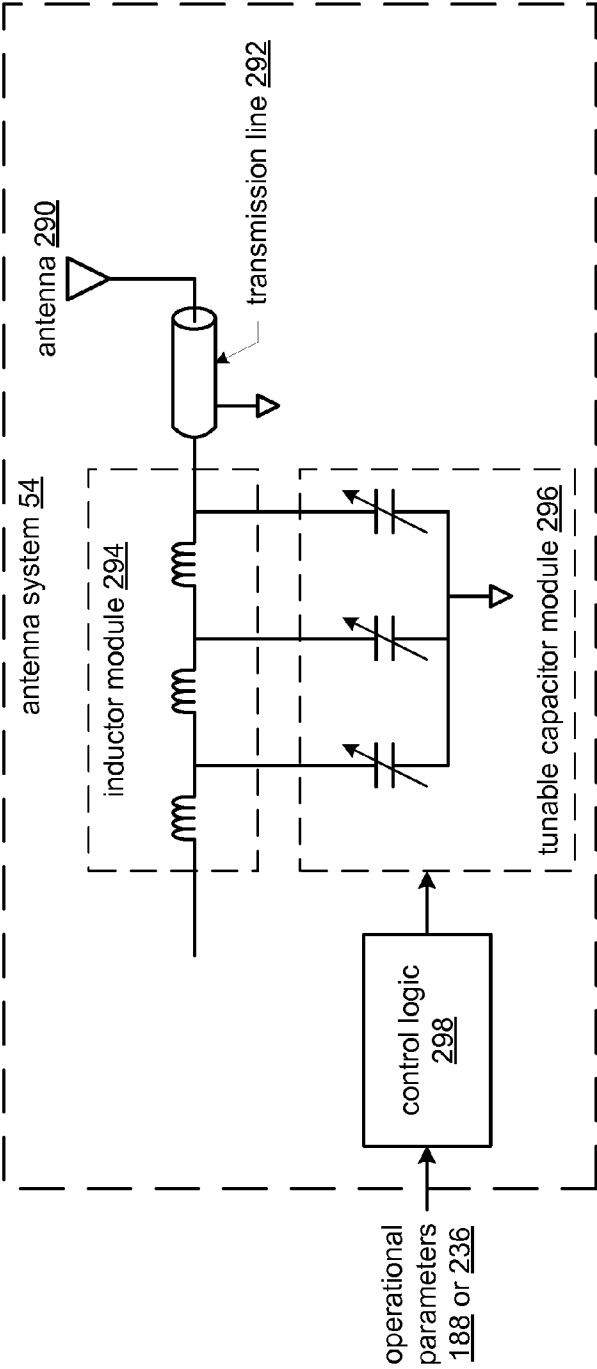


FIG. 17

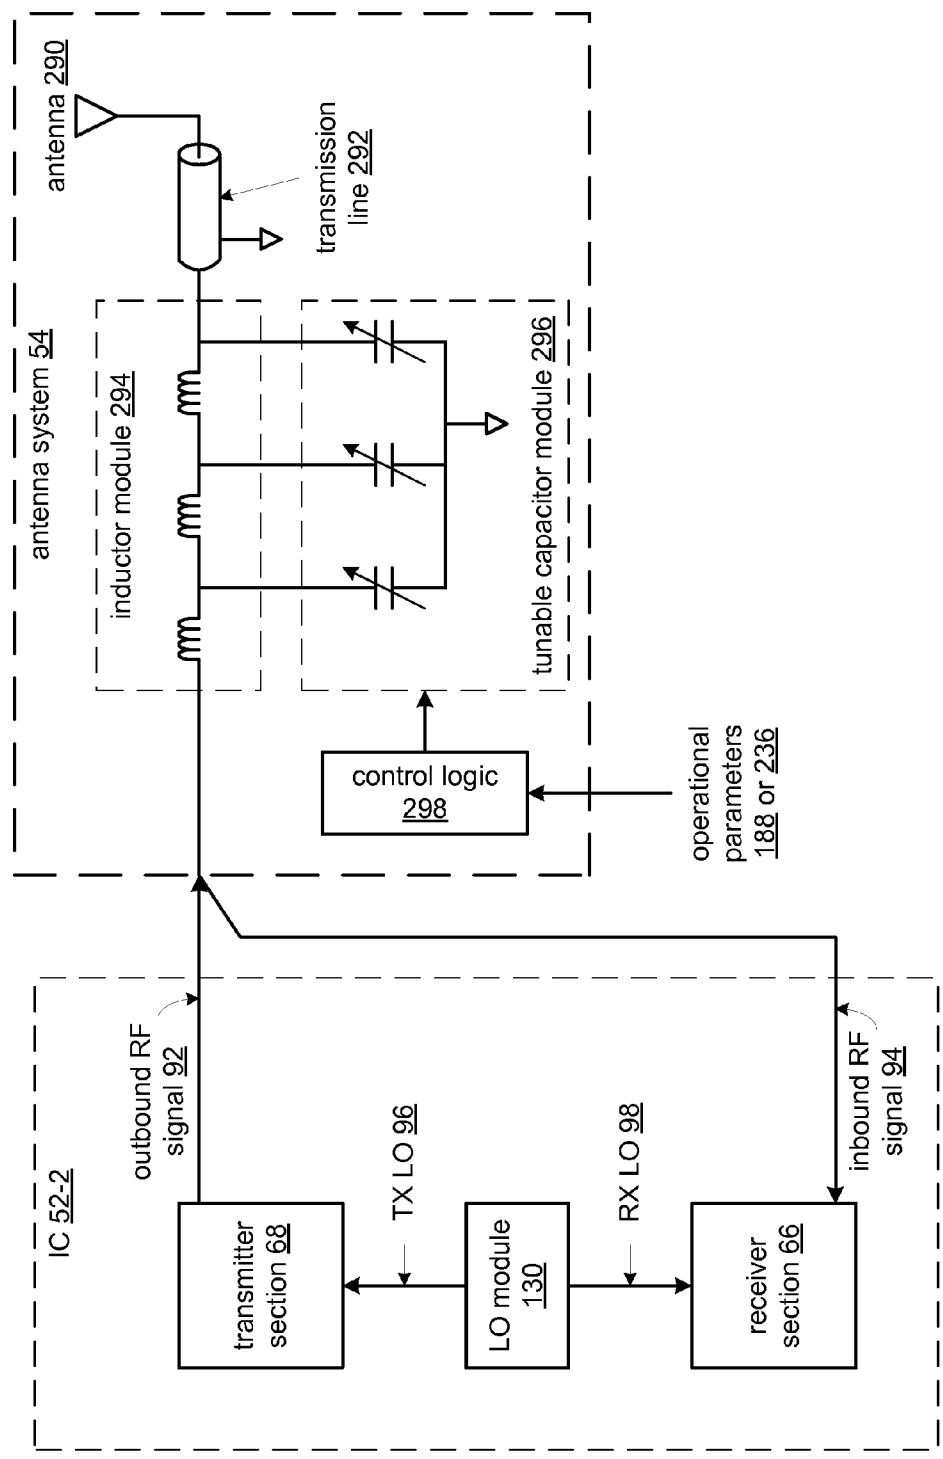


FIG. 18

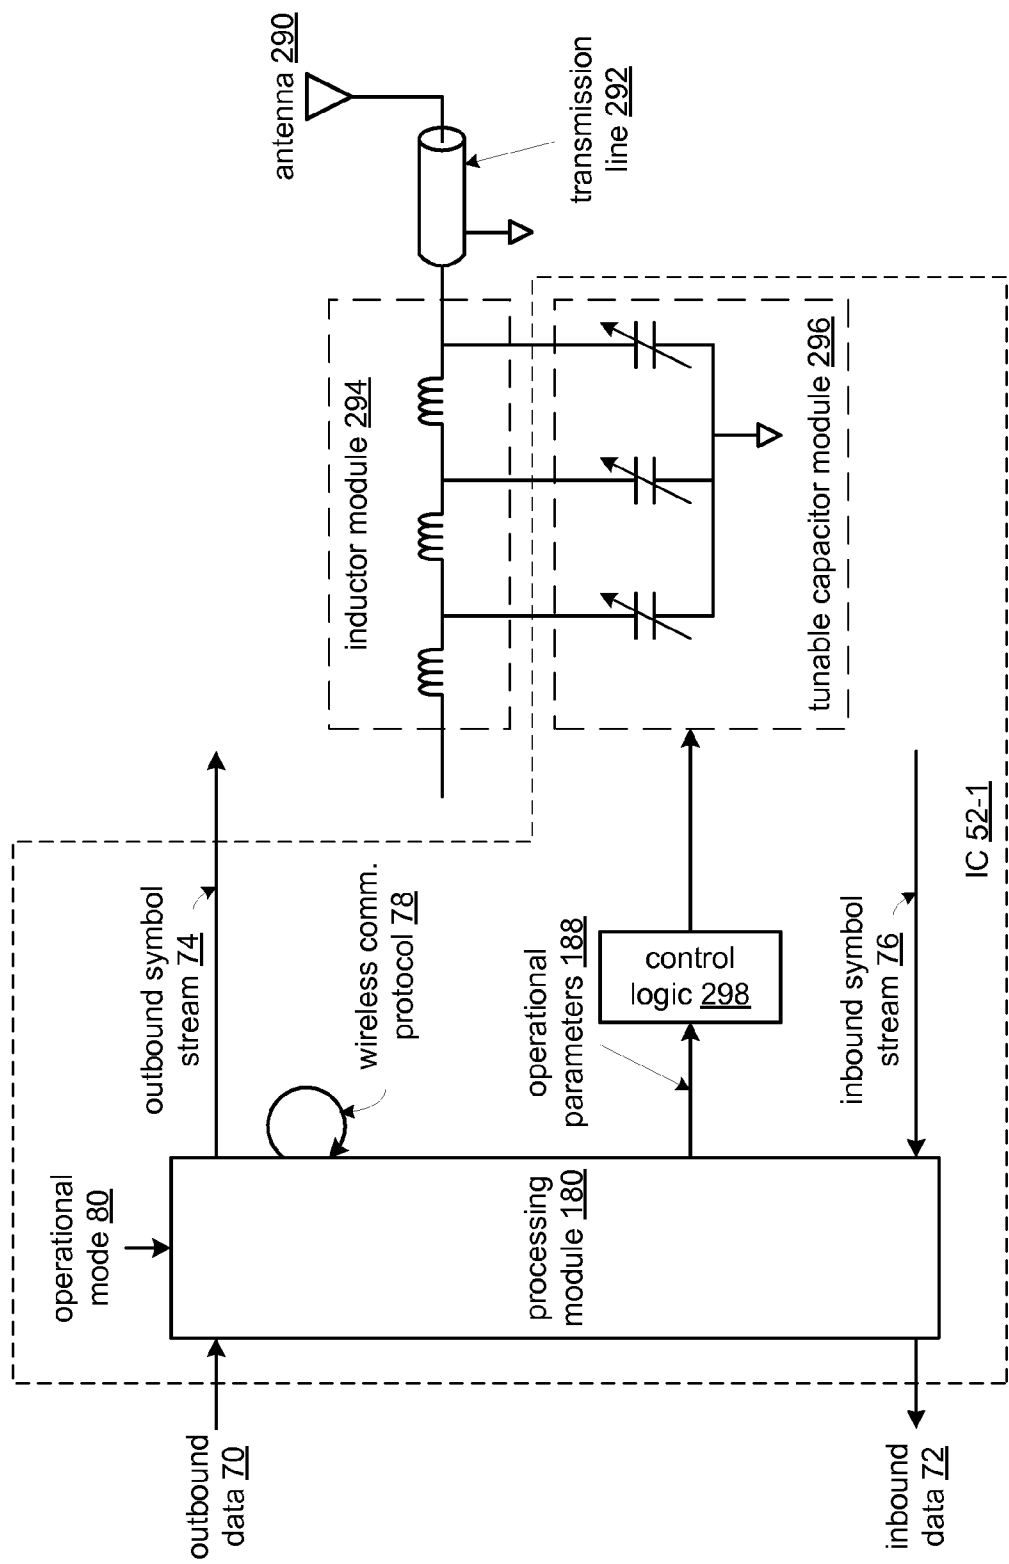


FIG. 19

CALIBRATION OF WIRELESS COMMUNICATION DEVICE

CROSS REFERENCE TO RELATED PATENTS

[0001] The present U.S. Utility Patent Application claims priority pursuant to 35 U.S.C. §120, as a divisional, to the U.S. Utility application Ser. No. 11/729,271, entitled "Calibration of Wireless Communication Device," (Attorney Docket No. BP6203), filed Mar. 28, 2007, pending, which claims priority pursuant to 35 U.S.C. §119(e) to U.S. Provisional Patent Application Ser. No. 60/906,979, entitled "Calibration of Wireless Communication Device," (Attorney Docket No. BP6203), filed Mar. 14, 2007, expired, which is hereby incorporated herein by reference in its entirety and made part of the present U.S. Utility Patent Application for all purposes.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] Not Applicable

INCORPORATION-BY-REFERENCE OF MATERIAL SUBMITTED ON A COMPACT DISC

[0003] Not Applicable

BACKGROUND OF THE INVENTION

[0004] 1. Technical Field of the Invention

[0005] This invention relates generally to wireless communication systems and more particularly to wireless communication devices having an integrated circuit operating within such systems.

[0006] 2. Description of Related Art

[0007] Communication systems are known to support wireless and wire lined communications between wireless and/or wire lined communication devices. Such communication systems range from national and/or international cellular telephone systems to the Internet to point-to-point in-home wireless networks. Each type of communication system is constructed, and hence operates, in accordance with one or more communication standards. For instance, wireless communication systems may operate in accordance with one or more standards including, but not limited to, IEEE 802.11, Bluetooth, advanced mobile phone services (AMPS), digital AMPS, global system for mobile communications (GSM), code division multiple access (CDMA), local multi-point distribution systems (LMDS), multi-channel-multi-point distribution systems (MMDS), radio frequency identification (RFID), Enhanced Data rates for GSM Evolution (EDGE), General Packet Radio Service (GPRS), and/or variations thereof.

[0008] Depending on the type of wireless communication system, a wireless communication device, such as a cellular telephone, two-way radio, personal digital assistant (PDA), personal computer (PC), laptop computer, home entertainment equipment, RFID reader, RFID tag, et cetera communicates directly or indirectly with other wireless communication devices. For direct communications (also known as point-to-point communications), the participating wireless communication devices tune their receivers and transmitters to the same channel or channels (e.g., one of the plurality of radio frequency (RF) carriers of the wireless communication system or a particular RF frequency for some systems) and communicate over that channel(s). For indirect wireless com-

munications, each wireless communication device communicates directly with an associated base station (e.g., for cellular services) and/or an associated access point (e.g., for an in-home or in-building wireless network) via an assigned channel. To complete a communication connection between the wireless communication devices, the associated base stations and/or associated access points communicate with each other directly, via a system controller, via the public switch telephone network, via the Internet, and/or via some other wide area network.

[0009] For each wireless communication device to participate in wireless communications, it includes a built-in radio transceiver (i.e., receiver and transmitter) or is coupled to an associated radio transceiver (e.g., a station for in-home and/or in-building wireless communication networks, RF modem, etc.). As is known, the receiver is coupled to an antenna and includes a low noise amplifier, one or more intermediate frequency stages, a filtering stage, and a data recovery stage. The low noise amplifier receives inbound RF signals via the antenna and amplifies them. The one or more intermediate frequency stages mix the amplified RF signals with one or more local oscillations to convert the amplified RF signal into baseband signals or intermediate frequency (IF) signals. The filtering stage filters the baseband signals or the IF signals to attenuate unwanted out of band signals to produce filtered signals. The data recovery stage recovers raw data from the filtered signals in accordance with the particular wireless communication standard.

[0010] As is also known, the transmitter includes a data modulation stage, one or more intermediate frequency stages, and a power amplifier. The data modulation stage converts raw data into baseband signals in accordance with a particular wireless communication standard. The one or more intermediate frequency stages mix the baseband signals with one or more local oscillations to produce RF signals. The power amplifier amplifies the RF signals prior to transmission via an antenna.

[0011] While transmitters generally include a data modulation stage, one or more IF stages, and a power amplifier, the particular implementation of these elements is dependent upon the data modulation scheme of the standard being supported by the transceiver. For example, if the baseband modulation scheme is Gaussian Minimum Shift Keying (GMSK), the data modulation stage functions to convert digital words into quadrature modulation symbols, which have a constant amplitude and varying phases. The IF stage includes a phase locked loop (PLL) that generates an oscillation at a desired RF frequency, which is modulated based on the varying phases produced by the data modulation stage. The phase modulated RF signal is then amplified by the power amplifier in accordance with a transmit power level setting to produce a phase modulated RF signal.

[0012] As another example, if the data modulation scheme is 8-PSK (phase shift keying), the data modulation stage functions to convert digital words into symbols having varying amplitudes and varying phases. The IF stage includes a phase locked loop (PLL) that generates an oscillation at a desired RF frequency, which is modulated based on the varying phases produced by the data modulation stage. The phase modulated RF signal is then amplified by the power amplifier in accordance with the varying amplitudes to produce a phase and amplitude modulated RF signal.

[0013] As yet another example, if the data modulation scheme is x-QAM (16, 64, 128, 256 quadrature amplitude

modulation), the data modulation stage functions to convert digital words into Cartesian coordinate symbols (e.g., having an in-phase signal component and a quadrature signal component). The IF stage includes mixers that mix the in-phase signal component with an in-phase local oscillation and mix the quadrature signal component with a quadrature local oscillation to produce two mixed signals. The mixed signals are summed together and filtered to produce an RF signal that is subsequently amplified by a power amplifier.

[0014] As a further example, the resulting RF signal has different carrier frequencies in different frequency bands depending on the standard being supported by the transceiver. For instance, a GSM, EDGE, or GPRS compliant transceiver uses a 900 MHz, 1800 MHz, and/or 1900 MHz frequency band; a WCDMA compliant transceiver uses a 1900 MHz and 2100 MHz frequency band; an IEEE 802.11 compliant transceiver uses a 2.4 GHz or 5 GHz frequency band; and a Bluetooth compliant transceiver uses a 2.4 GHz frequency band. As such, the local oscillation, the mixers of the transmit and receive IF stages, the low noise amplifier, the power amplifier, and the RF filtering are designed to operating within a specific frequency band.

[0015] As the desire for wireless communication devices to support multiple standards continues, recent trends include the desire to integrate more functions on to a single chip. However, such desires have gone unrealized when it comes to implementing baseband and RF on the same chip for multiple wireless communication standards.

[0016] Therefore, a need exists for an integrated circuit (IC) that implements baseband and RF of multiple wireless communication standards on the same IC die.

BRIEF SUMMARY OF THE INVENTION

[0017] The present invention is directed to apparatus and methods of operation that are further described in the following Brief Description of the Drawings, the Detailed Description of the Invention, and the claims. Other features and advantages of the present invention will become apparent from the following detailed description of the invention made with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

[0018] FIG. 1 is a schematic block diagram of an embodiment of a wireless communication system in accordance with the present invention;

[0019] FIG. 2 is a schematic block diagram of an embodiment of a wireless communication device in accordance with the present invention;

[0020] FIG. 3 is a schematic block diagram of another embodiment of a wireless communication device in accordance with the present invention;

[0021] FIG. 4 is a schematic block diagram of another embodiment of a wireless communication device in accordance with the present invention;

[0022] FIG. 5 is a schematic block diagram of an embodiment of a local oscillation module, a transmitter section, and a receiver section in accordance with the present invention;

[0023] FIG. 6 is a schematic block diagram of another embodiment of a local oscillation module, a transmitter section, and a receiver section coupled to a calibration processing module in accordance with the present invention;

[0024] FIG. 7 is a schematic block diagram of another embodiment of a wireless communication device in accordance with the present invention;

[0025] FIG. 8 is a schematic block diagram of another embodiment of a wireless communication device in accordance with the present invention;

[0026] FIG. 9 is a schematic block diagram of an embodiment of an antenna system in accordance with the present invention;

[0027] FIG. 10 is a diagram of example frequency bands of an antenna system in accordance with the present invention;

[0028] FIG. 11 is a diagram of an embodiment of an antenna system in accordance with the present invention;

[0029] FIG. 12 is a schematic block diagram of another embodiment of an antenna system in accordance with the present invention;

[0030] FIG. 13 is a schematic block diagram of another embodiment of a wireless communication device in accordance with the present invention;

[0031] FIG. 14 is a diagram of another embodiment of an antenna system in accordance with the present invention;

[0032] FIG. 15 is a schematic block diagram of another embodiment of an antenna system in accordance with the present invention;

[0033] FIG. 16 is a diagram of an embodiment of a wireless communication device in accordance with the present invention;

[0034] FIG. 17 is a schematic block diagram of another embodiment of an antenna system in accordance with the present invention;

[0035] FIG. 18 is a schematic block diagram of another embodiment of a wireless communication device in accordance with the present invention; and

[0036] FIG. 19 is a schematic block diagram of another embodiment of a wireless communication device in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0037] FIG. 1 is a schematic block diagram illustrating a communication system 10 that includes a plurality of base stations and/or access points 12, 16, a plurality of wireless communication devices 18-32 and a network hardware component 34. Note that the network hardware 34, which may be a router, switch, bridge, modem, system controller, et cetera provides a wide area network connection 42 for the communication system 10. Further note that the wireless communication devices 18-32 may be laptop host computers 18 and 26, personal digital assistant hosts 20 and 30, personal computer hosts 24 and 32 and/or cellular telephone hosts 22 and 28. The details of the wireless communication devices will be described in greater detail with reference to FIGS. 2-13.

[0038] Wireless communication devices 22, 23, and 24 are located within an independent basic service set (IBSS) area and communicate directly (i.e., point to point). In this configuration, these devices 22, 23, and 24 may only communicate with each other. To communicate with other wireless communication devices within the system 10 or to communicate outside of the system 10, the devices 22, 23, and/or 24 need to affiliate with one of the base stations or access points 12 or 16.

[0039] The base stations or access points 12, 16 are located within basic service set (BSS) areas 11 and 13, respectively, and are operably coupled to the network hardware 34 via local area network connections 36, 38. Such a connection provides

the base station or access point **12 16** with connectivity to other devices within the system **10** and provides connectivity to other networks via the WAN connection **42**. To communicate with the wireless communication devices within its BSS **11** or **13**, each of the base stations or access points **12-16** has an associated antenna or antenna array. For instance, base station or access point **12** wirelessly communicates with wireless communication devices **18** and **20** while base station or access point **16** wirelessly communicates with wireless communication devices **26-32**. Typically, the wireless communication devices register with a particular base station or access point **12, 16** to receive services from the communication system **10**.

[0040] Typically, base stations are used for cellular telephone systems (e.g., advanced mobile phone services (AMPS), digital AMPS, global system for mobile communications (GSM), code division multiple access (CDMA), local multi-point distribution systems (LMDS), multi-channel-multi-point distribution systems (MMDS), Enhanced Data rates for GSM Evolution (EDGE), General Packet Radio Service (GPRS), high-speed downlink packet access (HSDPA), high-speed uplink packet access (HSUPA and/or variations thereof) and like-type systems, while access points are used for in-home or in-building wireless networks (e.g., IEEE 802.11, Bluetooth, ZigBee, any other type of radio frequency based network protocol and/or variations thereof). Regardless of the particular type of communication system, each wireless communication device includes a built-in radio and/or is coupled to a radio.

[0041] FIG. 2 is a schematic block diagram of an embodiment of a wireless communication device **50** that includes an integrated circuit **52** and an antenna system **54**. The communication device **50** may be one of the communication devices **18-32** of FIG. 1 or another type of portable device that provides wireless services. In this embodiment, the wireless communication device **50** supports one or more of wireless local area network (WLAN) communications **55**, wireless personal area network (WPAN) communications **56**, and wireless wide area network (WWAN) communications **58**.

[0042] The WLAN communications **55** may be in accordance with past, present, or future versions of IEEE 802.11 (e.g., 802.11a, b, g, n, etc.). In addition, the WLAN communications **55** may be in accordance with a far field communication (FFC) protocol as may be used in an RFID system. For example, the wireless communication device **50** may include an RFID reader that communicates with RFID tags within its coverage area via an RF signal having a carrier frequency at 13 MHz, 900 MHz, etc., using a back-scattering technique. Alternatively, the wireless communication device **50** may include an RFID tag.

[0043] The WPAN communications **56** may be in accordance with past, present, or future versions of Bluetooth, ZigBee, and/or IEEE 802.15 x (e.g., IEEE 802.15.1, .2, .3, and .4). In addition, the WPAN communications **56** may be in accordance with a near field communication (NFC) protocol as may be used in an RFID system, card reading system, chip reading system, etc. For example, the WPAN communications **56** may be with a headset, a wireless mouse, a wireless keypad, a wireless keyboard, etc.

[0044] The WWAN communications **58** may be in accordance with past, present, or future versions of cellular voice standards (e.g., global system for mobile communications (GSM), wide bandwidth code division multiplexing (WCDMA), CDMA), cellular data standards (e.g., high-

speed downlink packet access (HSDPA), high-speed uplink packet access (HSUPA), Enhanced Data rates for GSM Evolution (EDGE), General Packet Radio Service (GPRS)), broadcast television standards (e.g., digital video broadcasting-handheld (DVB-H), digital multimedia broadcasting (DMB)), broadcast radio (e.g., FM), and/or global positioning system (GPS) standards.

[0045] FIG. 3 is a schematic block diagram of another embodiment of a wireless communication device **50** that includes the IC **52** and the antenna system **54**. In this embodiment, the IC **52** includes a baseband processing module **60**, a network processing module **62**, a calibration processing module **64**, a receiver section **66**, and a transmitter section **68**. The baseband processing module **60**, the network processing module **62**, and the calibration processing module **64** may be separate processing modules, a shared processing module, or a combination thereof. The processing module may be a single processing device or a plurality of processing devices. Such a processing device may be a microprocessor, microcontroller, digital signal processor, microcomputer, central processing unit, field programmable gate array, programmable logic device, state machine, logic circuitry, analog circuitry, digital circuitry, and/or any device that manipulates signals (analog and/or digital) based on hard coding of the circuitry and/or operational instructions. The processing module may have an associated memory and/or memory element, which may be a single memory device, a plurality of memory devices, and/or embedded circuitry of the processing module. Such a memory device may be a read-only memory, random access memory, volatile memory, non-volatile memory, static memory, dynamic memory, flash memory, cache memory, and/or any device that stores digital information. Note that when the processing module implements one or more of its functions via a state machine, analog circuitry, digital circuitry, and/or logic circuitry, the memory and/or memory element storing the corresponding operational instructions may be embedded within, or external to, the circuitry comprising the state machine, analog circuitry, digital circuitry, and/or logic circuitry. Further note that, the memory element stores, and the processing module executes, hard coded and/or operational instructions corresponding to at least some of the steps and/or functions illustrated in FIGS. 3-19.

[0046] In operation, the network processing module **62** establishes a wireless communication protocol **78** in accordance with an operational mode **80** of the wireless communication device. The wireless communication protocol **78** may be one or more of a WLAN communication protocol (e.g., IEEE 802.11x, FFC), a WPAN communication protocol (e.g., Bluetooth, ZigBee, IEEE 802.15x, NFC) and a WWAN communication protocol (e.g., GSM, EDGE, GPRS, WCDMA, CDMA, HSDPA, HSUPA, DVB-H, DMB, GPS, FM). Note that the network processing module **62** may automatically detect the operational mode **80** and/or detect the operational mode **80** based on a user selection.

[0047] The network processing module **62** also establishes operational parameters **82** based on the wireless communication protocol **78**. The operational parameters **82** may include limits and/or specific values for one or more of frequency bands, channels, gain settings, filter corner frequency or frequencies, filter attenuation roll-off, bandwidth, center frequency, quality factor, frequency dependent impedance value, attenuation setting, gain roll-off, transmit power settings, antenna configuration settings, and frequency

response. Note that the operational parameters **82** may include default settings and/or include calculated settings for one or more of the parameters as will be further described with reference to FIG. 6.

[0048] As an example, assume that the mode of operation **80** is WLAN and the wireless communication protocol is IEEE 802.11g. In this example, the operational parameters **82** indicate initial values and/or ranges of values for one or more of: a frequency band of 2.4 GHz, oscillation settings for the transmit and receive local oscillations **96** and **98** (e.g., 2.4 GHz for direct conversion in this example), LNA settings (e.g., gain, input impedance, frequency response, load, bandwidth, etc.), antenna matching settings (e.g., impedance, frequency response, bandwidth, quality factor, center frequency, etc.) for the receiver and transmitter sections **66** and **68**, the antenna configuration settings (e.g., antenna configuration, frequency response, quality factor, impedance, bandwidth, center frequency, etc.), RF filtering settings (gain/attenuation value, bandwidth, roll-off, corner frequency(ies), etc.), analog filtering settings (e.g., gain/attenuation value, bandwidth, roll-off, corner frequency(ies), etc.), transmitter RF signal processing (e.g., beamforming, antenna polarization, maximum signal to noise ratio, and maximum signal to interference ratio, etc.), PA settings (e.g., gain, output impedance, frequency response, load, bandwidth, transmit power level, etc.), and up-conversion and/or down conversion mixer settings (e.g., gain, load, frequency response, etc.). Thus, the wireless communication device **50** is initialized and/or operates in accordance with the operational parameters **82**.

[0049] In another embodiment, the calibration processing module **64** providing the RF receive feedback **84** and the RF transmit feedback **86** to the network processing module **62**. The network processing module **62** utilizes the RF receive feedback **84** and the RF transmit feedback **86** in addition to three wireless communication protocol **78** to establish the operational parameters **82**.

[0050] The calibration processing module **84** receives the operational parameters **82** and receives feedback from the receiver section **66** and the transmitter section **68** (e.g., RF receive feedback **84** and RF transmit feedback **86**, respectively). The RF receive feedback **84** may include one or more of: received signal strength indication (RSSI), receive antenna matching performance indication (e.g., measurements indicative of impedance, frequency response, bandwidth, quality factor, center frequency, etc.), LNA performance indication (e.g., measurements indicative of gain, input impedance, frequency response, bandwidth, loading, etc.), receiver RF filtering performance indication (e.g., measurements indicative of gain/attenuation, bandwidth, roll-off, corner frequency(ies), etc.), down-conversion performance indication (e.g., measurements indicative of gain, load, frequency response, etc.), and receive analog filtering performance indication (e.g., gain/attenuation value, bandwidth, roll-off, corner frequency(ies), etc.). The RF transmit feedback **86** may include one or more of: a transmit power level indication, transmit antenna matching performance indication (e.g., measurements indicative of impedance, frequency response, bandwidth, quality factor, center frequency, etc.), PA performance indication (e.g., measurements indicative of gain, input impedance, frequency response, bandwidth, transmit power level, linearity, loading, etc.), transmit RF filtering performance indication (e.g., measurements indicative of gain/attenuation, bandwidth, roll-off, corner frequency(ies), etc.), up-conversion performance indication (e.g., measure-

ments indicative of gain, load, frequency response, etc.), and transmit analog filtering performance indication (e.g., gain/attenuation value, bandwidth, roll-off, corner frequency(ies), etc.).

[0051] The calibration processing module **84** uses the operational parameters **82** and the RF receive feedback **84** to generate RF receiver calibration information **88**. In an embodiment, the calibration processing module **84** utilizes the operational parameters **82** to determine desired performance levels of the receiver section **66** and uses the RF receive feedback **84** to determine actual performance levels. The calibration processing module **84** determines differences between the desired performance levels and the actual performance levels to generate the RF receiver calibration information **88**. The RF receiver calibration information **88** may include one or more of: default settings for one or more components of the receiver section **66**, new or adjusted LNA settings, new or adjusted antenna matching settings, new or adjusted antenna configuration settings, new or adjusted RF filtering settings, new or adjusted analog filtering settings, and new or adjusted down conversion mixer settings.

[0052] The calibration processing module **84** also uses the operational parameters **82** and the RF transmit feedback **86** to generate RF transmitter calibration information **90**. In an embodiment, the calibration processing module **84** utilizes the operational parameters **82** to determine desired performance levels of the transmitter section **68** and uses the RF transmit feedback **86** to determine actual performance levels. The calibration processing module **84** determines differences between the desired performance levels and the actual performance levels to generate the RF transmitter calibration information **90**. The RF transmitter calibration information **90** may include one or more of: default settings for one or more components of the transmitter section **68**, new or adjusted PA settings, new or adjusted antenna matching settings, new or adjusted antenna configuration settings, new or adjusted RF filtering settings, new or adjusted analog filtering settings, and new or adjusted up-conversion mixer settings.

[0053] The baseband processing module **60** converts outbound data **70** (e.g., digitized voice, data, text, image file, audio file, video file, etc.) into an outbound symbol stream **74** in accordance with the wireless communication protocol **78**. The particular type of processing performed by the baseband processing module **60** is dependent upon the wireless communication protocol **78** and may include, but is not limited to, scrambling, encoding, puncturing, constellation mapping, PSK modulation, GMSK modulation, QPSK modulation, FSK modulation, 8-PSK modulation, n-QAM modulation, and/or digital baseband to IF conversion.

[0054] The baseband processing module **60** also converts an inbound symbol stream **76** into inbound data **72** (e.g., digitized voice, data, text, image file, audio file, video file, GPS signals, digitized FM audio, digital video broadcast, etc.) in accordance with the wireless communication protocol **78**. The particular type of processing performed by the baseband processing module **60** is dependent upon the wireless communication protocol **78** and may include, but is not limited to, descrambling, decoding, depuncturing, constellation demapping, PSK demodulation, GMSK demodulation, QPSK demodulation, FSK demodulation, 8-PSK demodulation, n-QAM demodulation, and/or IF to digital baseband conversion.

[0055] The receiver section **66** (embodiments of which will be described in greater detail with reference to FIGS. 5 and 6)

provides the RF receive feedback **84** and converts an inbound RF signal **94** into the inbound symbol stream **76** in accordance with the RF receiver calibration information **88** and a receive local oscillation **98**. The conversion performed by the receiver section **66** is dependent upon the wireless communication protocol. For example, if the wireless communication protocol utilizes Gaussian Minimum Shift Keying (GMSK) scheme, the receiver section **66** includes a GMSK receiver architecture to recover a GMSK modulated signal (e.g., the inbound symbol stream **76**) from the inbound RF signal **94**. As another example, if the wireless communication protocol utilizes an 8-PSK (phase shift keying) scheme and/or an x-QAM scheme, the receiver section **66** includes an 8-PSK or x-QAM receiver architecture to recover an 8-PSK or x-QAM modulated signal (e.g., the inbound symbol stream **76**) from the inbound RF signal **94**.

[0056] The transmitter section **68** (embodiments of which will be described in greater detail with reference to FIGS. **5** and **6**) provides the RF transmit feedback **86** and converts the outbound symbol stream **74** into an outbound RF signal **92** in accordance with the RF transmitter calibration information **90** and a transmit local oscillation **96**. The conversion performed by the transmitter section **68** is dependent upon the wireless communication protocol. For example, if the wireless communication protocol utilizes a GMSK scheme, the transmitter section **68** includes a GMSK transmitter architecture to convert a GMSK modulated signal (e.g., the outbound symbol stream **76**) into the outbound RF signal **92**. As another example, if the wireless communication protocol utilizes an 8-PSK (phase shift keying) scheme and/or an x-QAM scheme, the transmitter section **68** includes an 8-PSK or x-QAM transmitter architecture to convert an 8-PSK or x-QAM modulated signal (e.g., the outbound symbol stream **76**) into the outbound RF signal **92**.

[0057] The antenna system **54** (embodiments of which are described in greater detail with reference to FIGS. **8-19**) provides the inbound RF signal **94** to the receiver section **66** and receives the outbound RF signal **92** from the transmitter section **68**. The antenna section **54** then transmits the outbound RF signal **92**.

[0058] FIG. **4** is a schematic block diagram of another embodiment of a wireless communication device **50** that includes the IC **52** and the antenna system **54**. The IC **52** includes the baseband processing module **60**, the network processing module **62**, the calibration processing module **64**, the receiver section **66**, and the transmitter section **68**. The baseband processing module **60**, the network processing module **62**, and the calibration processing module **64** may be separate processing modules, a shared processing module, or a combination thereof.

[0059] In this embodiment, the wireless communication device **50** is in a multi-system operational mode **100** (e.g., supporting two or more wireless communication protocols concurrent operations and/or contemporaneous operations). In this embodiment, the network processing module **62** establishes first and second wireless communication protocols **78** and **102** in accordance with a concurrent operational mode **100** of the wireless communication device **50**. Note that the first and second wireless communication protocols **78** and **102** may each be one or more of a WLAN communication protocol (e.g., IEEE 802.11x, FFC), a WPAN communication protocol (e.g., Bluetooth, ZigBee, IEEE 802.15x, NFC) and a

WWAN communication protocol (e.g., GSM, EDGE, GPRS, WCDMA, CDMA, HSDPA, HSUPA, DVB-H, DMB, GPS, FM).

[0060] The network processing module **62** also establishes first operational parameters **82** based on the first wireless communication protocol **78** and establishes second operational parameters **116** based on the second wireless communication protocol **102**. The first and second operational parameters **82** and **116** may be one or more of the operational parameters **82** discussed with reference to FIG. **3**.

[0061] The baseband processing module **60** converts first outbound data **70** into a first outbound symbol stream **74** in accordance with a first wireless communication protocol **78** and converts a first inbound symbol stream **76** into first inbound data **72** in accordance with the first wireless communication protocol **78**. The baseband processing module **60** also converts second outbound data **104** (e.g., digitized voice, data, text, image file, audio file, video file, etc.) into a second outbound symbol stream **106** in accordance with a second wireless communication protocol **102** and convert a second inbound symbol stream **126** into second inbound data **128** (e.g., digitized voice, data, text, image file, audio file, video file, GPS signals, digitized FM audio, digital video broadcast, etc.) in accordance with the second wireless communication protocol **102**.

[0062] The calibration processing module **64** is coupled to receive first RF receive feedback **84** corresponding to the first wireless communication protocol **78**; receive second RF receive feedback **124** corresponding to the second wireless communication protocol **102**; receive first RF transmit feedback **86** corresponding to the first wireless communication protocol **78**; and receive second RF transmit feedback **112** corresponding to the second wireless communication protocol **102**. The second RF transmit and receive feedback may be similar in scope to the first RF transmit and receive feedback discussed with reference to FIG. **3**.

[0063] The calibration processing module **64** is also coupled to generate first RF receiver calibration information **88** based on the first operational parameters **82** and the first RF receive feedback **84**; generate second RF receiver calibration information **122** based on the second operational parameters **116** and the second RF receive feedback **124**; generate first RF transmitter calibration information **90** based on the first operational parameters **82** and the first RF transmit feedback **86**; and generate second RF transmitter calibration information **122** based on the second operational parameters **116** and the second RF transmit feedback **112**. The second RF RX and TX calibration information **122** and **114** may be similar in scope to the first RF RX and TX calibration information **88** and **90** discussed with reference to FIG. **3**.

[0064] The receiver section **66** provides the first and second RF receive feedback **84** and **124** to the calibration module **64**. The receiver section **66** also converts a first inbound RF signal **94** into the first inbound symbol stream **76** in accordance with the first RF receiver calibration information **88** and a first receive local oscillation **98**. The receiver section **66** further converts a second inbound RF signal **118** into the second inbound symbol stream **126** in accordance with the second RF receiver calibration information **122** and a second receive local oscillation **120**.

[0065] The transmitter section **68** provides the first and second RF transmit feedback **86** and **112** to the calibration processing module **64**. In addition, the transmitter section **68** converts the first outbound symbol stream **74** into a first

outbound RF signal **92** in accordance with the first RF transmitter calibration information **90** and a first transmit local oscillation **96**. The transmitter section **68** also converts the second outbound symbol stream **106** into a second outbound RF signal **110** in accordance with the second RF transmitter calibration information **114** and a second transmit local oscillation **108**.

[0066] In another embodiment, the network processing module **62** may determine whether the first and second wireless communication protocols **78** and **102** have at least partially overlapping frequency bands. For example, the network processing module **62** may determine that the first wireless communication protocol **78** is EDGE operating in the 1900 MHz frequency band and the second communication protocol is WCDMA operating in the 1900 MHz and 2100 MHz frequency bands.

[0067] If the first and second wireless communication protocols have at least partially overlapping frequency bands, the network processing module **62** determines whether the first outbound RF signal will interfere with the second inbound RF signal or whether the second outbound RF signal will interfere with the first inbound RF signal. Such a determination may be made by intrinsic data or empirical data. For example, the network processing module **62** determines whether the EDGE RF signals will interfere with the WCDMA RF signals, and vice versa. Since both use the 1900 MHz frequency band, it can be assumed that the EDGE and WCDMA RF signals will interfere with each other if simultaneously operated. However, by using a polarized antenna structure, selective RF filtering, and selective baseband processing, it is possible for simultaneous EDGE and WCDMA operation. Alternatively, simultaneous operation of the EDGE and WCDMA may occur via a nested sharing of the appropriate RF resources, where one of the protocols reserves the RF resources and allocates part of its granted RF resources to the other protocol.

[0068] If the first outbound RF signal will interfere with the second inbound RF signal or if the second outbound RF signal will interfere with the first inbound RF signal, the network processing module **62** establishes an RF resource sharing protocol between the first and second wireless communication protocols. The RF resource sharing protocol may include time division multiplexing, frequency division multiplexing, a round robin scheme, a collision sense multiple access (CSMA) with collision avoidance, etc. Note that the RF resource(s) being shared may be one or more channels within a frequency band, a particular carrier frequency within the frequency band, and/or multiple carrier frequencies within the frequency band.

[0069] FIG. **5** is a schematic block diagram of an embodiment of a local oscillation module **130**, a transmitter section **68**, and a receiver section **66** that may be used in the wireless communication device **50** of FIG. **4**. In this embodiment, the transmitter section **68** includes a first transmitter module **136** and a second transmitter module **138** and the receiver section **66** includes a first receiver module **132** and a second receiver module **134**. The local oscillation module **130** includes two or more local oscillators to produce the transmit and receive local oscillations **96**, **98**, **108**, and **120**. One of the local oscillations is shown to include a signal source (e.g., a crystal oscillator, phase locked loop, etc.), a $\frac{1}{2}$ frequency divider, mixers, and a phase shift (e.g., ϕ) to produce two pairs of local oscillations (e.g., LOI_1 and LOQ_1 and LOI_2 and LOQ_2).

[0070] Each of the transmitter modules **136** and **138** may be of a similar construct and each of the receiver modules **132** and **134** may also be of a similar construct. For example, the transmitter modules **136** and **138** may include two power amplifier modules (e.g., each including one or more power amplifiers and one or more amplifier drivers coupled in series and/or in parallel), a first pair of mixers, and a second pair of mixers. The first pair of mixers mix an analog and filtered representation of the outbound symbol stream **74** or **106** with a first local oscillation pair (e.g., LOI_1 and LOQ_1) to produce a mixed signal that is amplified by a first one of the power amplifier modules in accordance with the RF TX calibration information **90** or **114**. The second pair of mixers mix the analog and filtered representation of the outbound symbol stream **74** or **106** with a second local oscillation pair (e.g., LOI_2 and LOQ_2) to produce a second mixed signal that is amplified by a second one of the power amplifier modules in accordance with the RF TX calibration information **90** or **114**. The two RF signals are combined in air to produce the outbound RF signal **92** or **110**. In this manner, by controlling the phase shift within the local oscillation module **130** beam-forming, polarization diversity, maximum signal to interference ratio, and/or maximum signal to noise ratio may be obtained.

[0071] Continuing with the preceding example, the receiver modules **132** and **134** may each include low noise amplifier (LNA) modules (e.g., one or more low noise amplifiers coupled in series and/or in parallel), and two pairs of mixers. Each of the LNA modules receives the inbound RF signal **94** or **118** and amplifies it in accordance with the RF RX calibration information **88** or **122** to produce amplified inbound RF signals. The first pair of mixers mixes one of the amplified inbound RF signals with a first local oscillation pair (e.g., LOI_1 and LOQ_1) to produce a first analog representation of the inbound symbol stream. The second pair of mixers mixes the other amplified inbound RF signal with a second local oscillation pair (e.g., LOI_2 and LOQ_2) to produce a second analog representation of the inbound symbol stream. The first and second analog representations of the inbound symbol stream are combined to produce an analog representation of the inbound symbol stream **76** or **126**.

[0072] FIG. **6** is a schematic block diagram of another embodiment of a local oscillation module **130**, a transmitter section **68**, and a receiver section **66** coupled to a calibration processing module **64** via an analog to digital interface **160**. In this embodiment, the receive section **66** includes an antenna matching circuit module **140**, an RF filter module **142**, an LNA module **144**, a down conversion module **146**, and an analog filter module **148**. The transmitter section **68** includes an analog filter module **150**, an up conversion module **152**, a power amplifier (PA) module **154**, an RF filtering module **156**, and an antenna matching circuit module **158**.

[0073] Within the receiver section **66**, the antenna matching circuit module **140**, which may include a transmission line, an impedance matching circuit, and/or tuning circuit, is coupled to receive the inbound RF signal **94** and/or **118** from the antenna system **54**. The antenna matching circuit module **140** may be tuned in accordance with a matching control signal of the RF receiver calibration information **88** and/or **122**. For example, the RF receiver calibration information **88** and/or **122** may provide control signals to set an impedance, bandwidth, center frequency, and/or quality factor of the antenna matching circuit module **140** to support the particular wireless communication protocol. In addition, the antenna match-

ing circuit module **140** may generate receive antenna matching feedback of the RF receive feedback **84** and/or **124**. For example, the receive antenna matching feedback may include measurements indicative of impedance, frequency response, bandwidth, quality factor, center frequency, etc. As an alternative example, the antenna matching circuit module **140** may include processing circuitry to interpret such measurements to calculate its input impedance, its frequency response, its bandwidth, its quality factor, its center frequency, etc. and to provide such values to the calibration module **64** via the analog to digital interface **160**.

[0074] The RF filtering module **142** is coupled to filter the inbound RF signal in accordance with an RF filter control signal of the RF receiver calibration information **88** and/or **122** to produce a filtered inbound RF signal. For example, the RF filtering module **142** may adjust its gain/attenuation, its bandwidth, its roll-off, its corner frequency or frequencies, etc. in accordance with the RF filter control signal. In addition, the RF filtering module **142** may generate RF receive filtering feedback of the RF receive feedback **84** and/or **124**. Such RF receive filtering feedback may include measurements indicative of gain/attenuation, bandwidth, roll-off, corner frequency or frequencies, etc. Alternatively, the RF filtering module **142** may include processing circuitry to interpret the measurements to calculate its gain/attenuation, its bandwidth, its roll-off, its corner frequency or frequencies, etc. and to provide such values to the calibration module **64** via the analog to digital interface **160**.

[0075] The low noise amplifier (LNA) module **144** is coupled to amplify the filtered inbound RF signal in accordance with a LNA control signal of the RF receiver calibration information **88** and/or **122** to produce an amplified inbound RF signal. For example, the LNA module **144**, which may include one or more low noise amplifiers coupled in series and/or in parallel, may adjust its gain, its input impedance, its frequency response, its bandwidth, its loading, etc. in accordance with the LNA control signal. In addition, the LNA module **144** may generate LNA feedback of the RF receive feedback **84** and/or **124**. Such LNA feedback may include measurements indicative of gain, input impedance, frequency response, bandwidth, loading, etc. Alternatively, the LNA module **144** may include processing circuitry to interpret the measurements to calculate its gain, its input impedance, its frequency response, its bandwidth, its loading, etc. and to provide such values to the calibration module **64** via the analog to digital interface **160**.

[0076] The down conversion module **146**, which may include one or more pair of mixers and a combining circuit, is coupled to convert the amplified inbound RF signal into a baseband or near baseband signal (e.g., has a carrier frequency of 0 Hz to a few MHz) based on the receive local oscillation **98** and/or **120** and in accordance with a down conversion control signal of the RF receiver calibration information **88** and/or **122**. For example, the down conversion module **146** may adjust its gain, its load, its frequency response, etc. in accordance with the down conversion control signal. In addition, the down conversion module **146** may generate down conversion feedback of the RF receive feedback **84** and/or **124**. For example, the down conversion feedback may include measurements indicative of gain, load, frequency response, etc. Alternatively, the down conversion module **146** may include processing circuitry to interpret the measurements to calculate its gain, its load, its frequency

response, etc. and to provide such values to the calibration module **64** via the analog to digital interface **160**.

[0077] The analog baseband or near baseband filter module **148** is coupled to filter the baseband or near baseband signal in accordance with an analog filter control signal of the RF receiver calibration information **88** and/or **122** to produce an analog representation of the inbound symbol stream **76** and/or **126**. For example, the analog baseband or near baseband filter module **148** may adjust its gain/attenuation, its bandwidth, its roll-off, its corner frequency or corner frequencies, etc. in accordance with the analog filter control signal. In addition, the analog baseband or near baseband filter module **148**, which may include a gain stage, a low pass filter, and/or a bandpass filter, may generate analog filtering feedback of the RF receive feedback **84** and/or **124**. For example, the analog filtering feedback may include measurements indicative of gain/attenuation, bandwidth, roll-off, corner frequency, corner frequencies, etc. Alternatively, the analog baseband or near baseband filter module **148** may include processing circuitry to interpret the measurements to calculate its gain/attenuation, its bandwidth, its roll-off, its corner frequency or corner frequencies, etc. and to provide such values to the calibration module **64** via the analog to digital interface **160**.

[0078] In an embodiment, the network processing module **62** may establish the operational parameters to include a range of antenna matching parameters from which the matching control signal is generated; establish the operational parameters to include a range of RF filter control parameters from which the RF filter control signal is generated; establish the operational parameters to include a range of LNA parameters from which the LNA control signal is generated; establish the operational parameters to include a range of down-conversion parameters from which the down conversion control signal is generated; and/or establish the operational parameters to include a range of analog filter parameters from which the analog filter control signal is generated. As such, one or more of the components **140-148** of the receiver section **66** may be adjusted based on the RF receiver calibration information **88** or **122**. Alternatively, the network processing module **62** may generate the operational parameters **82** and/or **116** such that one or more of the components **140-148** of the receiver section **66** is set to a default, or nominal, operating level.

[0079] Within the transmitter section **68**, the analog baseband or near baseband filter module **150** is coupled to filter the outbound symbol stream **76** and/or **106** in accordance with an analog filter control signal of the RF transmitter calibration information **90** and/or **114** to produce an analog representation of the outbound symbol stream. For example, the analog baseband or near baseband filter module **150**, which may include a digital to analog converter, a gain stage, a low pass filter, and/or a bandpass filter, may adjust its gain/attenuation, its bandwidth, its roll-off, its corner frequency or corner frequencies, etc. in accordance with the analog filter control signal. In addition, the analog baseband or near baseband filter module **150** may generate analog filtering feedback of the RF transmit feedback **86** and/or **112**. For example, the analog filtering feedback may include measurements indicative of gain/attenuation, bandwidth, roll-off, corner frequency, corner frequencies, etc. Alternatively, the analog baseband or near baseband filter module **150** may include processing circuitry to interpret the measurements to calculate its gain/attenuation, its bandwidth, its roll-off, its corner

frequency or corner frequencies, etc. and to provide such values to the calibration module 64 via the analog to digital interface 160.

[0080] The up conversion module 152 is coupled to convert the analog representation of the outbound symbol stream into an up-converted signal based on the transmit local oscillation 96 and/or 108 and in accordance with an up conversion control signal of the RF transmitter calibration information 90 and/or 114. For example, the up conversion module 152, which may include one or more pair of mixers and a combining circuit, may adjust its gain, its load, its frequency response, etc. in accordance with the down conversion control signal. In addition, the up conversion module 152 may generate up conversion feedback of the RF transmit feedback 86 and/or 112. For example, the up conversion feedback may include measurements indicative of gain, load, frequency response, etc. Alternatively, the up conversion module 152 may include processing circuitry to interpret the measurements to calculate its gain, its load, its frequency response, etc. and to provide such values to the calibration module 64 via the analog to digital interface 160.

[0081] The power amplifier (PA) module 154 is coupled to amplify the up-converted signal in accordance with a PA control signal of the RF transmitter calibration information 90 and/or 114 to produce an amplified outbound RF signal. For example, the PA module 154, which may include one or more power amplifiers and/or one or more PA drivers coupled in series and/or in parallel, may adjust its gain, its input impedance, its frequency response, its bandwidth, its loading, etc. in accordance with the PA control signal. In addition, the PA module 154 may generate PA feedback of the RF transmit feedback 86 and/or 112. Such PA feedback may include measurements indicative of gain, input impedance, frequency response, bandwidth, loading, etc. Alternatively, the PA module 154 may include processing circuitry to interpret the measurements to calculate its gain, its input impedance, its frequency response, its bandwidth, its loading, etc. and to provide such values to the calibration module 64 via the analog to digital interface 160.

[0082] The RF filtering module 156 is coupled to filter the amplified outbound RF signal in accordance with an RF filter control signal of the RF transmitter calibration information to produce the outbound RF signal 92 and/or 110. For example, the RF filtering module 156 may adjust its gain/attenuation, its bandwidth, its roll-off, its corner frequency or frequencies, etc. in accordance with the RF filter control signal. In addition, the RF filtering module 156 may generate RF transmit filtering feedback of the RF transmit feedback 86 and/or 112. Such RF transmit filtering feedback may include measurements indicative of gain/attenuation, bandwidth, roll-off, corner frequency or frequencies, etc. Alternatively, the RF filtering module 156 may include processing circuitry to interpret the measurements to calculate its gain/attenuation, its bandwidth, its roll-off, its corner frequency or frequencies, etc. and to provide such values to the calibration module 64 via the analog to digital interface 160.

[0083] The antenna matching circuit module 158, which may include a transmission line, an impedance matching circuit, and/or tuning circuit, is coupled to provide the outbound RF signal 92 and/or 110 to the antenna system 54. The antenna matching circuit module 158 may be tuned in accordance with a matching control signal of the RF transmitter calibration information 86 and/or 112. For example, the RF transmitter calibration information 86 and/or 112 may pro-

vide control signals to set an impedance, bandwidth, center frequency, and/or quality factor of the antenna matching circuit module 158 to support the particular wireless communication protocol. In addition, the antenna matching circuit module 158 may generate receive antenna matching feedback of the RF transmit feedback 90 and/or 114. For example, the transmit antenna matching feedback may include measurements indicative of impedance, frequency response, bandwidth, quality factor, center frequency, etc. As an alternative example, the antenna matching circuit module 158 may include processing circuitry to interpret such measurements to calculate its input impedance, its frequency response, its bandwidth, its quality factor, its center frequency, etc. and to provide such values to the calibration module 64 via the analog to digital interface 160.

[0084] In an embodiment, the network processing module 62 may establish the operational parameters to include a range of analog filter parameters from which the analog filter control signal is generated; establish the operational parameters to include a range of up-conversion parameters from which the up conversion control signal is generated; establish the operational parameters to include a range of PA parameters from which the PA control signal is generated; establish the operational parameters to include a range of RF filter control parameters from which the RF filter control signal is generated; and establish the operational parameters to include a range of antenna matching parameters from which the matching control signal is generated. As such, one or more of the components 150-158 of the transmitter section 68 may be adjusted based on the RF transmitter calibration information 90 or 114. Alternatively, the network processing module 62 may generate the operational parameters 82 and/or 116 such that one or more of the components 150-158 of the transmitter section 68 is set to a default, or nominal, operating level.

[0085] FIG. 7 is a schematic block diagram of another embodiment of a wireless communication device 50 that includes two ICs 52-1 and 52-2 and the antenna system 54. In this embodiment, IC 52-1 includes a processing module 170 and IC 52-2 includes a receiver section 66, a transmitter section 68, and a local oscillation module 130. The processing module 170 may be a single processing device or a plurality of processing devices. Such a processing device may be a microprocessor, micro-controller, digital signal processor, microcomputer, central processing unit, field programmable gate array, programmable logic device, state machine, logic circuitry, analog circuitry, digital circuitry, and/or any device that manipulates signals (analog and/or digital) based on hard coding of the circuitry and/or operational instructions. The processing module may have an associated memory and/or memory element, which may be a single memory device, a plurality of memory devices, and/or embedded circuitry of the processing module. Such a memory device may be a read-only memory, random access memory, volatile memory, non-volatile memory, static memory, dynamic memory, flash memory, cache memory, and/or any device that stores digital information. Note that when the processing module implements one or more of its functions via a state machine, analog circuitry, digital circuitry, and/or logic circuitry, the memory and/or memory element storing the corresponding operational instructions may be embedded within, or external to, the circuitry comprising the state machine, analog circuitry, digital circuitry, and/or logic circuitry. Further note that, the memory element stores, and the processing module executes,

hard coded and/or operational instructions corresponding to at least some of the steps and/or functions illustrated in FIGS. 7-19.

[0086] In operation, the processing module 170 establishes a wireless communication protocol 78 in accordance with an operational mode 80 of the wireless communication device. The wireless communication protocol 78 may be one or more of a WLAN communication protocol (e.g., IEEE 802.11x, FFC), a WPAN communication protocol (e.g., Bluetooth, ZigBee, IEEE 802.15x, NFC) and a WWAN communication protocol (e.g., GSM, EDGE, GPRS, WCDMA, CDMA, HSDPA, HSUPA, DVB-H, DMB, GPS, FM). Note that the processing module 170 may automatically detect the operational mode 80 and/or detect the operational mode 80 based on a user selection.

[0087] The processing module 170 also establishes operational parameters 82 based on the wireless communication protocol 78. The operational parameters 82 may include limits and/or specific values for one or more of frequency bands, channels, gain settings, filter corner frequency or frequencies, filter attenuation roll-off, bandwidth, center frequency, quality factor, frequency dependent impedance value, attenuation setting, gain roll-off, transmit power settings, antenna configuration settings, and frequency response.

[0088] The processing module 170 receives feedback from the receiver section 66 and the transmitter section 68 (e.g., RF receive feedback 84 and RF transmit feedback 86, respectively). The processing module 170 uses the operational parameters 82 and the RF receive feedback 84 to generate RF receiver calibration information 88. In an embodiment, the processing module 170 utilizes the operational parameters 82 to determine desired performance levels of the receiver section 66 and uses the RF receive feedback 84 to determine actual performance levels. The processing module 170 determines differences between the desired performance levels and the actual performance levels to generate the RF receiver calibration information 88. The RF receiver calibration information 88 may include one or more of: default settings for one or more components of the receiver section 66, new or adjusted LNA settings, new or adjusted antenna matching settings, new or adjusted antenna configuration settings, new or adjusted RF filtering settings, new or adjusted analog filtering settings, and new or adjusted down conversion mixer settings.

[0089] The processing module 170 also uses the operational parameters 82 and the RF transmit feedback 86 to generate RF transmitter calibration information 90. In an embodiment, the processing module 170 utilizes the operational parameters 82 to determine desired performance levels of the transmitter section 68 and uses the RF transmit feedback 86 to determine actual performance levels. The processing module 170 determines differences between the desired performance levels and the actual performance levels to generate the RF transmitter calibration information 90. The RF transmitter calibration information 90 may include one or more of: default settings for one or more components of the transmitter section 68, new or adjusted PA settings, new or adjusted antenna matching settings, new or adjusted antenna configuration settings, new or adjusted RF filtering settings, new or adjusted analog filtering settings, and new or adjusted up-conversion mixer settings.

[0090] The processing module 170 further functions to convert outbound data 70 (e.g., digitized voice, data, text,

image file, audio file, video file, etc.) into an outbound symbol stream 74 in accordance with the wireless communication protocol 78. The particular type of processing performed by the processing module 170 is dependent upon the wireless communication protocol 78 and may include, but is not limited to, scrambling, encoding, puncturing, constellation mapping, PSK modulation, GMSK modulation, QPSK modulation, FSK modulation, 8-PSK modulation, n-QAM modulation, and/or digital baseband to IF conversion.

[0091] The processing module 170 also converts an inbound symbol stream 76 into inbound data 72 (e.g., digitized voice, data, text, image file, audio file, video file, GPS signals, digitized FM audio, digital video broadcast, etc.) in accordance with the wireless communication protocol 78. The particular type of processing performed by the processing module 170 is dependent upon the wireless communication protocol 78 and may include, but is not limited to, descrambling, decoding, depuncturing, constellation demapping, PSK demodulation, GMSK demodulation, QPSK demodulation, FSK demodulation, 8-PSK demodulation, n-QAM demodulation, and/or IF to digital baseband conversion.

[0092] The receiver section 66 provides the RF receive feedback 84 and converts an inbound RF signal 94 into the inbound symbol stream 76 in accordance with the RF receiver calibration information 88 and a receive local oscillation 98. The conversion performed by the receiver section 66 is dependent upon the wireless communication protocol. For example, if the wireless communication protocol utilizes Gaussian Minimum Shift Keying (GMSK) scheme, the receiver section 66 includes a GMSK receiver architecture to recover a GMSK modulated signal (e.g., the inbound symbol stream 76) from the inbound RF signal 94. As another example, if the wireless communication protocol utilizes an 8-PSK (phase shift keying) scheme and/or an x-QAM scheme, the receiver section 66 includes an 8-PSK or x-QAM receiver architecture to recover an 8-PSK or x-QAM modulated signal (e.g., the inbound symbol stream 76) from the inbound RF signal 94.

[0093] The transmitter section 68 provides the RF transmit feedback 86 and converts the outbound symbol stream 74 into an outbound RF signal 92 in accordance with the RF transmitter calibration information 90 and a transmit local oscillation 96. The conversion performed by the transmitter section 68 is dependent upon the wireless communication protocol. For example, if the wireless communication protocol utilizes a GMSK scheme, the transmitter section 68 includes a GMSK transmitter architecture to convert a GMSK modulated signal (e.g., the outbound symbol stream 76) into the outbound RF signal 92. As another example, if the wireless communication protocol utilizes an 8-PSK (phase shift keying) scheme and/or an x-QAM scheme, the transmitter section 68 includes an 8-PSK or x-QAM transmitter architecture to convert an 8-PSK or x-QAM modulated signal (e.g., the outbound symbol stream 76) into the outbound RF signal 92.

[0094] The antenna system 54 (embodiments of which are described in greater detail with reference to FIGS. 8-19) provides the inbound RF signal 94 to the receiver section 66 and receives the outbound RF signal 92 from the transmitter section 68. The antenna section 54 then transmits the outbound RF signal 92.

[0095] FIG. 8 is a schematic block diagram of another embodiment of a wireless communication device 50 that

includes an IC **52** and the antenna system **54**. In this embodiment, IC **52** includes a processing module **180**, a transceiver section **182**, and a local oscillation module **184**. The processing module **180** may be a single processing device or a plurality of processing devices. Such a processing device may be a microprocessor, micro-controller, digital signal processor, microcomputer, central processing unit, field programmable gate array, programmable logic device, state machine, logic circuitry, analog circuitry, digital circuitry, and/or any device that manipulates signals (analog and/or digital) based on hard coding of the circuitry and/or operational instructions. The processing module may have an associated memory and/or memory element, which may be a single memory device, a plurality of memory devices, and/or embedded circuitry of the processing module. Such a memory device may be a read-only memory, random access memory, volatile memory, non-volatile memory, static memory, dynamic memory, flash memory, cache memory, and/or any device that stores digital information. Note that when the processing module implements one or more of its functions via a state machine, analog circuitry, digital circuitry, and/or logic circuitry, the memory and/or memory element storing the corresponding operational instructions may be embedded within, or external to, the circuitry comprising the state machine, analog circuitry, digital circuitry, and/or logic circuitry. Further note that, the memory element stores, and the processing module executes, hard coded and/or operational instructions corresponding to at least some of the steps and/or functions illustrated in FIGS. **8-19**.

[0096] In operation, the processing module **180** establishes a wireless communication protocol **78** in accordance with an operational mode **80** of the wireless communication device. The wireless communication protocol **78** may be one or more of a WLAN communication protocol (e.g., IEEE 802.11x, FFC), a WPAN communication protocol (e.g., Bluetooth, ZigBee, IEEE 802.15x, NFC) and a WWAN communication protocol (e.g., GSM, EDGE, GPRS, WCDMA, CDMA, HSDPA, HSUPA, DVB-H, DMB, GPS, FM). Note that the processing module **180** may automatically detect the operational mode **80** and/or detect the operational mode **80** based on a user selection.

[0097] The processing module **180** also establishes operational parameters **188** based on the wireless communication protocol **78**. The operational parameters **188** may include limits and/or specific values for one or more of frequency bands, channels, gain settings, filter corner frequency or frequencies, filter attenuation roll-off, bandwidth, center frequency, quality factor, frequency dependent impedance value, attenuation setting, gain roll-off, transmit power settings, antenna configuration settings, and frequency response.

[0098] The processing module **180** further functions to convert outbound data **70** (e.g., digitized voice, data, text, image file, audio file, video file, etc.) into an outbound symbol stream **74** in accordance with the wireless communication protocol **78**. The particular type of processing performed by the processing module **180** is dependent upon the wireless communication protocol **78** and may include, but is not limited to, scrambling, encoding, puncturing, constellation mapping, PSK modulation, GMSK modulation, QPSK modulation, FSK modulation, 8-PSK modulation, n-QAM modulation, and/or digital baseband to IF conversion.

[0099] The processing module **180** also converts an inbound symbol stream **76** into inbound data **72** (e.g., digitized

voice, data, text, image file, audio file, video file, GPS signals, digitized FM audio, digital video broadcast, etc.) in accordance with the wireless communication protocol **78**. The particular type of processing performed by the processing module **180** is dependent upon the wireless communication protocol **78** and may include, but is not limited to, descrambling, decoding, depuncturing, constellation demapping, PSK demodulation, GMSK demodulation, QPSK demodulation, FSK demodulation, 8-PSK demodulation, n-QAM demodulation, and/or IF to digital baseband conversion.

[0100] The transceiver section **182**, which may include the receiver section **66** and the transmitter section **68**, converts an inbound RF signal **94** into the inbound symbol stream **76** in accordance with a local oscillation **186** and the operational parameters **188**. The conversion performed by the transceiver section **182** is dependent upon the wireless communication protocol. For example, if the wireless communication protocol utilizes Gaussian Minimum Shift Keying (GMSK) scheme, the transceiver section **182** includes a GMSK receiver architecture to recover a GMSK modulated signal (e.g., the inbound symbol stream **76**) from the inbound RF signal **94**. As another example, if the wireless communication protocol utilizes an 8-PSK (phase shift keying) scheme and/or an x-QAM scheme, the transceiver section **182** includes an 8-PSK or x-QAM receiver architecture to recover an 8-PSK or x-QAM modulated signal (e.g., the inbound symbol stream **76**) from the inbound RF signal **94**.

[0101] The transceiver section **182** also converts the outbound symbol stream **74** into an outbound RF signal **92** in accordance with the local oscillation **186** and the operational parameters. The conversion performed by the transceiver section **182** is dependent upon the wireless communication protocol. For example, if the wireless communication protocol utilizes a GMSK scheme, the transceiver section **182** includes a GMSK transmitter architecture to convert a GMSK modulated signal (e.g., the outbound symbol stream **76**) into the outbound RF signal **92**. As another example, if the wireless communication protocol utilizes an 8-PSK (phase shift keying) scheme and/or an x-QAM scheme, the transceiver section **182** includes an 8-PSK or x-QAM transmitter architecture to convert an 8-PSK or x-QAM modulated signal (e.g., the outbound symbol stream **76**) into the outbound RF signal **92**.

[0102] The local oscillation module **184**, which may include one or more local oscillators as illustrated in FIG. **5**, generates the local oscillation **186** in accordance with the wireless communication protocol **78**. For example, the local oscillation **186** may include a receive local oscillation **98** and/or **120** and a transmit local oscillation **96** and/or **108**.

[0103] The antenna system **54** provides the inbound RF signal **94** to the receiver section **66** and receives the outbound RF signal **92** from the transmitter section **68** in accordance with the operational parameters **188**. The antenna section **54** then transmits the outbound RF signal **92**. The antenna system **54** may be configured to provide one of the plurality of antenna structures **190-204** in accordance with the operational parameters **188** to transceive the inbound and outbound RF signals **92** and/or **94**. The plurality of antenna structures includes two or more of a WCDMA antenna structure **190**; an HSDPA antenna structure **190**; an HSUPA antenna structure **190**; a GSM antenna structure **192**; an EDGE antenna structure **192**; a GPRS antenna structure **192**; a WLAN antenna structure **194**; a WPAN antenna structure **196**; a GPS antenna

structure **198**; a DVB-H antenna structure **200**; a DMB antenna structure **200**; an FM antenna structure **202**, an NFC coil structure **204**; and an RFID antenna structure **204**. Note that an antenna structure **190-204** may include one or more antennas of the same polarization, of different polarizations, arranged in a diversity pattern, arranged in an array, having programmable segments, having programmable compensation components, and/or a combination thereof. Further note that the RFID antenna structure may be a NFC coil structure **204** for NFC RFID communications and/or a WLAN antenna structure for FFC RFID communications.

[0104] With respect to the antenna system **54**, the operational parameters **188** include two or more of: a frequency band in accordance with the wireless communication protocol; a channel within the frequency band, channel bandwidth of the channel, interferer frequency, antenna radiation pattern, full duplex communication, half duplex communication, gain setting, impedance setting, center frequency setting, attenuation setting, attenuation roll-off, antenna quality factor, antenna polarization setting, and antenna diversity setting. Based on two or more of these operational parameters **188**, the antenna system **54** provides one or more of the above mentioned antenna structures **190-204**.

[0105] FIG. **9** is a schematic block diagram of an embodiment of an antenna system **54** that includes a plurality of antenna segments **210-214**, configuration circuitry **216**, and compensation circuitry **218**. The configuration circuitry **216** couples the plurality of antenna segments **210-214** into a first antenna structure for transceiving radio frequency signals within a first radio frequency band when indicated by the operational parameters **188** and couples the plurality of antenna segments **210-214** into a second antenna structure for transceiving radio frequency signals within a second radio frequency band when indicated by the operational parameters **188**. In a further embodiment, the configuration circuitry **216** couples the plurality of antenna segments **210-214** into a third antenna structure for transceiving radio signals within a third radio frequency band when indicated by the operational parameters **188**.

[0106] In an embodiment, each of the antenna segments **210-214** includes a monopole antenna, which may be implemented as a meandering trace on a PCB, a dipole antenna, which may be implemented as a meandering trace on a PCB, a Yagi antenna, and/or a helical antenna as taught in co-pending patent application entitled PLANER HELICAL ANTENNA, having a filing date of Mar. 21, 2006 and a Ser. No. 11/386,247. In such an embodiment, the configuration circuitry **216** may include a transistor to provide coupling between first and second antenna segments of the plurality of antenna segments **210-214** and/or a capacitor to provide coupling between the first and second antenna segments of the plurality of antenna segments **210-214**.

[0107] In addition, the compensation circuitry **218** is coupled to the antenna segments **210-214** adjust a characteristic of the antenna structure in accordance with at least one of: the antenna radiation pattern, the gain setting, the impedance setting, the attenuation setting, the attenuation roll-off, the antenna quality factor, the antenna polarization setting, and the antenna diversity setting of the operational parameters **188**. An embodiment of the compensation circuitry **218** is discussed with reference to FIG. **12**.

[0108] FIG. **10** is a frequency domain diagram of three frequency bands centered at 900 MHz, 2.4 GHz, and 5.2 GHz. If a multiple band antenna system **54** were to be made to

support these three bands, the antenna segments **210-214** would need to provide the desired antenna length for the corresponding frequency bands.

[0109] FIG. **11** is a diagram of an embodiment of the antenna segments **210-214** to provide an antenna structure that supports the frequency bands of FIG. **10**. In this example, the first antenna segment **210** is sized to provide a $\frac{1}{2}$ wavelength (λ) dipole antenna for the 5.2 GHz operation. As is known, a 5.2 GHz signal has a wavelength of $3 \times 10^8 / 2.4 \times 10^9 = 57.7$ mm and, accordingly, a $\frac{1}{2}$ wavelength dipole antenna has a length of 28.8 mm. The antenna segment **210** may be of a meander trace shape, a planer helical winding, etc. As such, when the RF transceiver is in a 5.2 GHz mode, the configuration circuitry **216** couples the first antenna segment **210** to provide the 5.2 GHz antenna structure.

[0110] For 2.4 GHz operation, the resulting $\frac{1}{2} \lambda$ dipole antenna structure has a total length of 62.5 mm ($\lambda_{2.4G} = 3 \times 10^8 / 2.4 \times 10^9 = 125$ mm). Since the first antenna segment **210** is 28.8 mm in length, the second antenna segment **212** should be 33.7 mm in length to provide the desired overall length of 62.5 mm. The antenna segment **212** may also be of a meander trace shape, a planer helical winding, etc. In this mode, the configuration circuitry **216** couples the first and second antenna segments **210** and **212** together to provide a 2.4 GHz dipole antenna.

[0111] For 900 MHz operation, the resulting $\frac{1}{2} \lambda$ dipole antenna structure has a total length of 166.6 mm ($\lambda_{900M} = 3 \times 10^8 / 9 \times 10^8 = 333$ mm). Since the first antenna segment **210** is 28.8 mm in length and the second antenna segment **212** is 33.7 mm in length, the third antenna segment **214** should be 104.1 mm in length to provide the desired overall length of 166.6 mm. The antenna segment **214** may also be of a meander trace shape, a planer helical winding, etc. In this mode, the configuration circuitry **216** couples the first, second, and third antenna segments **210-214** together to provide a 900 MHz dipole antenna. As an alternative example, the number of antenna segments and their corresponding lengths may vary depending on the desired number of antenna structures to support a variety of frequency bands.

[0112] FIG. **12** is a schematic block diagram of another embodiment of an antenna system **54** that includes one or more of the antenna segments **210-214** and a corresponding portion of the compensation circuitry **218**. In this embodiment, the antenna segment **210**, **212**, and/or **214** includes a resistive component (**R1** and **R2**), an inductive component (**L1** and **L2**), a capacitive component (**C1** and **C2**). The corresponding portion of the compensation circuitry **218** includes an externally coupled resistive component (**R1_{ext}** and **R2_{ext}**), an inductive component (**L1_{ext}** and **L2_{ext}**), and/or an capacitive component (**C1_{ext}** and **C2_{ext}**). The resistor, inductor, and/or capacitor of the compensation circuitry **218** may be fixed and/or adjustable. In this instance, the compensation circuitry **218** is programmed in accordance with the operational parameters **188** to adjust one or more of the antenna structure's quality factor, the antenna structure's bandwidth, the antenna structure's center frequency, the antenna structure's gain/attenuation, and/or the antenna structure's impedance.

[0113] FIG. **13** is a schematic block diagram of another embodiment of a wireless communication device **50** that includes an IC **52** and the antenna system **54**. In this embodiment, IC **52** includes a processing module **180**, a transceiver

section **182**, and a local oscillation module **184**. The antenna system **54** includes a first antenna structure **230** and a second antenna structure **232**.

[0114] The processing module **180** is coupled to establish a first wireless communication protocol and a second wireless communication protocol in accordance with two of the plurality of operational modes **80** of the wireless communication device **50**. The first and second wireless communication protocols may each be one or more of a WLAN communication protocol (e.g., IEEE 802.11x, FFC), a WPAN communication protocol (e.g., Bluetooth, ZigBee, IEEE 802.15x, NFC) and a WWAN communication protocol (e.g., GSM, EDGE, GPRS, WCDMA, CDMA, HSDPA, HSUPA, DVB-H, DMB, GPS, FM). Note that the processing module **170** may automatically detect the operational mode **80** and/or detect the operational mode **80** based on a user selection.

[0115] The processing module **180** further functions to establish first operational parameters **188** based on the first wireless communication protocol and to establish second operational parameters **236** based on the second wireless communication protocol. Each of the operational parameters **188** and **236** may include limits and/or specific values for one or more of frequency bands, channels, gain settings, filter corner frequency or frequencies, filter attenuation roll-off, bandwidth, center frequency, quality factor, frequency dependent impedance value, attenuation setting, gain roll-off, transmit power settings, antenna configuration settings, and frequency response.

[0116] The processing module **180** further functions to convert outbound data **70** (e.g., digitized voice, data, text, image file, audio file, video file, etc.) into an outbound symbol stream **74** in accordance with the first wireless communication protocol. The processing module **180** also converts outbound data **104** (e.g., digitized voice, data, text, image file, audio file, video file, etc.) into an outbound symbol stream **106** in accordance with the second wireless communication protocol. The particular type of processing performed by the processing module **180** is dependent upon the wireless communication protocol and may include, but is not limited to, scrambling, encoding, puncturing, constellation mapping, PSK modulation, GMSK modulation, QPSK modulation, FSK modulation, 8-PSK modulation, n-QAM modulation, and/or digital baseband to IF conversion.

[0117] The processing module **180** also converts an inbound symbol stream **76** into inbound data **72** (e.g., digitized voice, data, text, image file, audio file, video file, GPS signals, digitized FM audio, digital video broadcast, etc.) in accordance with the first wireless communication protocol. The processing module **180** also converts an inbound symbol stream **126** into inbound data **128** (e.g., digitized voice, data, text, image file, audio file, video file, GPS signals, digitized FM audio, digital video broadcast, etc.) in accordance with the second wireless communication protocol. The particular type of processing performed by the processing module **180** is dependent upon the wireless communication protocol and may include, but is not limited to, descrambling, decoding, depuncturing, constellation demapping, PSK demodulation, GMSK demodulation, QPSK demodulation, FSK demodulation, 8-PSK demodulation, n-QAM demodulation, and/or IF to digital baseband conversion.

[0118] The transceiver section **182**, which may include the receiver section **66** and the transmitter section **68**, converts an inbound RF signal **94** into the inbound symbol stream **76** in accordance with a local oscillation **186** and the operational

parameters **188** and converts an inbound RF signal **118** into the inbound symbol stream **126** in accordance with a local oscillation **234** and the operational parameters **236**. The conversion performed by the transceiver section **182** is dependent upon the wireless communication protocol. For example, if the wireless communication protocol utilizes Gaussian Minimum Shift Keying (GMSK) scheme, the transceiver section **182** includes a GMSK receiver architecture to recover a GMSK modulated signal (e.g., the inbound symbol stream **76**) from the inbound RF signal **94**. As another example, if the wireless communication protocol utilizes an 8-PSK (phase shift keying) scheme and/or an x-QAM scheme, the transceiver section **182** includes an 8-PSK or x-QAM receiver architecture to recover an 8-PSK or x-QAM modulated signal (e.g., the inbound symbol stream **76**) from the inbound RF signal **94**.

[0119] The transceiver section **182** also converts the outbound symbol stream **74** into an outbound RF signal **92** in accordance with the local oscillation **186** and the operational parameters **188** and converts the outbound symbol stream **106** into an outbound RF signal **110** in accordance with the local oscillation **234** and the operational parameters **236**. The conversion performed by the transceiver section **182** is dependent upon the wireless communication protocol. For example, if the wireless communication protocol utilizes a GMSK scheme, the transceiver section **182** includes a GMSK transmitter architecture to convert a GMSK modulated signal (e.g., the outbound symbol stream **76**) into the outbound RF signal **92**. As another example, if the wireless communication protocol utilizes an 8-PSK (phase shift keying) scheme and/or an x-QAM scheme, the transceiver section **182** includes an 8-PSK or x-QAM transmitter architecture to convert an 8-PSK or x-QAM modulated signal (e.g., the outbound symbol stream **76**) into the outbound RF signal **92**.

[0120] The local oscillation module **184**, which may include one or more local oscillators as illustrated in FIG. 5, generates the local oscillations **186** and **234** in accordance with the wireless communication protocols. In an embodiment, the local oscillation **186** may include receive local oscillations **98** and **120** and transmit local oscillations **96** and **108**.

[0121] The antenna system **54** includes a first antenna structure **230** enabled in accordance with the first operational parameters **188** to transceive the first inbound and outbound RF signals **92** and **94** and a second antenna structure **232** enabled in accordance with the second operational parameters **236** to transceive the second inbound and outbound RF signals **110** and **118**.

[0122] In another embodiment, the processing module **180** is coupled to determine whether the wireless communication device **50** is in at least one of: a wireless wide area network (WWAN) mode and a wireless local area network (WLAN) mode. Such a determination may be made based on signals being transceived and/or based on a user input to select the mode.

[0123] When the wireless communication device **50** is in the WWAN mode, the processing module **180** converts outbound data **70** into a first outbound symbol stream **74** in accordance with a WWAN protocol and converts a first inbound symbol stream **94** into inbound data **76** in accordance with the WWAN protocol. When the wireless communication device is in the WLAN mode, the processing module **180** converts the outbound data **70** into a second outbound symbol stream **110** in accordance with a WLAN protocol and

converts a second inbound symbol stream 126 into the inbound data 72 in accordance with the WLAN protocol.

[0124] In this embodiment, the transceiver section 182 is coupled to convert a first inbound RF signal 94 into the first inbound symbol stream 76 in accordance with a first local oscillation 186 and convert the first outbound symbol stream 74 into a first outbound RF signal 92 in accordance with the first local oscillation 186 when the wireless communication device 50 is in the WWAN mode. When the wireless communication device 50 is in the WLAN mode, the transceiver section 182 converts a second inbound RF signal 118 into the second inbound symbol stream 126 in accordance with a second local oscillation 234 and converts the second outbound symbol stream 106 into a second outbound RF signal 110 in accordance with the second local oscillation 234.

[0125] Also in this embodiment, the antenna system 54 includes a WWAN antenna structure 230 (e.g., GSM, EDGE, GPRS, WCDMA, CDMA, HSDPA, HSUPA, DVB-H, DMB, GPS, and/or FM antenna structure) and a WLAN antenna structure 194 or 232 (e.g., IEEE 802.11x antenna structure, FFC antenna structure). When the wireless communication device 50 is in the WWAN mode, the WWAN antenna structure 230 is enabled to transceive the first inbound and outbound RF signals 92 and 94. When the wireless communication device 50 is in the WLAN mode, the WLAN antenna structure 232 is enabled to transceive the second inbound and outbound RF signals 110 and 118. Note that an antenna element of at least one of the WWAN antenna structure and the WLAN antenna structure may be located on a package substrate of the integrated circuit 52.

[0126] In another embodiment, the processing module 180 determines that the wireless communication device 50 is in a wireless personal area network (WPAN) mode. When the wireless communication device 50 is in the WPAN mode, the processing module 180 functions to convert the outbound data into a third outbound symbol stream in accordance with a WPAN protocol and to convert a third inbound symbol stream into the inbound data in accordance with the WPAN protocol. Note that the WPAN communication protocol may be in accordance with Bluetooth, ZigBee, IEEE 802.15x, and/or NFC protocols.

[0127] In this embodiment, the RF transceiver section 182 convert a third inbound

[0128] RF signal into the third inbound symbol stream in accordance with a third local oscillation and convert the third outbound symbol stream into a third outbound RF signal in accordance with the third local oscillation. The antenna system 54 further includes a WPAN antenna structure 196 that is enabled to transceive the third inbound and outbound RF signals when the wireless communication device 50 is in the WPAN mode.

[0129] In another embodiment, the processing module 180 determines that the wireless communication device 50 is in a global position system (GPS) mode. In this mode, the processing module converts a plurality of inbound GPS signals into the inbound data in accordance with the GPS protocol. The RF transceiver section 182 converts a plurality of inbound GPS RF signals into the plurality of inbound GPS signals.

[0130] In this mode, the antenna system 54 includes a GPS antenna structure 198. In the GPS mode, the GPS antenna structure 198 is enabled to receive the plurality of inbound GPS RF signals.

[0131] In another embodiment, the processing module 180 determines that the wireless communication device 50 is in a radio frequency identification (RFID) mode. In this mode, the processing module 180 converts the outbound data into a fourth outbound symbol stream in accordance with a RFID protocol and converts a fourth inbound symbol stream into the inbound data in accordance with the RFID protocol.

[0132] In this mode, the RF transceiver section 182 converts a fourth inbound RF signal into the fourth inbound symbol stream in accordance with a fourth local oscillation and converts the fourth outbound symbol stream into a fourth outbound RF signal in accordance with the fourth local oscillation. The antenna system 54 includes an RFID antenna structure, wherein, when the wireless communication device is in the RFID mode, the RFID antenna structure is enabled to transceive the fourth inbound and outbound RF signals. Note that, in one embodiment, the RFID antenna structure includes a coil for near field communication of the fourth inbound and outbound RF signals.

[0133] In yet another embodiment, the processing module 180 generate the operational parameters 188 and/or 236 to include a frequency hopping pattern within a given frequency band. As such, the antenna system 54 adjusts its center frequency in accordance with the frequency hopping pattern to provide a plurality of inbound RF signals to the transceiver section 182. The transceiver section 182 converts the plurality of inbound RF signals into a plurality of inbound symbol streams.

[0134] The processing module 180 receives the plurality of inbound symbol streams in accordance with the frequency hopping pattern and oversamples them to produce a plurality of oversampled inbound symbol streams. The processing module 180 then combines the plurality of oversampled inbound symbol streams to produce a combined oversampled symbol stream. The combining may be done in accordance with an averaging function, a mean square function, with weighting of the symbol streams, and/or any other way to mathematically combine signals. The processing module 180 then converts the combined oversampled symbol stream into the inbound data 72 or 128.

[0135] FIG. 14 is a diagram of another embodiment of an antenna system 54 that includes a plurality of first antennas 240, 242, 244, and 246 having a first orthogonal orientation therebetween 246 and a plurality of second antennas 250, 252, 254, and 256 having a second orthogonal orientation therebetween 258. In this embodiment, the plurality of second antennas is interspersed with the plurality of first antennas.

[0136] In an embodiment, the antenna system 54 includes a plurality of transmit planar antennas 250, 252, 254, and 256 and a plurality of receive planar antennas 240, 242, 244, and 246 on a supporting structure. The supporting substrate may be an integrated circuit package substrate such as a printed circuit board (PCB), a PCB, a low temperature co-fired ceramic (LTCC) substrate, or an organic substrate.

[0137] The plurality of transmit planar antennas (e.g., the third, fourth, seventh, and/or eighth antennas 250, 252, 254, and 256) have a plurality of transmit axial orientations 258, where each of the transmit planar antennas is positioned in accordance with a corresponding one of the transmit axial orientations 258. Each of the transmit planar antennas has a conductive antenna pattern on at least the first surface of the supporting substrate 230. For example, the conductive antenna pattern may be a meandering line on the first surface,

a metal trace on the first surface, a coil on the first surface, and/or a planer helical antenna as described in co-pending patent application entitled PLANER HELICAL ANTENNA, having a filing date of Mar. 21, 2006, and a Ser. No. 11/386,247.

[0138] The plurality of receive planer antennas (e.g., the first, second, fifth, and sixth antennas **240**, **242**, **244**, and **246**) have a plurality of receive axial orientations **248**, where each of the receive planer antennas is positioned in accordance with a corresponding one of the receive axial orientations **248**. Each of the plurality of receive planer antennas has the conductive antenna pattern on the first surface of the supporting substrate. For example, the conductive antenna pattern may be a meandering line on the first surface, a metal trace on the first surface, a coil on the first surface, and/or a planer helical antenna as described in co-pending patent application entitled PLANER HELICAL ANTENNA, having a filing date of Mar. 21, 2006, and a Ser. No. 11/386,247.

[0139] FIG. 15 is a schematic block diagram of another embodiment of an antenna system **54** that includes the plurality of first antennas **240**, **242**, **244**, and **246**, the plurality of second antennas **250**, **252**, **254**, and **256**, a receive module, and a transmit module. In general, the receive module is coupled to the plurality of first antennas and combines RF signals received by the plurality of first antennas to produce the inbound RF signal. Also in general, the transmit module generates a plurality of outbound RF signals from the outbound RF signal that have an orthogonal phase relationship therebetween and provides the plurality of outbound RF signals to the plurality of second antennas.

[0140] In this embodiment, the receive module includes a plurality of hybrid circuits **260**, **262**, and **268** coupled to an LNA module **272** and the transmit module includes a plurality of hybrid circuits **264**, **266**, and **270** coupled to a PA module **274**.

[0141] The first hybrid circuit module **260** is coupled to produce a first phase combined receive RF signal (e.g., 0°) from a first phase shifted receive RF signal (e.g., 0°) received from the 1st antenna **240** and a second phase shifted receive RF signal (e.g., 180°) received from the 5th antenna **244**. For example, the first hybrid circuit **260** may perform the function of $\cos(2\pi\omega_{RF}+0)-\cos(2\pi\omega_{RF}+180)$.

[0142] The second hybrid circuit module **262** is coupled to produce a second phase combined receive RF signal (e.g., 270°) from a third phase shifted receive RF signal (e.g., 270°) received from the 2nd antenna **242** and a fourth phase shifted receive RF signal (e.g., 90°) received from the 6th antenna **246**. For example, the second hybrid circuit **262** may perform the function of $\cos(2\pi\omega_{RF}+270)-\cos(2\pi\omega_{RF}+90)$.

[0143] The third hybrid circuit module **268** is coupled to produce a receive RF signal from the first and second phase combined receive RF signals, i.e., the outputs of the first and second hybrid circuits **260** and **262**. In one embodiment, the third hybrid circuit **268** performs the function of $\cos(2\pi\omega_{RF}+0)+90^\circ$ phase shift of $[\cos(2\pi\omega_{RF}+270)]$. The received RF signal is then amplified by the LNA module **272**.

[0144] On the transmit side, the PA module **280** is coupled to amplify an outbound RF signal to produce an amplified RF signal. The first hybrid circuit module **270** is coupled to produce a first phase shifted transmit RF signal (e.g., 90°) from a transmit RF signal (i.e., the amplified RF signal). The first hybrid circuit module **270** provides the transmit RF signal (e.g., 0°) to the second hybrid circuit module **264** and the first phase shifted transmit RF signal to the third hybrid circuit

module **266**. In one embodiment, the first hybrid circuit module **270** functions to add a 90° phase offset to the transmit RF signal (e.g., $\cos(2\pi\omega_{RF})$) to produce the first phase shifted transmit RF signal (e.g., $\cos(2\pi\omega_{RF}+90)$) and passes the transmit RF signal through a delay that substantially matches the time it takes to add the 90° phase offset.

[0145] The second hybrid circuit module **264** is coupled to produce a second phase shifted transmit RF signal (e.g., 180°) from the transmit RF signal (e.g., 0°). The second hybrid circuit module **264** provides the transmit RF signal (e.g., 0°) to the third antenna **250** and provides the second phase shifted transmit RF signal (e.g., 180°) to the 7th antenna **254**. In one embodiment, the second hybrid circuit module **264** inverts the transmit RF signal (e.g., $\cos(2\pi\omega_{RF})$) to produce the second phase shifted transmit RF signal (e.g., $\cos(2\pi\omega_{RF}+180)$) and passes the transmit RF signal through a delay that substantially matches the time it takes to invert the signal.

[0146] The third hybrid circuit module **266** is coupled to produce a third phase shifted transmit RF signal (e.g., 270°) from the first phase shifted transmit RF signal (e.g., 90°). The third hybrid circuit module **266** provides the third phase shifted transmit RF signal (e.g., 270°) to the 8th antenna **256** and provides the first phase shifted transmit RF signal (e.g., 90°) to the 4th antenna **252**. In one embodiment, the third hybrid circuit module **266** inverts the first phase shifted transmit RF signal (e.g., $\cos(2\pi\omega_{RF}+90)$) to produce the third phase shifted transmit RF signal (e.g., $\cos(2\pi\omega_{RF}+270)$) and passes the first phase shifted transmit RF signal through a delay that substantially matches the time it takes to invert the signal.

[0147] FIG. 16 is a diagram of an embodiment of a wireless communication device **50** that includes a battery **280**, a communication device case **282**, and a plurality of antenna segments **210-214**. In this embodiment, the battery **280** is coupled to provide power to the IC **52** and at least a portion of the antenna system **54** (e.g., an antenna segment **210-214**) is located proximal to the battery **280**. In such an embodiment, the battery **280** functions as a ground plane for the at least a portion of the antenna system **54**.

[0148] FIG. 17 is a schematic block diagram of another embodiment of an antenna system **54** that includes an antenna **290**, a transmission line **292**, an inductor module **294**, a tunable capacitor module **296**, and control logic **298**. The antenna **290** may include one or more antenna segments as previously discussed with reference to FIGS. 9-12, may include a dipole antenna, a mono-pole antenna, a diversity antenna structure, an orthogonal antenna structure and/or a combination thereof.

[0149] The transmission line **292** provides coupling between the antenna **290** and the rest of the antenna system **54**. The transmission line **292** may be a shielded trace on a PCB, on a package substrate of the IC **52**, may be a coaxial cable implemented on the IC **52**, on the package substrate, and/or on the PCB using micro-electromechanical (MEM) technique and/or a combination thereof. The properties (impedance, frequency response, bandwidth, etc.) of the transmission line **292** may be fixed and/or adjustable in accordance with the operational parameters **188** and/or **236**.

[0150] The inductor module **294** is coupled to the transmission line **292** and to the tunable capacitor module **296**. The opposite end of the inductor module **294**, which includes one or more fixed and/or variable inductors, provides the connection node to the transceiver section **182**. The tunable capacitor module **296**, which includes one or more fixed and/or adjust-

able capacitors, a capacitor matrix, and/or a capacitor switching network, is adjusted in accordance with a capacitance control signal to provide a desired capacitance. In this manner, the inductance of the inductor module 294 in combination with the desired capacitance tunes the antenna system 54 to provide a desired center frequency, a desired quality factor, a desired impedance, a desired bandwidth, a desired frequency response, a and/or desired gain.

[0151] The control logic 298 generates the capacitance control signal based on the operational parameters 188 and/or 236. For example, the control logic 298 may be a state machine coded to convert a particular setting of the operational parameters 188 and/or 236 into a particular setting of the capacitor control signal.

[0152] In another embodiment, the inductor module 294 includes an inductor to provide a first inductance and a tunable inductor circuit, which may include an adjustable inductor, an inductor matrix, a switching inductor network and/or a combination thereof. The tunable inductor circuit is coupled to provide a second inductance in accordance with an inductance control signal. In this embodiment, the control logic 298 generates the inductance control signal in accordance with the operational parameter 188 and/or 236. The resulting inductance (e.g., the first and second inductances) in combination with the capacitance of the tunable capacitor module 296 provides the tuning of the antenna system 54. Note that in one embodiment, adjusting of the capacitor module 296 adjusts the center frequency of the antenna system 54 and adjusting of the inductor module 294 adjusts the bandwidth of the antenna system 54.

[0153] In an embodiment, the wireless communication device 50 includes the IC 52 and a printed circuit board (PCB). The IC 52 includes the processing module 180, the transceiver section 182, the control logic 298, the tunable capacitor module 296, and the tunable inductor circuit of the inductor module 294. The PCB supports the integrated circuit 52 and the inductor of the inductor module 294. The antenna 290 is printed on the printed circuit board. Such a wireless communication device may be incorporated into another device (e.g., PC, cell phone, etc.).

[0154] In another embodiment, the wireless communication device 50 includes an IC 52 and a PCB. In this embodiment, the IC 52 includes a package board and a die. The die includes the processing module 180, the transceiver section 182, the control logic 298, and the tunable capacitor module 296. The package board includes the tunable inductor circuit and the inductor of the inductor module 294. The printed circuit board supports the integrated circuit and the antenna 290.

[0155] FIG. 18 is a schematic block diagram of another embodiment of a wireless communication device 50 that includes an IC 52-2 and an antenna system 54. The IC 52-2 functions as previously discussed with reference to FIG. 7 and the antenna system 54 functions as previously discussed with reference to FIG. 17.

[0156] FIG. 19 is a schematic block diagram of another embodiment of a wireless communication device 50 that includes an IC 52-1 and an antenna system 54. In this embodiment, the IC 52-1 includes the processing module 180, the control logic of the antenna system 54, and the tunable capacitor module 296 of the antenna system. The processing module 180 functions as previously discussed with reference to FIGS. 8 and 13. The antenna system 54 functions as previously described with reference to FIG. 17.

[0157] As may be used herein, the terms “substantially” and “approximately” provides an industry-accepted tolerance for its corresponding term and/or relativity between items. Such an industry-accepted tolerance ranges from less than one percent to fifty percent and corresponds to, but is not limited to, component values, integrated circuit process variations, temperature variations, rise and fall times, and/or thermal noise. Such relativity between items ranges from a difference of a few percent to magnitude differences. As may also be used herein, the term(s) “coupled to” and/or “coupling” includes direct coupling between items and/or indirect coupling between items via an intervening item (e.g., an item includes, but is not limited to, a component, an element, a circuit, and/or a module) where, for indirect coupling, the intervening item does not modify the information of a signal but may adjust its current level, voltage level, and/or power level. As may further be used herein, inferred coupling (i.e., where one element is coupled to another element by inference) includes direct and indirect coupling between two items in the same manner as “coupled to”. As may even further be used herein, the term “operable to” indicates that an item includes one or more of power connections, input(s), output(s), etc., to perform one or more its corresponding functions and may further include inferred coupling to one or more other items. As may still further be used herein, the term “associated with”, includes direct and/or indirect coupling of separate items and/or one item being embedded within another item. As may be used herein, the term “compares favorably”, indicates that a comparison between two or more items, signals, etc., provides a desired relationship. For example, when the desired relationship is that signal 1 has a greater magnitude than signal 2, a favorable comparison may be achieved when the magnitude of signal 1 is greater than that of signal 2 or when the magnitude of signal 2 is less than that of signal 1.

[0158] The present invention has also been described above with the aid of method steps illustrating the performance of specified functions and relationships thereof. The boundaries and sequence of these functional building blocks and method steps have been arbitrarily defined herein for convenience of description. Alternate boundaries and sequences can be defined so long as the specified functions and relationships are appropriately performed. Any such alternate boundaries or sequences are thus within the scope and spirit of the claimed invention.

[0159] The present invention has been described above with the aid of functional building blocks illustrating the performance of certain significant functions. The boundaries of these functional building blocks have been arbitrarily defined for convenience of description. Alternate boundaries could be defined as long as the certain significant functions are appropriately performed. Similarly, flow diagram blocks may also have been arbitrarily defined herein to illustrate certain significant functionality. To the extent used, the flow diagram block boundaries and sequence could have been defined otherwise and still perform the certain significant functionality. Such alternate definitions of both functional building blocks and flow diagram blocks and sequences are thus within the scope and spirit of the claimed invention. One of average skill in the art will also recognize that the functional building blocks, and other illustrative blocks, modules and components herein, can be implemented as illustrated or

by discrete components, application specific integrated circuits, processors executing appropriate software and the like or any combination thereof.

What is claimed is:

1. An integrated circuit (IC) comprises:

a processing module coupled to:

- establish a wireless communication protocol in accordance with an operational mode;
- establish operational parameters based on the wireless communication protocol;
- receive radio frequency (RF) receive feedback from a receiver section;
- receive RF transmit feedback from a transmitter section;
- generate RF receiver calibration information based on the operational parameters and the RF receive feedback;
- provide the RF receiver calibration information to the receiver section;
- generate RF transmitter calibration information based on the operational parameters and the RF transmit feedback;
- provide the RF transmitter calibration information to the transmitter section;
- convert outbound data into an outbound symbol stream in accordance with the wireless communication protocol;
- provide the outbound symbol stream to a transmitter section;
- receive an inbound symbol stream from a transmitter section; and
- convert the inbound symbol stream into inbound data in accordance with the wireless communication protocol.

2. The IC of claim 1 further comprises:

the receiver section coupled to:

- provide the RF receive feedback; and
- convert an inbound RF signal into the inbound symbol stream in accordance with the RF receiver calibration information and a receive local oscillation; and

the transmitter section coupled to:

- provide the RF transmit feedback; and
- convert the outbound symbol stream into an outbound RF signal in accordance with the RF transmitter calibration information and a transmit local oscillation.

3. The IC of claim 2 further comprises:

an interface module coupling the processing module to the receiver section and the transmitter section.

4. The IC of claim 2 further comprises:

a local oscillation module coupled to generate the receive local oscillation and the transmit local oscillation in accordance with the wireless communication protocol.

5. The IC of claim 1, wherein the processing module is further coupled to:

- establish the first and second wireless communication protocols in accordance with a concurrent operational mode of the wireless communication device;
- establish first operational parameters based on the first wireless communication protocol; and
- establish second operational parameters based on the second wireless communication protocol;
- receive first RF receive feedback corresponding to the first wireless communication protocol;
- receive second RF receive feedback corresponding to the second wireless communication protocol;

receive first RF transmit feedback corresponding to the first wireless communication protocol;

receive second RF transmit feedback corresponding to the second wireless communication protocol;

generate first RF receiver calibration information based on the first operational parameters and the first RF receive feedback;

generate second RF receiver calibration information based on the second operational parameters and the second RF receive feedback;

generate first RF transmitter calibration information based on the first operational parameters and the first RF transmit feedback;

generate second RF transmitter calibration information based on the second operational parameters and the second RF transmit feedback;

convert first outbound data into a first outbound symbol stream in accordance with a first wireless communication protocol;

convert a first inbound symbol stream into first inbound data in accordance with the first wireless communication protocol;

convert second outbound data into a second outbound symbol stream in accordance with a second wireless communication protocol; and

convert a second inbound symbol stream into second inbound data in accordance with the second wireless communication protocol.

6. The IC of claim 5, wherein the processing module is further coupled to:

determine whether the first and second wireless communication protocols have at least partially overlapping frequency bands;

when the first and second wireless communication protocols have the at least partially overlapping frequency bands, determining whether the first outbound RF signal will interfere with the second inbound RF signal or whether the second outbound RF signal will interfere with the first inbound RF signal; and

when the first outbound RF signal will interfere with the second inbound RF signal or when the second outbound RF signal will interfere with the first inbound RF signal, establish an RF resource sharing protocol between the first and second wireless communication protocols.

7. The IC of claim 1, wherein the processing module is further coupled to:

establish the operational parameters to include a range of antenna matching parameters from which a matching control signal is generated;

establish the operational parameters to include a range of RF filter control parameters from which a RF filter control signal is generated;

establish the operational parameters to include a range of LNA parameters from which a LNA control signal is generated;

establish the operational parameters to include a range of down-conversion parameters from which a down conversion control signal is generated; and

establish the operational parameters to include a range of analog filter parameters from which an analog filter control signal is generated.

8. The IC of claim 1, wherein the processing module is further coupled to:

establish the operational parameters to include a range of analog filter parameters from which an analog filter control signal is generated;
 establish the operational parameters to include a range of up-conversion parameters from which an up conversion control signal is generated;
 establish the operational parameters to include a range of PA parameters from which a PA control signal is generated;
 establish the operational parameters to include a range of RF filter control parameters from which a RF filter control signal is generated; and
 establish the operational parameters to include a range of antenna matching parameters from which a matching control signal is generated.

9. The IC of claim 1, wherein the processing module is further coupled to:

establish the operational parameters for at least one of: beamforming, antenna polarization, maximum signal to noise ratio, and maximum signal to interference ratio.

10. The IC of claim 1 further comprises:

the processing module utilizing the RF receive feedback and the RF transmit feedback to establish the operational parameters.

11. The IC of claim 1 further comprises:

an analog to digital interface for conveying the RF receive feedback and the RF receiver calibration information between the receiver section and the calibration processing module and for conveying the RF transmit feedback and the RF transmitter calibration information between the transmitter section and the calibration processing module.

12. An integrated circuit (IC) comprises:

a receiver section coupled to:

provide radio frequency (RF) receive feedback;
 receive RF receiver calibration information that is derived in accordance with a wireless communication protocol and the RF receive feedback; and
 convert an inbound RF signal into the inbound symbol stream in accordance with the RF receiver calibration information and a receive local oscillation;

a transmitter section coupled to:

provide RF transmit feedback;
 receive RF transmitter calibration information that is derived in accordance with the wireless communication protocol and the RF transmit feedback; and
 convert the outbound symbol stream into an outbound RF signal in accordance with the RF transmitter calibration information and a transmit local oscillation; and

a local oscillation module coupled to generate the receive local oscillation and the transmit local oscillation in accordance with the wireless communication protocol.

13. The IC of claim 12 further comprises:

the receiver section coupled to:

provide first and second RF receive feedback;
 convert a first inbound RF signal into a first inbound symbol stream in accordance with a first RF receiver calibration information and a first receive local oscillation; and

convert a second inbound RF signal into a second inbound symbol stream in accordance with a second RF receiver calibration information and a second receive local oscillation;

the transmitter section coupled to:

provide first and second RF transmit feedback;

convert first outbound symbol stream into a first outbound RF signal in accordance with a first RF transmitter calibration information and a first transmit local oscillation; and

convert a second outbound symbol stream into a second outbound RF signal in accordance with a second RF transmitter calibration information and a second transmit local oscillation.

14. The IC of claim 13 further comprises:

the receiver section including:

a first receiver module coupled to:

provide the first RF receive feedback; and

convert the first inbound RF signal into the first inbound symbol stream in accordance with the first RF receiver calibration information and the first receive local oscillation, wherein a carrier frequency of the first inbound RF signal is within a first frequency band; and

a second receiver module coupled to:

provide the second RF receive feedback; and

convert the second inbound RF signal into the second inbound symbol stream in accordance with the second RF receiver calibration information and the second receive local oscillation, wherein a carrier frequency of the second inbound RF signal is within a second frequency band;

the transmitter section including:

a first transmitter module coupled to:

provide the first RF transmit feedback; and

convert the first outbound symbol stream into the first outbound RF signal in accordance with the first RF transmitter calibration information and the first transmit local oscillation, where a carrier frequency of the first outbound RF signal is within the first frequency band; and

a second transmitter module coupled to:

provide the second RF transmit feedback; and

convert the second outbound symbol stream into the second outbound RF signal in accordance with the second RF transmitter calibration information and the second transmit local oscillation, wherein a carrier frequency of the second outbound RF signal is within the second frequency band.

15. The IC of claim 12, wherein the receiver section comprises:

an antenna matching circuit module coupled to receive the inbound RF signal from an antenna system, wherein the antenna matching circuit module is tuned in accordance with a matching control signal of the RF receiver calibration information;

an RF filtering module coupled to filter the inbound RF signal in accordance with an RF filter control signal of the RF receiver calibration information to produce a filtered inbound RF signal;

a low noise amplifier (LNA) module coupled to amplify the filtered inbound RF signal in accordance with a LNA control signal of the RF receiver calibration information to produce an amplified inbound RF signal;

a down conversion module coupled to convert the amplified inbound RF signal into a baseband or near baseband signal based on the receive local oscillation and in accor-

dance with a down conversion control signal of the RF receiver calibration information; and

an analog baseband or near baseband filter module coupled to filter the baseband or near baseband signal in accordance with an analog filter control signal of the RF receiver calibration information to produce an analog representation of the inbound symbol stream.

16. The IC of claim **15** further comprises:

the antenna matching circuit module coupled to generate receive antenna matching feedback of the RF receive feedback;

the RF filtering module coupled to generate RF receive filtering feedback of the RF receive feedback;

the LNA module coupled to generate LNA feedback of the RF receive feedback;

the down conversion module coupled to generate down conversion feedback of the RF receive feedback; and

the analog baseband or near baseband filter module coupled to generate analog filtering feedback of the RF receive feedback.

17. The IC of claim **12**, wherein the transmitter section comprises:

an analog baseband or near baseband filter module coupled to filter the outbound symbol stream in accordance with an analog filter control signal of the RF transmitter calibration information to produce an analog representation of the outbound symbol stream;

an up conversion module coupled to convert the analog representation of the outbound symbol stream into an

up-converted signal based on the transmit local oscillation and in accordance with an up conversion control signal of the RF transmitter calibration information;

a power amplifier (PA) module coupled to amplify the up-converted signal in accordance with a PA control signal of the RF transmitter calibration information to produce an amplified outbound RF signal;

an RF filtering module coupled to filter the amplified outbound RF signal in accordance with an RF filter control signal of the RF transmitter calibration information to produce the outbound RF signal; and

an antenna matching circuit module coupled to provide the outbound RF signal to an antenna system, wherein the antenna matching circuit module is tuned in accordance with a matching control signal of the RF transmitter calibration information.

18. The IC of claim **17** further comprises:

the analog baseband or near baseband filter module coupled to generate analog filtering feedback of the RF transmit feedback;

the up conversion module coupled to generate up conversion feedback of the RF transmit feedback;

the PA module coupled to generate PA feedback of the RF transmit feedback;

the RF filtering module coupled to generate RF filter feedback of the RF transmit feedback; and

the antenna matching circuit module coupled to generate antenna matching feedback of the RF transmit feedback.

* * * * *