



- (51) **International Patent Classification:**
H04W 52/14 (2009.01) H04W 52/32 (2009.01)
H04W 52/24 (2009.01)
- (21) **International Application Number:**
PCT/EP2012/059801
- (22) **International Filing Date:**
25 May 2012 (25.05.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
11305716.0 9 June 2011 (09.06.2011) EP
- (71) **Applicant (for all designated States except US):** ALCA-TEL LUCENT [FR/FR]; 3, avenue Octave Gréard, F-75007 Paris (FR).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** WEBER, Andreas [DE/DE]; Lauchaecker 3, 74251 Lehensteinsfeld (DE). DOETSCH, Uwe [DE/DE]; Rotenbergstrasse 43, 74392 Freudental (DE). VITTONI, Pascal [FR/FR]; 6 rue Pierre Haret, F-75009 Paris (FR). CESAR, Bozo [SI/DE]; Glühwürmchenweg 31, 70439 Stuttgart (DE).
- (74) **Agents:** KLEINBUB, Oliver et al.; Alcatel-Lucent Deutschland AG, Intellectual Property & Standards, Lorenzstrasse 10, 70435 Stuttgart (DE).

- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) **Title:** A METHOD FOR TRANSMISSION OF REFERENCE SIGNALS, A BASE STATION AND A USER TERMINAL THEREFOR

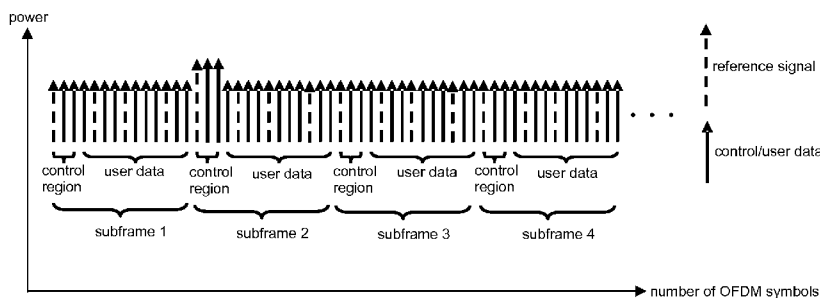


Fig. 4

(57) **Abstract:** The invention concerns a method for transmission of reference signals with a dedicated downlink transmit power for channel estimation from a base station to a user terminal, wherein the dedicated downlink transmit power of the reference signals is controlled per subframe dependent on a channel quality of the user terminal, a base station and a user terminal therefor.

WO 2012/168092 A1

A method for transmission of reference signals, a base station and a user terminal therefor

Field of the invention

5 The invention relates to a method for transmission of reference signals with a dedicated downlink transmit power for channel estimation from a base station to a user terminal, and a base station and a user terminal adapted to perform said method.

10 Background

In cellular communication networks using standards like e.g. Third Generation Partnership Project Long Term Evolution (3GPP LTE) standard, data can be retransmitted, e.g. by Hybrid Automatic Repeat Request (HARQ), in case of block errors. In contrast, control channels messages, e.g. Physical Downlink Control Channel (PDCCH) messages cannot be retransmitted in case of block errors. Hence, the control channel robustness is the limiting parameter for enhanced features, as e.g. load balancing and biased cell selection, in heterogeneous networks (Het-

15 Nets) comprising LTE cells with different radio frequency characteristics, as e.g. Macro cells and Pico cells. This fact limits the possible range for handover parameters, cell individual offset (CIO), etc. In heterogeneous networks, the CIO could

20 serve as a means to increase the footprint of a small cell in order to let more users profit from the additional bandwidth introduced into the network by the small cell.

Cell border user terminals with very bad channel conditions could still be served using the most robust modulation and coding scheme (MCS) for data transport blocks, if, at the same
5 time, the control channel could be received with an acceptable block error probability.

Summary

The object of the invention is thus to propose a method for transmission between a base station and user terminals with re-
10 duced error rate of the control channel, thus offering e.g. an increased footprint of a small cell in a heterogeneous network.

According to the prior art, control channels in LTE are adapted to the current channel quality by using an appropriate code rate. However, for channel qualities below -3 to -7 dB,
15 the block error rate of the control channel is not acceptable. For scenarios with load balancing or HetNets with bias used for small cells, user terminals located at the cell border may have worse channel conditions with unacceptable control channel
20 block error rates. A reduction of the control channel block error rates can be achieved by means of increasing the downlink transmit power. In LTE fast PDCCH power control is possible due to the used Quadrature Phase Shift Keying (QPSK) format. How-
ever, this power control implies to have some power in reserve. Also, it does not involve fast power control of reference sig-
25 nals. Consequently, due to the power control of data symbols of the control channel only, a suboptimal gain is obtained.

In LTE Release 8, it is also possible to boost the reference signals and to inform the user terminals about the transmit
power of the reference signals by higher layer signaling using
30 the Radio Resource Control message SystemInformationBlockType2, but the disadvantage is, that the signaling is quite slow with

a minimum interval between SystemInformationBlockType2 messages being 80 ms, and therefore boosting of reference signals can be enabled for several subframes, but not for one subframe only.

5 The disadvantages of boosting are the additional interference for the neighbor cells and the fact that by boosting the reference signals, the transmit power for the data signals has to be reduced or some data signals in a subframe cannot be used at all. Therefore reference signal boosting shall be performed in those subframes where it is beneficial only.

10 According to the invention, a new downlink transmission scheme for transmission from a base station to a user terminal is proposed, in which the downlink transmit power of signals in a control region of a subframe, as e.g. reference signals or control signals, is controlled dependent on a channel quality
15 of the user terminal on a per subframe timescale.

The object is thus achieved by a method for transmission of reference signals with a dedicated downlink transmit power for channel estimation from a base station to a user terminal, wherein the dedicated downlink transmit power of the reference
20 signals is controlled per subframe dependent on a channel quality of the user terminal.

The object is furthermore achieved by a base station for transmission of reference signals with a dedicated downlink transmit power for channel estimation from the base station to
25 a user terminal, wherein the base station comprises at least one processing means which is adapted to control the dedicated downlink transmit power of the reference signals per subframe dependent on a channel quality of the user terminal.

The object is furthermore achieved by a user terminal for
30 transmission between a base station and the user terminal, wherein the user terminal comprises at least one processing

means which is adapted to receive information per subframe related to the dedicated downlink transmit power of at least one reference signal, and to use said information to enhance the demodulation performance.

5 The invention is described in the following within the framework of 3GPP LTE, however as the invention is not restricted to 3GPP LTE, but can in principle be applied in other networks that apply Orthogonal Frequency Division Multiplexing (OFDM) with a subframe structure and transmission of reference signals
10 and control signals in downlink, like e.g. in WiMAX networks (WiMAX = Worldwide Interoperability for Microwave Access), in the following, instead of the term eNodeB used in LTE, the more general term base station is used.

Further developments of the invention can be gathered from
15 the dependent claims and the following description.

Brief description of the figures

In the following the invention will be explained further making reference to the attached drawings.

Fig. 1 schematically shows a communication network in which
20 the invention can be implemented.

Fig. 2 schematically shows the structure of a user terminal and a base station in which the invention can be implemented.

Fig. 3 schematically shows exemplarily the downlink transmit power of reference signals, control data and user data, with
25 boosting of reference signals in several consecutive subframes according to the prior art.

Fig. 4 schematically shows exemplarily the downlink transmit power of reference signals, control data and user data, with boosting of reference signals and control data in the control

region of a single subframe according to an embodiment of the invention.

Fig. 5 schematically shows exemplarily the downlink transmit power of reference signals, control data and user data, with
5 boosting of reference signals and control data in a single subframe according to an embodiment of the invention.

Description of the embodiments

Fig. 1 shows as an example of a communication network in which the invention can be implemented a communication network
10 CN according to the standard 3GPP LTE.

Said communication network CN comprises base stations BS1-BS3, user terminals UE1-UE4, a serving gateway SGW, a packet data network gateway PDNGW, and a mobility management entity MME.

15 Each of said user terminals UE1-UE4 is connected via radio connections to one or multiple of said base stations BS1-BS3, which is symbolized by flashes in fig. 1. The base stations BS1-BS3 are in turn connected to the serving gateway SGW and to the mobility management entity MME, i.e. to the evolved packet
20 core (EPC), via the so-called S1 interface.

The base stations BS1-BS3 are connected among each other via the so-called X2 interface.

The serving gateway SGW is connected to the packet data network gateway PDNGW, which is in turn connected to an external
25 IP network IPN.

The S1 interface is a standardized interface between a base station BS1-BS3, i.e. an eNodeB in this example, and the Evolved Packet Core (EPC). The S1 interface has two flavours, S1-MME for exchange of signalling messages between the base

station BS1-BS3 and the mobility management entity MME and S1-U for the transport of user datagrams between the base station BS1-BS3 and the serving gateway SGW.

5 The X2 interface is added in 3GPP LTE standard primarily in order to transfer the user plane signal and the control plane signal during handover.

10 The serving gateway SGW performs routing of the IP user data between the base station BS1-BS3 and the packet data network gateway PDNGW. Furthermore, the serving gateway SGW serves as a mobile anchor point during handover either between different base stations, or between different 3GPP access networks.

15 The packet data network gateway PDNGW represents the interface to the external IP network IPN and terminates the so-called EPS bearer (EPS = Evolved Packet System) which is established between a user terminal (UE1-UE4) and the respective serving base station (BS1-BS3).

20 The mobility management entity MME performs tasks of the subscriber management and the session management, and also performs the mobility management during handover between different access networks.

Fig. 2 schematically shows the structure of a user terminal UE and a base station BS in which the invention can be implemented.

25 The base station BS comprises by way of example three modem unit boards MU1-MU3 and a control unit board CU1, which in turn comprises a media dependent adapter MDA.

30 The three modem unit boards MU1-MU3 are connected to the control unit board CU1, and to a respective remote radio head RRH1, RRH2, or RRH3 via a so-called Common Public Radio Interface (CPRI).

Each of the remote radio heads RRH1, RRH2, and RRH3 is connected by way of example to two remote radio head antennas RRHA1 and RRHA2 for transmission and reception of data via a radio interface. Said two remote radio head antennas RRHA1 and RRHA2 are only depicted for the remote radio head RRH1 in fig. 2 for the sake of simplicity.

The media dependent adapter MDA is connected to the mobility management entity MME and to the serving gateway SGW and thus to the packet data network gateway PDNGW, which is in turn connected to the external IP network IPN.

The user terminal UE comprises by way of example two user terminal antennas UEA1 and UEA2, a modem unit board MU4, a control unit board CU2, and interfaces INT.

The two user terminal antennas UEA1 and UEA2 are connected to the modem unit board MU4. The modem unit board MU4 is connected to the control unit board CU2, which is in turn connected to interfaces INT.

The modem unit boards MU1-MU4 and the control unit boards CU1, CU2 may comprise by way of example Field Programmable Gate Arrays (FPGA), Digital Signal Processors (DSP), micro processors, switches and memories, like e.g. Double Data Rate Synchronous Dynamic Random Access Memories (DDR-SDRAM) in order to be enabled to perform the tasks described below.

The remote radio heads RRH1, RRH2, and RRH3 comprise the so-called radio equipment, e.g. modulators and amplifiers, like delta-sigma modulators (DSM) and switch mode amplifiers.

In downlink, IP data received from the external IP network IPN are transmitted from the packet data network gateway PDNGW via the serving gateway SGW to the media dependent adapter MDA of the base station BS on an EPS bearer. The media dependent

adapter MDA allows for a connectivity of different media like e.g. video streaming or web browsing.

The control unit board CU1 performs tasks on layer 3, i.e. on the radio resource control (RRC) layer, such as measurements and cell reselection, handover and RRC security and integrity.

Furthermore, the control unit board CU1 performs tasks for Operation and Maintenance, and controls the S1 interfaces, the X2 interfaces, and the Common Public Radio Interface.

The control unit board CU1 sends the IP data received from the serving gateway SGW to a modem unit board MU1-MU3 for further processing.

The three modem unit boards MU1-MU3 perform data processing on layer 2, i.e. on the PDCP layer (PDCP = Packet Data Convergence Protocol) which is e.g. responsible for header compression and ciphering, on the RLC layer (RLC = Radio Link Control) which is e.g. responsible for segmentation and Automatic Repeat Request (ARQ), and on the MAC layer (MAC = Media Access Control) which is responsible for MAC multiplexing and Hybrid Automatic Repeat Request (HARQ).

Furthermore, the three modem unit boards MU1-MU3 perform data processing on the physical layer, i.e. coding, modulation, and antenna and resource-block mapping.

The coded and modulated data are mapped to antennas and resource blocks and are sent as transmission symbols from the modem unit board MU1-MU3 over the Common Public Radio Interface to the respective remote radio head RRH1, RRH2, or RRH3, and the respective remote radio head antenna RRHA1, RRHA2 for transmission over an air interface.

The Common Public Radio Interface (CPRI) allows the use of a distributed architecture where base stations BS, containing the

so-called radio equipment control, are connected to remote radio heads RRH1, RRH2, and RRH3 preferably via lossless fibre links that carry the CPRI data. This architecture reduces costs for service providers because only the remote radio heads RRH1, RRH2, and RRH3 containing the so-called radio equipment, like
5 e.g. amplifiers, need to be situated in environmentally challenging locations. The base stations BS can be centrally located in less challenging locations where footprint, climate, and availability of power are more easily managed.

10 The user terminal antennas UEA1, UEA2 receive the transmission symbols, and provide the received data to the modem unit board MU4.

The modem unit board MU4 performs data processing on the physical layer, i.e. antenna and resource-block demapping, de-
15 modulation and decoding.

Furthermore, the modem unit board MU4 performs data processing on layer 2, i.e. on the MAC layer (MAC = Media Access Control) which is responsible for Hybrid Automatic Repeat Request (HARQ) and for MAC demultiplexing, on the RLC layer (RLC = Radio Link Control) which is e.g. responsible for reassembly and
20 Automatic Repeat Request (ARQ), and on the PDCP layer (PDCP = Packet Data Convergence Protocol) which is e.g. responsible for deciphering and header compression.

The processing on the modem unit board MU4 results in IP data
25 which are sent to the control unit board CU2, which performs tasks on layer 3, i.e. on the radio resource control (RRC) layer, such as measurements and cell reselection, handover and RRC security and integrity.

The IP data are transmitted from the control unit board CU2
30 to respective interfaces INT for output and interaction with a user.

In the uplink, data transmission is performed in an analogue way in the reverse direction from the user terminal UE to the external IP network IPN.

5 In the sequel, the usage of OFDM symbols in subframes for transmission of reference signals and control and user data between a base station and a user terminal according to the prior art and according to embodiments of the invention is described.

10 In principle, the invention is applicable to OFDM based systems supporting reference signals for decoding, a control channel, a data channel and a time framing.

Fig. 3 schematically shows exemplarily the downlink transmit power of reference signals, control data and user data, with boosting of reference signals in several consecutive subframes according to the prior art.

15 In LTE, each frame is subdivided into 10 subframes, and each subframe in turn comprises 14 OFDM symbols. The downlink system bandwidth in LTE may e.g. for a bandwidth of 10MHz consist of 50 resource blocks, each resource block in turn consisting of 12 subcarriers.

20 In fig. 3, OFDM symbols of four subframes for only one subcarrier are depicted for the sake of simplicity. As according to 3GPP LTE 1 to 4 OFDM symbols can be reserved for the control region PDCCH, in the example depicted in fig. 3, the first 3
25 OFDM symbols of each subframe together build the control region, which is used for transmission of reference signals and control data. The additional OFDM symbols, in this example 11 OFDM symbols, of each subframe are used for transmission of reference symbols and user data.

30 Reference signals, as e.g. the so-called cell-specific reference signals (CRS), are transmitted in every subframe, and can

be used for channel estimation for coherent demodulation of downlink transmission, and for cell-search measurements, both for neighbour-cell measurements for handover and for measurements before initial access.

5 As already mentioned above, in LTE release 8 it is also possible to boost the reference signals in downlink and to inform the user terminals about the transmit power of the reference signals by higher layer signalling, but the disadvantage is, that the signaling is quite slow and therefore boosting of reference signals can be enabled for several subframes, but not
10 for one subframe only. In fig. 3, boosting of reference signals is exemplarily depicted for subframes 2, 3 and 4.

The disadvantages of boosting are the occurring additional interference for the neighbor cells and the fact that by boosting
15 the reference signals, the transmit power in downlink for the data signals has to be reduced, or some data signals in a subframe cannot be used at all. Therefore reference signal boosting shall be performed in those subframes where it is beneficial only.

20 In the embodiment depicted in fig. 3, it is assumed that a user terminal with very bad channel conditions e.g. in the cell border area, as e.g. user terminal UE1 in fig. 1, is scheduled for downlink transmission in subframe 2 only. Thus, it is not beneficial to apply reference signal boosting as in the prior
25 art also in subframes 3 and 4.

According to an embodiment of the invention, in case of user terminals with bad channel conditions, for which control information are sent in a control channel, the reference signals and control data in the control region of the considered subframe
30 only are boosted in order to support the demodulation of the subframe's control channel and data channel messages.

Fig. 4 schematically shows exemplarily the downlink transmit power of reference signals, control data and user data, with boosting of reference signals and control data in the control region of a single subframe according to the embodiment of the invention.

It is assumed, that a user terminal with very bad channel conditions e.g. in the cell border area, as e.g. user terminal UE1 in fig. 1, is scheduled for downlink transmission in subframe 2 only. Thus, according to the embodiment of the invention, boosting of reference signals and control data is applied in the control region of subframe 2 only.

As user data can be retransmitted applying HARQ when standards like 3GPP LTE are used, boosting of reference signals in the user data region of subframe 2 in order to increase the quality of channel estimation for coherent demodulation of downlink transmission is not necessarily needed.

In principle, the downlink transmit power of reference signals or control data is controlled dependent on the channel quality of the respective user terminal, which is defined as symbol energy per noise density, and which is determined e.g. by means of reference signals. The lower the channel quality of the respective user terminal is, the higher the downlink transmit power of reference signals or control data must be in order to achieve an acceptable block error probability of a control channel.

A correlation between channel quality and appropriate downlink transmit power of reference signals or control data can be determined e.g. by means of simulations or measurements. First, the required channel quality for a target block error probability is determined, and then, the downlink transmit power of reference signals or control data needed to achieve

the required channel quality is determined.

In an alternative of the embodiment of the invention depicted in fig. 4, only the reference signals and not the control data in the control region of the considered subframe are boosted in order to support the demodulation of the subframe's control channel and data channel messages. This has the advantage of a reduced interference, with the tradeoff of a slightly increased block error probability for the control data.

According to another embodiment of the invention, in case of user terminals with bad channel conditions, for which control information are sent in a control channel, it is moreover proposed that downlink transmit power control of reference signals refers to all reference signals of the considered subframe, i.e. all reference signals of the considered subframe are boosted in order to support the demodulation of the subframe's control channel and data channel messages. By means of boosting all reference signals in the considered subframe, the accuracy of channel estimation for the user data region is also increased, leading to a reduced block error probability for the user data.

Fig. 5 schematically shows exemplarily the downlink transmit power of reference signals, control data and user data, with boosting of reference signals and control data in a single subframe according to the other embodiment of the invention.

As in the embodiment depicted in fig. 4, it is assumed, that a user terminal with very bad channel conditions e.g. in the cell border area, as e.g. user terminal UE1 in fig. 1, is scheduled for downlink transmission in subframe 2 only. Thus, according to the embodiment of the invention depicted in fig. 5, boosting of reference signals and control data is applied over the whole subframe 2.

Although user data can be retransmitted applying HARQ when standards like 3GPP LTE are used, boosting of reference signals in the user data region of subframe 2 in order to increase the quality of channel estimation for coherent demodulation of
5 downlink transmission is advantageous, as this leads to a reduced block error probability of user data.

The invention as described above is especially useful for small cells in LTE or LTE Advanced heterogeneous networks, as they often serve only a low number of user terminals. If there
10 are only a small number of user terminals allocated to the small cell, not all resource elements of every OFDM symbol of the control region are used. In this case, the downlink transmit power of control channel messages addressed to user terminals with bad channel conditions that already use the most robust
15 code rate for their control channel transmission is increased, while maintaining the maximum power of the transmitter. In the same subframe, the reference signals are boosted, either only in the control region of the subframe as shown in fig. 4, or in the whole subframe as shown in fig. 5. This reduces
20 the control channel block error rate and also the user data block error rate to a reasonable level.

In case of a higher number of user terminals allocated to the cell, the scheduler of the base station has to take care that
25 only a low number of user terminals are addressed in case one of the addressed user terminals has bad channel conditions, thus enabling the increase of downlink transmit power for reference signals and preferably also of control data in a subframe.

In alternatives of the embodiments described above, the allocation of downlink transmit power to resource blocks or control
30 channel elements of at least one further user terminal, as e.g. user terminal UE2 with better channel conditions than user ter-

minal UE1 located in the cell border area, is reduced if the dedicated downlink transmit power of the reference signals or the control signals from the base station BS1 to the user terminal UE1 is boosted. Thus, a higher power allocation to the user terminal UE1 is possible with maintaining at the same time a maximum power constraint.

In other alternatives of the embodiments described above, the number of resource blocks or control channel elements used for downlink transmission is chosen in such a way, that the overall downlink transmit power is below a maximum available power. For example, broadcast control channel messages can be boosted when, at the same time, a scheduler in the base station takes care that not the whole bandwidth is used for other downlink transmissions.

In further alternatives of the embodiments described above, the control region for control signaling of a subframe comprises more resource elements than necessary for control signaling, so that a higher power budget for reference signals or control signaling in downlink is available.

In order to enhance the demodulation performance for downlink control data or user data transmissions of a subframe, for the same subframe, the reference signal power allocation or the control data power allocation is signaled preferably via a robust control channel message from the base station to the user terminal. In the control channel message, information about the downlink transmit power or the boost value are comprised. For the downlink transmit power or the boost value, only a few steps are required, as e.g. 0dB, 3dB, 6dB, 9dB for the boost value. Furthermore, the control channel message preferably comprises information, if all reference signals in the subframe are boosted or only those reference signals located in the control region of the subframe. For the control channel message,

e.g. a new common Downlink Control Information (DCI) format could be defined which broadcasts the signaling information described above to all user terminals in the cell.

5 Using said signaling information, user terminals are able to use reference symbols in the control region and the user data region of the subframe in order to enhance channel measurements required for the demodulation of control data and user data transmissions and for the generation of channel quality information feedback.

10 In an embodiment of the invention, a scheduler in the base station restricts the modulation scheme for downlink transmission to QPSK during subframes with temporary reference signal boosting, as with the robust modulation scheme QPSK, the probability for an error-free demodulation in the user terminal is
15 high.

Claims

- 5 1. A method for transmission of reference signals with a
dedicated downlink transmit power for channel estimation
from a base station (BS1) to a user terminal (UE1),
wherein the dedicated downlink transmit power of the ref-
10 erence signals is controlled per subframe dependent on a
channel quality of the user terminal (UE1).
- 15 2. A method according to claim 1, wherein only the dedicated
downlink transmit power of reference signals in a control
region for control signaling of a subframe is controlled
per subframe dependent on the channel quality of the user
terminal (UE1).
- 20 3. A method according to any of the preceding claims, where-
in also a dedicated downlink transmit power of control
signals transmitted from the base station (BS1) to the
user terminal (UE1) is controlled per subframe dependent
on the channel quality of the user terminal (UE1).
- 25 4. A method according to any of the preceding claims,
wherein an allocation of downlink transmit power to re-
source blocks or control channel elements of at least one
further user terminal (UE2) is reduced if the dedicated
downlink transmit power of the reference signals or the
control signals from the base station (BS1) to the user
terminal (UE1) is boosted.
5. A method according to any of the preceding claims,
wherein a number of resource blocks or control channel

elements used for downlink transmission is chosen in such a way, that the overall downlink transmit power is below a maximum available power.

- 5 6. A method according to any of the preceding claims, wherein the control region for control signaling of a subframe comprises more resource elements than necessary for control signaling, so that a higher power budget for reference signals or control signaling in downlink is available.
- 10 7. A method according to any of the preceding claims, wherein information per subframe related to the dedicated downlink transmit power of at least one reference signal or control data is transmitted in downlink via at least one control channel message.
- 15 8. A method according to claim 7, wherein said information comprises the dedicated downlink transmit power of the at least one reference signal or control data, or information, if all reference signals of a subframe are boosted, or only reference signals in a control region of the sub-
- 20 frame.
9. A method according to claim 7 or 8, wherein said information is broadcast to user terminals (UE1, UE2) of a cell using a downlink control information message common to all the user terminals of the cell.
- 25 10. A method according to any of the preceding claims, wherein a modulation scheme is restricted to quadrature phase shift keying for downlink transmission in subframes with a dedicated downlink transmit power of at least one reference signal above a predefined threshold.
- 30 11. A base station (BS1) for transmission of reference sig-

nals with a dedicated downlink transmit power for channel estimation from the base station (BS1) to a user terminal (UE1), wherein the base station (BS1) comprises at least one processing means which is adapted to control the dedicated downlink transmit power of the reference signals per subframe dependent on a channel quality of the user terminal (UE1).

5

12. A user terminal (UE1) for transmission between a base station (BS1) and the user terminal (UE1), wherein the user terminal (UE1) comprises at least one processing means which is adapted to receive information per subframe related to the dedicated downlink transmit power of at least one reference signal, and to use said information to enhance the demodulation performance.

10

13. A communication network (CN) comprising at least one base station (BS1) according to claim 11.

15

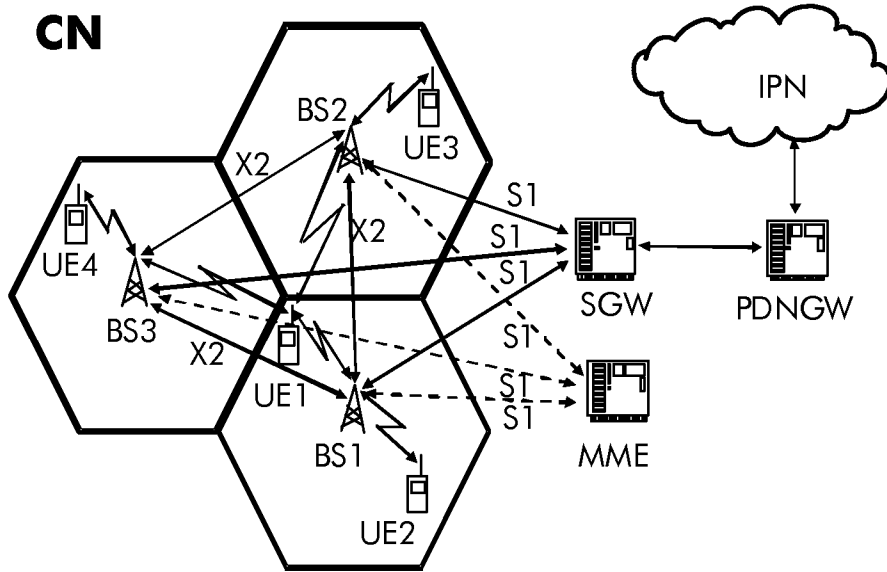


Fig. 1

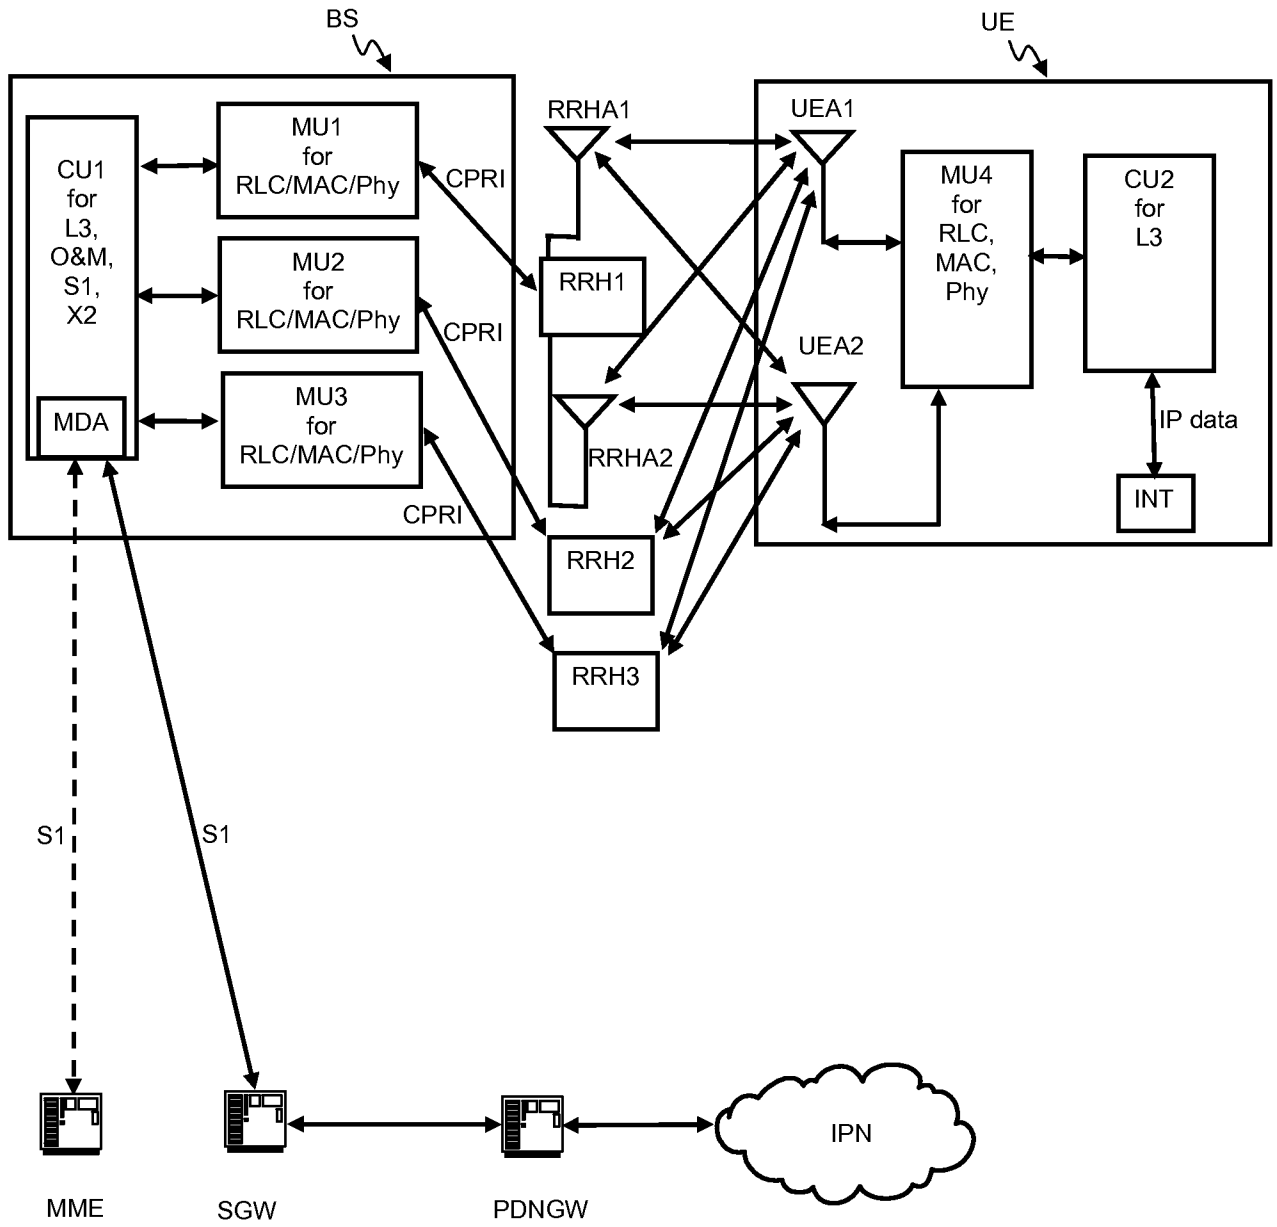


Fig. 2

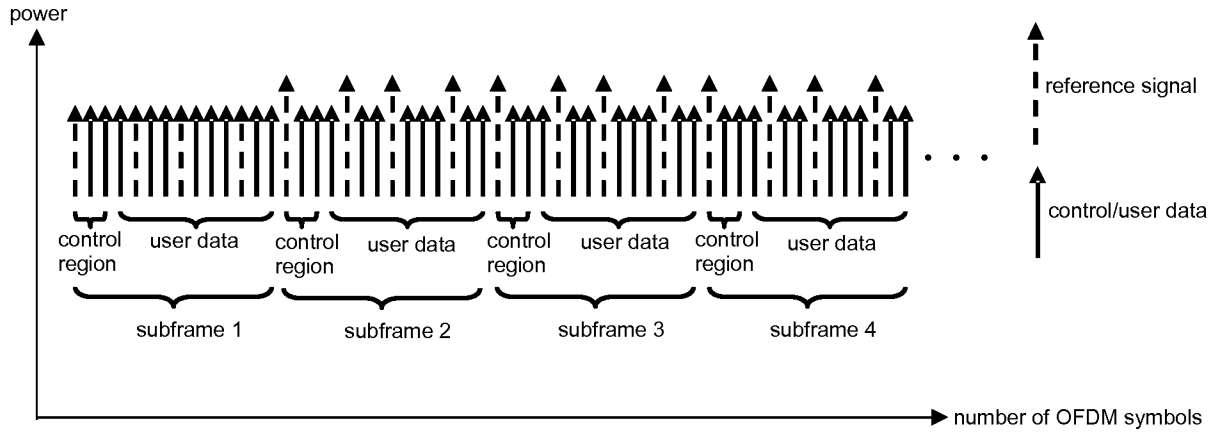


Fig. 3

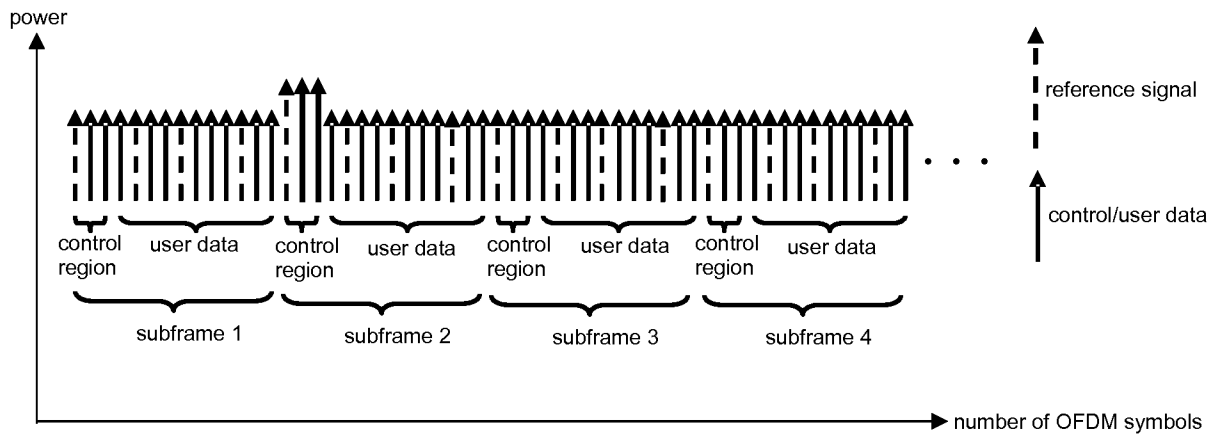


Fig. 4

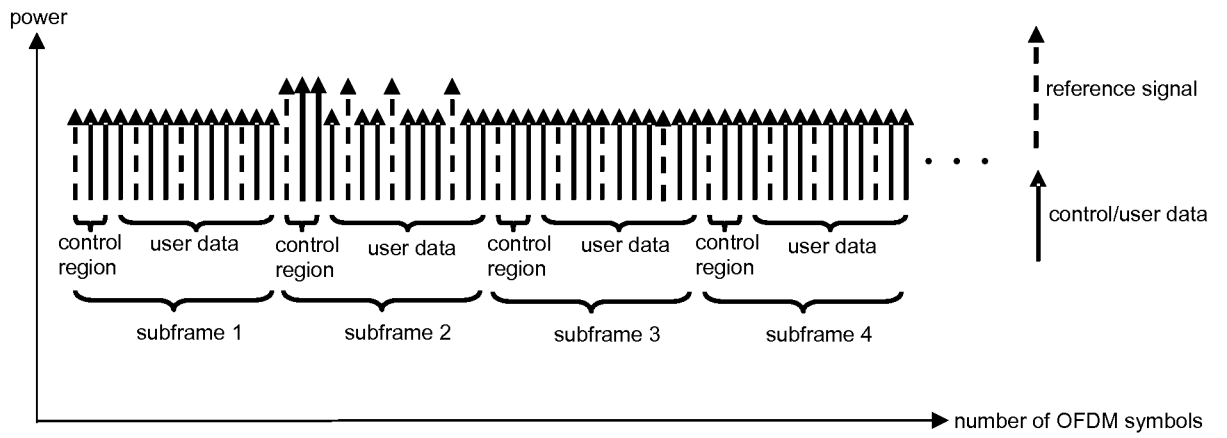


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/059801

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04W52/14 H04W52/24 H04W52/32
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	LG ELECTRONICS: "Link adaptation for downlink control channel", 3GPP DRAFT; R1-072880, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG1, no. Orlando, USA; 20070620, 20 June 2007 (2007-06-20), XP050106559, the whole document	1-3,5-13
A	WO 2009/108011 A1 (LG ELECTRONICS INC [KR]; CHUNG JAE HOON [KR]; KO HYUN SOO [KR]; LEE MO) 3 September 2009 (2009-09-03) the whole document	1-13
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	---

Date of the actual completion of the international search 13 June 2012	Date of mailing of the international search report 21/06/2012
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Boetzel, Ulrich
--	---

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/059801

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2007/004465 A1 (PAPASAKELLARIOU ARIS [US] ET AL) 4 January 2007 (2007-01-04) paragraph [0032] paragraph [0065] - paragraph [0071] -----	1-13
A	EP 0 893 889 A2 (MATSUSHITA ELECTRIC IND CO LTD [JP] MATSUSHITA ELECTRIC IND CO LTD) 27 January 1999 (1999-01-27) the whole document -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/059801

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2009108011 A1	03-09-2009	CN 101960740 A	26-01-2011
		EP 2258058 A1	08-12-2010
		JP 2011517382 A	02-06-2011
		KR 20090093758 A	02-09-2009
		US 2011003567 A1	06-01-2011
		WO 2009108011 A1	03-09-2009

US 2007004465 A1	04-01-2007	NONE	

EP 0893889 A2	27-01-1999	CA 2236066 A1	19-01-1999
		EP 0893889 A2	27-01-1999
