



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G08C 17/04, 17/06, G06K 7/08, G01K 1/02	A1	(11) International Publication Number: WO 00/26884 (43) International Publication Date: 11 May 2000 (11.05.00)
---	-----------	--

(21) International Application Number: PCT/US98/23101

(22) International Filing Date: 30 October 1998 (30.10.98)

(71) Applicant (for all designated States except US): THE GOODYEAR TIRE & RUBBER COMPANY [US/US]; D/823, 1144 East Market Street, Akron, OH 44316-0001 (US).

(72) Inventor; and


(75) Inventor/Applicant (for US only): DUNN, William, Frank [US/US]; 4730 Nottingham Lane, Stow, OH 44224 (US).

(74) Agent: WHEELER, David, E.; The Goodyear Tire & Rubber Company, D/823, 1144 East Market Street, Akron, OH 44316-0001 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published*With international search report.*

(54) Title: CONTAINER WITH SENSOR

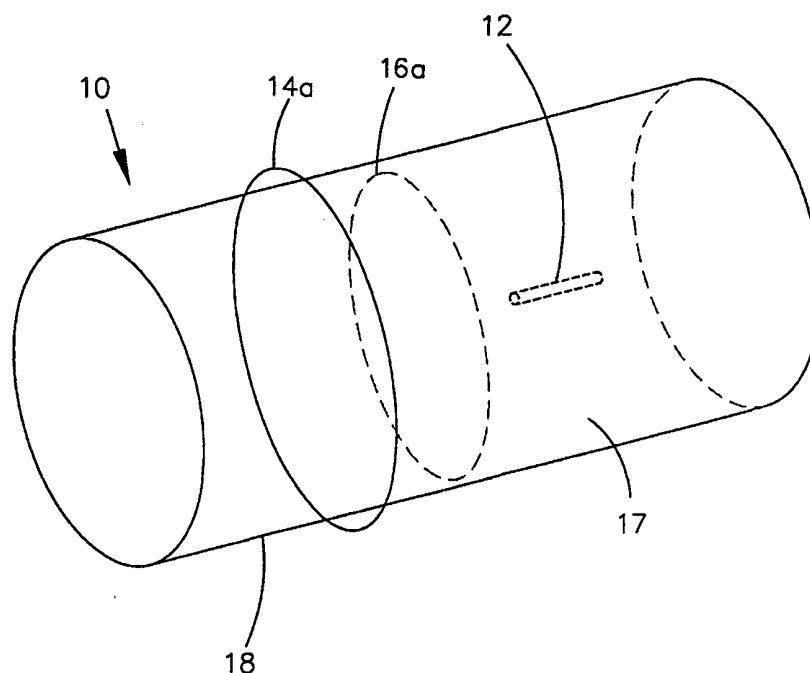

(57) Abstract

A sealed container (10) is provided with a sensor (12, 26, 36) capable of monitoring the physical and/or chemical condition of materials stored in the container. The sensor may or may not have its own power source. In the embodiment where the sensor does not have a power source, a communicator induces a signal in the sensor and receives a return signal with the desired data. The container may be a metal or a nonmetal.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

CONTAINER WITH SENSOR**Technical Field**

5 The present invention relates to a method and apparatus for monitoring stored chemicals.

Background of the Invention

 It is sometimes necessary to store chemical compositions that are sensitive to heat, moisture, and pressure, as well as chemicals that are volatile or subject to degradation, for long periods of time. The physical or chemical condition of the chemicals can be monitored by testing
10 samples of the chemical, but such sampling is time consuming, wastes materials, and is sometimes risky.

 Nevertheless, for quality assurance, safety, and other reasons, it is important to know when chemicals, such as fertilizers, rocket fuels, and explosives, are or have been overheated, decomposed, contain too much moisture, or are subjected to other undesirable conditions. In
15 some instances, it is not practical to break open the containers and sample the chemicals to determine their condition.

 Accordingly, it is a goal of this invention to create a method and apparatus for quickly and accurately determining the condition of a chemical composition while the chemical composition is in a sealed container.

20 Other objects of the invention will be apparent from the following description and claims.

Description of the Prior Art

 Systems for monitoring vehicle tire pressure and the like have been proposed wherein a transmitter and a receiver are mounted on a vehicle body, and magnetically coupled inductor
25 and enhancer circuits are carried on the vehicle wheel to provide monitoring a vehicle tire pressure, as described by Allen in U.S. Patent 4,588,978. Other devices to monitor tire pressure have been proposed by Galasko et al., in U.S. Patent 4,578,992, who teach a coil mounted in a tire which forms, with a capacitor, a passive oscillatory circuit. The circuit is energized by pulses supplied via a coil positioned outside the tire and secured to the vehicle,
30 and the frequency in the passive oscillatory circuit is varied with tire pressure due to changes caused to the capacitance value of the capacitor. The frequency in the circuit is sensed by a coil positioned outside the tire and secured to the vehicle.

 Milheiser, in U.S. Patent 4,730,188, teaches the use of a passive integrated transponder which is attached to or imbedded in an item to be identified, and is excited by an
35 inductive coupling from an interrogator.

 Fiorletta, in U.S. Patent 5,289,160, teaches a wireless tire pressure monitoring system

which warns a driver of low pressure in one or more tires. Fiorletta teaches that a pressure transducer, transmitter and antenna are integrally housed and mounted to the tire stem of a tire. When the pressure transducer senses a tire pressure below a pre-selected pressure, the transmitter broadcasts a radio frequency signal that, upon detection by a receiver mounted on the vehicle, warns the driver. In a preferred embodiment, the transmitter is a device that is periodically interrogated by an RF signal from a transmitter on the vehicle.

In PCT Application WO90/12474, it is taught that electronic transponders can be embedded within or on vehicle tires and electromagnetically actuated by signals from an interrogator coil. The application indicates that the transponder responds to actuation by producing a shifted frequency modulated with synchronization pulses and identifying digital information, and can also be used to include information on the condition and environment of the tire.

Hettich et al., in U.S. Patent 5,140,851, teach a circuit arrangement for monitoring air volume in vehicle tires which provides correction for the temperature of the tire. The patent states that the temperature and pressure measurement value of the tire is measured by a rotating sensor on the wheel, which is monitored, and the data fed to a correction circuit which also receives a plurality of correction parameters. A corrected value for the temperature or for the air pressure in the tire is transmitted at output of the correction circuit as a function of the correction parameters.

PCT Application WO92/20539 provides an abnormal tire condition warning system which comprises a housing, a band for mounting the housing on the tire rim, a sensor for monitoring the condition within the tire, circuitry operatively connected to the sensor for generating radio signals indicative of the tire condition, a power supply operatively connected to the circuitry, a centrifugal switch and a receiver for receiving the radio signals.

Dunn et al., in U.S. Patent 4,911,217 describe a radio-frequency tire identification system having an integrated circuit chip transponder.

Pollack et al., in U.S. Patent 5,181,975, teach a tire having an integrated circuit transponder which comprises a coil antenna of small enclosed area, as compared to the area enclosed by the bead of the tire, which acts as a primary winding of a transformer. The coil is planar in shape, and when positioned between the innerliner and the carcass ply of the tire, may include a pressure sensor.

Brown et al., in U.S. Patent 5,218,861, teach a pneumatic tire having an integrated circuit transponder which has an antenna which is coupled by electric or magnetic fields to the bead of the tire.

Disclosure of Invention

A method of monitoring physical parameters of a composition enclosed in a container comprises the steps of (a) embedding a id-tag/sensor (transponder) in a composition wherein the sensor is capable of measuring physical parameters of the composition, (b) enclosing the composition in a container, (c) winding an antenna around the container in the proximity of the sensor, (d) bringing a communication means into proximity to the antenna, and (e) activating the sensor through the antenna using the communication means, and receiving and recording a response from the sensor using the communication means.

A ferrite core may be associated with the sensor for amplifying signals to and from the sensor.

Further, the physical parameters measured may be selected from the group comprising pressure data, temperature data, moisture content data, chemical data and mixtures thereof.

The sensor may be enclosed in a loop of wire, wherein the sensor is electrically coupled with the wire to form a coupled sensor, a second wire may be placed adjacent to the coupled sensor, and an antenna may be placed adjacent to the second wire.

In an alternative embodiment, the method may comprise the steps of (a) embedding an E-field sensor in a chemical composition, the E-field sensor being capable of measuring physical parameters of said chemical composition, (b) enclosing the composition in a container, (c) placing an E-field antenna at opposed sides of the container, (d) creating an E-field in the antenna using an E-field driver to induce a signal in and receive a signal from the sensor, (d) bringing an E-field reader into proximity to the antenna, and (e) receiving and recording a response from the sensor.

In the methods, the receiving antenna may be placed inside or outside the container, it being important only that the receiving antenna be in close proximity to the transponder.

Also provided is a container for containing a chemical composition, the container comprising (a) impenetrable materials completely enclosing an interior space and having an inside and an outside, (b) an id-tag/sensor disposed inside the container, the id-tag/sensor being capable of retaining identification information and measuring physical or chemical parameters of the interior space, and an antenna associated with the sensor.

The antenna may comprise at least two loops of wire, a first wire being disposed in the proximity of the impenetrable material of the container and the sensor, and a second wire being disposed around the container. The first wire may be inside or outside the container. The first wire is used as a receiving antenna and the second wire is used as a transmitting antenna for the id-tag/sensor, and the id-tag/sensor is activated by communication means

associated with the transmitting antenna.

The sensor may be a ferrite core pressure and temperature sensor having id information associated therewith, and the impenetrable material of the container may be a metal or a nonmetal.

5 In an alternative embodiment, the sensor may be in proximity to and coupled to a loop of wire disposed in the proximity of the impenetrable material of the container, and the loop of wire may be inductively associated with an antenna outside the container.

In another alternative embodiment of the container, the id-tag/sensor may comprise a chip sandwiched between an upper electrode and a ground electrode wherein the sensor is
10 activated by at least two E-field plates at opposed sides of the id-tag/sensor. A first E-field plate may comprise a metal core in the interior of the container, and a second E-field plate may comprise the impenetrable material of the container. Alternatively, a first E-field plate may comprise a flat metal upper plate disposed on a first side of the container, and a second E-field plate may comprise a flat metal ground plate disposed on a second, opposed side of the
15 container.

Brief Description of Drawings

Fig. 1 illustrates antenna wire surrounding a container which has an id-tag/sensor inside.

Fig. 1a illustrates an alternative configuration of Fig. 1 wherein at least one antenna wire is inside the container.

20 Fig. 2 illustrates a container having a sensor inductively coupled with a loop of wire inside the container which is further coupled with an exterior antenna.

Fig. 2a illustrates a container having a sensor inductively coupled with a loop of wire outside the container which is further coupled with an exterior antenna.

25 Figs. 3 and 3a illustrate, respectively, a perspective view and a side view of a chip sandwiched between an upper electrode and a ground electrode.

Fig. 4 illustrates a container wherein a sensor is enclosed inside, and plates capable of creating an E-field are disposed at sides of the container.

Fig. 5 illustrates a container wherein a metal core in the container and the container material are capable of creating an E-field.

30 Detailed Description of the Invention

In the art relating to the gathering of information from an animate or dynamic objects, the trend has been toward implanting a device which is capable of transmitting information and is responsive to an outside power source. This is accomplished by including a coil (which is capable of carrying an induced electrical current) of some sort in the implanted device. An

electrical current can be induced in the coil by a magnetic field produced by an interrogator as the lines of flux from the magnetic field cut across the coil. The current produced in the coil, in turn, produces a magnetic field which can be read by the interrogator. The current in the coil, and the signal read by the interrogator, can be altered by electrical devices used to provide tire data, such as temperature and pressure sensors, and these differences in the signal can be read and interpreted by the interrogator.

A transponder used in the invention may be similar to that illustrated in U.S. Patents 5,181,975 (Appln No. 676153) and 5,218,861 (Appln No. 676121), assigned to The Goodyear Tire and Rubber Company, and commonly assigned Appln. No. PCT/97/22570, Appln. No. PCT/97/22571, and Appln. No. PCT/97/22463, and may provide identification data, and may be used to monitor pressure, the temperature, the chemical composition of the container and the like.

The transponder or signal generator means may comprise a chip and conducting wires which are used to receive a signal from a communicator and to transmit data in response to the communicator signal.

An antenna may be provided, in the illustrated embodiment, in one or more turns of conductor wire. Although a sufficient signal may be obtained with one turn of wire, the signal is boosted as additional turns are added since the amount of current developed is dependent on the number of lines of magnetic flux encountered by the antenna in accordance with the ampere law.

Three different wires, for example, can be used to obtain three turns of antenna wire.

With reference now to Fig. 1, a container 10 of the invention is illustrated as having a cylindrical shape. Although other shapes are possible for containers of the invention, cylindrical shape may be representative of rockets, artillery shells, and drums of fertilizer, which are used as examples of containers which are embodied by the present invention.

In Fig. 1, at least one antenna wire (two antenna wires 14 and 16 are illustrated) are exterior (outside) of the material 18 comprising the container. A transponder 12 comprising a ferrite core passive sensor (PST) is located in the interior of the container (inside), in close physical contact with the material 17 stored in the container, i.e., within the substance that is monitored.

The material 18 of the container is impenetrable, i.e., it is capable of holding or containing the material for which it is designed for a substantially indefinite period of time under normal conditions. By normal conditions it is meant that the container is not subjected to significant outside stimuli. Non-limiting examples of container material may include

cardboard, fiberglass, paper, metal and glass.

With reference now to Fig. 1a, in an alternative embodiment, at least one antenna wire 14a is outside container 10 and at least one antenna wire 16a is inside container 10.

In Figs. 1 and 1a, the at least one antenna wire 14,14a is used as a transmitting antenna
5 for transponder 12 and the at least one antenna wire 16, 16a is used as a receiving antenna for transponder 12.

As illustrated, receiving antenna wire 16,16a must be in close proximity to transponder 12, but transmitting antenna wire 14,14a may be remote from transponder 12. For example, receiving antenna 16 may be disposed in close proximity to the skin of a rocket, either inside
10 or outside the skin of the rocket, and the transmitting antenna 14,14a may be disposed around the rocket's container or silo. When a communicator, such as an interrogator, sets up a signal in the transmitting antenna, the signal is boosted and then picked up by the receiving antenna, through which the transponder is activated.

In some embodiments of the invention, the transponder may be conductively connected
15 to the antenna wire in the manner disclosed in the copending PCT applications mentioned above. For most applications, however, it is preferred that the transponder be free of the antenna wire and be designed to be activated by an inductive signal through the antenna.

Although an interrogator, as described in the patents and applications cited herein, may be used to induce a signal in the transponder, for many applications it will be more convenient
20 to conductively connect a communicator (not shown) to the antenna through leads. The communicator can then be used to transfer an electrical current directly to the antenna, as opposed to inducing such a current when an interrogator is used. The signals may be generated in the same manner as described for an interrogator.

The communicator may be powered by a battery or an alternating current (AC) or
25 direct current (DC) generator. Those skilled in the art will know how to generate, receive and process signals generated by any power source.

Since metals dissipate some signals, for best results, container material 18 in the illustrated embodiments of Figs. 1 and 1a should be a nonmetal.

In an alternative embodiment of the invention, as illustrated in Figs. 2 and 2a, the
30 transponder 26, with the desired sensors, may be inductively coupled to an antenna wire 22,22a which may be either inside or outside the container 10a. In such an embodiment, the transmitting antenna 24 is, similar to the embodiment shown in Figs. 1 and 1a, remote from transponder 26.

Although antenna 24 is illustrated as a woven wire grid, those skilled in the art will

recognize that antenna 24 may be in any suitable form for inducing a signal in receiving antenna 22,22a and picking up a return signal therefrom.

As was the case in the embodiment of Figs. 1 and 1a, for best results the material 18a of container 10a will preferably be a nonmetal.

5 In a further alternative embodiment, data signals may be provided by an E-field generator.

When an E-field application is used, a transponder 36 is sandwiched between an upper electrode 15 and a ground electrode 30, as illustrated in Figs. 3 and 3a, and capacitance between the upper electrode 15 and ground electrode 30 activates a signal from transponder
10 36.

As further illustrated in Fig. 4, an E-field is induced in upper plate 15 by a charge created in charge plate 46 by E-field driver 48. Conductor 45 connects E-field driver 48 with charge plate 46 and ground plate 44.

As in the earlier embodiments, for best results, it is preferred that container material
15 18b of container 10b be a nonmetal.

With reference now to Fig. 5, in an alternative use of an E-field driver, a metal core 54 may be provided in the center of container 18c to act as a charge plate when connected to E-field driver 48 through conductor 55. In such an embodiment, the material 18c of the container may be a metal, and the material 18c may act as the ground plate for the E-field
20 driver when connected to E-field driver 48 through conductor 55.

One of the primary uses for the apparatus of the invention is to provide data on the history as well as the present condition of the chemical composition. It is important to know if the chemical composition has encountered excessively high temperatures. The chip in transponder 12, 36, can be provided with means to collect pressure and temperature data and
25 to receive information on the current condition of the chemical composition, to be retained along with identification data.

In the illustrated embodiment, transponder 12,36 may be activated by a communicator that transmits at a specific radio frequency and the chip responds by stepping down the radio signal to transmit one-half the radio frequency in a return signal. The radio frequency is
30 heterodyned against the return signal frequency producing a difference side band to reinforce the return signal response.

In the illustrated embodiment, the temperature reading is obtained by counting and entering into memory of the communicator the number of cycles output from an oscillator, the frequency of which is proportional to temperature. The temperature can be read by converting

a voltage signal to a digital display, where there is a band gap voltage shift with a change in temperature.

Alternatively, a temperature can be read by a switch which is operated by the linear thermal expansion of the materials from which it is constructed. The switch is designed to change signals, i.e. from the binary 0 to 1 for example, when the maximum designated temperature is exceeded. The switch cannot be reset, and a change in the binary signal of the switch indicates that the container has been thermally compromised.

In the illustrated embodiment, the pressure sensor provides real time information, that is the pressure in the container at the time of the reading.

In the illustrated embodiment the pressure sensor provides a capacitance measurement which is directly related to the pressure. In the pressure sensor, a highly doped silicon electrode having a thin flexible diaphragm micromachined (etched) into its center, is placed over an electrically conductive substrate, and the distance of separation of the flexible diaphragm from the substrate controls the resulting capacitance. Silicon dioxide is used as an electrical insulator, preventing shorting between the substrate and the electrode. The surface area of the oxide coating and its distance of separation from the substrate controls the capacitance reading. Accordingly, as the pressure increases, the distance of separation between the silicon and substrate electrodes decreases, and the capacitance changes, and a measurement of the capacitance can be digitally converted to a pressure reading in pounds per square inch, or other dimensions as required. Silicon rubber or polyurethane rubber can be used to fill the void above the flexible diaphragm to serve as a pressure-coupling medium between the chemical composition and the measuring diaphragm. The capacitance measured is in the picofarad (pf) region, and the communicator can be pre-programmed to convert the picofarad (pf) measurements to pounds per square inch.

In the illustrated embodiment, the real time temperature sensor is a band gap reference diode which is part of the integrated circuit. An alternative temperature sensor may comprise a bimetallic latching sensor, for example a gold/chromium alloy (Au/Cr) on a silicon (Si) substrate.

Those skilled in the art will recognize that sensors and containers of the invention can take many different forms. For example, the container may be a concrete pillar, as for a bridge or high rise building, and the sensor can take the form of a strain gauge, whereby stresses on the structure of the pillar can be monitored.

While the invention has been variously illustrated and described, those skilled in the art will recognize that the invention can be variously modified and practiced without departing

from the spirit of the invention. The scope of the invention is limited only by the following claims.

CLAIMS

1. A method of monitoring physical parameters of a composition (17) enclosed in a container (10,10a,10b,10c) comprising the steps of
 - (a) embedding in a composition (17) a sensor (12,26,36) capable of measuring
5 physical parameters of said composition
 - (b) enclosing said composition (17) in a container (10,10a,10b,10c)
 - (c) winding an antenna (14,14a,16,16a,22,22a,24) around said container
910,10a,10b,10c) in the proximity of said sensor (12,26,36)
 - (d) bringing a communication means into proximity to said antenna
10 (14,14a,16,16a,22,22a) and
 - (e) activating said sensor (12,26,36) through said antenna (14,14a,16,16a,22,22a)
using said communication means and receiving and recording a response from said sensor
(12,26,36) using said communication means.
2. The method of claim 1 comprising the further step of associating a ferrite core with
15 said antenna for amplifying signals to and from said sensor.
3. The method of claim 1 comprising the further step of selecting said physical parameters
from the group comprising pressure data, chemical data, temperature data, moisture content
data and mixtures thereof.
4. The method of claim 1 comprising the further steps of enclosing said sensor (26) in a
20 loop of wire (27), wherein said sensor (26) is electrically coupled with said wire (27) to form
a coupled sensor, placing a second wire (22,22a) adjacent to said coupled sensor, and placing
an antenna (24) adjacent said second wire (22,22a).
5. The method of claim 1 comprising the further steps of sandwiching said sensor (36)
between an upper electrode (15) and a lower electrode (30).
- 25 6. A method of monitoring physical parameters of a chemical composition (17) enclosed
in a container (10) comprising the steps of
 - (a) embedding in a chemical composition (17) an E- field sensor (36) capable of
measuring physical parameters of said chemical composition (17)
 - (b) enclosing said composition in a container (10b,10c)
 - 30 (c) placing an E-field plate (44,46) at opposed sides of said container (10b,10c)
 - (d) creating an E-field in said plate (44,46) using an E-field driver (48) to induce a
signal in and receive a signal from said sensor (36)
 - (d) bringing an E-field reader into proximity to said plate (44,46), and
 - (e) receiving and recording a response from said sensor (36).

7. A method of monitoring physical parameters of a chemical composition (17) enclosed in a container comprising the steps of

(a) embedding in a chemical composition (17) an E- field sensor (36) capable of measuring physical parameters of said chemical composition

5 (b) enclosing said composition (17) in a container (10b,10c)

(c) embedding an antenna in said chemical composition in proximity to said sensor (36)

(d) creating an E-field in said antenna (54) using an E-field driver (48) to induce a signal in and receive a signal from said sensor (36)

10 (e) bringing an E-field reader into proximity to the material (18c) of said container (10c), and

(f) receiving and recording a response from said sensor (36)

8. A container (10,10a,10b,10c) for containing a chemical composition (17), said container comprising

15 (a) impenetrable materials (18,18a,18b,18c) completely enclosing an interior space and having an inside and an outside

(b) an id-tag/sensor (12,26,36) disposed inside said container (10,10a,10b,10c), said id-tag/sensor being capable of retaining identification information and measuring physical or chemical parameters of said interior space

20 (c) at least one antenna (14,14a,16,16a,22,22a,24) associated with said sensor.

9. The container of claim 8 wherein said antenna comprises at least two loops of wire (14,14a,16,16a), a first said wire (16,16a) being disposed in the proximity of the impenetrable material (18) of said container (10) and said sensor (12), and a second said wire (14,14a) being disposed around said container (10).

25 10. The container of claim 9 wherein said first wire (16a) is inside said container (10).

11. The container of claim 9 wherein said first wire (16) is outside said container (10).

12. The container of claim 8 wherein said sensor (12) is a ferrite core pressure and temperature sensor having id information associated therewith, and said impenetrable material (18) of said container (10) is a nonmetal.

30 13. The container of claim 9 wherein said first wire (16,16a) is used as a receiving antenna and said second wire (14,14a) is used as a transmitting antenna for said id-tag/sensor (12), and said id-tag/sensor (12) is activated by communication means associated with said transmitting antenna.

14. The container of claim 8 wherein said sensor (26) is in proximity to and coupled to a

loop of wire (22) disposed in the proximity of said impenetrable material (18a) of said container (10a), and said loop of wire (22) is inductively associated with an antenna (24) outside said container (10a).

15. The container of claim 14 wherein said impenetrable material (18a) of said container
5 (10a) is a nonmetal.

16. The container of claim 8 wherein said id-tag/sensor (36) comprises a chip sandwiched between an upper electrode (15) and a ground electrode (30) wherein said sensor (36) is activated by at least two E-field plates (44,46) at opposed sides of said id-tag/sensor (36).

17. The container of claim 16 wherein said impenetrable material (18a) is a metal.

10 18. The container of claim 17 wherein a first E-field plate comprises a metal core (54) in the interior of said container (10c), and a second E-field plate comprises the impenetrable material (18c) of said container (10c).

19. The container of claim 16 wherein said impenetrable material (18b) is a nonmetal.

15 20. The container of claim 19 wherein a first E-field plate comprises a flat metal upper plate (46) disposed on a first side of said container (10b), and a second E-field plate comprises flat metal ground plate (44) disposed on a second, opposed side of said container (10b).

1/7

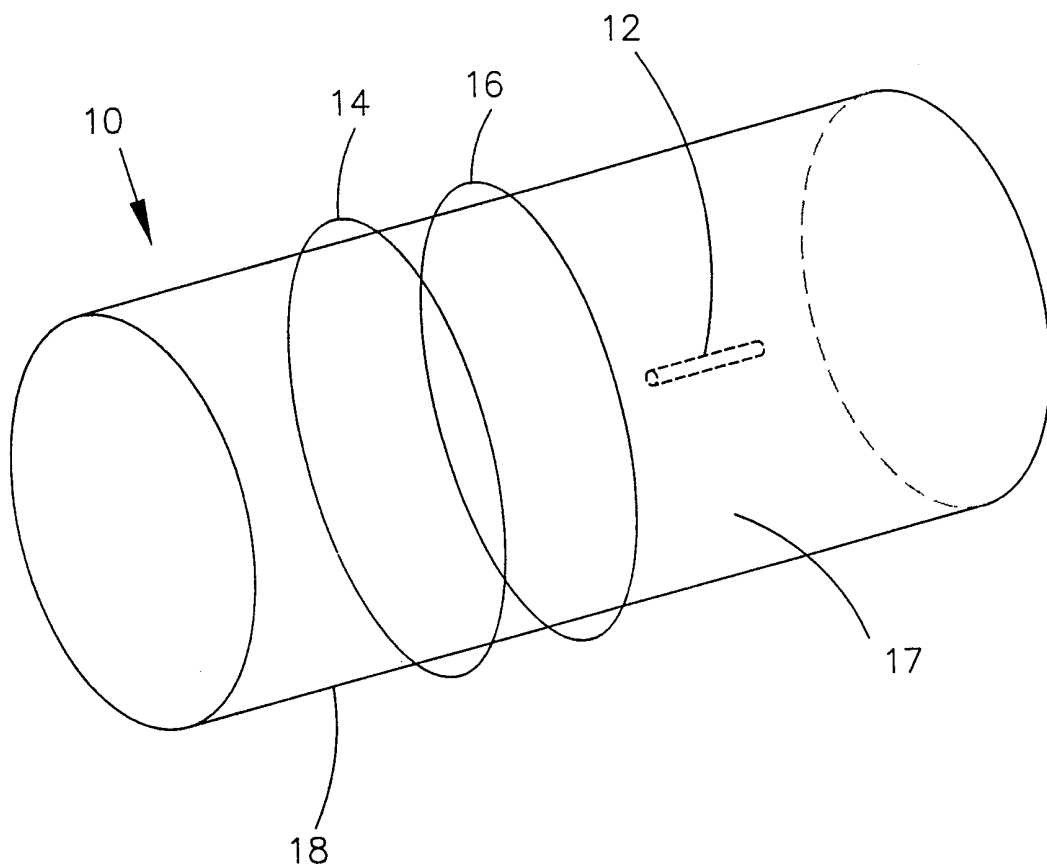


FIG 1

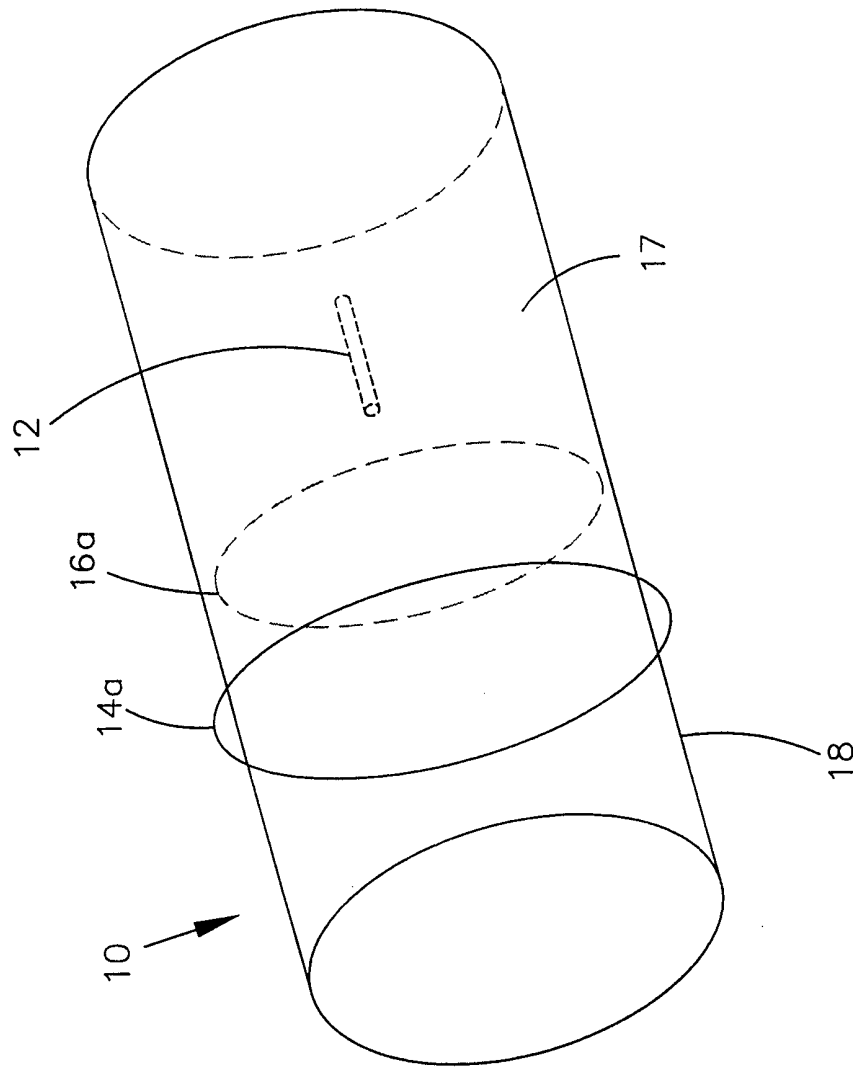


FIG 1a

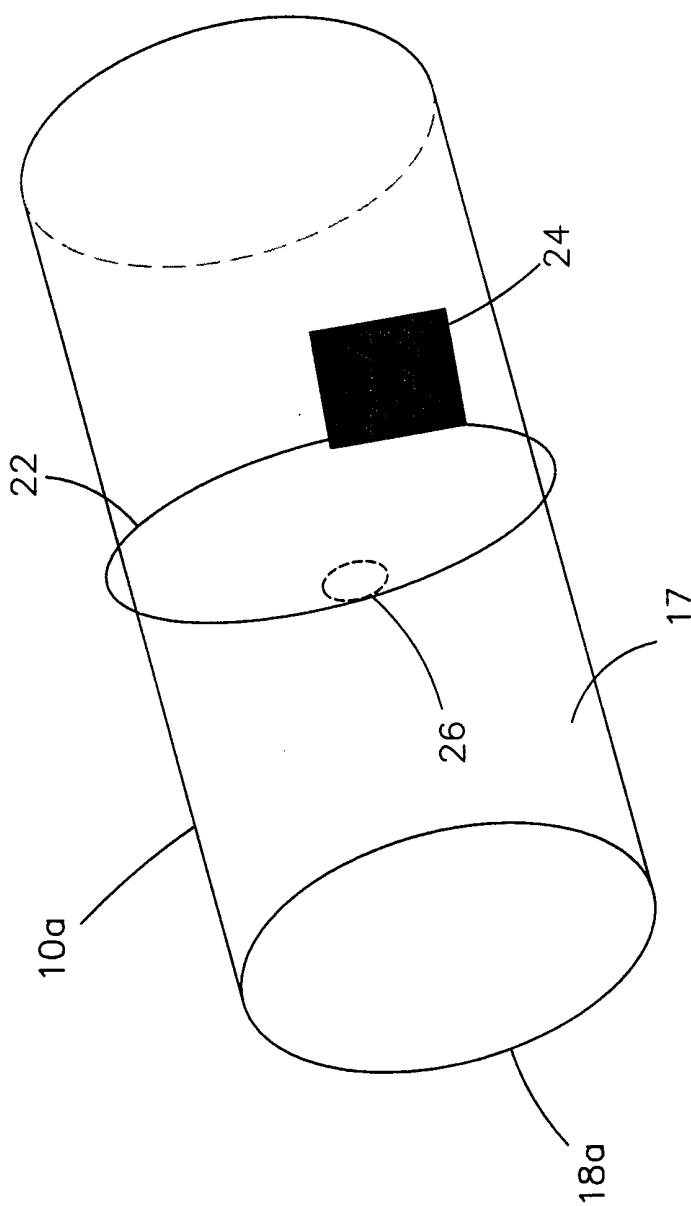


FIG 2

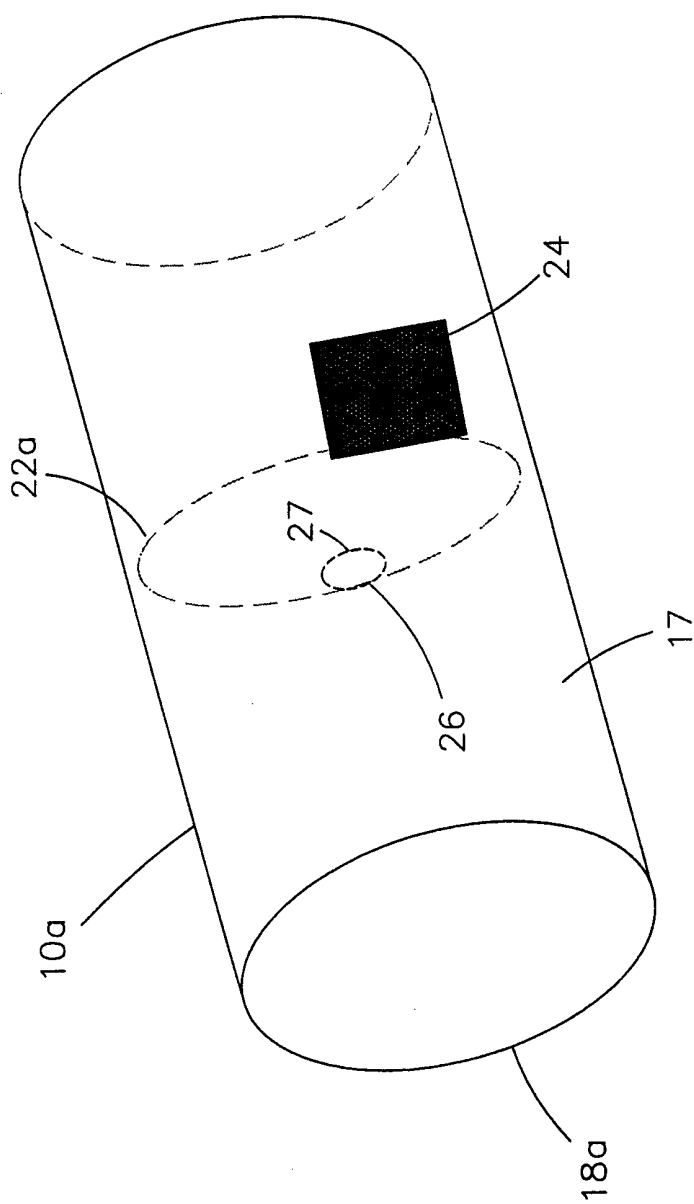


FIG 2a

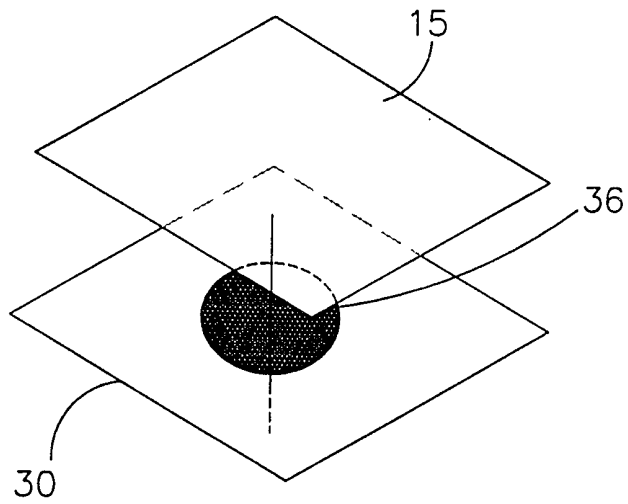


FIG 3

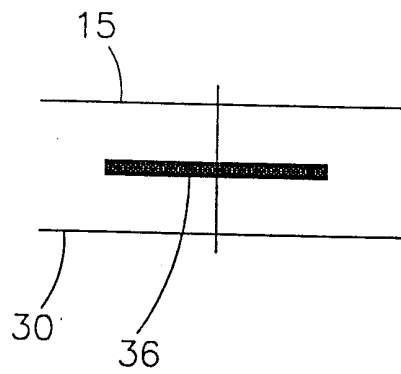


FIG 3a

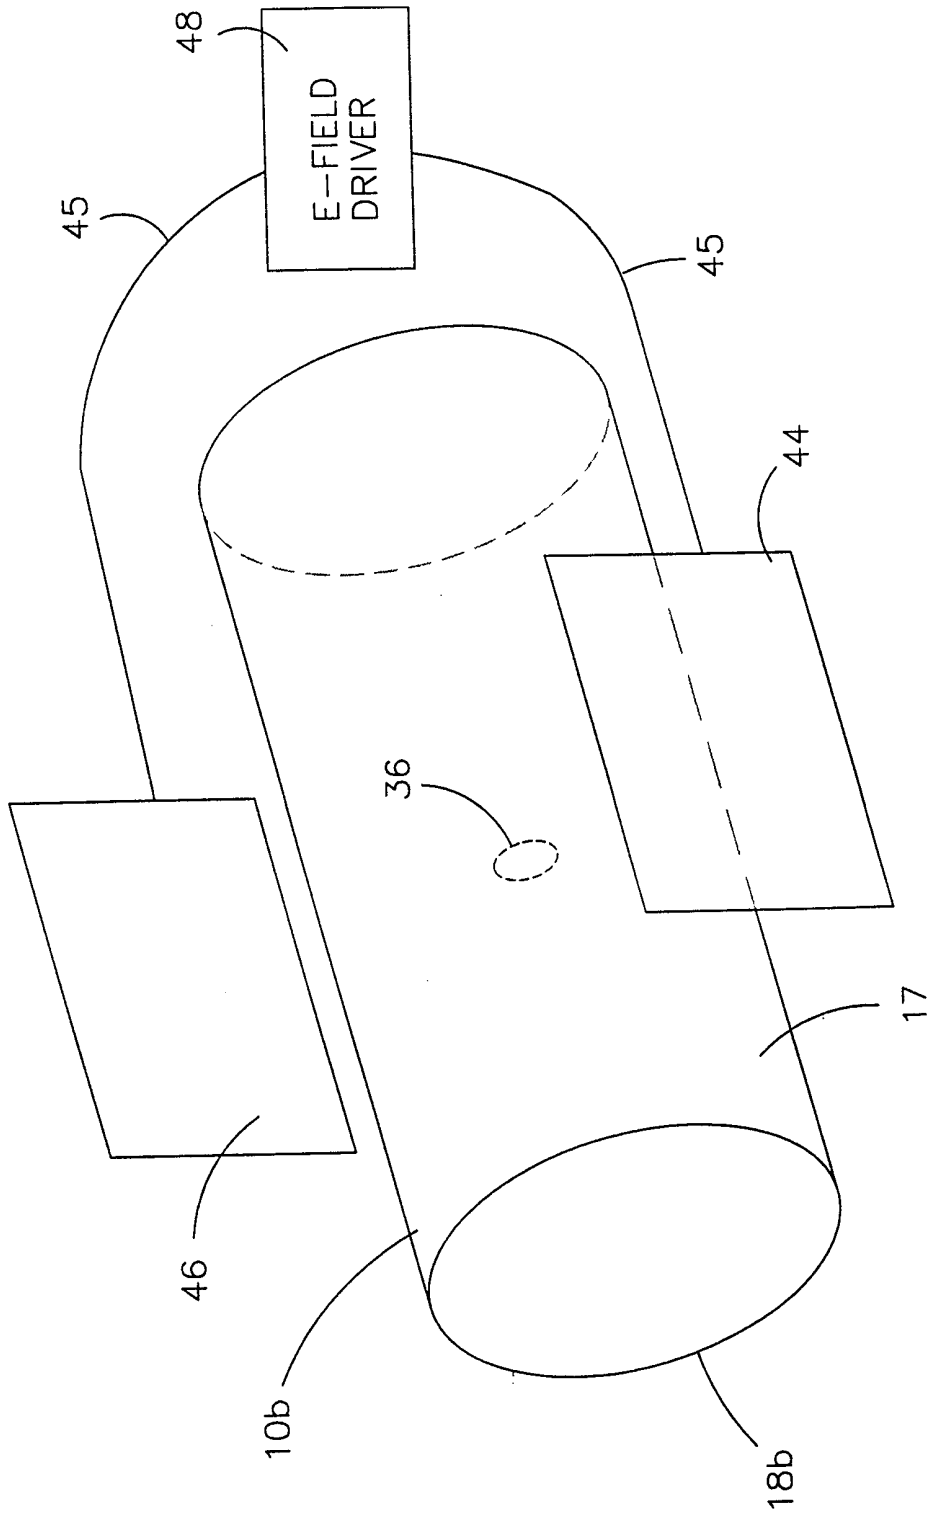


FIG 4

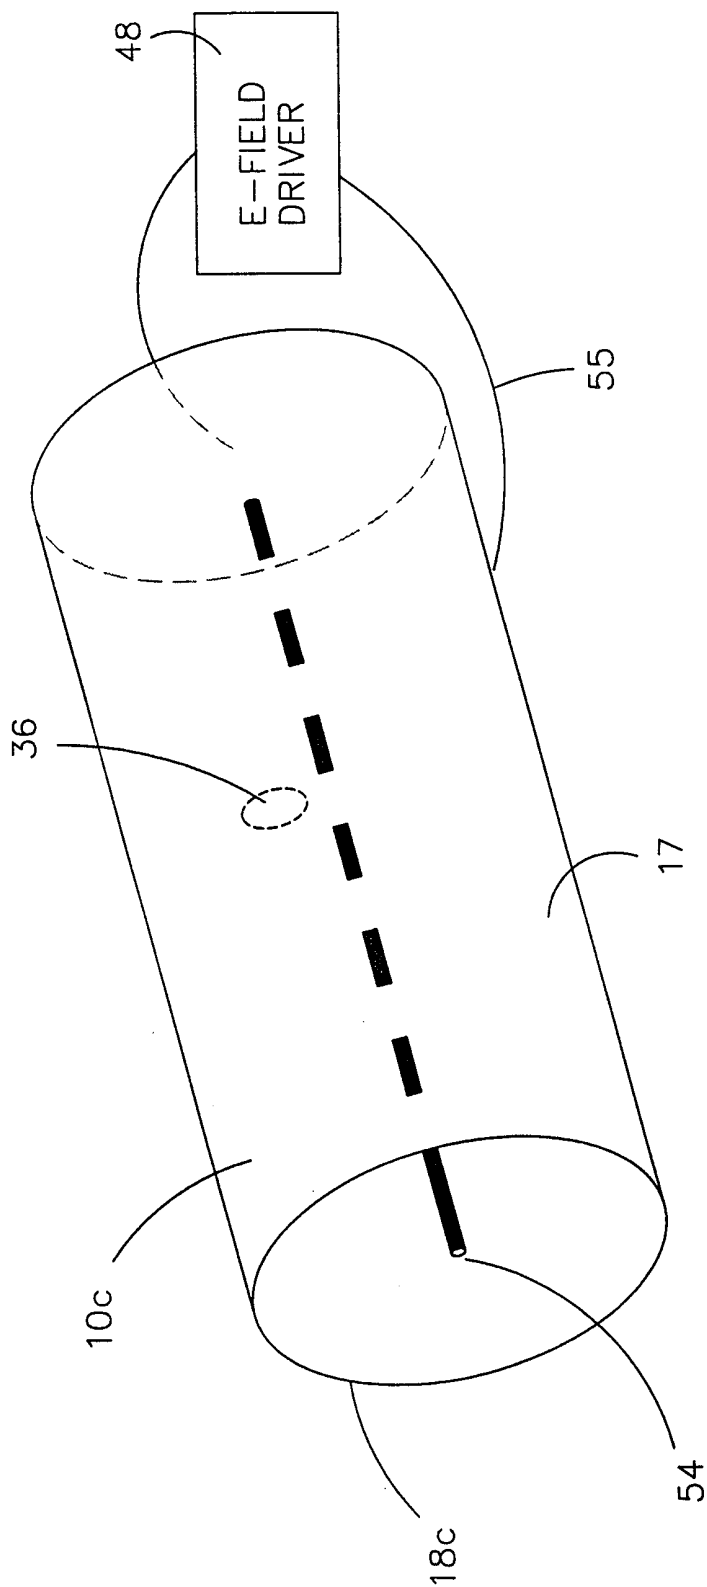


FIG 5

INTERNATIONAL SEARCH REPORT

Int. Application No

PCT/US 98/23101

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G08C17/04 G08C17/06 G06K7/08 G01K1/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G08C G06K G01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 94 27117 A (MULTILOP LTD ;VAHRMAN RICHARD (GB)) 24 November 1994 (1994-11-24)	1,3, 8-10,13
Y	page 5, line 12 - page 7, line 9; figures 1,2	2,4-7, 12, 14-17, 19,20
X	--- US 5 798 694 A (REBER WILLIAM L ET AL) 25 August 1998 (1998-08-25) column 3, line 30 - column 4, line 13; figure 1	1,3
X	--- WO 91 07736 A (UNIV JOHNS HOPKINS) 30 May 1991 (1991-05-30) abstract; figure 1	1,3,8-10
	--- -/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

12 July 1999

Date of mailing of the international search report

20/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Gysen, L

INTERNATIONAL SEARCH REPORT

Int. Application No

PCT/US 98/23101

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 812 752 A (TROVAN LTD) 17 December 1997 (1997-12-17) abstract; figure 5 ----	2,4,12
Y	EP 0 702 316 A (SUZUKI KENICHI) 20 March 1996 (1996-03-20) column 4, line 29 - column 9, line 34; figures 1-34 ----	5-7,16, 17,19,20
A	EP 0 312 168 A (NEDAP NV) 19 April 1989 (1989-04-19) abstract; figures 1-3 ----	6,7
Y	WO 95 15622 A (IDESCO OY ; ELSILAE MARTTI (FI); PAEAEKKOE JARI (FI); TOPPI JUHA (F) 8 June 1995 (1995-06-08) abstract; figures 1-3 ----	4,14,15
A	US 5 181 975 A (POLLACK RICHARD S ET AL) 26 January 1993 (1993-01-26) cited in the application -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/23101

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9427117 A	24-11-1994	AU 6684294 A	12-12-1994
		GB 2295749 A	05-06-1996

US 5798694 A	25-08-1998	NONE	

WO 9107736 A	30-05-1991	CA 2045507 A	10-05-1991
		EP 0452483 A	23-10-1991
		JP 4502816 T	21-05-1992

EP 0812752 A	17-12-1997	US 5012236 A	30-04-1991
		US 5084699 A	28-01-1992
		AT 171335 T	15-10-1998
		AU 634789 B	04-03-1993
		AU 5817190 A	18-12-1990
		DE 69032657 D	22-10-1998
		DE 69032657 T	27-05-1999
		EP 0429617 A	05-06-1991
		WO 9014736 A	29-11-1992
		US 5095309 A	10-03-1992
		US 5198807 A	30-03-1993
		WO 9209175 A	29-05-1992

EP 0702316 A	20-03-1996	JP 7200750 A	04-08-1995
		KR 145487 B	17-08-1998
		SG 30438 A	01-06-1996

EP 0312168 A	19-04-1989	NL 8702426 A	01-05-1989
		DE 3880613 A	03-06-1993
		DE 3880613 T	18-11-1993
		JP 1193686 A	03-08-1989
		US 5021767 A	04-06-1991

WO 9515622 A	08-06-1995	FI 935367 A	31-05-1995
		EP 0732012 A	18-09-1996

US 5181975 A	26-01-1993	AU 644328 B	02-12-1993
		AU 1383092 A	01-10-1992
		CA 2054568 A	28-09-1992
		DE 69211878 D	08-08-1996
		DE 69211878 T	06-02-1997
		EP 0505905 A	30-09-1992
		ES 2091350 T	01-11-1996
		JP 5169931 A	09-07-1993
		MX 9201265 A	01-10-1992