




(22) Date de dépôt/Filing Date: 2015/01/21 (41) Mise à la disp. pub./Open to Public Insp.: 2015/10/19 (45) Date de délivrance/Issue Date: 2019/04/23 (30) Priorité/Priority: 2014/04/19 (US14/256,935)	(51) Cl.Int./Int.Cl. <i>B64D 39/00</i> (2006.01), <i>B64C 7/00</i> (2006.01) (72) Inventeurs/Inventors: FERGUSON, STANLEY D., US; FIALHO, IAN J., US; POTTER, RICHARD C., US (73) Propriétaire/Owner: THE BOEING COMPANY, US (74) Agent: SMART & BIGGAR
--	---

(54) Titre : SYSTEME DE RAVITAILLEMENT EN VOL SUR L'AILE
(54) Title: WING AERIAL REFUELING SYSTEM

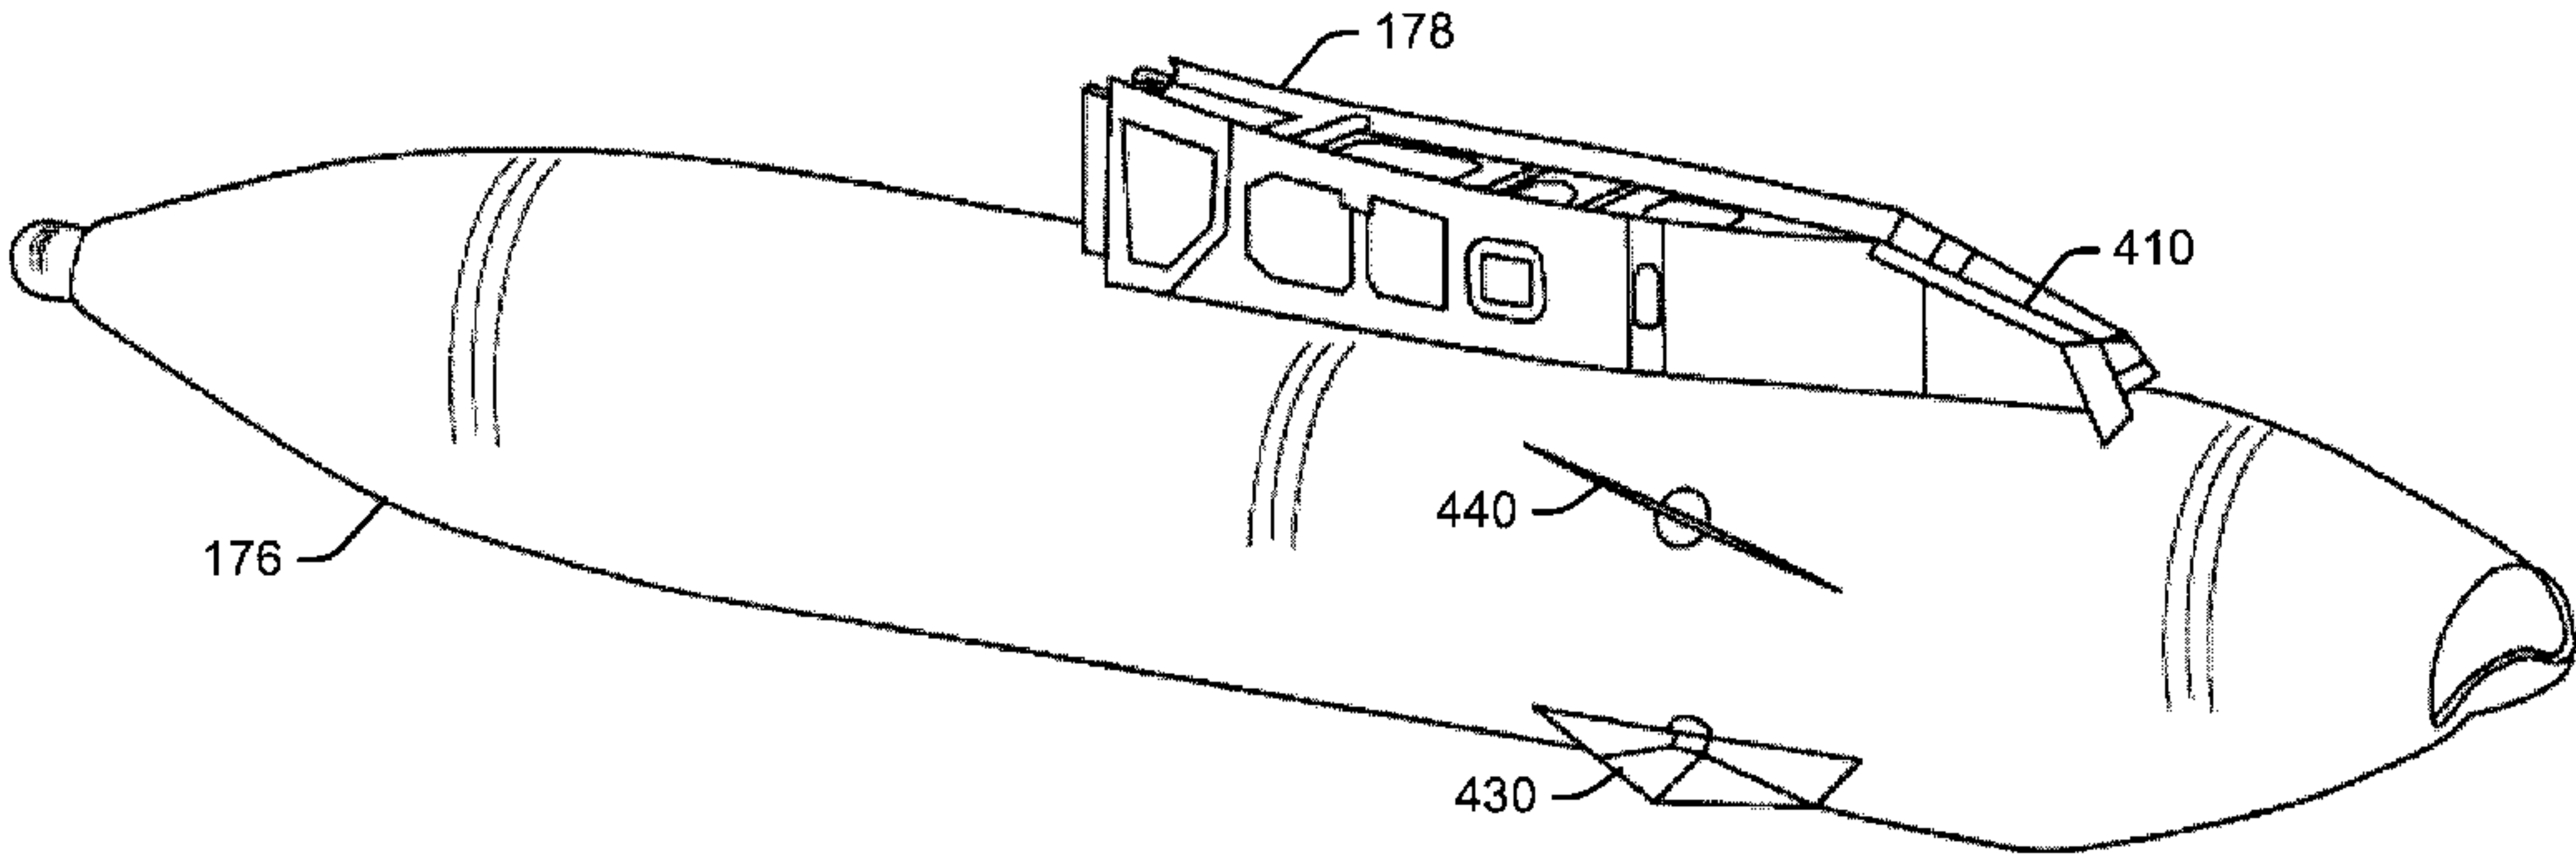

(57) **Abrégé/Abstract:**
An aircraft comprises a wing assembly, a pod, and a pylon attaching the pod to the wing assembly. The pylon has a swept pylon flap, which is configured to unload the pylon and pod during flight of the aircraft, and also to create downward flow that counters a vortex trailing the pod.

ABSTRACT

An aircraft comprises a wing assembly, a pod, and a pylon attaching the pod to the wing assembly. The pylon has a swept pylon flap, which is configured
5 to unload the pylon and pod during flight of the aircraft, and also to create downward flow that counters a vortex trailing the pod.

WING AERIAL REFUELING SYSTEM

This invention was made with Government support under contract number
5 FA8625-11-C-6600 awarded by the U.S. Air Force. The government has certain rights in this invention.

BACKGROUND

Aerial refueling systems aboard tanker aircraft are used to transfer fuel to
10 receiver aircraft during flight. One type of aerial refueling system includes a hose and drogue. To perform refueling with this type of system, the tanker aircraft slows down from cruise speed to a lower refueling speed, and extends the hose and drogue. The drogue stabilizes the hose in flight and provides a funnel to aid insertion of the receiver aircraft's probe into a hose fuel coupling.

15 The hose and drogue are typically stored in a pod that is attached by a pylon to a lower outboard section of the tanker aircraft's wing. When deployed, the hose and drogue trail the pod.

During flight, airflow creates vortices trailing the pod. Vortex flow is circular in a vertical plane and has an upward velocity component which can lift the hose
20 and drogue, thereby causing instability for the hose and drogue during extension and retraction. For older tanker aircraft, existing aerodynamic mitigation designs (e.g., chines and Gurney flaps) can counter low strength vortices across narrow regions of the refueling envelope.

A new class of tanker aircraft is being designed to operate at higher
25 maximum speeds. The pod and its pylon may be designed to minimize buffet at maximum operating speed, but minimizing the buffet will cause higher side loads, which result in stronger vortices at refueling speeds. The existing mitigation designs are not effective for addressing significantly higher vortex strengths across the entire flight envelope.

SUMMARY

In one embodiment, there is provided an aircraft. The aircraft includes a wing assembly, a pod, and a pylon attaching the pod to the wing assembly, the pylon having a swept pylon flap, the swept pylon flap configured to unload the pylon and pod during flight of the aircraft, and also to create downward flow that
5 counters a vortex trailing the pod.

The pod and the pylon may be aligned with local flow at buffet conditions.

An uppermost portion of the swept pylon flap may be configured with a shallow incidence angle with respect to freestream flow, the incidence angle
10 increasing towards a lowermost portion of the flap.

The uppermost portion of the swept pylon flap may have an incidence angle between **0** and **30** degrees with respect to freestream flow.

The lowermost portion of the swept pylon flap may have an incidence angle of **30** to **90** degrees with respect to freestream flow.

15 The incidence angle may increase continuously from the uppermost portion to the lowermost portion.

The angle may increase discontinuously such that the flap has an upper portion between a first range of angles, and a lower portion between a higher range of angles.

20 The aircraft may include at least one chine pair on an outer surface of the pod for disrupting the vortex and aligning the downward flow created by the swept pylon flap.

First and second chines may be configured to create a counter-rotating vortex pair.

25 The first and second chines may be upper and lower outboard chines.

The first and second chines may be lower inboard and lower outboard chines.

First, second and third chines may be configured to create multiple counter-rotating vortex pairs.

A lower outboard chine may be configured to create a counter-rotating pair with the swept pylon flap.

The aircraft may include a hose and drogue in the pod.

5 The swept pylon flap may be further configured to direct a downward flow during flight to maintain alignment of the downward flow along a hose and drogue path.

The aircraft may include at least one additional pod and pylon for multipoint refueling. Each additional pylon may have a swept pylon flap.

10 In another embodiment, there is provided a wing aerial refueling system. The system includes a pod for storing a hose and drogue, and a pylon extending from the pod, the pylon having an outboard swept pylon flap, an uppermost portion of the flap having a shallow angle with respect to local flow, the angle increasing towards a lowermost portion of the flap.

15 The system further includes an outboard upper chine on the pod for creating a vortex that is counter-rotating with respect to downward flow from the pylon flap.

20 According to an embodiment herein, an aircraft comprises a wing assembly, a pod, and a pylon attaching the pod to the wing assembly. The pylon has a swept pylon flap. The swept pylon flap is configured to unload the pylon and pod during flight of the aircraft, and also to create downward flow that counters a vortex trailing the pod.

25 According to another embodiment herein, a wing aerial refueling system comprises a pod for storing a hose and drogue, and a pylon extending from the pod. The pylon has an outboard swept pylon flap. An uppermost portion of the flap has a shallow angle with respect to local flow. The angle increases towards a lowermost portion of the flap.

According to another embodiment herein, a wing aerial refueling system comprises a pod configured to store a hose and drogue, and first and second chines on an outer surface of the pod for creating a counter-rotating vortex pair.

According to another embodiment herein, a method of using a hose and drogue in a pod aboard a tanker aircraft comprises flying the tanker aircraft at a refueling speed, extending the hose and the drogue to trail the pod, and using a swept flap and chines to disrupt a pod vortex trailing the pod and induce a downward
5 flow that counters the pod vortex.

According to another embodiment herein, there is provided an apparatus for wing aerial refueling comprising a pylon configured to attach a refueling pod to a wing assembly of an aircraft. The pylon has a swept pylon flap. The swept pylon flap has a first portion extending from the pylon toward an aft direction at a first incidence
10 angle relative to a leading edge of the swept pylon flap. The swept pylon flap also has a second portion extending from an end of the first portion toward the aft direction at a second incidence angle, the second incidence angle relative to the leading edge and different than the first incidence angle. The swept pylon flap reduces loading on the pylon and the pod during flight of the aircraft and creates a
15 downward flow to counter a vortex trailing the pod.

According to another embodiment herein, an apparatus for wing aerial refueling comprises: a pylon configured to attach a refueling pod to a wing assembly of an aircraft. The pylon has a swept pylon flap extending from the pylon in an aft direction, the swept pylon flap has a first portion extending from a trailing edge of the
20 pylon at a first rearward angle and a second portion extending from an end of the first portion at a second rearward angle different than the first rearward angle.

According to another embodiment herein, an apparatus for attaching a pod to a wing assembly of an aircraft includes a pylon having a first portion connectable to the wing assembly to extend from wing assembly and having a second portion
25 opposite the first portion for holding the pod in a position beneath the wing assembly. The apparatus further includes a swept pylon flap on an outboard side of the pylon. The swept pylon flap includes a first portion extending from the pylon in an aft direction at a first incidence angle with respect to free stream airflow and a

second portion extending from an end of the first portion in the aft direction at a second incidence angle with respect to the free stream airflow. The second incidence angle is different from the first incidence angle. The first incidence angle and second incidence angle are selected to cause loading on the pylon and the pod
5 to be reduced during flight of the aircraft and to create a downward flow of air toward the pod during flight to counter a vortex trailing the pod during flight.

These features and functions may be achieved independently in various embodiments or may be combined in other embodiments. Further details of the embodiments can be seen with reference to the following description and drawings.

10

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an illustration of a tanker aircraft.

FIG. 2 is an illustration of a wing aerial refueling system for the tanker aircraft.

FIG. 3 is an illustration of a coordinate system for the tanker aircraft, and directions of air flow during flight.

FIGS. 4A, 4B, 4C and 4D are illustrations of a pod and pylon of a wing aerial refueling system.

5 FIG. 5 is an illustration of a discontinuous incidence angle for a swept pylon flap.

FIG. 6 is an illustration of a continuous incidence angle for a swept pylon flap.

10 FIG. 7 is an illustration of a method of using a hose and drogue in a pod aboard a tanker aircraft to refuel a receiver aircraft.

DETAILED DESCRIPTION

Reference is made to Figure 1, which illustrates a tanker aircraft **110** including a fuselage **120**, wing assemblies **130**, and empennage **140**. One or
15 more propulsion units **150** are coupled to the fuselage **120**, wing assemblies **130** or other portions of the tanker aircraft **110**.

The tanker aircraft **110** includes one or more fuel tanks **160** for providing fuel to receiver aircraft during aerial refueling operations. The tanker aircraft **110** further includes at least one wing aerial refueling system **170**. There may be one
20 or more wing aerial refueling systems **170** per wing assembly **130**. For instance, left and right wing aerial refueling systems **170** may be located at the extremes of left and right wing assemblies **130**.

Reference is now made to FIG. 2. Each wing aerial refueling system **170** includes a hose **172** and drogue **174**. The length of the hose **172** and design of
25 the drogue **174** are tailored for the tanker aircraft's flight envelope. Each wing aerial refueling system **170** further includes a pod **176** for storing the hose **172** and drogue **174**, and for deploying the hose **172** and drogue **174** during aerial refueling operations. The pod **176** may be attached to a lower outboard section

of one of the wing assemblies **130** by a pylon **178**, typically between **75%** and **95%** of wing semi-span.

Additional reference is made to FIG. 3, which illustrates a global (X-Y-Z) Cartesian coordinate system for the tanker aircraft **110**. The X-axis extends in the direction from tail to nose of the fuselage **120** (the forward direction). The Y-axis may extend in the direction from middle of the fuselage **120** to a tip of the right wing (the “spanwise” direction). The Z-direction may be orthogonal to the X- and Y-directions (the up/down direction).

The arrow **310** represents freestream flow, which refers to the flow of air far upstream of the tanker aircraft **110** during flight. The arrow **320** represents local flow, which is the near field flow that is influenced by the tanker aircraft **110** during flight. The direction of the local flow **320** varies as the air moves past the wing assembly **130**, pod **176** and pylon **178**. The arrow **320** is angled a few degrees outboard to indicate that it is slightly perturbed relative to the freestream flow **310**, and that the local flow **310** has a non-trivial component in the spanwise direction.

During flight, the spanwise component of the local flow **320** creates a pod vortex **330** trailing each pod **176** and pylon **178**. Each pod vortex **330** will be referred to as a “pod” vortex **330**. The pod vortex **330** is circular in a vertical plane and has an upward velocity component (the flattened circle represents the circulation of the pod vortex **330**). The applicants have found that strength and positioning of the pod vortex **330** are a function of local flow angle on the lower surface of the wing assembly **130** (defined by wing geometry, loading and flight condition), pod/pylon shaping, and flow separation, which create a side load on the pod **176** and the pylon **178**.

The tanker aircraft **110** may be designed to fly at maximum operating speed or fly near maximum operating speed (e.g., cruise speed) by cambering and aligning (or toeing out) the pod **176** and the pylon **178** with respect to the local flow at buffet conditions so that local flow angle in the side plane (the X-Y plane) is near zero degrees. (The toe angle is the angle that the pod and pylon

are rotated about the Z-axis, measured from the forward direction.) This alignment minimizes flow instabilities and buffeting at high-speed operation, as it creates a pressure distribution on the pylon and pod surfaces that varies in an orderly manner.

5 However, this alignment tends to create a higher local flow angle for the pod **176** and the pylon **178** at lower speeds (e.g., refueling speeds), thereby creating higher side force on the pod **176** and the pylon **178** (since the local flow direction is more outboard). As a result of the higher side force, a stronger pod vortex **330** is generated. The stronger pod vortex **330** can create instability for the
10 hose **172** and the drogue **174** when extended from the pod **176** during refueling.

 The drogue **174** stabilizes the hose **172** in flight and provides a funnel to aid insertion of a receiver aircraft's probe into a hose fuel coupling. After refueling has been completed, the hose **172** and the drogue **174** are retracted. The upward velocity component of the pod vortex **330** tends to cause instability
15 for the hose **172** and the drogue **174** during retraction.

 Reference is now made to FIGS. 4A, 4B, 4C and 4D, which illustrate a pod **176** and pylon **178** having a swept pylon flap **410** at an outboard side. The swept pylon flap **410** is configured to reduce loading on the pod **176** and the pylon **178** during all flight conditions of the tanker aircraft **110**, and also to create a
20 downward flow that counters the pod vortex **330** at lower speeds. The swept pylon flap **410** includes an uppermost portion **412** having a shallow incidence angle (α) with respect to freestream flow **310** and a lowermost portion **414** having a higher incidence angle (α). For the swept pylon flap **410**, the terms "uppermost" and "lowermost" are relative to the wing assembly **130**, with the
25 uppermost portion **412** being closest to the wing assembly **130** and the lowermost portion **414** being furthest from the wing assembly **130** and closest to the pod **176**. The uppermost portion **412** is swept in the aft direction to avoid flow separation. The uppermost portion **412** does not significantly affect the tanker aircraft **110** at higher operating speeds.

The uppermost portion **412** of the swept pylon flap **410** has an incidence angle (α) between **0** and **30** degrees with respect to freestream flow **310**. The lowermost portion **414** of the swept pylon flap **410** has an incidence angle (α) between **30** and **90** degrees with respect to freestream flow **310**. The position of the pod **176**, as well as the sweep of the wing assembly **130**, the lower surface contour of the wing assembly, and the freestream speed can all affect the ideal incidence angle (α). The ideal incidence angle (α) is one that turns the local flow efficiently without adversely affecting the surrounding air flow.

In some embodiments, the increase in incidence angle (α) is discontinuous in at least two discrete portions. FIG.5 illustrates an example in which the pylon flap **410** has two discrete portions: a discrete uppermost portion **412** having an upper incidence angle (α_U) between **0** and **30** degrees, and a discrete lowermost portion **414** having a lower incidence angle (α_L) between **30** and **90** degrees. For each portion **412** and **414**, the incidence angle (α_U and α_L) is constant with respect to distance from a leading edge (L) of the swept pylon flap **410**.

In some embodiments, the incidence angle (α) of the swept pylon flap **410** increases continuously from the uppermost portion **412** to the lowermost portion **414**. FIG. 6 illustrates an example of a continuous non-linear increase with respect to the leading edge (L) of the swept pylon flap **410**. In some embodiments, the increase may vary smoothly from the leading edge (L).

In addition to the pylon **178** having the swept pylon flap **410**, the pod **176** may have at least one chine on its outer surface. A chine is a plate-like wing surface having a very low aspect (span-to-chord) ratio. See, for instance, the chine **420** illustrated in FIG. 4D. A chine is characterized by the vortex generated at its tip (outboard edge), and the strength of its vortex is determined by the chine design and orientation on the pod **176** (e.g., chine size, incidence, axial station, and azimuth angle).

A pair of chines may create a counter-rotating vortex pair. A vortex pair is characterized herein as counter-rotating if tip vortices in the pair rotate in opposite directions. The counter-rotating vortex pair interacts with the pod vortex

330 to disrupt (i.e., change the flow velocities and locations of) the pod vortex 330 and align the downward flow created by the swept pylon flap, without increasing total flow vorticity. The counter-rotating vortex pair maintains the alignment of the downward flow along the hose and drogue path at nominal and
5 off-nominal flight conditions. As a result, the aligned downward flow pushes the hose and drogue downward, and the hose and drogue remain below a predominant region of vorticity trailing the pod and the pylon at refueling conditions. The chine(s) overcome problems with trail-rewind instabilities, which have been observed on legacy refueling platforms. The instabilities occur as the
10 drogue gets closer to the pod.

Reference is once again made to FIG. 4, which shows a pod 176 having three chines 420-440 on its outer surface: a lower inboard chine 420, a lower outboard chine 430, and an upper outboard chine 440. The lower inboard and lower outboard chines 420 and 430 are placed on opposite sides of the pod 176,
15 and both have the same incidence angle or similar incidence angle (the incidence angle is measured relative to the local flow).

The upper outboard chine 440 creates a downward velocity adjacent to the swept pylon flap downward flow. It also creates multiple pairs of counter-rotating vortices with both of the lower chines 420 and 430. Incidence angles of the lower
20 outboard and upper outboard chines 430 and 440 are in the opposite direction, which causes the tip vortices to rotate in opposite directions.

Although FIG. 4 illustrates three chines 420-440, other embodiments may have different chine configurations. As a first example, the pod 176 has only an upper outboard chine 440, which creates a counter-rotating vortex with the swept
25 pylon flap 410. As a second example, the pod 176 has only the lower inboard and lower outboard chines 420 and 430, which create a single counter-rotating vortex pair. As a third example, the pod 176 has only the lower and upper outboard chines 430 and 440, which create a single counter-rotating vortex pair.

Reference is now made to FIG. 7, which illustrates a method of using a
30 hose and drogue in a pod aboard a tanker aircraft to refuel a receiver aircraft. At

block **710**, the tanker aircraft is flying at or near its maximum operating speed. For example, the aircraft is flying near Mach **0.86**. At this speed, the freestream flow is nearly aligned with the wing chord, and there is little to no outboard spanwise flow. This alignment of the pod and the pylon with the flow at buffet
5 conditions minimizes flow instabilities and buffeting at the near-maximum operating speeds.

At block **720**, speed of the aircraft is reduced to a refueling speed. For example, speed of the aircraft is reduced to Mach **0.6**. At this speed, the local flow angle is increased by approximately three degrees.

10 At block **730**, the swept pylon flap is used to reduce side load on the pod and pylon, thereby reducing the strength of the pod vortex. In addition, the swept pylon flap creates downward flow that counters the vertical velocity component of the pod vortex. In addition, or in the alternative, at least one chine pair is used to create a counter-rotating vortex pair.

15 At block **740**, the hose and the drogue are extended. The downward flow from the swept pylon flap pushes the hose and drogue downward so that they remain below a predominant region of vorticity trailing the pod and the pylon at refueling speeds.

20 At block **750**, the drogue stabilizes the hose in flight and provides a funnel to aid insertion of the receiver aircraft's probe into a hose fuel coupling. Fuel is then supplied to the receiver aircraft via the hose.

25 At block **760**, after refueling has been completed, the drogue and hose are retracted and returned to the pod for storage. As the hose and drogue are being retracted, retraction forces cause the hose and drogue track to be higher, which can result in the drogue being entrained in the pod and pylon vortex. The swept pylon flap and the upper outboard chine direct the flow downward along the hose and drogue path and displace the upward velocities from the pod and pylon vortex away from the hose and drogue path. The counter-rotating vortices from the inboard and outboard lower chines keep the flow field centered on the hose

and drogue path. This prevents the large upward velocities from the pod and pylon vortex from lifting the hose and drogue and entraining the drogue into a large circular orbit about the pod vortex.

5 A swept pylon flap herein is not limited to a single flap. In some embodiments, additional flaps may be used to provide the desired amount and location of the downward flow.

10 In some embodiments, the swept pylon flap may be split into two or more portions. Incidence angles of the portions may be controlled passively or actively. This split design enables the swept pylon flap component to be aligned with the freestream flow to minimize effects on aircraft performance when not in use for refueling.

The swept flap is not limited to the pylon. Other support structures on the tanker aircraft may have the swept flap.

15 A tanker aircraft herein is not limited to a single wing aerial refueling system. A tanker herein may include at least one additional wing aerial refueling system for multipoint refueling.

20 An aircraft herein is not limited to a tanker aircraft. The swept flap and/or chines may be applied to an aircraft having a pod or store, where the flow field of interest trails the pod or store. Examples include pods and stores for towed decoys and electronic countermeasure equipment.

25 According to an aspect of the present disclosure there is provided an aircraft comprising a wing assembly; a pod; and a pylon attaching the pod to the wing assembly, the pylon having a swept pylon flap, the swept pylon flap configured to unload the pylon and pod during flight of the aircraft, and also to create downward flow that counters a vortex trailing the pod.

The pod and the pylon may be aligned with local flow at buffet conditions.

An uppermost portion of the swept pylon flap may be configured with a shallow incidence angle with respect to freestream flow, the incidence angle increasing towards a lowermost portion of the flap.

5 The uppermost portion of the swept pylon flap may be an incidence angle between **0** and **30** degrees with respect to freestream flow.

The lowermost portion of the swept pylon flap may have an incidence angle of **30** to **90** degrees with respect to freestream flow.

The incidence angle may increase continuously from the uppermost portion to the lowermost portion.

10 The angle may increase discontinuously such that the flap has an upper portion between a first range of angles, and a lower portion between a higher range of angles.

15 The aircraft disclosed herein may further comprise at least one chine pair on an outer surface of the pod for disrupting the vortex and aligning the downward flow created by the swept pylon flap.

First and second chines may be configured to create a counter-rotating vortex pair.

The first and second chines may be upper and lower outboard chines.

First and second chines may be lower inboard and lower outboard chines.

20 First, second and third chines may be configured to create multiple counter-rotating vortex pairs.

A lower outboard chine may be configured to create a counter-rotating pair with the swept pylon flap.

The aircraft disclosed herein may further comprise a hose and drogue in the pod.

5 The swept pylon flap may be further configured to direct a downward flow during flight to maintain alignment of the downward flow along a hose and drogue path.

The aircraft disclosed herein may further comprise at least one additional pod and pylon for multipoint refueling, wherein each additional pylon has a swept pylon flap.

10 According to an aspect of the present disclosure there is provided a wing aerial refueling system comprising a pod for storing a hose and drogue; and a pylon extending from the pod, the pylon having an outboard swept pylon flap, an uppermost portion of the flap having a shallow angle with respect to local flow, the angle increasing towards a lowermost portion of the flap.

15 The system may further comprise an outboard upper chine on the pod for creating a vortex that is counter-rotating with respect to downward flow from the pylon flap.

20 According to another aspect of the present disclosure there is provided a wing aerial refueling system comprising a pod configured to store a hose and drogue; and first and second chines on an outer surface of the pod for creating a counter-rotating vortex pair.

25 According to another aspect of the present disclosure there is provided a method of using a hose and drogue in a pod aboard a tanker aircraft, the method comprising flying the tanker aircraft at a refueling speed; extending the hose and the drogue to trail the pod; and using a swept flap and chines to disrupt a pod vortex trailing the pod and induce a downward flow that counters the pod vortex.

EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. An apparatus for wing aerial refueling, the apparatus comprising:

5

a pylon configured to attach a refueling pod to a wing assembly of an aircraft, the pylon having a swept pylon flap, the swept pylon flap having a first portion extending from the pylon toward an aft direction at a first incidence angle relative to a leading edge of the swept pylon flap, and a
10 second portion extending from an end of the first portion toward the aft direction at a second incidence angle, relative to the leading edge and different than the first incidence angle, such that the swept pylon flap reduces loading on the pylon and the pod during flight of the aircraft and creates a downward flow to counter a vortex trailing the pod.

15

2. The apparatus of claim 1, wherein the pod and the pylon are aligned with local flow at buffet conditions.

3. The apparatus of claim 1 or 2, wherein the first incidence angle is a shallow
20 incidence angle with respect to freestream flow.

4. The apparatus of any one of claims 1 to 3, wherein the first incidence angle is between about 0 and about 30 degrees with respect to freestream flow.

- 25 5. The apparatus of any one of claims 1 to 4, wherein the second incidence angle is between about 30 and about 90 degrees with respect to freestream flow.

6. The apparatus of any one of claims 1 to 5, wherein the first incidence angle increases from the first portion towards the second portion.

30

- 7 The apparatus of claim 6, wherein the first incidence angle increases continuously from the first portion to the second portion.
8. The apparatus of claim 6, wherein at least one of the first incidence angle and
5 the second incidence angle increases discontinuously relative to the leading edge of the swept pylon flap.
9. The apparatus of any one of claims 6, 7 and 8, further comprising the pod.
- 10 10. The apparatus of claim 9, further comprising a first chine and a second chine on an outer surface of the pod to disrupt the vortex and to align the downward flow created by the swept pylon flap.
11. The apparatus of claim 10, wherein the first and second chines are configured
15 to create a counter-rotating vortex pair.
12. The apparatus of claim 10 or 11, wherein the first and second chines are upper outboard and lower outboard chines.
- 20 13. The apparatus of claim 10 or 11, wherein the first and second chines are lower inboard and lower outboard chines.
14. The apparatus of any one of claims 10 to 13, further including a third chine on the outer surface of the pod, wherein the first, second and third chines are
25 configured to create multiple counter-rotating vortex pairs.
15. The apparatus of claim 9, further including a lower outboard chine positioned on an outer surface of the pod, wherein the lower outboard chine and the swept pylon flap provide a counter-rotating pair.

30

16. The apparatus of claim 9, further comprising an outboard upper chine on the pod to create a vortex that is to counter rotate with respect to the downward flow from the swept pylon flap.
- 5 17. The apparatus of any one of claims 9 to 16, further comprising a hose and drogue in the pod.
18. The apparatus of claim 17, wherein the swept pylon flap is further configured to direct the downward flow during flight to maintain alignment of the downward flow along a hose and drogue path.
- 10
19. The apparatus of claim 17 or 18, wherein the swept pylon flap is configured to apply a downward force to at least one of the hose or the drogue when the hose and the drogue extend relative to the pod.
- 15
20. The apparatus of any one of claims 9 to 19, further comprising at least one additional pod and pylon for multipoint refueling, wherein each additional pylon has a respective swept pylon flap.
- 20 21. The apparatus of any one of claims 1 to 20, wherein the first portion of the swept pylon flap is adjacent the wing assembly of the aircraft and is swept in the aft direction to avoid flow separation.
22. The apparatus of any one of claims 1 to 21, wherein at least a portion of the first portion of the swept pylon flap has an elevation that is greater than an elevation of at least a portion of the second portion.
- 25
23. The apparatus of any one of claims 1 to 22, wherein the first portion has a slope directed toward the aft direction and the pod.
- 30

24. The apparatus of any one of claims **1** to **23**, wherein the first portion extends in the aft direction relative to a trailing edge of the pylon and away from the wing assembly.
- 5 25. The apparatus of any one of claims **1** to **23**, wherein the swept pylon flap extends in a rearward direction from a trailing edge of the pylon.
26. An apparatus for wing aerial refueling, the apparatus comprising:
- 10 a pylon configured to attach a refueling pod to a wing assembly of an aircraft, the pylon having a swept pylon flap extending from the pylon in an aft direction, the swept pylon flap having:
- 15 a first portion extending from a trailing edge of the pylon at a first rearward angle; and
- a second portion extending from an end of the first portion at a second rearward angle different than the first rearward angle.
- 20 27. The apparatus of claim **26**, wherein the swept pylon flap reduces loading on the pylon and the pod during flight of the aircraft.
28. The apparatus of claim **26** or **27**, wherein the swept pylon flap creates downward flow to counter a vortex trailing the pod.
- 25 29. The apparatus of any one of claims **26** to **28**, wherein the first rearward angle is between approximately **0** degrees and approximately **30** degrees.
- 30 30. The apparatus of any one of claims **26** to **29**, wherein the second rearward angle is between approximately **30** degrees and approximately **90** degrees.

31. The apparatus of any one of claims **26** to **30**, further comprising the pod, wherein the pod includes a hose and a drogue.

5 **32.** An apparatus for attaching a pod to a wing assembly of an aircraft, the apparatus comprising:

10 a pylon having a first portion connectable to the wing assembly to extend from wing assembly and having a second portion opposite the first portion for holding the pod in a position beneath the wing assembly;

 a swept pylon flap on an outboard side of the pylon, the swept pylon flap comprising:

15 a first portion extending from the pylon in an aft direction at a first incidence angle with respect to free stream airflow; and

20 a second portion extending from an end of the first portion in the aft direction at a second incidence angle with respect to the free stream airflow, wherein the second incidence angle is different from the first incidence angle, and

25 wherein the first incidence angle and second incidence angle are selected to cause loading on the pylon and the pod to be reduced during flight of the aircraft and to create a downward flow of air toward the pod during flight to counter a vortex trailing the pod during flight.

1/6



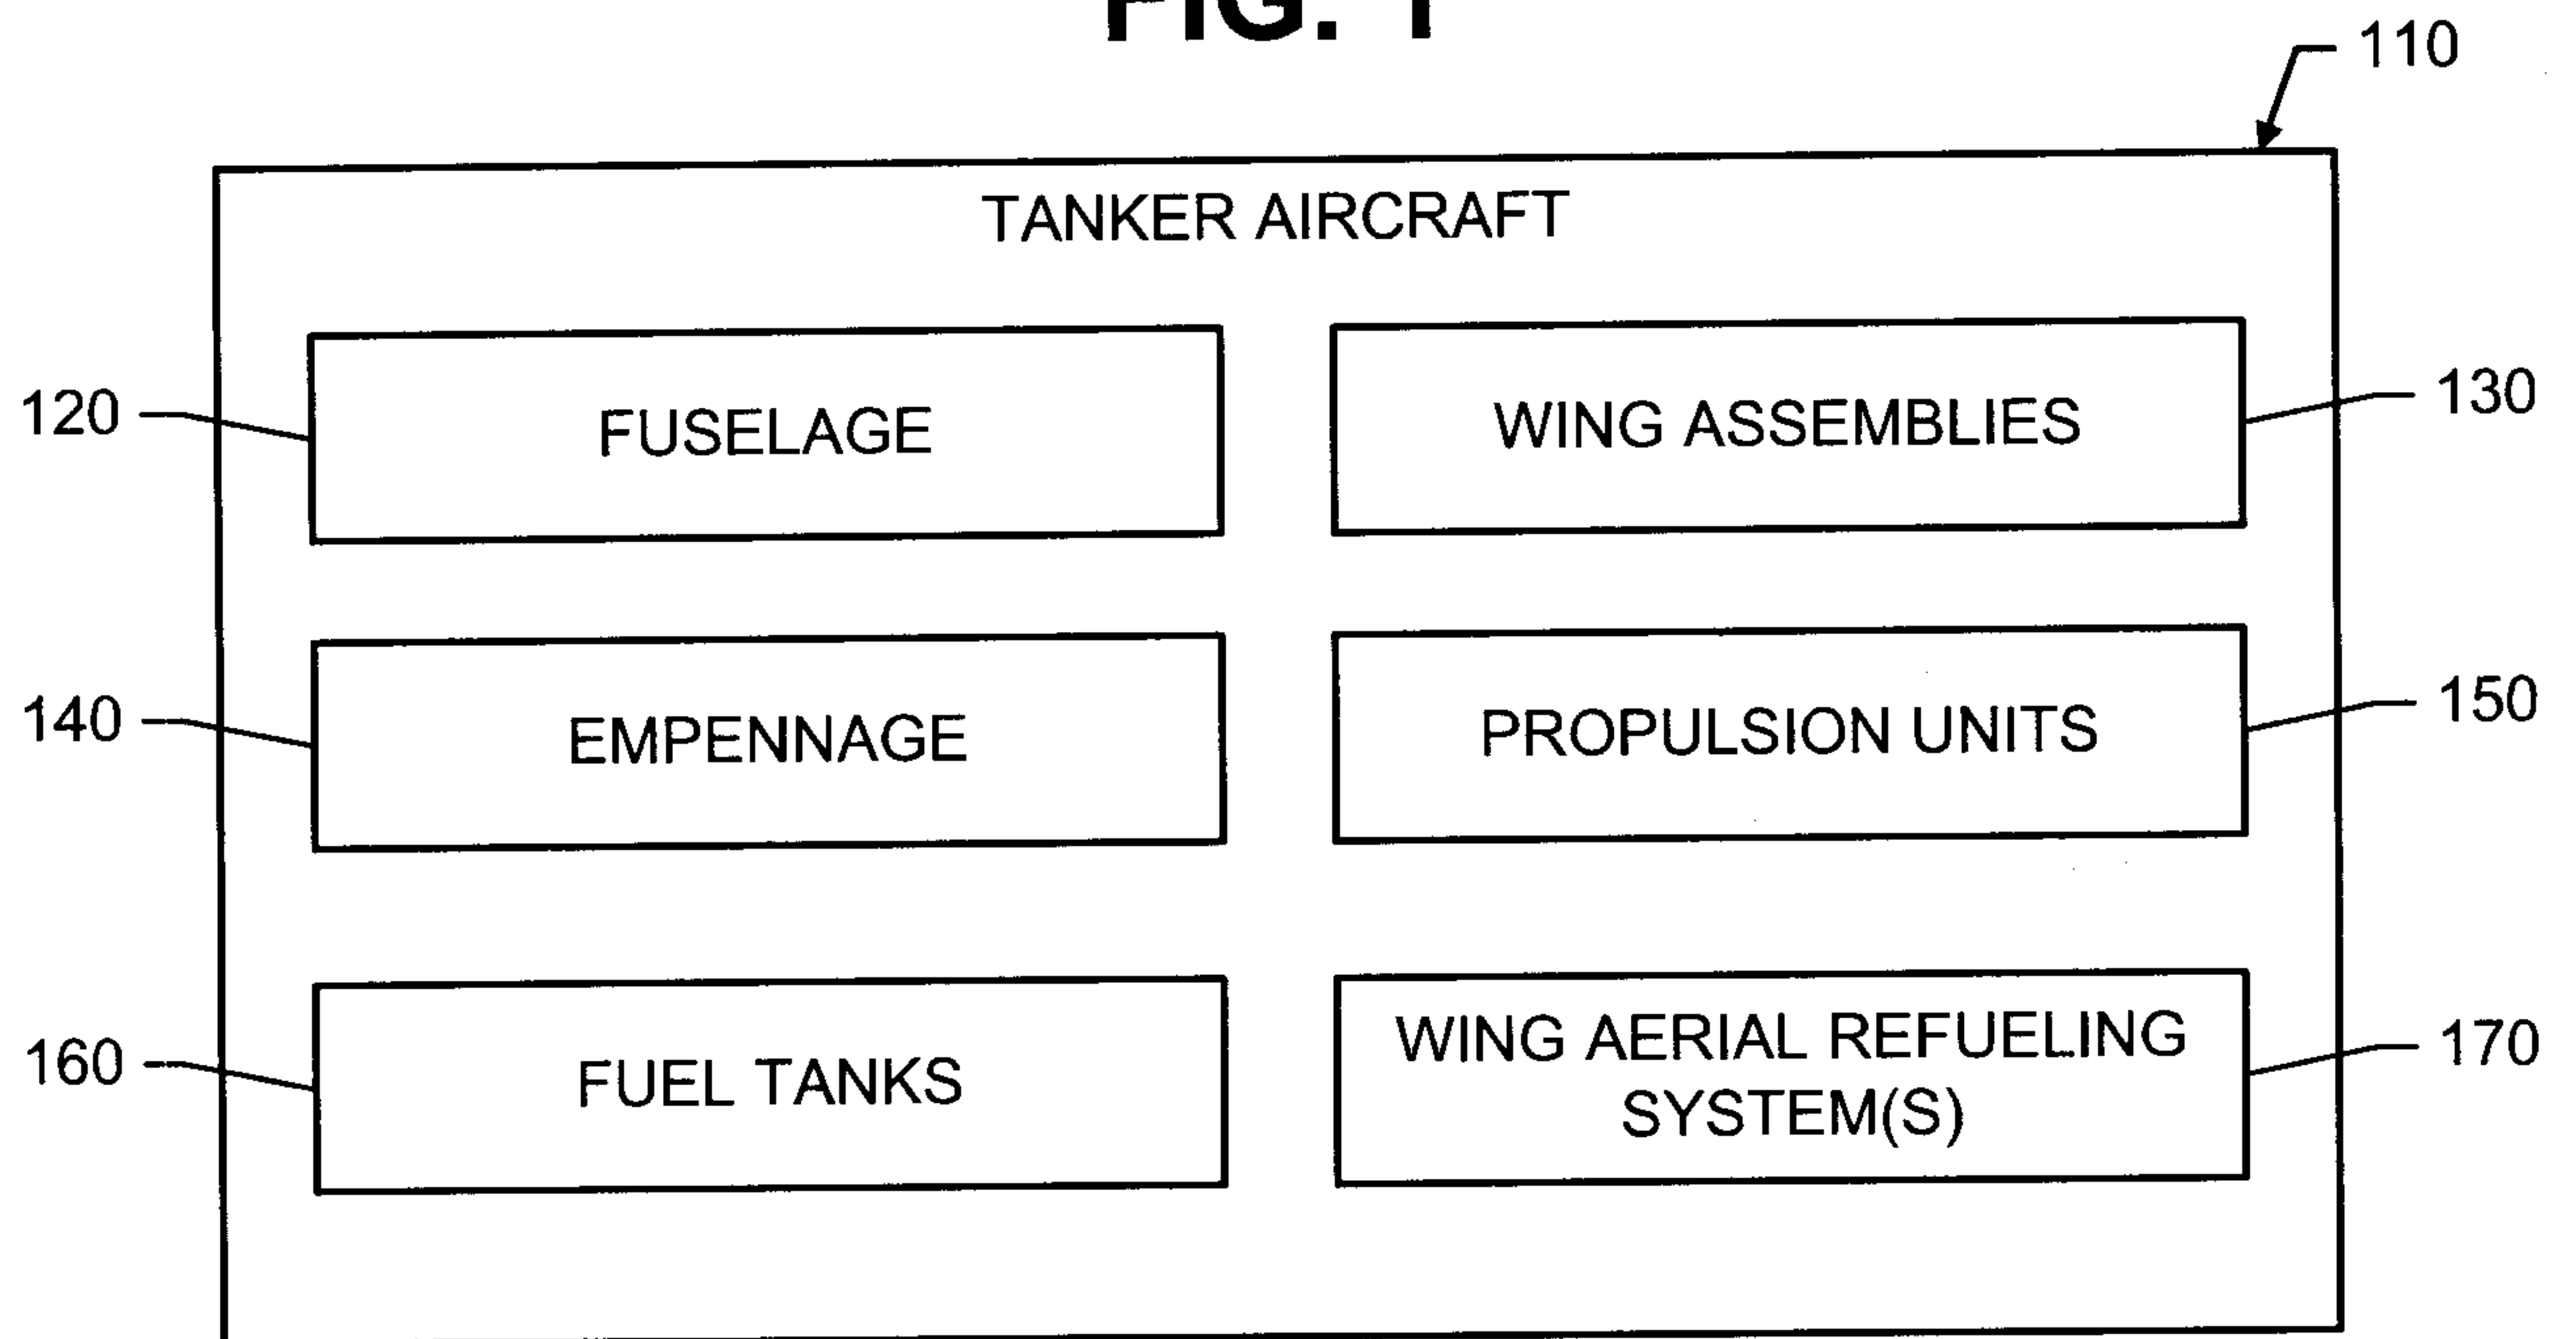
FIG. 1**FIG. 2**

FIG. 3

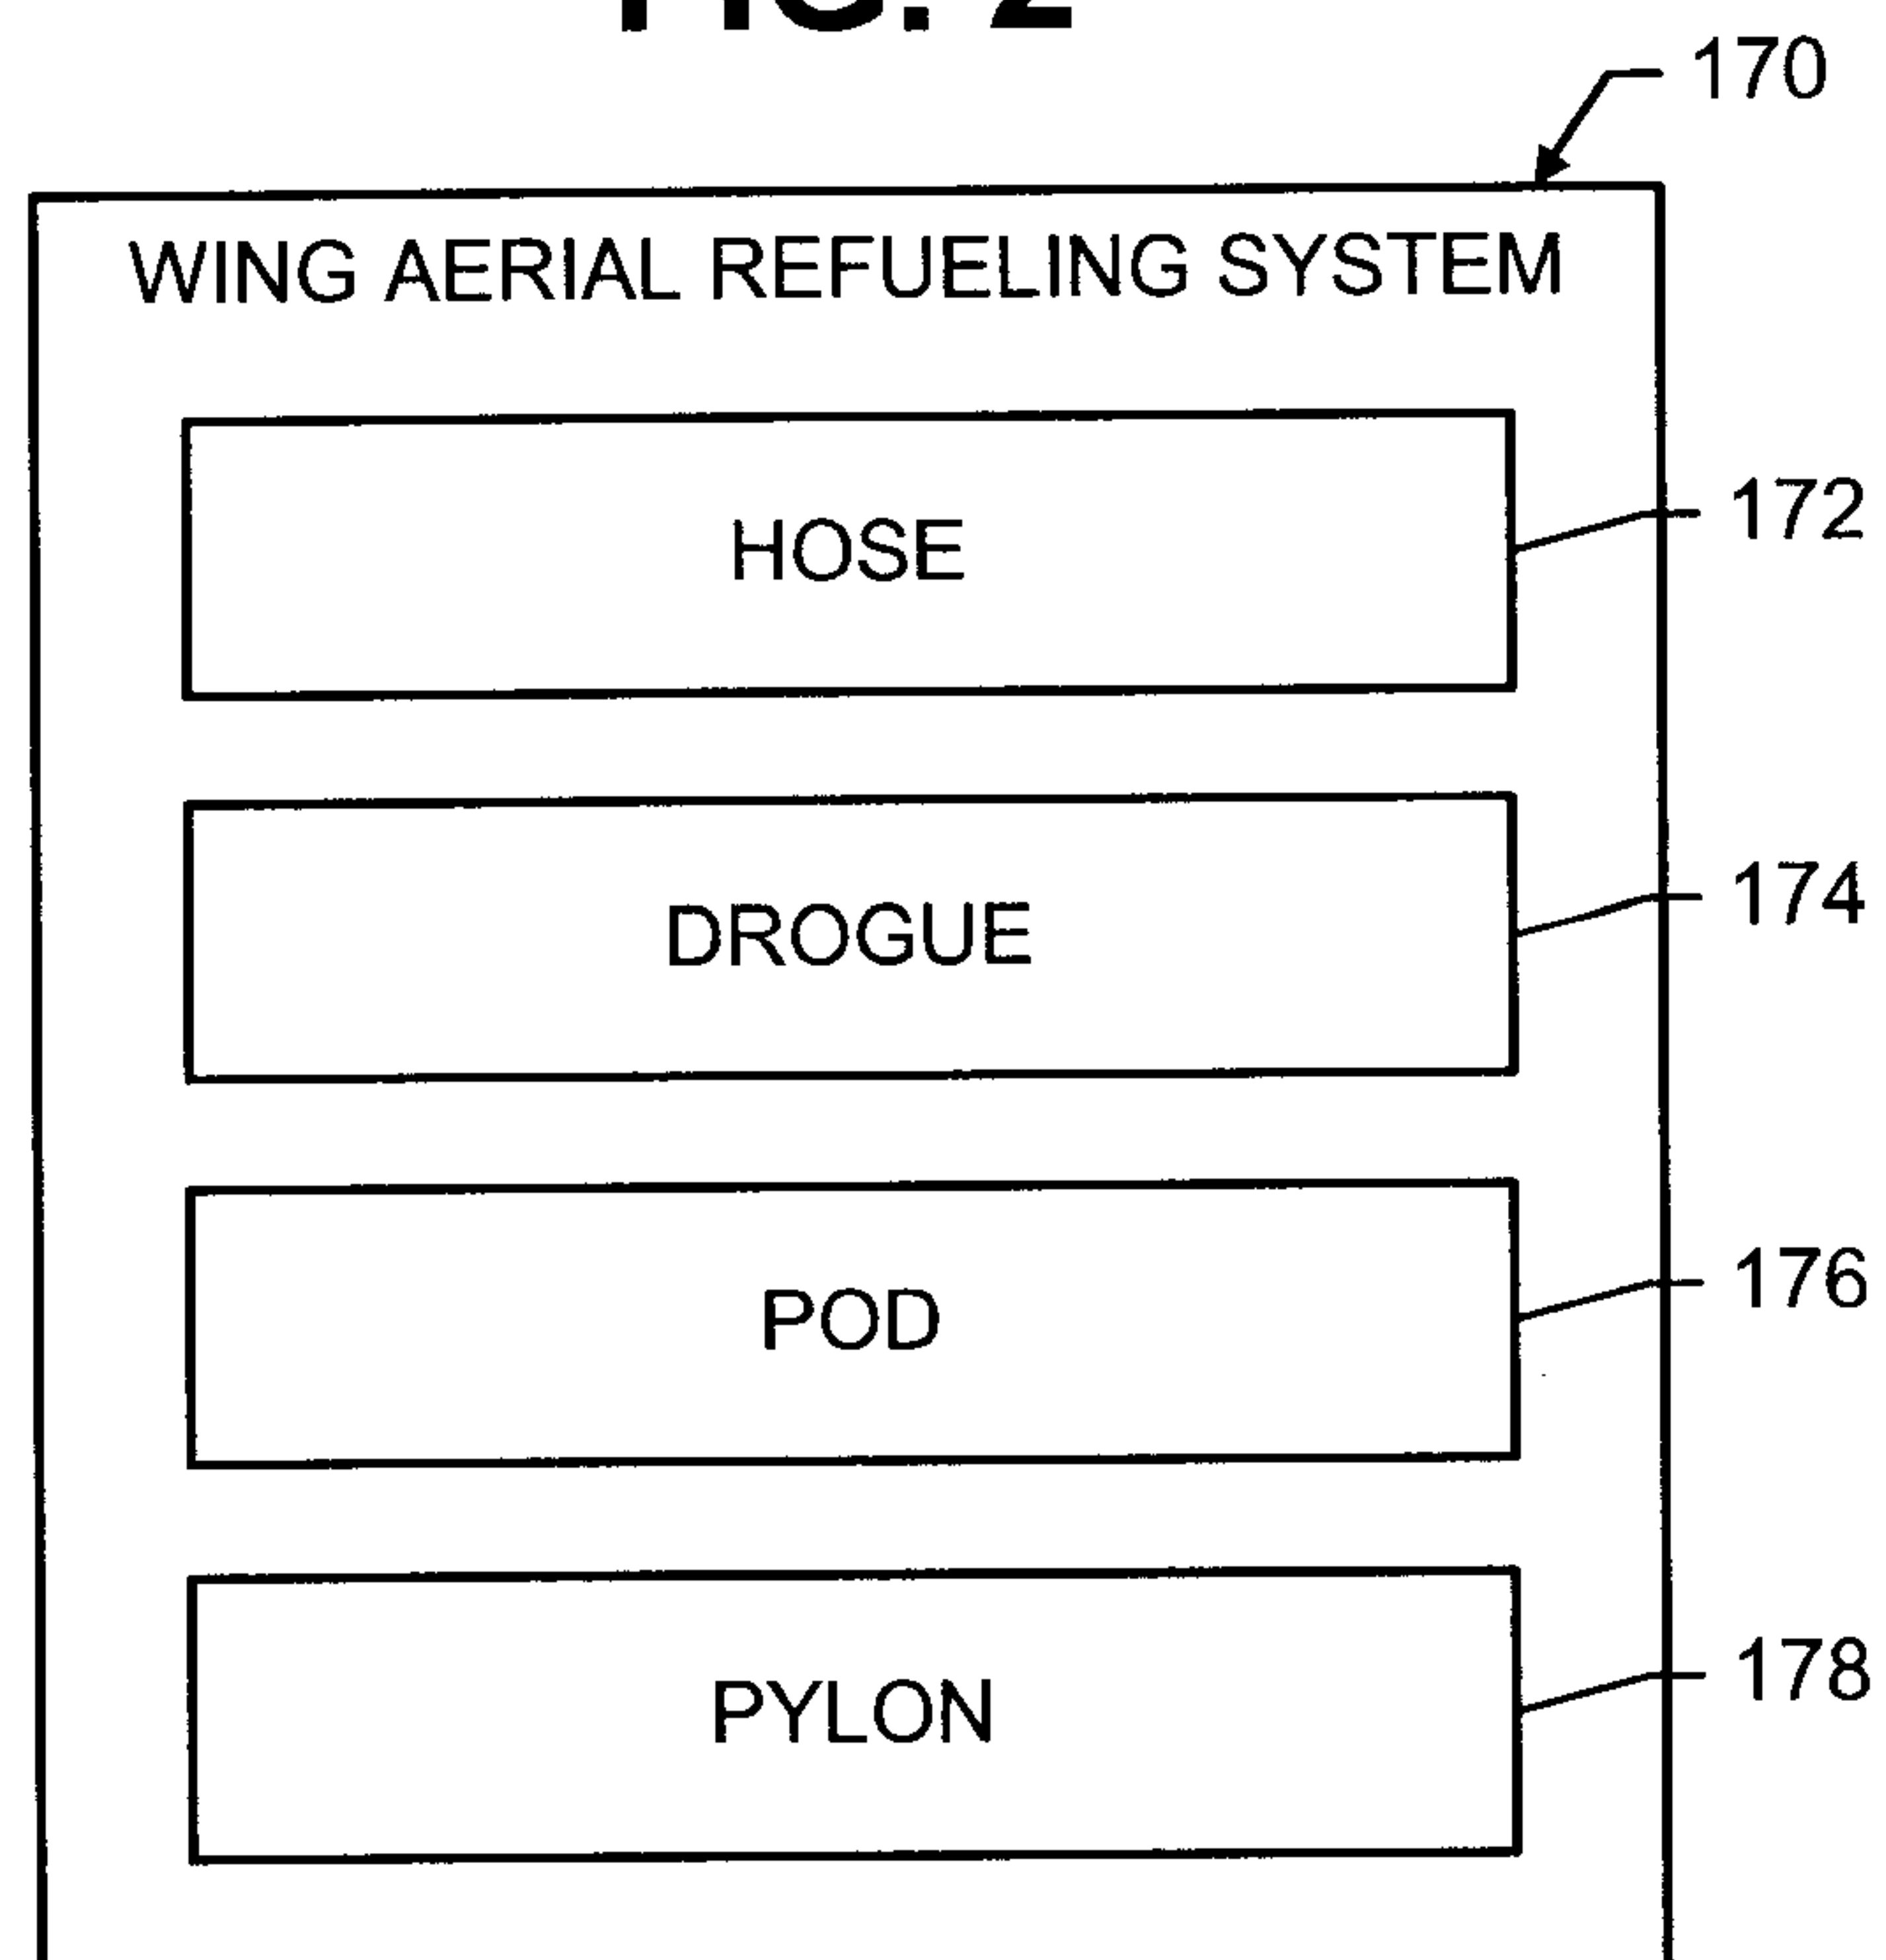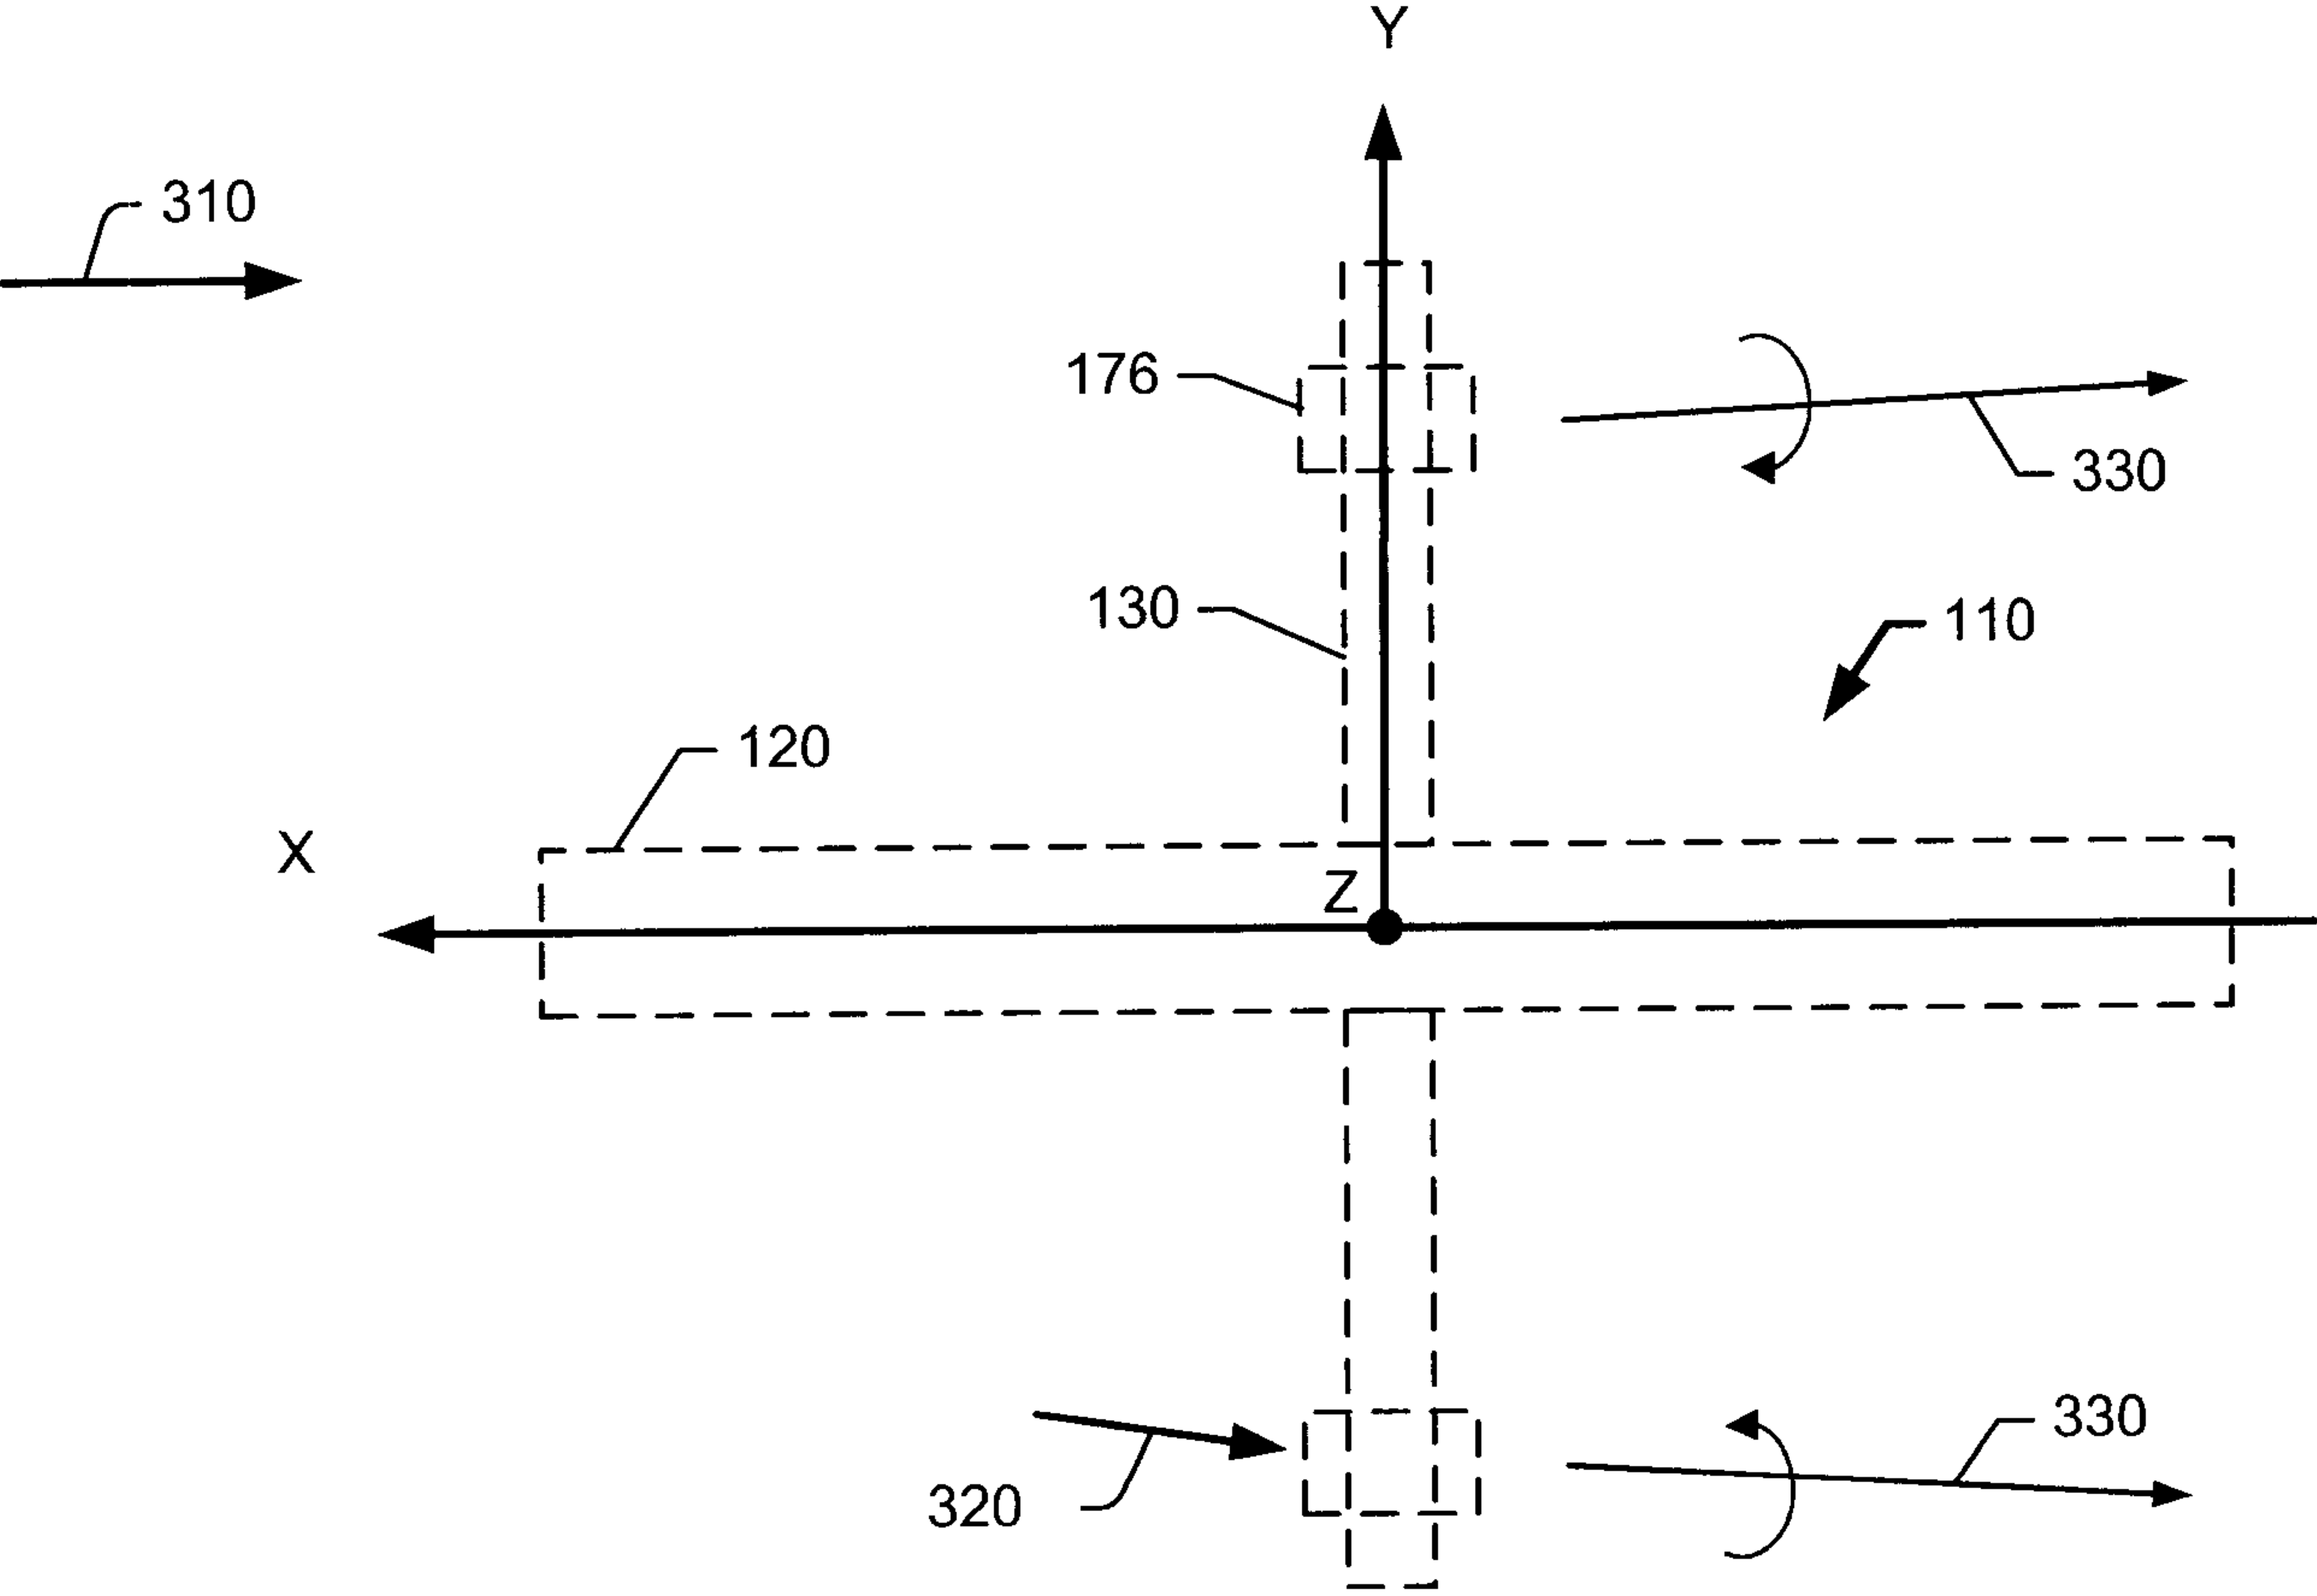

3/6

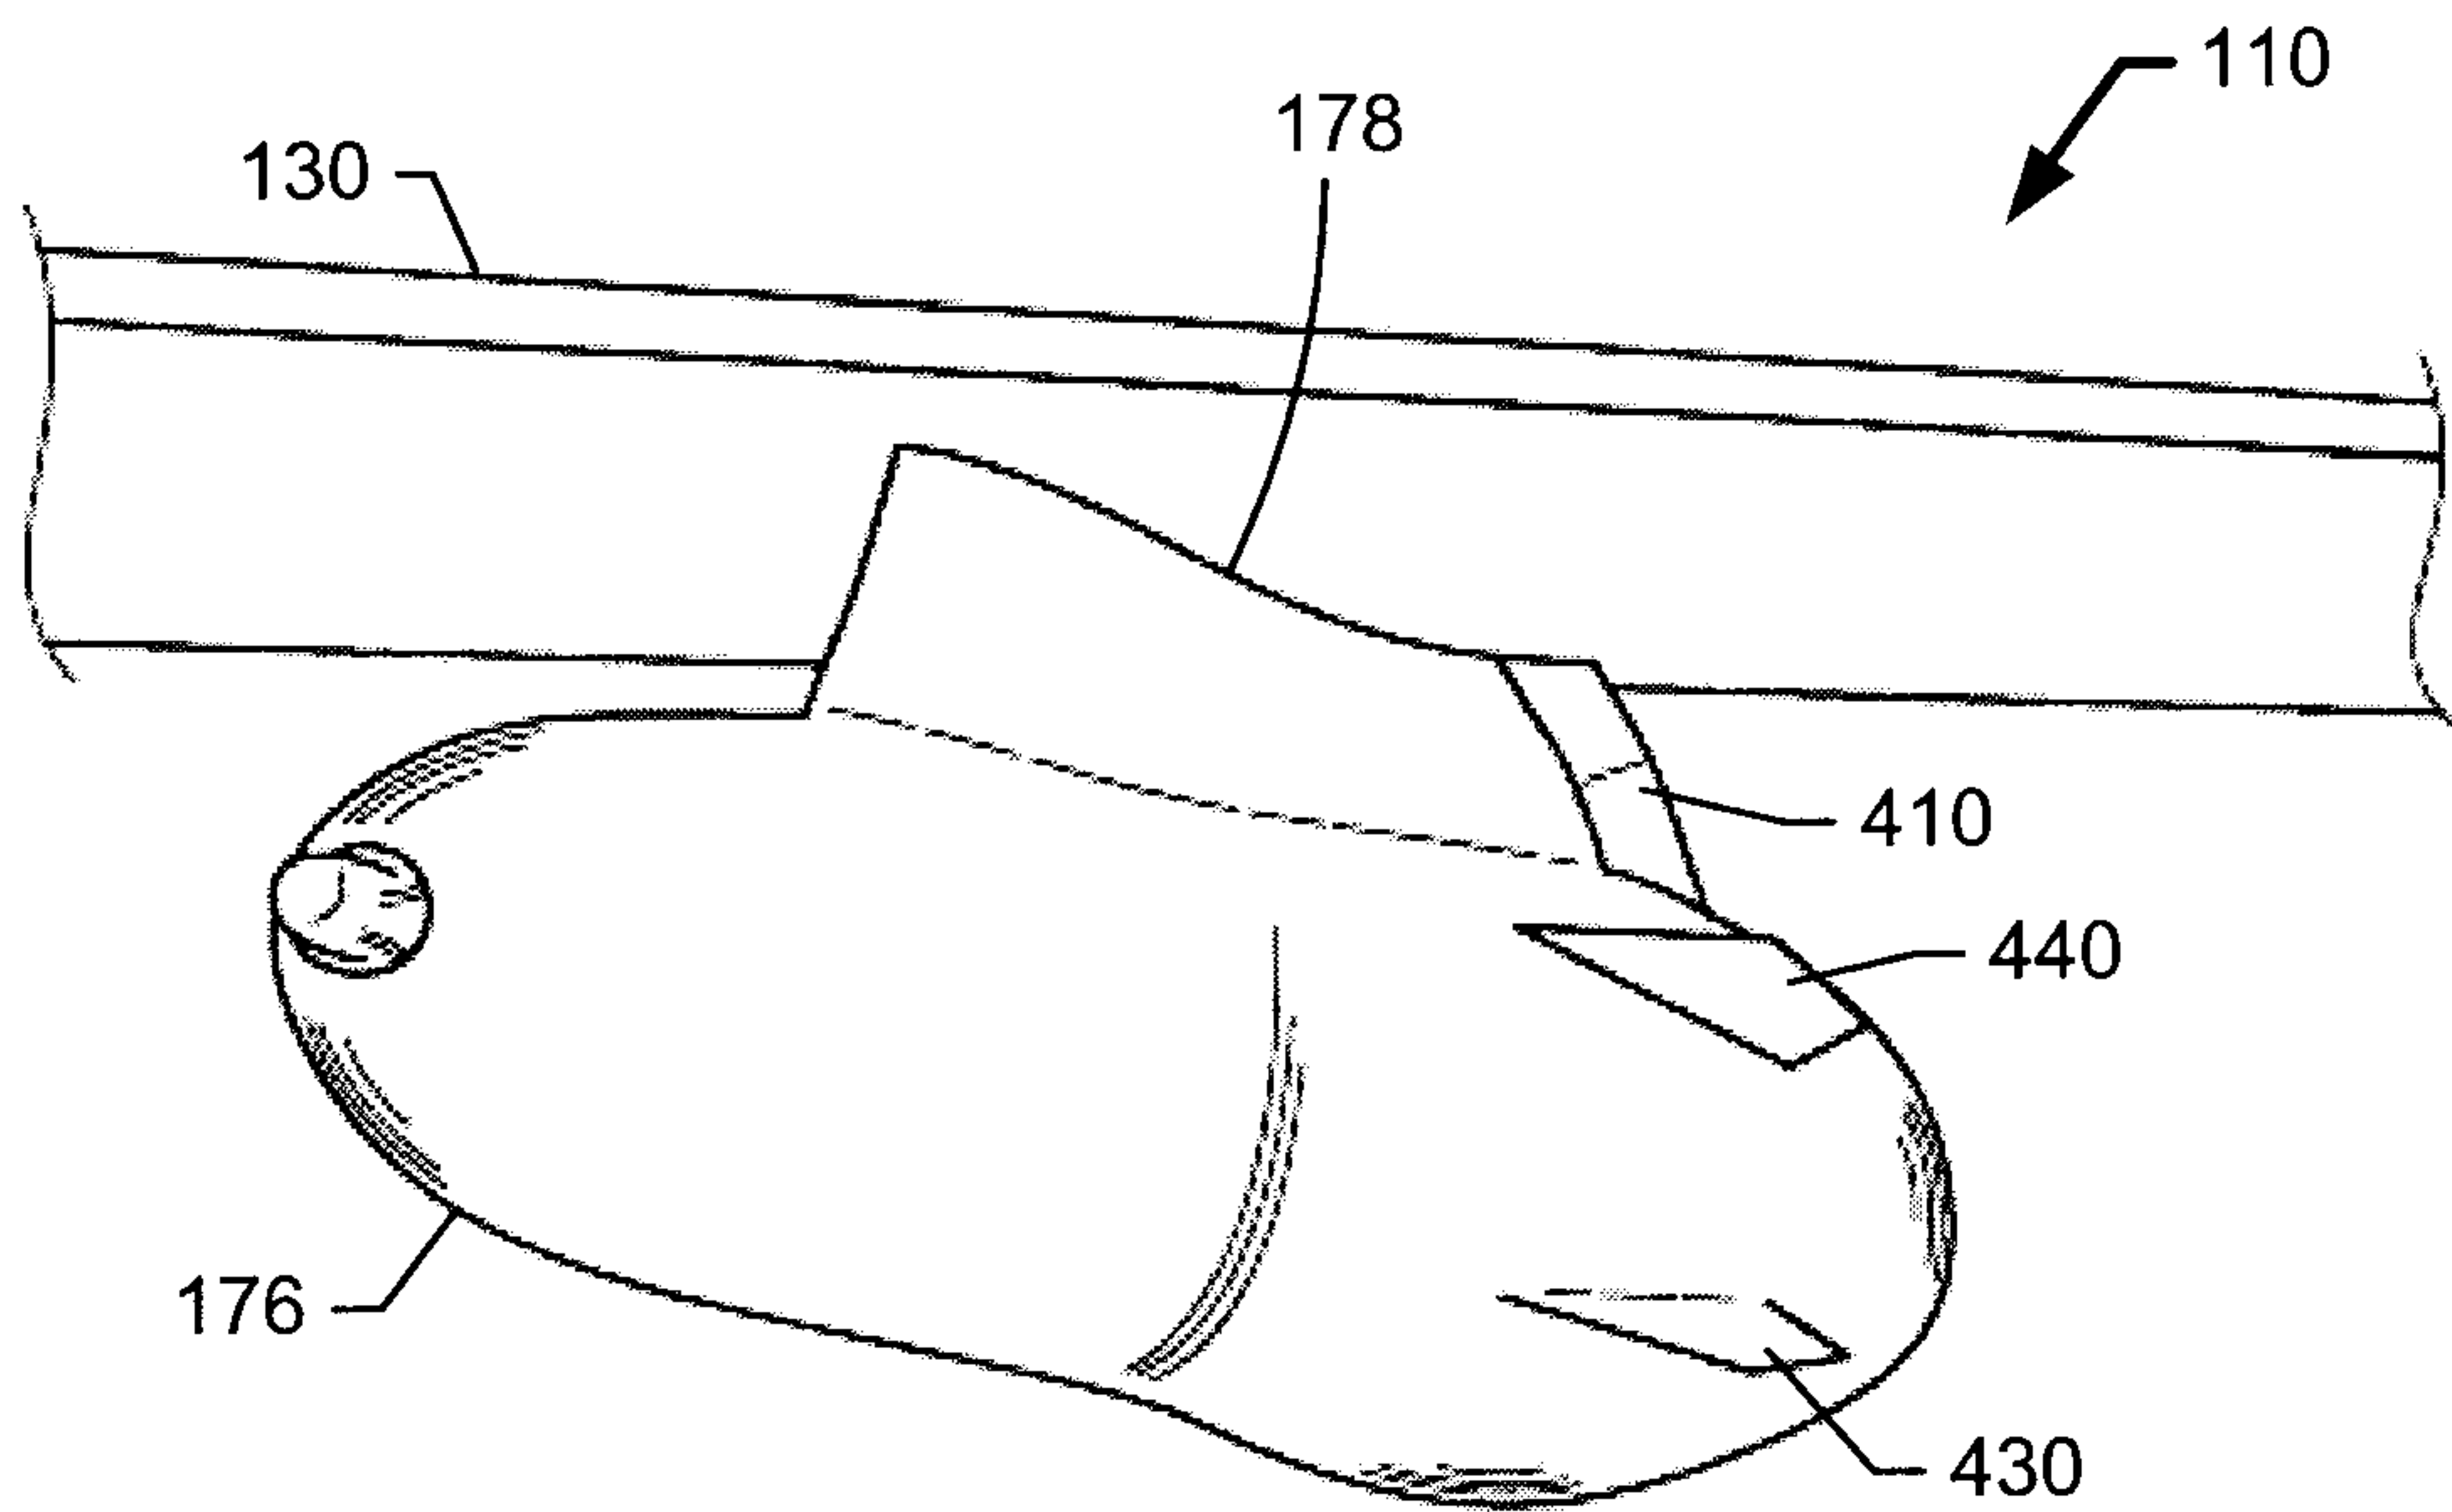
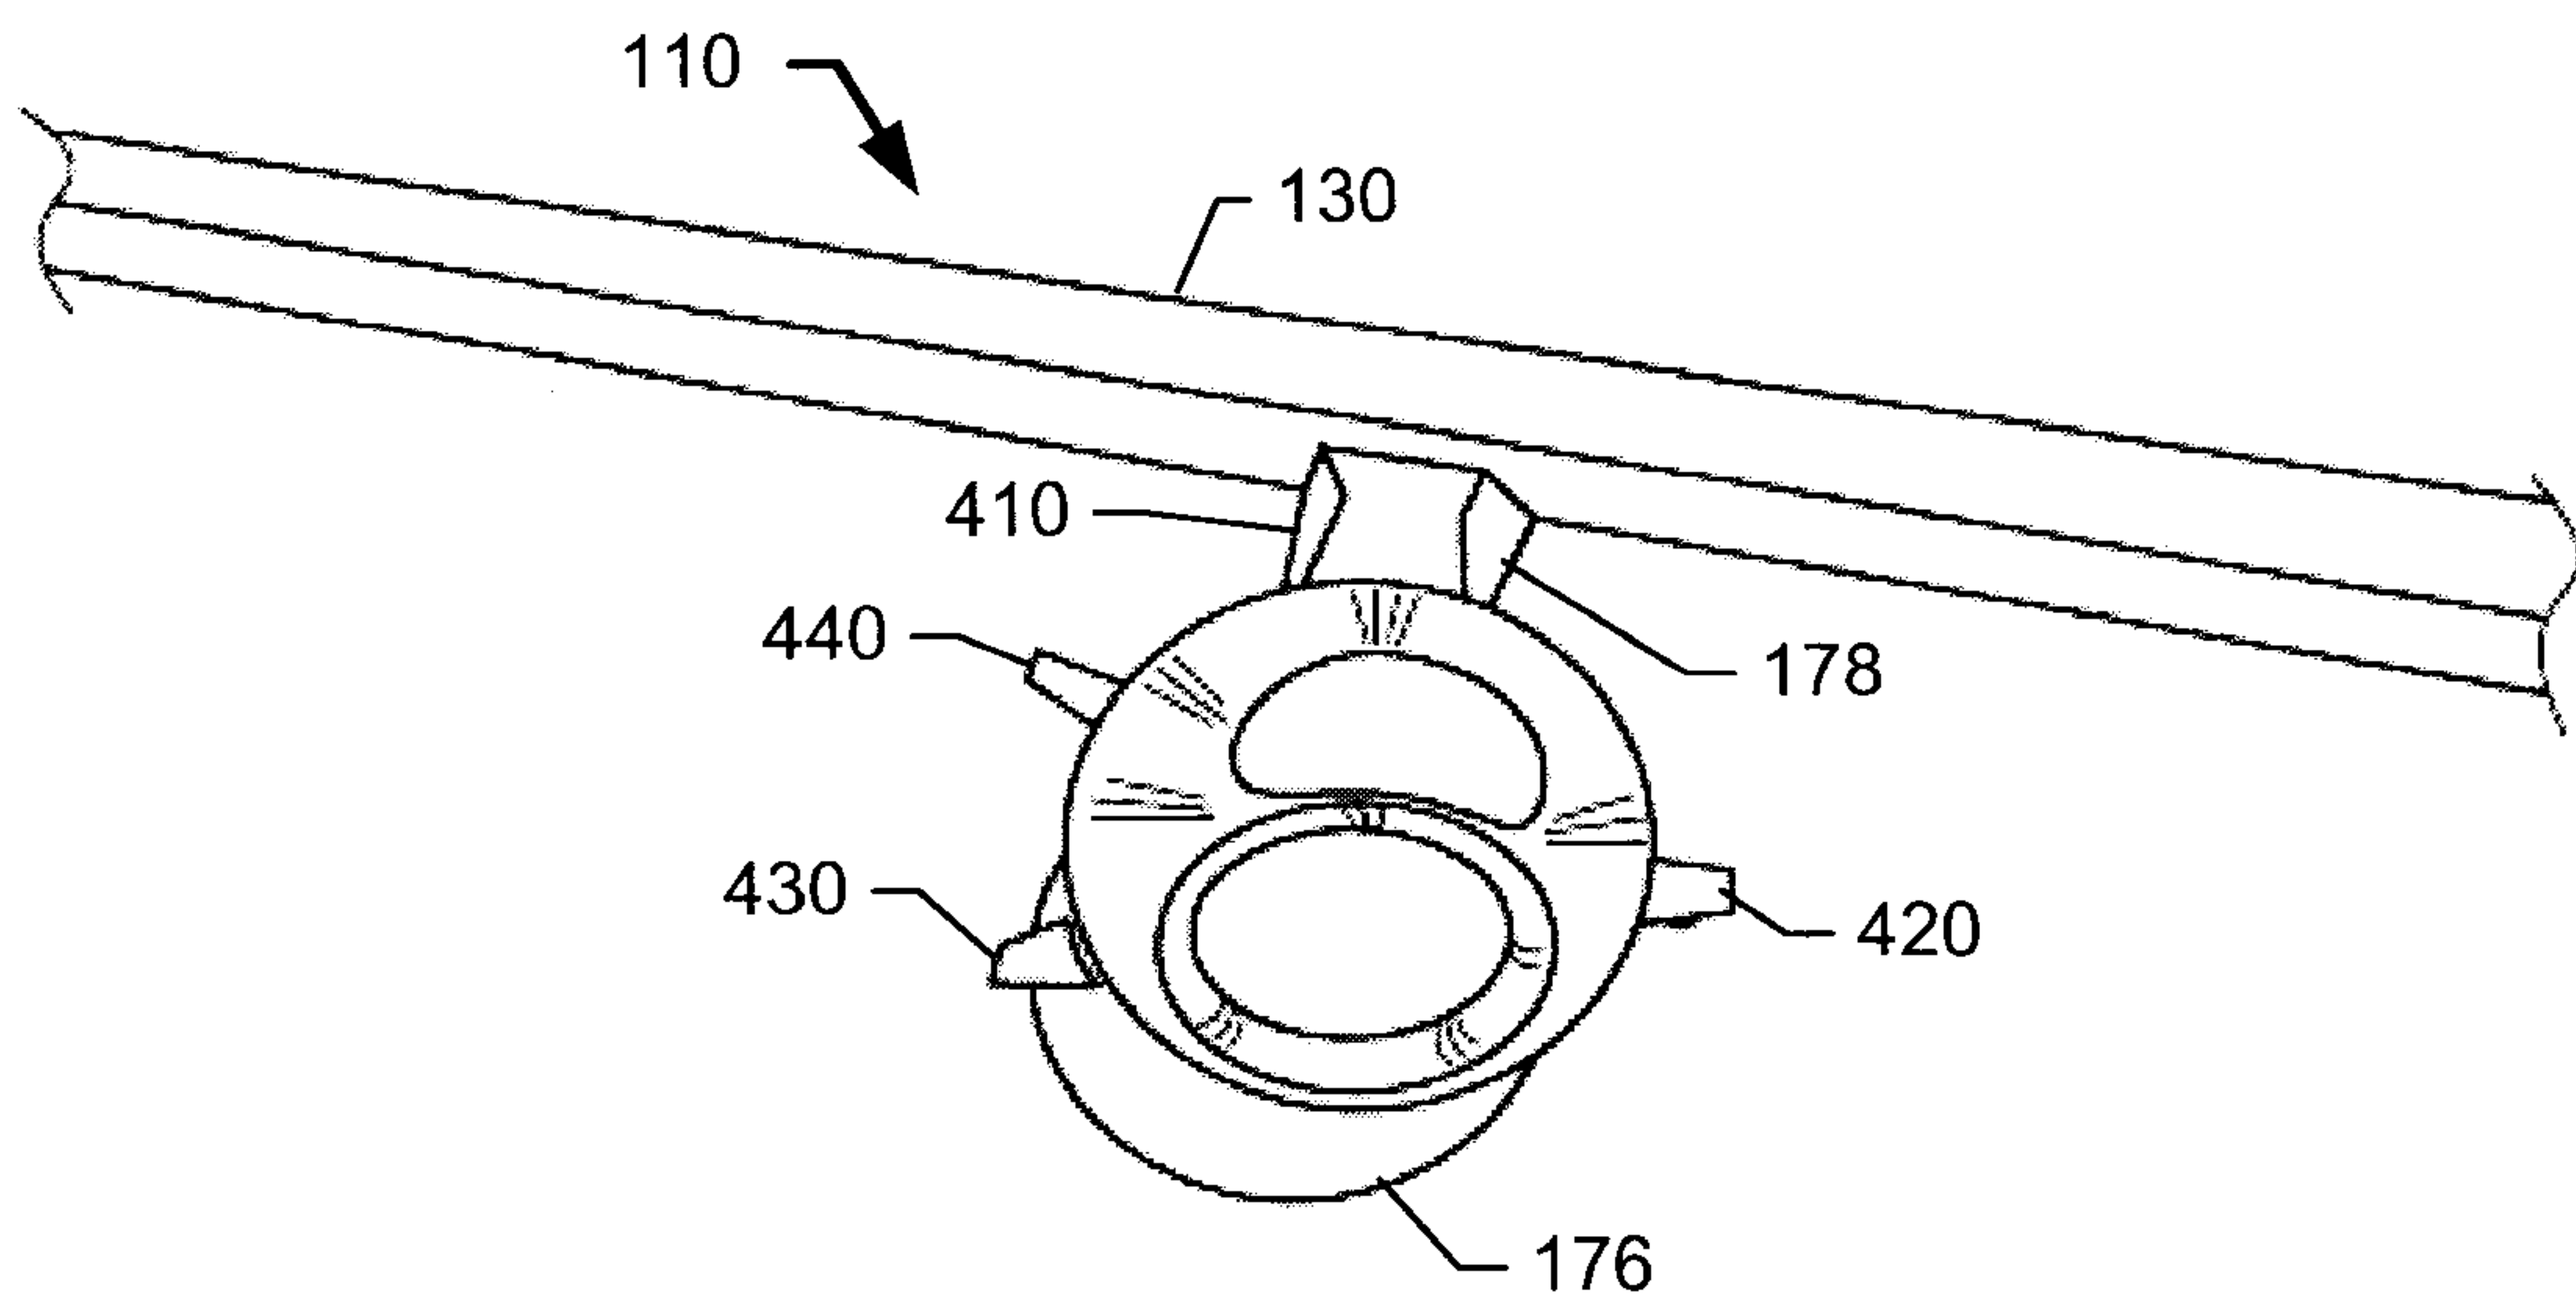
FIG. 4A**FIG. 4B**

FIG. 4C


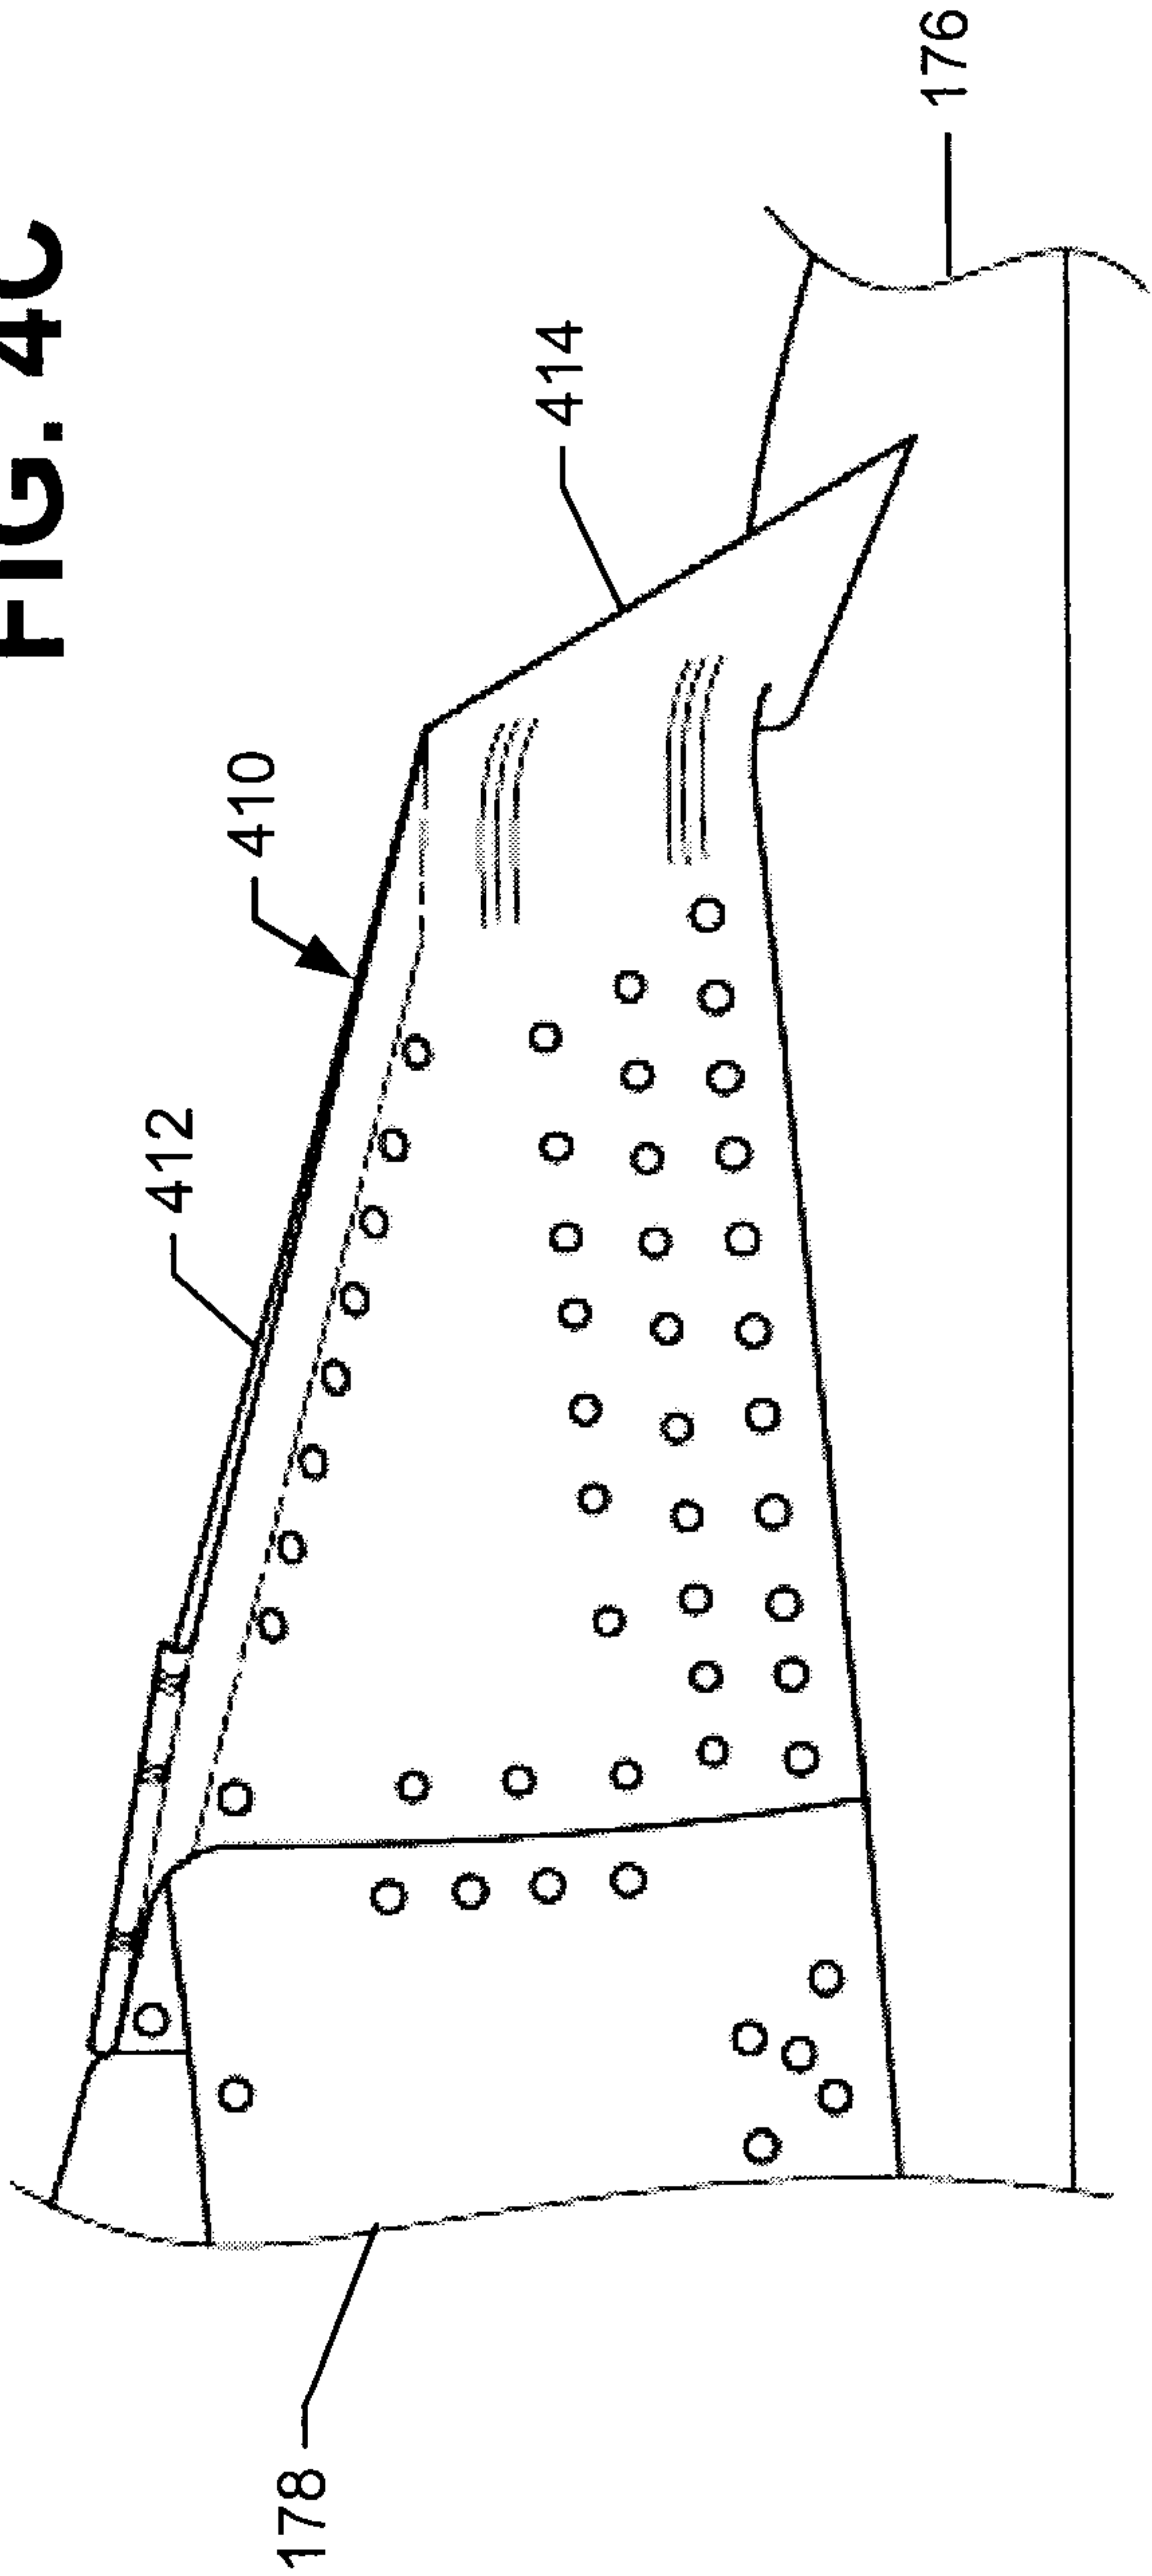


FIG. 4D

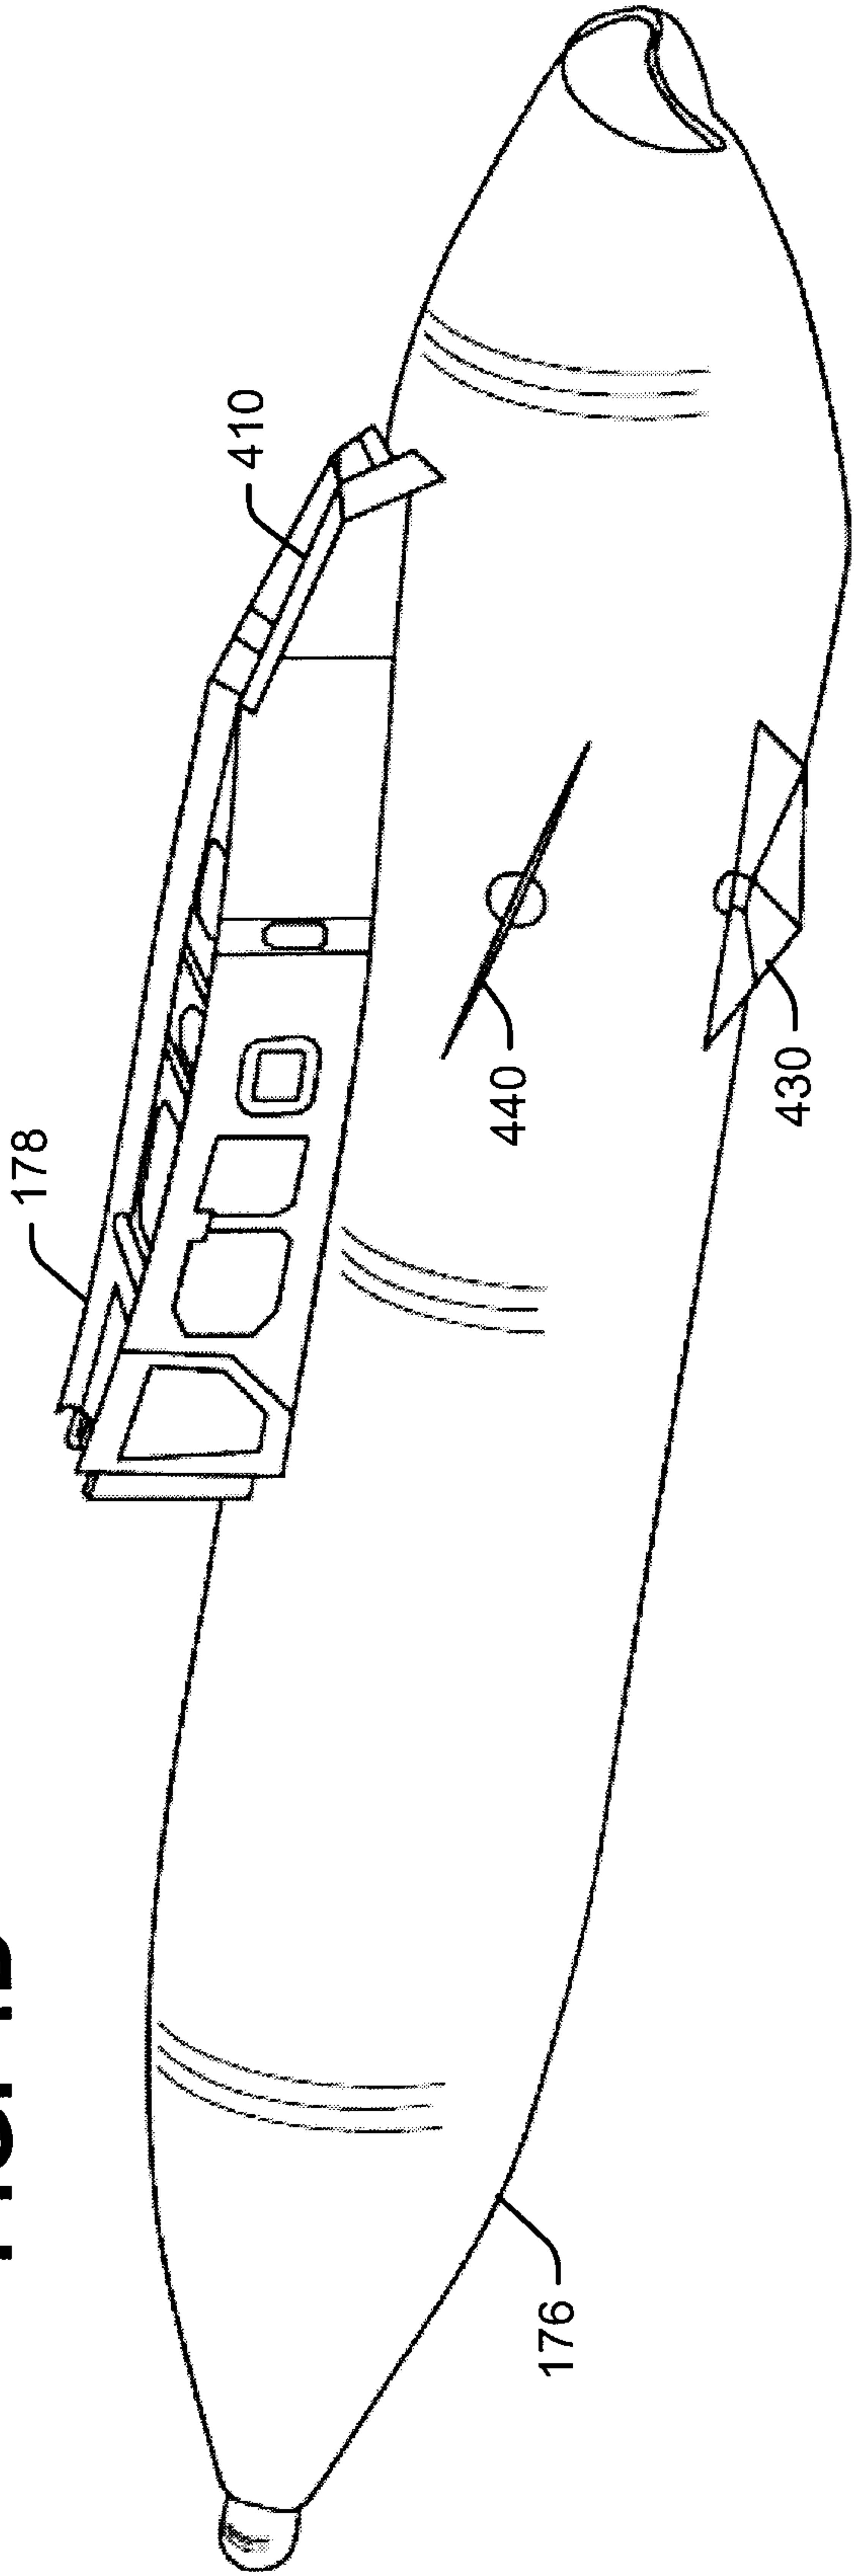

5/6

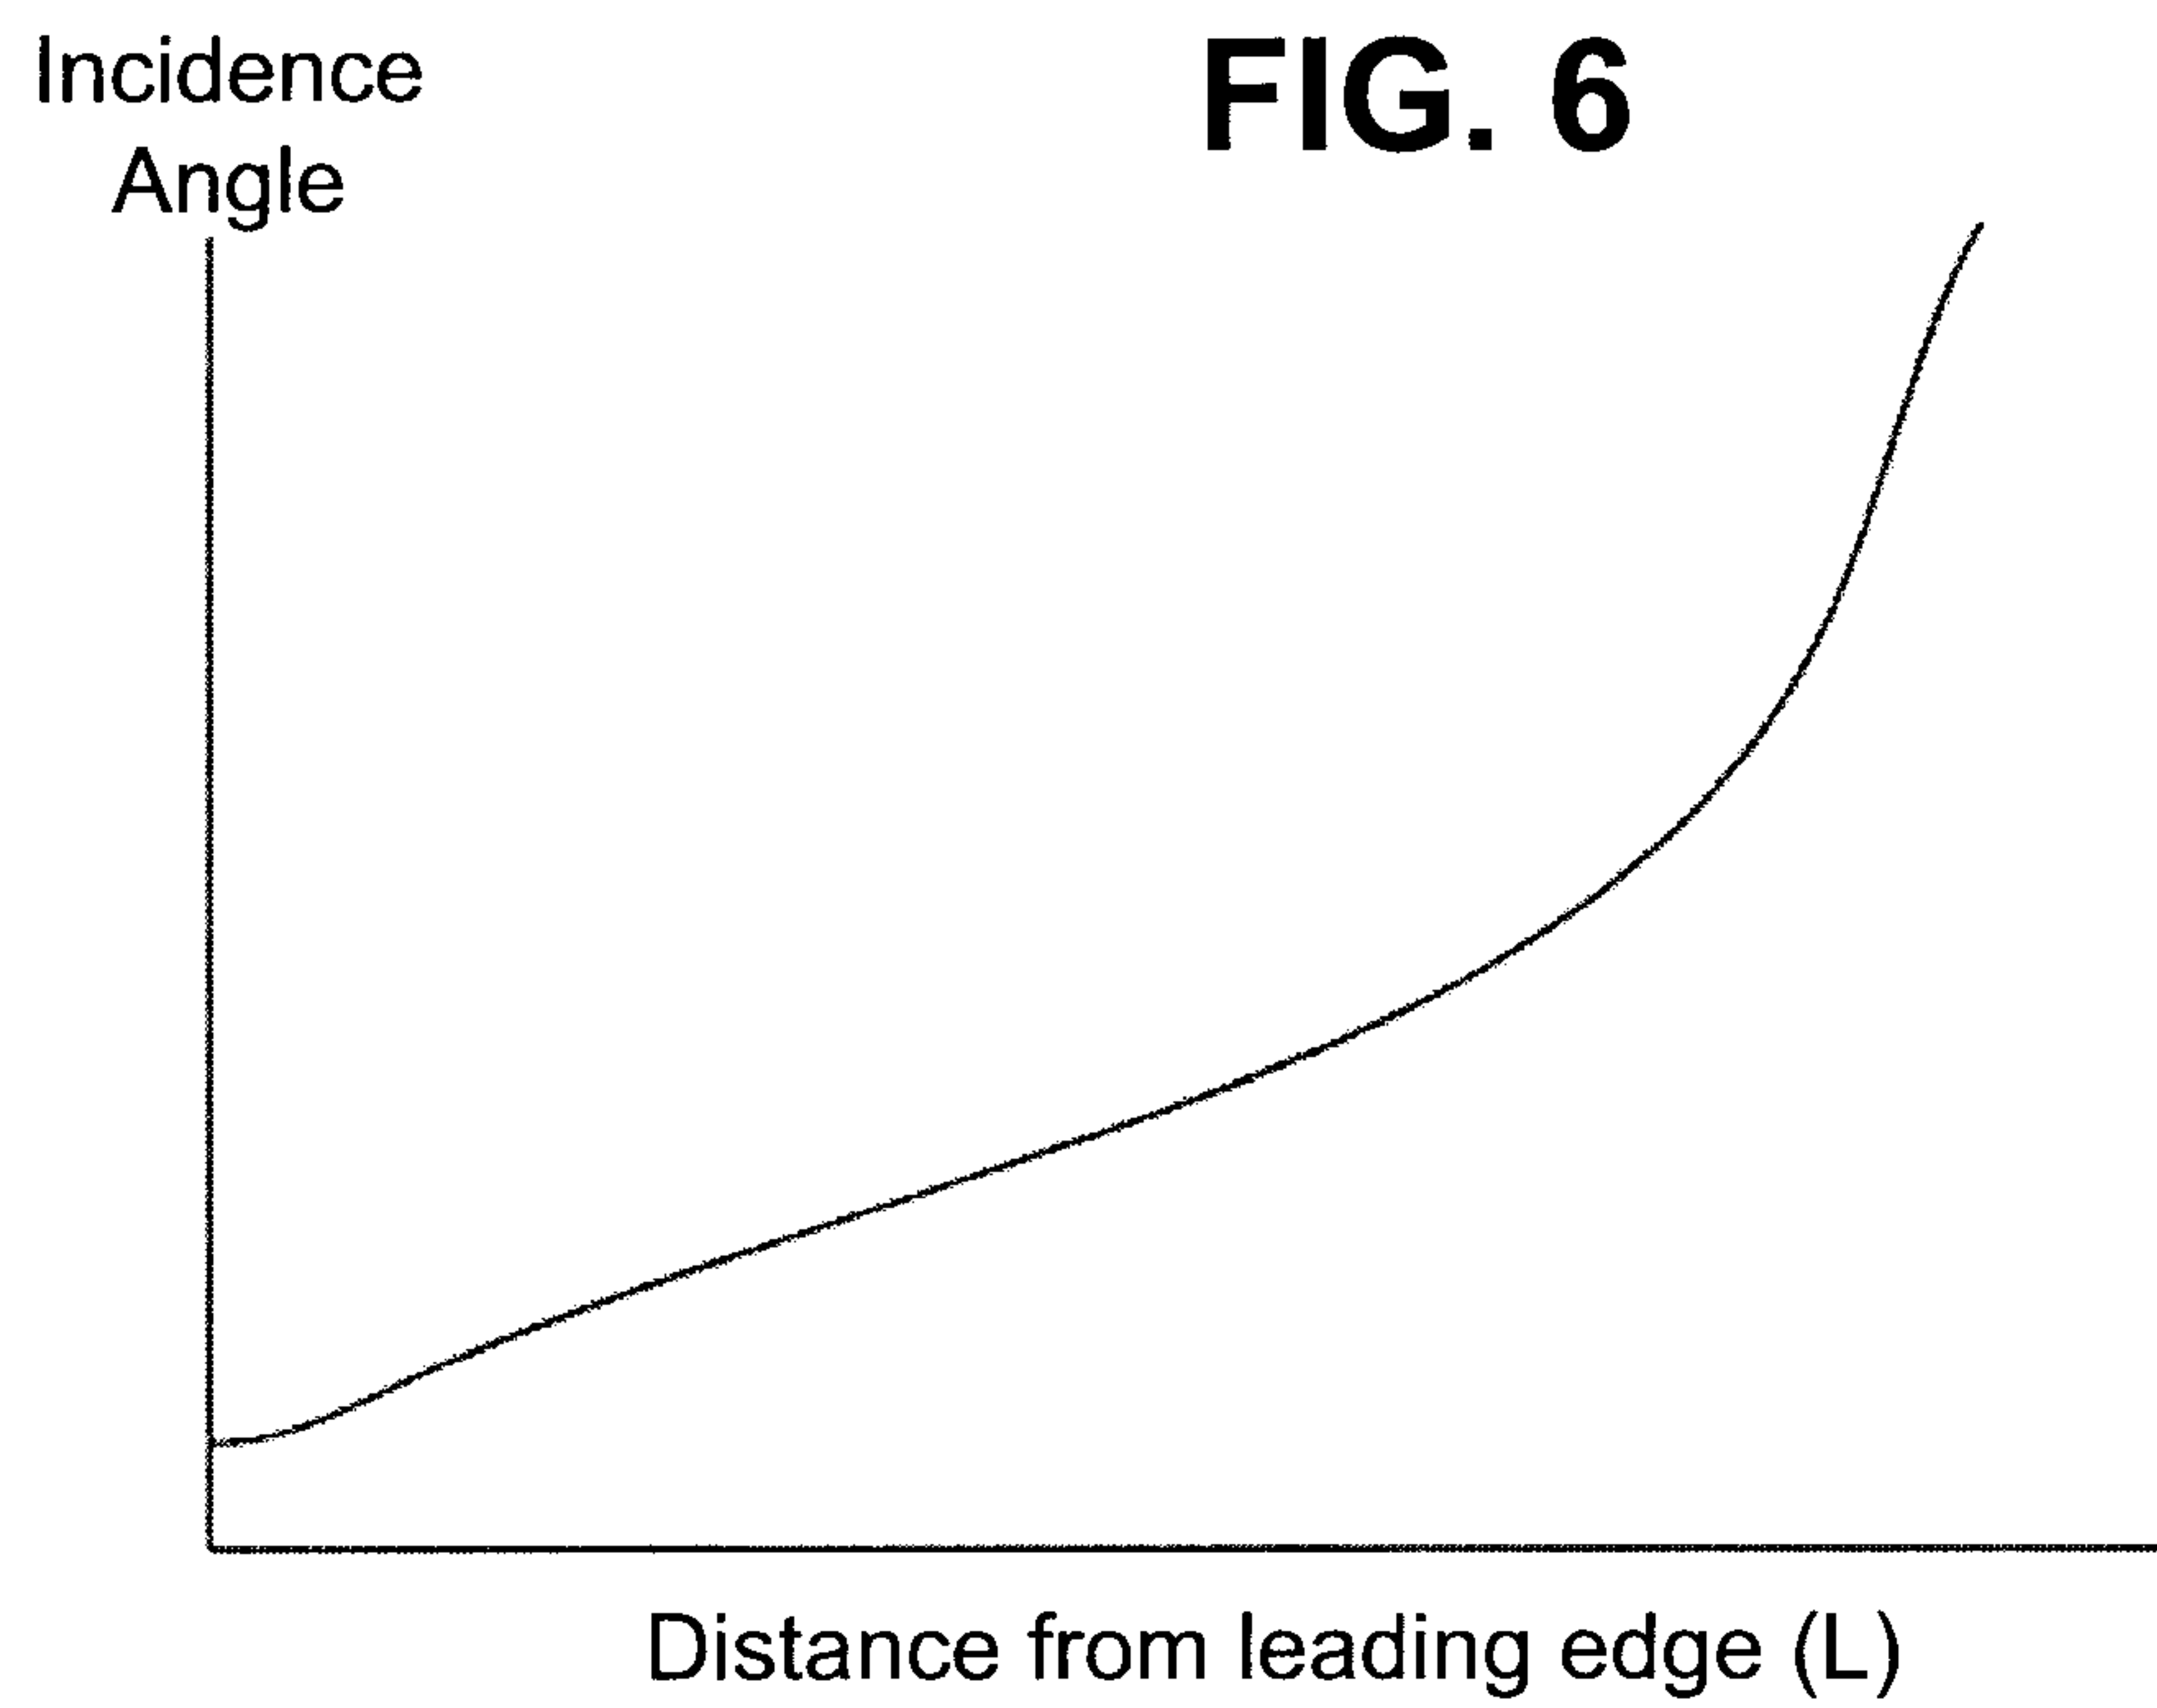
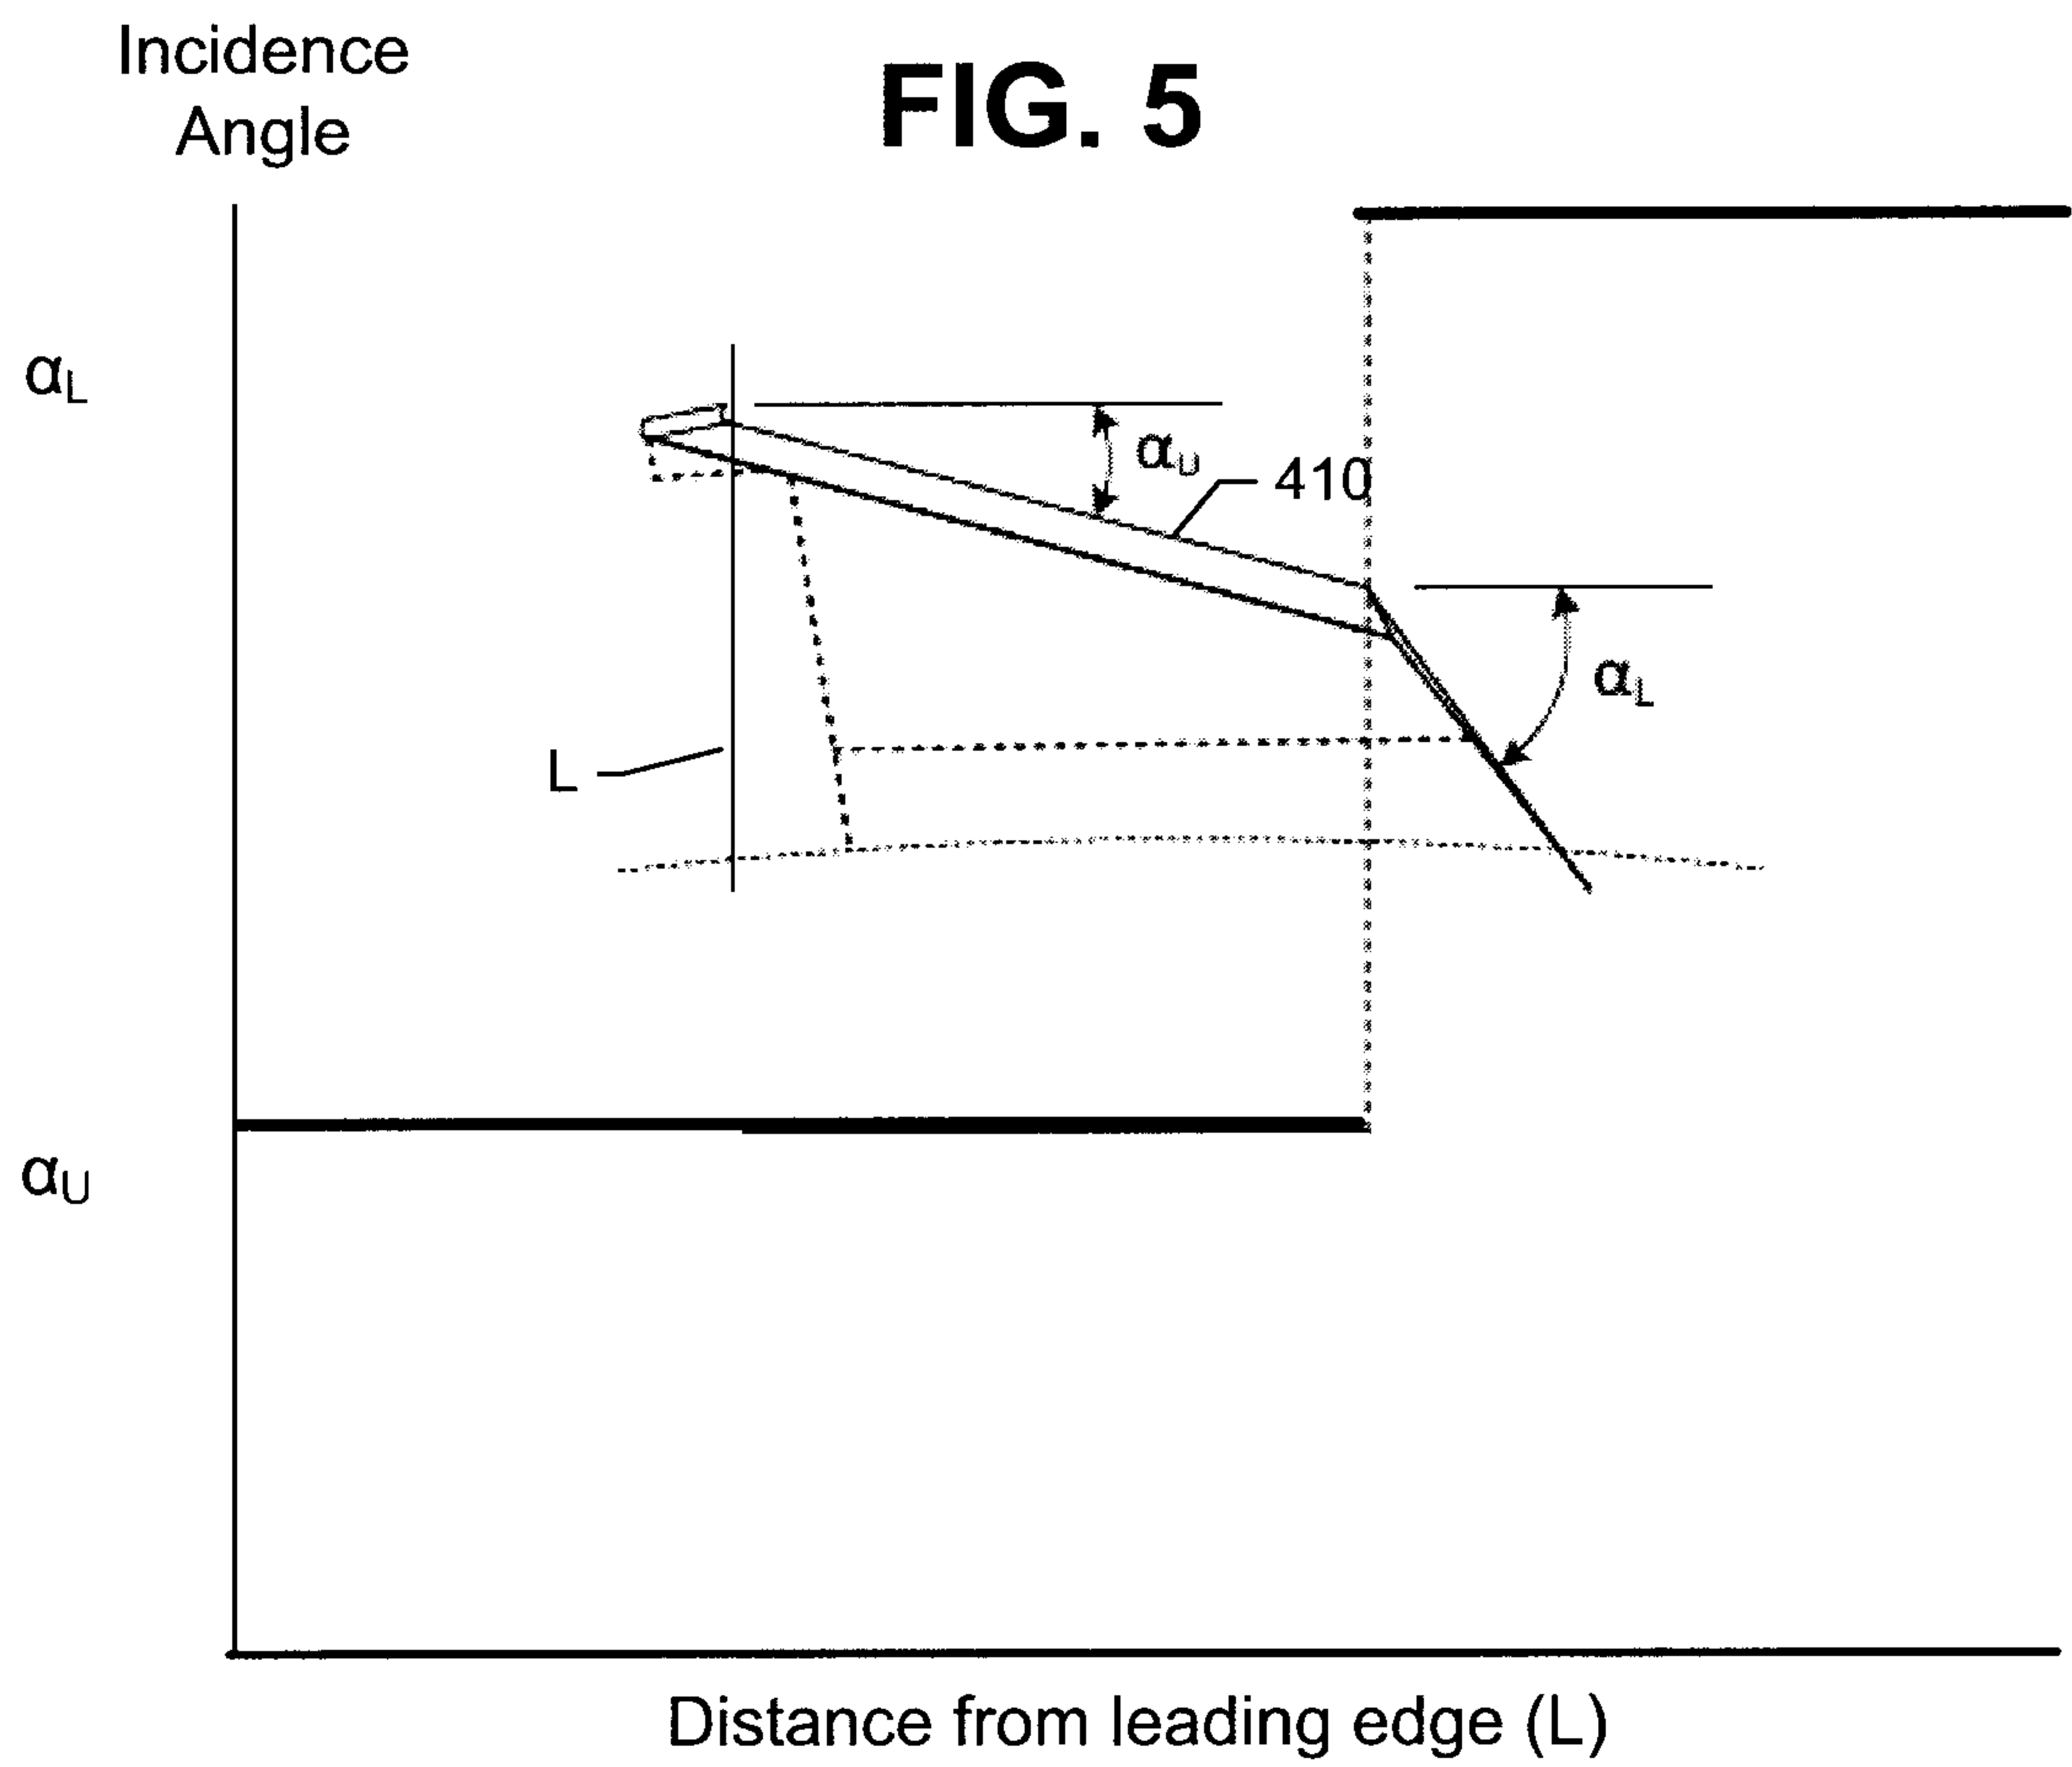


FIG. 7