



HU000035128T2

(19) **HU**(11) Lajstromszám: **E 035 128**(13) **T2****MAGYARORSZÁG****Szellemi Tulajdon Nemzeti Hivatala**

EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 12 702868**(22) A bejelentés napja: **2012. 02. 01.**(51) Int. Cl.: **H04L 5/00** (2006.01)**H04W 72/04** (2006.01)**H04L 27/26** (2006.01)

(96) Az európai bejelentés bejelentési száma:

EP 20120702868

(97) Az európai bejelentés közzétételi adatai:

EP 2671340 A1 **2012. 08. 09.**

(86) A nemzetközi (PCT) bejelentési szám:

PCT/GB 12/050210

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2671340 B1 **2017. 10. 25.**

(87) A nemzetközi közzétételi szám:

WO 12104631

(30) Elsőbbségi adatok:

201101983**2011. 02. 04.****GB**

(73) Jogosult(ak):

SCA IPLA Holdings Inc., New York, NY 10022 (US)

(72) Feltaláló(k):

MCNAMARA, Darren, Somerset BS21 5BB (GB)**LILLIE, Andrew, Bristol BS6 5DJ (GB)****DARWOOD, Peter, Bristol BS7 8LT (GB)****BEALE, Martin, Bristol BS2 8HE (GB)**

(74) Képviselő:

Danubia Szabadalmi és Jogi Iroda Kft., Budapest

(54)

Virtuális vivő beszúrása hagyományos OFDM host vivőben kommunikációs rendszerben

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 671 340 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
25.10.2017 Bulletin 2017/43

(51) Int Cl.:
H04L 5/00 (2006.01) **H04L 27/26** (2006.01)
H04W 72/04 (2009.01)

(21) Application number: **12702868.6**

(86) International application number:
PCT/GB2012/050210

(22) Date of filing: **01.02.2012**

(87) International publication number:
WO 2012/104631 (09.08.2012 Gazette 2012/32)

(54) **INSERTING VIRTUAL CARRIER IN CONVENTIONAL OFDM HOST CARRIER IN COMMUNICATIONS SYSTEM**

EINSETZEN EINES VIRTUELLEN TRÄGERS IN EINEN KONVENTIONELLEN
OFDM-HOST-TRÄGER IN EINEM KOMMUNIKATIONSSYSTEM

INSERTION D'UNE PORTEUSE VIRTUELLE DANS UNE PORTEUSE HÔTE MROF CLASSIQUE
DANS UN SYSTÈME DE COMMUNICATION

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **04.02.2011 GB 201101983**

(43) Date of publication of application:
11.12.2013 Bulletin 2013/50

(60) Divisional application:
17185910.1

(73) Proprietor: **SCA IPLA Holdings Inc.**
New York, NY 10022 (US)

(72) Inventors:
• **MCNAMARA, Darren**
Somerset BS21 5BB (GB)
• **LILLIE, Andrew**
Bristol BS6 5DJ (GB)
• **DARWOOD, Peter**
Bristol BS7 8LT (GB)

• **BEALE, Martin**
Bristol BS2 8HE (GB)

(74) Representative: **D Young & Co LLP**
120 Holborn
London EC1N 2DY (GB)

(56) References cited:
• **QUALCOMM EUROPE: "Carrier Aggregation
Operation in LTE-Advanced", 3GPP DRAFT;
R1-083193, 3RD GENERATION PARTNERSHIP
PROJECT (3GPP), MOBILE COMPETENCE
CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921
SOPHIA-ANTIPOLIS CEDEX ; FRANCE, no. Jeju;
20080812, 12 August 2008 (2008-08-12),
XP050316622,**
• **HUAWEI: "Concept for downlink carrier
aggregation in LTE-Advanced", 3GPP DRAFT;
R1-083703, 3RD GENERATION PARTNERSHIP
PROJECT (3GPP), MOBILE COMPETENCE
CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921
SOPHIA-ANTIPOLIS CEDEX ; FRANCE, no.
Prague, Czech Republic; 20080924, 24
September 2008 (2008-09-24), XP050317045,**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 671 340 B1

Description

TECHNICAL FIELD OF THE INVENTION

[0001] The present invention relates to methods, systems and apparatus for allocating transmission resources and transmitting data in mobile telecommunication systems.

BACKGROUND OF THE INVENTION

[0002] Third and fourth generation mobile telecommunication systems, such as those based on the 3GPP defined UMTS and Long Term Evolution (LTE) architecture are able to support more sophisticated services than simple voice and messaging services offered by previous generations of mobile telecommunication systems.

[0003] For example, with the improved radio interface and enhanced data rates provided by LTE systems, a user is able to enjoy high data rate applications such as mobile video streaming and mobile video conferencing that would previously only have been available via a fixed line data connection. The demand to deploy third and fourth generation networks is therefore strong and the coverage area of these networks, i.e. geographic locations where access to the networks is possible, is expected to increase rapidly.

[0004] The anticipated widespread deployment of third and fourth generation networks has led to the parallel development of a class of devices and applications which, rather than taking advantage of the high data rates available, instead take advantage of the robust radio interface and increasing ubiquity of the coverage area. Examples include so-called machine type communication (MTC) applications, which are typified by semi-autonomous or autonomous wireless communication devices (i.e. MTC devices) communicating small amounts of data on a relatively infrequent basis. Examples include so-called smart meters which, for example, are located in a customer's house and periodically transmit information back to a central MTC server data relating to the customer's consumption of a utility such as gas, water, electricity and so on.

[0005] Whilst it can be convenient for a terminal such as an MTC type terminal to take advantage of the wide coverage area provided by a third or fourth generation mobile telecommunication network there are at present disadvantages. Unlike a conventional third or fourth generation mobile terminal such as a smartphone, an MTC-type terminal is preferably relatively simple and inexpensive. The type of functions performed by the MTC-type terminal (e.g. collecting and reporting back data) do not require particularly complex processing to perform. However, third and fourth generation mobile telecommunication networks typically employ advanced data modulation techniques on the radio interface which can require more complex and expensive radio transceivers to implement. It is usually justified to include such complex transceivers

in a smartphone as a smartphone will typically require a powerful processor to perform typical smartphone type functions. However, as indicated above, there is now a desire to use relatively inexpensive and less complex devices to communicate using LTE type networks. 3GPP contributions R1-083193 and R1-083703 disclose extending a legacy LTE carrier to a broader LTE-A carrier while preserving a legacy LTE compatible portion.

10 SUMMARY OF THE INVENTION

[0006] The invention is defined by the claims. The following references to embodiments are to be understood as mere examples which are useful for understanding the invention. According to a first aspect of the present invention there is provided a network element for use in a mobile communications system and a method of using a network element for communicating data to and/or from mobile communications devices in a mobile communications system. The network element is operable to provide a wireless access interface for communicating data to and/or from the mobile communications devices, the wireless access interface providing on a downlink a host carrier, the host carrier providing a plurality of resource elements across a first frequency range; transmit data for a first group of mobile communications devices, wherein the data is distributed within the plurality of resource elements across the first frequency range; provide a virtual carrier via the wireless access interface, the virtual carrier providing one or more resource elements within a second frequency range which is within and smaller than the first frequency range; and transmit data for a second group of mobile communications devices via the virtual carrier.

[0007] In conventional mobile telecommunication networks, data is typically transmitted from the network to the mobile terminals in a frequency carrier (first frequency range) where at least part of the data spans substantially the whole of the bandwidth of the frequency carrier. Normally a mobile terminal cannot operate within the network unless it can receive and decode data spanning the entire frequency carrier and therefore the use of mobile terminals with reduced bandwidth capability transceiver units is precluded.

[0008] However, in accordance with this aspect of the invention, a subset of the resource elements comprising a conventional carrier (a "host carrier") are defined as within a "virtual carrier" are defined, where the host carrier has a certain bandwidth (first frequency range) and where the virtual carrier is within a conventional carrier ("host carrier") having a bandwidth (first frequency range) and has a reduced bandwidth (second frequency range) compared to the host carrier's bandwidth. Data for virtual carrier terminals is separately transmitted on the virtual carrier set of this subset of the resource elements.

[0009] Unlike data transmitted on a conventional downlink carrier, data transmitted on the virtual carrier can be received and decoded by a terminal without need-

ing to process the full bandwidth of the downlink host carrier. Accordingly, data transmitted on the virtual carrier can be received and decoded using a reduced complexity transceiver unit.

[0010] Devices provided with reduced complexity transceiver units (onwards referred to as "virtual carrier terminals") could be constructed to be less complex and less expensive than conventional LTE type devices (onwards referred to generally as LTE terminals.) but can still receive data using a conventional LTE type carrier. Accordingly, the deployment of such devices for MTC type applications within an LTE type network can become more attractive because the provision of the virtual carrier allows mobile terminals with less expensive and less complex transceiver units to be used.

[0011] Furthermore, in some examples, the virtual carrier inserted within the host carrier can be used to provide a logically distinct "network within a network". In other words data being transmitted via the virtual carrier can be treated as logically distinct from the data transmitted by the host carrier network. The virtual carrier can therefore be used to provide a so-called dedicated messaging network (DMN) which is "laid over" a conventional network and used to communicate messaging data to DMN devices (i.e. virtual carrier terminals).

[0012] In one embodiment of the invention, a plurality of virtual carriers may be inserted within a host carrier. In effect, the resources available to devices with a reduced capabilities transceiver unit may be increased by increasing the number of virtual carriers provided within a single host carrier.

[0013] In accordance with one embodiment of the invention, one or more resource elements comprise a virtual carrier signal for indicating that the wireless access interface provides one or more virtual carriers, for example, an indication of the location of a virtual carrier within the first frequency range and/or an indication of the bandwidth of a virtual carrier. In one example a mobile communications device having a receiver of the second type is operable to, upon detection of a virtual carrier signal, scan the first frequency range for a virtual carrier and/or configure its receiver to receive data transmitted in the virtual carrier frequency range. This facilitates the localization of a virtual carrier for terminals having a receiver of the second type (e.g. the reduced capability terminals). Various further aspects and embodiments of the invention are provided in the appended claims, including but not limited to, a network element for use in a mobile communications network and a method of using a network element for communicating data to and/or from mobile communications devices.

BRIEF DESCRIPTION OF DRAWINGS

[0014] Embodiments of the present invention will now be described by way of example only with reference to the accompanying drawings where like parts are provided with corresponding reference numerals and in which:

Figure 1 provides a schematic diagram illustrating an example of a conventional mobile telecommunication network;

Figure 2 provides a schematic diagram illustrating a conventional LTE downlink radio frame;

Figure 3 provides a schematic diagram illustrating a conventional LTE downlink radio sub-frame;

Figure 4 provides a schematic diagram illustrating a conventional LTE "camp-on" procedure;

Figure 5 provides a schematic diagram illustrating an LTE downlink radio sub-frame in which a virtual carrier has been inserted in accordance with an embodiment of the invention;

Figure 6 provides a schematic diagram illustrating an adapted LTE "camp-on" procedure for camping on to a virtual carrier;

Figure 7 provides a schematic diagram illustrating LTE downlink radio sub-frames in accordance with an embodiment of the present invention;

Figure 8 provides a schematic diagram illustrating a physical broadcast channel (PBCH);

Figure 9 provides a schematic diagram illustrating an LTE downlink radio sub-frame in accordance with an embodiment of the present invention;

Figure 10 provides a schematic diagram illustrating an LTE downlink radio sub-frames in which a virtual carrier has been inserted in accordance with an embodiment of the invention;

Figures 11A to 11D provide schematic diagrams illustrating positioning of location signals within a LTE downlink sub-frame according to embodiments of the present invention;

Figure 12 provides a schematic diagram illustrating a group of sub-frames in which two virtual carriers change location within a host carrier band according to an embodiment of the present invention;

Figures 13A to 13C provide schematic diagrams illustrating LTE uplink sub-frames in which an uplink virtual carrier has been inserted in accordance with an embodiment of the present invention, and

Figure 14 provides a schematic diagram showing part of an adapted LTE mobile telecommunication network arranged in accordance with an example of the present invention.

DESCRIPTION OF EXAMPLE EMBODIMENTS

Conventional Network

[0015] Figure 1 provides a schematic diagram illustrating the basic functionality of a conventional mobile telecommunications network.

[0016] The network includes a plurality of base stations 101 connected to a core network 102. Each base station provides a coverage area 103 (i.e. a cell) within which data can be communicated to and from mobile terminals 104. Data is transmitted from a base station 101 to a mobile terminal 104 within a coverage area 103 via a

radio downlink. Data is transmitted from a mobile terminal 104 to a base station 101 via a radio uplink. The core network 102 routes data to and from the mobile terminals 104 and provides functions such as authentication, mobility management, charging and so on.

[0017] Mobile telecommunications systems such as those arranged in accordance with the 3GPP defined Long Term Evolution (LTE) architecture use an orthogonal frequency division multiplex (OFDM) based interface for the radio downlink (so-called OFDMA) and the radio uplink (so-called SC-FDMA). Data is transmitted on the uplink and on the downlink on a plurality of orthogonal sub-carriers. Figure 2 shows a schematic diagram illustrating an OFDM based LTE downlink radio frame 201. The LTE downlink radio frame is transmitted from an LTE base station (known as an enhanced Node B) and lasts 10 ms. The downlink radio frame comprises ten sub-frames, each sub-frame lasting 1 ms. A primary synchronisation signal (PSS) and a secondary synchronisation signal (SSS) are transmitted in the first and sixth sub-frames of the LTE frame. A primary broadcast channel (PBCH) is transmitted in the first sub-frame of the LTE frame. The PSS, SSS and PBCH are discussed in more detail below.

[0018] Figure 3 provides a schematic diagram providing a grid which illustrates the structure of an example of a conventional downlink LTE sub-frame. The sub-frame comprises a predetermined number of symbols which are transmitted over a 1ms period. Each symbol comprises a predetermined number of orthogonal sub-carriers distributed across the bandwidth of the downlink radio carrier.

[0019] The example sub-frame shown in Figure 3 comprises 14 symbols and 1200 sub-carriers spaced across a 20MHz bandwidth. The smallest unit on which data can be transmitted in LTE is twelve sub-carriers transmitted over one sub-frame. For clarity, in Figure 3, each individual resource element is not shown, instead each individual box in the sub-frame grid corresponds to twelve sub-carriers transmitted on one symbol.

[0020] Figure 3 shows resource allocations for four LTE terminals 340, 341, 342, 343. For example, the resource allocation 342 for a first LTE terminal (UE 1) extends over five blocks of twelve sub-carriers, the resource allocation 343 for a second LTE terminal (UE2) extends over six blocks of twelve sub-carriers and so on.

[0021] Control channel data is transmitted in a control region 300 of the sub-frame comprising the first n symbols of the sub-frame where n can vary between one and three symbols for channel bandwidths of 3MHz or greater and where n can vary between two and four symbols for channel bandwidths of 1.4MHz. For clarity, the following description relates to host carriers with channel bandwidth of 3MHz or greater where the maximum value of n will be 3. The data transmitted in the control region 300 includes data transmitted on the physical downlink control channel (PDCCH), the physical control format indicator channel (PCFICH) and the physical HARQ indicator

channel (PHICH).

[0022] The PDCCH contains control data indicating which sub-carriers on which symbols of the sub-frame have been allocated to specific LTE terminals. Thus, the PDCCH data transmitted in the control region 300 of the sub-frame shown in Figure 3 would indicate that UE1 has been allocated the first block of resources 342, that UE2 has been allocated the second block of resources 343, and so on. The PCFICH contains control data indicating the size of the control region (i.e. between one and three symbols) and the PHICH contains HARQ (Hybrid Automatic Request) data indicating whether or not previously transmitted uplink data has been successfully received by the network.

[0023] In certain sub-frames, symbols in a central band 310 of the sub-frame are used for the transmission of information including the primary synchronisation signal (PSS), the secondary synchronisation signal (SSS) and the physical broadcast channel (PBCH). This central band 310 is typically 72 sub-carriers wide (corresponding to a transmission bandwidth of 1.08 MHz). The PSS and SSS are synchronisation signals that once detected allow the LTE terminal 104 to achieve frame synchronisation and determine the cell identity of the enhanced Node B transmitting the downlink signal. The PBCH carries information about the cell, comprising a master information block (MIB) that includes parameters that the LTE terminals require to access the cell. Data transmitted to individual LTE terminals on the physical downlink shared channel (PDSCH) can be transmitted in the remaining blocks of resource elements of the sub-frame. Further explanation of these channels is provided in the following sections.

[0024] Figure 3 also shows a region of PDSCH containing system information and extending over a bandwidth of R_{344} .

[0025] The number of sub-carriers in an LTE channel can vary depending on the configuration of the transmission network. Typically this variation is from 72 sub-carriers contained within a 1.4MHz channel bandwidth to 1200 sub-carriers contained within a 20MHz channel bandwidth as shown in Figure 3. As is known in the art, data transmitted on the PDCCH, PCFICH and PHICH is typically distributed on the sub-carriers across the entire bandwidth of the sub-frame. Therefore a conventional LTE terminal must be able to receive the entire bandwidth of the sub-frame in order to receive and decode the control region.

Conventional Camp on Procedure

[0026] Figure 4 illustrates an LTE "camp-on" process, that is the process followed by a terminal so that it can decode downlink transmissions which are sent by a base station via a downlink channel on a carrier band. Using this process, the terminal can identify the parts of the transmissions that include system information for the cell and thus decode configuration information for the cell.

[0027] As can be seen in Figure 4, in a conventional LTE camp-on procedure, the terminal first synchronizes with the base station (step 400) using the PSS and SSS in the centre band 310 of the carrier as mentioned above. As can be seen with reference to Figure 3 the centre band 310 has a bandwidth range R_{310} , where the band is at the centre of the carrier (i.e. occupying the central sub-carriers).

[0028] The terminal detects this centre band and detects the PSS and SSS which indicate the cyclic prefix duration and the Cell ID. In LTE the PSS and SSS are only transmitted in the first and sixth sub-frames of each radio frame. Of course, in a different system, for example a non-LTE system, the band 310 may not be at the centre of the carrier band and may be wider or narrower than 72 sub-carriers or 1.08 MHz. Likewise, the sub-frames may be of a different size or sizes.

[0029] The terminal then decodes the PBCH (step 401), also carried on the centre band 310, where the PBCH includes in particular the Master Information Block (MIB). The MIB indicates in particular the bandwidth R_{320} of the downlink carrier, the System Frame Number (SFN), and the PHICH configuration. Using the MIB carried on the PBCH, the terminal can then be made aware of the bandwidth R_{320} of the carrier. Because the terminal also knows where the central band 310 is, it knows the exact range R_{320} of the downlink carrier.

[0030] For each sub-frame, the terminal then decodes the PCFICH which is distributed across the entire width of carrier 320 (step 402). As discussed above, an LTE downlink carrier can be up to 20 MHz wide (1200 sub-carriers) and an LTE terminal therefore has to have the capability to receive and decode transmissions on a 20 MHz bandwidth in order to decode the PCFICH. At that stage, with a 20MHz carrier band, the terminal operates at a much larger bandwidth (bandwidth of R_{320}) than during steps 400 and 401 (bandwidth of R_{310}) relating to synchronization and PBCH decoding.

[0031] The terminal then ascertains the PHICH locations (step 403) and decodes the PDCCH (step 404), in particular for identifying system information transmissions and for identifying its personal allocation grants. The allocation grants are used by the terminal to locate system information and to locate its data in the PDSCH. Both system information and personal allocations are transmitted on PDSCH and scheduled within the carrier band 320. Steps 403 and 404 also require the terminal to operate on the entire bandwidth R_{320} of the carrier band.

[0032] At steps 402 to 404, the terminal decodes information contained in the control region 300 of a sub-frame. As explained above, in LTE, the three control channels mentioned above (PCFICH, PHICH and PDCCH) can be found across the control region 300 of the carrier where the control regions extends over the range R_{320} and occupies the first one, two or three OFDM symbols of each sub-frame as discussed above. In a sub-frame, typically the control channels do not use all the resource elements

within the control region 300, but they are scattered across the entire region, such that a LTE terminal has to be able to simultaneously receive the entire control region 300 for decoding each of the three control channels.

[0033] The terminal can then decode the PDSCH (step 405) which contains system information or data transmitted for this terminal.

[0034] As explained above, in an LTE sub-frame the PDSCH generally occupies groups of resource elements which are neither in the control region nor in the resource elements occupied by PSS, SSS or PBCH. The data in the blocks of resource elements 340, 341, 342, 343 shown in Figure 3 have a smaller bandwidth than the bandwidth of the entire carrier although to decode these blocks, a terminal first receives the PDCCH across the frequency range R_{320} and if the PDCCH indicates that a PDSCH resource should be decoded, once it has received the entire sub-frame, it then decodes only the PDSCH in only the relevant frequency range indicated by the PDCCH. So for example, UE 1 discussed above decodes the whole control region 300 and then the data in the resource block 342.

Virtual Downlink Carrier

[0035] Certain classes of devices, such as MTC devices (e.g. semi-autonomous or autonomous wireless communication devices such as smart meters as discussed above), support communication applications that are characterised by the transmission of small amounts of data at relatively infrequent intervals and can thus be considerably less complex than conventional LTE terminals. In many scenarios, providing low capability terminals such as those with a conventional high-performance LTE receiver unit capable of receiving and processing data from an LTE downlink frame across the full carrier bandwidth can be overly complex for a device which only needs to communicate small amounts of data. This may therefore limit the practicality of a widespread deployment of low capability MTC type devices in an LTE network. It is preferable instead to provide low capability terminals such as MTC devices with a simpler receiver unit which is more proportionate with the amount of data likely to be transmitted to the terminal. As set out below, in accordance with examples of the present invention a "virtual carrier" is inserted in a conventional OFDM type downlink carrier (i.e. a "host carrier"). Unlike data transmitted on a conventional OFDM type downlink carrier, data transmitted on the virtual carrier can be received and decoded without needing to process the full bandwidth of the downlink host OFDM carrier. Accordingly, data transmitted on the virtual carrier can be received and decoded using a reduced complexity receiver unit.

[0036] Figure 5 provides a schematic diagram illustrating an LTE downlink sub-frame which includes a virtual carrier inserted in a host carrier in accordance with an example of the present invention.

[0037] In keeping with a conventional LTE downlink

sub-frame, the first n symbols (n is three in Figure 5) form the control region 300 which is reserved for the transmission of downlink control data such as data transmitted on the PDCCH. However, as can be seen from Figure 5, outside of the control region 300 the LTE downlink sub-frame includes a group of resource elements below the central band 310 which form a virtual carrier 501. As will become clear, the virtual carrier 501 is adapted so that data transmitted on the virtual carrier 501 can be treated as logically distinct from the data transmitted in the remaining parts of the host carrier and can be decoded without first decoding all the control data from the control region 300. Although Figure 5 shows the virtual carrier occupying frequency resources below the centre band, in general the virtual carrier can alternatively either occupy frequency resources above the centre band or frequency resources including the centre band. If the virtual carrier is configured to overlap any resources used by the PSS, SSS or PBCH of the host carrier, or any other signal transmitted by the host carrier that a mobile terminal operating on the host carrier would require for correct operation and expect to find in a known pre-determined location, the signals on the virtual carrier can be arranged such that these aspects of the host carrier signal are maintained.

[0038] As can be seen from Figure 5, data transmitted on the virtual carrier 501 is transmitted across a limited bandwidth. This could be any suitable bandwidth providing it is smaller than that of the host carrier. In the example shown in Figure 5 the virtual carrier is transmitted across a bandwidth comprising 12 blocks of 12 sub-carriers (i.e. 144 sub-carriers) which is equivalent to a 2.16MHz transmission bandwidth. Accordingly, a terminal receiving data transmitted on the virtual carrier need only be equipped with a receiver capable of receiving and processing data transmitted over a bandwidth of 2.16MHz. This enables low capability terminals (for example MTC type terminals) to be provided with simplified receiver units yet still be able to operate within an OFDM type communication network which, as explained above, conventionally requires terminals to be equipped with receivers capable of receiving and processing an OFDM signal across the entire bandwidth of the signal.

[0039] As explained above, in OFDM based mobile communication systems such as LTE, downlink data is dynamically assigned to be transmitted on different sub-carriers on a sub-frame by sub-frame basis. Accordingly, in every sub-frame the network must signal which sub-carriers on which symbols contain data relevant to which terminals (i.e. downlink grant signalling).

[0040] As can be seen from Figure 3, in a conventional downlink LTE sub-frame this information is transmitted on the PDCCH during the first symbol or symbols of the sub-frame. However, as previously explained, the information transmitted in the PDCCH is spread across the entire bandwidth of the sub-frame and therefore cannot be received by a mobile communication terminal with a simplified receiver unit capable only of receiving the re-

duced bandwidth virtual carrier.

[0041] Accordingly, as can be seen in Figure 5, the final symbols of the virtual carrier can be reserved as a virtual carrier control region 502 which is allocated for the transmission of control data indicating which resource elements of the virtual carrier 501 have been allocated. In some examples the number of symbols comprising the virtual carrier control region 502 is fixed for example three symbols. In other examples the virtual carrier control region 502 can vary in size, for example between one and three symbols.

[0042] The virtual carrier control region can be located at any suitable position within the virtual carrier for example in the first few symbols of the virtual carrier. In the example of Figure 5 this could mean positioning the virtual carrier control region on the fourth, fifth and sixth symbols. However, fixing the position of the virtual carrier control region in the final symbols of the sub-frame can provide an advantage because the position of the virtual carrier control region need not vary even if the number of symbols of the host carrier control region varies. This simplifies the processing undertaken by mobile communication terminals receiving data on the virtual carrier because there is no need for them to determine the position of the virtual carrier control region every sub-frame as it is known that it will always be positioned in the final symbols of the sub-frame.

[0043] In a further embodiment, the virtual carrier control symbols may reference virtual carrier PDSCH transmissions in a separate sub-frame.

[0044] In some examples the virtual carrier may be located within the centre band 310 of the downlink sub-frame. This would minimise the reduction in host carrier PDSCH resources caused by the insertion of a virtual carrier since the resources occupied by the PSS/SSS and PBCH would be contained within the virtual carrier region and not the host carrier PDSCH region. Therefore, depending on for example the expected virtual carrier throughput, the location of a virtual carrier can be appropriately chosen to either exist inside or outside the centre band according to whether the host or virtual carrier is chosen to bear the overhead of the PSS, SSS and PBCH.

Virtual Carrier "Camp-On" Process

[0045] As explained above, before a conventional LTE terminal can begin transmitting and receiving data in a cell, it must first camp on to the cell. An adapted camp-on process must also be provided before terminals can receive data on the virtual carrier.

[0046] Figure 6 shows a flow diagram illustrating a camp-on process according to an example of the present invention. The virtual carrier camp-on process is explained with reference to the sub-frame shown in Figure 5 in which a virtual carrier with a bandwidth of 144 sub-carriers is inserted in a host carrier with a bandwidth of 1200 sub-carriers. As discussed above, a terminal having

a receiver unit with an operational bandwidth of less than that of the host carrier cannot decode data in the control region of sub-frames of the host carrier. However, providing the receiver unit of a terminal has an operational bandwidth of at least twelve blocks of twelve sub-carriers (i.e. 2.16 MHz) then it can receive data transmitted on the example virtual carrier 502.

[0047] In the example of Figure 6, the first steps 400 and 401 are the same as the conventional camp-on process shown in Figure 4, although a virtual carrier terminal may extract additional information from the MIB as described below. Both terminals can use the PSS/SSS and PBCH to synchronize with the base station using the information carried on the 72 sub-carrier centre band within the host carrier. However, where the conventional LTE terminals then continue with the process by performing the PCFICH decoding step 402, which requires a receiver unit capable of receiving and decoding the host carrier control region 300, a terminal camping on to the cell to receive data on the virtual carrier (referred to from now on as a "virtual carrier terminal") performs steps 606 and 607 instead.

[0048] In a further embodiment of the present invention a separate synchronisation and PBCH functionality can be provided for the virtual carrier device as opposed to re-using the same conventional initial camp-on processes of steps 400 and 401 of the host carrier device.

[0049] At step 606, the virtual carrier terminal locates a virtual carrier, if any is provided within the host carrier, using a virtual carrier-specific step. Various possible embodiments of this step are discussed further below. Once the virtual carrier terminal has located a virtual carrier, it can access information within the virtual carrier. For example, if the virtual carrier mirrors the conventional LTE resource allocation method, the virtual carrier terminal may then decode control portions within the virtual carrier, which can for example indicate which resource elements within the virtual carrier have been allocated for a specific virtual carrier terminal or for system information. For example, Figure 7 shows the blocks of resource elements 350 to 352 within virtual carrier 330 that have been allocated for the sub-frame SF2. However, there is no requirement for the virtual carrier terminal to follow or mirror the conventional LTE process (e.g. steps 402-404) and these steps may for example be implemented very differently for a virtual carrier camp-on process.

[0050] Regardless of the virtual carrier terminal following a LTE-like step or a different type of step when performing step 607, the virtual carrier terminal can then decode the allocated resource elements at step 608 and thereby receive data transmitted by the base station. The data decoded in step 608 will include the remainder of the system information containing details of the network configuration.

[0051] Even though the virtual carrier terminal does not have the bandwidth capabilities to decode and receive downlink data if it was transmitted in the host carrier using conventional LTE, it can still access a virtual carrier

within the host carrier having a limited bandwidth whilst re-using the initial LTE steps. Step 608 may also be implemented in a LTE-like manner or in a different manner. For example, the virtual carrier terminals may share a virtual carrier and have grants allocated to manage the virtual carrier sharing as shown in SF2 in Figure 7, or, in another example, a virtual carrier terminal may have the entire virtual carrier allocated for its own downlink transmissions, or the virtual carrier may be entirely allocated to a virtual carrier terminal for a certain number of sub-frame only, etc.

[0052] There is therefore a degree of flexibility provided for this virtual carrier camp-on process. There is for example given the choice to adjust the balance between re-using or mirroring conventional LTE steps or processes, thereby reducing the terminal complexity and the need to implement new elements, and adding new virtual carrier specific aspects or implementations, thereby potentially optimizing the use of narrow-band virtual carriers, as LTE has been designed with the larger-band host carriers in mind.

Downlink Virtual Carrier Detection

[0053] As discussed above, the virtual carrier terminal has to locate the virtual carrier before it can receive and decode the virtual carrier transmissions. Several options are available for the virtual carrier presence and location determination, which can be implemented separately or in combination. Some of these options are discussed below.

[0054] To facilitate the virtual carrier detection, the virtual carrier location information may be provided to the virtual carrier terminal such that it can locate the virtual carrier, if any exists, more easily. For example, such location information may comprise an indication that one or more virtual carriers are provided within the host carrier or that the host carrier does not currently provide any virtual carrier. It may also comprise an indication of the virtual carrier's bandwidth, for example in MHz or blocks of resource elements. Alternatively, or in combination, the virtual carrier location information may comprise the virtual carrier's centre frequency and bandwidth, thereby giving the virtual carrier terminal the exact location and bandwidth of any active virtual carrier. In the event that the virtual carrier is to be found at a different frequency position in each sub-frame, according for example to a pseudo-random hopping algorithm, the location information can for example indicate a pseudo random parameter. Such parameters may include a starting frame and parameters used for the pseudo-random algorithm. Using these pseudo-random parameters, the virtual carrier terminal can then know where the virtual carrier can be found for any sub-frame.

[0055] An advantageous implementation which would require little change to the virtual carrier terminal (compared with a conventional LTE terminal) is to include this location information in the PBCH, which already carries

the Master Information Block, or MIB in the host carrier centre band. As shown in Figure 8, the MIB consists of 24 bits (3 bits to indicate DL bandwidth, 8 bits to indicate the System Frame Number or SFN, and 3 bits regarding the PHICH configuration). The MIB therefore comprises 10 spare bits that can be used to carry location information in respect of one or more virtual carriers. For example, Figure 9 shows an example where the PBCH includes the MIB and location information ("LI") for pointing any virtual carrier terminal to a virtual carrier.

[0056] Alternatively, this Location Information can be provided for example in the centre band, outside of the PBCH. It can for example be always provided after and adjacent to the PBCH. By providing the Location Information in the centre band but outside of the PBCH, the conventional PBCH is not modified for the purpose of using virtual carriers, but a virtual carrier terminal will easily find the location information in order to detect the virtual carrier, if any.

[0057] The virtual carrier location information, if provided, can be provided elsewhere in the host carrier, but it is advantageous to provide it in the centre band because the virtual carrier terminal will preferentially configure its receiver to operate on the centre band and the virtual carrier terminal then does not need to adjust its receiver settings for finding the location information.

[0058] Depending on the amount of virtual carrier location information provided, the virtual carrier terminal can either adjust its receiver to receive the virtual carrier transmissions, or it may require further location information before it can do so.

[0059] If for example, the virtual carrier terminal was provided with location information indicating a virtual carrier presence and/or a virtual carrier bandwidth but not indicating any details as to the exact virtual carrier frequency range, or if the virtual carrier terminal was not provided with any location information, the virtual carrier terminal can then scan the host carrier for a virtual carrier (e.g. performing a so-called blind search process). Scanning the host carrier for a virtual carrier can be based on different approaches, some of which will be presented below.

[0060] According to a first approach, the virtual carrier can only be inserted in certain pre-determined locations, as illustrated for example in Figure 10 for a four-location example. The virtual carrier terminal then scans the four locations L1-L4 for any virtual carrier. If and when the virtual carrier terminal detects a virtual carrier, it can then "camp-on" the virtual carrier to receive downlink data. In this approach, the virtual carrier terminal has to know the possible virtual carrier locations in advance, for example by reading an internal memory. Detection of a virtual carrier could be accomplished by trying to decode a known physical channel on the virtual carrier. The successful decoding of such a channel, indicated for example by a successful cyclic redundancy check (CRC) on decoded data, would indicate the successful location of a virtual carrier

[0061] According to a second approach, the virtual carrier may include location signals such that a virtual carrier terminal scanning the host carrier can detect such signals to identify the presence of a virtual carrier. Examples of possible location signals are illustrated in Figures 11A to 11D. In the examples of Figures 11A to 11C, the virtual carrier regularly sends an arbitrary location signal such that a terminal scanning a frequency range where the location signal is would detect this signal. An "arbitrary" signal is meant to include any signal that does not carry any information as such, or is not meant to be interpreted, but merely includes a specific signal or pattern that a virtual carrier terminal can detect. This can for example be a series of positive bits across the entire location signal, an alternation of 0 and 1 across the location signal, or any other suitable arbitrary signal. It is noteworthy that the location signal may be made of adjacent blocks of resource elements or may be formed of non adjacent blocks. For example, it may be located at every other block of resource elements at the top of the virtual carrier.

[0062] In the example of Figure 11A, the location signal 353 extends across the range R_{330} of the virtual carrier 330 and is always found at the same position in the virtual carrier within a sub-frame. If the virtual carrier terminal knows where to look for a location signal in a virtual carrier sub-frame, it can then simplify its scanning process by only scanning this position within a sub-frame for a location signal. Figure 11B shows a similar example where every sub-frame includes a location signal 354 comprising two parts: one at the top corner and one at the bottom corner of the virtual carrier sub-frame, at the end of this sub-frame. Such a location signal may become useful if for example the virtual carrier terminal does not know the bandwidth of the virtual carrier in advance as it can facilitate a clear detection of the top and bottom edges of the virtual carrier band.

[0063] In the example of Figure 11C, a location signal 355 is provided in a first sub-frame SF1, but not in a second sub-frame SF2. The location signal can for example be provided every two sub-frames. The frequency of the location signals can be chosen to adjust a balance between reducing scanning time and reducing overhead. In other words, the more often the location signal is provided, the less long it takes a terminal to detect a virtual carrier but the more overhead there is.

[0064] In the example of Figure 11D, a location signal is provided where this location signal is not an arbitrary signal as in Figures 11A to 11C, but is a signal that includes information for virtual carrier terminals. The virtual carrier terminals can detect this signal when they scan for a virtual carrier and the signal may include information in respect of, for example, the virtual carrier bandwidth or any other virtual carrier-related information (location or non-location information). When detecting this signal, the virtual carrier terminal can thereby detect the presence and location of the virtual carrier. As shown in Figure 11D, the location signal can, like an arbitrary location signal, be found at different locations within the sub-

frame, and the location may vary on a per-sub-frame basis.

Dynamic Variation of Control Region Size of Host Carrier

[0065] As explained above, in LTE the number of symbols that make up the control region of a downlink sub-frame varies dynamically depending on the quantity of control data that needs to be transmitted. Typically, this variation is between one and three symbols. As will be understood with reference to Figure 5, variation in the width of the host carrier control region will cause a corresponding variance in the number of symbols available for the virtual carrier. For example, as can be seen in Figure 5, when the control region is three symbols in length and there are 14 symbols in the sub-frame, the virtual carrier is eleven symbols long. However, if in the next sub-frame the control region of the host carrier were reduced to one symbol, there would be thirteen symbols available for the virtual carrier in that sub-frame.

[0066] When a virtual carrier is inserted into a LTE host carrier, mobile communication terminals receiving data on the virtual carrier need to be able to determine the number of symbols in the control region of each host carrier sub-frame to determine the number of symbols in the virtual carrier in that sub-frame if they are to be able to use all available symbols that are not used by the host carrier control region.

[0067] Conventionally, the number of symbols forming the control region is signalled in the first symbol of every sub-frame in the PCFICH. However, the PCFICH is typically distributed across the entire bandwidth of the downlink LTE sub-frame and is therefore transmitted on sub-carriers which virtual carrier terminals capable only of receiving the virtual carrier cannot receive. Accordingly, in one embodiment, any symbols across which the control region could possibly extend are predefined as null symbols on the virtual carrier, i.e. the length of the virtual sub-carrier is set at $(m - n)$ symbols, where m is the total number of symbols in a sub-frame and n is the maximum number of symbols of the control region. Thus, resource elements are never allocated for downlink data transmission on the virtual carrier during the first n symbols of any given sub-frame.

[0068] Although this embodiment is simple to implement it will be spectrally inefficient because during sub-frames when the control region of the host carrier has fewer than the maximum number of symbols, there will be unused symbols in the virtual carrier.

[0069] In another embodiment, the number of symbols in the control region of the host carrier is explicitly signalled in the virtual carrier itself. Once the number of symbols in the control region of the host carrier is known, the number of symbols in the virtual carrier can be calculated by subtracting the total number of symbols in the sub-frame from this number.

[0070] In one example an explicit indication of the host carrier control region size is given by certain information

bits in the virtual carrier control region. In other words an explicit signalling message is inserted at a predefined position in the virtual carrier control region 502. This predefined position is known by each terminal adapted to receive data on the virtual carrier.

[0071] In another example, the virtual carrier includes a predefined signal, the location of which indicates the number of symbols in the control region of the host carriers. For example, a predefined signal could be transmitted on one of three predetermined blocks of resource elements. When a terminal receives the sub-frame it scans for the predefined signal. If the predefined signal is found in the first block of resource elements this indicates that the control region of the host carrier comprises one symbol; if the predefined signal is found in the second block of resource elements this indicates that the control region of the host carrier comprises two symbols and if the predefined signal is found in the third block of resource elements this indicates that the control region of the host carrier comprises three symbols.

[0072] In another example, the virtual carrier terminal is arranged to first attempt to decode the virtual carrier assuming that the control region size of the host carrier is one symbol. If this is not successful, the virtual carrier terminal attempts to decode the virtual carrier assuming that the control region size of the host carrier is two and so on, until the virtual carrier terminal successfully decodes the virtual carrier.

Downlink Virtual Carrier Reference Signals

[0073] As is known in the art, in OFDM based transmission systems such as LTE a number of sub-carriers in each symbol are typically reserved for the transmission of reference signals. The reference signals are transmitted on sub-carriers distributed throughout a sub-frame across the channel bandwidth and across the OFDM symbols. The reference signals are arranged in a repeating pattern and can thus be used by a receiver, employing extrapolation and interpolation techniques to estimate the channel function applied to the data transmitted on each sub-carrier. These reference signals are also typically used for additional purposes such as determining metrics for received signal power indications, automatic frequency control metrics and automatic gain control metrics. In LTE the positions of the reference signal bearing sub-carriers within each sub-frame are pre-defined and are therefore known at the receiver of each terminal.

[0074] In LTE downlink sub-frames, reference signals from each transmit antenna port are typically inserted on every sixth sub-carrier. Accordingly, if a virtual carrier is inserted in an LTE downlink sub-frame, even if the virtual carrier has a minimum bandwidth of one resource block (i.e. twelve sub-carriers) the virtual carrier will include at least some reference signal bearing sub-carriers.

[0075] There are sufficient reference signal bearing sub-carriers provided in each sub-frame such that a receiver need not accurately receive every single reference

signal to decode the data transmitted on the sub-frame. However, as will be understood the more reference signals that are received, the better a receiver will be able to estimate the channel response and hence fewer errors are typically introduced into the data decoded from the sub-frame. Accordingly, in order to preserve compatibility with LTE communication terminals receiving data on the host carrier, in some examples of the present invention, the sub-carrier positions that would contain reference signals in a conventional LTE sub-frame are retained in the virtual carrier.

[0076] As will be understood, in accordance with examples of the present invention, terminals arranged to receive only the virtual carrier receive a reduced number of sub-carriers compared to conventional LTE terminals which receive each sub-frame across the entire bandwidth of the sub-frame. As a result, the reduced capability terminals receive fewer reference signals over a narrower range of frequencies which may result in a less accurate channel estimation being generated.

[0077] In some examples a simplified virtual carrier terminal may have a lower mobility which requires fewer reference symbols to support channel estimation. However, in some examples of the present invention the downlink virtual carrier includes additional reference signal bearing sub-carriers to enhance the accuracy of the channel estimation that the reduced capability terminals can generate.

[0078] In some examples the positions of the additional reference bearing sub-carriers are such that they are systematically interspersed with respect to the positions of the conventional reference signal bearing sub-carriers thereby increasing the sampling frequency of the channel estimation when combined with the reference signals from the existing reference signal bearing sub-carriers. This allows an improved channel estimation of the channel to be generated by the reduced capability terminals across the bandwidth of the virtual carrier. In other examples, the positions of the additional reference bearing sub-carriers are such that they are systematically placed at the edge of the bandwidth of the virtual carrier thereby increasing the interpolation accuracy of the virtual carrier channel estimates.

Alternative Virtual Carrier Arrangements

[0079] So far examples of the invention have been described generally in terms of a host carrier in which a single virtual carrier has been inserted as shown for example in Figure 5. However, in some examples a host carrier may include more than one virtual carrier as shown for example in Figure 12. Figure 12 shows an example in which two virtual carriers VC1 (330) and VC2 (331) are provided within a host carrier 320. In this example, the two virtual carriers change location within the host carrier band according to a pseudo-random algorithm. However, in other examples, one or both of the two virtual carriers may always be found in the same

frequency range within the host carrier frequency range and/or may change position according to a different mechanism. In LTE, the number of virtual carriers within a host carrier is only limited by the size of the host carrier. However, too many virtual carriers within the host carrier may unduly limit the bandwidth available for transmitting data to conventional LTE terminals and an operator may therefore decide on a number of virtual carrier within a host carrier according to, for example, a ratio of conventional LTE users / virtual carrier users.

[0080] In some examples the number of active virtual carriers can be dynamically adjusted such that it fits the current needs of conventional LTE terminals and virtual carrier terminals. For example, if no virtual carrier terminal is connected or if their access is to be intentionally limited, the network can arrange to begin scheduling the transmission of data to LTE terminals within the sub-carriers previously reserved for the virtual carrier. This process can be reversed if the number of active virtual carrier terminals begins to increase. In some examples the number of virtual carriers provided may be increased in response to an increase in the presence of virtual carrier terminals. For example if the number of virtual terminals present in a network or area of a network exceeds a threshold value, an additional virtual carrier is inserted in the host carrier. The network elements and/or network operator can thus activate or deactivate the virtual carriers whenever appropriate.

[0081] The virtual carrier shown for example in Figure 5 is 144 sub-carriers in bandwidth. However, in other examples a virtual carrier may be of any size between twelve sub-carriers to 1188 sub-carriers (for a carrier with a 1200 sub-carrier transmission bandwidth). Because in LTE the centre band has a bandwidth of 72 sub-carriers, a virtual carrier terminal in an LTE environment preferentially has a receiver bandwidth of at least 72 sub-carriers (1.08 MHz) such that it can decode the centre band 310, therefore a 72 sub-carrier virtual carrier may provide a convenient implementation option. With a virtual carrier comprising 72 sub-carriers, the virtual carrier terminal does not have to adjust the receiver's bandwidth for camping on the virtual carrier which may therefore reduce complexity of performing the camp-on process, but there is no requirement to have the same bandwidth for the virtual carrier as for the centre band and, as explained above, a virtual carrier based on LTE can be of any size between 12 to 1188 sub-carriers. For example, in some systems, a virtual carrier having a bandwidth of less than 72 sub-carriers may be considered as a waste of the virtual carrier terminal's receiver resources, but from another point of view, it may be considered as reducing the impact of the virtual carrier on the host carrier by increasing the bandwidth available to conventional LTE terminals. The bandwidth of a virtual carrier can therefore be adjusted to achieve the desired balance between complexity, resource utilization, host carrier performance and requirements for virtual carrier terminals.

Uplink Transmission Frame

[0082] So far, the virtual carrier has been discussed with reference to the downlink, however in some examples a virtual carrier can also be inserted in the uplink.

[0083] In mobile communications systems such as LTE, the frame structure and sub-carrier spacing employed in the uplink correspond to that used in the downlink (as shown for example in Figure 2). In frequency division duplex (FDD) networks both the uplink and downlink are active in all sub-frames, whereas in time division duplex (TDD) networks sub-frames can either be assigned to the uplink, to the downlink, or further sub-divided into uplink and downlink portions.

[0084] In order to initiate a connection to a network, conventional LTE terminals make a random access request on the physical random access channel (PRACH). The PRACH is located in predetermined blocks of resource elements in the uplink frame, the positions of which are signaled to the LTE terminals in the system information signaled on the downlink.

[0085] Additionally, when there is pending uplink data to be transmitted from an LTE terminal and the terminal does not already have any uplink resources allocated to it, it can transmit a random access request PRACH to the base station. A decision is then made at the base station as to which if any uplink blocks of resource elements are to be allocated to the mobile terminal that has made the request. Uplink resource block allocations are then signaled to the LTE terminal on the physical downlink control channel (PDCCH) transmitted in the control region of the downlink sub-frame.

[0086] In LTE, transmissions from each mobile terminal are constrained to occupy a set of contiguous resource blocks. For the physical uplink shared channel (PUSCH) the uplink resource allocation grant received from the base station will indicate which set of resource blocks to use for that transmission, where these resource blocks could be located anywhere within the channel bandwidth.

[0087] The first resources used by the LTE physical uplink control channel (PUCCH) are located at both the upper and lower edge of the channel, where each PUCCH transmission occupies one resource block. In the first half of a sub-frame this resource block is located at one channel edge, and in the second half of a sub-frame this resource block is located at the opposite channel edge. As more PUCCH resources are required, additional resource blocks are assigned in a sequential manner, moving inward from the channel edges. Since PUCCH signals are code division multiplexed, an LTE uplink can accommodate multiple PUCCH transmissions in the same resource block.

Virtual Uplink Carrier

[0088] In accordance with embodiments of the present invention, the virtual carrier terminals described above

can also be provided with a reduced capability transmitter for transmitting uplink data. The virtual carrier terminals are arranged to transmit data across a reduced bandwidth. The provision of a reduced capability transmitter unit provides corresponding advantages to those achieved by providing a reduced capability receiver unit with, for example, classes of devices that are manufactured with a reduced capability for use with, for example, MTC type applications.

[0089] In correspondence with the downlink virtual carrier, the virtual carrier terminals transmit uplink data across a reduced range of sub-carriers within a host carrier that has a greater bandwidth than that of the reduced bandwidth virtual carrier. This is shown in Figure 13a. As can be seen from Figure 13a, a group of sub-carriers in an uplink sub-frame form a virtual carrier 1301 within a host carrier 1302. Accordingly, the reduced bandwidth across which the virtual carrier terminals transmit uplink data can be considered a virtual uplink carrier.

[0090] In order to implement the virtual uplink carrier, the base station scheduler serving a virtual carrier ensures that all uplink resource elements granted to virtual carrier terminals are sub-carriers that fall within the reduced bandwidth range of the reduced capability transmitter units of the virtual carrier terminals. Correspondingly, the base station scheduler serving the host carrier typically ensures that all uplink resource elements granted to host carrier terminals are sub-carriers that fall outside the set of sub-carriers occupied by the virtual carrier terminals. However, if the schedulers for the virtual carrier and the host carrier are implemented jointly, or have means to share information, then the scheduler of the host carrier can assign resource elements from within the virtual carrier region to mobile terminals on the host carrier during sub-frames when the virtual carrier scheduler indicates that some or all of the virtual carrier resources will not be used by mobile terminals on the virtual carrier.

[0091] If a virtual carrier uplink incorporates a physical channel that follows a similar structure and method of operation to the LTE PUCCH, where resources for that physical channel are expected to be at the channel edges, for virtual carrier terminals these resources would preferentially be at the edges of the virtual carrier and not at the edges of the host carrier. This is advantageous since it would ensure that virtual carrier uplink transmissions remain within the reduced virtual carrier bandwidth.

Virtual Uplink Carrier Random Access

[0092] In accordance with conventional LTE techniques, it cannot be guaranteed that the PRACH will be within the sub-carriers allocated to the virtual carrier. In some embodiments therefore, the base station provides a secondary PRACH within the virtual uplink carrier, the location of which can be signaled to the virtual carrier terminals via system information on the virtual carrier. This is shown for example in Figure 13b in which a

PRACH 1303 is located within the virtual carrier 1301. Thus, the virtual carrier terminals send PRACH requests on the virtual carrier PRACH within the virtual uplink carrier. The position of the PRACH can be signaled to the virtual carrier terminals in a virtual carrier downlink signaling channel, for example in system information on the virtual carrier.

[0093] However, in other examples, the virtual carrier PRACH 1303 is situated outside of the virtual carrier as shown for example in Figure 13c. This leaves more room within the virtual uplink carrier for the transmission of data by the virtual carrier terminals. The position of the virtual carrier PRACH is signaled to the virtual carrier terminals as before but in order to transmit a random access request, the virtual carrier terminals re-tune their transmitter units to the virtual carrier PRACH frequency because it is outside of the virtual carrier. The transmitter units are then re-tuned to the virtual carrier frequency when uplink resource elements have been allocated.

[0094] In some examples where the virtual carrier terminals are capable of transmitting on a PRACH outside of the virtual carrier, the position of the host carrier PRACH can be signaled to the virtual carrier terminals. The virtual carrier terminals can then simply use the conventional host carrier PRACH resource to send random access requests. This approach is advantageous as fewer PRACH resources have to be allocated.

[0095] However, if the base station is receiving random access requests from both conventional LTE terminals and virtual carrier terminals on the same PRACH resource, it is necessary that the base station is provided with a mechanism for distinguishing between random access requests from conventional LTE terminals and random access requests from virtual carrier terminals.

[0096] Therefore, in some examples a time division allocation is implemented at the base station whereby, for example, over a first set of sub-frames the PRACH allocation is available to the virtual carrier terminals and over a second set of sub-frames the PRACH allocation is available to conventional LTE terminals. Accordingly, the base station can determine that random access requests received during the first set of sub-frames originate from virtual carrier terminals and random access requests received during the second set of sub-frames originate from conventional LTE terminals.

[0097] In other examples, no mechanism is provided to prevent both virtual carrier terminals and conventional LTE terminals transmitting random access requests at the same time. However, the random access preambles that are conventionally used to transmit a random access request are divided into two groups. The first group is used exclusively by virtual carrier terminals and the second group is used exclusively by conventional LTE terminals. Accordingly, the base station can determine whether a random request originated from a conventional LTE terminal or a virtual carrier terminal simply by ascertaining to what group the random access preamble belongs.

Example Architecture

[0098] Figure 14 provides a schematic diagram showing part of an adapted LTE mobile telecommunication system arranged in accordance with an example of the present invention. The system includes an adapted enhanced Node B (eNB) 1401 connected to a core network 1408 which communicates data to a plurality of conventional LTE terminals 1402 and reduced capability terminals 1403 within a coverage area (i.e. cell) 1404. Each of the reduced capability terminals 1403 has a transceiver unit 1405 which includes a receiver unit capable of receiving data across a reduced bandwidth and a transmitter unit capable of transmitting data across a reduced bandwidth when compared with the capabilities of the transceiver units 1406 included in the conventional LTE terminals 1402.

[0099] The adapted eNB 1401 is arranged to transmit downlink data using a sub-frame structure that includes a virtual carrier as described with reference to Figure 5 and to receive uplink data using a sub-frame structure as described with reference to Figures 13b or 13c. The reduced capability terminals 1403 are thus able to receive and transmit data using the uplink and downlink virtual carriers as described above.

[0100] As has been explained above, because the reduced complexity terminals 1403 receive and transmit data across a reduced bandwidth on the uplink and downlink virtual carriers, the complexity, power consumption and cost of the transceiver unit 1405 needed to receive and decode downlink data and to encode and transmit uplink data is reduced compared to the transceiver unit 1406 provided in the conventional LTE terminals.

[0101] When receiving downlink data from the core network 1408 to be transmitted to one of the terminals within the cell 1404, the adapted eNB 1401 is arranged to determine if the data is bound for a conventional LTE terminal 1402 or a reduced capability terminal 1403. This can be achieved using any suitable technique. For example, data bound for a reduced capability terminal 1403 may include a virtual carrier flag indicating that the data must be transmitted on the downlink virtual carrier. If the adapted eNB 1401 detects that downlink data is to be transmitted to a reduced capability terminal 1403, an adapted scheduling unit 1409 included in the adapted eNB 1401 ensures that the downlink data is transmitted to the reduced capability terminal in question on the downlink virtual. In another example the network is arranged so that the virtual carrier is logically independent of the eNB. More particularly the virtual carrier is arranged to appear to the core network as a distinct cell. From the perspective of the core network it is not known that the virtual carrier is physically co-located with, or has any interaction with, the host carrier of the cell. Packets are routed to/from the virtual carrier just as they would be for any normal cell.

[0102] In another example, packet inspection is performed at a suitable point within the network to route traf-

fic to or from the appropriate carrier (i.e. the host carrier or the virtual carrier).

[0103] In yet another example, data from the core network to the eNB is communicated on a specific logical connection for a specific mobile terminal. The eNB is provided with information indicating which logical connection is associated with which mobile terminal. Information is also provided at the eNB indicating which mobile terminals are virtual carrier terminals and which are conventional LTE terminals. This information could be derived from the fact that a virtual carrier terminal would initially have connected using virtual carrier resources. In other examples virtual carrier terminals are arranged to indicate their capability to the eNB during the connection procedure. Accordingly the eNB can map data from the core network to a specific mobile terminal based on whether the mobile terminal is a virtual carrier terminal or an LTE terminal.

[0104] When scheduling resources for the transmission of uplink data, the adapted eNB 1401 is arranged to determine if the terminal to be scheduled resources is a reduced capability terminal 1403 or a conventional LTE terminal 1402. In some examples this is achieved by analysing the random access request transmitted on the PRACH using the techniques to distinguish between a virtual carrier random access request and a conventional random access request as described above. In any case, when it has been determined at the adapted eNB 1401 that a random access request has been made by a reduced capability terminal 1402, the adapted scheduler 1409 is arranged to ensure that any grants of uplink resource elements are within the virtual uplink carrier.

[0105] In some examples, the virtual carrier inserted within the host carrier can be used to provide a logically distinct "network within a network". In other words data being transmitted via the virtual carrier can be treated as logically and physically distinct from the data transmitted by the host carrier network. The virtual carrier can therefore be used to implement a so-called dedicated messaging network (DMN) which is "laid over" a conventional network and used to communicate messaging data to DMN devices (i.e. virtual carrier terminals).

[0106] As will be appreciated from the above descriptions, embodiments of the present invention can include the following examples:

A method of allocating transmission resources in an OFDM wireless telecommunication system arranged to communicate data using a plurality of OFDM sub-carriers, the method comprising:

allocating transmission resources provided by a first group of the plurality of OFDM sub-carriers within a first frequency band to terminals of a first type;

allocating transmission resources provided by a second group of the plurality of OFDM sub-carriers to terminals of a second type within a sec-

ond frequency band, the second group being smaller than the first group and the second frequency band being selected from within the first frequency band;

transmitting control information comprising resource allocation information for terminals of the first type over a first bandwidth corresponding to the combined first and second groups of OFDM sub-carriers; and

transmitting control information comprising resource allocation information for terminals of the second type over a second bandwidth corresponding to the second group of OFDM sub-carriers.

[0107] An OFDM wireless telecommunication system arranged to communicate data to and from a plurality of mobile terminals over a plurality of OFDM sub-carriers, the system comprising

scheduling means arranged to allocate transmission resources provided by a first group of the plurality of OFDM sub-carriers within a first frequency band to mobile terminals of a first type and to allocate transmission resources provided by a second group of the plurality of OFDM sub-carriers within a second frequency band to terminals of a second type, the second group being smaller than the first group and the second frequency band being selected from within the first frequency band, and transmission means arranged to transmit control information comprising resource allocation information for terminals of the first type over a first bandwidth corresponding to the combined first and second groups of OFDM sub-carriers and to transmit control information comprising resource allocation information for terminals of the second type over a second bandwidth corresponding to the second group of OFDM sub-carriers.

[0108] A mobile terminal comprising a receiver unit for receiving data transmitted from a base station via a plurality of OFDM sub-carriers on a radio downlink and a transmitter for transmitting data to the base station via a plurality of OFDM sub-carriers on a radio uplink, the base station being arranged to transmit data to mobile terminals of a first type on a first group of a plurality of OFDM sub-carriers within a first frequency band and to transmit data to mobile terminals of a second type to which the mobile terminal belongs on a second group of the plurality of OFDM sub-carriers within a second frequency band, the second group being smaller than the first group and the second frequency band being selected from within the first frequency band, the base station being arranged to transmit control information comprising resource allocation information for terminals of the first type over a first bandwidth corresponding to the combined first and second groups of OFDM sub-carriers and to transmit control information comprising resource allocation information for terminals of the second type over a second bandwidth corresponding to the second group of OFDM sub-carriers, wherein the receiver unit of the mobile ter-

terminal is limited to receive data on the radio downlink over the second frequency band.

[0109] A mobile telecommunications system comprising mobile terminals of a first type and mobile terminals of a second type, the mobile terminals of the first type and second type being arranged to transmit uplink data to a network over a radio interface using a plurality of sub-carriers, the mobile terminals of the first type being arranged to transmit uplink data on a first group of sub-carriers of the plurality of sub-carriers over a first bandwidth and the mobile terminals of the second type being arranged to transmit uplink data on a second group of sub-carriers of the plurality of sub-carriers within the first group of sub-carriers over a second bandwidth, the second bandwidth being smaller than the first bandwidth, and

the mobile terminals of the first type are arranged to transmit random access request messages to a base station of the network requesting uplink radio resources on a first random access channel and the mobile terminals of the second type are arranged to transmit random access request messages to the base station of the network requesting uplink radio resources on a second random access channel, wherein random access request messages transmitted on the second random access channel are transmitted on sub-carriers within the second group of sub-carriers.

[0110] A method of transmitting data from mobile terminals of a first type and mobile terminals of a second type in a mobile telecommunications system, the mobile terminals of the first type and the mobile terminals of the second type being arranged to transmit uplink data to a network over a radio interface using a plurality of sub-carriers, the mobile terminals of the first type being arranged to transmit uplink data on a first group of sub-carriers of the plurality of sub-carriers over a first bandwidth and the mobile terminals of the second type being arranged to transmit uplink data on a second group of sub-carriers of the plurality of sub-carriers within the first group of sub-carriers over a second bandwidth, the second bandwidth being smaller than the first bandwidth, the method comprising, in the event of pending uplink data to be transmitted from a mobile terminal of the first type and the mobile terminal of the first type requiring an allocation of uplink resources:

transmitting from the mobile terminal of the first type a random access request message to a base station of the network requesting uplink radio resources on a first random access channel, and in the event of pending uplink data to be transmitted from a mobile terminal of the second type and the mobile terminal of the second type requiring an allocation of uplink resources:

transmitting from the mobile terminal of the second type a random access request message to a base station of the network requesting uplink

radio resources on a second random access channel, wherein

random access request messages transmitted on the second random access channel are transmitted on sub-carriers within the second group of sub-carriers.

[0111] Various modifications can be made to examples of the present invention. Embodiments of the present invention have been defined largely in terms of reduced capability terminals transmitting data via a virtual carrier inserted in a conventional LTE based host carrier. However, it will be understood that any suitable device can transmit and receive data using the described virtual carriers for example devices which have the same capability as a conventional LTE type terminal or devices which have enhanced capabilities.

[0112] Furthermore, it will be understood that the general principle of inserting a virtual carrier on a subset of uplink or downlink resources can be applied to any suitable mobile telecommunication technology and need not be restricted to systems employing an LTE based radio interface.

Claims

1. A network element for use in a mobile communications system, the network element configured to:

provide a wireless access interface comprising a plurality of orthogonal frequency division multiplex, OFDM, symbols for communicating data to and/or from the mobile communications devices, the wireless access interface providing on a downlink a host carrier, the host carrier providing a plurality of resource elements across a first frequency range,

transmit data for a first group of mobile communications devices, wherein the data is distributed within the plurality of resource elements across the first frequency range;

provide a virtual carrier via the wireless access interface, the virtual carrier providing one or more resource elements within a second frequency range which is within and smaller than the first frequency range, and wherein the resource elements comprising the virtual carrier are not on OFDM symbols used for a control region of the host carrier; and

transmit data for a second group of mobile communications devices having a reduced bandwidth capability compared to the first group via the virtual carrier.

2. A network element according to claim 1, wherein the network element is further operable to provide a plurality of virtual carriers via the wireless access inter-

face.

3. A network element according to claim 1 or 2, wherein the virtual carrier is provided in the same frequency range as a physical broadcast channel for devices in the first group of mobile communications devices to connect to the network element. 5
4. A network element according to any of claims 1 to 3, being further operable to provide on one or more resource elements a virtual carrier signal indicating that the wireless access interface provides a virtual carrier; and optionally: wherein the signal comprises an indication of the location of a virtual carrier within the first frequency range and/or an indication of the bandwidth of a virtual carrier. 10
5. A network element according to claim 1, wherein the network element being operable to provide a virtual carrier signal comprises the network element operable to provide the virtual carrier signal in a physical broadcast channel, and optionally: wherein the physical broadcast channel is a channel provided by the network element for devices in the first group of mobile communications devices to connect to the network element. 20
6. A network element according to any of claims 1 or 5, further operable to provide a virtual carrier signal in respect of a certain virtual carrier within the certain virtual carrier. 25
7. A network element according to any of claims 1 to 6, the network element being for use in a system arranged in accordance with 3GPP Long Term Evolution. 30
8. A network element according to any of claims 1 to 7, wherein the virtual carrier signal is not provided in every sub-frame. 35
9. A network element according to claims 6 and 7, wherein the virtual carrier signal is provided in some or all sub-carriers across the virtual carrier and in one or more OFDM symbols. 40
10. A network element according to any of claims 1 to 9, wherein the network element is operable to provide the virtual carrier wherein the second frequency range has a bandwidth of at least 1 resource block and of fewer than one hundred resource blocks. 45
11. A network element according to claim 10, wherein the network element is operable to provide the virtual carrier where the second frequency range has a bandwidth of six resource blocks. 50
12. A network element according to any preceding claim,

the network element being further operable to:

transmit data on the downlink in time-adjacent sub-frames;
 allocate to the virtual carrier one or more resource elements within the second frequency range in a first sub-frame; and
 allocate to the virtual carrier one or more resource elements within a third frequency range in the sub-frame after the first sub-frame, wherein the third frequency range is within and smaller than the first frequency range.

13. A network element according to claim 12, wherein the virtual carrier bandwidth and/or range changes at regular interval and, optionally, the virtual carrier bandwidth and/or range changes every sub-frame or every 10 sub-frames, and optionally: wherein the third frequency range is the same as the second frequency range. 15
14. A network element according to any of claims 12 to 13, wherein the network element is further operable to change of frequency range from the second frequency range to the third frequency range based on a pseudo-random algorithm. 20
15. A method of using a network element for communicating data to and/or from mobile communications devices in a mobile communications system, the method comprising: 25
- providing a wireless access interface comprising a plurality of orthogonal frequency division multiplex, OFDM, symbols for communicating data to and/or from the mobile communications devices, the wireless access interface providing on a downlink a host carrier, the host carrier providing a plurality of resource elements across a first frequency range, 30
- transmitting data for a first group of mobile communications devices, wherein the data is distributed within the plurality of resource elements across the first frequency range; 35
- providing a virtual carrier via the wireless access interface, the virtual carrier providing one or more resource elements within a second frequency range which is within and smaller than the first frequency range and wherein the resource elements comprising the virtual carrier are not on OFDM symbols used for a control region of the host carrier; and 40
- transmitting data for a second group of mobile communications devices having a reduced bandwidth capability compared to the first group via the at least one virtual carrier. 45

Patentansprüche

1. Netzwerkelement zur Verwendung in einem Mobilkommunikationssystem, wobei das Netzwerkelement für folgendes konfiguriert ist:

Bereitstellen einer Drahtloszugangsschnittstelle, umfassend eine Vielzahl von orthogonalen Frequenzmultiplexverfahrens- (OFDM)-Symbolen zum Kommunizieren von Daten an und/oder von den Mobilkommunikationsvorrichtungen, wobei die Drahtloszugangsschnittstelle auf einem Downlink einen Host-Träger bereitstellt, wobei der Host-Träger eine Vielzahl von Ressourcenelementen über einen ersten Frequenzbereich bereitstellt,

Übertragen von Daten für eine erste Gruppe von Mobilkommunikationsvorrichtungen, wobei die Daten innerhalb der Vielzahl von Ressourcenelementen über den ersten Frequenzbereich verteilt sind;

Bereitstellen eines virtuellen Trägers über die Drahtloszugangsschnittstelle, wobei der virtuelle Träger ein oder mehrere Ressourcenelemente innerhalb eines zweiten Frequenzbereichs bereitstellt, der innerhalb des ersten Frequenzbereichs liegt und kleiner als dieser ist, und wobei die Ressourcenelemente, die den virtuellen Träger umfassen, nicht auf OFDM-Symbolen sind, die für eine Steuerregion des Host-Trägers verwendet werden; und

Übertragen von Daten für eine zweite Gruppe von Mobilkommunikationsvorrichtungen mit einer reduzierten Bandbreitenfähigkeit, verglichen mit der ersten Gruppe, über den virtuellen Träger.

2. Netzwerkelement nach Anspruch 1, wobei das Netzwerkelement ferner betriebsfähig ist, eine Vielzahl von virtuellen Trägern über die Drahtloszugangsschnittstelle bereitzustellen.

3. Netzwerkelement nach Anspruch 1 oder 2, wobei der virtuelle Träger in dem gleichen Frequenzbereich wie ein physischer Broadcast-Kanal für Vorrichtungen in der ersten Gruppe der Mobilkommunikationsvorrichtungen zur Verbindung mit dem Netzwerkelement bereitgestellt wird.

4. Netzwerkelement nach einem der Ansprüche 1 bis 3, das ferner betriebsfähig ist, an einem oder mehreren Ressourcenelementen ein virtuelles Trägersignal bereitzustellen, welches angibt, dass die Drahtloszugangsschnittstelle einen virtuellen Träger bereitstellt; und optional: wobei das Signal eine Angabe der Position eines virtuellen Trägers innerhalb des ersten Frequenzbereichs und/oder eine Angabe der Bandbreite eines virtuellen Trägers umfasst.

5. Netzwerkelement nach Anspruch 1, wobei das Netzwerkelement betriebsfähig ist, um ein virtuelles Trägersignal bereitzustellen, welches das Netzwerkelement umfasst, das betriebsfähig ist, um das virtuelle Trägersignal in einem physischen Broadcast-Kanal bereitzustellen, und optional: wobei der physische Broadcast-Kanal ein Kanal ist, der von dem Netzwerkelement für Vorrichtungen in der ersten Gruppe der Mobilkommunikationsgeräte zur Verbindung mit dem Netzwerkelement bereitgestellt wird.

6. Netzwerkelement nach einem der Ansprüche 1 oder 5, das ferner betriebsfähig ist, um ein virtuelles Trägersignal in Bezug auf einen bestimmten virtuellen Träger innerhalb des bestimmten virtuellen Trägers bereitzustellen.

7. Netzwerkelement nach einem der Ansprüche 1 bis 6, wobei das Netzwerkelement zur Verwendung in einem System ist, das gemäß 3GPP Long Term Evolution (LTE) ausgestaltet ist.

8. Netzwerkelement nach einem der Ansprüche 1 bis 7, wobei das virtuelle Trägersignal nicht in jedem Sub-frame bereitgestellt wird.

9. Netzwerkelement nach den Ansprüchen 6 und 7, wobei das virtuelle Trägersignal in einigen oder allen Subträgern über den virtuellen Träger und in einem oder mehreren OFDM-Symbolen bereitgestellt wird.

10. Netzwerkelement nach einem der Ansprüche 1 bis 9, wobei das Netzwerkelement betriebsfähig ist, um den virtuellen Träger bereitzustellen, wobei der zweite Frequenzbereich eine Bandbreite von mindestens 1 Ressourcenblock und weniger als einhundert Ressourcenblöcken aufweist.

11. Netzwerkelement nach Anspruch 10, wobei das Netzwerkelement betriebsfähig ist, um den virtuellen Träger bereitzustellen, wobei der zweite Frequenzbereich eine Bandbreite von sechs Ressourcenblöcken aufweist.

12. Netzwerkelement nach einem der vorhergehenden Ansprüche, wobei das Netzwerkelement ferner betriebsfähig für folgendes ist:

Übertragen von Daten auf dem Downlink in zeitlich angrenzenden Subframes;

Zuweisen von einem oder mehreren Ressourcenelementen innerhalb des zweiten Frequenzbereichs in einem ersten Subframe zu dem virtuellen Träger; und

Zuweisen von einem oder mehreren Ressourcenelementen innerhalb eines dritten Frequenzbereichs in dem Subframe nach dem ersten Sub-frame zu dem virtuellen Träger, wobei

der dritte Frequenzbereich innerhalb des ersten Frequenzbereichs liegt und kleiner als dieser ist.

13. Netzwerkelement nach Anspruch 12, wobei die Bandbreite und/oder der Bereich des virtuellen Trägers sich in regelmäßigem Intervall ändert und die Bandbreite und/oder der Bereich des virtuellen Trägers sich gegebenenfalls bei jedem Subframe oder alle 10 Sub-frames ändert, und optional: wobei der dritte Frequenzbereich der gleiche wie der zweite Frequenzbereich ist.
14. Netzwerkelement nach einem der Ansprüche 12 bis 13, wobei das Netzwerkelement ferner betriebsfähig ist, um den Frequenzbereich basierend auf einem Pseudozufallsalgorithmus von dem zweiten Frequenzbereich auf den dritten Frequenzbereich zu ändern.
15. Verfahren zum Verwenden eines Netzwerkelements zum Kommunizieren von Daten zu und/oder von Mobilkommunikationsvorrichtungen in einem Mobilkommunikationssystem, wobei das Verfahren umfasst:
- Bereitstellen einer Drahtloszugangsschnittstelle, umfassend eine Vielzahl von orthogonalen Frequenzmultiplexverfahrens- (OFDM)-Symbolen zum Kommunizieren von Daten an und/oder von den Mobilkommunikationsvorrichtungen, wobei die Drahtloszugangsschnittstelle auf einem Downlink einen Host-Träger bereitstellt, wobei der Host-Träger eine Vielzahl von Ressourcenelementen über einen ersten Frequenzbereich bereitstellt,
- Übertragen von Daten für eine erste Gruppe von Mobilkommunikationsvorrichtungen, wobei die Daten innerhalb der Vielzahl von Ressourcenelementen über den ersten Frequenzbereich verteilt sind;
- Bereitstellen eines virtuellen Trägers über die Drahtloszugangsschnittstelle, wobei der virtuelle Träger ein oder mehrere Ressourcenelemente innerhalb eines zweiten Frequenzbereichs bereitstellt, der innerhalb des ersten Frequenzbereichs liegt und kleiner als dieser ist, und wobei die Ressourcenelemente, die den virtuellen Träger umfassen, nicht auf OFDM-Symbolen sind, die für eine Steuerregion des Host-Trägers verwendet werden; und
- Übertragen von Daten für eine zweite Gruppe von Mobilkommunikationsvorrichtungen mit einer reduzierten Bandbreitenfähigkeit, verglichen mit der ersten Gruppe, über den mindestens einen virtuellen Träger.

Revendications

1. Élément de réseau destiné à être utilisé dans un système de communications mobiles, l'élément de réseau étant configuré pour :

fournir une interface d'accès sans fil comprenant une pluralité de symboles multiplex orthogonaux à division de fréquence, OFDM (Orthogonal Frequency Division Multiplex), pour communiquer des données vers les dispositifs de communications mobiles, ou en provenance de ceux-ci, l'interface d'accès sans fil fournissant sur une liaison descendante une porteuse hôte, la porteuse hôte fournissant une pluralité d'éléments de ressources dans une première gamme de fréquences,

transmettre des données pour un premier groupe de dispositifs de communications mobiles, dans lequel les données sont réparties dans la pluralité d'éléments de ressources de la première gamme de fréquences ;

fournir une porteuse virtuelle par l'intermédiaire de l'interface d'accès sans fil, la porteuse virtuelle fournissant un ou plusieurs éléments de ressources dans une deuxième gamme de fréquence qui se trouve à l'intérieur de la première gamme de fréquences et est plus petite que celle-ci, et dans lequel les éléments de ressources comprenant la porteuse virtuelle ne sont pas sur les symboles OFDM utilisés pour une zone de contrôle de la porteuse hôte ; et

transmettre des données pour un second groupe de dispositifs de communications mobiles ayant une capacité de bande passante réduite par rapport au premier groupe par l'intermédiaire de la porteuse virtuelle.

2. Élément de réseau selon la revendication 1, dans lequel l'élément de réseau peut en outre être mis en oeuvre pour fournir une pluralité de porteuses virtuelles par l'intermédiaire de l'interface d'accès sans fil.

3. Élément de réseau selon la revendication 1 ou 2, dans lequel la porteuse virtuelle est située dans la même gamme de fréquences qu'un canal de diffusion physique pour des dispositifs du premier groupe de dispositifs de communication mobile à connecter à l'élément de réseau.

4. Élément de réseau selon l'une quelconque des revendications 1 à 3, pouvant en outre être mis en oeuvre pour fournir sur un ou plusieurs éléments de ressources un signal de porteuse virtuelle indiquant que l'interface d'accès sans fil fournit une porteuse virtuelle ; et, facultativement : dans lequel le signal comprend une indication de l'emplacement d'une

porteuse virtuelle dans la première gamme de fréquences et/ou une indication de la bande passante d'une porteuse virtuelle.

5. Élément de réseau selon la revendication 1, dans lequel l'élément de réseau pouvant être mis en oeuvre pour fournir un signal de porteuse virtuelle comprend l'élément de réseau pouvant être mis en oeuvre pour fournir le signal de porteuse virtuelle dans un canal de diffusion physique et, facultativement : dans lequel le canal de diffusion physique est un canal fourni par l'élément de réseau pour les dispositifs du premier groupe de dispositifs de communications mobiles à connecter à l'élément de réseau. 5 10
6. Élément de réseau selon l'une quelconque des revendications 1 ou 5, pouvant en outre être mis en oeuvre pour fournir un signal de porteuse virtuelle relatif à une certaine porteuse virtuelle au sein de la certaine porteuse virtuelle. 20
7. Élément de réseau selon l'une quelconque des revendications 1 à 6, l'élément de réseau étant destiné à être utilisé dans un système organisé conformément au système d'évolution à long terme (Long Term Evolution) 3GPP. 25
8. Élément de réseau selon l'une quelconque des revendications 1 à 7, dans lequel le signal de porteuse virtuelle n'est pas fourni dans chaque sous-trame. 30
9. Élément de réseau selon les revendications 6 et 7, dans lequel le signal de porteuse virtuelle est fourni dans certaines ou dans toutes les sous-porteuses à travers la porteuse virtuelle et dans un ou plusieurs symboles OFDM. 35
10. Élément de réseau selon l'une quelconque des revendications 1 à 9, dans lequel l'élément de réseau peut être mis en oeuvre pour fournir la porteuse virtuelle la deuxième gamme de fréquences ayant une largeur de bande d'au moins 1 bloc de ressources et de moins de cent blocs de ressources. 40 45
11. Élément de réseau selon la revendication 10, dans lequel l'élément de réseau peut être mis en oeuvre pour fournir la porteuse virtuelle où la deuxième gamme de fréquences a une largeur de bande de six blocs de ressources. 50
12. Élément de réseau selon l'une quelconque des revendications précédentes, l'élément de réseau pouvant en outre être mis en oeuvre pour : 55

transmettre des données sur la liaison descendante dans des sous-trames temporelles adjacentes ;

allouer à la porteuse virtuelle un ou plusieurs éléments de ressources dans la seconde gamme de fréquences d'une première sous-trame ; et

allouer à la porteuse virtuelle un ou plusieurs éléments de ressources dans une troisième gamme de fréquences de la sous-trame suivant la première sous-trame, la troisième gamme de fréquences étant contenue dans la première gamme de fréquences et plus petite que celle-ci.

13. Élément de réseau selon la revendication 12, dans lequel la bande passante et/ou la gamme de fréquences de la porteuse virtuelle change à intervalles réguliers et, éventuellement, la bande passante et/ou la gamme de fréquences de la porteuse virtuelle changent à chaque sous-trame ou toutes les 10 sous-trames, et facultativement : dans lequel la troisième gamme de fréquences est identique à la seconde gamme de fréquences.

14. Élément de réseau selon l'une quelconque des revendications 12 à 13, dans lequel l'élément de réseau peut en outre être mis en oeuvre pour changer la gamme de fréquences de la seconde gamme de fréquences à la troisième gamme de fréquences sur la base d'un algorithme pseudo-aléatoire.

15. Procédé d'utilisation d'un élément de réseau pour communiquer des données vers des dispositifs de communications mobiles d'un système de communications mobiles ou en provenance de ceux-ci, le procédé comprenant :

la fourniture d'une interface d'accès sans fil comprenant une pluralité de symboles multiplex orthogonaux à division de fréquence, OFDM, pour communiquer des données vers les dispositifs de communications mobiles, ou en provenance de ceux-ci, l'interface d'accès sans fil fournissant sur une liaison descendante une porteuse hôte, la porteuse hôte fournissant une pluralité d'éléments de ressources dans une première gamme de fréquences, la transmission de données pour un premier groupe de dispositifs de communications mobiles, dans lequel les données sont réparties dans la pluralité d'éléments de ressources de la première gamme de fréquences ; la fourniture d'une porteuse virtuelle par l'intermédiaire de l'interface d'accès sans fil, la porteuse virtuelle fournissant un ou plusieurs éléments de ressources dans une seconde gamme de fréquences qui se trouve à l'intérieur de la première gamme de fréquences et est plus petite que celle-ci, et dans lequel les éléments de ressources comprenant la porteuse virtuelle ne sont pas sur les symboles OFDM utilisés pour

une zone de contrôle de la porteuse hôte ; et
la transmission de données pour un second
groupe de dispositifs de communications mobi-
les ayant une capacité de bande passante ré-
duite par rapport au premier groupe par l'inter- 5
médiaire de l'au moins une porteuse virtuelle.

10

15

20

25

30

35

40

45

50

55

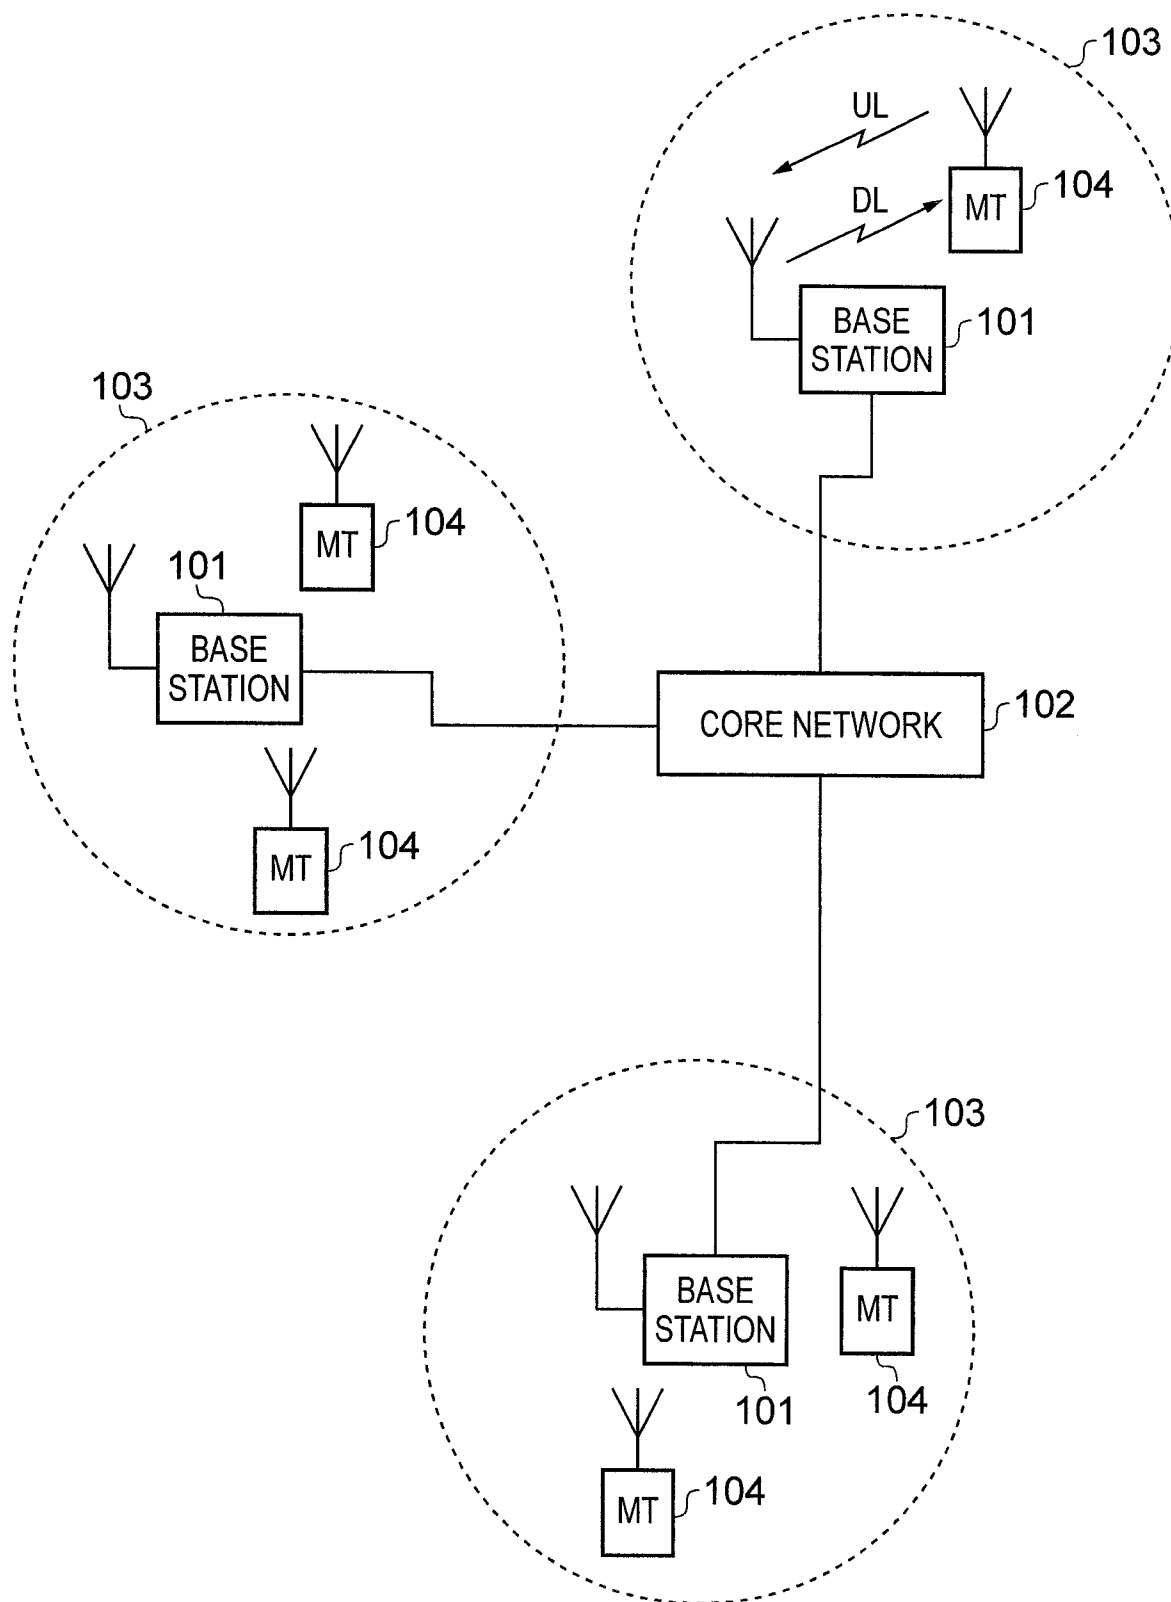


FIG. 1

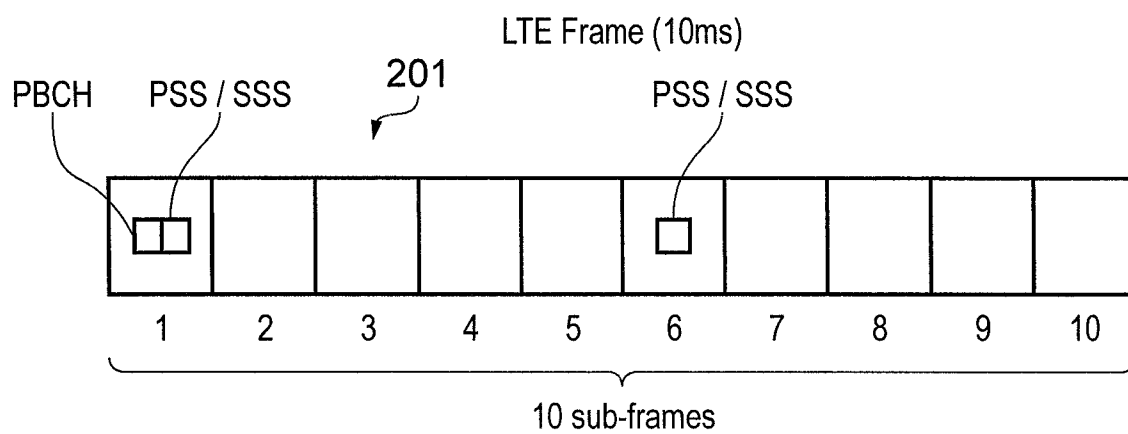


FIG. 2

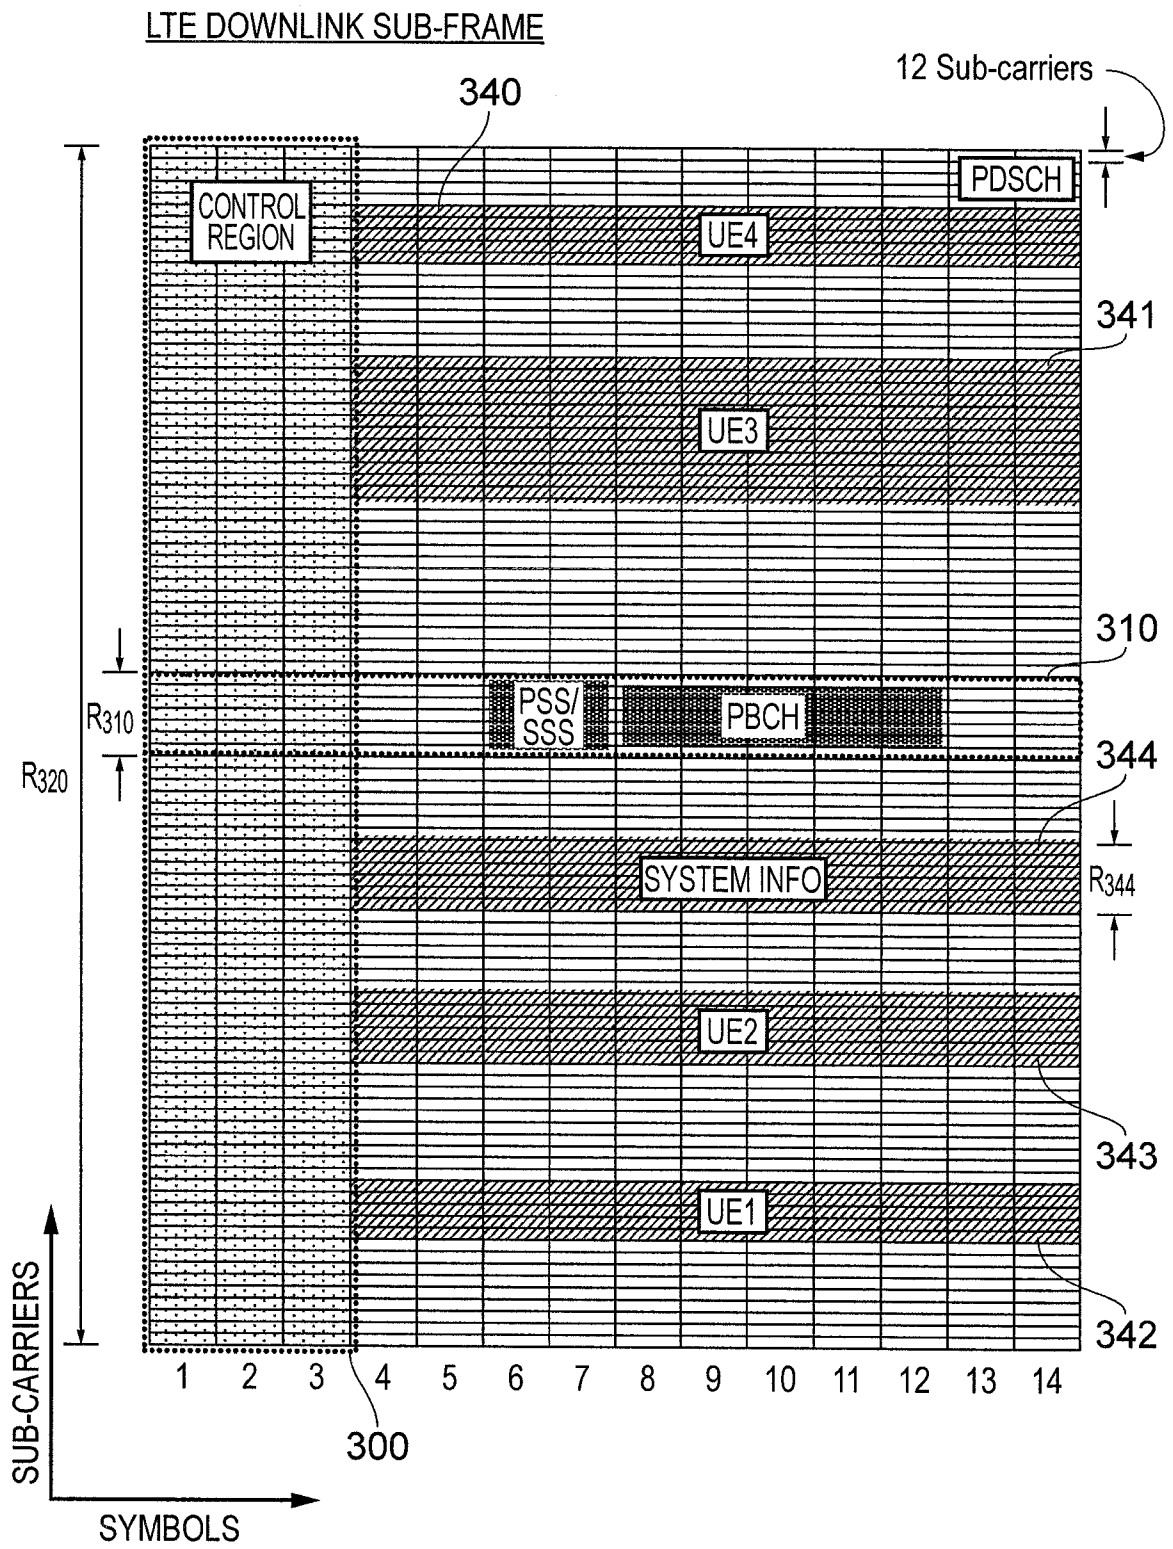


FIG. 3

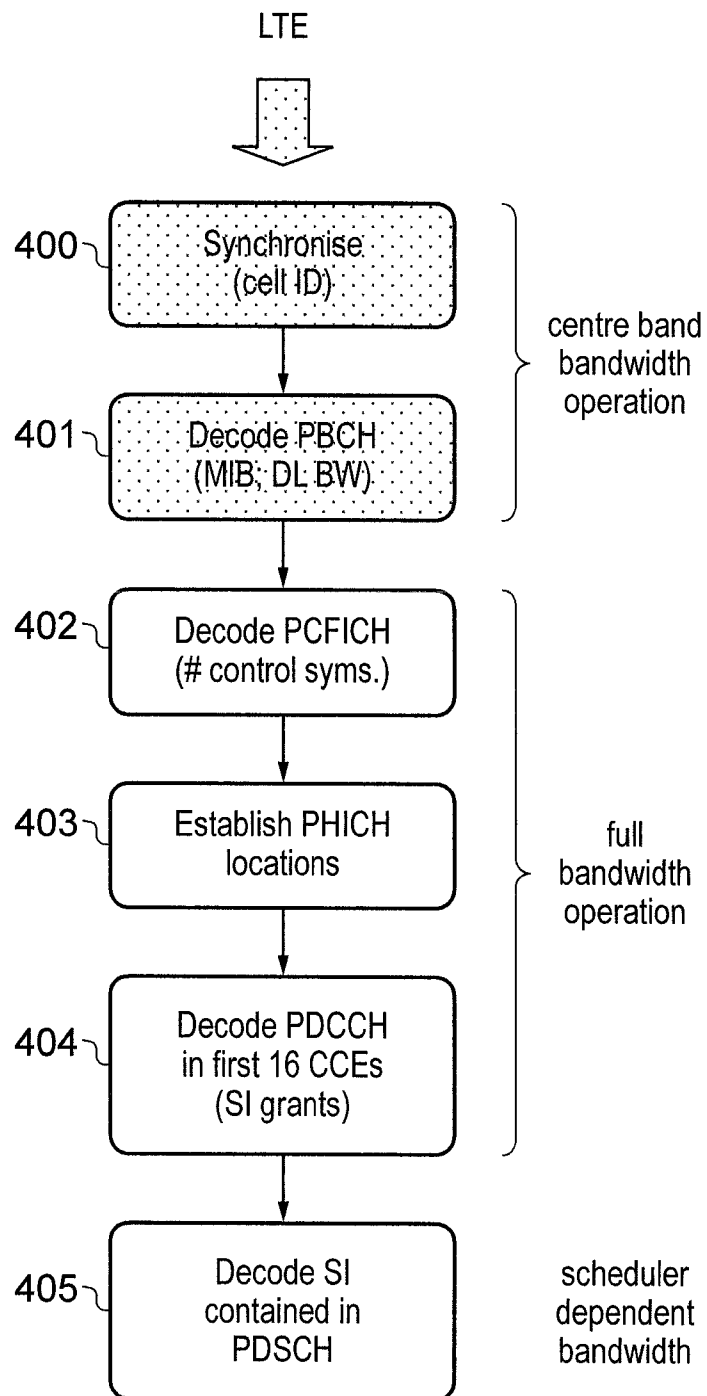


FIG. 4

DOWNLINK SUB-FRAME WITH VIRTUAL CARRIER

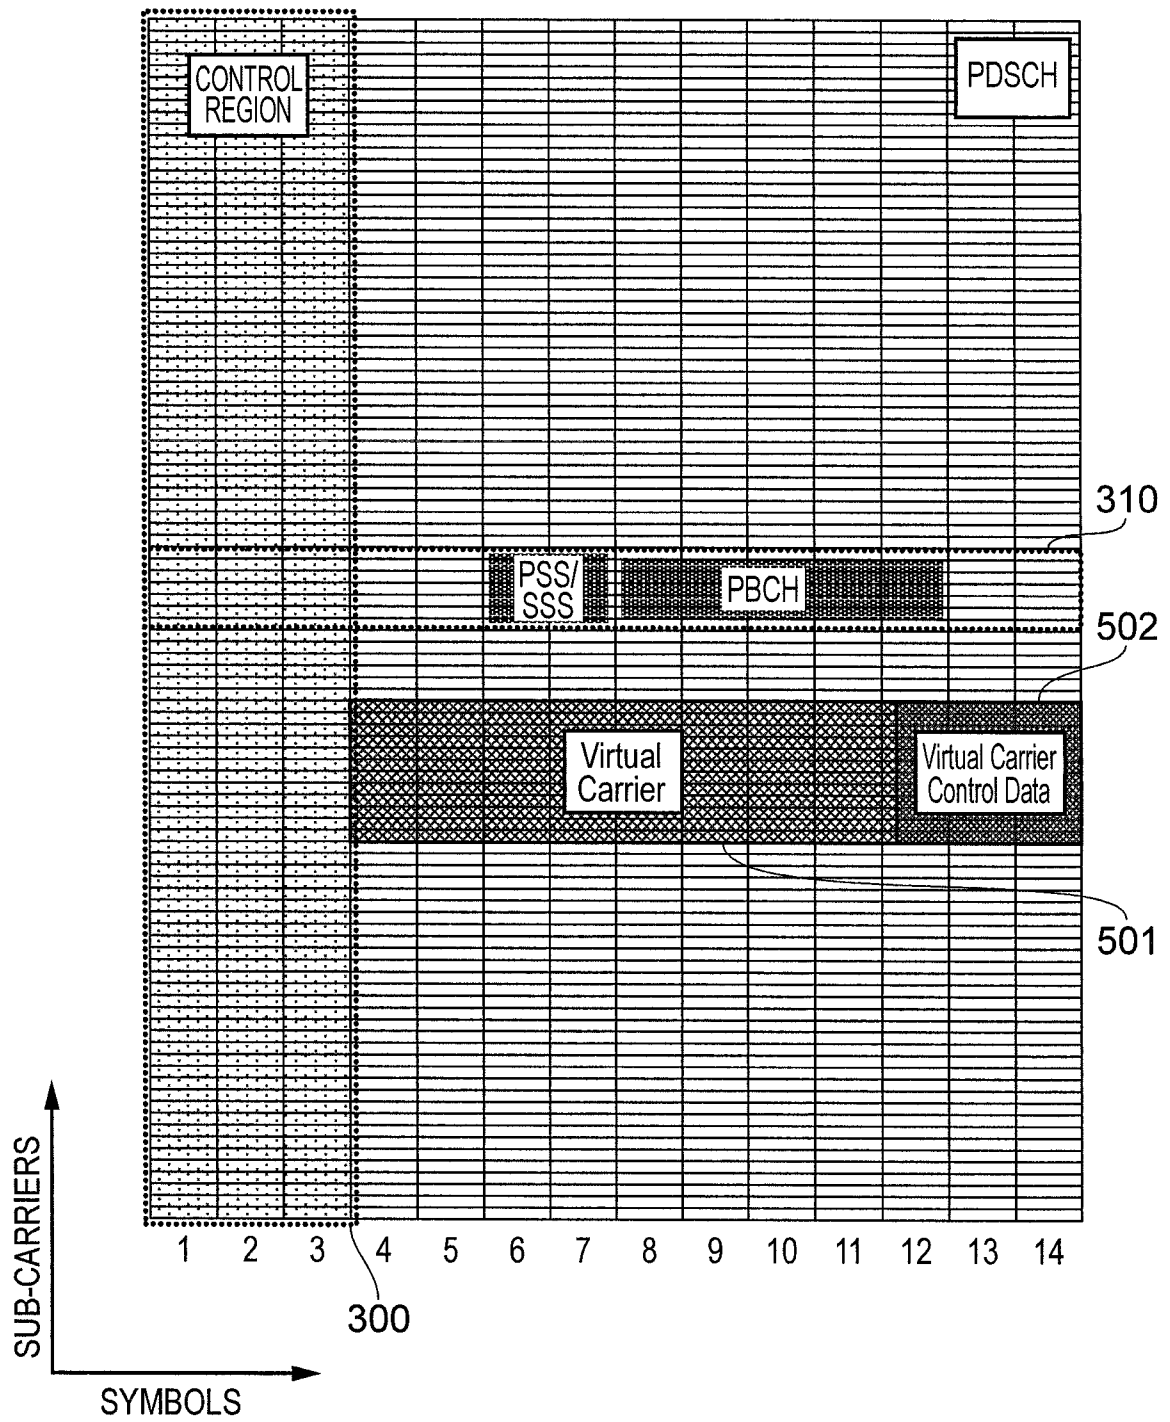


FIG. 5

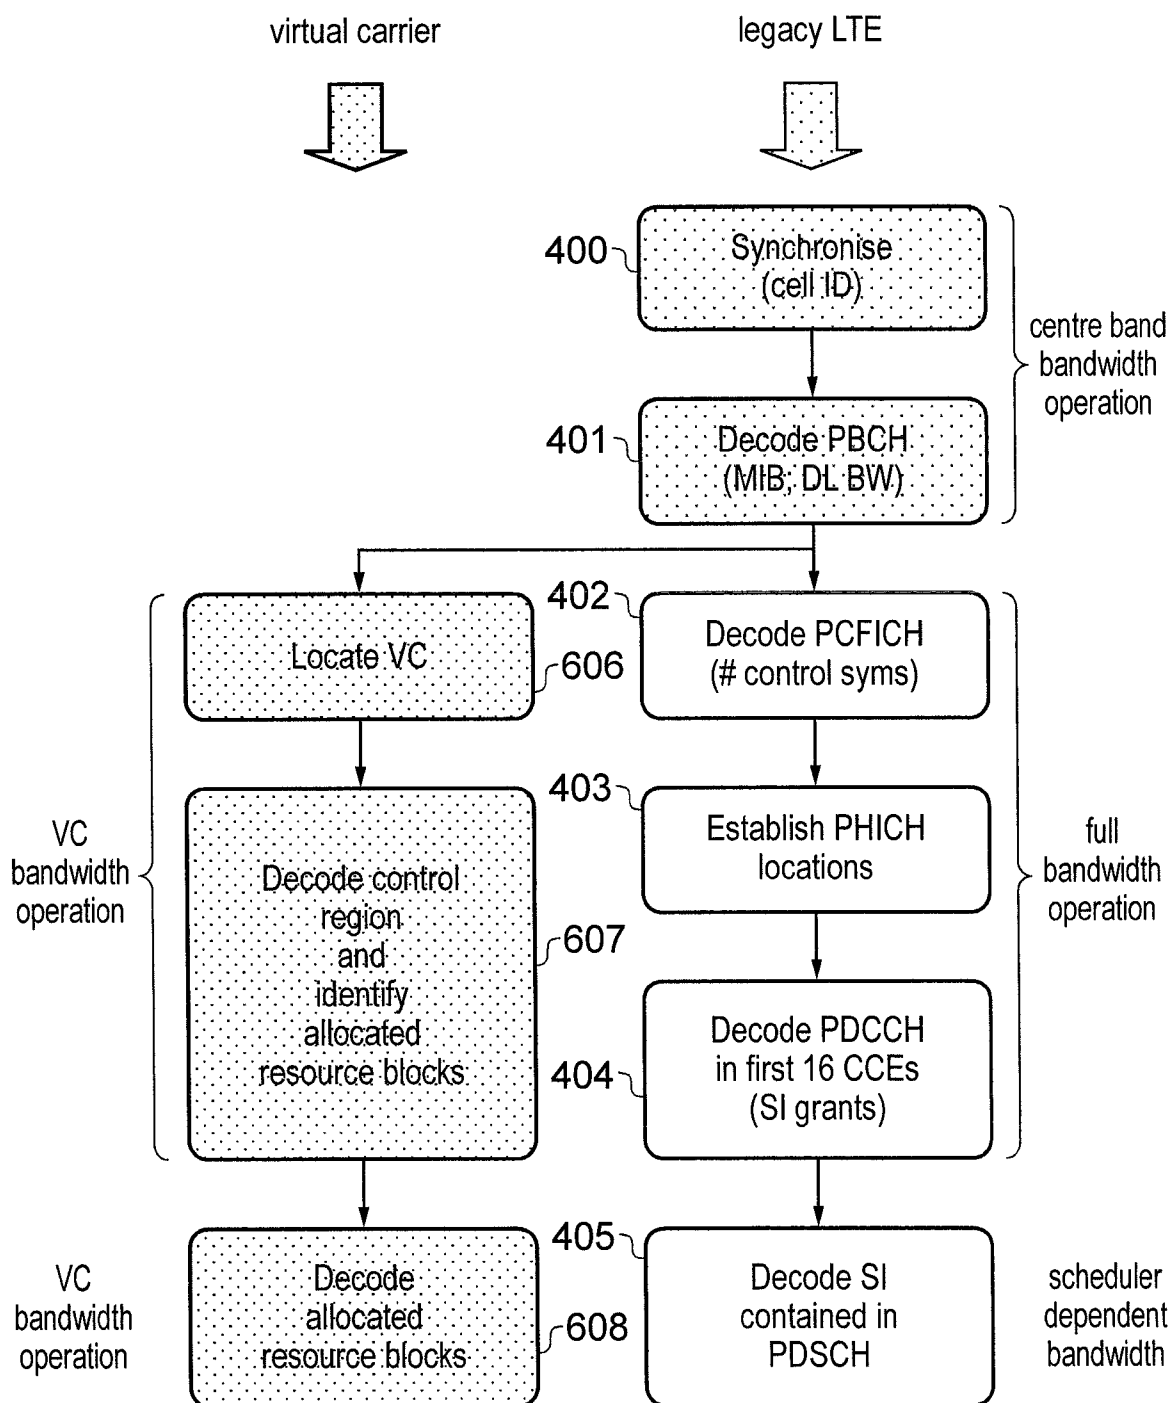


FIG. 6

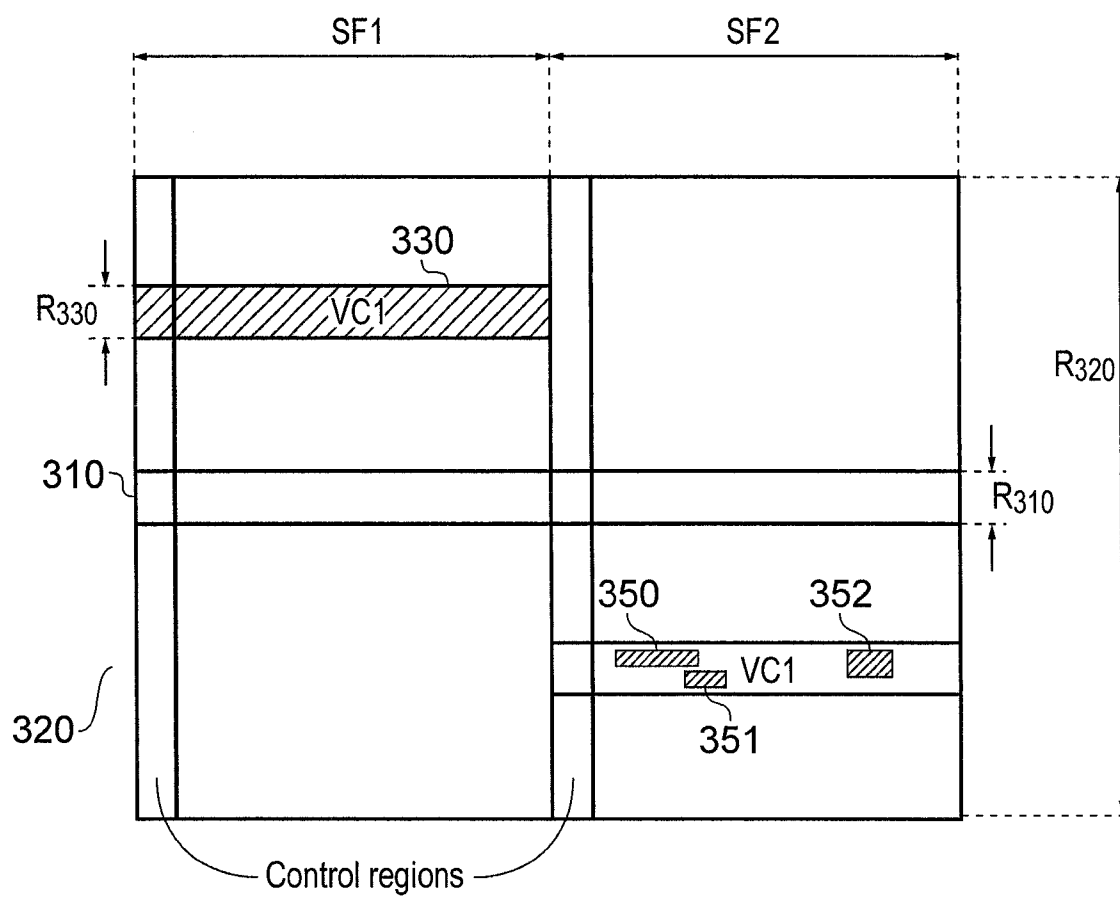


FIG. 7

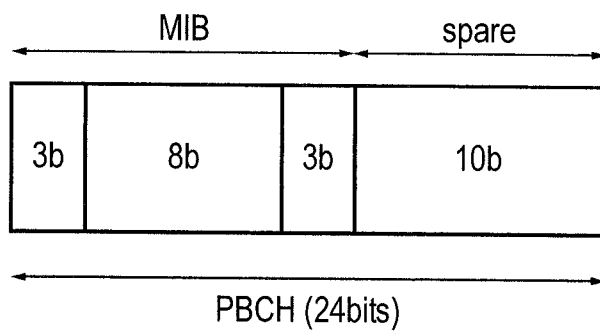


FIG. 8

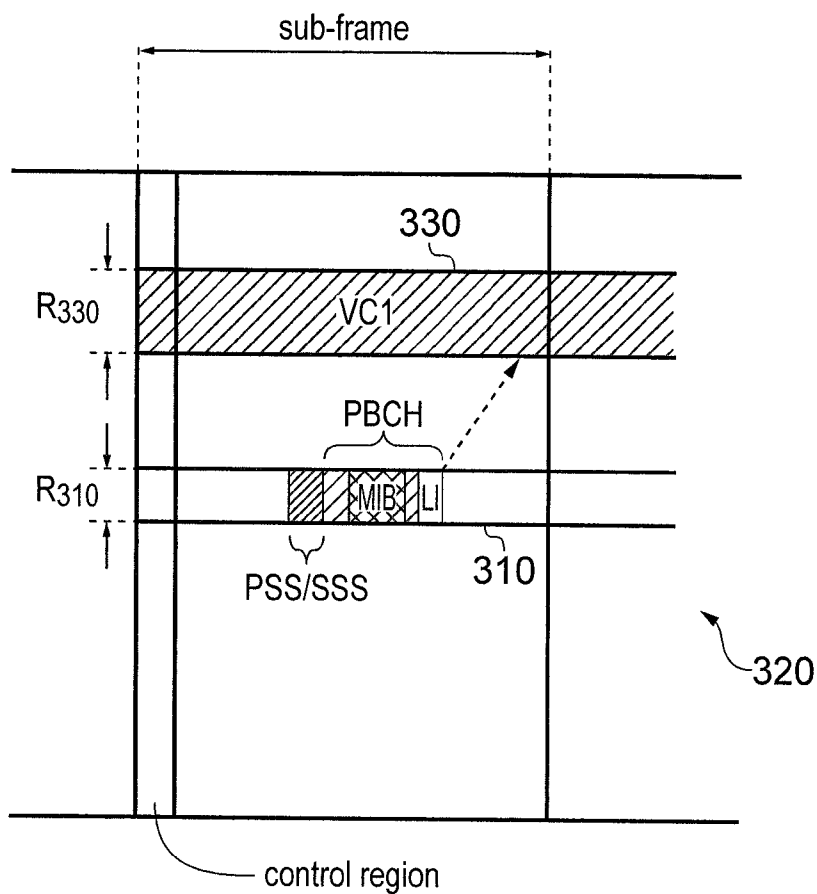


FIG. 9

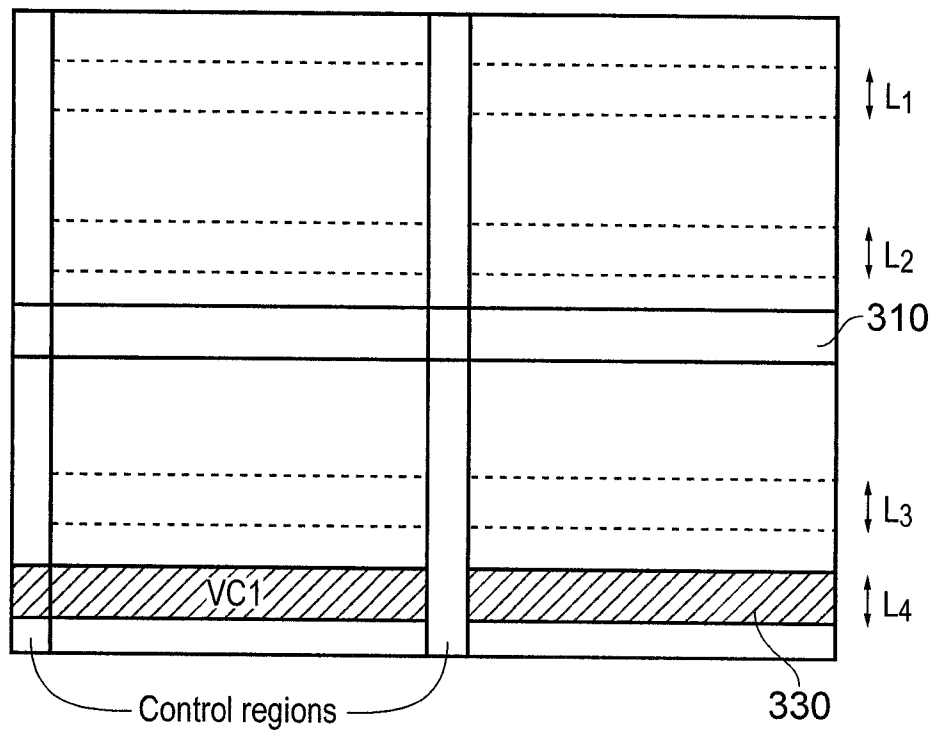


FIG. 10

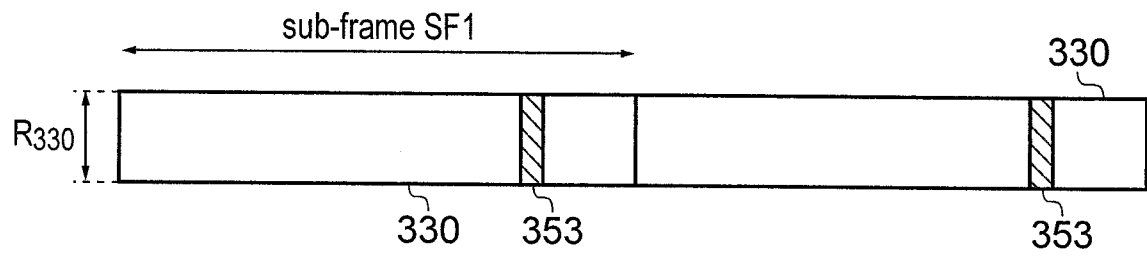


FIG. 11A

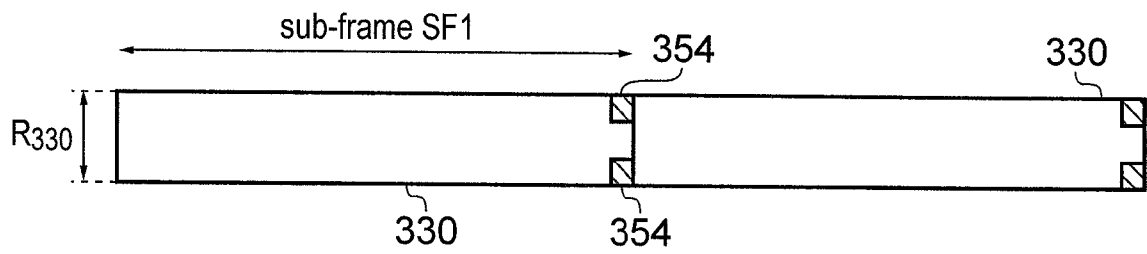


FIG. 11B

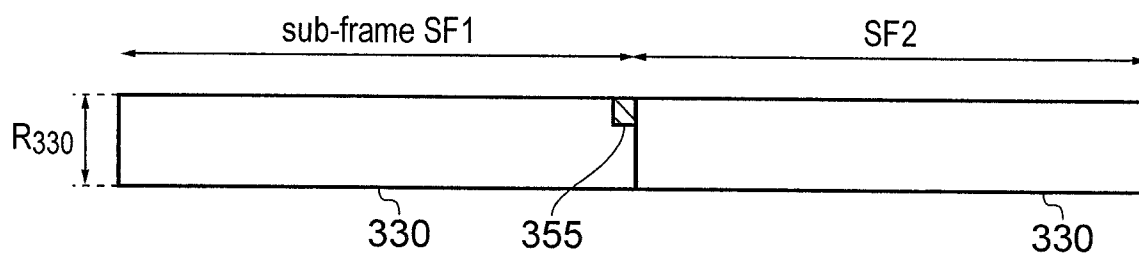


FIG. 11C

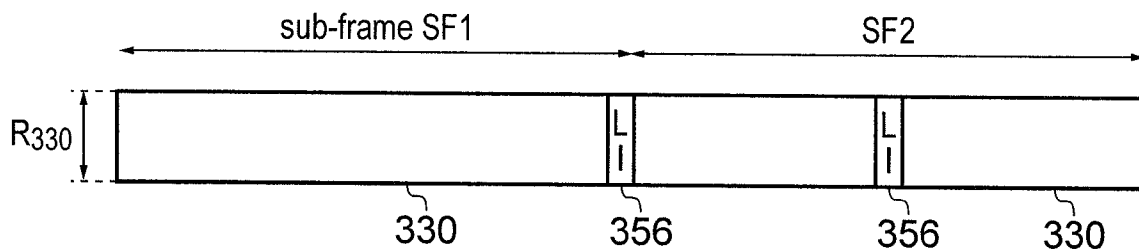


FIG. 11D

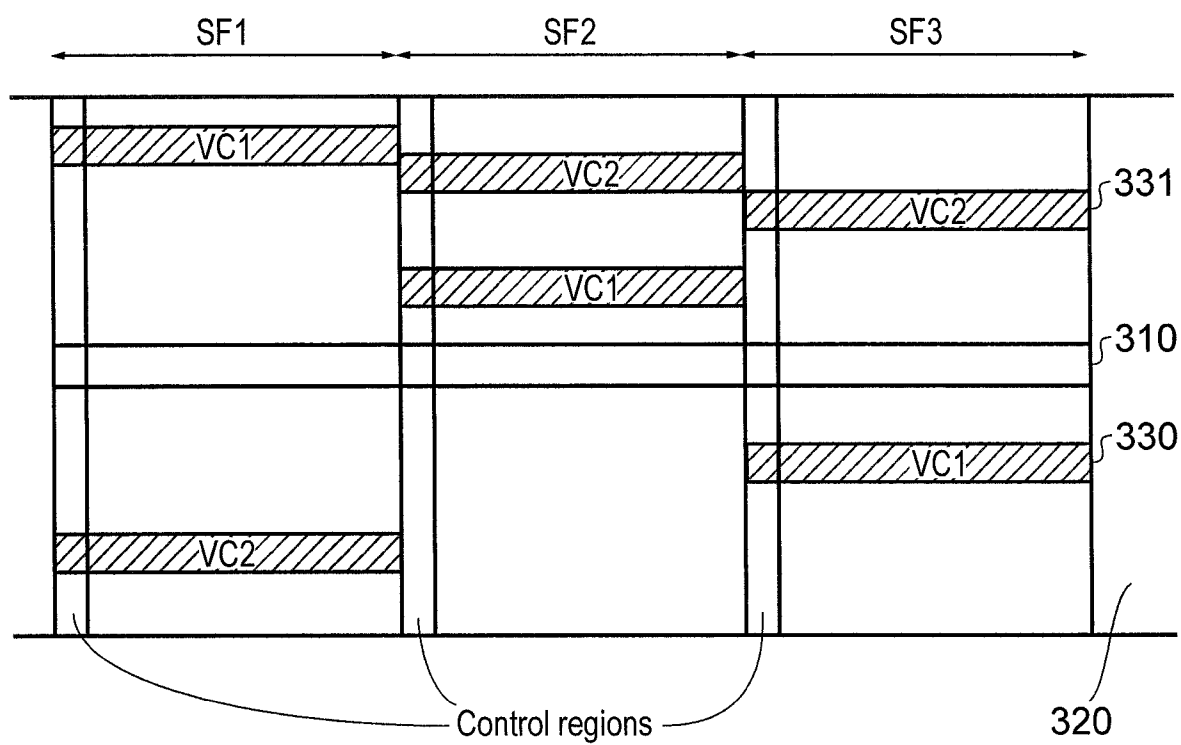


FIG. 12

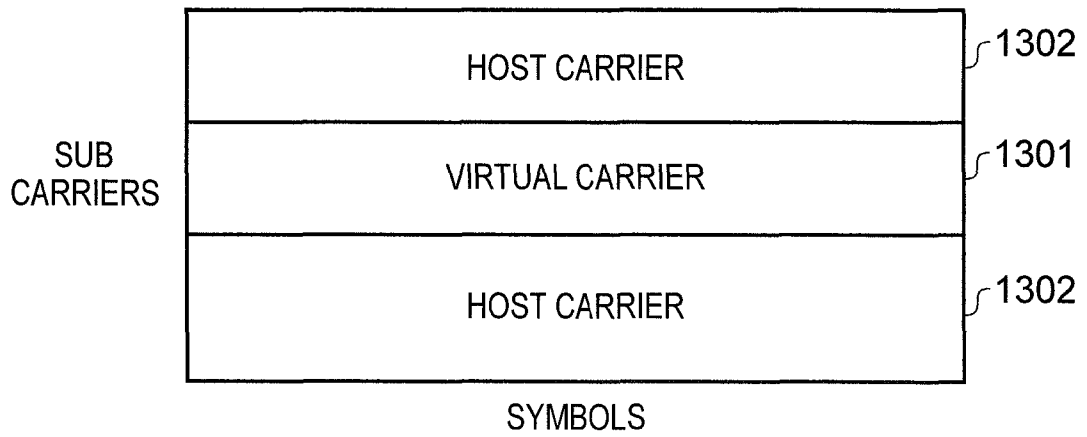


FIG. 13A

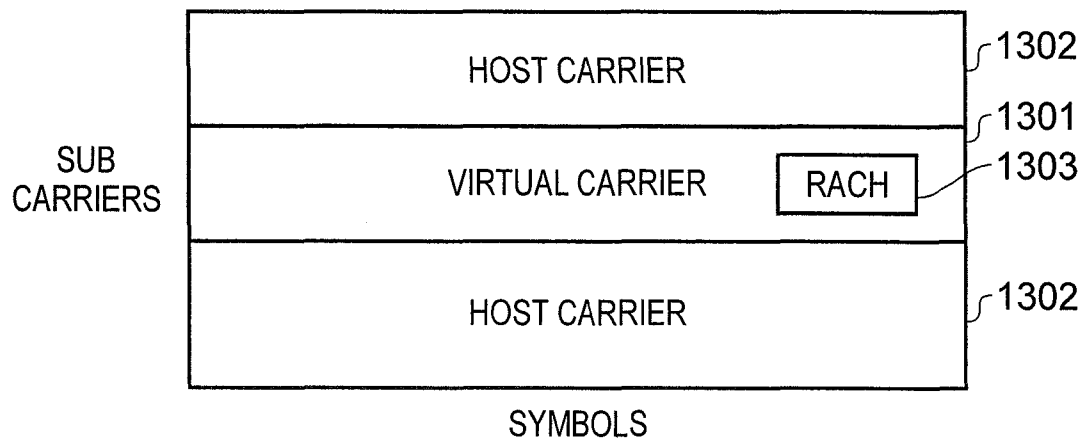


FIG. 13B

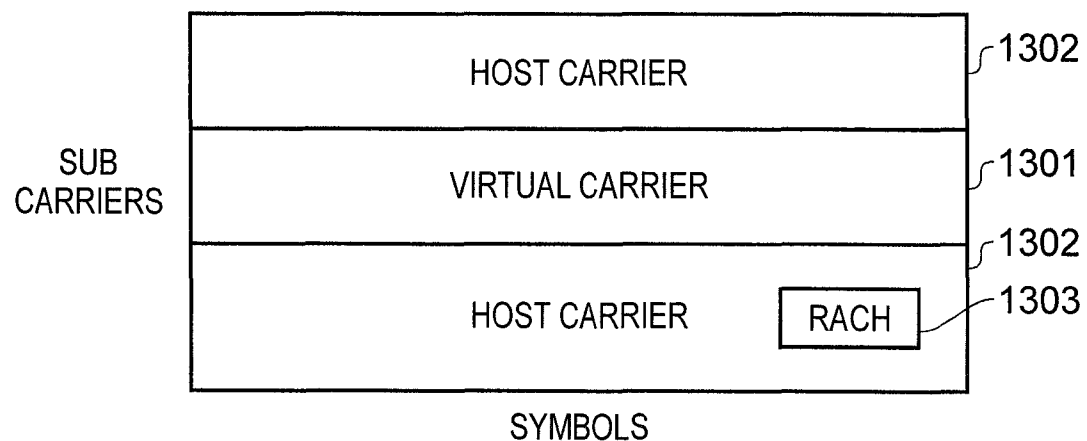


FIG. 13C

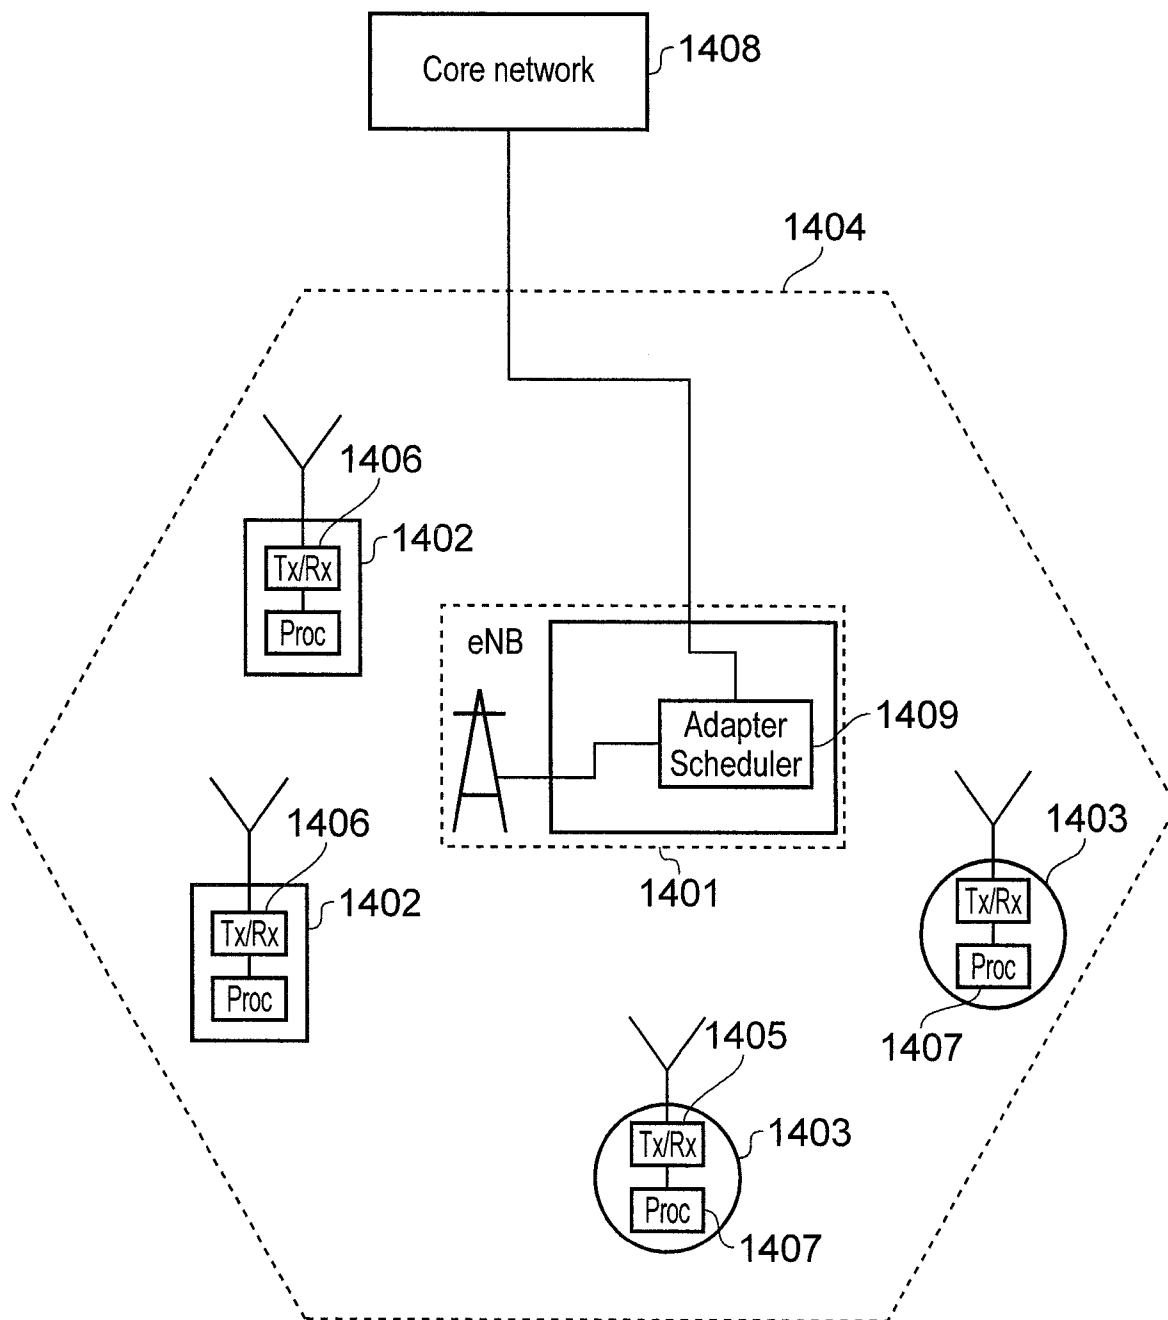


FIG. 14



SZTNH-100085800

VIRTUÁLIS VIVŐ BESZÚRÁSA HAGYOMÁNYOS OFDM HOST VIVŐBEN KOMMUNIKÁCIÓS RENDSZERBEN

SZABADALMI IGÉNYPONTOK

1. Hálózati elem mobil kommunikációs rendszerben történő felhasználásra, amely hálózati elem úgy van kialakítva, hogy:

olyan vezeték nélküli hozzáférési interfésszel rendelkezik, amely több ortogonális frekvenciasztásos multiplexelési, OFDM, szimbólumot tartalmaz a mobil kommunikációs eszközhöz irányuló és/vagy onnan érkező adatkommunikáció számára, ahol a vezeték nélküli hozzáférési interfész egy downlink összeköttetésen egy olyan gazdavivőt biztosít, amelynek több erőforráseleme van egy első frekvenciatartományban,

adatokat továbbít a mobil kommunikációs eszközök egy első csoportjának, ahol az adatok az első frekvenciatartományban lévő erőforráselemek között vannak szétosztva;

a vezeték nélküli hozzáférési interfészen keresztül egy virtuális vivővel rendelkezik, ahol a virtuális vivőnek egy vagy több erőforráseleme van egy második frekvenciatartományban, amely az első frekvenciatartománytól kisebb és azon belül helyezkedik el, és ahol a virtuális vivőt tartalmazó erőforráselemek nem a gazdavivő vezérlési tartományához használt OFDM szimbólumokon vannak; és

adatokat továbbít a mobil kommunikációs eszközök egy második csoportjának a virtuális vivőn keresztül, ahol a második csoporthoz tartozó eszközök csökkentett sávszélesség-képességgel rendelkeznek az első csoporthoz képest.

2. Az 1. igénypont szerinti hálózati elem, ahol a hálózati elem továbbá képes több virtuális vivőt biztosítani a vezeték nélküli hozzáférési interfészen keresztül.

3. Az 1. vagy 2. igénypont szerinti hálózati elem, ahol a virtuális vivő ugyanabban a frekvenciatartományban van, mint a mobil kommunikációs eszközöknek a hálózati elemhez csatlakoztatásra szolgáló első csoportjához tartozó eszközök fizikai üzenetszóró csatornája.

4. Az 1-3. igénypontok bármelyike szerinti hálózati elem, amely továbbá úgy van kialakítva, hogy egy vagy több erőforráselemen egy olyan virtuális vivőjelet biztosít, amely azt jelzi, hogy a vezeték nélküli hozzáférési interfész egy virtuális vivőt biztosít; és adott esetben a jel a virtuális vivő első frekvenciatartományon belüli helyének jelzését és/vagy egy virtuális vivő sávszélességének jelzését tartalmazza.

5. Az 1. igénypont szerinti hálózati elem, ahol a virtuális vivőjelet biztosító hálózati elem egy olyan hálózati elem, amely képes biztosítani a virtuális hálózati jelet egy fizikai üzenetszóró csatormán, és adott esetben a fizikai üzenetszóró csatorna egy olyan csatorna, amelyet a hálózati elem biztosít a mobil kommunikációs

eszközök első csoportjához tartozó, a hálózati elemhez történő csatlakoztatásra szolgáló eszközök számára.

6. Az 1-5. igénypontok bármelyike szerinti hálózati elem, amely továbbá úgy működik, hogy egy virtuális vivőjelet biztosít egy bizonyos virtuális vivőre vonatkozóan a bizonyos virtuális vivőn belül.

7. Az 1-6. igénypontok bármelyike szerinti hálózati elem, ahol a hálózati elem a *3GPP Long Term Evolution* szabvány szerinti rendszerben használható.

8. Az 1-7. igénypontok bármelyike szerinti hálózati elem, ahol a virtuális vivőjel nincs megadva mindegyik részkeretben.

9. A 6. és 7. igénypontok szerinti hálózati elem, ahol a virtuális vivőjel néhány vagy az összes alvivőben megtalálható a virtuális vivőn és az egy vagy több OFDM szimbólumban.

10. Az 1-9. igénypontok bármelyike szerinti hálózati elem, ahol a hálózati elem úgy működik, hogy egy virtuális vivőt szolgáltat, ahol a második frekvenciatartomány sávszélessége legalább egy erőforrásblokknyi és kevesebb, mint száz erőforrásblokknyi.

11. A 10. igénypont szerinti hálózati elem, ahol a hálózati elem úgy működik, hogy akkor biztosítja a virtuális vivőt, ha a második frekvenciatartomány hat erőforrásblokknyi sávszélességű.

12. Az előző igénypontok bármelyike szerinti hálózati elem, ahol a hálózati elem továbbá úgy működik, hogy:

adatokat küld a downlink összeköttetésen időben egymást követő részkeretekben;

egy vagy több erőforráselemet alokál a virtuális vivőhöz a második frekvenciatartományban egy első részkeretben; és

egy vagy több erőforráselemet alokál a virtuális vivőhöz egy harmadik frekvenciasávban, az első részkeret utáni részkeretben, ahol a harmadik frekvenciatartomány kisebb, mint az első frekvenciatartomány és azon belül helyezkedik el.

13. A 12. igénypont szerinti hálózati elem, ahol a virtuális vivő sávszélessége és/vagy tartománya szabályos időközönként változik és adott esetben a virtuális vivő sávszélessége és/vagy tartománya mindegyik részkeretben vagy minden tíz részkeretben változik, és adott esetben a harmadik frekvenciatartomány azonos a második frekvenciatartománnyal.

14. A 12. vagy 13. igénypont szerinti hálózati elem, ahol a hálózati elem továbbá úgy működik, hogy a frekvenciatartományt a második frekvenciatartományból a harmadik frekvenciatartományra változtatja egy átvéletlen algoritmus alapján.

15. Eljárás egy hálózati elem felhasználására mobil kommunikációs eszközökhöz irányuló és/vagy

onnan érkező adatkommunikációhoz egy mobil kommunikációs rendszerben, amely eljárás során:

rendelkezésre bocsátunk egy vezeték nélküli hozzáférési interfészt, amely több ortogonális frekvenciaosztásos multiplexelési, OFDM, szimbólumot tartalmaz a mobil kommunikációs eszközhöz irányuló és/vagy onnan érkező adatkommunikáció számára, ahol a vezeték nélküli hozzáférési interfész egy downlink összeköttetésen egy olyan gazdavívót biztosít, amelynek több erőforráseleme van egy első frekvenciatartományban,

adatokat továbbítunk a mobil kommunikációs eszközök egy első csoportjának, ahol az adatok az első frekvenciatartományban lévő erőforráselemek között vannak szétosztva;

a vezeték nélküli hozzáférési interfészen keresztül egy virtuális vívót biztosítunk, ahol a virtuális vívónak egy vagy több erőforráseleme van egy második frekvenciatartományban, amely az első frekvenciatartománytól kisebb és azon belül helyezkedik el, és ahol a virtuális vívót tartalmazó erőforráselemek nem a gazdavívó vezérlési tartományához használt OFDM szimbólumokon vannak; és

adatokat továbbítunk a mobil kommunikációs eszközök egy második csoportjának a legalább egy virtuális vívón keresztül, ahol a második csoporthoz tartozó eszközök csökkentett sávszélesség-képességgel rendelkeznek az első csoporthoz képest.