



(86) Date de dépôt PCT/PCT Filing Date: 2011/08/19
(87) Date publication PCT/PCT Publication Date: 2012/02/23
(45) Date de délivrance/Issue Date: 2015/03/24
(85) Entrée phase nationale/National Entry: 2013/01/31
(86) N° demande PCT/PCT Application No.: IB 2011/053665
(87) N° publication PCT/PCT Publication No.: 2012/023120
(30) Priorités/Priorities: 2010/08/19 (EP10008644.6);
2010/08/19 (EP10008645.3); 2011/07/25 (EP11006064.7)


(51) Cl.Int./Int.Cl. *A61C 17/34* (2006.01),
A61C 17/22 (2006.01), *H02P 25/00* (2006.01),
H02P 7/29 (2006.01)

(72) Inventeurs/Inventors:
KLEMM, TORSTEN, DE;
VETTER, INGO, DE;
JUNGnickEL, UWE, DE;
HEIL, BENEDIKT, DE;
LUECKEL, KRIS, DE

(73) Propriétaire/Owner:
BRAUN GMBH, DE

(74) Agent: DIMOCK STRATTON LLP

(54) Titre : UNITE DE MOTEUR RESONANT ET DISPOSITIF ELECTRIQUE A UNITE DE MOTEUR RESONANT
(54) Title: RESONANT MOTOR UNIT AND ELECTRIC DEVICE WITH RESONANT MOTOR UNIT

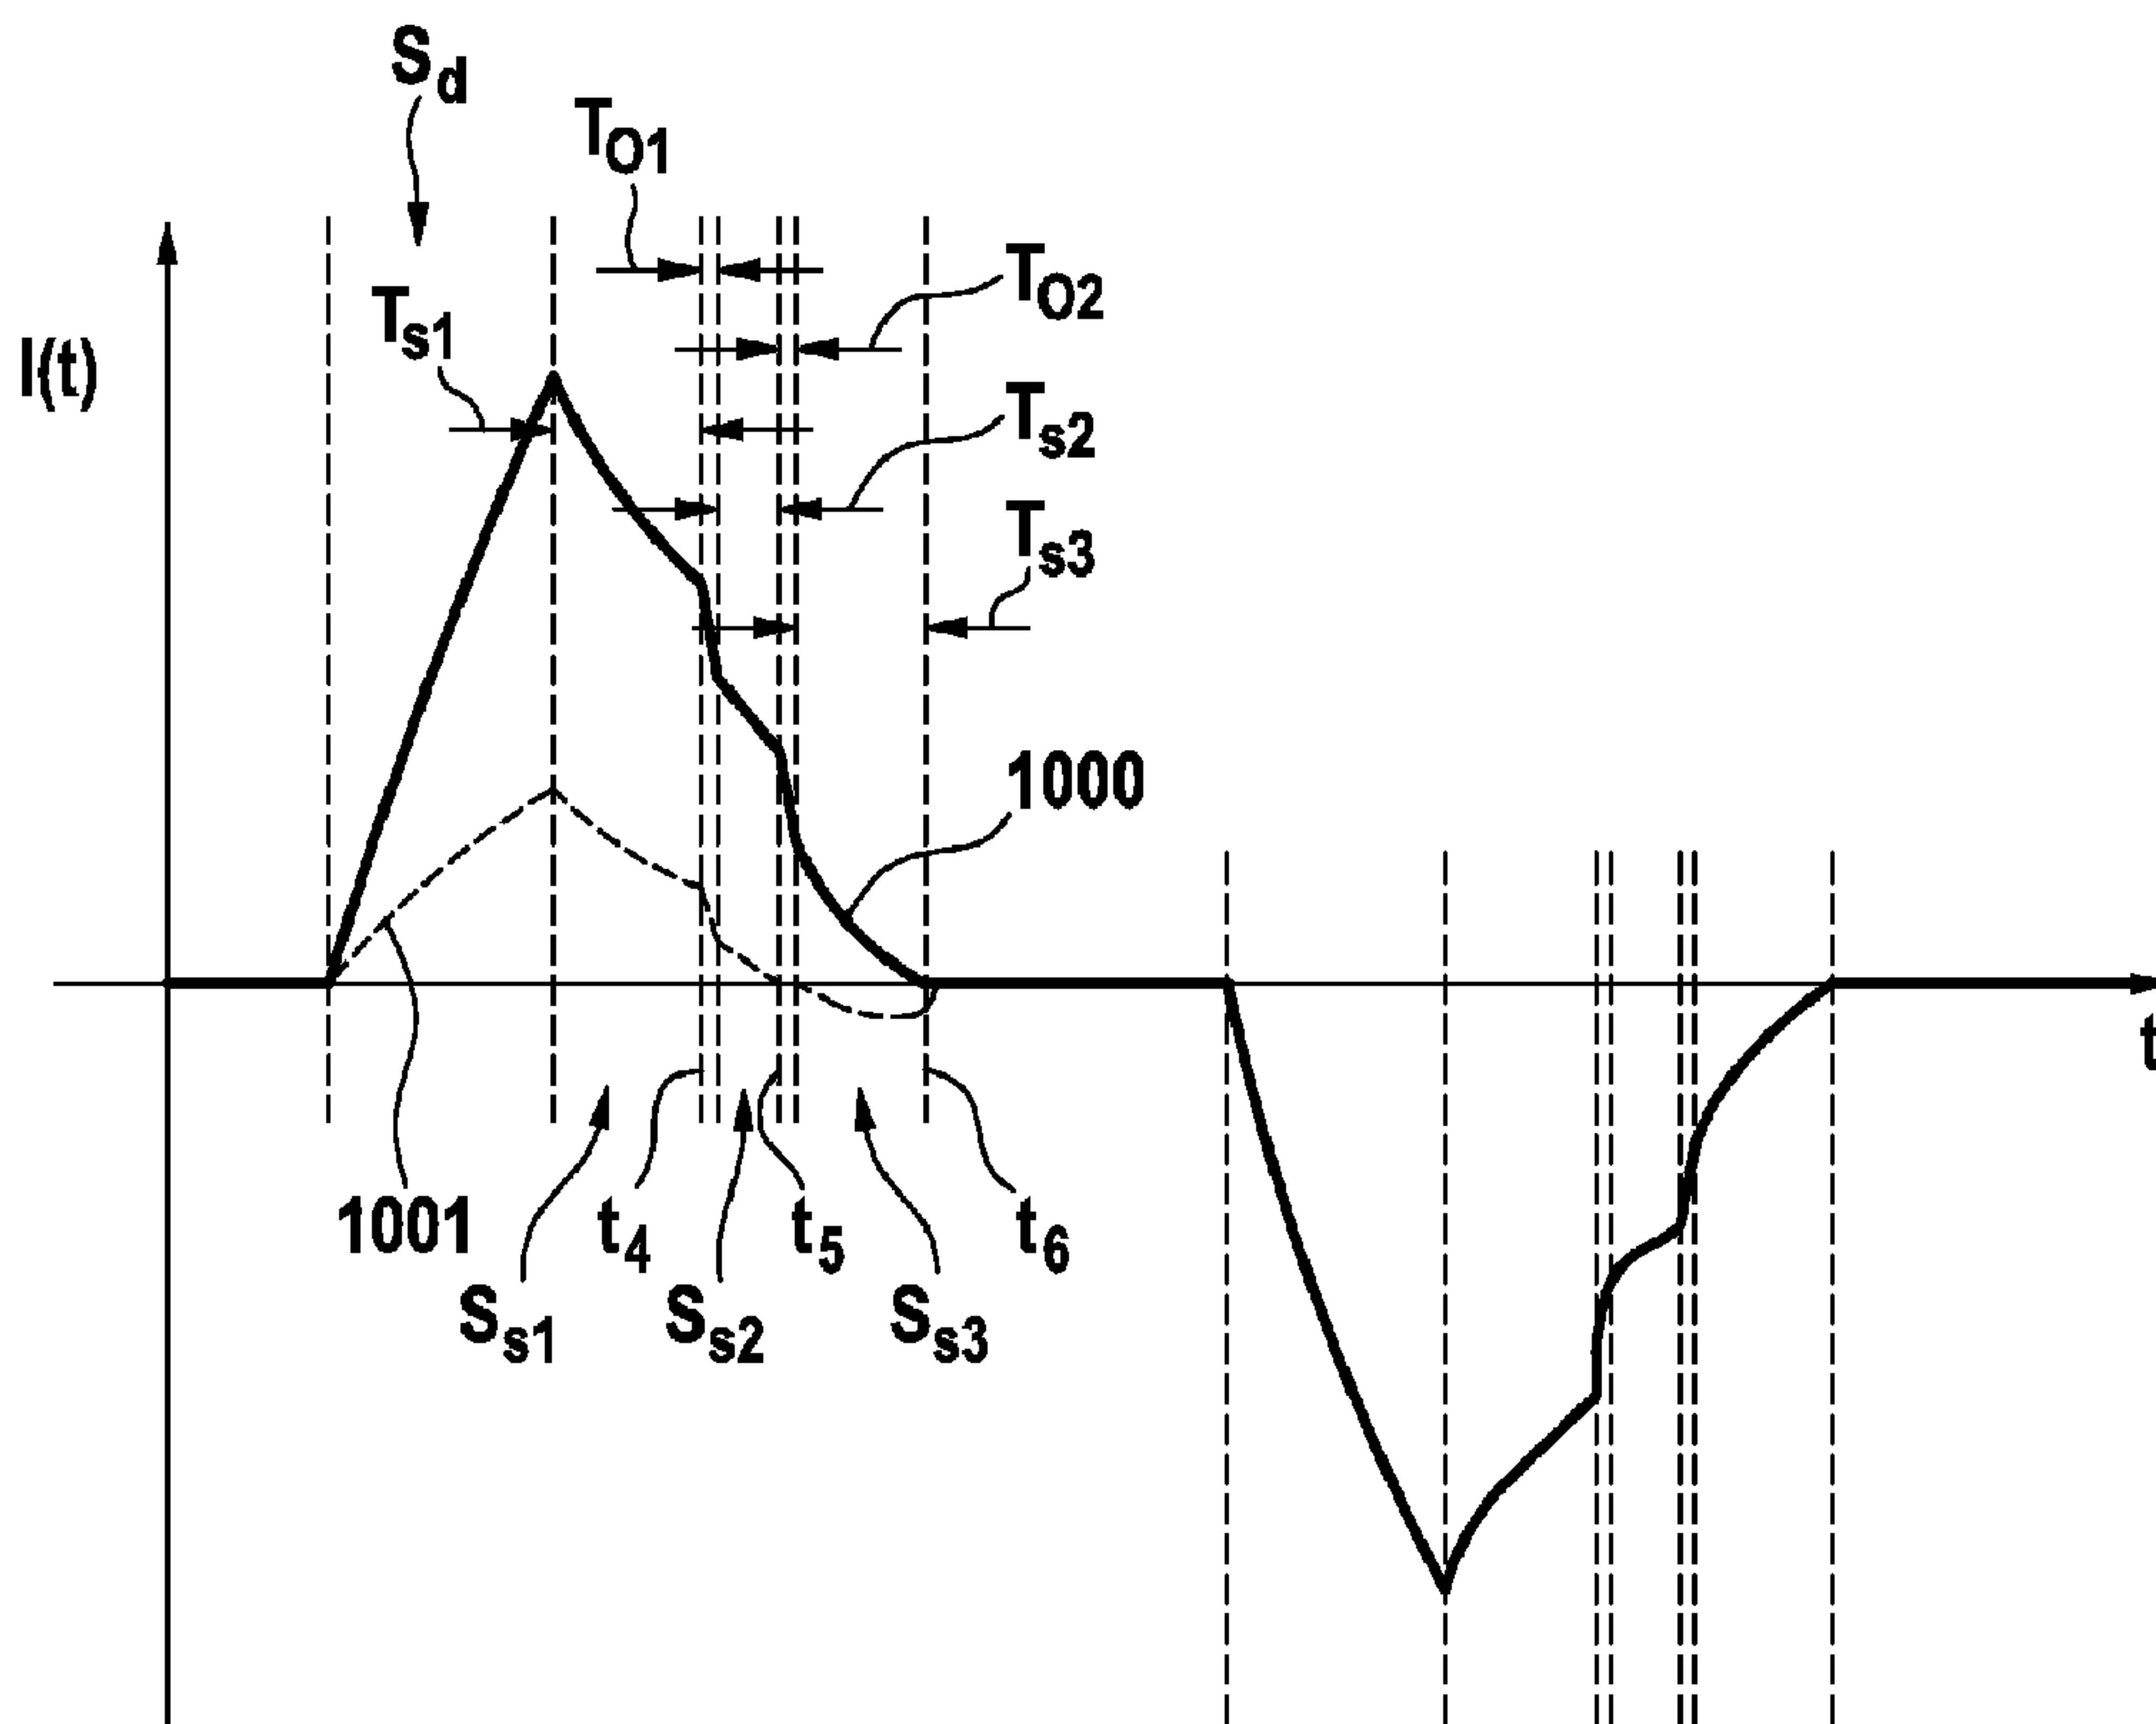

(57) Abrégé/Abstract:


The present disclosure proposes a resonant motor unit that has a resonant motor, a control unit for driving the resonant motor at a driving frequency, for short-circuiting the resonant motor during at least a first short-circuiting phase in successive driving cycles



(57) **Abrégé(suite)/Abstract(continued):**

and for concluding the first short-circuiting phases by switching off the current flow through the resonant motor at least at a predetermined first time instant within the driving cycles, a measurement unit for successively measuring at least a first voltage signal provided by the resonant motor at the predetermined first time instant, and an evaluation unit for determining whether the first voltage signal has changed between successive measurements.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

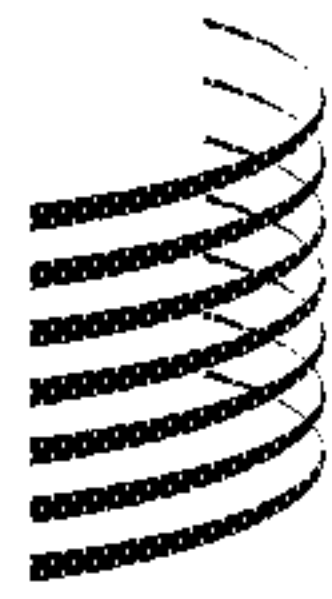(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
23 February 2012 (23.02.2012)

WIPO | PCT

(10) International Publication Number
WO 2012/023120 A3

(51) International Patent Classification:

A61C 17/34 (2006.01) *H02P 25/00* (2006.01)
H02P 7/29 (2006.01) *A61C 17/22* (2006.01)

(21) International Application Number:

PCT/IB2011/053665

(22) International Filing Date:

19 August 2011 (19.08.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10008645.3	19 August 2010 (19.08.2010)	EP
10008644.6	19 August 2010 (19.08.2010)	EP
11006064.7	25 July 2011 (25.07.2011)	EP

(71) Applicant (for all designated States except US): **BRAUN GMBH** [DE/DE]; Frankfurter Strasse 145, 61476 Kronberg-Taunus (DE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **KLEMM, Torsten** [DE/DE]; Rotdornweg 23, 65760 Eschborn (DE). **VETTER, Ingo** [DE/DE]; Hessenring 31, 61184 Karben (DE). **JUNGNICKEL, Uwe** [DE/DE]; Rossertstrasse 4, 61464 Koenigstein (DE). **HEIL, Benedikt** [DE/DE]; Kehlweg 3, 61239 Ober-Moerlen (DE). **LUECKEL, Kris** [DE/DE]; Talweg 6, 61476 Kronberg (DE).(74) Common Representative: **BRAUN GMBH**; c/o Eileen L. Hughett The Procter &, Gamble Company Global Patent Services 299, East Sixth Street Sycamore Building, 4th Floor, Cincinnati, Ohio 45202 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,

[Continued on next page]

(54) Title: RESONANT MOTOR UNIT AND ELECTRIC DEVICE WITH RESONANT MOTOR UNIT

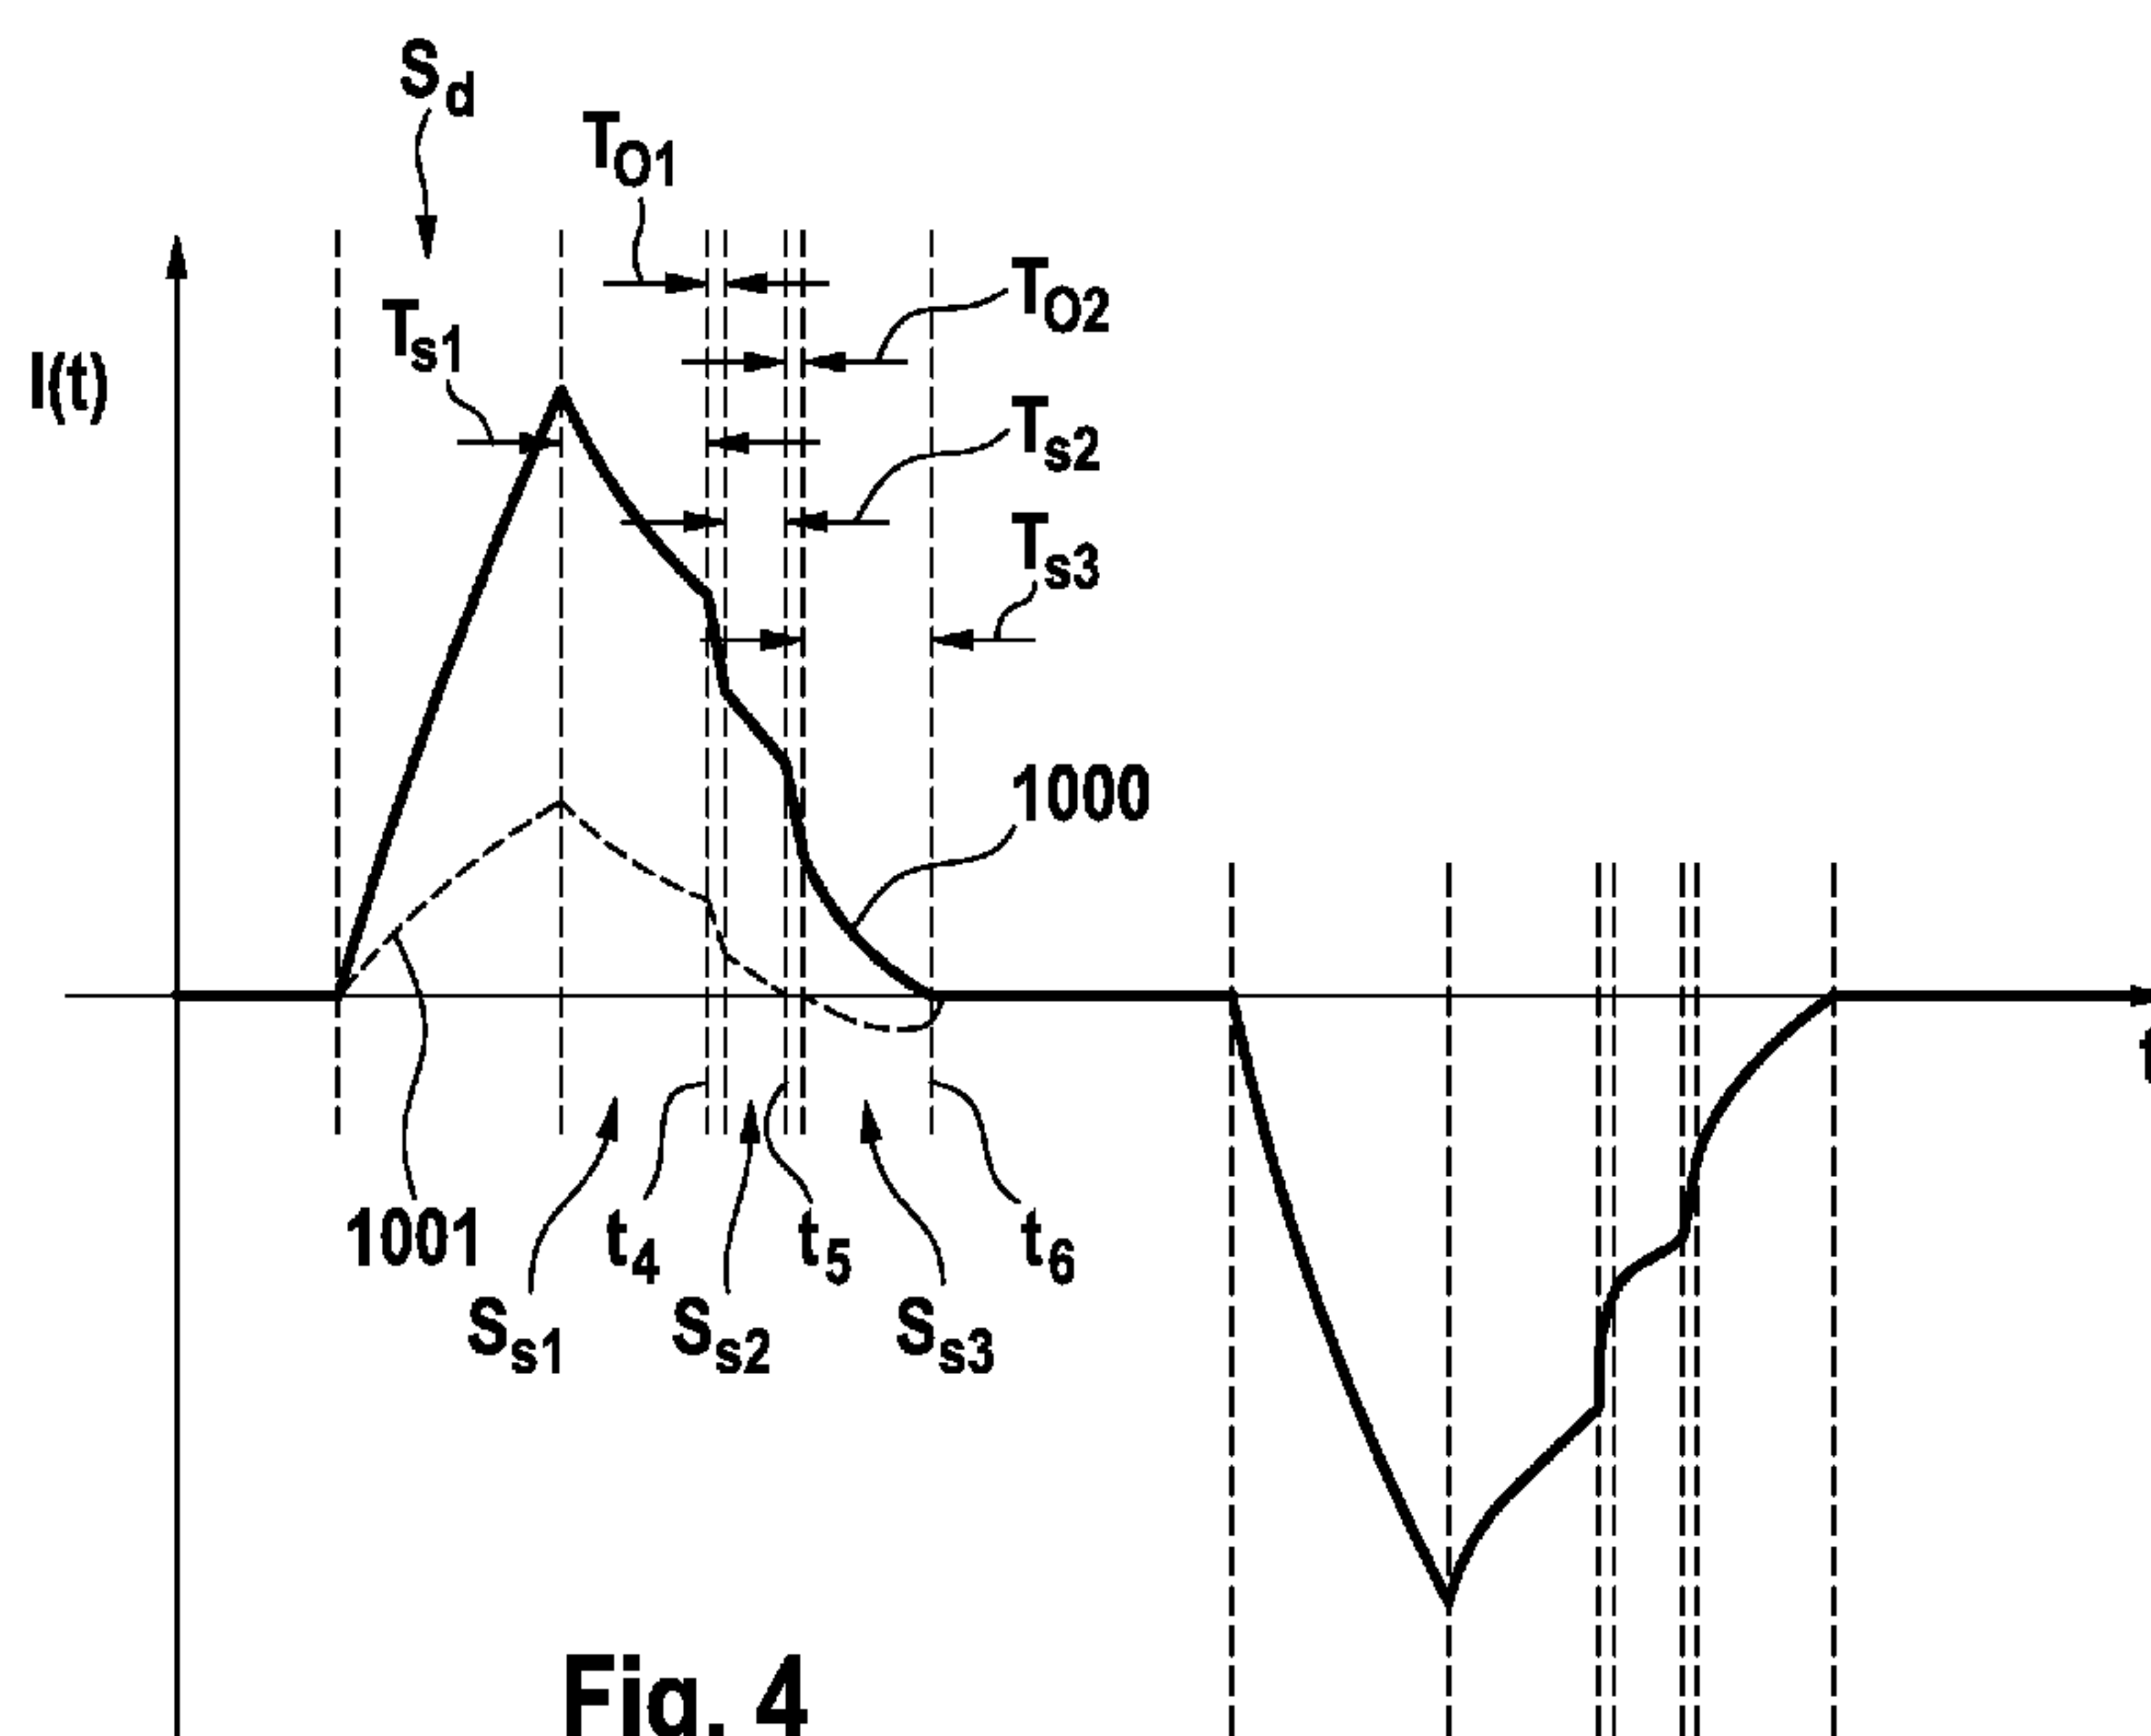**Fig. 4**

(57) Abstract: The present disclosure proposes a resonant motor unit that has a resonant motor, a control unit for driving the resonant motor at a driving frequency, for short-circuiting the resonant motor during at least a first short-circuiting phase in successive driving cycles and for concluding the first short-circuiting phases by switching off the current flow through the resonant motor at least at a predetermined first time instant within the driving cycles, a measurement unit for successively measuring at least a first voltage signal provided by the resonant motor at the predetermined first time instant, and an evaluation unit for determining whether the first voltage signal has changed between successive measurements.



WO 2012/023120 A3

WO 2012/023120 A3

ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
17 January 2013

Published:
— with international search report (Art. 21(3))

RESONANT MOTOR UNIT AND ELECTRIC DEVICE WITH RESONANT MOTOR UNIT

FIELD OF THE INVENTION

The present invention is generally related to resonant motor units and electric devices comprising
5 a resonant motor unit, as well as methods of controlling a resonant motor.

BACKGROUND OF THE INVENTION

A resonant motor may be controlled based on the load of the resonance motor. In order to
accomplish such a control, the motor current or the peak amplitude of the moving motor armature
10 of the resonant motor may be measured. This allows for the resonant motor to be controlled such
that constant peak amplitude is always achieved independent of the load of the motor. Such a
control is relatively complex and requires further elements in the control loop such as a position
detector measuring the peak amplitude. In a situation where only a simple control is required,
these solutions are relatively costly.

15

It is thus a desire to provide a resonant motor unit and a method of controlling a resonant motor
in a relatively simple way.

SUMMARY OF THE INVENTION

20 In accordance with at least some embodiments, there is provided a resonant motor unit having a
resonant motor, a control unit for driving the resonant motor at a driving frequency, for short-
circuiting the resonant motor during at least a first short-circuiting phase in successive driving
cycles and for concluding the first short-circuiting phases by switching off the current flow
through the resonant motor at least at a predetermined first time instant within the driving cycles,
25 a measurement unit for successively measuring at least a first voltage signal provided by the
resonant motor at the predetermined first time instant, and an evaluation unit for determining
whether the first voltage signal has changed between successive measurements.

In accordance with at least some embodiments, there is provided a method of controlling a
30 resonant motor having the acts of driving the resonant motor at a driving frequency, short-
circuiting the resonant motor during at least a first short-circuiting phase, switching off a current
flow through the resonant motor at least at a predetermined first time instant, measuring at least a

first voltage signal provided by the resonant motor at the predetermined first time instant, and evaluating whether the first voltage signal has changed between successive measurements.

BRIEF DESCRIPTION OF THE DRAWINGS

- 5 The present disclosure is further elucidated by detailed description of general embodiments of resonant motor units or control methods of resonant motors and by a detailed description of example embodiments, where reference is made to figures. In the figures
- Fig. 1 is a depiction of a resonant motor unit having a resonant motor and a control circuitry;
- 10 Fig. 2A is a schematic depiction of three movement-induced voltage curves relating to different applied loads and of respective curves of a current flow through the motor coil;
- Fig. 2B is schematic depiction of the current flow and the total voltage across the resonant motor for the two most extreme cases of Fig. 2A;
- 15 Fig. 3 is a schematic depiction of a control scheme of a resonant motor depending on a load level applied at the resonant motor;
- Fig. 4 is a schematic depiction of two examples of a current flow through a coil of a resonant motor where three predetermined measurement time instance are foreseen;
- 20 Fig. 5 is a schematic depiction of a current flow through the coil of a resonant motor where a predetermined measurement time instant is foreseen during a driving phase; and
- Fig. 6 is a depiction of an electric device that may comprise a resonant motor unit as proposed.

25

DETAILED DESCRIPTION OF THE INVENTION

- A resonant spring-mass system, such as a resonant motor (which may also be called an oscillating motor or a vibrating motor) has a resonance frequency $f_R(m;k_s)$ that is dependent on the relevant mass m and the relevant spring constant k_s . The resonant spring-mass system can be
- 30 excited by a periodic driving force $F(t)$ having a driving frequency f_d , which results in a driven periodic (typically sinusoidal) movement of the mass.

In some embodiments, a resonant motor has a stator comprising a motor coil (which may be secured to a housing of an electric device in which the resonant motor is disposed) and a movably mounted motor armature comprising one or several permanent magnets. In an unpowered state, the movably mounted motor armature is held in a rest position by a return force that in an embodiment may be provided by a spring or a spring arrangement. When an alternating supply voltage is provided at the motor coil (i.e. energy is introduced into the resonant motor), the developing electromagnetic field of the motor coil drives the movably mounted motor armature into a periodic movement. At least some of the movement of the motor armature is against the return force provided by the return force element. As long as energy is continuously provided to replace the energy consumed by the resonant motor, the resonant motor may achieve and then stay in an equilibrium state in which the peak amplitude of the moving motor armature is kept constant as long as the load of the resonant motor is kept constant.

The frequency f_m of the driven periodic movement of the motor armature is determined by the driving frequency f_d , i.e. $f_m = f_d$. The periodic driving force and the driven periodic movement have a defined phase shift ϕ that depends, inter alia, on the difference between the driving frequency f_d and the effective resonance frequency f_r . When the resonant motor (or in general: a resonant spring-mass system) is driven at its effective resonance frequency, i.e. $f_d = f_r$, the driven periodic movement has a phase shift of $\phi = -\pi/2$, i.e. $\phi = -90$ degrees, to the periodic driving force. The spring-mass system is driven with highest efficiency when the driving frequency and the resonance frequency coincide.

Fig. 1 shows an example embodiment of a resonant motor unit 800 comprising a resonant motor L and a control circuitry for controlling the resonant motor L. In the shown example embodiment, the resonant motor L is arranged in the bridge section of an H-bridge (also called a full bridge) arrangement having four switches S1, S2, S3, S4 (one switch being arranged in each of the legs of the H-bridge). The switches S1, S2, S3, S4, may be realized as MOSFETs in one embodiment, or as other switching devices such as transistors in other embodiments. Each of the switches S1, S2, S3, S4 may include a protective element such as a protective diode arranged parallel to the switch to protect the switch from over-voltages and to allow for commutation of current over the protective diode, e.g. when a current flow through the inductor of the resonant motor L (i.e. the coil of the resonant motor L) is switched off. In some embodiments, the resonant motor unit 800 comprises a functional element coupled to the motor armature for driven

movement during operation. The resonant motor unit 800 may be used in an electric device such as an electric toothbrush as shown in Fig. 6 or in an electric shaver, a tool, a household appliance etc.

5 As has been stated above, the armature of the resonant motor L can be driven into a periodic movement by applying a periodic drive force. This periodic drive force is generated by a control unit 400 switching the switches S1, S2, S3, S4 on and off within a driving cycle such that a supply voltage from a supply voltage source 500 may be applied at the resonant motor L in positive half cycles and negative half cycles. During a positive half cycle of a driving cycle, the
 10 supply voltage may be applied in a positive direction, e.g. S1 and S4 are closed while S2 and S3 are open, and in a negative half cycle of the driving cycle, the voltage may be applied in a negative direction, e.g. S2 and S3 are closed while S1 and S4 are open. If the resonant motor L is not continuously driven (i.e. not continuously supplied with energy), damping typically inherently present in any real system would gradually reduce the motor amplitude until the
 15 moving motor armature stops.

At constant driving frequency f_d and constant resonance frequency (for example in no load condition f_R , and in a loaded condition f_r) the amplitude of the moving motor armature can be varied by increasing or decreasing the driving force (i.e. by increasing or decreasing the energy
 20 that is periodically put into the resonant motor). The increasing or decreasing of the driving force can be accomplished by increasing or decreasing the time length of the driving phases (i.e. the time length during which the supply voltage is applied at the resonant motor L).

Further, the control unit 400 may control the switches S1, S2, S3, S4, to short-circuit the resonant
 25 motor L during at least a first short-circuiting phase following the driving phase. For example, the control unit 400 may close switches S1 and S2 or S3 and S4 during the short-circuiting phase (while the respective other two switches, S3 and S4 or S1 and S2, respectively, are open). The control unit 400 may further control the switches S1, S2, S3, S4, such that at least at a predetermined first time instant the first short-circuiting phase is concluded, and the current flow
 30 through the resonant motor (i.e. through the motor coil) is switched off, i.e. all switches are opened. Such phases of driving a resonant motor are generally described in DE 102 46 520 A1 together with potential further phases.

A voltage U_M at the motor (measured against ground potential 600) may be provided at an input 700 of a measurement unit 401. The measurement unit 401 is in the shown embodiment realized as a part of the control unit 400. The measurement of the voltage U_M may be performed in temporal synchrony with the switching-off of the current flow through the resonant motor L. The voltage signal provided by the resonant motor L when the current flow is switched off may then be evaluated by an evaluation unit 402 that in the shown embodiment is also realized as a part of the control unit 400. The voltage U_M is discussed further hereafter.

Generally, either one or both of the measurement unit 401 and the evaluation unit 402 may be realized as being separate from the control unit 400. Alternatively, at least two units from the group consisting of the control unit 400, the measurement unit 401, and the evaluation unit 402 may be realized as an integral unit, such as a microprocessor on which the functionalities of the combined units are realized.

When the resonant motor L is in a constantly driven state, the motor armature oscillates with constant amplitude as long as the (mechanical) load on the motor does not change. When the supply voltage is applied at the resonant motor L during a driving phase, a current flow builds up through the resonant motor L. The current flow build up is, inter alia, dependent on the difference between the driving frequency f_d and the resonance frequency (either no load resonance frequency f_R or effective resonance frequency f_r), i.e. the current flow rise is inter alia dependent on the phase shift between periodic driving force and driven periodic movement. When the motor is then short-circuited during a first short-circuiting phase directly following the driving phase, i.e. when the supply voltage is not applied across the motor coil anymore, then current flow is driven by the voltage induced in the motor coil via the moving motor armature. At the end of the first short-circuiting phase, the remaining current flow may be switched-off by opening all switches of the H-bridge during a switching off phase. This will be explained in more detail further below.

The total voltage U_M across a resonant motor is given by a self-induced voltage, $U_L = L \cdot dI(t)/dt$, where L is the inductance of the coil and $dI(t)/dt$ is the temporal change of the motor current (i.e. the first derivative of the motor current $I(t)$ with respect to the time t), a movement-induced voltage U_{ind} generated in the motor coil by the movement of the permanent magnets relative to

the coil, and a voltage developing at the ohmic resistance of the motor coil, $U_R = I \cdot R$, where I is the motor current and R is the resistance of the motor coil, so that

$$U_M = U_L + U_{ind} + U_R = L \cdot dI(t)/dt + U_{ind} + I \cdot R \quad .$$

5

It has here been omitted to indicate that all voltages appearing in this equation are time dependent, i.e. $U_M \equiv U_M(t)$ etc. The movement-induced voltage U_{ind} typically is sinusoidal due to its dependency on the movement of the driven armature with respect to the stator, which typically is sinusoidal. As previously said, the driven periodic movement has a phase shift to the periodic
10 drive force, which is dependent on the difference between the (effective) resonance frequency of the resonant motor and the driving frequency.

In the following, the resonance frequency of a resonant spring-mass system such as a resonant motor in a no-load condition is denoted by f_R , the effective resonance frequency that develops
15 when the resonant motor is loaded, i.e. when one of the relevant parameters defining the resonance frequency is changed, is denoted by f_r .

A resonant motor may be utilized in an electric device (e.g., an electric oral hygiene device or a hair removal device etc.) to drive a functional element into motion, in particular into an
20 oscillating motion. In an embodiment in which the electric device is an oral hygiene device, such as an electric toothbrush, the functional element may be a brush head comprising a plurality of cleaning elements extending from a surface of the brush head. When the brush head is pressed against a surface, e.g. a tooth surface, then at least one of the effective mass of the resonant motor and the effective spring constant of the resonant motor is influenced. This pressure dependent
25 influence of at least one of the effective mass or effective spring constant leads to a variation of the effective resonance frequency f_r due to the dependence of the resonance frequency on these parameters (i.e. the effective resonance frequency of the electric device changes over time during operation in case the load on the resonant motor is changed). In an embodiment, the driving frequency f_d is kept constant, while the effective resonance frequency f_r is varied, e.g. due to
30 pressure applied on the driven functional element. When a mechanical load is applied at the resonant motor, also the peak amplitude of the driven periodic movement is varied. It is stated here that in some embodiments the effective resonance frequency f_r under applied mechanical load may not be considerable different to the resonance frequency f_R of the resonant motor in a

no-load condition. Nevertheless, a mechanical load applied at the resonant motor (i.e. at the functional element driven by the resonant motor) also has an effect on the peak amplitude of the driven periodic movement. Hence, applying a mechanical load at the resonant motor varies the movement induced voltage U_{ind} with respect to phase shift and height of the peak amplitude.

- 5 Similarly, the movement induced voltage U_{ind} is changed with respect to the periodic driving force when the driving frequency f_d is changed as this has an effect onto the phase shift between periodic driving force and driven periodic movement.

In the following, reference is made to Figs. 2A and 2B. Figure 2A shows the movement-induced
10 voltage $U_{ind}(t)$ and the current flow $I(t)$ through the motor coil for three different example cases. In the shown example cases, the load applied at the resonant motor is varied but the driving frequency is fixed. The shown curves relate to a single driving cycle during an equilibrium state of the resonant motor. The three example curves are indicated by U_{ind1} , U_{ind2} , and U_{ind3} for the movement-induced voltage and by $I1$, $I2$, and $I3$ for the current flowing through the motor
15 coil. In these three exemplary curves, a time length T_d of a first driving phase S_d and a time length T_s of a first short-circuiting phase S_s following the driving phase S_d and followed by a switching-off of the current flow at a fixed predetermined first time instant t_1 are fixed within the first (here: positive) half cycle.

- 20 The movement-induced voltage $U_{ind}(t)$ is phase shifted with respect to the position function (i.e. the driven periodic movement) of the driven moving motor armature by -90 degrees. As at the centre position the velocity of the moving motor armature in the powered state is highest and thus the movement induced voltage is highest, the thick curve U_{ind1} shows a case where the (effective) resonance frequency is relatively far away from the driving frequency, and the thin
25 line U_{ind2} shows a case where the resonance frequency is relatively close to the driving frequency. The medium line U_{ind3} indicates a case where the current flow is approximately zero at the predetermined first time instant t_1 at which the current flow is switched off.

It can further be seen that the peak amplitude of the movement-induced voltage is different for
30 the three different curves U_{ind1} , U_{ind2} , and U_{ind3} . In some embodiments, the change in the effective resonance frequency upon applied mechanical load may be relatively small, and the major change in the functional behavior of the movement-induced voltage is given by a change of the peak amplitude. In some other embodiments, the change of the effective resonance

frequency and thus the change in the phase shift may be considered dominant. This behavior depends on the kind of motor used and on the kind of functional element driven by the resonant motor.

- 5 Fig. 2B shows the (total) voltage $U_M(t)$ (of which $U_{ind}(t)$ is a component) across the resonant motor and again the current flow $I(t)$ through the motor coil for the two extreme cases (U_{ind1} and U_{ind2}) shown in Fig. 2A. The voltage across the motor $U_M(t)$ is indicated by U1 (thick line) and U2 (thin line), which curves correspond to the current flow indicated by lines I1 (thick line) and I2 (thin line), respectively.

10

Referring to Figs. 2A and 2B, the resonant motor is driven at a constant driving frequency f_d . According to an embodiment of the control scheme of the present disclosure, in each driving cycle a first driving phase S_d having a predetermined time length T_d is provided, which first driving phase is followed by a first short-circuiting phase S_s having a predetermined time length T_s . The driving phase S_d and short-circuiting phase S_s may be applied only in a first half-cycle (e.g. only in the positive or only in the negative half cycle) of a driving cycle. In the shown embodiment, the first half cycle is the positive half cycle.

15

In the shown embodiment, a second driving phase S_d' and a second short-circuiting phase S_s' may also be applied during the second half cycle (here: the negative half cycle) of the driving cycle. In another embodiment, no driving phase and no short-circuiting phase are applied during the second half cycle. In some embodiments, at least one of the second driving phase S_d' and the second short-circuiting phase S_s' applied in the second half cycle may have a different time length than their respective counterpart phase in the first half-cycle. In an embodiment, two or more driving phases may be applied in the first and/or second half cycle and each may be followed by a respective short-circuiting phase.

25

During the first driving phase S_d (i.e., during the time period during which the supply voltage is applied at the resonant motor), a current flow $I(t)$ builds up in the motor coil. The rise of the current flow is dependent, inter alia, on the phase shift φ between the periodic driving force and the driven periodic movement and further on the peak amplitude U_{peak} of the movement-induced voltage U_{ind} . The peak amplitude U_{peak} and the phase shift φ determine the actual height of the movement-induced voltage at a certain time instant t within the driving cycle, i.e. $U_{ind}(t) = U_{ind}(t;$

30

ϕ , U_{peak}), and this actual height of the movement induced voltage influences the current flow build-up through the resonant motor. As these two factors are changed by a varying mechanical load applied at the resonant motor, the current flow build-up through the resonant motor depends on the applied load. Similarly, when the driving frequency f_d is changed, at least the phase shift
 5 of the movement-induced voltage U_{ind} with respect to the periodic driving force changes and thus the current-flow build-up during the driving phase will be influenced.

As said, these differences in the movement-induced voltage U_{ind} influence, inter alia, the current build-up during the first (or second) driving phase S_d (or S_d'). The current-flow build-up is also
 10 dependent on the driving phase start time t_d at which the driving phase is initiated. In some embodiments, the driving phase start time t_d may be chosen once and then kept fixed. Accordingly, when t_d and T_d are fixed, the current flow $I(t)$ through the motor coil during the driving phase S_d depends on the phase shift (i.e., on the difference between the driving frequency f_d and the effective resonance frequency f_r) and on the peak amplitude of the motion-induced
 15 voltage U_{ind} , which are influenced by the mechanical load applied at the resonant motor or by varying the driving frequency.

A first short-circuiting phase S_s having a predetermined time length T_s can follow after the first driving phase S_d . The current flow through the motor coil is then driven by the movement
 20 induced voltage U_{ind} and generally decreases during the first short-circuiting phase S_s . At the end of the first short-circuiting phase S_s , the current flow through the resonant motor may be switched off at a predetermined first time instant t_1 . Depending on the various described factors, the height of the current $I(t_1)$ flowing through the coil of the resonant motor at the predetermined first time instant t_1 may be positive or negative (or may be just exactly zero) as is shown by the
 25 three example curves I1, I2, and I3. Thus, the current value $I(t_1)$ at the predetermined first time instant t_1 depends on the difference between driving frequency f_d and effective resonance frequency f_r (i.e. the phase shift) and on the peak amplitude of the motion-induced voltage.

When the current flow through the resonant motor changes its sign, also the total voltage at the
 30 resonant motor U_M changes its sign. At the zero-crossing of U_M (where the waveform U_M crosses the time axis in Figure 2B) at time t_1 , the current flow is zero and the voltage lying at the ohmic resistance of the resonant motor U_R is thus zero, $U_R = 0$. Then, the self-induced voltage U_L and the movement-induced voltage U_{ind} are identical in voltage height but have different sign, i.e. U_L

= - U_{ind} . While the total voltage at the motor is then zero, the two components adding up to zero need not necessarily be small. The absolute height of the movement-induced voltage relates to the residual energy in the resonant motor at switch-off. Typically, the current flow at the predetermined first time instant t_1 is not zero (but typically small); the voltage at the ohmic
 5 resistance is then also small as it is proportional to the current. The absolute height of the movement-induced voltage U_{ind} then determines the residual energy in the motor at the switch-off instant.

When the current flow through the motor coil is switched off at the end of the first short-
 10 circuiting phase, the resonant motor responds with a first voltage signal P_1 allowing the residual current to commute over the protective diodes of the switches of the H-bridge circuit (so-called back electromagnetic force, B-EMF). The height of this voltage signal P_1 may be limited by a protective element, e.g. a protective diode being arranged parallel to each of the switches. Further, the height of the first voltage signal P_1 depends on the switching speed with which the
 15 relevant switch (e.g. S4 shown in Fig. 1, after a short-circuiting phase in which S3 and S4 were closed and S1 and S2 were open) is opened as the switching speed determines the change in current flow $dI(t)/dt$.

The sign of this first voltage signal P_1 depends on whether the residual energy in the resonant
 20 motor is positive or negative. In Fig. 2B the thick line I1 shows a case where the residual current flow at the predetermined first time instant t_1 is positive and the voltage at the resonant motor $U_M(t_1)$ is negative prior to the switch-off phase. In this case the sign of the first voltage signal P_1 is positive. The thin line I2 indicates a case where the residual current flow through the resonant motor is negative at the predetermined first time instant t_1 and the voltage at the resonant motor
 25 $U_M(t_1)$ as indicated by line U2 is positive prior to the switch-off phase. In this case the sign of the first voltage signal P_1 is negative.

In light of the above, in some embodiments, the system may be pre-calibrated so that the first
 30 voltage signal P_1 changes its sign under the condition that the applied load changes from being above (or below) a first predetermined load value to being below (or above) this value. In this manner, it may be determined whether the resonant motor has experienced a transition from an applied load less than a first predetermined load value D1 (shown in Figure 3) to an applied load that is greater than the first predetermined load value D1 (e.g., a brush head of an electric

toothbrush going from a non-engaged state to an engaged state wherein the brush head is applied to the surface of a user's tooth or teeth). As the time length T_d of the driving phase S_d may need to be fixed to periodically put a certain amount of energy into the resonant motor, the time length T_s of the short-circuiting phase S_s can be varied such that the sign change of the voltage signal

5 occurs at the first predetermined time instant under a given applied load. Hence, this allows measuring when a certain load is applied onto the functional element driven by the resonant motor.

Similarly, the driving frequency f_d may be changed between successive measurements and the

10 predetermined first time instant t_1 may be chosen such that the sign change of the first voltage signal P_1 happens when the driving frequency f_d coincides with the resonance frequency f_R or when the driving frequency f_d coincides with a target frequency f_t that has a predetermined distance to the resonance frequency, $f_t = f_R + \Delta f$. In some embodiments, the control unit may be arranged to drive the resonant motor with a start driving frequency and may then successively

15 change the driving frequency continuously, quasi-continuously or step-wise until a change in the sign of the voltage signal indicates that the current driving frequency has a predetermined distance to the resonance frequency. Hence, the control unit may be arranged to automatically determine the optimal driving frequency. By such a design, tolerances in the motor parts that lead to differences in the resonance frequency of a resonant motor when compared to other resonant

20 motors of the same kind and/or aging of the motor parts that lead to differences of the resonance frequency of the resonant motor over time can be automatically coped with. In some embodiments, the control unit would employ a start driving frequency that should be above (or below) the resonance frequency that may occur due to tolerances and/or aging and the driving frequency would then successively be reduced (or increased) until the predetermined target

25 frequency is reached.

In some embodiments, where only the sign change of the voltage signal P_1 is to be determined, it may be sufficient that the measurement unit only measures the sign of the voltage signal P_1 . This can e.g. be realized by applying the first voltage signal P_1 at a standard digital input of a

30 microcontroller where a voltage signal above a certain threshold signal is detected as a clear HIGH signal and any voltage signal below this threshold is detected as a LOW signal. In cases where the positive voltage signal could become so small that it may not be securely detected anymore as a clear HIGH signal (e.g. when the residual current flow is low and the movement-

induced voltage is low at the predetermined first time instant), the switching speed of the respective switch or switches may be increased to generate a voltage signal that is (at least for a short period) high enough to be detectable as a clear HIGH signal. The measurement of the first voltage signal would then only need to deliver a binary single-digit output to the evaluation unit.

5

In some embodiments, the first voltage signal P_1 may be fed to a measurement unit realized as a high-speed analog circuitry that can detect the height of the first voltage signal as well as the width of the voltage signal. In some embodiments, a digital circuitry having temporal and voltage resolution being good enough to detect width and height of the voltage signal may be used. The evaluation unit may then have a storage unit having a predetermined table in which load values or frequency values may be assigned to height values and/or width values of the voltage signal such that the actual applied load value or the difference between the actual driving frequency to the resonance frequency can be computed from this table and the determined height and/or width values.

15

When a sign change in the first voltage signal is detected, the control unit may then control the resonant motor in such a way that a driving parameter is changed. With reference to Fig. 2A and Fig. 3, the first driving phase S_d may be increased by, for example, increasing the time length T_d so that the moving motor armature moves with a desired higher peak amplitude A_p . Instead of increasing the time length T_d , an increase in the peak amplitude may also be achieved by increasing the applied supply voltage (e.g. by respective use of a step-up converter for boosting the voltage provided by the supply voltage source). In some embodiments, both the supply voltage and the time length T_d may be increased in order to increase the amplitude.

20

The time length T_d of the driving phase and the time length T_s of the short-circuiting phase (together the total driving time length T_{ds}) may be chosen in accordance with the peak amplitude that is to be reached. For small peak amplitudes, the total driving time length T_{ds} may be chosen to be about 1% of the length of the half cycle time length, while for high peak amplitudes, the total driving time length T_{ds} may be chosen to be up to 99% of the half cycle time length. While the driving frequency f_d may in general have every sensible value, the driving frequency f_d may in some embodiments be in the range of between about 1 Hz to about 10,000 Hz. In an embodiment in which the electric device is realized as an oral hygiene device such as an electric toothbrush, the driving frequency f_d may be in the range of between about 30 Hz to about 500

30

Hz. In some embodiments where the electric device is an electric toothbrush, the driving frequency f_d may be greater than about 120 Hz. The driving frequency can be greater than about 120 Hz, greater than about 130 Hz, greater than about 140 Hz, greater than about 150 Hz, greater than about 160 Hz, greater than about 170 Hz, greater than about 180 Hz, greater than about 190 Hz, greater than about 200 Hz, or less than about 200 Hz, less than about 190 Hz, less than about 180 Hz, less than about 170 Hz, less than about 160 Hz, less than about 150 Hz, less than about 140 Hz, less than about 130 Hz, and/or any number or any range within or including these values.

With reference to Fig. 4 it is noted that it is not required to first have a driving phase followed by a short-circuiting phase in order to generate a first voltage signal as described. In some embodiments, a first short-circuiting phase is initiated while no residual current flow through the motor coil is present (i.e. without a directly previous driving phase). For example, a first short-circuiting phase may follow after a relatively long switch-off phase that has allowed all residual current to commute over a protective diode (i.e. the short-circuiting phase starts without any residual current flow through the motor coil). Line 1001 in Fig. 4 shows a case where the residual current flow is zero after a switch-off phase initiated at time instant t_5 . Current flow build-up through the motor coil is then driven by the movement-induced voltage during the first short-circuiting phase and hence is dependent on the sign of the motion-induced voltage. The current flow thus essentially changes its sign when the varying phase shift changes the sign of the movement-induced voltage (hence, embodiments where no considerable phase shift changes occur may not allow measuring any sign change). The relatively low current flow thus generated can then be used to generate the first voltage pulse by switching-off the current flow. In other words, this essentially simply probes the sign of the movement-induced voltage before the predetermined first time instant.

25

Fig. 3 is a schematic depiction showing peak amplitude curves A1 (thin line) and A2 (thick line) and corresponding noise level curves N1 (thin dashed line) and N2 (thick dashed line) for an electric device that shall work at a certain peak amplitude A_p of the driven functional element of the electric device when a predetermined first load value D1 is achieved during operation. The predetermined first load value D1 relates to the pressure applied on the functional element which influences the phase shift of the movement-induced voltage with respect to the driving function (i.e. the effective resonance frequency is changed) and the peak amplitude of the movement-induced voltage. Without loss of generalization, it is assumed that the load applied at the

30

functional element and the change of the phase shift (i.e. effective resonance frequency) and of the peak-amplitude of the movement-induced voltage have a clear functional relation for a given resonant motor unit.

5 Thin line A1 indicates the behavior of the peak amplitude of the oscillatory motion of a functional element driven by a resonant motor when mechanical load is applied on the resonant motor without applying the discussed control method. In contrast, thick line A2 indicates an example embodiment of the behavior of the peak amplitude of the functional element when a proposed control method is used. As indicated by the thick line A2, the control unit of the
10 resonant motor unit may be arranged to drive the resonant motor at a predetermined driving frequency f_d so that a low peak amplitude A' of the functional element is achieved when the electric device is switched on and/or under a load of less than D1. As depicted in Fig. 3, the start peak amplitude A of the functional element is higher than the start peak amplitude A' when the disclosed control method is employed.

15 Without loss of generality, the curves A1 and A2 here show a decrease in peak amplitude with increasing load D. With a resonant motor (or a control method for controlling a resonant motor) as proposed herein, the resonant motor may be driven at a desired peak amplitude A_p when a first predetermined load value D1 is reached, and it may be driven at a low amplitude A' when the
20 electric device is operated without load and/or at a load which is less than D1.

Low starting amplitude may provide a user with a perceivable signal of the operational state of the electric device. The low amplitude A' may also prevent water or any substance (e.g. toothpaste) that may be applied onto the functional element of the electric device from being
25 splattered about. Additionally, a relatively low noise level may be achieved as is indicated by the thick dashed line N2 in comparison to the thin dashed line N1. N1 indicates the noise level of the electric device without the herein proposed resonant motor unit and/or control methods, respectively.

30 As will be explained in more detail further below, the resonant motor unit may also be arranged to measure and evaluate a second voltage signal that may be indicative of whether the applied load has changed from being above (or below) a second predetermined load value D2 to being below (or above) the second predetermined load value D2. This may allow for the control of the

resonant motor with respect to this predetermined second load value D2. The control unit may in particular be arranged to drop to a low or even zero peak amplitude of the driven functional element when the second predetermined load value D2 is reached or exceeded as is schematically indicated by thick line A2. For example, when the resonant motor drives a functional element
5 being a brush head of an electric toothbrush, it can be signaled to a user that teeth and gums are brushed with too high pressure by decreasing the amplitude and/or driving frequency. In addition or alternatively, the control unit may be arranged to indicate a certain applied load to a user. E.g. in the example as shown, a yellow light source may be lighted when the applied load is below the predetermined first load value D1 to indicate that the applied load is not effective for the intended
10 purpose (e.g. tooth brushing). A green light source may be lighted when the applied load is between the predetermined first load value D1 and the predetermined second load value D2 to indicate that the applied load lies within a preferred range. A red light source may lighted if the applied load has reached or exceeded the predetermined second load value D2 to indicate to the user that a too high load is being applied. Any kind of indication can be utilized, e.g. instead of a
15 visually perceivable indication, an audible indication may be used or a tangibly perceivable indication may be used.

Additionally, combinations of indications provided to the user are contemplated. For example, the control unit may decrease the amplitude and/or frequency, and an additional signal may be
20 provided to the user. For example, the additional signal may include a visual, audible, tactile, the like or combinations thereof.

In an embodiment, at least two or more successive short-circuiting phases are each concluded by a switch-off phase as is schematically shown in Fig. 4, where the current flow $I(t)$ through the
25 motor coil is shown for two successive half cycles and where three predetermined time instances t_4 , t_5 , and t_6 were chosen to be able to discern three different predetermined load values. After a first driving phase S_d , the resonant motor is short-circuited during a first short-circuiting phase S_{s1} having a time length T_{s1} and then the current flow is switched off at a predetermined first time instant t_4 as was described above, but here the switch-off phase only lasts for a relatively short
30 first switch-off time length T_{O1} . In case of a residual current flow through the motor coil being present at the switching-off instant, a first voltage signal will be provided by the resonant motor as was discussed above. The time length T_{O1} of the first switch-off phase may be within a range

of between about 5 microseconds and about 100 microseconds, optionally of between about 20 microseconds to about 50 microseconds.

After the first switch off phase, the control unit short-circuits the resonant motor again during a
 5 second short-circuiting phase S_{s2} having a time length T_{s2} . The time length T_{s2} is chosen to be so small that the residual current flowing through the motor coil would only fully commute over the protective diode when the residual current flow is very small. Then the current flow is again switched off at a predetermined second time instant t_5 . In case of a residual current flow through the motor coil being present at the switching-off instant, a second voltage signal will be provided
 10 by the resonant motor as was discussed above. The second switch-off phase may have a time length T_{O2} that may also lie in a range of between about 5 microseconds and about 100 microseconds, optionally of between about 20 microseconds to about 50 microseconds, as shown in Fig. 4.

15 Alternatively the second switch-off phase may continue until the start of a further driving phase. In the shown embodiment, a third short-circuiting phase S_{s3} continues for a time length T_{s3} after the second switch-off phase and is ended by a switch-off phase at a predetermined third time instant t_6 . In case of a residual current flow through the motor coil being present at the switching-off instant, a third voltage signal will be provided by the resonant motor as was discussed above.
 20 In another embodiment, four or even more switch-off phases alternate with respective short-circuiting phases.

Line 1000 schematically indicates the current flow $I(t)$ for an example embodiment where a current flow is present at the predetermined first time instant t_4 and at the predetermined second
 25 time instant t_5 and where the current flow just becomes zero at the predetermined third time instant t_6 , i.e. the sign change of the third voltage signal that may be detected at the predetermined third time instant t_6 would then indicate that a load is applied at the resonant motor that has reached a predetermined third load value.

30 Line 1001 (only shown for the first half cycle) schematically indicates the current flow for an example case where a sign change of the second voltage signal measured at the predetermined second time instant t_5 may be detected indicating that a predetermined second load value is reached. As the current flow indicated by line 1001 is eliminated after the second switch-off

phase, the third short-circuiting phase S_{s3} here leads to a current flow build-up that is driven by the movement-induced voltage as was discussed above, and may produce a third voltage signal accordingly.

- 5 In another embodiment as shown in Fig. 5, a relatively short first driving phase S_{d1} having a time length T_{d1} is followed by a short first short-circuiting phase S_{s1} having a time length T_{s1} and which is ended at a predetermined first time instant t_7 by a relatively short switch-off phase S_{O1} having a time length T_{O3} . The resulting first voltage signal developing after switching-off is then fed to the measurement unit. A second driving phase S_{d2} that may have in some embodiments a
 10 longer time length T_{d2} may start after the switch-off phase S_{O1} and may be ended by a switch-off phase at a predetermined second time instant t_8 at which a developing second voltage signal may be measured.

- The short switch-off phase S_{O1} may have a time length T_{O3} lying in the range of between about 5
 15 microseconds to about 100 microseconds, optionally of between about 20 microseconds to about 50 microseconds. The time length T_{d1} of the first driving phase S_{d1} and the time length T_{s1} of the first short-circuiting phase S_{s1} are set to time length values that allow the current flow to reduce to zero at the predetermined first time instant t_7 under a predetermined condition but that are also so short to allow a second driving phase S_{d2} that may have a time length T_{d2} that allows for
 20 achieving a high amplitude of the moving motor armature. The individual time lengths' may be empirically determined.

- Generally, it is also possible to numerically simulate a resonant motor and its behavior and to determine the various parameters such as the predetermined time instants and time lengths' based
 25 on such a computer simulation.

- Referring to Fig. 5, line 1010 indicates a case where the movement induced voltage is such that the current flow $I(t)$ is relatively high and the residual current flow at the predetermined first time instant t_7 is positive. The resulting first voltage signal is then negative. Line 1011 indicates a case
 30 where the movement induced voltage has changed such that the current flow $I(t)$ is lower than in the case indicated by line 1010 and the residual current flow at the predetermined first time instant t_7 is negative. The resulting first voltage signal is then positive.

Several possibilities exist to measure a second (or more generally: a further) voltage signal that is indicative of whether, e.g., an applied load has changed from being above (or below) a predetermined second (or further, i.e. third, fourth, ...) load value to being below (or above) this value. In an embodiment, the second predetermined load value may be chosen to be D2 as indicated in Fig. 3. In an embodiment, a different second driving phase S_d' and/or a different second short-circuiting phase S_s' may be applied in the second half cycle such that a second voltage signal P_2 that can be measured at a predetermined second time instant t_1' (as shown in Figs. 2A and 2B) indicates by its sign change a change of load applied at the resonant motor from being above (or below) a predetermined second load value to being below (or above) this value.

10

In an embodiment, two driving phases that are each followed by a respective short-circuiting phase are applied during at least a first half cycle (optionally in both half cycles), an example of which was shown and discussed with reference to Fig. 5, thus allowing to measure whether the applied load is below or above or between two predetermined load values (optionally more different predetermined load values can be probed).

15

In an embodiment, at least the length of one of the driving phase and the short-circuiting phase is periodically changed between successive driving cycles. For example, in a first driving cycle c1 a predetermined first load value is tested by the measurement, in the following second driving cycle c2 a predetermined second load value is tested, in the following driving cycle the predetermined first load value is again tested etc. This could be indicated by a c1-c2-c1-c2-c1-c2-... series. Other series could be contemplated such as c1-c2-c3-c1-c2-c3-c1-c2-c3-... or c1-c2-c1-c3-c1-c2-c1-c3-... or c1-c1-c2-c2-c1-c1-c2-c2-... etc.

20

Embodiments are contemplated which include the operation of memory elements. For example, where a user typically exceeds a second or third predetermined load value, the measurement sequences indicated above may be modified. Specifically, in the case of exceeding a third predetermined value, the series of measurement could be c1-c3, c2-c3, c1-c3, c2-c3, ... This sequence could occur until the user changes their hygiene habits and begins to utilize appropriately applied force. At such time, the series of measurement may be modified to a previously listed series which measures during a cycle c3 less often.

25

30

- In an embodiment, the time length of the first driving phase may be changed after the evaluation of the first voltage signal has indicated that the applied load has changed from being above (or below) a predetermined first load value to being below (or above) this value. The predetermined first time instance may then be changed too. In an embodiment, a predetermined second time instant is added after the above mentioned change of the time length of the first driving phase to allow measuring whether the applied load has changed back to above (or below) the predetermined first load value or has changed from being above (or below) a predetermined second load value to being below (or above) this value.
- 10 All the various possibilities to test whether more than one predetermined load value is reached can be combined with each other to the extent that this is possible.

- As the peak amplitude at which the resonant motor is driven may be changed from low amplitude to high amplitude when the first voltage signal changes its sign, the load value D1 indicated in Fig. 3 should relate to a load applied at the functional element that indicates that the electric device is being used as it is, e.g., pressed against a surface. The respective predetermined first or second load value may be set to be within a range of between about 0.1 Newton (N) to about 5 N. The predetermined first load value may in particular be chosen to be within a range of between about 0.5 N to about 1.5 N for the first voltage signal and for the predetermined second load value between about 1.5 N to about 3.5 N for the second voltage signal. The electric device may additionally be equipped with an indicator to indicate to the user when the applied load is below the predetermined first load value level (e.g. by a yellow light element), when the applied load is between the predetermined first and second load values (e.g. with a green light element) or when the applied load is above the predetermined second load value (e.g. with a red light element).

25

- In an above described example embodiment, a driving parameter that was changed after the evaluation unit had detected a change of the applied load from being above (or below) a predetermined first (or second, or third,...) load value to being below (or above) this value was the time length of the first driving phase. Instead of changing the time length of the first driving phase, another driving parameter or several driving parameters could be changed, e.g. the driving frequency could be changed, the height of the supply voltage could be changed, the start time of the first driving phase within a half cycle could be changed etc.
- 30

Fig. 6 is a depiction of an electric device realized as an oral hygiene device 1, here in the form of an electric toothbrush. The oral hygiene device 1 comprises a handle 20 and an attachment 10. The attachment 10 comprises a functional element 11 mounted for driven oscillatory motion around a rotation axis R as indicated by a double arrow 12. The functional element 11, here realized as a brush head comprising a plurality of cleaning elements that are here realized as bristle tufts, may be driven by a resonant motor such that the functional head 11 oscillates about the rotation axis R. During operation, the resonant motor is controlled by a control unit.

As described in more detail below, in the context of an exemplary oral hygiene device, such as an electric toothbrush, the resonant motor may be controlled initially with relatively low operational amplitude to indicate to the user that the electronic toothbrush is in an on-state and is functional. When the brush head of the electric toothbrush is pressed against a surface in a user's oral cavity, the applied mechanical load of the resonant motor may change, and the resonant motor may be controlled to have higher operational amplitude (the working amplitude) when the applied load value reaches or exceeds a predetermined first load value. The low operational amplitude may be chosen to lie in a range of between about 1% to about 75% of the working amplitude, optionally in a range of between about 5% to about 30%.

While various example embodiments were discussed, it is stated that all features that are disclosed in the present description, whether as isolated features or as a feature within the context of other features, are intended to be individually combinable with each other to the extent that this is possible and is not in contradiction with the gist and scope of the present disclosure.

The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as "40 mm" is intended to mean "about 40 mm."

CLAIMS

1. A resonant motor unit comprising:
 - a resonant motor;
 - a control unit for driving the resonant motor at a driving frequency, for short-circuiting the resonant motor during a first short-circuiting phase in successive driving cycles and for concluding the at least first short-circuiting phases by switching off the current flow through the resonant motor at least at a predetermined first time instant within the driving cycles;
 - a measurement unit for successively measuring at least a first voltage signal provided by the resonant motor at the predetermined first time instant; and
 - an evaluation unit for determining whether the first voltage signal has changed between successive measurements.
2. The resonant motor unit in accordance with claim 1, wherein the measuring unit is arranged to only measure the sign of the first voltage signal.
3. The resonant motor unit in accordance with claim 1, wherein the predetermined first time instant is predetermined such that the first voltage signal changes its sign when a load applied at the resonant motor changes from being below to above or from being above to below a predetermined first load value.
4. The resonant motor unit in accordance with claim 1, wherein
 - the control unit is further arranged for short-circuiting the resonant motor during a second short-circuiting phase in successive driving cycles and for concluding the second short-circuiting phases by switching off the current flow through the resonant motor at a predetermined second time instant within the driving cycles;
 - the measurement unit is further arranged for measuring a second voltage signal provided by the resonant motor at the predetermined second time instant; and
 - the evaluation unit is further arranged for determining whether the second voltage signal has changed between successive measurements.

5. The resonant motor unit in accordance with claim 4, wherein the measurement unit is arranged for either:
 - measuring the first voltage signal in a first half cycle of at least one of the successive driving cycles and the second voltage signal in a second half cycle of the same driving cycle;
 - or
 - measuring the first voltage signal in a first half cycle of at least one of the successive driving cycles and the second voltage signal also in the first half cycle of the same driving cycle; or
 - measuring the first voltage signal within at least one of the successive driving cycles and the second voltage signal in at least one other of the successive driving cycles.
6. The resonant motor unit in accordance with claim 1, wherein the control unit is arranged to change the driving frequency between successive measurements.
7. The resonant motor unit in accordance with claim 6, wherein the predetermined first time instant is predetermined such that the first voltage signal changes its sign when the driving frequency coincides with the resonance frequency of the resonant motor or with a target frequency having a predetermined distance to the resonance frequency.
8. The resonant motor unit in accordance with claim 1, wherein the control unit is arranged to provide a supply voltage at the resonant motor during a driving phase prior to the short-circuiting phase.
9. The resonant motor unit in accordance with claim 1, wherein when a change based on the first motor signal is determined, the control unit is arranged to change at least one parameter of the driving of the resonant motor.
10. The resonant motor unit in accordance with claim 1, wherein when a change based on the first motor signal is determined, the control unit is arranged to change at least one parameter of the driving of the resonant motor and to indicate the determined change to a user.

11. The resonant motor unit in accordance with claim 1, wherein when a change based on the first motor signal is determined, the control unit is arranged to indicate the determined change to a user.
12. An electric device comprising a resonant motor unit in accordance with claim 1, wherein the electric device is an oral hygiene device.
13. The electric device of claim 12 wherein the oral hygiene device comprises an electric toothbrush.
14. A method of controlling a resonant motor, the method comprising the steps of:
 - driving the resonant motor at a driving frequency;
 - short-circuiting the resonant motor during a first short-circuiting phase;
 - switching off a current flow through the resonant motor at least at a predetermined first time instant;
 - measuring at least a first voltage signal provided by the resonant motor at the predetermined first time instant; and
 - evaluating whether the first voltage signal has changed between successive measurements.
15. The method in accordance with claim 13 comprising, when a change based on the first voltage signal is determined, the further step of changing at least a parameter of the driving of the resonant motor.
16. The method in accordance with claim 13 comprising, when a change based on the first voltage signal is determined, the further steps of changing at least a parameter of the driving of the resonant motor and indicating the determined change to a user.
17. The method in accordance with claim 13 comprising, when a change based on the first voltage signal is determined, the further step of indicating the determined change to a user.

18. The method in accordance with claim 13, further comprising the step of applying a supply voltage at the resonant motor prior to the act of short-circuiting of the resonant motor.
19. The method in accordance with claim 13 further comprising the steps of:
 - short-circuiting the resonant motor during a second short-circuiting phase;
 - switching off a current flow through the resonant motor at a predetermined second time instant;
 - measuring a second motor signal that is indicative of a load applied at the resonant motor; and
 - evaluating the measured second motor signal to determine whether the load value indicated by the second motor signal has changed from being above to below or from being below to above a predetermined second load value between successive measurements.
20. The method in accordance with claim 13 further comprising the step of changing the driving frequency between successive measurements.

1 / 4

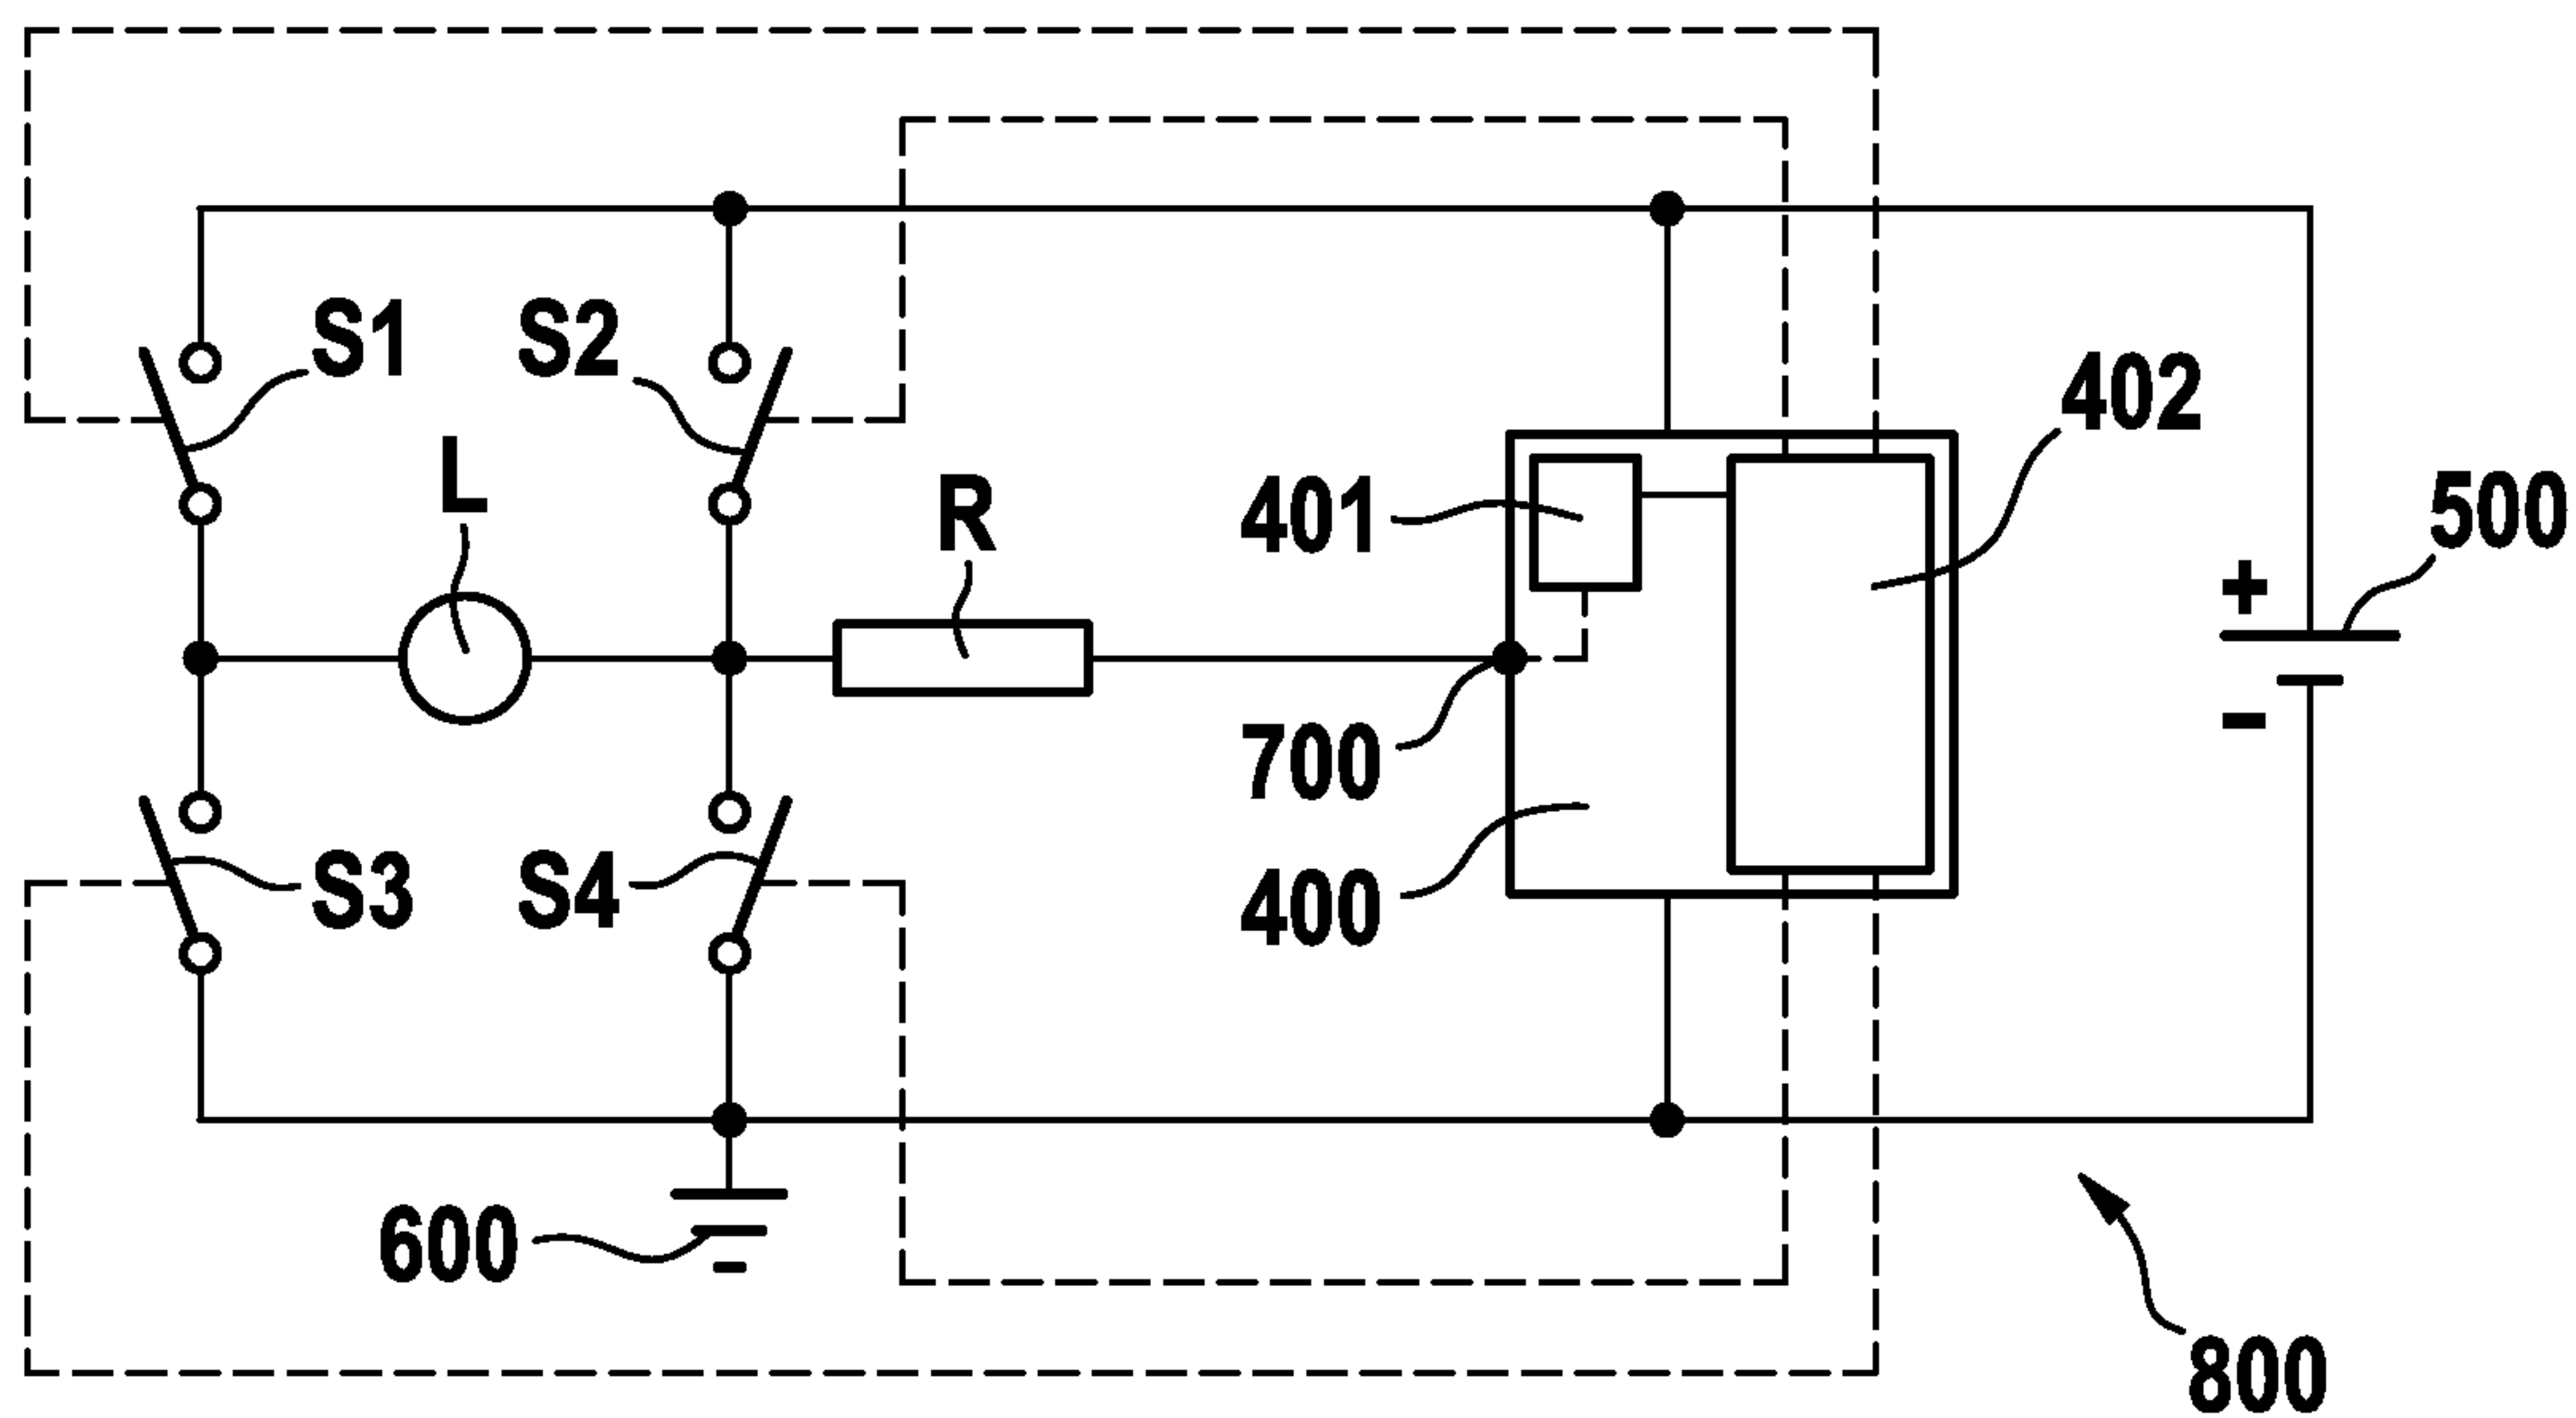


Fig. 1

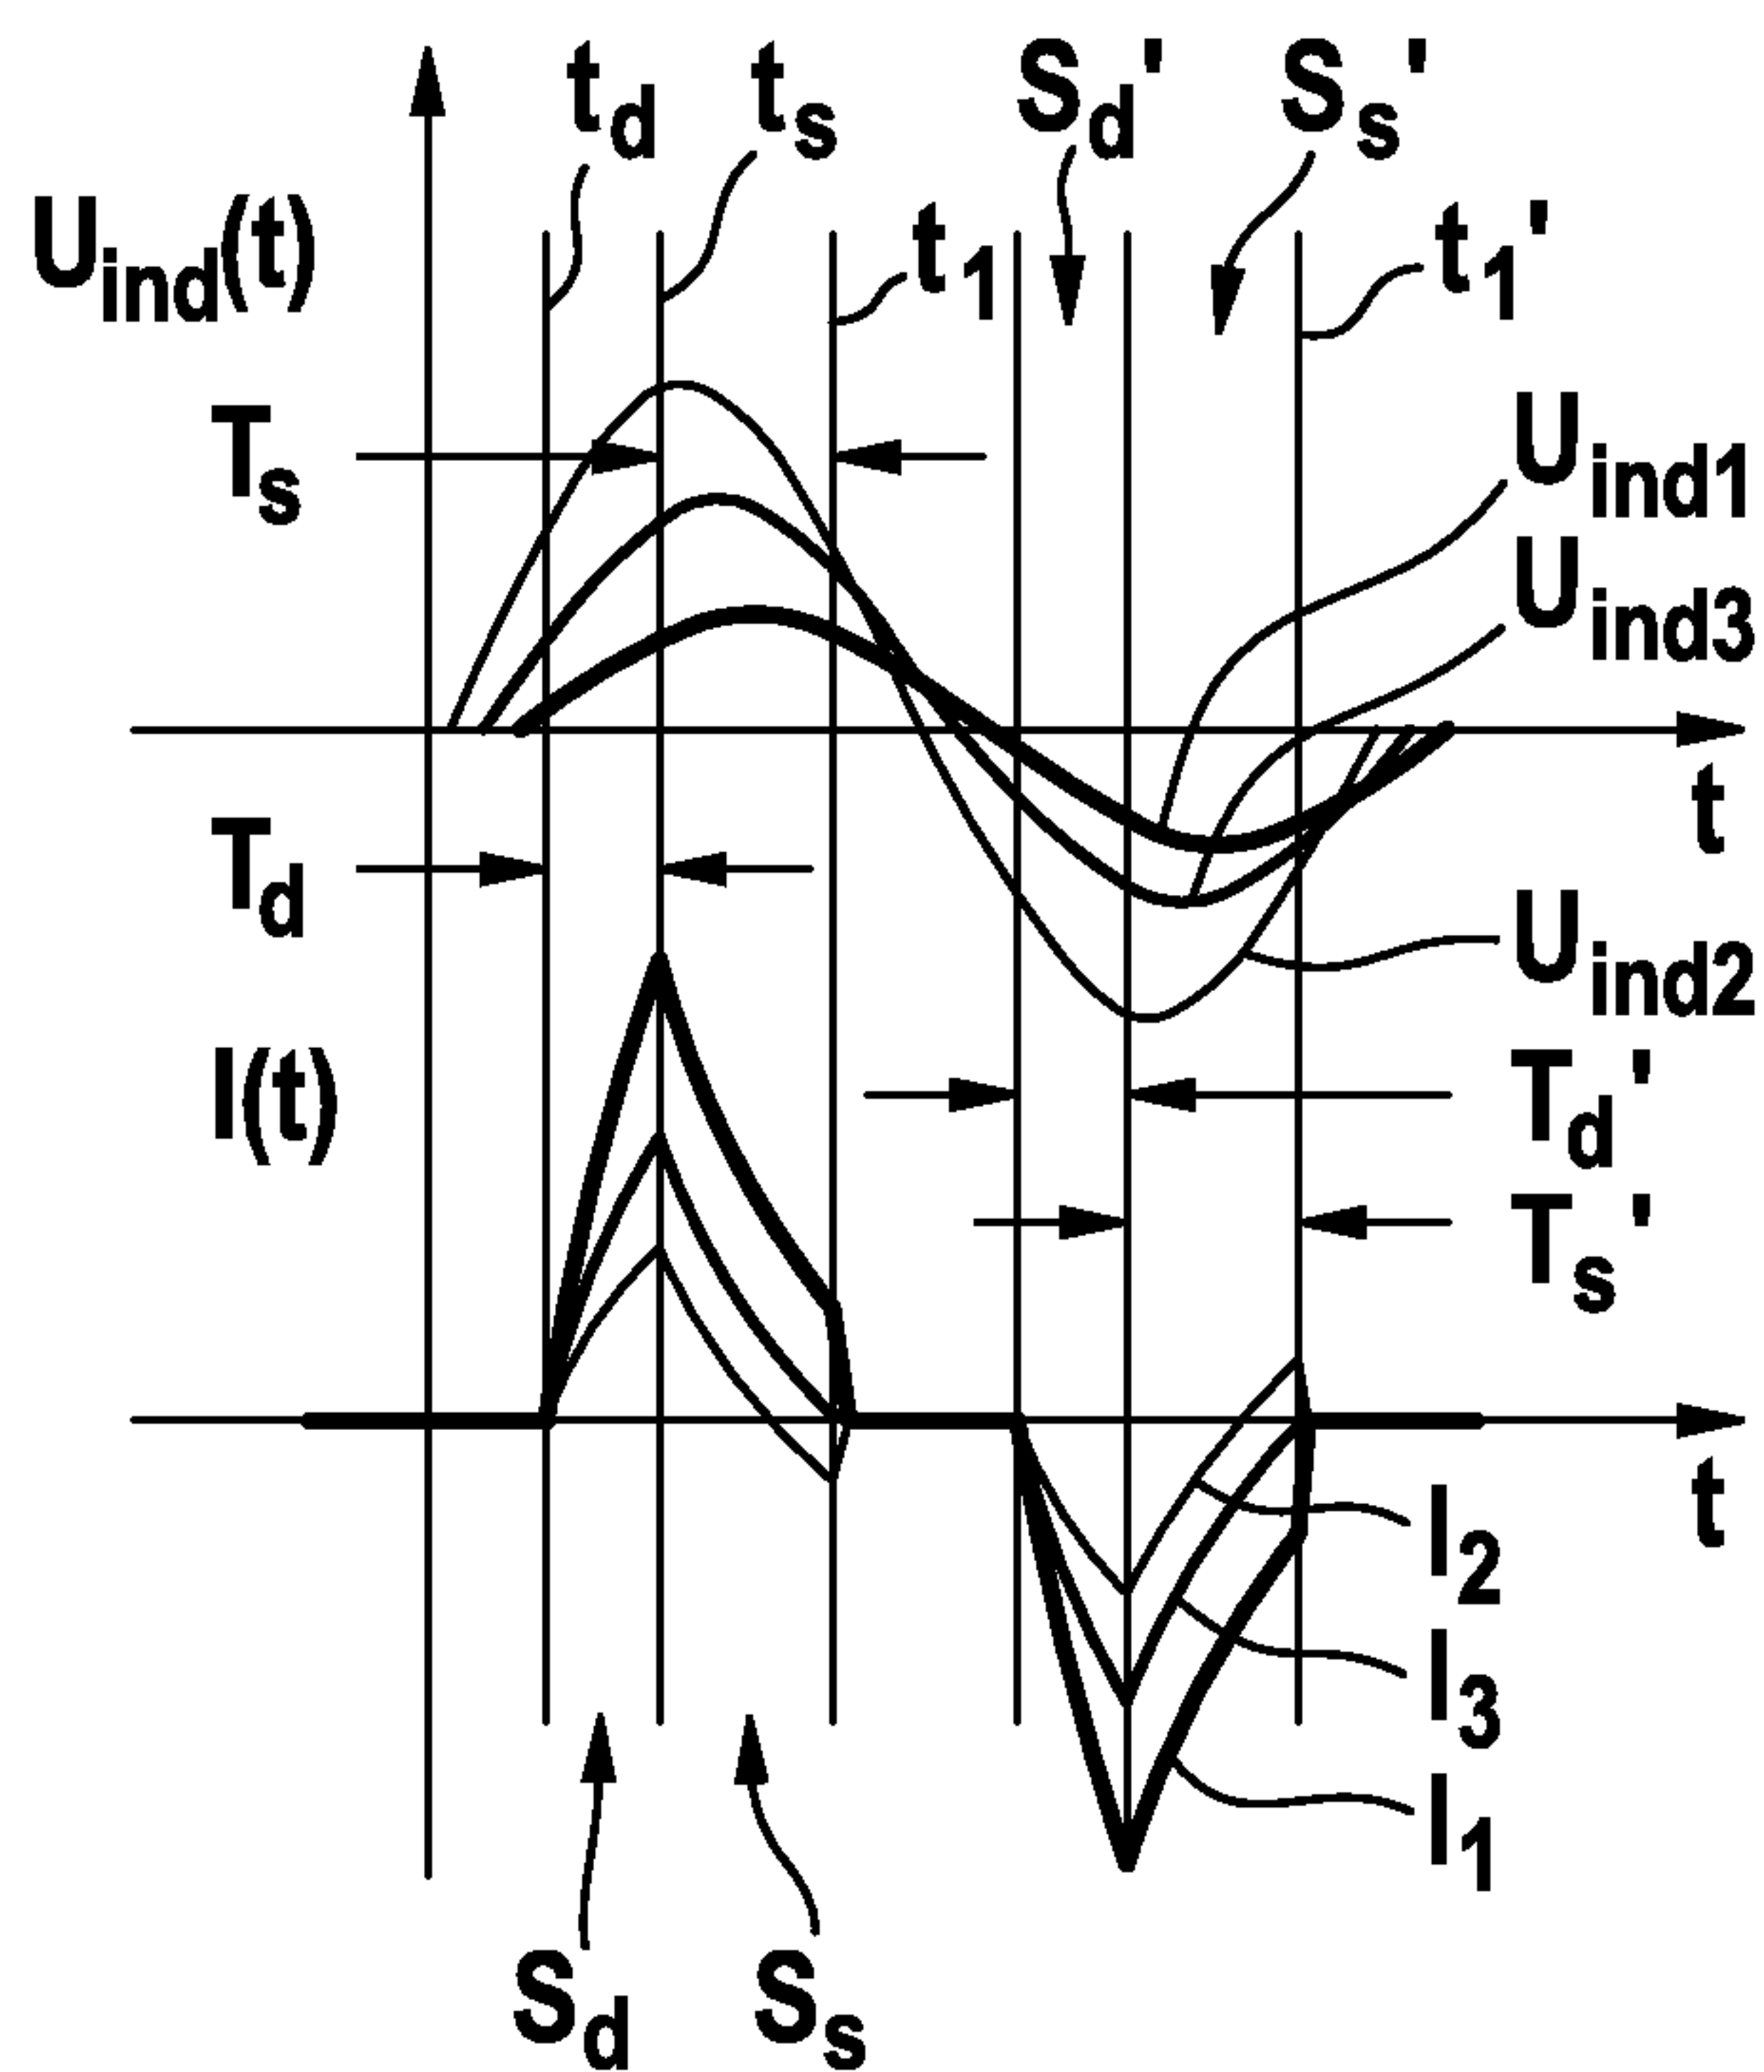


Fig. 2A

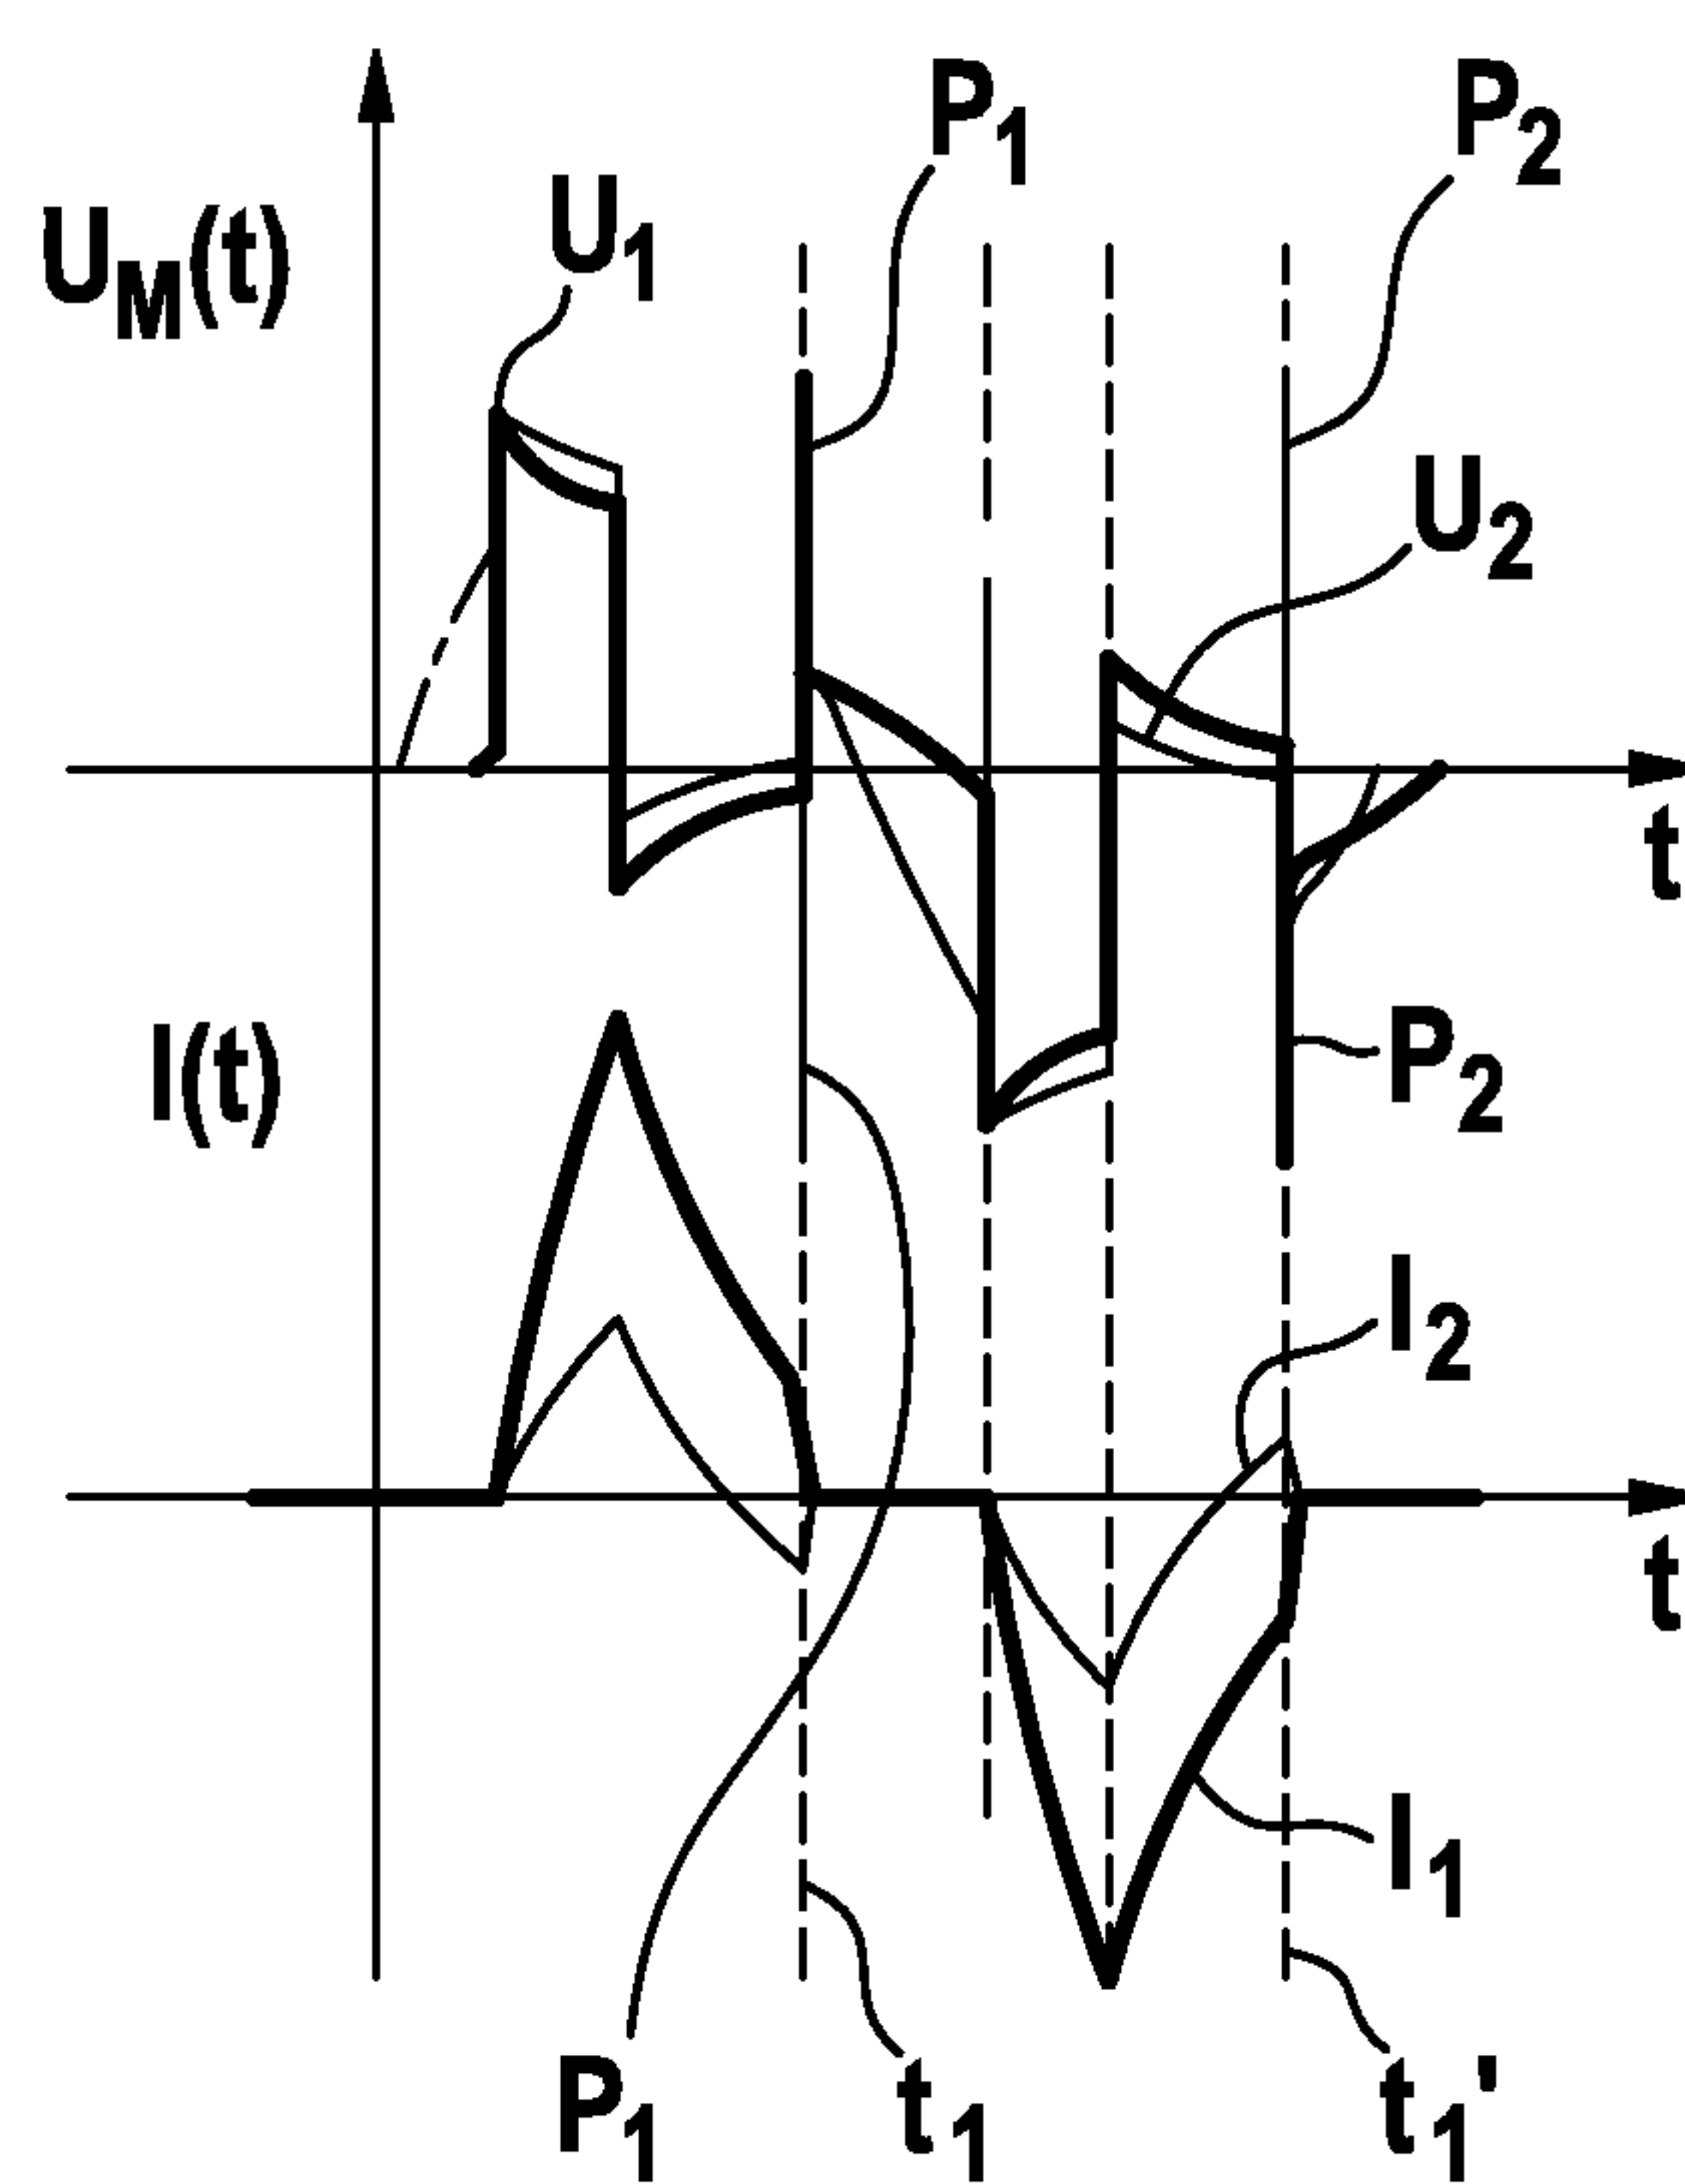


Fig. 2B

2 / 4

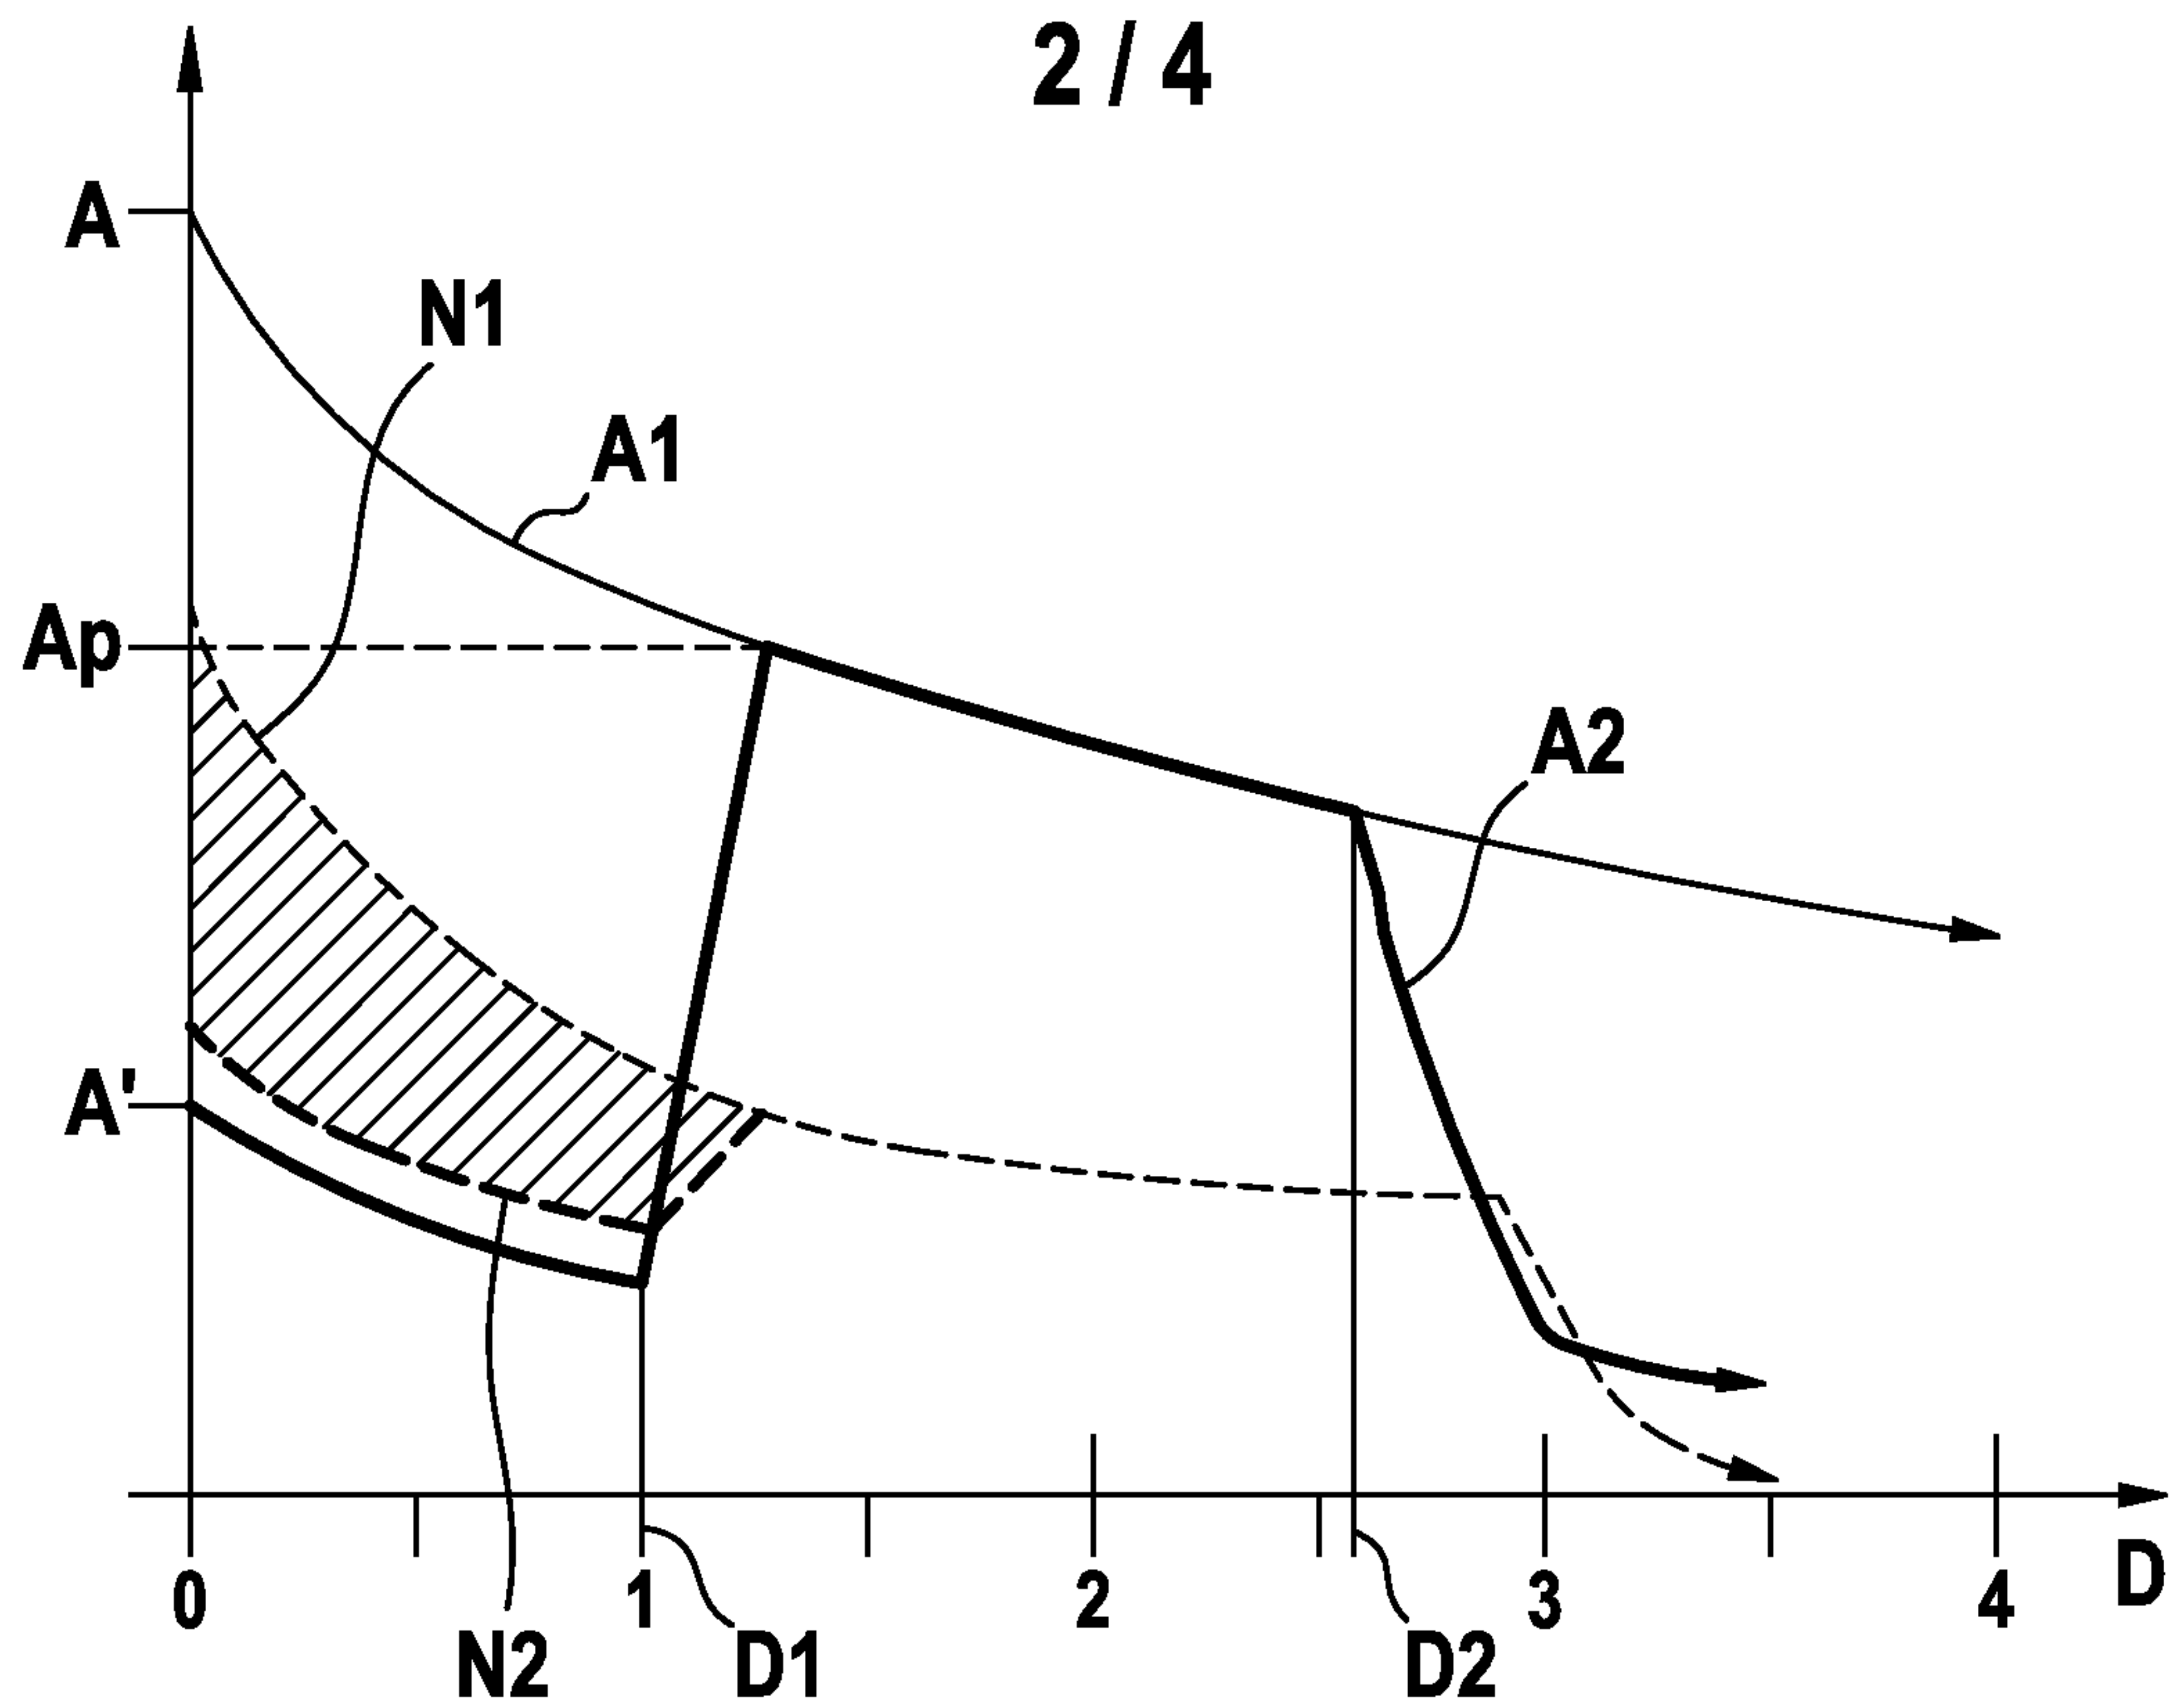


Fig. 3

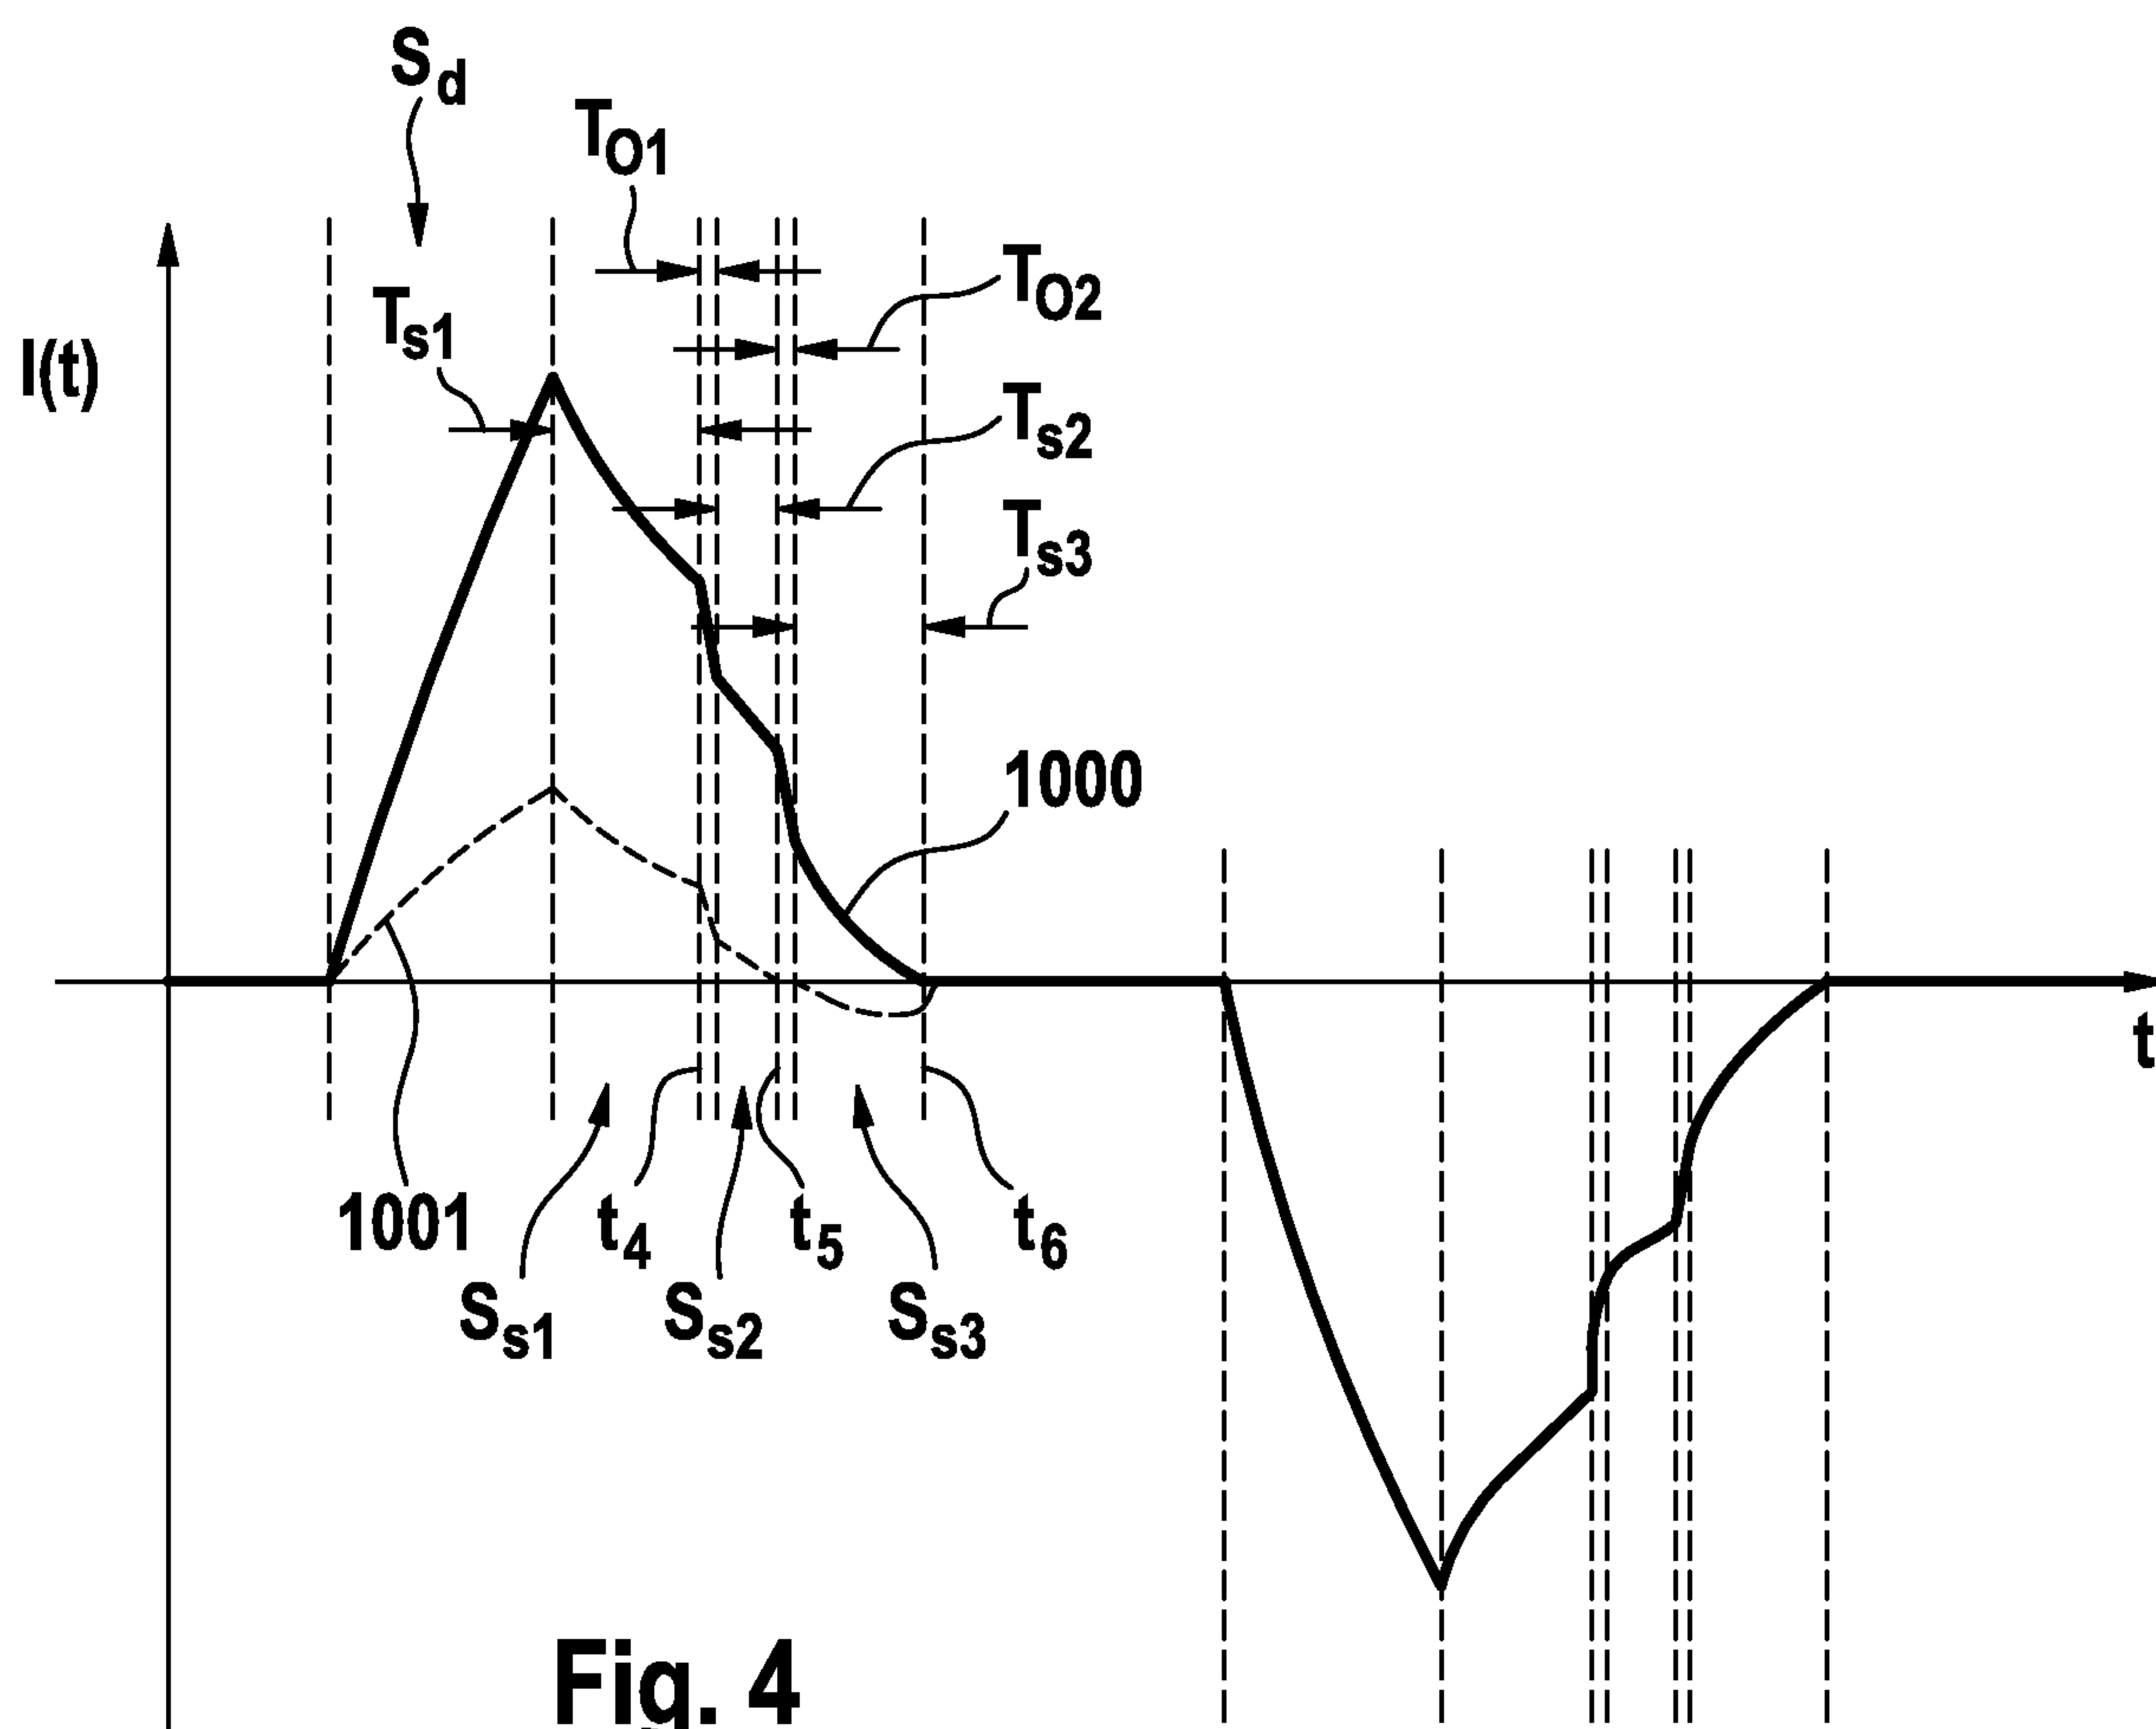


Fig. 4

3 / 4

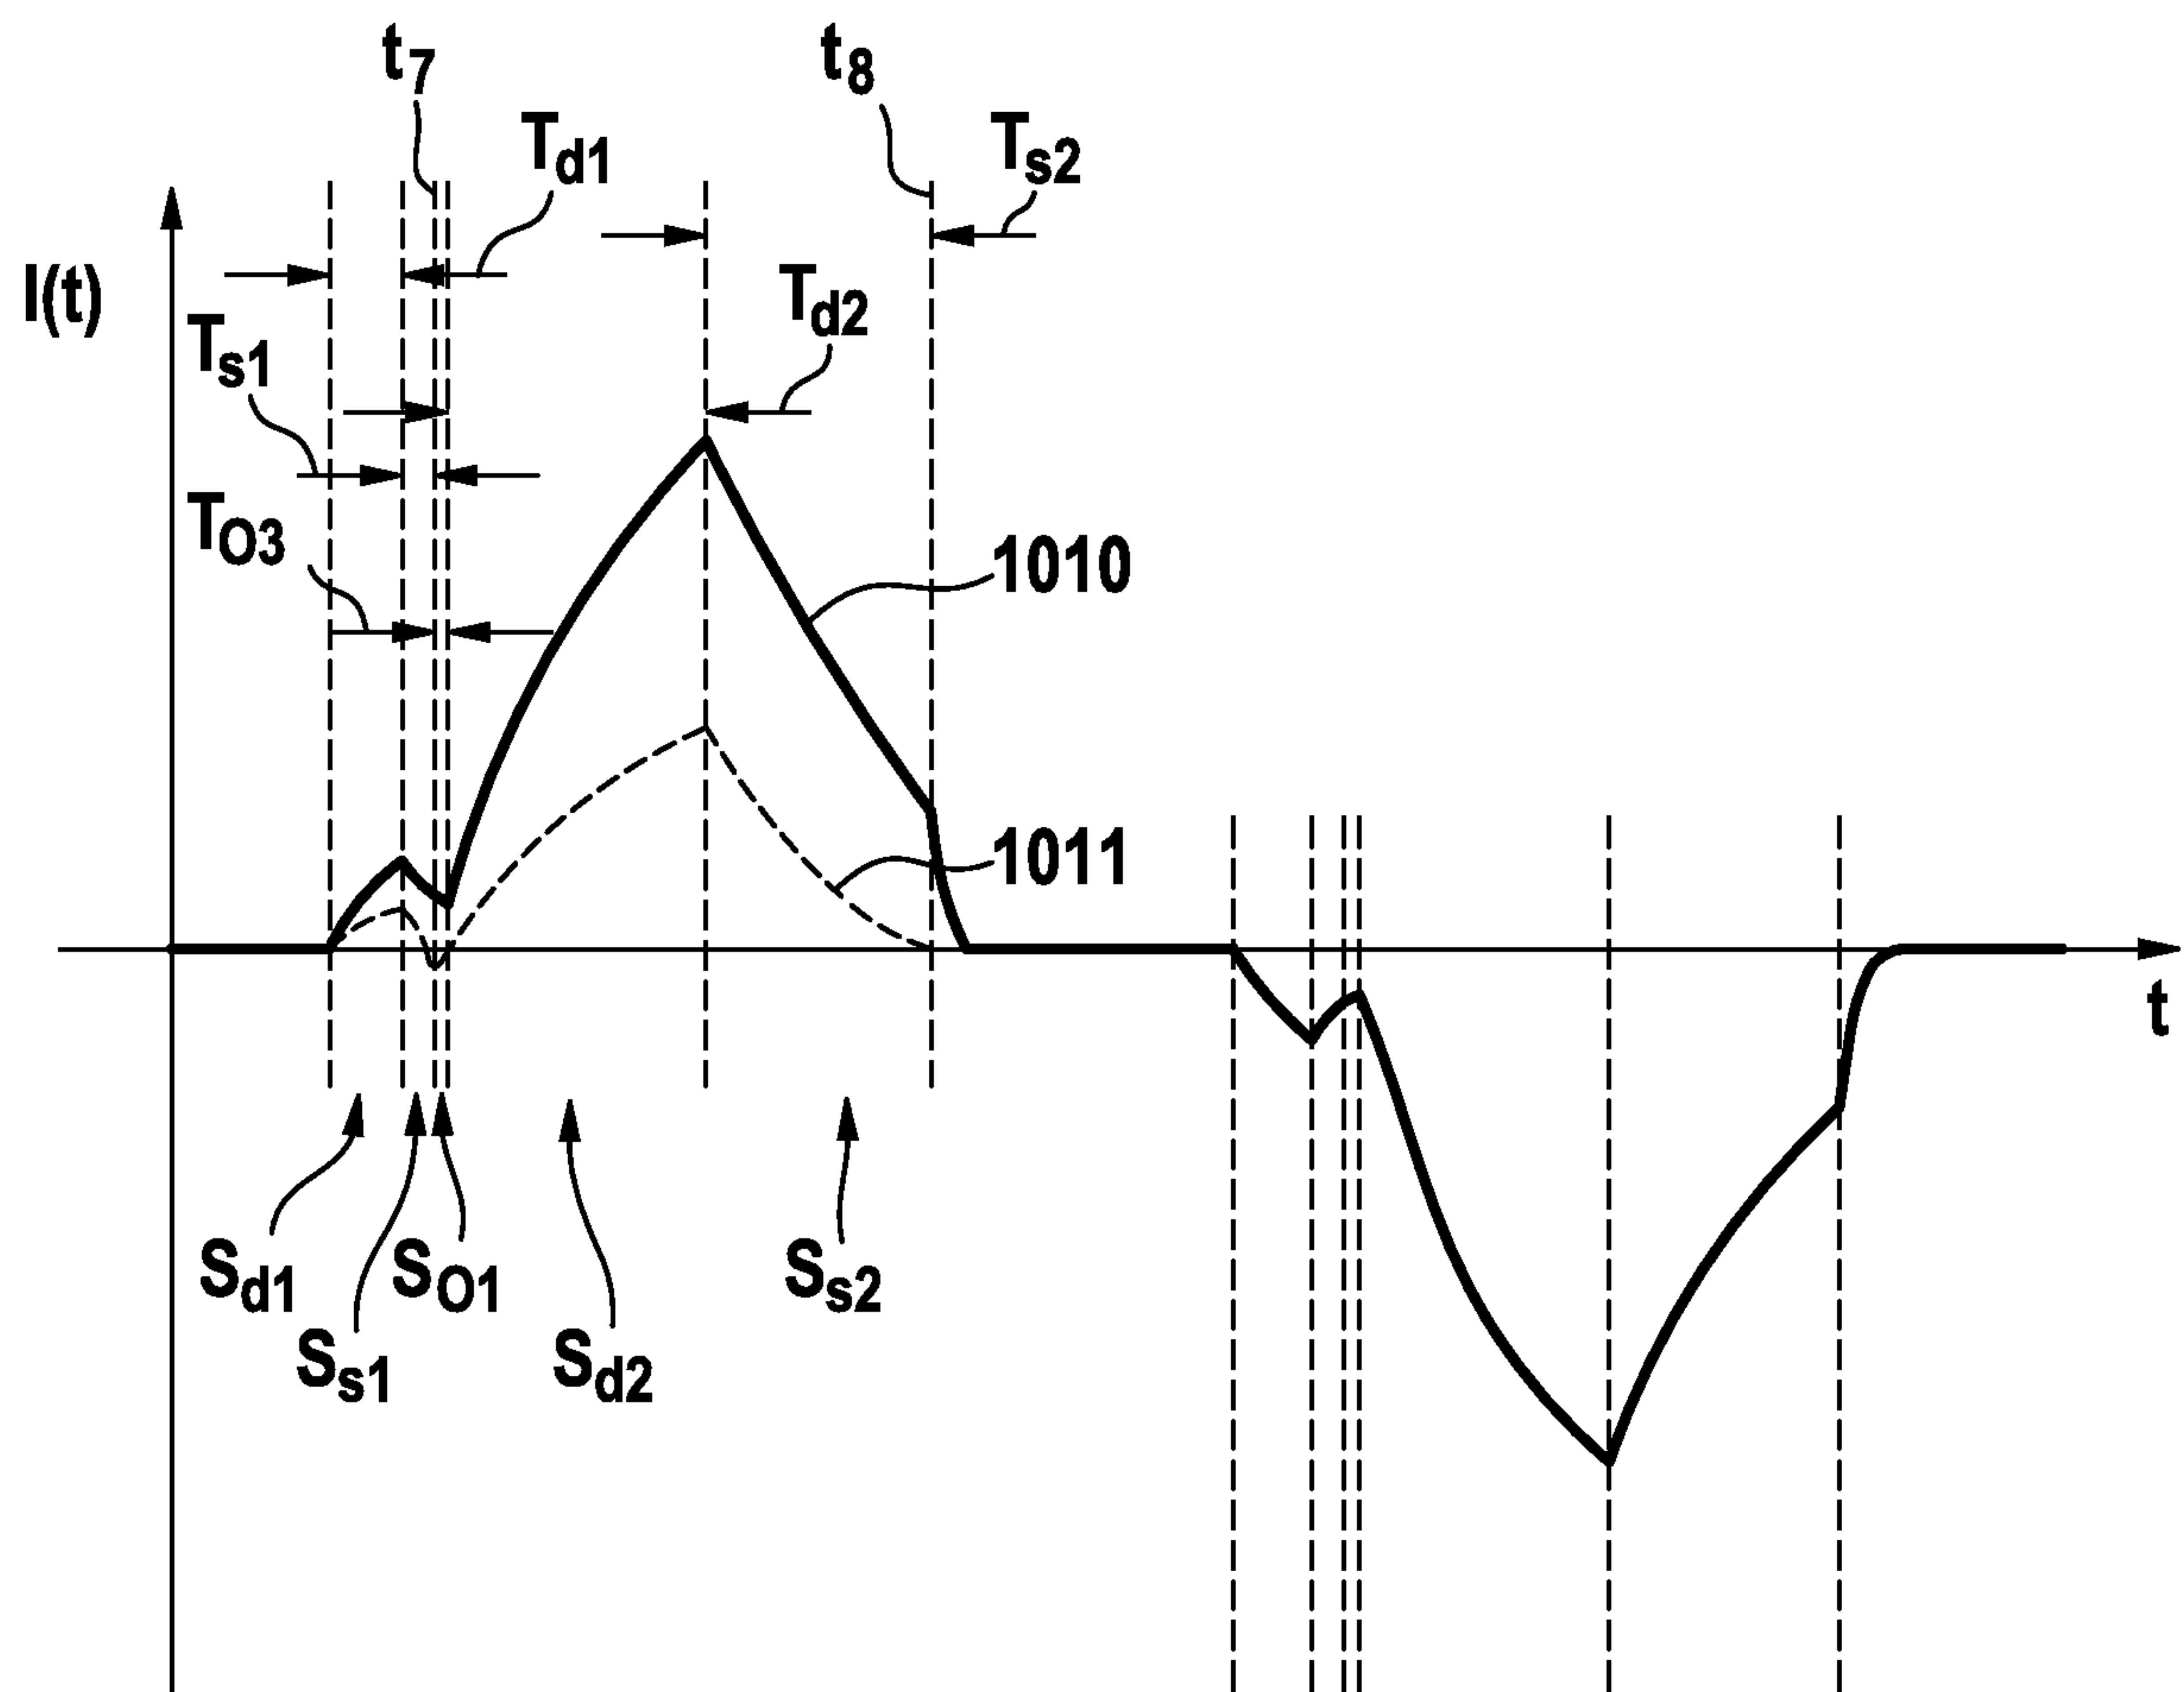


Fig. 5

