



HU000030711T2

(19) **HU****MAGYARORSZÁG****Szellemi Tulajdon Nemzeti Hivatala**(11) Lajstromszám: **E 030 711**(13) **T2**

EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 10 166562**(22) A bejelentés napja: **2004. 11. 30.**(51) Int. Cl.: **B65B 19/20** (2006.01)**B65B 65/02** (2006.01)**B65D 85/10** (2006.01)

(96) Az európai bejelentés bejelentési száma:

EP 20040166562

(97) Az európai bejelentés közzétételi adatai:

EP 2230180 A1 **2010. 09. 22.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2230180 B1 **2016. 08. 31.**

(30) Elsőbbségi adatok:

0327823	2003. 12. 01.	GB
795775	2004. 03. 08.	US

(73) Jogosult(ak):

**British American Tobacco (Investments) Ltd,
London, WC2R 3LA (GB)**

(72) Feltalálók(k):

Bray, Andrew Jonathan, Southampton, SO15 8TL (GB)
Tearle, Alan Douglas, Southampton, SO15 8TL (GB)
Holford, Steven, Southampton, SO15 8TL (GB)

(74) Képviselő:

**Danubia Szabadalmi és Jogi Iroda Kft.,
Budapest**

(54)

Berendezés és eljárás dohánytermékek csomagolására

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 230 180 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
31.08.2016 Bulletin 2016/35

(51) Int Cl.:
B65B 19/20 (2006.01) **B65D 85/10** (2006.01)
B65B 65/02 (2006.01)

(21) Application number: **10166562.8**

(22) Date of filing: **30.11.2004**

(54) **Apparatus and Method for Packing Smoking Articles**

Verfahren und Vorrichtung zum Verpacken von Rauchartikeln

Appareil et procédé d'emballage d'articles pour fumeurs

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **01.12.2003 GB 0327823**
08.03.2004 US 795775

(43) Date of publication of application:
22.09.2010 Bulletin 2010/38

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
04798707.8 / 1 725 456

(73) Proprietor: **British American Tobacco
(Investments) Ltd**
London, WC2R 3LA (GB)

(72) Inventors:
• **Bray, Andrew Jonathan**
Southampton, SO15 8TL (GB)

• **Tearle, Alan Douglas**
Southampton, SO15 8TL (GB)
• **Holford, Steven**
Southampton, SO15 8TL (GB)

(74) Representative: **Grey, Ian Michael et al**
Venner Shipley LLP
200 Aldersgate
London EC1A 4HD (GB)

(56) References cited:
WO-A-2004/080844 DE-A1- 10 256 370
FR-A- 2 614 720 GB-A- 2 017 039
GB-A- 2 286 377 US-A- 3 226 010
US-A- 4 184 591 US-A- 4 258 526
US-A- 4 631 900 US-A- 4 738 359
US-A- 5 588 281 US-A- 5 590 763

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 230 180 B1

Description

[0001] This invention relates to apparatus and methods for packaging smoking articles such as cigars, cigarillos and cigarettes, all of which articles will be referred to herein for simplicity as "cigarettes".

[0002] The present invention is concerned, in particular, with a cigarette wrapping machine which forms a hinged lid, hinged side-by-side carton or pack of cigarettes wherein a first foil wrapped bundle is placed in hinged side-by-side relationship with a second foil wrapped bundle, an example of such a carton or pack being described in our co-pending application WO 2004/080844, which application is incorporated herein by reference.

[0003] WO 2004/080844 describes a smoking article blank, the blank comprising a lid portion and a base portion, the lid portion and the base portion being interconnected along a hinge line and the base portion comprising a first main panel, a second main panel and a bottom panel, each panel being defined by longitudinal side margins, the first and the second main panels each having side panels, which side panels depend from the longitudinal margins of the first and second main panels, at least one of the side panels having a side flap depending from a longitudinal margin thereof, the bottom panel having a line of perforation extending between the longitudinal margins thereof, and the side flap being connected to the adjacent side panel by a hinge line. There is also provided a plurality of inner blanks, which inner blanks may be used in combination with the above-described smoking article blank. When erected, each inner blank is capable of enwrapping a bundle of smoking articles.

[0004] US 5,461,842 discloses a packing line for producing cigarettes packets, each cigarettes packet consisting of two half packets arranged side by side inside an outer wrapping, according to the preamble of claim 1.

[0005] The system of the present invention provides for a cigarette packing machine, the machine consisting of three separate units or machines, a first cigarette wrapping unit, a second cigarette wrapping unit and a third pack combining unit. The system of the present invention provides for creation of a first and a second foil wrapped inner frame bundle for combining at a subsequent unit which partially surrounds them with an outer frame having a hinged lid. The outer frame also provides for a side hinge and a separable bottom wall such that each of the individual wrapped bundles may be hinged along a given adjoining line.

[0006] The present invention provides an apparatus for forming a cigarette pack comprising three units, a first cigarette wrapping unit, a second cigarette wrapping unit and a third combining unit, the first cigarette wrapping unit comprising a first wrapping station, the second cigarette wrapping unit comprising a second wrapping station, the first wrapping station being operable to wrap a first bundle of cigarettes in wrapping material to form a first wrapped bundle of cigarettes, the second wrapping

station being operable to wrap a second bundle of cigarettes in wrapping material to form a second wrapped bundle of cigarettes, characterized in that the first cigarette wrapping unit is operable to assemble a first inner frame A around the first wrapped bundle of cigarettes, the second cigarette wrapping unit is operable to assemble a second inner frame B around the second wrapped bundle of cigarettes, and the third combining unit is operable to combine the first and second assembled bundles of cigarettes to form an inner assembly comprising assembled inner frames A and B, and to assemble an outer frame C around the inner assembly to form a cigarette pack.

[0007] Preferably the first cigarette wrapping unit, second cigarette wrapping unit and the third pack combining unit are provided by separate cigarette packing machines.

[0008] In an alternative arrangement the first and the second cigarette wrapping units may be provided by a single unit operable to assemble the first inner frame A about the first wrapped bundle of cigarettes and the second inner frame B about the second wrapped bundle of cigarettes.

[0009] Preferably the third combining unit is configured to receive the first assembled cigarette bundle and the second assembled cigarette bundle in face-to-face overlapping relationship. The first assembled cigarette bundle comprises the first wrapped bundle of cigarettes surrounded by the first inner frame A and the second assembled cigarette bundle comprises the second wrapped bundle of cigarettes surrounded by the second inner frame B.

[0010] Advantageously the third combining unit is operable to assemble the outer frame C about the inner assembly AB, which inner assembly AB comprises the first and the second assembled cigarette bundles, said outer frame C having a hinge line along a mating side edge of the first assembled cigarette bundle and the second assembled cigarette bundle.

[0011] It will be understood that in advance of either of inner frames A or B being assembled about the first or the second bundle of cigarettes respectively, the bundle of cigarettes is wrapped in a wrapping material. Advantageously the wrapping material is foil. The bundle of cigarettes is initially wrapped in a wrapping material and the first and the second assembled cigarette bundles comprise the wrapping material.

[0012] Preferably the first and the second cigarette wrapping units and the third combining unit of the present invention utilise cigarette packing machines of similar designs. It will be understood by the skilled artisan that each of the first and the second cigarette wrapping units or the third combining unit may be modified according to the desired combination of cigarettes to be eventually wrapped in the hinged lid pack, but in the present design the first and the second cigarette wrapping units are utilised to form a thirteen cigarette bundle and a seven cigarette bundle.

[0013] Preferably the first cigarette wrapping unit and the second cigarette wrapping unit each comprise a cigarette receiving station, an inner frame blank conveyor, a folding station and a transferring conveyor.

[0014] Advantageously the first cigarette wrapping unit and the second cigarette wrapping unit may further comprise a drying drum.

[0015] In use, cigarettes are initially fed into the cigarette wrapping unit at the cigarette receiving station. The cigarettes at the cigarette receiving station are then lined up and placed onto a cigarette conveyor to be combined as necessary and thereafter fed into the foil wrapping station. Suitably the foil wrapping station utilises foil drawn from a bobbin such that the foil wraps the requisite cigarette bundle as necessary and also applies the necessary perforations along an upper section thereof as is standard practice in the art. Due to the perforations placed in the upper portions of the foil, the upper section of the foil wrap may be removed by the consumer upon initial opening of the cigarette pack.

[0016] Preferably, in both the first and the second cigarette wrapping units, the foil wrapped bundle is then conveyed to an individual folding station in the inner frame blank conveyor.

[0017] Preferably the first and/or the second cigarette wrapping unit may further comprise an indexed advancing mechanism whereby the wrapped bundle of cigarettes may be advanced into the individual folding station.

[0018] It is much by preference that both the first and the second cigarette wrapping units further comprise a blank feed from which, in use, the first or second inner frame may be conveyed into the folding station in the inner frame blank conveyor.

[0019] Suitably the individual folding station may comprise a rounded pocket, a square pocket or a bevelled pocket such that the shape of the pocket is suitable for the first or second inner frame having rounded, square or bevelled longitudinal margins.

[0020] Preferably the first inner frame A and the second inner frame B are folded about the wrapped bundles of cigarettes within the first and the second cigarette wrapping units respectively thereby forming the first and the second assembled cigarette bundles.

[0021] Advantageously, in operation, prior to insertion of the wrapped bundle of cigarettes into the inner frame blank conveyor, the side walls of the individual inner frame are upturned by the appropriate folding mechanism. Additionally, it is much by preference that a small dot or placement of adhesive may be utilised to affix the wrapped bundle of cigarettes onto the flat face of the inner frame. The inner frame blank conveyor is operable to convey the adjoined wrapped bundle of cigarettes and inner frame to the appropriate folding stations. Suitably a second spot or placement of adhesive may be placed on the opposing flat planar surface of the inner frame such that the wrapped bundle of cigarettes is securely affixed to both the front and the back surface of the inner frame. The assembled cigarette bundle comprising the

combined inner frame and wrapped bundle of cigarettes is folded appropriately on all sides and adhesive is applied where necessary to assure that the folding flaps are maintained in their position. The side member folding operation may then take place prior to insertion of the assembled cigarette bundle into the heated drying drum (if present).

[0022] Advantageously either the first cigarette wrapping unit or the second cigarette wrapping unit further comprises an inverting station, whereby the assembled cigarette bundle is inverted before being conveyed by the transfer conveyor to the third pack combining unit.

[0023] It is much by preference that the inverting station is a portion of the transfer conveyor whereby the assembled cigarette bundle is inverted through 180° in an arcuate feed path. Preferably the inversion of the assembled cigarette bundle occurs under the action of gravity.

[0024] It is much by preference that the transfer conveyors of the first cigarette wrapping unit and the second cigarette wrapping unit are each operable to convey the assembled cigarette bundles to the third combining unit.

[0025] Advantageously the transfer conveyors of the first cigarette wrapping unit and the second cigarette wrapping unit are adjacent one another in offset, parallel relation. Suitably the transfer conveyor of the second cigarette wrapping unit is positioned to be lower than the transfer conveyor of the first cigarette wrapping unit. Alternatively, it will be readily understood that the transfer conveyor of the first cigarette wrapping unit may be positioned lower than the transfer conveyor of the second cigarette wrapping unit.

[0026] Preferably the third combining unit comprises a conveyor transfer station having a first transfer plunger and a second transfer plunger, the first transfer plunger crossing a conveyor line from the first cigarettes wrapping unit, the second transfer plunger crossing a conveyor line from the second cigarette wrapping unit, whereby both the first and the second transfer plungers are operable to deposit assembled cigarette bundles A and/or B onto a combination conveyor thereby forming inner assembly AB.

[0027] It is much by preference that the third combining unit comprises a blank feed from which an outer frame C may be fed into a folding station.

[0028] In use, the third combining unit receives the assembled cigarette bundles as inner assembly AB. An outer frame C is placed around the combined face-to-face positioned assembled cigarette bundles (inner assembly AB) and outer frame C is folded about the inner assembly AB, thereby forming a hinged lid pack having a vertical side hinge.

[0029] Advantageously the third combining unit further comprises a cutting device which cutting device is operable to cut the outer frame C along the bottom wall thereof to allow opening of the hinged lid pack along the vertical hinge line. It is much by preference that the cutting device is a knife.

[0030] The formed pack has a hinged lid and the assembled cigarette bundles are separable by virtual of the vertical hinge line. The third combining unit is operable to apply a long hinge panel or flap, being part of outer frame C, which may be adhesively applied to a side wall of one of the assembled cigarette bundles A or B. The hinge panel further comprises a score or hinge line to allow the individual assembled cigarette bundles to hinge thereabout in the hinged lid pack.

[0031] Preferably the third combining unit further comprises an end sealing device. More preferably the end sealing device is a foam belt. Even more preferably the end sealing device is a continuous belt. The end sealing device is operable to ensure that the bottom wall of the outer frame C adheres to the bottom walls of the assembled cigarette bundles.

[0032] Preferably the transfer conveyors of the first and the second cigarette wrapping units each further comprise sensors whereby the sensors are operable to detect a shortage of assembled cigarette bundles A and/or B on the transfer conveyors. When referred to herein a "shortage of assemble cigarette bundles A and/or B on the transfer conveyors" shall be taken to mean that there should be a substantially equal number of assembled cigarette bundles A and B such that assembly AB may be formed. It is much by preference that the sensors are in communication with the first and second cigarette wrapping units and the third combining unit such that the operating speeds of the units are controlled in accordance with a supply-demand relationship for the assembled cigarette bundles in each of the three units.

[0033] The present invention further provides a method of assembly of a cigarette pack comprising wrapping a first bundle of cigarettes in wrapping material, wrapping a second bundle of cigarettes in wrapping material, assembling a first inner frame A around the first wrapped bundle of cigarettes to form a first assembled bundle of cigarettes, assembling a second inner frame B around the second wrapped bundle of cigarettes to form a second assembled bundle of cigarettes, transporting said first assembled bundle of cigarettes and said second assembled bundle of cigarettes to a combining unit in combined relationship as an inner assembly AB, and assembling an outer frame C around the inner assembly AB.

[0034] The present invention further provides a method of assembly of a cigarette pack wherein the pack is a hinged lid side-by-side vertically hinged cigarette pack, the method comprising forming a first assembled bundle of cigarettes having a first inner frame A, forming a second assembled bundle of cigarettes having a second inner framer B, transporting said first assembled bundle of cigarettes and said second assembled bundle of cigarettes to a combining unit in combined relationship as an inner assembly AB, and assembling an outer frame about the inner assembly AB.

[0035] Preferably the first assembled bundle of cigarettes having a first inner frame, that is the first assembled cigarette bundle, is formed on a first cigarette wrapping

unit in which a first bundle of cigarettes is wrapped in a wrapper, a first inner frame A is fed to a folding station in the first cigarette wrapping unit and partially erected, the first wrapped bundle of cigarettes is plunged into the partially erected first inner frame A, and the partially erected first inner frame A is completely erected about the first wrapped bundle of cigarettes.

[0036] Preferably the second assembled bundle of cigarettes having a second inner frame B, that is the second assembled cigarette bundle, is formed on a second cigarette wrapping unit in which a second bundle of cigarettes is wrapped in a wrapper, a second inner frame B is fed to a folding station in the second cigarette wrapping unit and partially erected, the second wrapped bundle of cigarettes is plunged into the partially erected second inner frame B, and the partially erected second inner frame B is completely erected about the second wrapped bundle of cigarettes.

[0037] It is much by preference that outer frame C is formed about inner assembly AB on the third combining unit by partially erecting outer frame C, plunging inner assembly AB into the partially erected outer frame C and completely erecting the outer frame C about the inner assembly AB.

[0038] Advantageously when outer frame C is partially erected about inner assembly AB, a vertical hinge panel of the outer frame C is adhesively applied to the first assembled cigarette bundle of inner assembly AB thereby allowing the inner assembly AB to hinge about a vertical hinge line.

[0039] Advantageously the method of the present invention further comprises cutting a bottom panel of the outer frame C in half to allow the first assembled cigarette bundle and the second assembled cigarette bundle to separate about the vertical hinge line.

[0040] Preferably the first assembled cigarette bundle comprises seven cigarettes. Preferably the second assembled cigarette bundle comprises thirteen cigarettes.

[0041] It is much by preference that the first and the second assembled cigarette bundles further comprise a wrapping material wrapped about the bundle of cigarettes. More preferably the wrapping material is a foil.

[0042] In order that the invention be easily understood and readily carried into effect, reference will now be made, by way of example, to the accompanying diagrammatic drawings in which:

Figure 1 is a perspective view of a hinged side by side pack of the present invention;

Figure 2 is a perspective partial cut away view of the first bundle of wrapped cigarettes formed by the cigarette wrapping unit of the present invention;

Figure 3 is a perspective partial cut away view of the second bundle of wrapped cigarettes formed by the cigarette wrapping unit of the present invention;

Figure 4 is a plan view of the outer frame blank member C used by the cigarette wrapping unit of the present invention;

Figure 5 is a plan view of one of the inner frame members used by the cigarette wrapping unit of the present invention for creating one of the assembled cigarette bundles;

Figure 6 is a plan view of one of the inner frame members used by the cigarette wrapping unit of the present invention for creating one of the assembled cigarette bundles;

Figure 7 is a top plan layout view of the cigarette wrapping units which form part of the present invention;

Figure 8 is a schematic view of the bundle of wrapped cigarette paths used in the present invention;

Figure 9 is a top perspective view of the cigarette wrapping units of the present invention for creation of the separate inner frame wrapped bundles;

Figure 10 is a perspective view of the inverting station for one of the exit conveyors of the present invention;

Figure 11 is a perspective view of the combination station of the present invention for combining the separate wrapped bundles into a single bundle, namely pack assembly AB;

Figure 12 is a perspective view of the cigarette wrapping machine used in the creation of the outer frame in the present invention.

[0043] Shown in Figure 1 is the hinged lid side-by-side hinged pack 10 of the present invention. The machinery which creates the hinged lid side-by-side hinged cigarette pack 10 is comprised of three different machines, Hinged Lid Packer (HLP 1) or first cigarette wrapping machine 30, HLP 2 or second cigarette wrapping machine 31 and HLP 3 or third cigarette packing machine 32, shown in Figure 7. Both of HLP 1 30 and HLP 2 31 are designed to create individual foil wrapped cigarette bundles which are wrapped in inner frames and then wrapped in an outer frame in the HLP 3 32 machine.

[0044] HLP 2 31 can be utilised, as set forth herein, to make thirteen cigarette bundle 14, shown in Figures 1 and 3. HLP 2 32 creates the thirteen cigarette bundle 14 by first placing six and seven stacked cigarette rows together on a cigarette alignment conveyor 53, shown in Figure 9, wrapping the stacked cigarettes with foil 54 and then surrounding the foil with an inner frame 23 for an exemplary thirteen cigarette bundle 14.

[0045] Similarly, HLP 1 30 can be utilised to form a single row of seven cigarettes, wrap these cigarettes in a foil lining 16, place this seven cigarette bundle onto the blank conveyor, the bundle then being partially surrounded by the inner frame 23 for the seven cigarette bundle 12.

[0046] Both of the inner frame wrapped cardboard bundles 12, 14 are axially aligned as inner frame cartons and then wrapped in an outer frame 26 in HLP 3 32. Thus, after manufacturing of both the thirteen's cigarette bundle and the seven's cigarette bundle packs, both bundles are forwarded to HLP 3 32 and are combined with the outer frame or outer carton member 26 which is folded around the two foil wrapped bundles 12, 14, glued at the proper

seams, and then cut along the bottom panel 27 so that it may open along the vertical hinge line 16 at the side of the assembled pack.

[0047] In operation, both HLP 1 30 and HLP 2 31 work very similarly for creation of the first and the second foil wrapped cigarette bundles 12, 14. Thus, explanation for the cigarette wrapping machines herein applies to each of the first and second machines. Referring to Figure 9, cigarettes are fed to the cigarette wrapping machine 50 through a cigarette intake chute 52. The cigarettes are aligned by the alignment conveyor 53 to prepare the cigarettes for individual bundle formation. Foil wrap 54 is fed from a spool or bobbin for wrapping of the cigarette bundle in a foil wrap station 55. The cigarette bundle may be formed in either a seven or thirteen bundle as previously indicated in the present pack design but many other alternative constructions and cigarette counts are readily available for use in the present hinged lid pack design.

[0048] The cigarette bundle is forwarded by the cigarette alignment conveyor 53 to the foil wrapping station 55 where foil 54 is unrolled off a foil roll suspended from above such that the cigarette bundle is wrapped appropriately in foil. The foil wrapped bundle 55a is then forwarded to the inner frame blank conveyor 56. In the blank conveyor 56 are located individual folding stations which receive cigarette carton inner blanks 58 from the inner frame blank chute 57. Prior to a foil wrap bundle 55a being inserted into the individual folding station on the blank conveyor 56 which has an inner blank inserted therein, a small dot of adhesive may be applied to a front flat planar surface such that the cigarette bundle 55a remains stationary thereon. After placement of the foil wrapped bundle 55a into the individual inner blank 58 in the blank conveyor 56, the folding operations begin for folding of the inner frame blank 58 around the foil bundle 55a. A second dot of adhesive may be placed on the opposing flat surface of the inner frame blank 58 to secure the foil wrapped bundle 55a within the inner frame 58. After placement of the second adhesive dot on the interior wall of the inner frame, the inner frame 58 is folded around the foil wrapped bundle 55a in the folding and adhesive application stations 59 and the formed inner frame foil wrapped cigarette bundle is passed through an inspection station where improperly folded inner frame members are rejected. After the inspection station, the individual packs are passed by the conveyor which moves the foil wrapped bundle from the individual stations of the blank conveyor 56 to a drum application of adhesive so that an adhesive is applied to the long side seams for the folding operation of the sides or seams. After the long sides are folded, the now formed inner frame with the foil wrapped cigarette bundle (12, 14) located therein is passed into the drying drum 61 by the plunger 60 which allows the long side seam adhesive to dry before the pack is removed from the drum 61 and passed to an exit conveyor 65 through an exit aperture 63 formed in the drum 61. Thus, subsequent to the drying drum 61, the fully formed inner frame cigarette bundles 12 and 14 de-

picted in Figures 2 and 3, are positioned properly and ready for advancement to cigarette wrapping machine HLP 3 32 for creation of the outer frame and hinged lid of the pack.

[0049] In both the first cigarette wrapping machine 30 and the second cigarette wrapping machine 31, HLP 1 and HLP 2, the system generally utilises the same process for formation of the individual foil wrapped cigarette bundles, namely the seven cigarette bundle and the thirteen cigarette bundle. The cigarettes are funnelled into the wrapping machine and the inner frame is wrapped or formed there around. Each of the inner frame surrounded foil wrapped cigarette bundles 12 and 14, as shown in Figures 2 and 3, are formed with the respective inner frame blanks 22 and 23 shown in Figures 5 and 6. In Figure 5, the thirteen's inner frame 22 is shown wherein an inner face member 22a, bottom wall 22b and outer face 22c is shown and is formed in the second cigarette wrapping machine 31 (HLP 2). Further, a cutout 22d is also formed in the inner frame blank. As can be seen in the fully formed thirteen's bundle 14 of Figure 3, the inner frame 22 covers almost the entirety of the foil wrapped cigarette bundle. The cutout section 22d is formed such that the foil can be grasped from the outside of the wall of the pack 10 without the two individual bundles 14 and 12 being separated about vertical hinge line 16b, shown in Figure 1.

[0050] Likewise, the seven's cigarette bundle or pack 12, shown in Figure 2, is formed in the first cigarette wrapping machine 30 (HLP 1). The inner frame 23 is shown in Figure 6 wherein the inner frame 23 for the bundle 12 is formed of an inner face 23a, bottom wall 23b and an outer face 23c. Side wall 23d is also shown and is constructed so as to adhesively receive the hinge panel 16c of the outer frame 26, shown in Figure 4. Thus, after the two foil wrapped cigarette bundles 12 and 14 are formed, they are placed in face to face (front to front) abutting relationship and then wrapped in the third cigarette wrapping machine 32 (HLP 3) by the outer frame 26, shown in Figure 4.

[0051] The outer frame 26 manipulated by the third cigarette wrapping machine 32 has a cover 29, hinged lid section 16, score or cut line on the bottom wall 27, outer face 28, vertical hinge line 16b and hinge panel 16c. The third cigarette wrapping machine folds forms the hinged lid 15. The bottom wall 27 is folded around the combined bottom walls of the seven's inner frame 23b and the bottom wall 22b of the thirteen's inner frame. The outer face 28 is adhesively applied to the outer face 22c of the thirteen's inner frame 22 whilst the hinge panel 16c, as mentioned, is adhesively applied to the side wall 23d of the seven's inner frame 23. By so constructing and folding the outer frame 26 around the face to face combined pack assembly 75, shown in Figures 11 and 12, the pack 10 of the present invention may be hinged about the vertical hinge line 16b allowing the pack to be opened as depicted in Figure 1. It can also be appreciated that the bottom wall 27 of the outer frame must be appropriately

cut so that it can separate as seen and depicted. It is further appreciated that any number of cigarettes in the individual bundles 12 and 14 may be utilised so as to create the vertically hinged pack 10 of the present invention.

[0052] In HLP 2 machine 31, the finished cigarette bundle 14 with the wrapped carton of inner framed material therearound is inverted on the conveyor at the inverting station 64, shown in Figure 2, so that the packs are properly aligned face to face. The conveyor turn 66 is formed to flip the pack appropriately prior to the HLP 3 32 machine so that the packs 12 and 14, when combined as depicted in Figure 11 as combined pack assembly 75, are in face to face relationship on the combined conveyor 69.

[0053] The two exit conveyors 65 and 68 representing exit conveyors from the first and the second cigarette wrapping machine 30, 31 are placed in side-by-side relationship as they enter into the combination station. As can be understood, on of the conveyors must be displaced vertically from the other conveyor so that as plungers 70a and 71a are activated to remove the bundles 12, 14 from each of the conveyors 68 and 65, they are in proper vertical alignment so that they may slide over one another to form the combined cigarette pack assembly 75. Plungers 70a, 71a activated by actuators 70, 71 are activated from either side of both conveyors 65, 68 to combine the cigarette bundles in face-to-face relationship for subsequent wrapping by the outer carton blank 26. The combined bundles 75 are then passed into HLP 3 32 where they are passed onto the individual stations of the blank conveyor 97 containing the outer frame carton 26. The combined pack assembly 75 are then packaged by the third cigarette wrapping machine 32 as previously mentioned so that the outer frame member 26 provides a vertical hinge line 16b between the two separate bundles 12, 14.

[0054] In the HLP 3 machine 32, a number of glue application nozzles are provided in the folding and adhesive stations 91. These glue application nozzles may be HHS spray nozzles for spot gluing on the HLP 3 blank conveyor 97. This adhesive is similar to the normal adhesive utilised except that it is more viscous for ready application through the nozzles. Multiple application or nozzles are required in HLP 3 machine 32, approximately 6 in all, for spot application of adhesive to the various corners and positions on the outer frame member 26.

[0055] In regards to the outer frame member 26, the outer frame is designed to partially surround the two inner frame wrapped foil lined cigarette bundles 12, 14, while also having a score line along the bottom wall 27 thereof which may be cut so that the formed vertically hinged pack 10 may open along the necessary hinge line 16b at the side edges. Thus, upon examination of the outer frame blank 26, a small score line may be provided at the vertical hinge line 16b.

[0056] The combined pack assembly 75 is passed in to the blank conveyor 97 of the third cigarette wrapping

machine 32 (HLP 3) as indicated and the adhesive is applied to the appropriate positions, folding operations are conducted so that the tops and sides are folded appropriately surrounding the two bundles 12, 14 while applying adhesive at the appropriate positions. An examination station may also be provided in the HLP 3 machine in order to examine each package to ensure that the folding operations and adhesive operations have taken place in the folding and adhesive stations 91 and, where appropriate, reject cartons which are identified and then removed from the HLP 3 machine 32.

[0057] A transfer conveyor 98 is located at the opposite end of the blank conveyor 97 for moving the formed vertical hinged cigarette package 10 across an adhesive drum for the long side seam adhesive application, along the side panels such as 16c, after which the combined and fully formed hinged lid vertically hinged cigarette package 10 is placed into individual pockets 93, similarly as in HLP 1 and HLP 2, of the drying drum 92. At the end of the rotational extent or drying duration of the drying drum 92 and just before the exit aperture 94, a rotary knife or other cutting mechanism 95 may be provided for cutting along the score line or full panel of the bottom wall 27 of the outer frame member 26 or for direct cutting of the full bottom flap. The pack is then forced from the pocket 93 of the drum 92 and moved again to receive another pack. The cutting of the bottom wall 27 is necessary so that the individual cigarette pack 10 may be hinged about the side walls along hinge line 16b and may separate at the now cut bottom wall 27. At the exit 94 of the drying drum 92, the individual packs 10 are removed for later handling and placement into cigarette cartons.

[0058] In the HLP 3 machine 32, all of the folding operations are necessary for formation of the outer pack or the outer frame is provided. This includes folding of the hinged lid 15 lid and folding the lid over the closed but individually separated cigarette bundles 12, 14.

[0059] The HLP 1 machine 30 and HLP 2 machine 31 are initially designed to run at about 140 packs per minute. The foil wrapping system for both HLP 1 and HLP 2 are standard twin foil reel holders with typical rotary cut off and foil perforation units. The foil lining 16 is perforated as is normally conducted using a straight cut knife or serrated knife so that the upper exposed section on both bundles 12, 14 of the foil may be removed by the user. In relation to the blank folding and adhesive stations 59 provided along the blank conveyor 56 of both HLP 1 and HLP 2, standard plough folders and top panel reciprocating folders are utilised. Fold tabs 22e may also be placed at the top of the opposing side walls on the outer face 22c of the inner frame 22 in order to help maintain the hinged lid 15 in closed position. These folding tabs 22e are placed on the inner frame member 22.

[0060] The drying drums 61 and 92 utilised in all three machines 30, 31, 32, are forty-eight stage heated drums which are temperature controlled to assure proper drying of the adhesive in the formed packs.

[0061] The system of the present invention combines

three pieces of machinery, a first cigarette bundle making machine 30, a second cigarette bundle making machine 31 and a third combined outer wrapping machine 32. The system of the present invention provides for creation of two inner frame foil wrapped bundles of cigarettes 12, 14, which are combined in a third wrapping machine 32 that provides an outer frame making apparatus. The first cigarette packing machine 30 creates a foil wrap cigarette bundle surrounded by a first inner frame member 23. The second cigarette packing machine 31 creates a second foil wrapped bundle wrapped in a second inner frame member 22. The first inner frame member 23 and the second inner frame member 22 are subsequently combined into a face to face combined pack assembly 75. In the present example, the second inner frame 22 can contain seven cigarettes and six cigarettes combined for a thirteen cigarette bundle pack 14 while the other cigarette packing machine can create a seven cigarette foil wrapped bundle 12 surrounded by the first inner frame member 23. Both inner frame members with the foil wrap cigarette bundles are then fed into an outer frame carton folding machine 32 which combines the two bundles into a side hinged pack having a hinged lid.

[0062] The three machine cigarette packer of the present invention is controlled by a standard operable controlling device such as a PLC or similar electronic controller mechanism for controlling the transfer speeds and production speeds of all three packers. Such electronic controllers are known in the art and various electronic arrangements and embodiments may be utilised to effectuate control of the individual packers set forth herein.

[0063] It is apparent that variations to the different cigarette makers are available while still using concepts of the present invention disclosed herein and claimed. Such variations are deemed to fall within the teachings and claims of the present application.

Claims

1. An apparatus for forming a cigarette pack comprising a first cigarette wrapping unit (30), a second cigarette wrapping unit (31) and a third combining unit (32), the first cigarette wrapping unit (30) comprising a first wrapping station (55), the second cigarette wrapping unit (31) comprising a second wrapping station (55), the first wrapping station (55) being operable to wrap a first bundle of cigarettes in wrapping material (54) to form a first wrapped bundle of cigarettes (55a), the second wrapping station (55) being operable to wrap a second bundle of cigarettes in wrapping material (54) to form a second wrapped bundle of cigarettes (55a), **characterized in that** the first cigarette wrapping unit (30) is operable to assemble a first inner frame A (23) around the first wrapped bundle of cigarettes (55a) to form a first assembled bundle of cigarettes (12), the second cig-

- arette wrapping unit (31) is operable to assemble a second inner frame B (22) around the second wrapped bundle of cigarettes (55a) to form a second assembled bundle of cigarettes (14), and the third combining unit (32) is operable to combine the first and second assembled bundles of cigarettes (12, 14) to form an inner assembly (75) comprising assembled inner frames A and B (22, 23), and to assemble an outer frame C (26) around the inner assembly (75) to form a cigarette pack.
2. An apparatus according to Claim 1, wherein said first cigarette wrapping unit (30), second cigarette wrapping unit (31) and the third combining unit (32) are separate cigarette packing machines, or wherein the first and the second cigarette wrapping units are provided by a single unit operable to assemble the first inner frame A about the first wrapped bundle of cigarettes (55a) and the second inner frame B about the second wrapped bundle of cigarettes (55a).
 3. An apparatus according to Claim 1 or 2, wherein the third combining unit (32) is configured to receive the first assembled cigarette bundle (12) and the second assembled cigarette bundle (14) in face-to-face overlaying relationship.
 4. An apparatus according to any preceding claim, wherein the first cigarette wrapping unit (30) and the second cigarette wrapping unit (31) each comprise a cigarette receiving station (52), an inner frame blank conveyor (56), a folding station (59) and a transferring conveyor (65, 68).
 5. An apparatus according to Claim 4, wherein in the first and the second cigarette wrapping unit (30, 31), the wrapped bundle of cigarettes (55a) is conveyed to the folding station in the inner frame blank conveyor (56).
 6. An apparatus according to Claim 5, wherein the first and/or the second cigarette wrapping unit (30, 31) further comprise an indexed advancing mechanism whereby the wrapped bundle of cigarettes (55a) is advanced into the folding station (59).
 7. An apparatus according to any of Claims 4-6, wherein the first and the second cigarette wrapping units (30, 31) further comprise a blank feed (57) from which, in use, the first or second inner frame is conveyed into the folding station (59) in the inner frame blank conveyor (56).
 8. An apparatus according to any of Claims 4-7, wherein the transfer conveyors (65, 68) of the first cigarette wrapping unit (30) and the second cigarette wrapping unit (31) are adjacent one another in offset, parallel relation.
 9. An apparatus according to Claim 8, wherein the transfer conveyor (68) of the second cigarette wrapping unit (31) is positioned to be lower than the transfer conveyor (65) of the first cigarette wrapping machine (30), wherein the transfer conveyor (65) of the first cigarette wrapping machine (31) is positioned lower than the transfer conveyor (68) of the second cigarette wrapping machine (32).
 10. An apparatus according to any preceding claim, wherein the third combining unit (32) comprises a conveyor transfer station having a first transfer plunger (71a) and a second transfer plunger (70a), the first transfer plunger (71a) crossing a conveyor line from the first cigarette wrapping unit (30), the second transfer plunger (70a) crossing a conveyor line from the second cigarette wrapping machine (31), whereby both the first and the second transfer plungers (71a, 70a) are operable to deposit assembled cigarette bundles A and/or B onto a combination conveyor (69) thereby forming inner assembly AB (75).
 11. An apparatus according to any preceding claim, wherein the third combining unit (32) comprises a blank feed (90) from which the outer frame C (26) is fed into a folding station (91).
 12. An apparatus according to any of claims 4-11, wherein the transfer conveyors (65, 68) of the first and the second cigarette wrapping units each further comprise sensors whereby the sensors are operable to detect a shortage of assembled cigarette bundles A and/or B on the transfer conveyors (65, 68).
 13. An apparatus according to Claim 12, wherein the sensors are in communication with the first and second cigarette wrapping units (30, 31) and the third combining unit (32) such that the operating speeds of the units are controllable in accordance with a supply-demand relationship for the assembled cigarette bundles in each of the three units.
 14. A method of assembly of a cigarette pack, the method comprising wrapping a first bundle of cigarettes in wrapping material (54), wrapping a second bundle of cigarettes in wrapping material (54), assembling a first inner frame A (23) around the first wrapped bundle of cigarettes to form a first assembled bundle of cigarettes (12), assembling a second inner frame B (22) around the second wrapped bundle of cigarettes to form a second assembled bundle of cigarettes (14), transporting said first assembled bundle of cigarettes (12) and said second assembled bundle of cigarettes (14) to a combining unit (32) in combined relationship as an inner assembly AB (75), and assembling an outer frame C (26) around the inner assembly AB (75).

Patentansprüche

1. Vorrichtung zum Bilden einer Zigarettenpackung, umfassend eine erste Zigaretteneinwickereinheit (30), eine zweite Zigaretteneinwickereinheit (31) und eine dritte Kombiniereinheit (32), wobei die erste Zigaretteneinwickereinheit (30) eine erste Einwickelstation (55) umfasst, die zweite Zigaretteneinwickereinheit (31) eine zweite Einwickelstation (55) umfasst, die erste Einwickelstation (55) betätigbar ist, um ein erstes Bündel von Zigaretten in Einwickelmaterial (54) einzuwickeln, um ein erstes eingewickeltes Bündel von Zigaretten (55a) zu bilden und die zweite Einwickelstation (55) betätigbar ist, um ein zweites Bündel von Zigaretten in Einwickelmaterial (54) einzuwickeln, um ein zweites eingewickeltes Bündel von Zigaretten (55a) zu bilden, **dadurch gekennzeichnet, dass** die erste Zigaretteneinwickereinheit (30) betätigbar ist, um einen ersten Innenrahmen A (23) um das erste eingewickelte Bündel von Zigaretten (55a) zusammenzusetzen, um ein erstes zusammengesetztes Bündel von Zigaretten (12) zu bilden, die zweite Zigaretteneinwickereinheit (31) betätigbar ist, um einen zweiten Innenrahmen B (22) um das zweite eingewickelte Bündel von Zigaretten (55a) zusammenzusetzen, um ein zweites zusammengesetztes Bündel von Zigaretten (14) zu bilden, und die dritte Kombiniereinheit (32) betätigbar ist, um das erste und das zweite zusammengesetzte Bündel von Zigaretten (12, 14) zu kombinieren, um eine innere Anordnung (75) zu bilden, die die zusammengesetzten Innenrahmen A und B (22, 23) umfasst, und um einen Außenrahmen C (26) um die innere Anordnung (75) zusammenzusetzen, um eine Zigarettenpackung zu bilden.
2. Vorrichtung nach Anspruch 1, wobei es sich bei der ersten Zigaretteneinwickereinheit (30), der zweiten Zigaretteneinwickereinheit (31) und der dritten Kombiniereinheit (32) um getrennte Zigarettenverpackungsmaschinen handelt, oder wobei die erste und die zweite Zigaretteneinwickereinheit von einer einzigen Einheit bereitgestellt werden, die betätigbar ist, um den ersten Innenrahmen A um das erste eingewickelte Bündel von Zigaretten (55a) und den zweiten Innenrahmen B um das zweite eingewickelte Bündel von Zigaretten (55a) zusammenzusetzen.
3. Vorrichtung nach Anspruch 1 oder 2, wobei die dritte Kombiniereinheit (32) dazu konfiguriert ist, das erste zusammengesetzte Zigarettenbündel (12) und das zweite zusammengesetzte Zigarettenbündel (14) in einander gegenüberliegender überlagerter Beziehung aufzunehmen.
4. Vorrichtung nach einem der vorangehenden Ansprüche, wobei die erste Zigaretteneinwickereinheit (30) und die zweite Zigaretteneinwickereinheit (31) jeweils eine Zigarettenaufnahmestation (52), einen Förderer (56) für einen Innenrahmen-Zuschnitt, eine Falzstation (59) und einen Transferförderer (65, 68) umfassen.
5. Vorrichtung nach Anspruch 4, wobei in der ersten und der zweiten Zigaretteneinwickereinheit (30, 31), das eingewickelte Bündel von Zigaretten (55a) in dem Förderer (56) für Innenrahmen-Zuschnitte zu der Falzstation gefördert wird.
6. Vorrichtung nach Anspruch 5, wobei die erste und/oder die zweite Zigaretteneinwickereinheit (30, 31) weiter einen taktweise betriebenen Vorrückmechanismus umfassen, wodurch das eingewickelte Bündel von Zigaretten (55a) in die Falzstation (59) vorgerückt wird.
7. Vorrichtung nach einem der Ansprüche 4-6, wobei die erste und die zweite Zigaretteneinwickereinheit (30, 31) weiter eine Zuschnittszuführung (57) umfassen, von der im Gebrauch der erste oder der zweite Innenrahmen in dem Förderer (56) für Innenrahmen-Zuschnitte in die Falzstation (59) gefördert wird.
8. Vorrichtung nach einem der Ansprüche 4-7, wobei die Transferförderer (65, 68) der ersten Zigaretteneinwickereinheit (30) und der zweiten Zigaretteneinwickereinheit (31) in versetzter paralleler Beziehung einander benachbart sind.
9. Vorrichtung nach Anspruch 8, wobei der Transferförderer (68) der zweiten Zigaretteneinwickereinheit (31) positioniert ist, um tiefer zu liegen als der Transferförderer (65) der ersten Zigaretteneinwickelmaschine (30), wobei der Transferförderer (65) der ersten Zigaretteneinwickelmaschine (31) tiefer positioniert ist als der Transferförderer (68) der zweiten Zigaretteneinwickelmaschine (32).
10. Vorrichtung nach einem der vorangehenden Ansprüche, wobei die dritte Kombiniereinheit (32) eine Förderer-Transferstation mit einem ersten Transferstößel (71a) und einem zweiten Transferstößel (70a) umfasst, wobei der erste Transferstößel (71a) eine Fördererlinie von der ersten Zigaretteneinwickereinheit (30) kreuzt und der zweite Transferstößel (70a) eine Fördererlinie von der zweiten Zigaretteneinwickelmaschine (31) kreuzt, wodurch sowohl der erste als auch der zweite Transferstößel (71a, 70a) betätigbar sind, um zusammengesetzte Zigarettenbündel A und/oder B auf einem Kombinationsförderer (69) abzulegen, wodurch die innere Anordnung AB (75) gebildet wird.
11. Vorrichtung nach einem der vorangehenden Ansprüche, wobei die dritte Kombiniereinheit (32) eine

Zuschnittszuführung (90) umfasst, von der der äußere Rahmen C (26) in eine Falzstation (91) zugeführt wird.

12. Vorrichtung nach einem der Ansprüche 4-11, wobei die Transferförderer (65, 68) der ersten und der zweiten Zigaretteneinwickereinheit jeweils weiter Sensoren umfassen, wodurch die Sensoren betätigbar sind, um einen Mangel an zusammengesetzten Zigarettbündeln A und/oder B auf den Transferförderern (65, 68) zu erkennen. 5
13. Vorrichtung nach Anspruch 12, wobei die Sensoren mit der ersten und der zweiten Zigaretteneinwickereinheit (30, 31) und der dritten Kombiniereinheit (32) in Verbindung stehen, sodass die Betriebsgeschwindigkeiten der Einheiten gemäß einer Angebot-Nachfrage-Beziehung für die zusammengesetzten Zigarettbündel in jeder der drei Einheiten regelbar sind. 10
14. Verfahren zum Zusammensetzen einer Zigaretteneinpackung, wobei das Verfahren Folgendes umfasst: Einwickeln eines ersten Bündels von Zigaretten in Einwickelmaterial (54), Einwickeln eines zweiten Bündels von Zigaretten in Einwickelmaterial (54), Zusammensetzen eines ersten Innenrahmens A (23) um das erste eingewickelte Bündel von Zigaretten, um ein erstes zusammengesetztes Bündel von Zigaretten (12) zu bilden, Zusammensetzen eines zweiten Innenrahmens B (22) um das zweite eingewickelte Bündel von Zigaretten, um ein zweites zusammengesetztes Bündel von Zigaretten (14) zu bilden, Transportieren des ersten zusammengesetzten Bündels von Zigaretten (12) und des zweiten zusammengesetzten Bündels von Zigaretten (14) zu einer Kombiniereinheit (32) in kombinierter Beziehung als eine innere Anordnung AB (75), und Zusammensetzen eines Außenrahmens C (26) um die innere Anordnung AB (75). 20

Revendications

1. Appareil servant à former un paquet de cigarettes, comprenant une première unité d'emballage de cigarettes (30), une deuxième unité d'emballage de cigarettes (31) et une troisième unité de combinaison (32), la première unité d'emballage de cigarettes (30) comprenant un premier poste d'emballage (55), la deuxième unité d'emballage de cigarettes (31) comprenant un deuxième poste d'emballage (55), le premier poste d'emballage (55) pouvant être commandé pour emballer un premier faisceau de cigarettes dans un matériau d'emballage (54) afin de former un premier faisceau de cigarettes emballé (55a), le deuxième poste d'emballage (55) pouvant être commandé pour emballer un deuxième faisceau de ci- 45

garettes dans un matériau d'emballage (54) afin de former un deuxième faisceau de cigarettes emballé (55a), **caractérisé en ce que** la première unité d'emballage de cigarettes (30) peut être commandée pour assembler un premier cadre intérieur A (23) autour du premier faisceau de cigarettes emballé (55a) afin de former un premier faisceau de cigarettes assemblé (12), la deuxième unité d'emballage de cigarettes (31) peut être commandée pour assembler un deuxième cadre intérieur B (22) autour du deuxième faisceau de cigarettes emballé (55a) afin de former un deuxième faisceau de cigarettes assemblé (14), et la troisième unité de combinaison (32) peut être commandée pour combiner les premier et deuxième faisceaux de cigarettes assemblés (12, 14) afin de former un ensemble intérieur (75) comprenant les cadres intérieurs A et B (22, 23) assemblés, et pour assembler un cadre extérieur C (26) autour de l'ensemble intérieur (75) afin de former un paquet de cigarettes.

2. Appareil selon la revendication 1, dans lequel ladite première unité d'emballage de cigarettes (30), ladite deuxième unité d'emballage de cigarettes (31) et ladite troisième unité de combinaison (32) sont des machines de confection de paquets de cigarettes séparées, ou dans lequel les première et deuxième unités d'emballage de cigarettes sont réalisées sous la forme d'une seule unité qui peut être commandée pour assembler le premier cadre intérieur A autour du premier faisceau de cigarettes emballé (55a) et le deuxième cadre intérieur B autour du deuxième faisceau de cigarettes emballé (55a). 25
3. Appareil selon la revendication 1 ou la revendication 2, dans lequel la troisième unité de combinaison (32) est configurée pour recevoir le premier faisceau de cigarettes assemblé (12) et le deuxième faisceau de cigarettes (14) assemblé dans une relation de recouvrement face à face. 30
4. Appareil selon l'une quelconque des revendications précédentes, dans lequel la première unité d'emballage de cigarettes (30) et la deuxième unité d'emballage de cigarettes (31) comprennent chacune un poste de réception de cigarettes (52), un convoyeur de cadres intérieurs prédécoupés (56), un poste de pliage (59) et un convoyeur de transfert (65, 68). 35
5. Appareil selon la revendication 4, dans lequel, dans la première et dans la deuxième unité d'emballage de cigarettes (30, 31), le faisceau de cigarettes emballé (55a) est convoyé vers le poste de pliage dans le convoyeur de cadres intérieurs prédécoupés (56). 40
6. Appareil selon la revendication 5, dans lequel la première et/ou la deuxième unité d'emballage de cigarettes (30, 31) comprennent en outre un mécanisme 45

d'avance indexé qui fait avancer le faisceau de cigarettes emballé (55a) dans le poste de pliage (59).

7. Appareil selon l'une quelconque des revendications 4 à 6, dans lequel les premières et deuxième unités d'emballage de cigarettes (30, 31) comprennent en outre une alimentation de pièces prédécoupées (57) à partir de laquelle, à l'utilisation, le premier ou le deuxième cadre intérieur est convoyé dans le poste de pliage (59) dans le convoyeur de cadres intérieurs prédécoupés (56). 10
8. Appareil selon l'une quelconque des revendications 4 à 7, dans lequel les convoyeurs de transfert (65, 68) de la première unité d'emballage de cigarettes (30) et de la deuxième unité d'emballage de cigarettes (31) sont adjacents l'un à l'autre dans une relation parallèle décalée. 15
9. Appareil selon la revendication 8, dans lequel le convoyeur de transfert (68) de la deuxième unité d'emballage de cigarettes (31) est positionné de façon à se trouver plus bas que le convoyeur de transfert (65) de la première machine d'emballage de cigarettes (30), et dans lequel le convoyeur de transfert (65) de la première machine d'emballage de cigarettes (31) est positionné de façon à se trouver plus bas que le convoyeur de transfert (68) de la deuxième machine d'emballage de cigarettes (32). 20 25 30
10. Appareil selon l'une quelconque des revendications précédentes, dans lequel la troisième unité de combinaison (32) comprend un poste de transfert entre convoyeurs qui possède un premier piston de transfert (71a) et un deuxième piston de transfert (70a), le premier piston de transfert (71a) croisant une ligne de convoyeur venant de la première unité d'emballage de cigarettes (30), le deuxième piston de transfert (70a) croisant une ligne de convoyeur venant de la deuxième machine d'emballage de cigarettes (31), grâce à quoi les premier et deuxième pistons de transfert (71a, 70a) peuvent être commandés pour déposer des faisceaux de cigarettes assemblés A et/ou B sur un convoyeur de combinaison (69) afin de former ainsi un ensemble intérieur AB (75). 35 40 45
11. Appareil selon l'une quelconque des revendications précédentes, dans lequel la troisième unité de combinaison (32) comprend une alimentation de pièces prédécoupées (90) à partir de laquelle le cadre extérieur C (26) est alimenté dans un poste de pliage (91). 50
12. Appareil selon l'une quelconque des revendications 4 à 11, dans lequel les convoyeurs de transfert (65, 68) des première et deuxième unités d'emballage de cigarettes comprennent en outre chacun des capteurs, lesdits capteurs pouvant être commandés 55

pour détecter un manque de faisceaux de cigarettes assemblés A et/ou B sur les convoyeurs de transfert (65, 68).

13. Appareil selon la revendication 12, dans lequel les capteurs communiquent avec les première et deuxième unités d'emballage de cigarettes (30, 31) et avec la troisième unité de combinaison (32) de telle façon que les vitesses de fonctionnement des unités peuvent être contrôlées en fonction d'une relation approvisionnement / besoin en faisceaux de cigarettes assemblés dans chacune des trois unités. 5 10
14. Procédé d'assemblage d'un paquet de cigarettes, ledit procédé comprenant les étapes consistant à emballer un premier faisceau de cigarettes dans un matériau d'emballage (54), emballer un deuxième faisceau de cigarettes dans un matériau d'emballage (54), assembler un premier cadre intérieur A (23) autour du premier faisceau de cigarettes emballé afin de former un premier faisceau de cigarettes assemblé (12), assembler un deuxième cadre intérieur B (22) autour du deuxième faisceau de cigarettes emballé afin de former un deuxième faisceau de cigarettes assemblé (14), transporter ledit premier faisceau de cigarettes assemblé (12) et ledit deuxième faisceau de cigarettes assemblé (14) jusqu'à une unité de combinaison (32) dans une relation combinée sous la forme d'un ensemble intérieur AB (75), et assembler un cadre extérieur C (26) autour de l'ensemble intérieur AB (75). 15 20 25 30 35 40 45 50 55

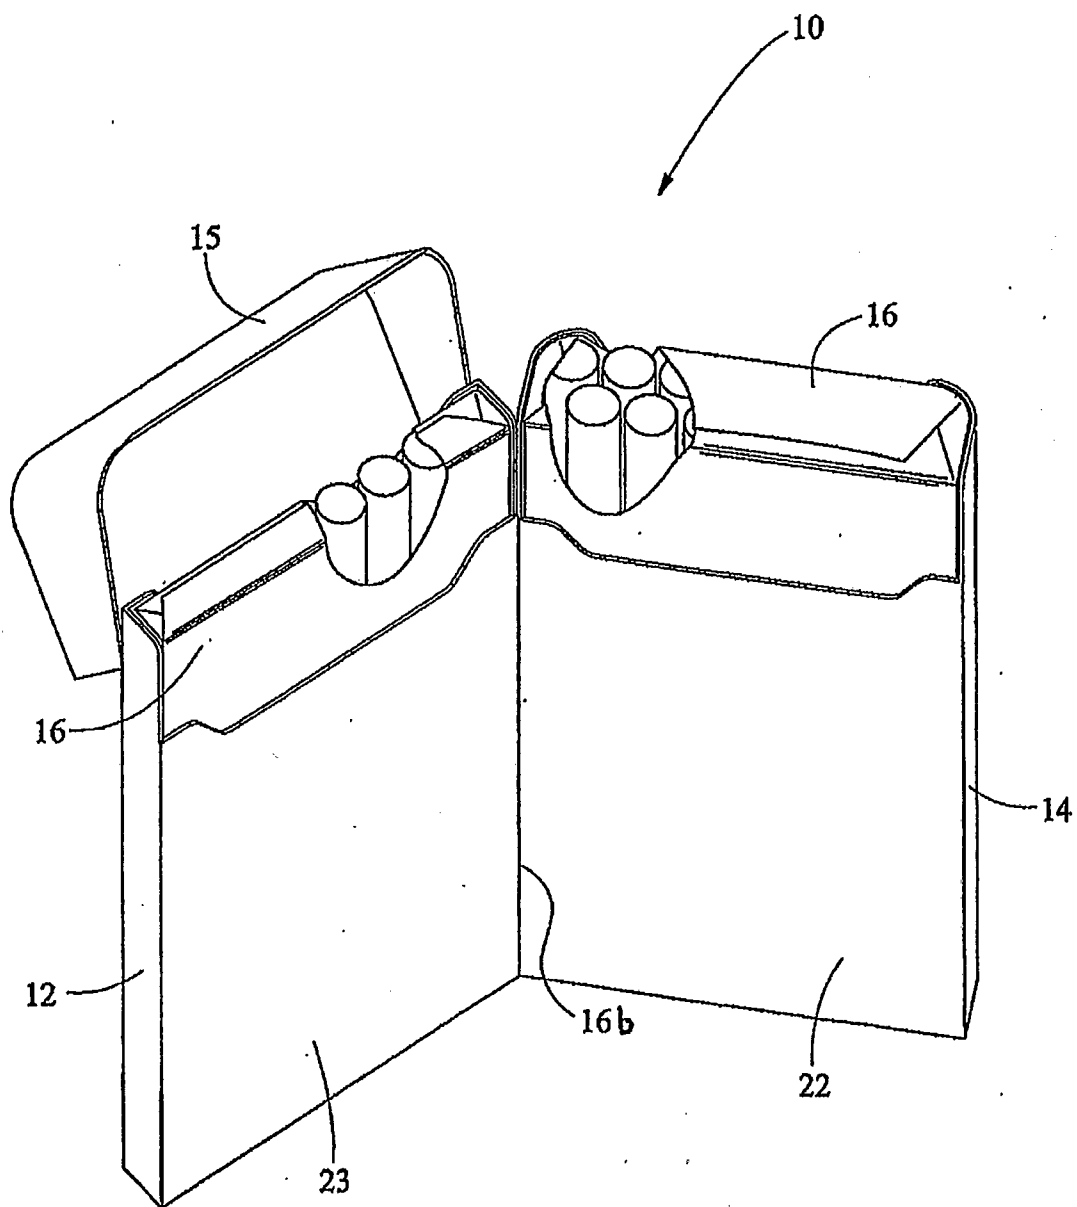


FIG. 1

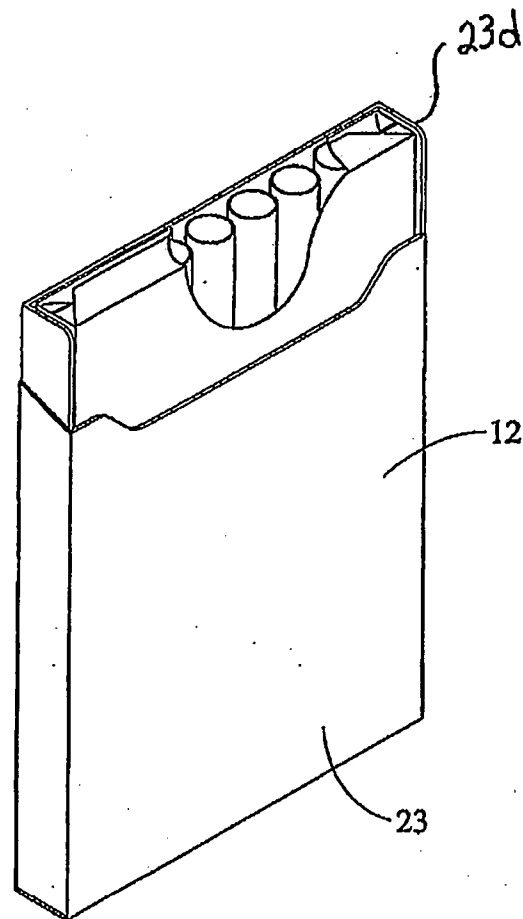


FIG. 2

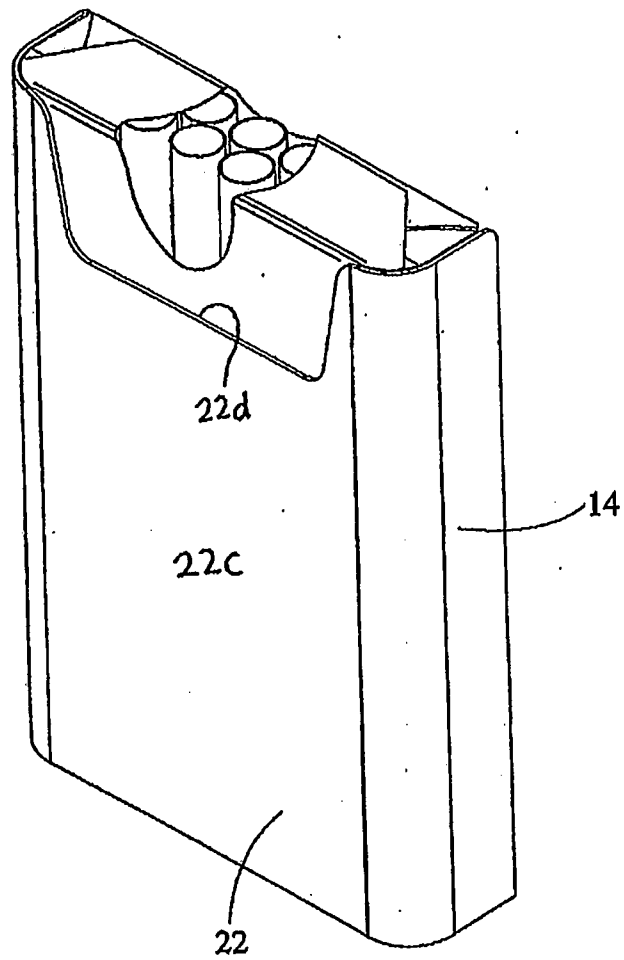


FIG. 3

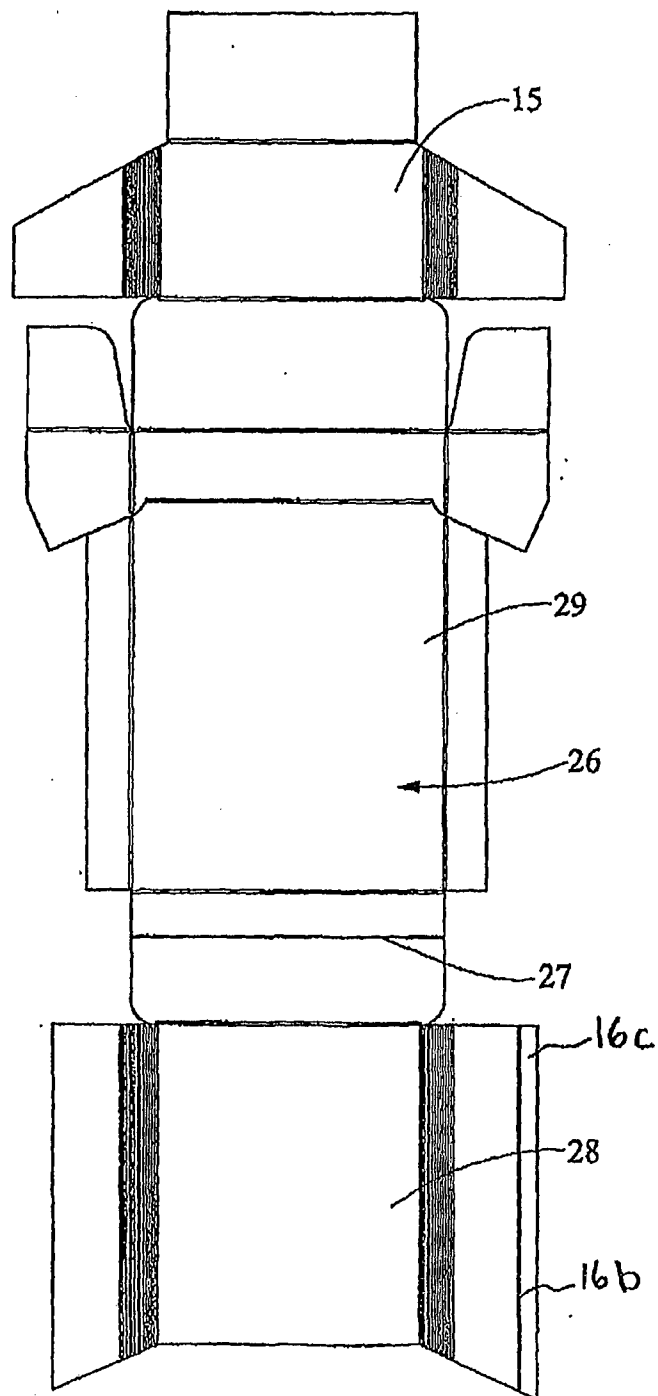


FIG. 4

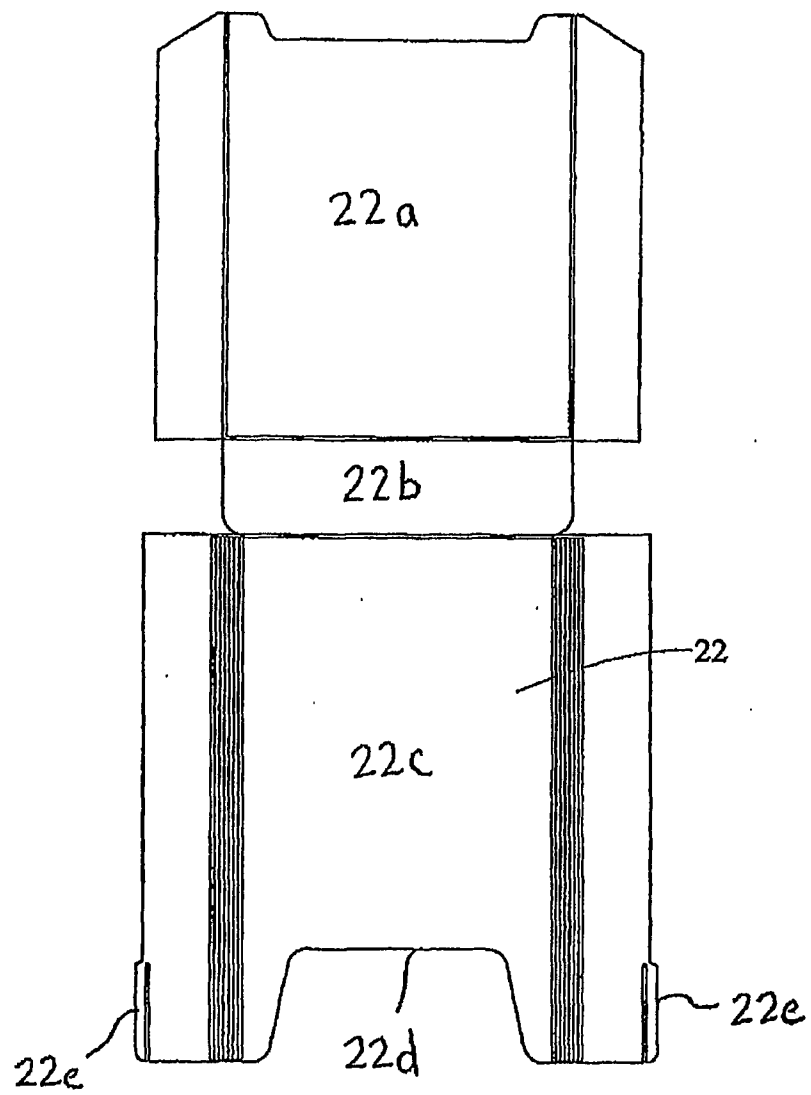


FIG. 5

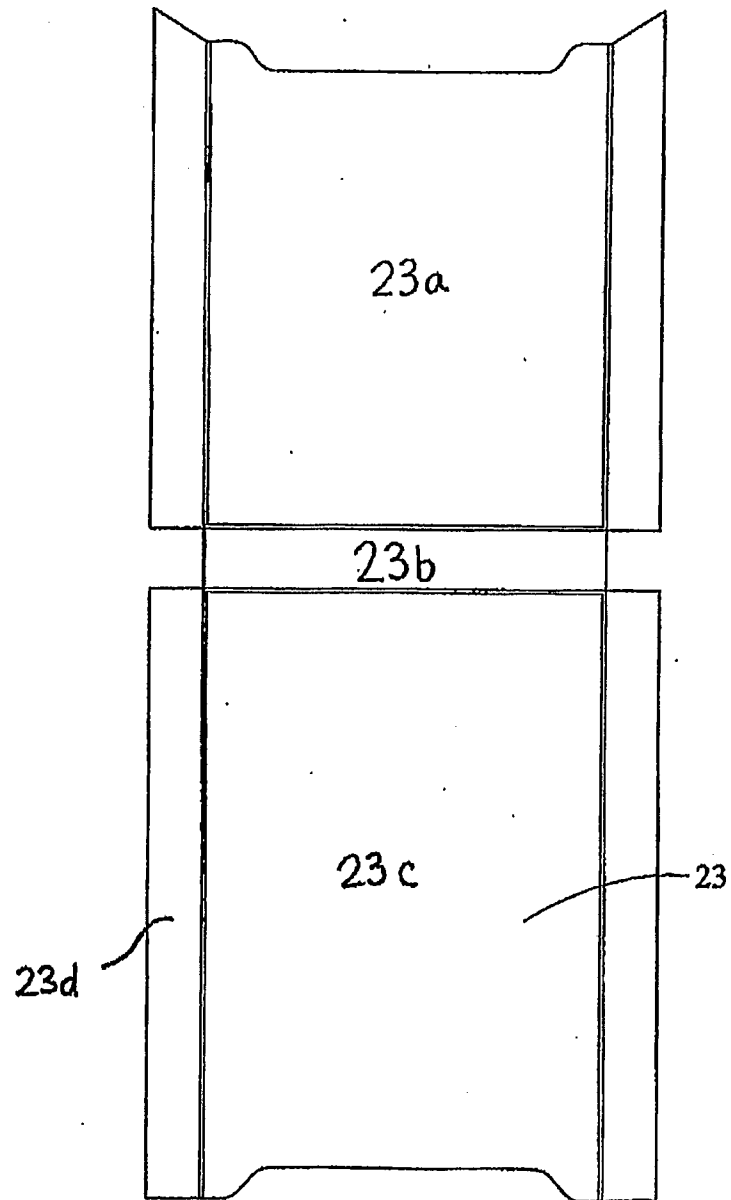


FIG. 6

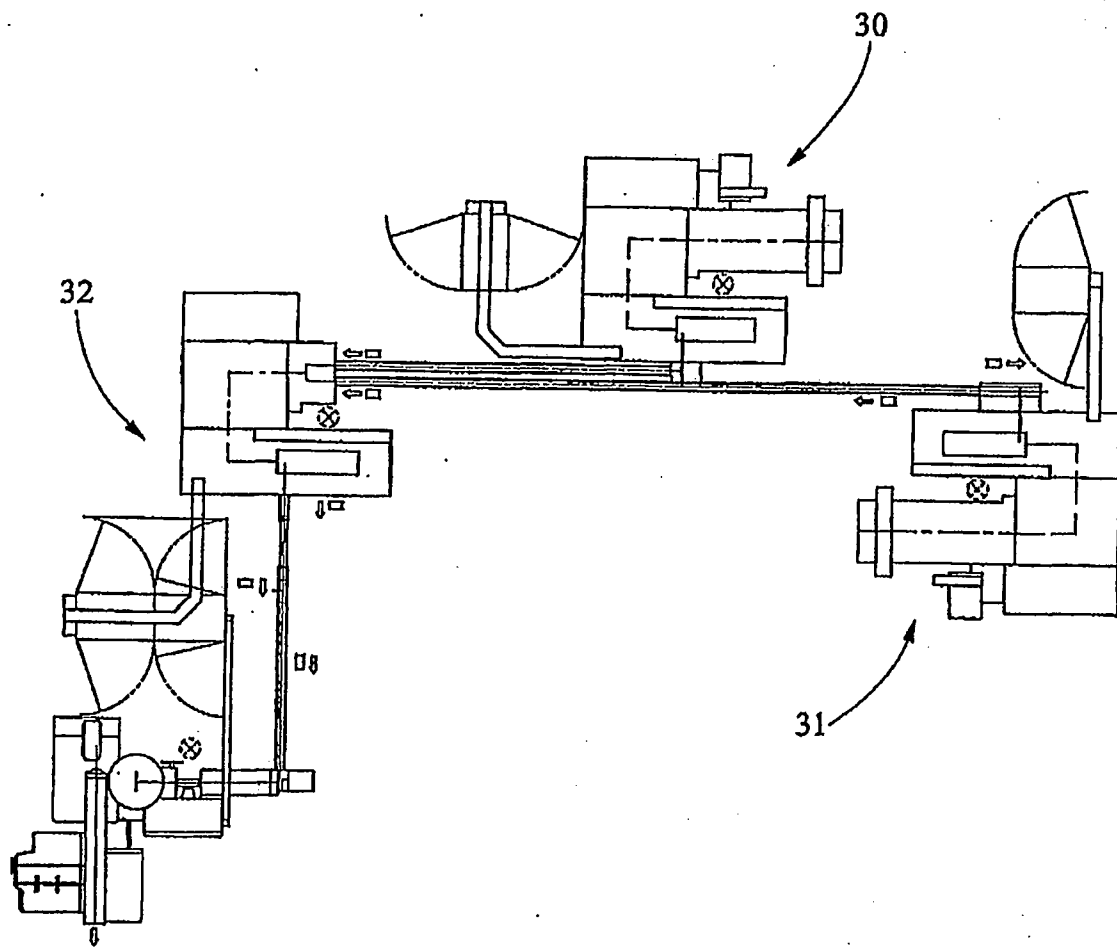


FIG. 7

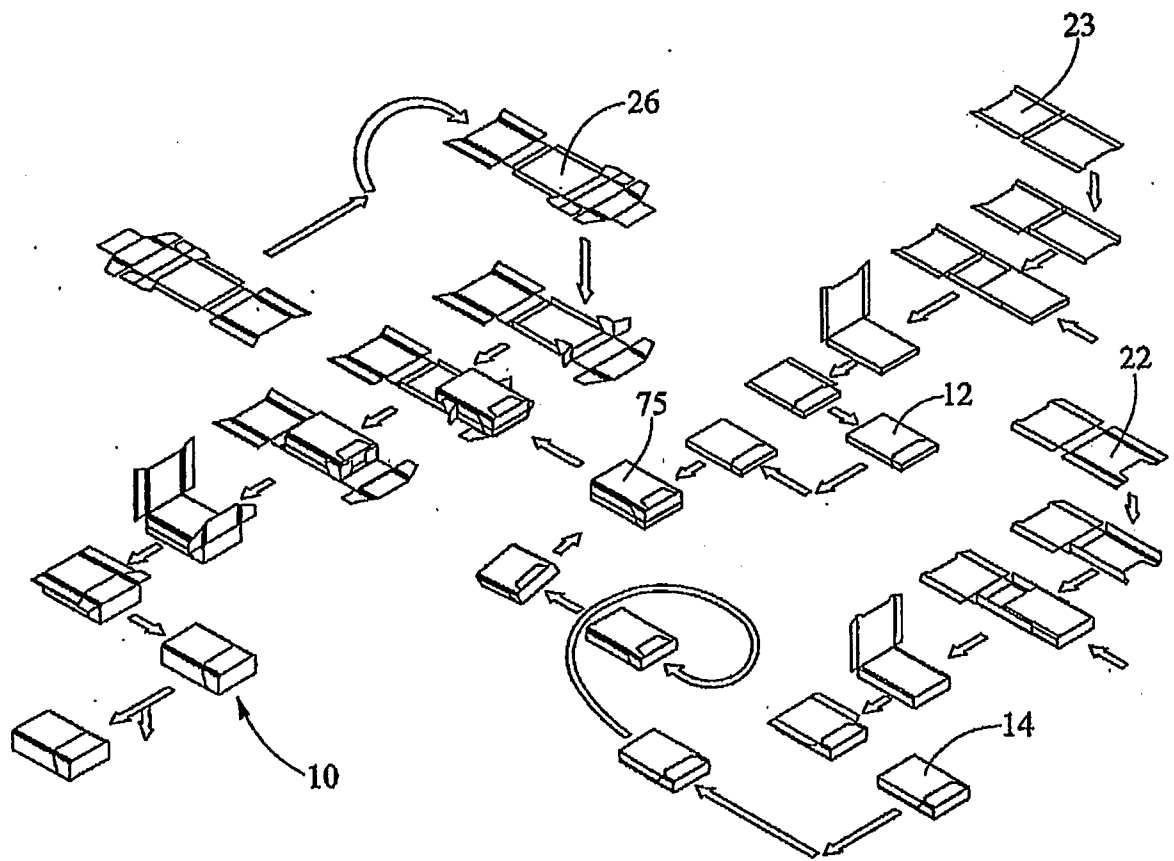


FIG. 8

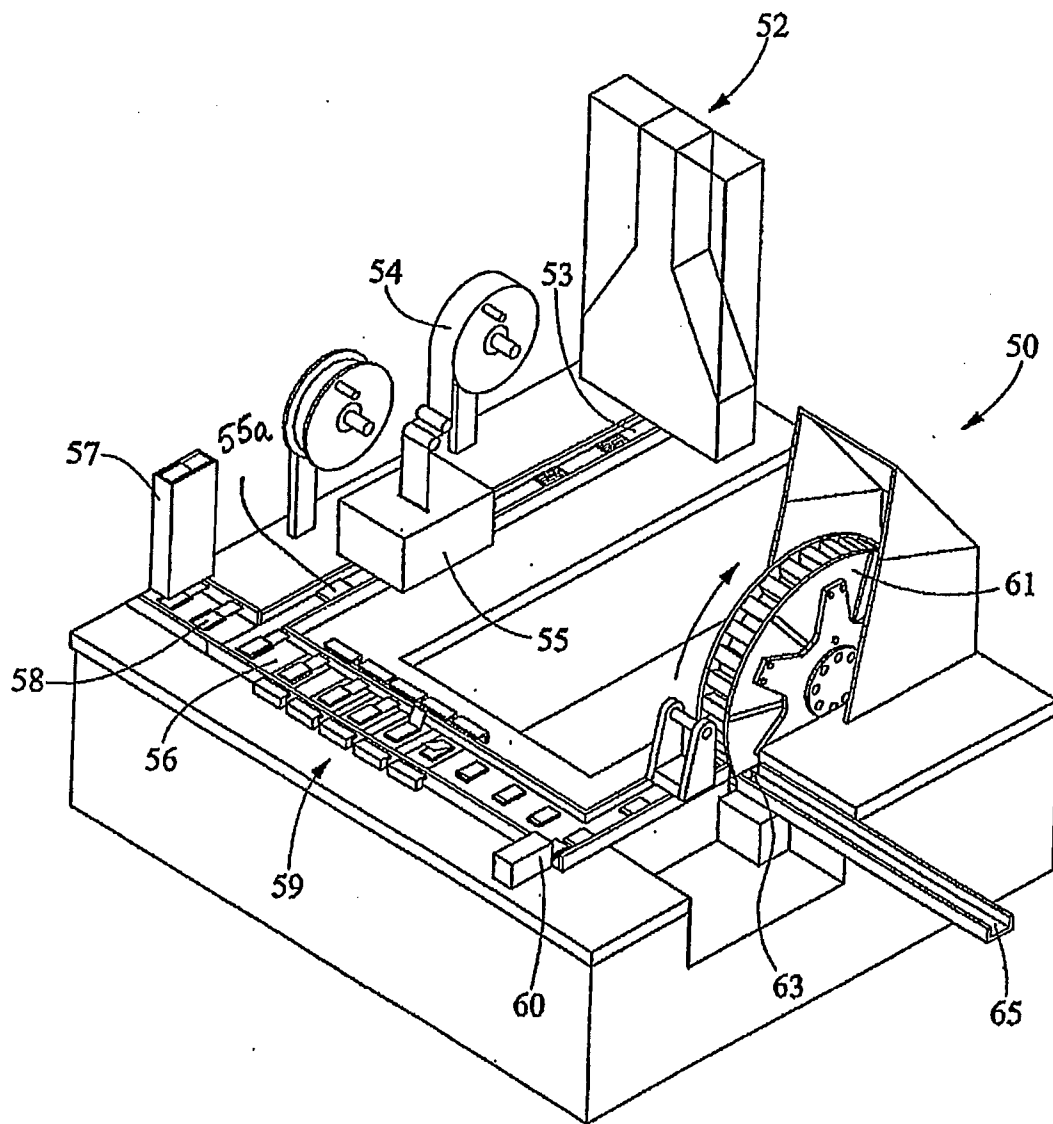


FIG. 9

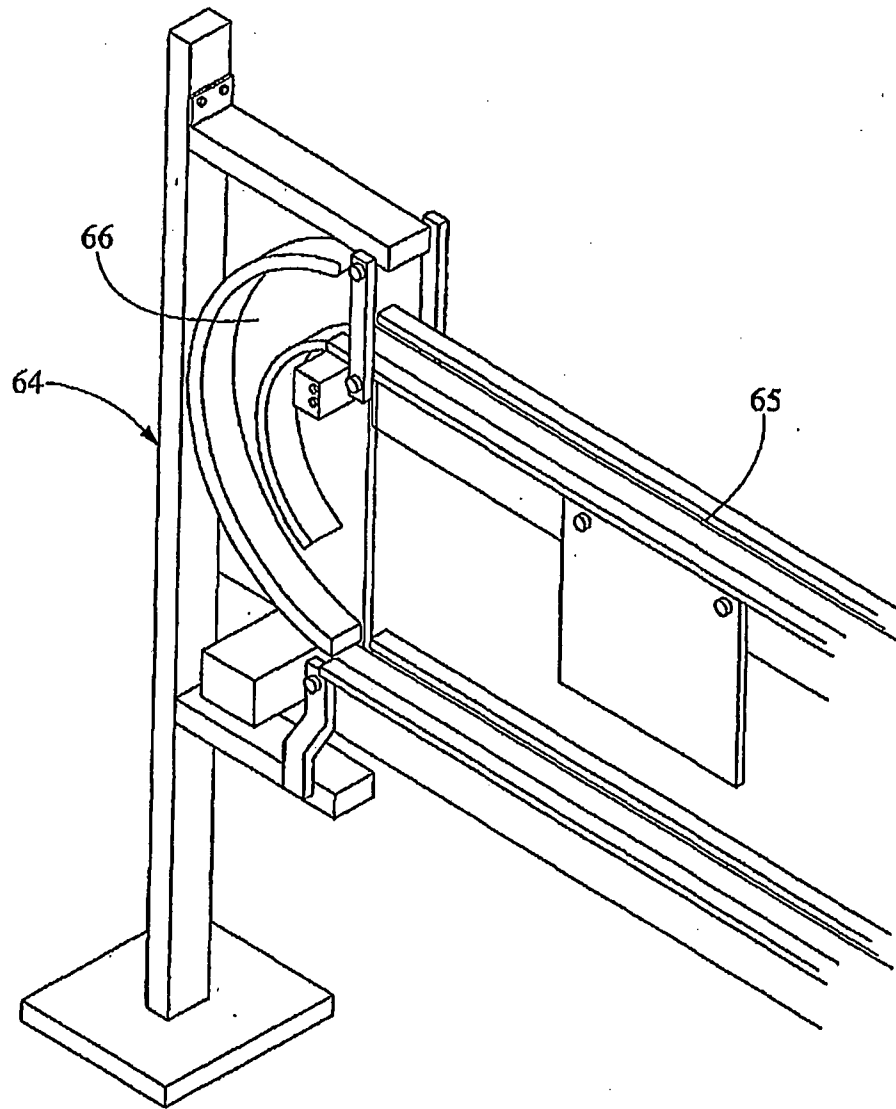


FIG. 10

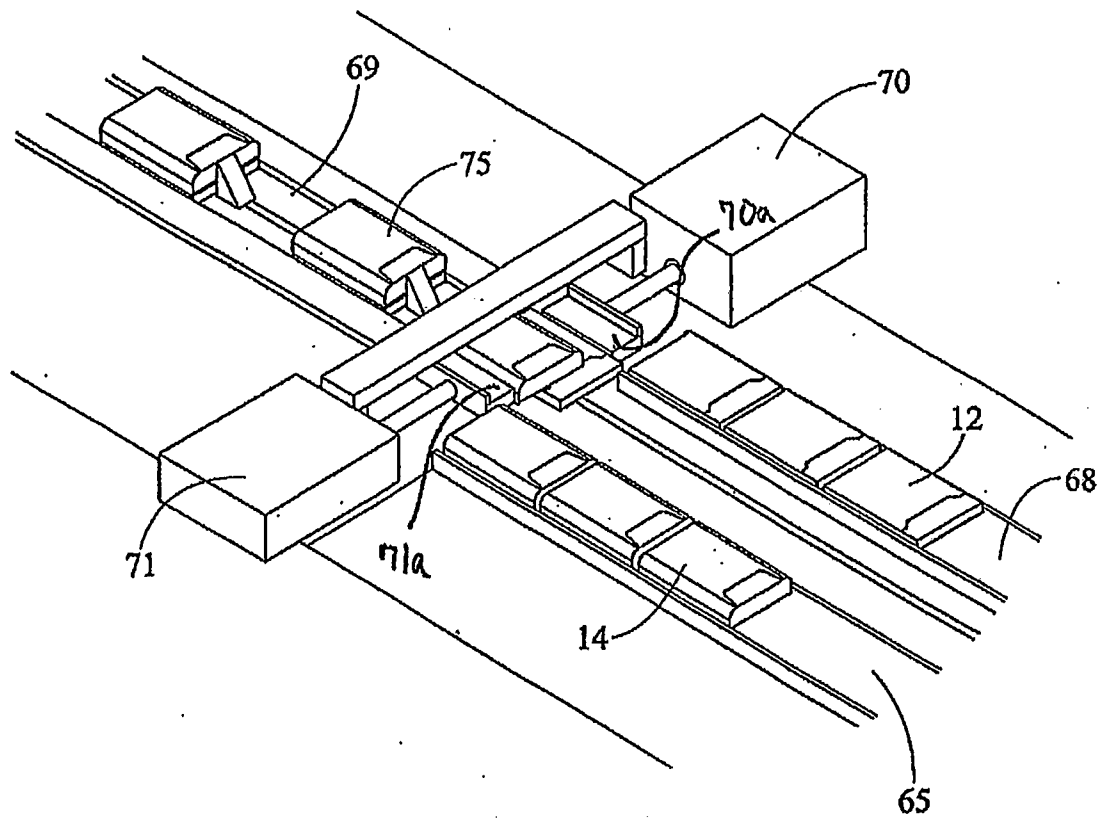


FIG. 11

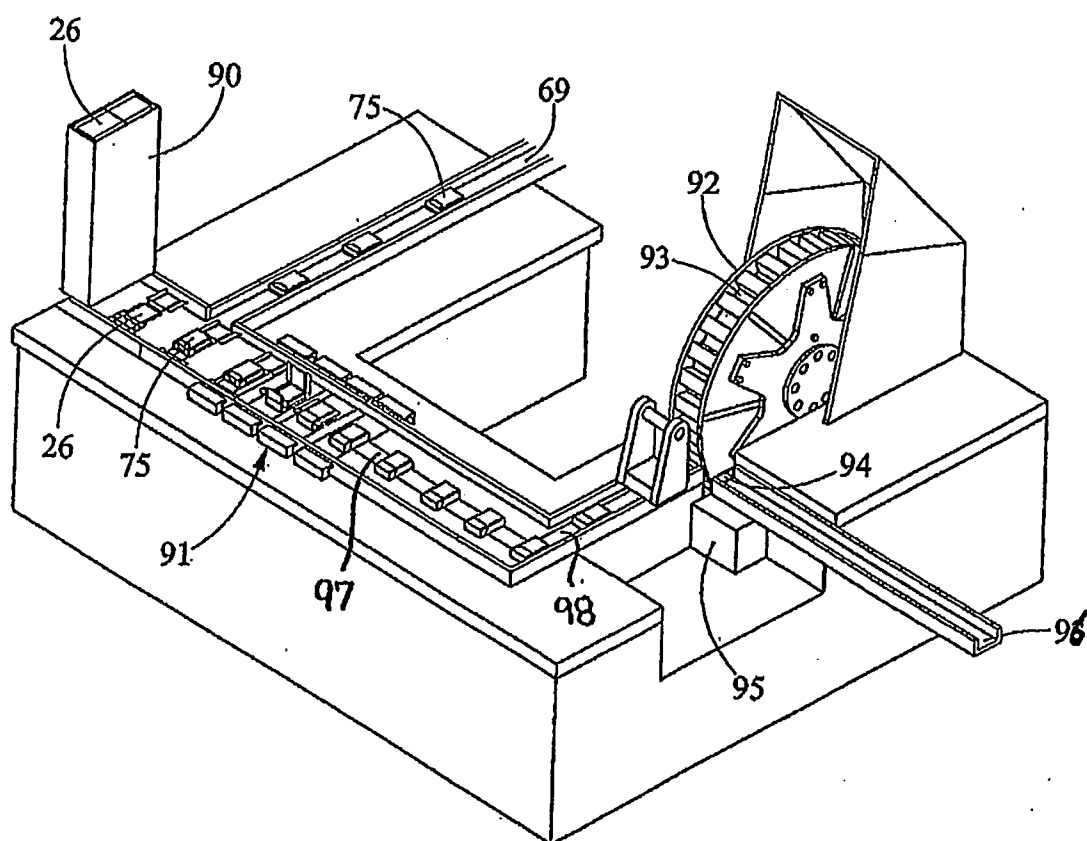


FIG. 12

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2004080844 A [0002] [0003]
- US 5461842 A [0004]

SZABADALMI IGÉNYPONTOK



SZTNH-100043542

1. Berendezés cigarettacsomag kialakítására, amelyben első cigarettagöngyölő egység (30), második cigarettagöngyölő egység (31) és harmadik összerakó egység (32) van elrendezve, ahol az első cigarettagöngyölő egység (30) tartalmaz egy első göngyölőállomást (55), a második cigarettagöngyölő egység (31) tartalmaz egy második göngyölőállomást (55), az első göngyölőállomás (55) arra szolgál, hogy első cigarettaköteget burkoljon göngyölőanyaggal (54) annak érdekében, hogy első burkolt cigarettaköteget (55a) alakítsunk ki, a második göngyölőállomás (55) alkalmas arra, hogy második cigarettaköteget burkoljon be göngyölőanyaggal (54) annak érdekében, hogy második burkolt cigarettaköteget (55a) alakítsunk ki, **azzal jellemezve**, hogy az első cigarettagöngyölő egység (30) alkalmas arra, hogy első belső vázat A (23) képezzen az első beburkolt cigarettaköteg (55a) körül annak érdekében, hogy első összeállított cigarettaköteget (12) képezzünk, a második cigarettagöngyölő egység (31) alkalmas arra, hogy második belső vázat B (22) alakítson ki a második burkolt cigarettaköteg (55a) körül annak érdekében, hogy második összeállított cigarettaköteget (14) alakítsunk ki, és a harmadik összeállító egység (32) alkalmas arra, hogy az első és második összeállított cigarettakötegeket (12, 14) összeillessze annak érdekében, hogy egy belső egységet (75) alakítson ki, amely összeillesztett belső A és B vázából (22, 23) áll, valamint azért, hogy egy külső vázat C (26) rendezzen el a belső egység (75) körül, hogy cigarettacsomagot hozzunk létre.

2. Az 1. igénypont szerinti berendezés, ahol az első cigarettagöngyölő egység (30), a második cigarettagöngyölő egység (31) és a harmadik összeillesztő egység (32) egymástól elkülönülő cigarettacsomagoló gépek, vagy ahol az első és második cigarettagöngyölő egységek egyetlen olyan egységből vannak kialakítva, amely alkalmas arra, hogy összeállítsa az első belső A vázat az első burkolt cigarettaköteg (55a) körül, és a második belső B vázat a második beburkolt cigarettaköteg (55a) körül.

3. Az 1. vagy 2. igénypontok bármelyike szerinti berendezés, ahol a harmadik összeillesztő egység (32) úgy van kialakítva, hogy egymással szemben, egymáson fekvő első összeállított cigarettaköteget (12) és a második összeállított cigarettaköteget (14) fogadjon be.

4. Az előző igénypontok bármelyike szerinti berendezés, ahol az első cigarettagöngyölő egység (30) és a második cigarettagöngyölő egység (31) egyaránt tartalmaz egy cigarettabefogadó munkaállomást (52), nyers belső váz szállítószalagot (56), hajtogató munkaállomást (59), és átadó szállítószalagot (65, 68).

5. A 4. igénypont szerinti berendezés, ahol az első és a második cigarettagöngyölő egységben (30, 31) a beburkolt cigarettaköteg (55a) a nyers belső váz szállítószalagon (56) a hajtogató munkaállomáshoz van továbbítva.

6. Az 5. igénypont szerinti berendezés, ahol az első és/vagy a második cigarettagöngyölő egység (30, 31) továbbá tartalmaz egy elfordítható, előretoló mechanizmust, amelyben a beburkolt cigarettaköteg (55a) a hajtogató munkaállomásra (59) van továbbítva.

7. A 4. – 6. igénypontok bármelyike szerinti berendezés, ahol az első és második cigarettagöngyölő egységek (30, 31) tartalmaznak egy nyersdarab adagolót (57), amelyből működés közben az első és második belső váz a hajtogató munkaállomásra (59) van továbbítva a nyers belső váz szállítószalagon (56).

8. A 4. – 7. igénypontok bármelyike szerinti berendezés, ahol az első cigarettagöngyölő egységben (30), valamint a második cigarettagöngyölő egység (31) átadó szállítószalagjai (65, 68), egymással szomszédos, eltoltt helyzetben és egymással párhuzamosan vannak elrendezve.

9. A 8. igénypont szerinti berendezés, ahol a második cigarettagöngyölő egység (31) átadó szállítószalagja (68) lejjebb van, mint az első cigarettagöngyölő gép (30) átadó szállítószalagja (65), ahol az első cigarettagöngyölő gép (31) átadó szállítószalagja (65) alacsonyabban van, mint a második cigarettagöngyölő gép (32) átadó szállítószalagja (68).

10. Az előző igénypontok bármelyike szerinti berendezés, ahol a harmadik összeállító egység (32) szállítószalag átadó munkaállomással van ellátva, amelyen első átadó munkahenger (71a), valamint egy második átadó munkahenger (70a) van elrendezve, és az első átadó munkahenger (71a) az első cigarettagöngyölő egységtől (30) induló szállítószalag pályát, a második átadó munkahenger (70a) a második cigarettagöngyölő géptől (31) induló szállítószalag pályát metsz, ahol mind az első, mind pedig a második átadó munkahengerek (71a, 70a) alkalmasak arra, hogy összeállított cigaretta A és/vagy B kötegeket helyezzenek összeállító szállítószalagra (69), és ezzel belső AB egységet (75) hozzanak létre.

11. Az előző igénypontok bármelyike szerinti berendezés, ahol a harmadik összeállító egység (32) nyers adagolóegységgel (90) van ellátva, amelyből a külső váz C (26) a hajtogató munkaállomásra (91) jut.

12. A 4. – 11. igénypontok bármelyike szerinti berendezés, ahol az első és a második cigarettagöngyölő egységek átadó szállítószalagjai (65, 68) egyaránt az összeállított cigarettakötegek A és/vagy B átadó szállítószalagokon (65, 68) fellépő hiányát érzékelő érzékelőkkel vannak ellátva.

13. A 12. igénypont szerinti berendezés, ahol az érzékelők összeköttetésben vannak az első és második cigarettagöngyölő egységekkel (30, 31), valamint a harmadik összeállító egységgel (32) úgy, hogy az egységek működési sebessége az összeállított cigarettakötegek viszonyának szabályozása érdekében, a három egység közül minden egyes egységben az ellátási igénynek megfelelően szabályozható.

14. Eljárás cigarettacsomag összeállítására, ahol az eljárás során első cigarettaköteget burkolunk be göngyölőanyaggal (54), második cigarettaköteget burkolunk be göngyölőanyaggal (54), összeállítunk első belső vázat A (23) az első göngyölt cigarettaköteg körül annak érdekében, hogy első összeállított cigarettaköteget (12) hozzunk létre, továbbá összeállítunk egy második belső vázat B (22) a második göngyölt cigarettaköteg körül annak érdekében, hogy második összeállított cigarettaköteget (14) hozzunk létre, továbbítjuk az említett első összeállított cigarettaköteget (12) és a második összeállított cigarettaköteget (14) egy összeállító egységhez (32) úgy, hogy egymással belső AB egységet (75) képeznek, majd a belső egység AB (75) körül külső vázat C (26) képezünk.