



(51) International Patent Classification:
A47J 31/52 (2006.01)

(21) International Application Number:
PCT/EP2010/068180

(22) International Filing Date:
25 November 2010 (25.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09177731.8 2 December 2009 (02.12.2009) EP

(71) Applicant (for all designated States except US):
NESTEC S.A. [CH/CH]; Av. Nestlé 55, CH-1800 Vevey (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **AGON, Fabien Ludovic** [FR/CH]; Chemin du Clous 2, CH-1897 Le Bouveret (CH). **DELBREIL, Marc** [FR/CH]; Rue du Stade, 81, CH-1630 Bulle (CH).

(74) Agent: **SIVIER, Damien**; Ave Nestlé 55, CH-1800 Vevey (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,

KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: BEVERAGE PREPARATION MACHINE COMPRISING A CARD READING ARRANGEMENT

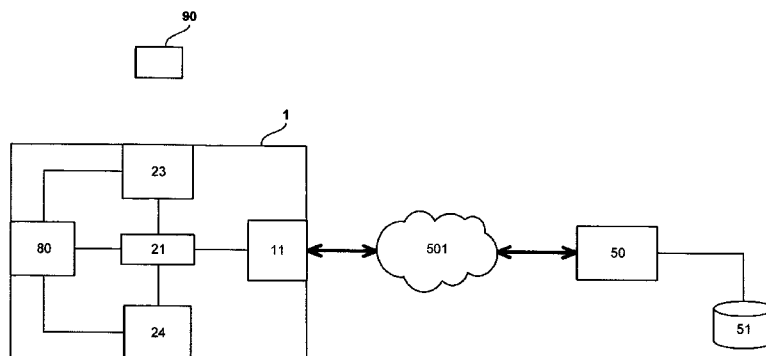


Fig. 5

(57) Abstract: The present invention relates to a beverage preparation machine (1), in particular to capsule-based machine, comprising a card reading arrangement (23, 24) for reading user identification information or uniquely identifying a user or user settings from a card (90). The read information can either be submitted to an external server or can be processed within the machine (1) itself. A control unit (21) adapted to control the functions and process steps of the machine depending on the read user information and/or depending on information received from the server (50) in response to the submitted data.

WO 2011/067156 A1

For allowing the user to interact with such machines, for providing operation instructions to the machine or obtaining feed-back there from, various systems have been disclosed in the art, for instance as mentioned in the following references: AT 410 377, CH 682 798, DE 44 29 5 353, DE 202 00 419, DE 20 2006 019 039, DE 2007 008 590, EP 1 302 138, EP 1 448 084, EP 1 676 509, EP 08155851.2, FR 2 624 844, GB 2 397 510, US 4,377,049, US 4,458,735, US 4,554,419, US 4,767,632, US 4,954,697, US 5,312,020, US 10 5,335,705, US 5,372,061, US 5,375,508, US 5,731,981, US 5,645,230, US 5,836,236, US 5,959,869, US 6,182,555, US 6,354,341, US 6,759,072, US 2007/0157820, WO 97/25634, WO99/50172, WO 2004/030435, WO 2004/030438, WO 2006/063645, WO 2006/090183, WO 2007/003062, WO 15 2007/003990, WO 2008/104751, WO 2008/138710, WO 2008/138820 and WO 2009/016490.

Nowadays beverage preparation machines provide an increasing number of different functionalities. This 20 allows a greater flexibility for the user but on the other hand also makes it more difficult for the user to find the functionalities matching his needs. Further, the increased number of functions does also include functionalities, which might cause a financial or other damage to the 25 proprietor of the machine when used by an unauthorized person.

Further, for example in the case of B2B solutions, where the beverage preparation machine is commercially used and 30 accessed by a plurality of different users, it is desirable to allow every user to use the beverage preparation machine in a specific way but on the other hand it is again difficult for the different users to operate the beverage preparation machine in a way 35 satisfying their respective needs.

Systems for making and delivering a customized beverage product to a consumer are known from the art, for example, from document WO 01/12039 A2. However, these systems do 40 not provide any flexible and secure solution to automate

the execution of stored processing steps, based upon the identification of the consumer. In particular, when remote resources are involved in the execution of the stored processing steps, securing the access to these resources and providing an efficient way to handle remotely stored data is particularly relevant. Systems known from the art do not provide any effective solution to address these problems.

10

Summary of the Invention

It is therefore an object of the present invention to improve the prior art.

15

Further is an object of the present invention to provide a beverage preparation machine comprising a card reading arrangement and a method for operating a beverage preparation machine comprising a card reading arrangement, which allows a user based control of the operation of the machine.

20

More specifically, it is therefore an object of the present invention to provide a beverage preparation machine comprising a card reading arrangement and a method for operating a beverage preparation machine comprising a card reading arrangement, which allows a personalization of the machine or of the use of the machine. It is further an object of the present invention to provide such a machine and method, which allow to operate the machine depending on the current user and/or depending on specific access rights and/or to access a distant server via a network using the card reading arrangement as a means to give access to this distant server and/or specific functionalities controlled by the distant server.

25

30

According to a first aspect the present invention relates to a beverage preparation machine, in particular a capsule-based machine, comprising a card reading arrangement for reading user identification information uniquely identifying a user from a card, a memory for

35

40

storing processing steps for which an authentication is necessary and for storing associations between user identification information and said processing steps of the machine, and a control unit adapted to initiate
5 execution of a stored processing step only in case of a match between the associated user identification information and the read user identification information.

According to a further aspect the present invention
10 relates to a program stored on a memory device and executable by a control unit of a beverage preparation machine, in particular a capsule-based beverage preparation machine, wherein said program when being executed is arranged to perform, the steps of
15 reading user identification information uniquely identifying a user from a card, storing processing steps for which an authentication is necessary, storing associations between user identification information and said processing steps of the machine, and initiating
20 execution of a stored processing step only in case of a match between the associated user identification information and the read user identification information.

Further features, advantages and objects of the present
25 invention will become evident by means of the Figures of the enclosed drawings as well as by the following detailed explanation of illustrative-only embodiments of the present invention.

30

Brief Description of the Drawings

The invention will now be described with reference to schematic drawings, wherein

35

Figs 1a, 1b, 2a and 2b show different perspective views of a beverage preparation machine according to the present invention,

Fig. 3 shows a block diagram showing schematically the functional architecture of a beverage preparation machine according to the present invention being connected to a network,

- 5 Fig. 4 shows a block diagram showing schematically the functional architecture of a network comprising a beverage preparation machine according to the present invention, Fig. 5 shows another block diagram showing schematically the functional architecture of a beverage preparation
10 machine according to the present invention, Fig. 6 shows another block diagram showing schematically the functional architecture of a system comprising a beverage preparation machine and a server according to the present invention, and
15 Figs. 7 to 9 show schematic overviews over the process steps of the method according to the present invention.

Detailed Description

- 20 The machine according to the present invention can be a coffee, tea or soup machine, in particular a machine for supplying a beverage or liquid food by passing hot or cold water or another liquid through a capsule containing an ingredient of the beverage or liquid food to be supplied,
25 such as ground coffee.

- For example, the preparation machine comprises: an ingredient processing arrangement including one or more of a liquid reservoir, liquid circulation circuit, a heater,
30 a pump and a beverage preparation unit arranged to receive ingredient capsules, and evacuate capsules upon use thereof; a housing having an opening leading into a seat to which capsules are evacuated from the preparation unit; and a receptacle having a cavity forming a storage space
35 for collecting capsules evacuated to the seat into the receptacle to a level of fill. The receptacle is insertable into the seat for collecting capsules and is removable from the seat for emptying the collected capsules. Examples of such ingredient processing

arrangements are disclosed in WO 2009/074550 and in WO 2009/130099, which are incorporated herein by reference.

5 The machine may include an interface as described in PCT/EP09/058540 and/or be in a network for reordering capsules as described in EP 09169800.1.

10 The machine may comprise a user-interface screen for providing information to the user and/or for accepting input by the user. The user-interface screen can be a touch-sensitive screen and/or comprise touch-sensitive input parts. The machine may have a user-input device, such as a touch pad, one or more buttons and/or switches or similar devices known in the art. The user-interface
15 screen can be stylus sensitive.

A stylus may for instance be used to select predefined options displayed on the interface-screen or to write notes and messages on the user-interface screen that may
20 be stored by the machine and re-accessible later. Hence, the screen may be used as a substitution for a post-it. Hereby, it may be possible to select different colors when writing on the screen.

25 According to the present invention, the liquid food or beverage preparation machine has an interface for connection to a remote network, such as a network for accessing remote data displayable on the user-interface screen and/or for transferring local data acquired via the
30 user interface screen, in particular a network for: supplying visual and/or audio information in relation with a liquid food or beverage that can be requested by the user; and/or for ordering, in particular from a remote supplier, goods such as liquid food or beverage
35 ingredients or a service related to this machine by using the user-interface screen.

Hence, the user may be given the technical possibility to order directly through the beverage preparation machine

liquid food or beverage ingredients that are missing or at a low level, or request directly through this machine the most up to date information on a particular item, in particular a liquid food or beverage he has requested or
5 intends to request the machine to prepare or order from the supplier.

Moreover, the user-interface screen can be arranged to perform at least one function selected from: displaying
10 information to the user regarding a parameter of the machine that requires a user intervention, displaying locally stored and/or remotely emitted graphic or text matter, a notepad function, and a visual ambiance generator, for instance by displaying appropriate pictures
15 or moving color shapes, for instance of the screen-saver type.

In order to noticeably affect the ambiance surrounding the machine by visual effects, the user-screen has to dominate
20 the user-visible part of the machine. An interface screen of small size and/or lost somewhere on the user-visible part of the machine will not provide an optimal ambiance effect.

25 Furthermore, the liquid food or beverage preparation machine may include a sound input and/or output device. The sound device can be arranged to cooperate with the user-interface screen, in particular a sound device
30 arranged to cooperate functionally with the screen, such as a sound device for providing melodic acoustic feed back in reaction to a user-input on the user-interface screen and/or cooperating with the screen so that harmonious visual feed-back is generated on the user-interface screen
in reaction to an audio signal. The sound device may
35 include a voice recognition arrangement so as to be able to receive vocal user-commands and/or to link a particular user profile from a voice analysis.

For example, the user-interface screen may be arranged to display a movie, news, weather forecast, stock exchange information or anything alike while the machine is preparing a liquid food or beverage, so that the user does not have to wait until the liquid food or beverage is prepared to move on to such activities but can do them right from the beginning, with a comfortable interface screen whose functionalities go significantly beyond mere input and/or output of data.

10

Such liquid food or beverage preparation machines are particularly handy for preparing a liquid food or beverage during an on-going broadcasted radio or TV program. The user may thus get himself a liquid food or beverage while he is following such a program on an ordinary TV or radio and still continue to follow the program on the beverage preparation machine. Hence, the user will not be attempted to wait the end of the program or an advertising break. The beverage preparation machine may include a receiver that is capable of reacting to a remote control device, such as an IR or radio remote control device, in particular a remote control device compatible with a radio or television, so that the user may start-up the food or beverage preparation machine from a distance, in particular while he is sitting in front of his TV or nearby the radio. The liquid food or beverage preparation machines may of course be connected to a DVD or other media source so that the user can follow his favourite programs while he is preparing a liquid food or beverage.

20
25
30

The machine can be substantially formed by a main body having a rectangular front side being dominated by the user-interface screen and a foot portion larger than the top portion, so that the main body is tapering from the foot portion to the top portion. The main body may include at least one of: a drip tray having a support member for a receptacle to be filled with a liquid food or beverage, a capsule collector, and a liquid supply reservoir such as a water reservoir.

35

Moreover, the machine may have a liquid food or beverage outlet located above an area for receiving a receptacle to be filled, the outlet preferably being hidden by the user-
5 interface screen. For instance, the outlet is located perpendicularly behind the user-interface screen. In fact, the entire area or a substantial part thereof can be located perpendicularly behind the user-interface screen.

10 Thus, in addition of providing a user-interface screen configuration on the machine that naturally and durably captures the user's attention, the machine's outlet, and optionally the receptacle located there under, may be hidden from the user's visual field so as avoid
15 distraction of the user's attention by parts and/or operations of the machine other than those relating to the user-interface screen.

As already mentioned, the present invention relates to a
20 machine connectable to a data-exchange network, the machine being configured for preparing a beverage in particular from a pre-portioned beverage ingredient in a capsule.

25 For this purpose, the machine comprises a communication module for connecting the machine to said network via a wired or wireless connection. The network to which the communication module is connectable may be the internet, an intranet, GSM network, UMTS network, Bluetooth network,
30 infrared (IR) or a similar network to which one or more distant computers, servers and terminals are connected for communicating with the communication module of the beverage preparation machine. Hereby, the term "network" is intended to refer to a system comprising the machine
35 according to the present invention and at least one further device, which are connected to each other via a communication link for one-directional or bi-directional communication. In case that a connection to more than one device is provided, the machine can also be connected to

different devices via different types of communication networks.

Without controlling or participating to the control of the
5 ingredient processing arrangement, the communication module may be configured in the beverage preparation machine to monitor certain aspects of the machine and, in particular, communicate such aspects onto the network to a remote server.

10

The machine further comprises a control unit for controlling all processes within the machine. In one embodiment, the control unit is arranged to communicate data to the communication module, the data relating to at
15 least one of: the beverage preparation process; the ingredient processing arrangement; the control unit and/or beverage preparation settings. This information may then be communicated (or not) to a distant server and be processed for general or particular commercial or
20 servicing or repair or counseling purpose.

In an even safer embodiment, the control unit is prevented from communicating with the communication module. In this case, the communication is not even unidirectional like
25 above but inexistent. Hence, the control unit is configured to receive no signal at all from the communication module not even a signal for an information request. In this embodiment, no data communication channel is needed between the control unit and the communication
30 module.

Typically, the ingredient processing arrangement comprises one or more sensors for measuring parameters of the status of the ingredient processing arrangement and/or the
35 beverage preparation process. For instance, such sensors may include at least one of: temperature sensors, a pressure sensor, a flowmeter, an electric power sensor, an overheat sensor, a scale sensor, a water level sensor, an

ingredient recognition sensor, etc... Such sensors are usually connected to the control unit.

In an embodiment, the communication module can be arranged to receive information from at least one of the sensor(s). The communication module may be directly connected to the sensors, usually in parallel to the control unit, or it may be indirectly connected to the sensor(s) via the control unit and typically be communicated a sensor-related information after processing by the control unit.

Normally, the control unit is connected to a beverage preparation user-interface. The user would use this user-interface to operate the ingredient processing arrangement via the control unit.

Typically, the communication module is connected to a communication user-interface. The user would use this user-interface to retrieve information from the network or retrieve information therefrom.

Such user-interfaces may include screens and touch screens, buttons, switches, etc... as known in the art.

Preferably, the control unit is connected to a beverage preparation user-interface and the communication module is connected to a communication user-interface, the beverage preparation user-interface and the communication user-interface being juxtaposed. In particular, the beverage preparation user-interface can be flush with the communication user-interface. The beverage preparation user-interface and the communication user-interface may be disposed in a single user-interface canvas. Hence, the disposition of the user-interfaces may be such as to appear like a single interface providing all the user-access to the control unit and the communication module.

Whereas the control unit and the communication module may be digitally and/or physically, entirely or partly,

separated within the machine, the corresponding user-interfaces may be configured as an apparent single interface. Hence, the user is confronted with a single or concentrated user-interface arrangement to avoid the dispersion of his/her attention all over the beverage preparation machine.

Typically, the beverage preparation machine comprises a housing for housing: the ingredient processing arrangement; the control unit; and the communication module. This housing would normally also bear the user-interfaces.

For instance, the communication module is arranged to receive from the network and communicate via user-communication means, such as a display and/or loudspeaker, information relating to at least one of: a need to carry out a particular service; a need to repair said machine; and information on a particular ingredient that is being processed in said machine. When the communication module is configured to monitor the machine operation and/or components of the machine, the corresponding information may be communicated to a distant server of the network for evaluation and generation of suggestions to the user, for instance, via the communication module. For example, via appropriate sensor systems, the communication module may monitor the ingredient consumption and suggest timely reordering when the stock of ingredient is low or send general information regarding the ingredient or beverage that is being processed for display on the machine. Instead of a mere suggestion to reorder ingredients, e.g. proportioned ingredients capsules, the system may be configured to proceed to automatic re-ordering when the ingredient stock is low.

The communication module may be arranged for remote monitor of the service periods, for instance for carrying out a descaling process or for general maintenance. The communication module may communicate various parameters of

the ingredient processing arrangement and the control unit for diagnosis purposes and/or for carrying out a market survey as to the user's preferences, for instance the actually used ratios of different ingredients. Hence, a
5 distant server may monitor the preferred volume of beverage dispensing with certain ingredients, etc...

More generally, the communication module may be arranged to receive from the network and communicate via user-
10 communication means, such as a display and/or loudspeaker, information relating to: handling of this type of machine by a user, e.g. provide an on-line user manual and/or beverage recipes; advertising relating to beverage preparation machines, accessories, one or more ingredients
15 that are being processed or related products; general information relating to one or more ingredients for the beverage processing; and visualization and/or music for generating an ambiance relating to such beverages or preparations thereof or consumptions thereof; and news
20 and/or weather forecast, etc... For example the communication module with the appropriate user-interface may be configured to permit distant ordering of ingredients via the network.

25 The beverage preparation machine can be arranged to automatically monitor the capsule consumption and send a capsule order to the supplier server whenever the automatic monitoring indicates a reaching of a shortage of consumable ingredient capsules at the customer location,
30 the supplier server being arranged to receive the capsule order and to generate a corresponding instruction to prepare a shipment of a new stock of capsules for supply to the customer.

35 The beverage preparation machine may be arranged to communicate automatically the capsule consumption to the supplier server that is arranged to automatically monitor the capsule consumption and to generate the above instruction.

The machine's capsule extraction unit can be arranged to receive different types of ingredient capsules for preparing different beverages. For example, the extraction unit is arranged for receiving different coffee capsules types selected from capsules of arabica, robusta, canefora, etc... and blends thereof, e.g. the NESPRESSO™ capsule ranges of capsule types, of the in-home or the out-of-home beverage preparation machine standards.

10

In an embodiment, the beverage preparation machine has an automatic capsule recognition arrangement.

For example, the capsule recognition system is of the type disclosed W002/28241 which discloses a coffee machine using capsules with a machine interpretable feature that can be read automatically by the machine via a sensor. The machine interpretable feature on the capsule may include one or more of a colour, a shape, a glyph, a text string a barcode, a digital watermark, symbols, notches, grooves or holes.

20

For instance, the capsule extraction unit is arranged to receive different types of ingredient capsules for preparing different beverages, the automatic capsule recognition arrangement being arranged to identify the type of the capsules that are being used.

25

Indeed, when different capsule types are likely to be used in the same extraction unit, it is not sufficient to count the number of extraction processes carried out to derive the remaining capsule stock. The types of capsules should be identified by the machine so as to provide a differentiated management system aligned to the different capsule types.

30

35

In the following with reference to Figs 1a, 1b, 2a and 2b the beverage preparation machine 1 according to the present invention and its basic functionalities will be

described. Hereby, Fig. 1a is a perspective top view of the beverage preparation machine 1, Fig. 1b is a perspective bottom view, Fig. 2a is a side view on a first side of the beverage preparation machine 1 and Fig. 2b is a side view on the second side of the beverage preparation machine.

In the following the machine 1 will be described as coffee preparation machine, however, it is noted that the present invention is not limited to a coffee preparation machine but comprises any other type of beverage preparation machine as previously explained.

The machine 1 has an arrangement 40 for processing one or more beverage ingredients to dispense a beverage, such as coffee. Arrangement 40 includes a reservoir 42 for liquid, preferably water, connected to a liquid circulation circuit typically with a pump, a heater and a coffee brewing unit, as known in the art. The brewing unit can be connected to a handle 4 pivotally mounted at the housing 3 of the machine 1. The handle 4 is arranged to allow introduction, extraction and removing of a capsule containing a ground coffee, in particular in the form of a cartridge or pod. Upon extraction, capsules are evacuated to a used capsule collector after activating the handle 4 again.

Additionally, machine 1 has a top portion 36 which may be used for holding spare cups. Top portion 36 may include a heating arrangement to preheat such spare cups. The cup heater may be of the resistive type, in particular a vapour circulation cup heater as known in the art, or any other suitable heating system. A spare capsule receptacle may also be located on top portion 36 of machine 1 for storing unused capsules.

Moreover, machine 1 has an outlet 45 from which the prepared beverage is dispensed into a receptacle or cup 6 placed underneath the outlet 45, as shown for example in

Fig. 2b. A drip tray arrangement 34 is provided under outlet 45, for instance of the type disclosed in EP 1731065. For positioning cup 6 under outlet 45, drip tray may include a positioning arrangement at its surface 14 and/or walls 35 delimiting dispensing cavity may be positioned relative to outlet 45 to serve as references for a cup positioning, i.e. so that a cup 6 may simply be pushed against walls 35 to be properly positioned under outlet 45. Also provided is a used capsule collector (not shown in the Figures) in a central part of machine 1 for collecting used, extracted capsules.

The machine further comprises a screen or display 10. Preferably, the display 10 is a touch sensitive screen and may be operated by finger contact and/or with a stylus 15. Preferably, the stylus 15 when not being used can be placed into a corresponding recess 16 within the display 10 or any other part of the machine 1.

Furthermore, display 10 is associated with a pair of buttons 12, for example for quick operation of machine 1 without having to access display 10. Moreover, in a preferred embodiment, display 10 includes a touch sensitive surface for navigating through pages and menus displayable on display 10.

Display 10 may be arranged to display various information and/or visual effects, as for example mentioned above, including network information when the machine is connectable to a user-network. Moreover, machine 1 may include a sound generating arrangement with loudspeakers and/or microphone and be a true multimedia interactive device, as discussed above. The machine 1 thereby may be used to contribute to the ambience.

In addition to display 10 and/or housing 3 may in particular have a series of holes 31 on its lateral, rear and/or upper sides, in particular within display 10, for the emission of light, of various colors, to create such

an ambiance. For this purpose LEDs of various can be provided within the holes 31.

5 Unlike prior art beverage preparation machines, drip tray 34, capsule receptacle and reservoir 42 are removable from the machine 1, in a movement underneath the display 10 and that goes away from display 10 and/or generally parallel to the foot portion 2 of the machine 1. The same applies to reservoir 42, which preferably is provided at the back of the machine beyond the display 1. It follows that during use and after use, when the machine is serviced, e.g. drip tray 34 emptied, display is not exposed to parts of machine 1 that might project liquid, such as liquid food or beverage, against screen 10.

15 Furthermore, machine 1 has a capsule inlet arrangement 32 for the supply of capsules containing an ingredient of the liquid food or beverage to be prepared, such as coffee. The capsule inlet arrangement 32 can be either provided on the lateral side of the machine or can be provided within 20 the display 10. Preferably, the capsule inlet arrangement 32 is a recess within the display 10 having the shape of a capsule or any other object related to the prepared beverage.

25 The display 10 of the machine has not an entirely flat surface but on one side when approaching the foot portion 2, provides a recess. The recessing walls 35 of the display 10 together with the cup support 14 of the drip 30 tray 34 thus provide a cavity 16 into which the cup 6 can be placed to be filled with the beverage dispensed from the outlet 45. To deemphasize the liquid food or beverage visual aspect of machine 1, the walls 35 of the display 10 within the cavity 16 can be used like a normal display, so 35 that every object and/or image displayed on the display 10 extends into the cavity walls 35.

On the top portion 26 or on any other part of the machine, a touch sensor 22 can be provided enabling the user to

control the machine and/or to navigate through the menu functions by carrying out a corresponding touch operation on the touch sensor 22. In case that the display 10 is a mere display and not a touch screen, the touch sensor 22 will make the control of the machine easier and more intuitive for the user. In case that the display 10 is a touch screen, then the user has the choice whether to use the display 10 or the touch sensor 22 for carrying out the touch operation. However, it might be advantageous to use the touch sensor 22 instead of the touch screen to avoid damage or contamination on the display 10.

The machine 1 can further comprise a card reader/writer 23. The card reader/writer 23 can either be a slot, into which a card can be inserted to carry out a reading and/or a writing operation on the card, the card reader/writer 23 can be a wireless interface enabling a wireless communication with a card, e.g. a radio frequency identification RFID card, or a combination thereof.

In order to provide an adjusted filling of the cup, an automatic filling system with a control of the level of fill may be implemented into the machine, for instance of the type disclosed in US 4,458,735, WO97/25634 and WO99/50172.

Fig. 3 shows a functional block diagram of a beverage preparation machine 1 according to the present invention which is connected to a network 511.

Beverage preparation machine 1 includes a control unit 21 connected to a user-interface 201 via a bi-directional data communication channel 221. Control unit 21 is connected to the ingredient processing arrangement 40 for controlling the processing of the beverage ingredients. Typically, control unit 21 will control the powering of a heater and a pump and adjust the powering based on measured parameters of the beverage preparation process via sensors, such as temperature sensors, pressure sensors

and flowmeters. Moreover, the control of the components of the ingredient processing arrangement 40 may be adjusted to the type of ingredient capsule extracted upon automatic recognition thereof via a capsule recognition system as
5 known in the art, for instance an electromagnetic, mechanical, color or barcode recognition system.

Hence, ingredient processing arrangement 40 includes a series of sensors for returning information to control
10 unit 21 relating to the state of arrangement 40 and of the beverage preparation process. Communication between control unit 21 and beverage preparation 41 is achieved via a bidirectional communication channel 421.

15 Furthermore, beverage preparation machine 1 has a communication module 11 for bidirectional communication with an external network 511, such as the internet or an intranet. Communication module 11 is connected to a user-interface 101, preferably in the form of the above
20 mentioned display 10, preferably a touch screen, and possibly one or more buttons 12, via a bidirectional data communication channel 111. Display 10 in case of a touch screen may be operated by finger touch or by way of the stylus 15.

25 Control unit 11, communication module 21 and ingredient processing arrangement 40 are all contained within the housing of beverage preparation machine 1.

30 Communication module 11 is permanently prevented from controlling the processing of the beverage ingredients. In other words, communication module 11 of beverage preparation machine 1 may not act directly or indirectly via control unit 21 on arrangement 40 or affect the
35 beverage preparation process or other processes carried out by arrangement 40.

Control unit 21 is prevented from accepting beverage preparation-related control data from communication module 11.

- 5 In the architecture of Figure 3, the control unit 21 is arranged to communicate data to communication module 11 via unidirectional data communication channel 211. With the exception of a request for information and the signals necessary to ensure proper communication, e.g. data
10 transmission control signals, control unit 21 will not receive any data from communication module 11. Conversely, the data transferred from control unit 21 to communication module 11 may relate to at least one of: the beverage preparation process; ingredient processing arrangement 40;
15 beverage preparation settings stored in control unit 21; and/or the state of control unit 21, e.g. in the view of identifying any malfunctioning at a station 50 remotely connected to network 511.
- 20 It is also possible to connect communication module 11 directly to the sensors in the beverage preparation module 40. Likewise, communication between beverage preparation module 40 and communication module 11 is unidirectional via bus 411. However, this communication channel may
25 become redundant if the data relating to the beverage preparation module 40 can be communicated to the communication module 11 via control unit 21. Communication channel 411 is particularly useful in the absence of communication channel 211, for instance when the control
30 unit 21 should benefit from an increased protection against network 511.

Communication module 11 is arranged to receive from said network and communicate via user-communication interface,
35 such as display 10 and/or loudspeaker, information relating to at least one of: a need to carry out a particular service, e.g. descaling; a need to repair said machine; and information on a particular ingredient that is being processed in said machine. For such information

to be sent to communication module 11, corresponding information is first gathered together by communication module 21 from control unit 21 and/or ingredient processing arrangement 40 and sent to a remote server 50 that processes and analyses the information before returning, when appropriate warnings or other information to communication module 11 via network 511.

In another embodiment, control unit 21 is prevented from communicating at all with communication module 11, not even unidirectionally. There is no data communication channel between control unit 21 and communication module 11.

The highest degree of safety is achieved when communication module 11 is connected neither to control unit 21 nor to beverage preparation module 40. A slightly inferior protection is achieved when communication module 11 is allowed to read, via a unidirectional channel, sensors of beverage preparation module 40. A still lower safety is obtained when communication module is allowed to obtain information from control unit 21. To ensure immunity against any upsetting of ingredient processing arrangement 40 and the control unit 21 via network 511, the possibility, in particular any physical possibility, for communication module 11 to change parameters of the control unit 21 or beverage preparation unit 40 should be avoided.

As shown in Figures 1a and 1b beverage preparation user-interface 201 is flush with communication user-interface 101 and implemented as a combination of display 10, buttons 12, holes 31 comprising LEDs or the like, loudspeakers, microphones or the like.

A master switch for the machine 1 is also provided (not shown in the Figures). The master switch is arranged to connect and disconnect the powering of the various components of the beverage preparation machine, including communication module 11, control unit 21 and ingredient

processing arrangement 40 all powered by the same power source, typically the mains.

Generally, communication module 11 can be arranged to receive from the network 511 and communicate via user-communication interface, such as a display 10 and/or loudspeaker, information relating to: handling of such machine 1 by a user; advertising relating to such machine 1 or related machines, accessories, and/or one or more ingredients for the beverage processing; general information relating to one or more ingredients for the beverage processing; visualization and/or music for generating an ambiance relating to said beverage or preparation thereof or consumption thereof; and news and/or weather forecast.

The housing 3 contains the beverage preparation arrangement 40 and the control unit 21. The card reading arrangement 23 is connected to the control unit 21 and can be located inside or outside the housing 3.

Fig. 4 shows a network comprising a machine 1 according to the present invention having network capabilities. Connected to the communication network 501 is also a server 50, which for example can be associated to a capsule supplier and/or to a service centre for the machine 1. The server 50 can be further connected to a database 51 comprising data on users, capsules, machines, capsule consumption or the like. The machine 1 is hereby positioned at a customer location or user location 150 being remote from a vendor location 550, where the server 50 is positioned.

A user device 70 can further be connected to the network 501. Such a user device 70 can for example be a notebook, PC, mobile phone, PDA or any other user device having network communication capabilities.

Via the user device 70 the user can for example submit data, programs or information to the machine 1. For example he can load new or updated software or data into the machine 1. He can also change the settings of the machine remotely. Depending on the degree of communication possibilities between the control module 21 and the communication module 11, the user can also remotely start, stop or change a beverage preparation process. The user via the user device 70 can also log into the server 50 in order to change his personal user configurations, to submit a capsule order, to send a request for support or information or the like.

Even though in Fig. 4 the network 501 is shown as one single network connecting the machine 1, the server 50 and the user device 70, it is also possible that the different devices communicate via one or more separate network. Any type of network can be possible including a public or a private network, for example via Bluetooth, infrared, GSM, UMTS, internet or any other type of wired or wireless communication network. Specifically, an intermediate device such as a telemetry device can be provided between the machine 1 and the network 501 in order to convert the corresponding data which are transmitted. The communication between respectively two of the devices, i. e. the machine 1, the server 50 and the user device 70 can be one- or bidirectional.

The beverage preparation machine according to the present invention comprises a card reading arrangement for reading information from a card. A user or customer possessing such a card can thus have stored different types of information thereon, so that when the machine reads the stored information from the card, it is possible to personalize the machine and its functionalities. In other words, information regarding the processing of the machine, e.g. information regarding the beverage preparation process or the like, can be stored on the card and/or can be derived from data stored on the card.

The beverage preparation machine according to the present invention also relates to security aspects. The information stored on the card might be used as
5 authorization of specific processing steps of the machine, i.e. the machine will carry out predefined processing steps only in case that a corresponding authorization is present. This is useful in cases, where processing steps might result in damaging the possessor of the machine if
10 accomplished by a unauthorized person.

A beverage preparation machine 1 with a card reading arrangement according to the present invention is shown in Fig. 5. Hereby, only the components which are necessary
15 for understanding the different aspects of the present invention are shown and other components in Fig. 5 are omitted for the sake of clarity.

The machine 1 comprises a control unit 21, which has
20 already been explained with respect to previous Figures. In a preferred embodiment, a communication module 11 is provided enabling a communication with one or more external devices, such as an external server 50 via a corresponding network 501, 502, 511. As also previously
25 explained, the server 50 can comprise or can be connected to a database 51.

However, it is also possible that the communication module 11 is omitted or inactive and the present invention can
30 also be applied to a machine 1 not being connected to any type of network.

The beverage preparation machine 1 according to the present invention comprises a card reading arrangement,
35 which can comprise a wireless card reader 24 and/or a card slot 23. Even though in Fig. 5 both types of card readers are shown, it is of course possible that the machine 1 comprises only one single of the shown card readers types that the machine comprises a single card reader being a

combination of the mentioned card slot 23 and wireless card reader 24.

5 The card reading arrangement 23, 24 can further be a combined reading and writing arrangement, which is not only able to read information from a card but also to write information onto a card.

10 As schematically shown in Fig. 5 a card 90 having stored thereon different types of information can be read by the card reading arrangement 23, 24 of the machine 1.

15 As card 90, any type of card can be used. In its simplest form, the card 90 can be a transponder, having stored thereon a unique identification number, which can be read out by the card reading arrangement 23, 24. In a preferred embodiment this identification number serves as user identification information uniquely identifying a single user. Alternatively or in addition thereto user settings
20 can be stored on the card, indicating specific functionalities of the machine. Comprised within the user settings can for example be settings regarding the preparation of the beverage, such as for example type of beverage, amount of water, temperature, amount of
25 additional ingredients, i. e. milk or the like and/or any type of other setting information.

30 In case that the card 90 is a transponder, it can for example be a radio frequency identification (RFID) chip or a card 90 having a memory for storing thereon user identification information.

35 The wireless card reader 24 is adapted to wirelessly read user identification information and/or user settings from the card 90 when the card 90 is in vicinity of the machine 1. Hereby the vicinity comprises several meters. The wireless card reader 24 can read from the card 90 for example via RFID, Bluetooth, Infrared (IR) or any other type of wireless communication. The card 90 can also

comprise a barcode or the like, which can be wirelessly read by a scanner implemented within the wireless card reader 24.

5 The card slot 23 is adapted to receive at least a part of the card 90 therein. From a corresponding chip, memory or the like, the user identification information and/or the user settings are read. The card 90 hereby can be a machine-related card, which is handed over to a user or
10 customer when purchasing the machine or when starting use of the machine 1. The card 90 thus can have for example only the aim to serve as user identification at the machine 1 and/or as storage for user settings related to the machine 1.

15

In an alternative embodiment an already existing card can be used, for example a credit card of the user, a SIM-card (subscriber identity module) of a mobile phone or the like. Hereby, the data stored on this card can be used as
20 user identification data, for example the mobile phone number stored on a SIM-card can also be used as identification at the beverage preparation machine 1. Alternatively, if possible, there can be stored additional information on the card serving as a user identification
25 information which can only be used together with the machine 1.

The machine 1 can further comprise a memory 80 for storing any type of data and/or information. Preferably, the
30 memory 80 is connected to and in data communication with the wireless card reader 24, the control unit 21 and the card slot 23.

A system 100 comprising a beverage preparation machine
35 according to the present invention, its components and the functionalities will be explained with reference to Fig. 6, which shows the functional architecture of a system 100 comprising a beverage preparation machine 1 and a server 50. As already explained with reference to Fig.

4, the beverage preparation machine 1 is provided at a customer location 150, which is remote from the vendor location 550, where the server 50 and optionally the database 51 are positioned.

5

Optionally, there can also be provided a user device 70 connected to the server 50.

In the system 100 as shown in Fig. 5, the beverage
10 preparation machine 1 via a telemetry device 60 and via a first network 502 is in data communication with the server 50. In a preferred embodiment, the first network 502 is a GSM network. The use of any other type of wired or
15 wireless network is also possible for enabling a one-directional or bi-directional data communication between the machine 1 and the server 50. Even though in the present embodiment an external telemetry device 60 is provided, all functionalities for communicating can be
20 integrated into the communication module 11 of the machine 1, so that no external devices are necessary and the beverage preparation machine 1 is directly connected to the first network 502.

The user device 70, if present, is also in data
25 communication with the server 50 via a second network 503. In a preferred embodiment the second network 503 is the internet or any other public or private network, however it is also possible to enable communication between the user device 70 and the server 50 via any other type of
30 wired or wireless network.

In a further alternative, instead of providing separate networks for communication between the beverage
preparation machine and the server 50 on one hand and the
35 user device 70 and the server 50 on the other hand, there can also be provided one single communication network as for example shown in Fig. 4, to which all devices are connected.

Additionally to the architecture shown in Fig. 5, the user device 70 can also be in data communication with the beverage preparation machine 1 via a corresponding communication network.

5

Server 50 further comprises or is connected to a database 51 for storing any type of data or information, such as for example user account information, customer information, machine information or the like.

10

In the following the architecture of the system 100 will be further explained with reference to the non-limiting embodiment shown in Fig. 5, where the first network 502 is a GSM network and the second network 503 is an internet.

15

In this embodiment, between machine 1 and the GSM network 502 a telemetry device 60 is provided. The telemetry device comprises a GSM transceiver 62 for connecting to the first network 502. Further included in the telemetry device 60 is a core unit 60 for controlling the functionalities of the telemetry device 60 as well as a memory 64 for storing any type of data or information.

20

Optionally, there can also be provided a USB interface 63 for connecting the telemetry device 60 to beverage preparation machine 1 or to any other device or for reading out data from the telemetry device 60 or for storing data in the memory 64 of the telemetry device 60. The communication between machine 1 and the server 50 in a preferred embodiment is an encrypted communication.

30

The server 50 comprises a server GSM transceiver 52, preferably an application server 54 for connecting with the database 51 and a web server 53 for connecting with the second communication network 503, which in the present embodiment is the internet.

35

The user device 70 can for example be a laptop having integrated therein a browser 71 and a web server 72 for connecting with the second communication network 503.

5 The beverage preparation machine 1 according to the present invention comprises one or more sensors for monitoring parameters related to the beverage preparation process, for example temperature sensor, pressure sensor,
10 flowmeter, electric power sensor, overheat sensor, scale sensor, water level sensor, ingredient recognition sensor or the like. Specifically, in a preferred embodiment of the present invention, machine 1 is a capsule based beverage preparation machine 1 comprising a capsule
15 recognition sensor for recognizing the number and/or type of consumed capsules. Optionally, the beverage preparation machine 1 can stored these parameters in the storage.

The beverage preparation machine 1 submits these parameters or any other information derived from these
20 parameters via the first communication network 502 to server 50. Hereby, the submission can be accomplished either automatically, i.e. in predefined time intervals, depending on the number or consumed capsules or the like, or the submission can happen only upon request by server
25 50. In this latter case the parameters are stored in a storage of machine 1 and sent after being polled by server 50.

Server 50 in turn based on the received information can
30 initiate a service functionality. Such a service functionality can for example be an indication to the customer of an upcoming maintenance and/or an indication to the customer of a shortage of an ingredient for the machine needed for preparing a beverage. Together with the
35 indication the server can also automatically initiate a process for removing or preventing any failure or disturbance of machine 1.

In the following different embodiments of the present invention will be explained in more detail.

5 In a first embodiment card 90 can be used to control the beverage preparation process. In this case either a user identification uniquely identifying a user is stored on card 90 and/or user settings indicating parameters of the beverage preparation can be stored on the card.

10 In case that the user settings are readily stored on card 90, the card reading arrangement 23, 24 will submit the user settings to control unit 21 which then is adapted to control the components, specifically the beverage preparation arrangement 40, of machine 1 according to the
15 user settings. This can include the type of prepared beverage, the amount of liquid used, e. g. water, milk or the like, the pressure, the temperature, the brewing duration or any other parameter. In this embodiment no memory 80 and no communication module 11 are necessary,
20 however, they can be present within machine 1 but are not necessarily required for carrying out this process.

In case that the user identification information is stored on card 90, in a preferred embodiment, control unit 21
25 reads out the user identification information and looks up in memory 80, whether there are stored user settings together with the respective read user identification information. If this is the case control unit 21 again controls the beverage preparation process accordingly.

30 The storing of user settings within the memory 80 can be accomplished by connecting a user device 70 to the machine 1 in order to store the user settings therein, it can be accomplished by inputting into the machine 1 user
35 settings, e. g. via a touch screen 10 or the like, or the user settings can be submitted from the server 50 via the network 501 in case that a communication module 11 is present.

This embodiment is shown in overview in Fig. 7.

In step S0 the process begins for example with the approach of a card to the wireless card reader 24 or with
5 the insertion of a card 90 into the card slot 23.

In the next step S1 the card is read and in the next step S2 the user settings are acquired, which can either be accomplished by reading the user settings out from the
10 card or by looking up the user settings in the memory 80, where they are stored together with the user identification information read from the card.

In the next step S3 the beverage preparation is adapted
15 accordingly and controlled by the control unit 21.

The process ends in step S4.

This first embodiment is advantageous if machine 1 is for
20 example used by a plurality of different users, so that every user can define his preferred settings for the beverage preparation and does not have to input them every time he uses the machine. The user only has to define them once and then can simply use his card to get his preferred
25 beverage produced.

In a second embodiment, the user identification information uniquely identifying a user is read from the card. In memory 80, an association is stored between user
30 identification information and specific processing steps of the machine. Control unit 21 will then initiate or prevent the execution of the processing steps depending on a match between the stored user identification information and the user identification information read from card 90.

35 As previously explained, user identification information can be provided in the form of a transponder, or a memory having stored therein user identification information.

Alternatively, an already existing card of the user such as a SIM-card, a credit card or the like can be used.

5 The data read from card 90 can serve as identification of a user at machine setup. Security relevant process steps are only accomplished, if the read user identification information corresponds to stored user identification which is further associated to the specific process step.

10 Such a step can for example be the setting up of a communication by the communication module 11 to an external server 50. Such a communication can be security sensitive and/or can result in the accumulation of costs for the proprietor of the machine 1. The setting up of
15 such a communication can therefore be defined as a processing step for which an authentication is necessary.

A further processing step is for example the access of user-related information or services within an external
20 server 50. For example, the access to a user account should be restricted and only possible for corresponding user. Also the connection to a vendor of the machine and/or of accessories for the machine preferably is restricted. A further possibility is that an
25 authentication is needed in case that a purchase request for new beverage products, maintenance parts for the machine and/or any other type of accessory is to be sent to a vendor.

30 Any distant purchase of goods by a user via machine 1 should clearly identify the purchaser. For this purpose card 90 can be used as an identifier of the purchasing user. Card may be used to allow or deny general access to a distant service or only to such services that involving
35 costs charged to the user. Other services, free services, such as obtaining general or particular information from a remote server, e.g. up-to-date information on a beverage that is being prepared or a beverage recipe or an online user manual, do not have to be restricted to a particular

identified user. For example, when machine 1 is used in an office, it may be appropriate to allow any one to access freely available information via machine 1 from remote server 50, but to let only selected users make order of
5 ingredient capsules or other goods that will be charged by the capsule supplier. These selected users are thus provided with such an identification card 90 that will give access to the distant ordering system via server 50.

10 In memory 80, processing steps are stored for which an authentication is needed. Also stored in memory 80 are user identification information. These user identification can be associated to one or more processing steps thereby indicating that only if the corresponding user
15 identification information is provided to the machine the corresponding processing step is allowed to be carried out.

An overview over this process is given with reference to
20 Fig. 8. The process starts in step S10 and in the next step S11 the user identification information is read from the card 90. In the next step S12 the read user identification information is compared by the control unit 21 with user identification information stored within the
25 memory 80. In the next step S13 all processing steps are prevented from execution for which no match is found between the user ID read from the card and the user ID stored in the storage.

30 It is hereby possible to define that every processing step has an associated user ID, so that for every processing step within the machine an authentication is needed. Otherwise, only some specific processing steps can be stored for which an authentication is needed and those
35 processing steps for which no user ID is stored in the memory 80 can be accomplished at any time without the need of any type of authentication by a corresponding user ID.

In a further embodiment, the beverage preparation machine 1 is connected to an external server 50 via a communication network 501, 502, 511.

- 5 In this embodiment, the user ID stored on card 90 is used as identification at machine 1 and then the machine will request user settings stored within the database 51 from external server 50 via communication module 11.
- 10 Turning again to Fig. 6, it is for example possible that a user via a user device 70 logs into server 50. He can then define a specific user profile or user account, which is stored in database 51. The user thus can access the profile and define specific user settings. These user
- 15 settings can be related to the preparation of the beverage, or any other functionality of the machine. It is also possible that the user has an account including an amount of valuable information, from which a specific amount is always subtracted when a beverage is produced.
- 20 The user thus by accessing server 50 and submitting a payment information or credit card information can increase the amount of valuable information for his account.
- 25 If the user then approaches with his card 90 the machine 1, the user identification information is read from the card and submitted to server 50 via communication module 11. Server 50 will look up the corresponding user settings in the database and submit the user settings back to the
- 30 beverage machine 1, so that control unit 21 can control the functionality in accordance with the user settings. Hereby, this process can be accomplished every time the user approaches the machine with his card 90 or it can only be accomplished for a first time and then from the
- 35 first use the user settings can also be directly stored within memory 80.

In case that the beverage preparation machine readily comprises all ingredients for preparing a specific

beverage, the user settings also comprise information on the type of prepared beverage.

Preferably, the beverage preparation machine according to
5 the present invention is a capsule-based machine and
comprises a capsule recognition arrangement adapted to
recognize the type of inserted capsule. In case that a
user has to insert a capsule into the machine or has to
select a capsule within the machine, machine 1 can also be
10 adapted to submit the user identification information
together with the type of recognized capsule to server 50.
Server 50 will then look up the user settings stored for
this user and this specific type of capsule and submit to
machine 1 the user settings for the recognized capsule.

15 In a further embodiment, as already explained, the card
reading arrangement 23, 24 is a combined reading/writing
arrangement. In this case it is for example possible that
after the user settings have been received from server 50,
20 these user settings are written directly onto card 90.
This has the advantage that for further usages of machine
1, no communication has to be set up. Further, card 90 can
then also be used for preparing beverages at other
preparation machines, which do not have the possibility to
25 set up a communication to an external device.

This process will again be explained with reference to
Fig. 9.

30 The process starts in step S20. In the next step S21 the
user via user device 70 or via any other means accesses
server 50 and creates or changes his user settings stored
in database 51.

35 In step S22, when approaching machine 1 with card 90, the
user ID by machine 1 is read from card 90. Via
communication module 11, the user ID in step S23 is
submitted to server 50. In step S24, the machine receives

the user settings from server 50 and, in step S25, the functionality of the machine is correspondingly adapted.

Optionally, in step S26, the user settings are stored in
5 memory 80. Also optionally, in step S27, the user settings are written onto card 90.

The process ends in step S28.

10 With the present invention therefore a beverage preparation machine is provided which allows personalizing the functionality of the machine in a simple and comfortable way. Further, with the present invention the security of the machine 1 is increased, since for critical
15 processing steps an authentication is required.

Claims

1. Beverage preparation machine (1), in particular a capsule-based machine,
5 comprising
a card reading arrangement (23, 24) for reading user identification information uniquely identifying a user from a card (90),
a memory (80) for storing processing steps for which an authentication is necessary and for storing associations
10 between user identification information and said processing steps of the machine (1), and
a control unit (21) adapted to initiate execution of a stored processing step only in case of a match between the
15 associated user identification information and the read user identification information.
2. Beverage preparation machine (1) according to claim 1, further comprising
20 a communication module (11) for communicating with an external server (50) via a communication network (501, 502, 511),
wherein in the memory (80) a communication step with said external server and relating to an identified user is
25 stored in association with the user identification information, and
wherein the control unit (21) is adapted to carry out said identified user-related communication step only in case
that the read user information matches the user
30 identification information associated to said communication step.
3. Beverage preparation machine (1) according to claim 2, wherein carrying out said identified user-related
35 communication step involves a distant ordering of goods charged to said identified user.
4. Beverage preparation machine (1) according to claim 2 or 3, wherein the control unit (21) is adapted to a

communication step with said external server (50) only in case that the read user information matches the user identification information associated to said communication step.

5

5. Beverage preparation machine (1) according to claim 2 or 3, wherein the control unit (21) is further adapted to carry out one or more identified user-unrelated communication steps upon request by any identified or
10 unidentified user, in particular a request communicated to said machine via a user-interface such as one or more of a user-selector, button, switch, touch pad and touch screen.

6. Beverage preparation machine (1), in particular
15 according to any preceding claim,
comprising
a card reading arrangement (23, 24) for reading user identification information uniquely identifying a user from a card (90),
20 a communication module (11) for communicating with a remote server (50) via a communication network (501, 502, 511) for submitting the read user identification information to the server(50) and for receiving from the server (50) user settings associated to the user
25 identification information, and
a control unit (21) adapted to control the functionality of the machine (1) in accordance with the received user settings.

30 7. Beverage preparation machine according to claim 6, further comprising:

a memory (80) for storing the received user settings together with the corresponding user identification information; and/or

35

a card writing arrangement adapted to write onto said card (90) the user settings received from the server (50).

8. Beverage preparation machine (1) according to any one of claims 2 to 7, wherein said beverage preparation machine is capsule-based and further comprises a capsule recognition arrangement,
- 5 wherein the communication module (11) is further adapted to submit the read user identification information together with the type of recognized capsule to the server (50).
- 10 9. Beverage preparation machine (1), in particular according to any preceding claim, comprising
- a card reading arrangement (23, 24) for reading user settings related to the beverage preparation process from
- 15 a card (90),
- a beverage preparation arrangement (40) for preparing a beverage, and
- a control unit (21) adapted to control the beverage preparation arrangement (40) in accordance with the read
- 20 user settings.
10. Beverage preparation machine according to any preceding claim,
- wherein the card reading arrangement comprises a wireless
- 25 card reader (24)
11. Beverage preparation machine according to any preceding claim,
- wherein the card reading arrangement comprises a card slot
- 30 (23).
12. Beverage preparation machine (1) according to any of the preceding claims,
- wherein the card reading arrangement (24) comprises a
- 35 radio frequency identification RFID reader.
13. Beverage preparation machine (1) according to any of the preceding claim, which comprises a housing containing:
- a beverage preparation arrangement; and

- a control unit,
the card reading arrangement being connected to the
control unit and located inside or outside the housing.

5 14. Program stored on a memory device and executable by a
control unit (21) of a beverage preparation machine (1),
in particular a capsule-based beverage preparation machine
(1), wherein said program when being executed is arranged
to perform,
10 the steps of
reading user identification information uniquely
identifying a user from a card (90),
storing processing steps for which an authentication is
necessary,
15 storing associations between user identification
information and said processing steps of the machine (1),
and
initiating execution of a stored processing step only in
case of a match between the associated user identification
20 information and the read user identification information.

15. Program according to claim 14,
further comprising the steps of
communicating with an external server (50) via a
25 communication network (501, 502, 511),
storing a communication step with said external server and
relating to an identified user in association with the
user identification information, and
carrying out said identified user-related communication
30 step only in case that the read user information matches
the user identification information associated to said
communication step.

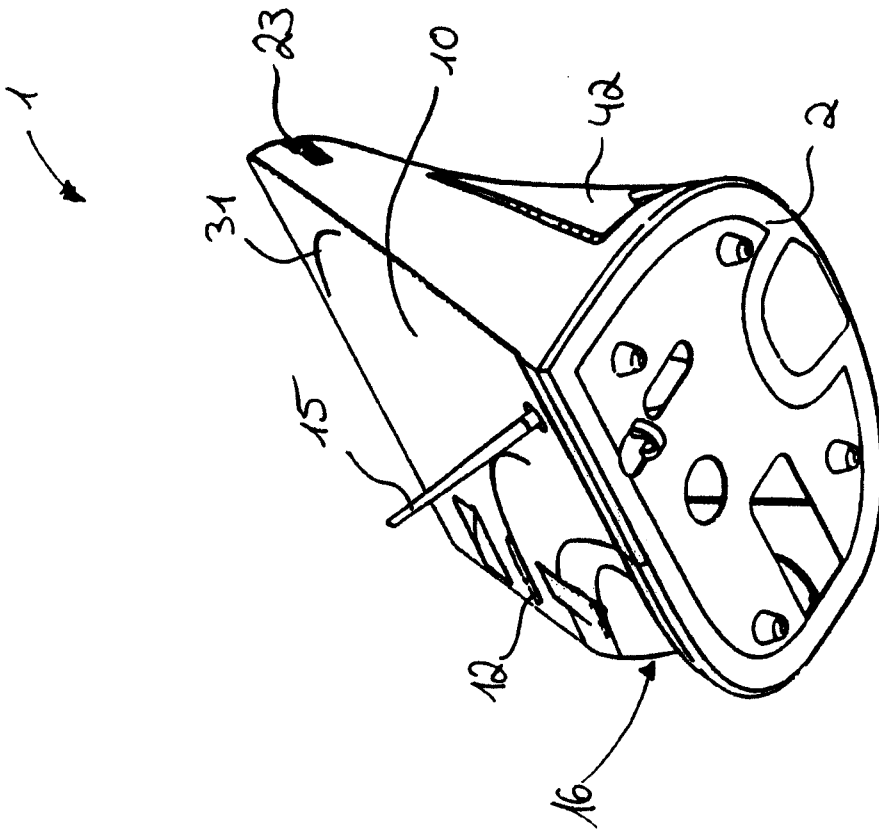


Fig. 16

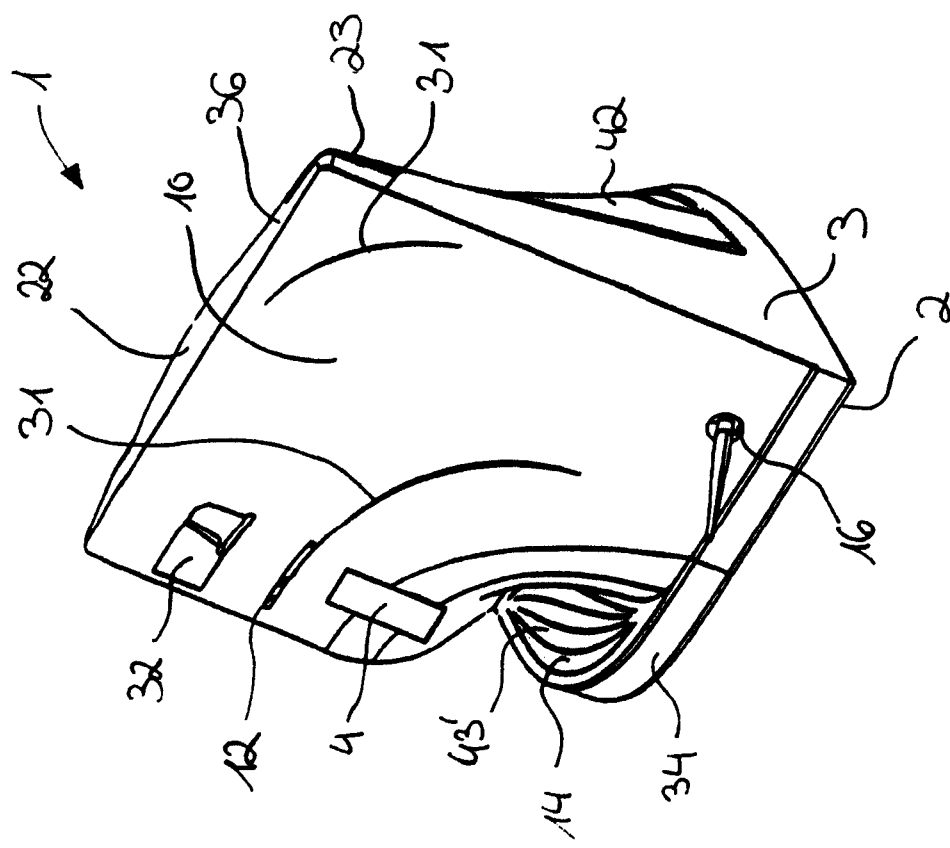


Fig. 16a

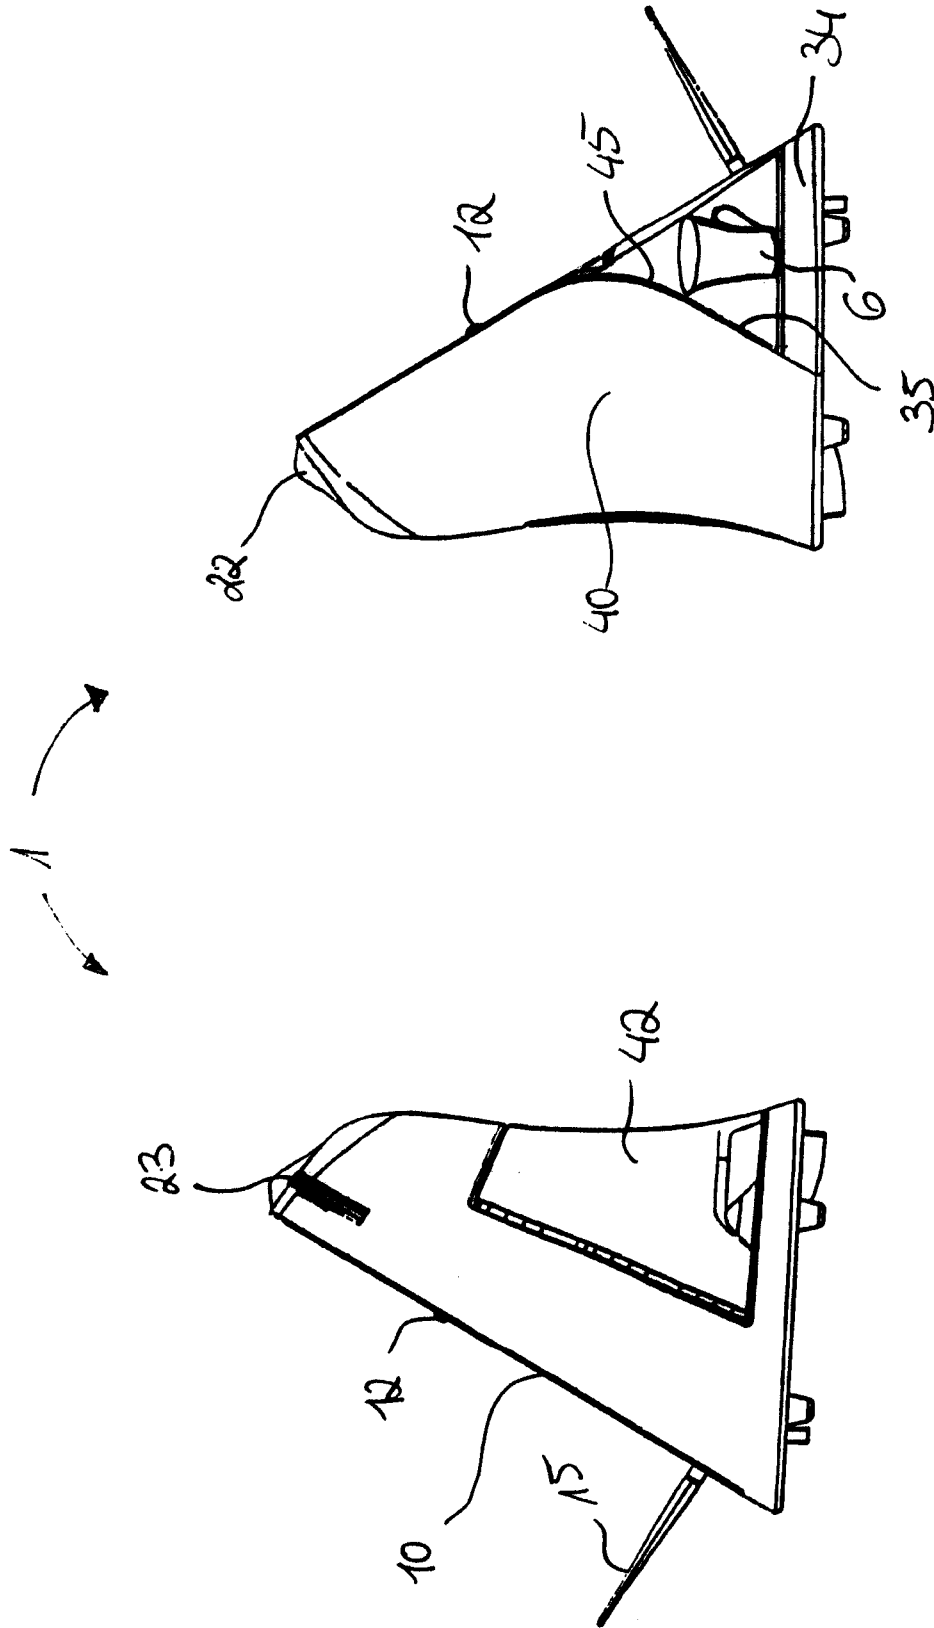


Fig. 2a

Fig. 2b

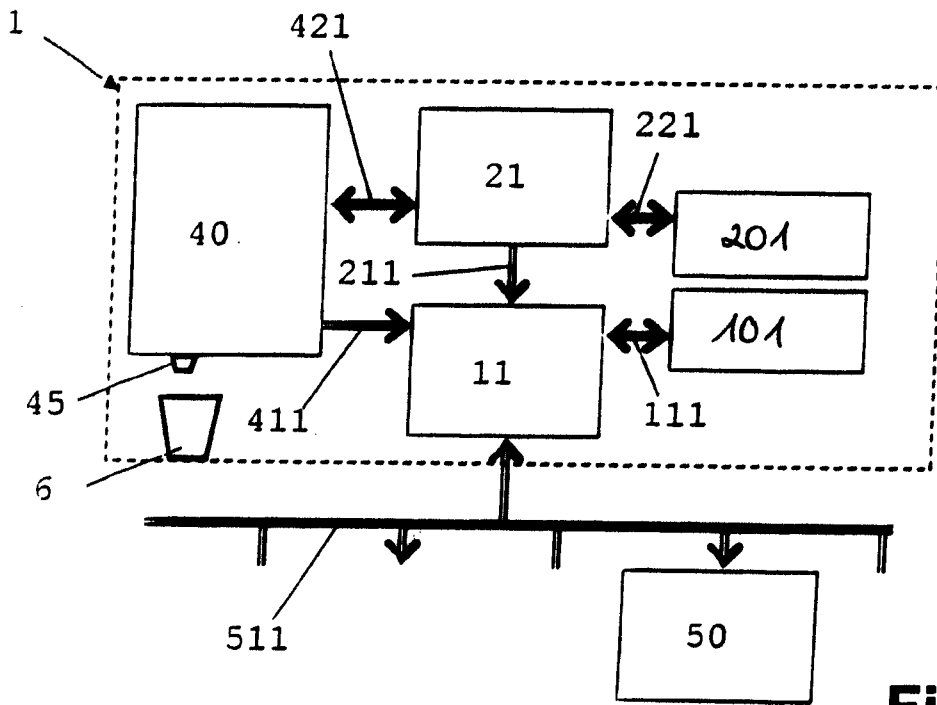


Fig. 3

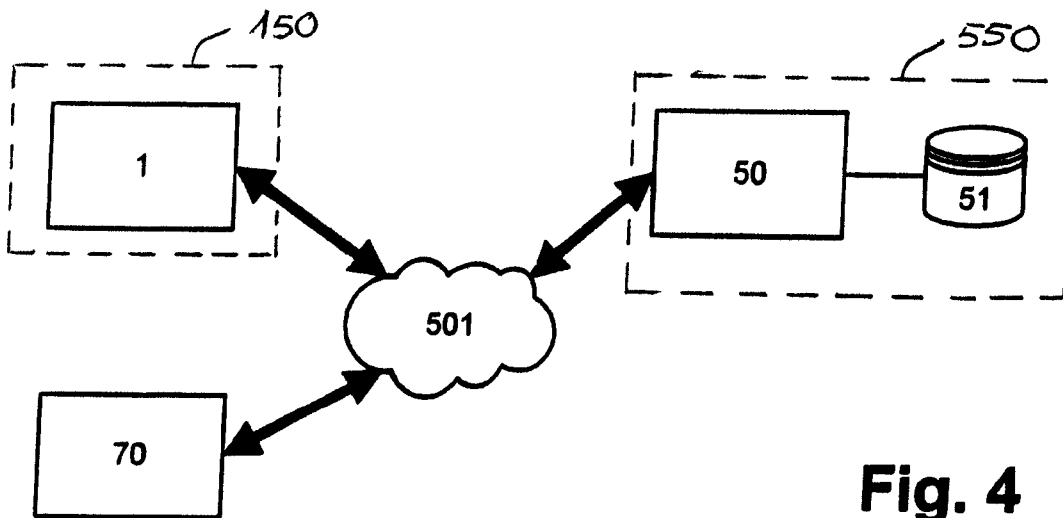


Fig. 4

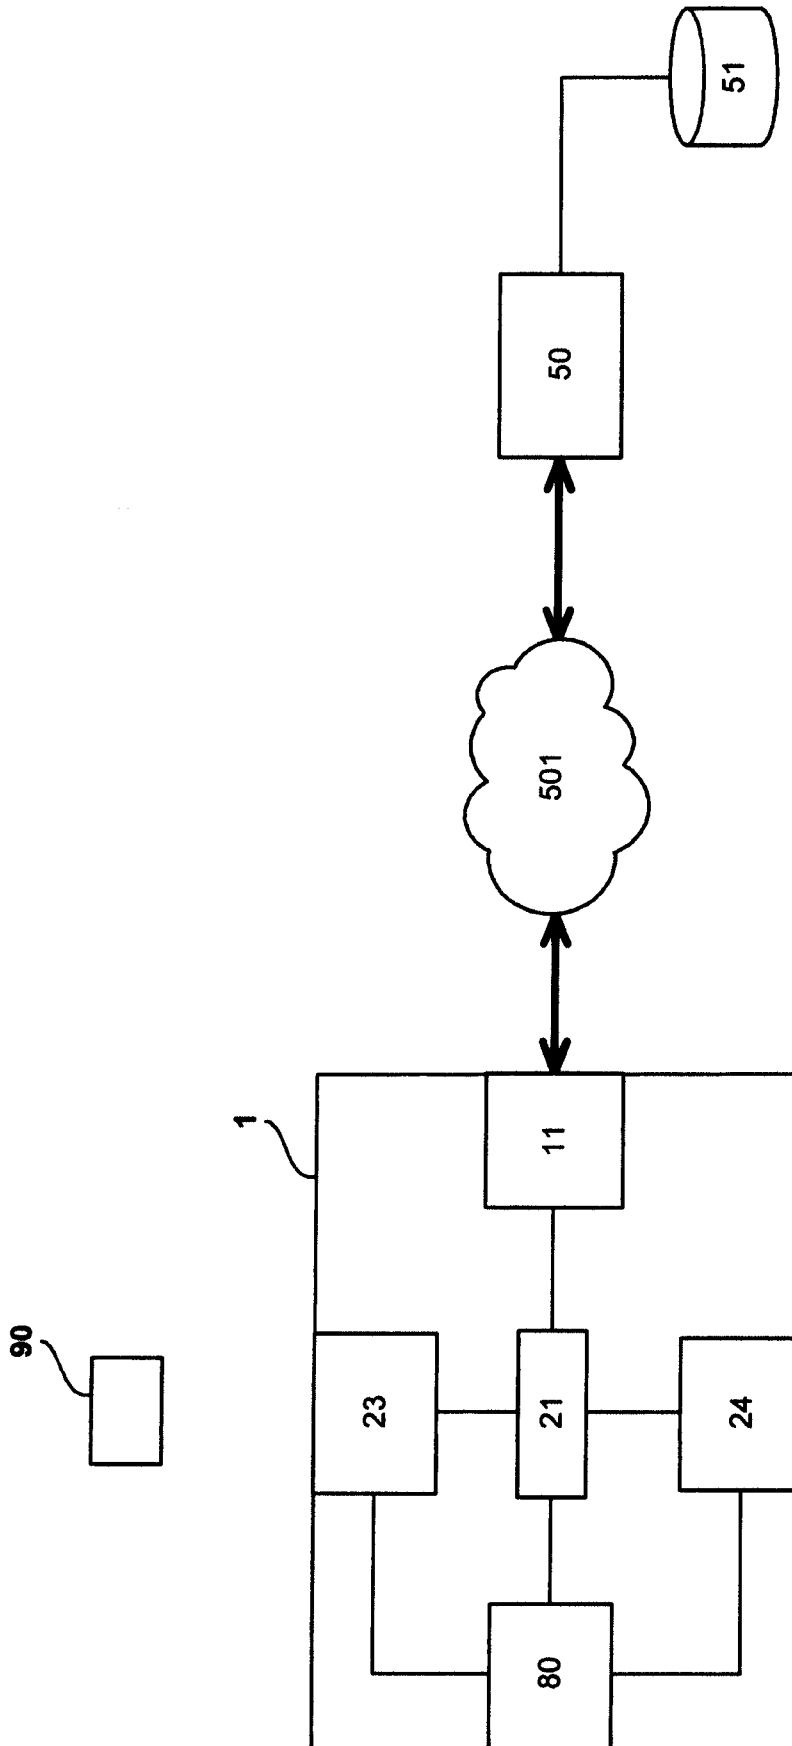


Fig. 5

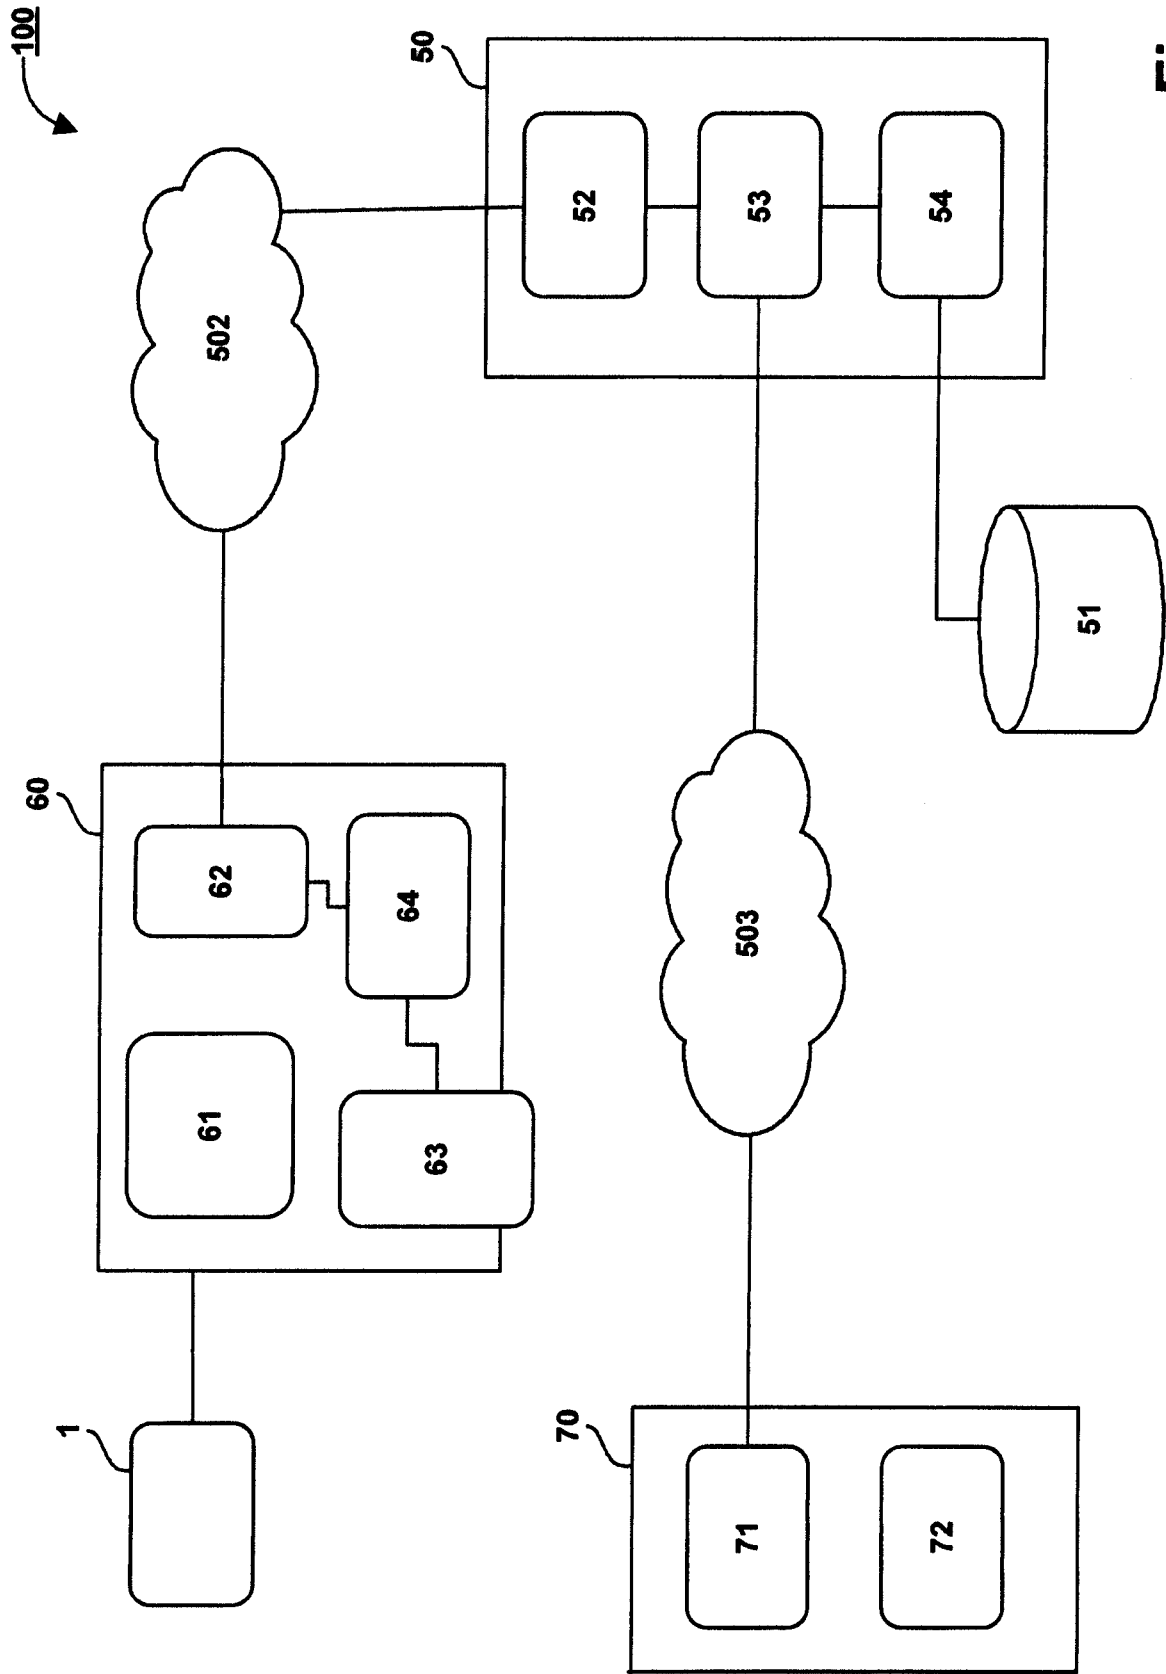


Fig. 6

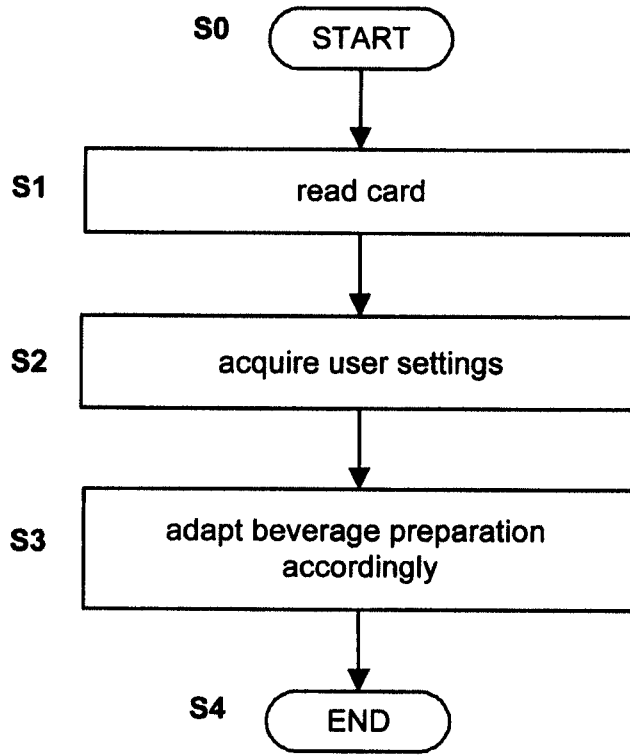


Fig. 7

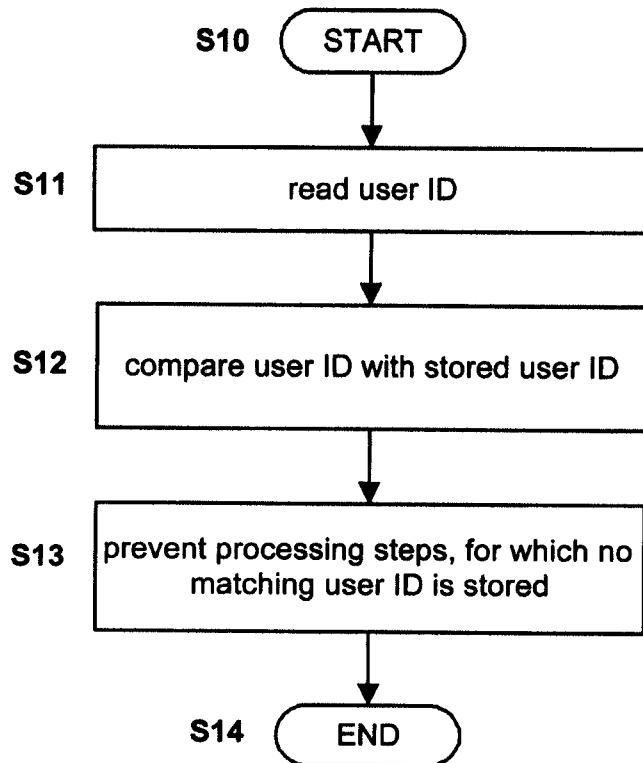
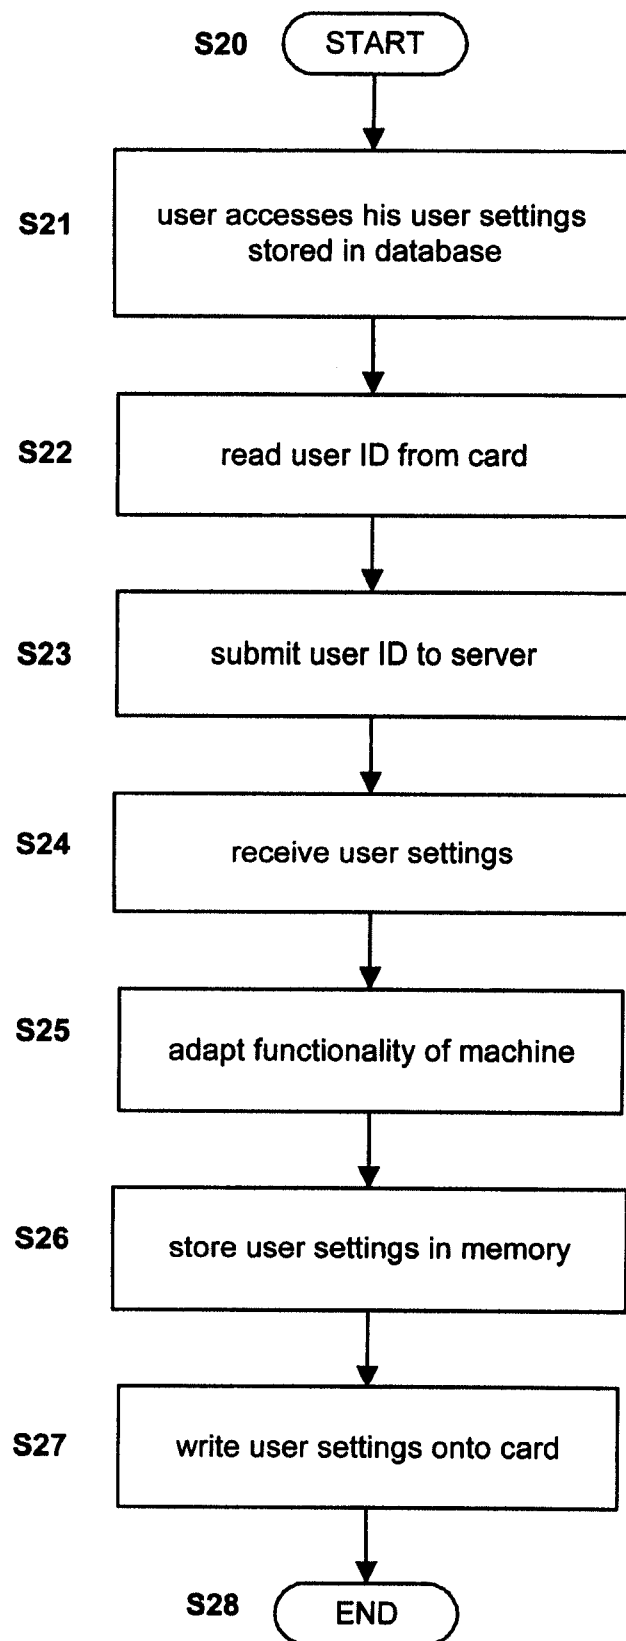


Fig. 8

**Fig. 9**

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/068180

A. CLASSIFICATION OF SUBJECT MATTER
INV. A47J31/52
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
A47J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01/12039 A2 (PROCTER & GAMBLE [US]) 22 February 2001 (2001-02-22) page 7, line 15 - page 8, line 26 page 9, lines 15-28 page 19, line 8 - page 21, line 24 page 24, line 17 - page 26, line 11 figures 1, 4-6	1-7,9-15
X	EP 1 491 121 A2 (FOOD EQUIP TECHNOLOGIES CO INC [US]) 29 December 2004 (2004-12-29) paragraphs [0024], [0 32], [0 33], [0035], [0 40], [0 45], [0 47]; figure 8 ----- -/--	1-4

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search 5 May 2011	Date of mailing of the international search report 17/05/2011
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Novelli, Bruno
--	--

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/068180

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 586 330 A1 (SINTRA HOLDING AG [CH] SCHAERER AG M [CH]) 9 March 1994 (1994-03-09) page 4, line 17 - page 5, line 30; claims 1,5; figures 1, 4	1
X	----- DE 20 2007 002205 U1 (LUXOPLAST KUNSTSTOFFTECHNIK GM [DE]) 21 June 2007 (2007-06-21) paragraphs [0018] - [0024]; figure -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/068180

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0112039	A2	22-02-2001	AT 253317 T 15-11-2003
			AT 306702 T 15-10-2005
			AU 6641300 A 13-03-2001
			AU 6642600 A 13-03-2001
			AU 6773500 A 13-03-2001
			BR 0013148 A 30-04-2002
			BR 0013240 A 23-04-2002
			BR 0013254 A 16-04-2002
			CA 2376591 A1 22-02-2001
			CA 2379501 A1 22-02-2001
			CA 2380439 A1 22-02-2001
			CN 1379632 A 13-11-2002
			CN 1379633 A 13-11-2002
			CN 1379634 A 13-11-2002
			CN 1504159 A 16-06-2004
			DE 60006398 D1 11-12-2003
			DE 60006398 T2 26-08-2004
			DE 60023196 T2 13-07-2006
			EP 1204350 A2 15-05-2002
			EP 1204352 A2 15-05-2002
			EP 1204353 A2 15-05-2002
JP 2003506183 T 18-02-2003			
JP 2003506184 T 18-02-2003			
JP 2003506108 T 18-02-2003			
MX PA02001567 A 02-07-2002			
MX PA02001624 A 02-07-2002			
MX PA02001625 A 02-07-2002			
WO 0112036 A2 22-02-2001			
WO 0112037 A2 22-02-2001			

EP 1491121	A2	29-12-2004	US 7506576 B1 24-03-2009
			US 2009181143 A1 16-07-2009
			US 2004261624 A1 30-12-2004

EP 0586330	A1	09-03-1994	AT 170059 T 15-09-1998
			DE 59308922 D1 01-10-1998
			DK 0586330 T3 25-05-1999
			ES 2124292 T3 01-02-1999

DE 202007002205 U1	21-06-2007	NONE	
