



US00D809453S

(12) **United States Design Patent** (10) Patent No.: **US D809,453 S**  
Sato (45) Date of Patent: \*\* Feb. 6, 2018

(54) **TIRE**(71) Applicant: **Toyo Tire & Rubber Co., Ltd.**,  
Osaka-shi, Osaka (JP)(72) Inventor: **Yoshiki Sato**, Osaka (JP)(73) Assignee: **Toyo Tire & Rubber Co., Ltd.**, Osaka  
(JP)

D627,714 S \* 11/2010 Miyazaki ..... D12/605  
D627,715 S \* 11/2010 Umstot ..... D12/605  
D638,354 S \* 5/2011 Strader ..... D12/605  
D639,727 S \* 6/2011 Tokizaki ..... D12/605  
D640,188 S \* 6/2011 Strader ..... D12/605  
D663,259 S \* 7/2012 Umstot ..... D12/605  
D681,546 S \* 5/2013 Sato ..... D12/605  
D735,127 S 7/2015 Kato

(Continued)

(\*\*) Term: **15 Years**(21) Appl. No.: **29/587,622**(22) Filed: **Dec. 14, 2016**(30) **Foreign Application Priority Data**

Jul. 14, 2016 (JP) ..... 2016-015092  
(51) LOC (11) Cl. ..... **12-15**  
(52) U.S. Cl.  
USPC ..... **D12/604**  
(58) **Field of Classification Search**  
USPC ..... D12/605, 604  
CPC ..... B60C 13/00; B60C 1/00  
See application file for complete search history.

(56) **References Cited**

## U.S. PATENT DOCUMENTS

D500,473 S \* 1/2005 Boggs ..... D12/605  
D554,577 S \* 11/2007 Miyazaki ..... D12/605  
D568,235 S \* 5/2008 Dixon ..... D12/605  
D575,222 S \* 8/2008 Fujita ..... D12/605  
D577,661 S \* 9/2008 Umstot ..... D12/605  
D588,530 S \* 3/2009 Shondel ..... D12/605  
D588,533 S \* 3/2009 Shondel ..... D12/605  
D595,643 S \* 7/2009 Ochi ..... D12/605  
D596,116 S \* 7/2009 Fujita ..... D12/605  
D597,024 S \* 7/2009 Ochi ..... D12/605  
D609,176 S \* 2/2010 Fujita ..... D12/605  
D609,177 S \* 2/2010 Osaka ..... D12/605  
D611,894 S \* 3/2010 Scheifele ..... D12/605

## FOREIGN PATENT DOCUMENTS

JP 1434191 2/2012  
JP 1440125 5/2013

Primary Examiner — George D. Kirschbaum  
Assistant Examiner — Clese Moore, Jr.

(74) Attorney, Agent, or Firm — Sterne, Kessler,  
Goldstein & Fox P.L.L.C.

(57) **CLAIM**

The ornamental design for a tire, as shown and described.

**DESCRIPTION**

FIG. 1 is a front perspective view of a tire showing the claimed design;

FIG. 2 is a front view thereof;

FIG. 3 is a rear view thereof;

FIG. 4 is a top plan view thereof, to which the bottom plan view is symmetrical;


FIG. 5 is a left side view thereof, the right side view being a mirror image thereof;

FIG. 6 is an enlarged view of the portion between 6- 6 and 6'-6' in FIG. 2; and,

FIG. 7 is an enlarged cross-sectional view taken along line 7"-7" in FIG. 6, within the portion 7'-7' in FIG. 6 to line 7-7 in FIG. 4.

In the drawings, the broken lines showing portions of the tire tread, sidewall, and inner bead depict portions of the tire that form no part of the claimed design.

**1 Claim, 7 Drawing Sheets**

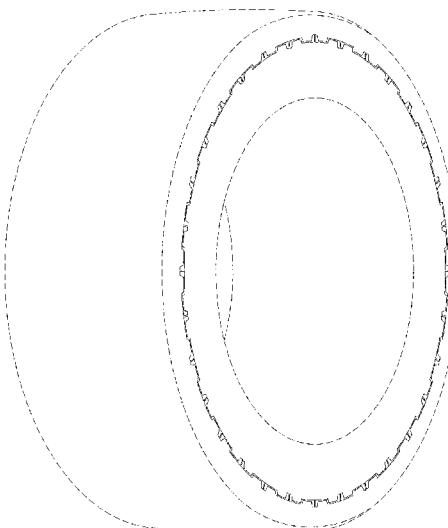


(56)

**References Cited**

U.S. PATENT DOCUMENTS

D757,644 S \* 5/2016 Wieland ..... D12/605  
D772,799 S \* 11/2016 Shondel ..... D12/605

\* cited by examiner

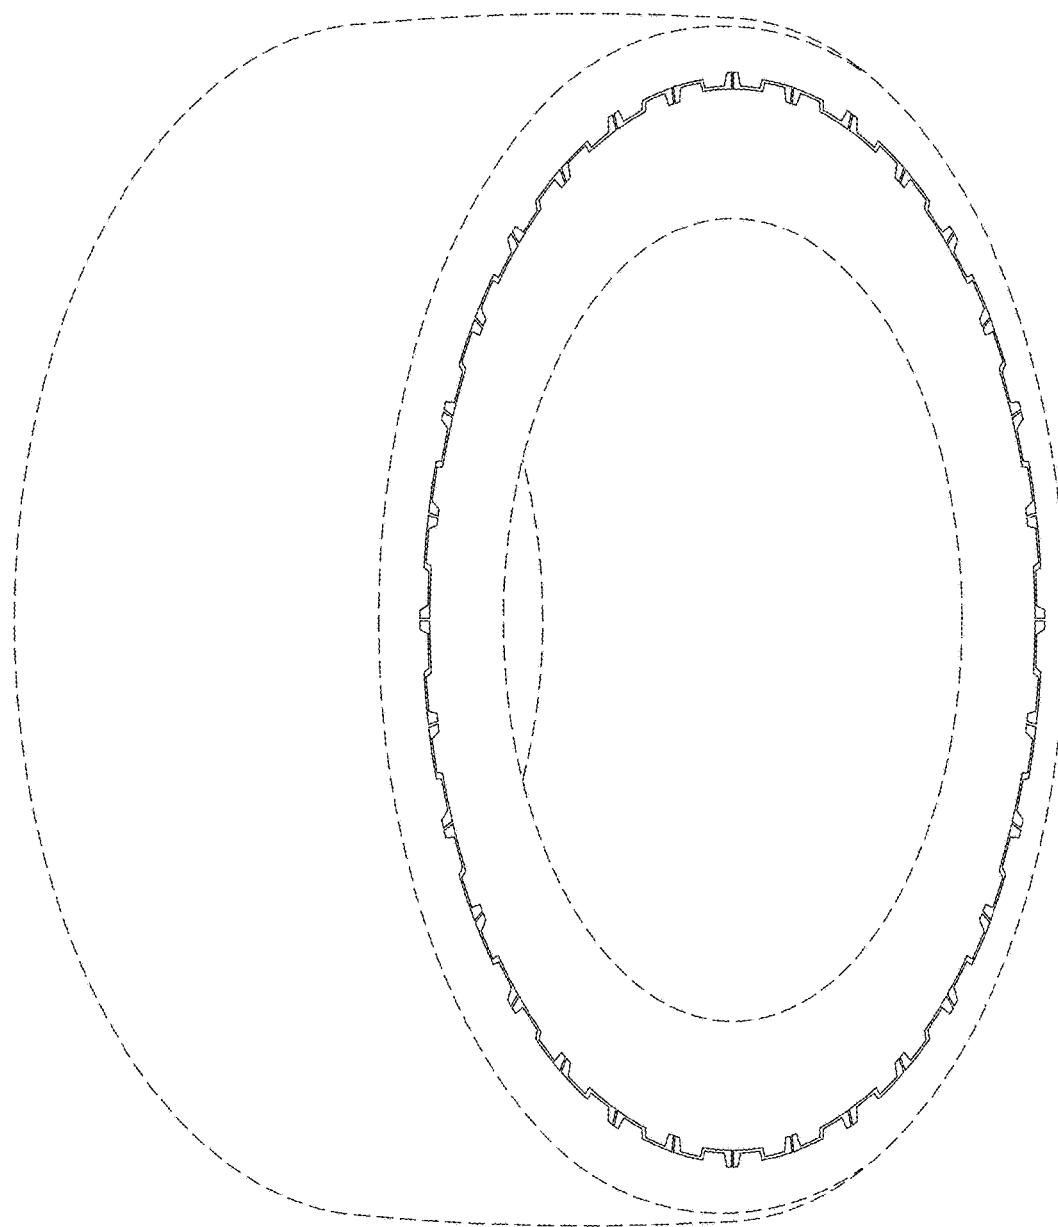

**FIG. 1**



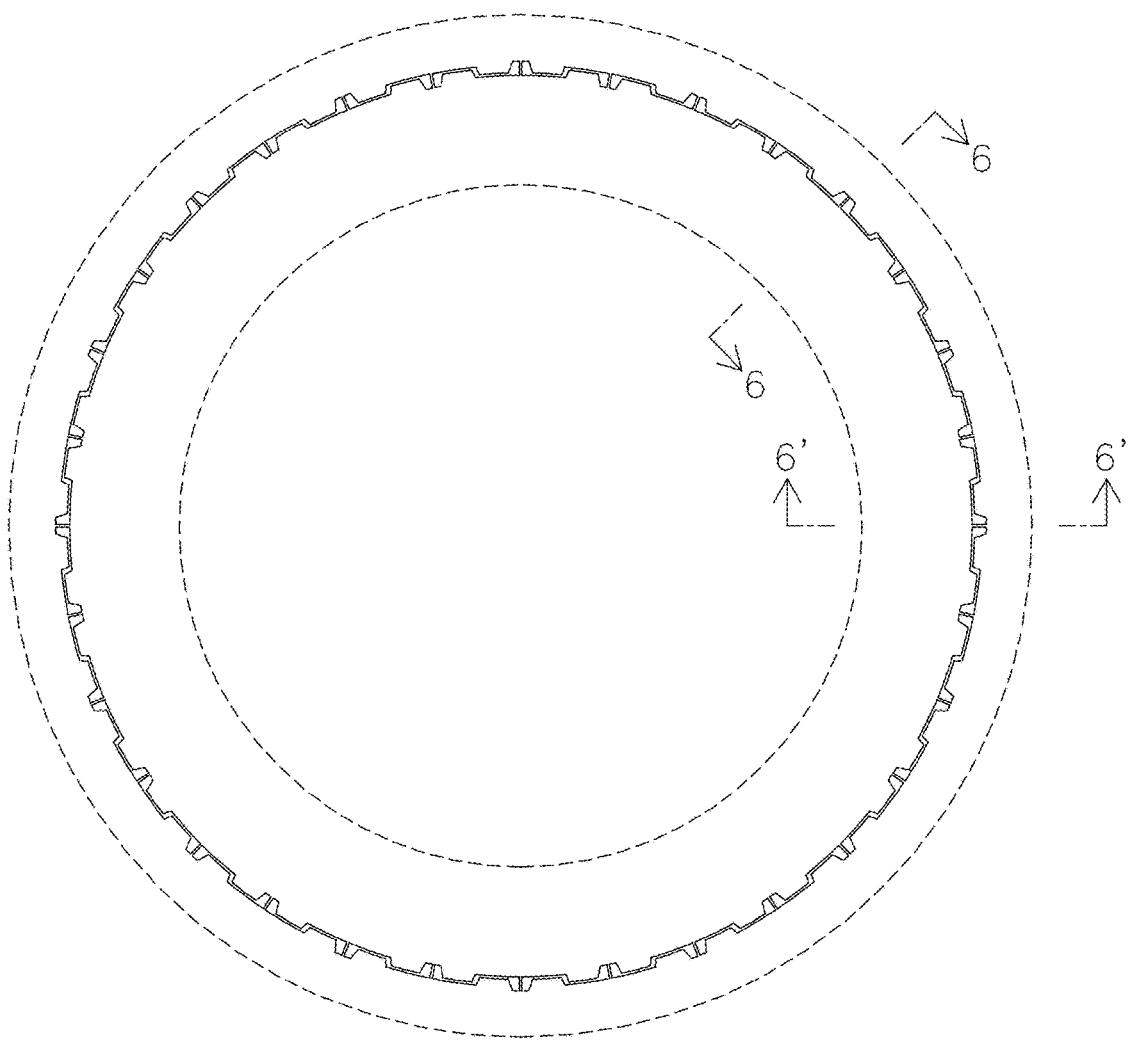



FIG. 2

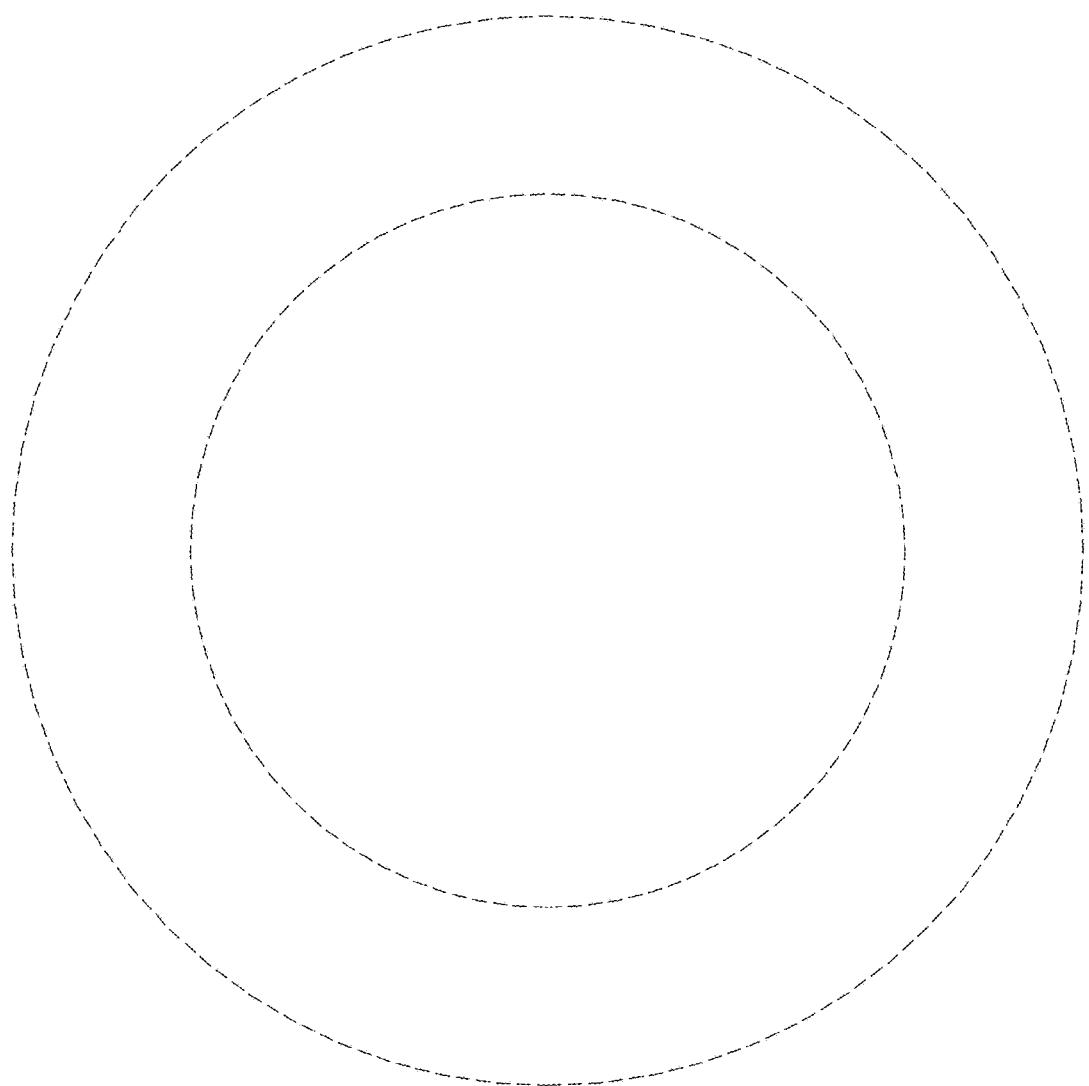

**FIG. 3**

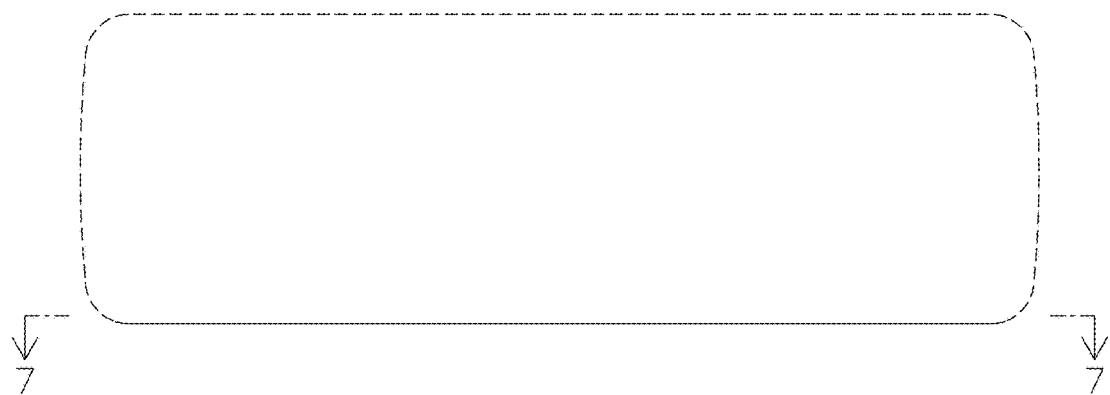

**FIG. 4**

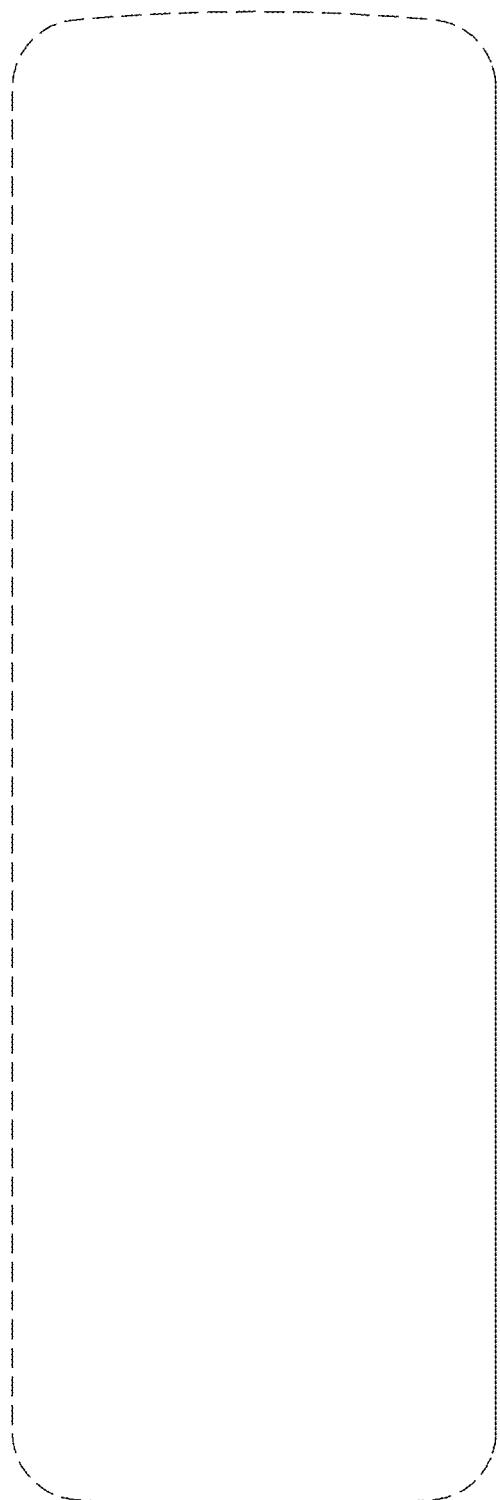

**FIG. 5**


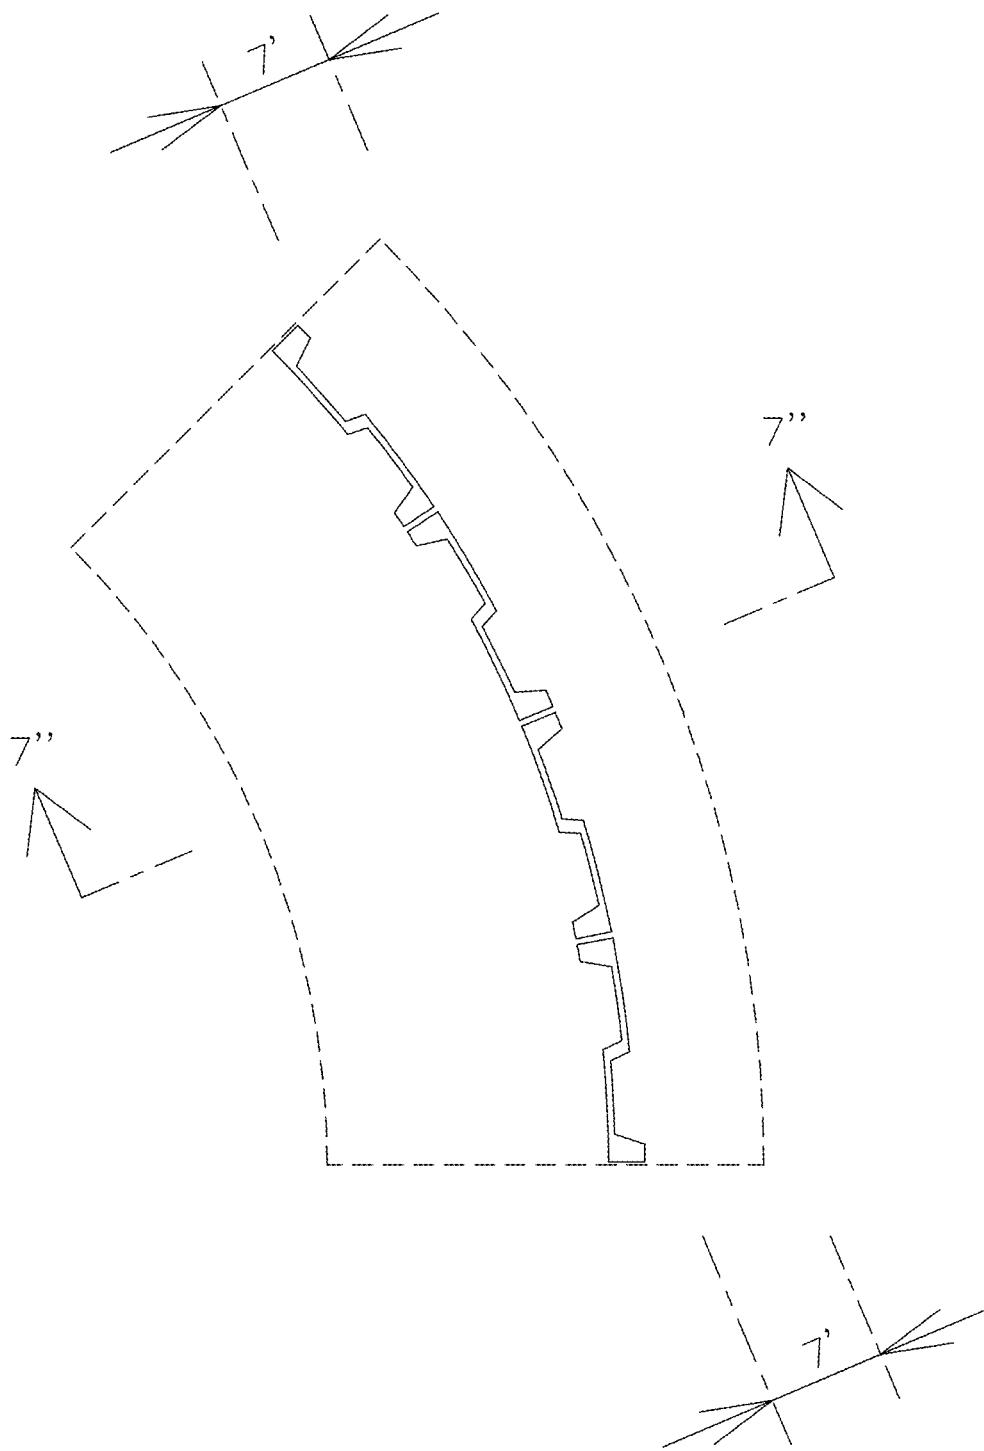


FIG. 6

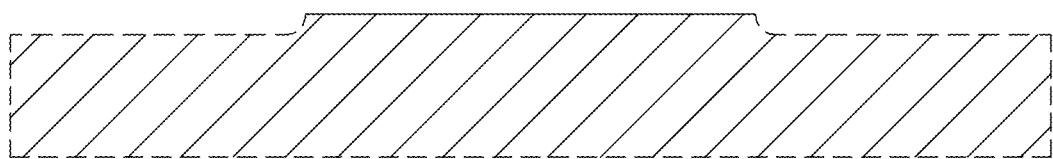

**FIG. 7**