



(43) International Publication Date
11 January 2001 (11.01.2001)


(10) International Publication Number
WO 01/03302 A1

PCT

- | | |
|--|--|
| <p>(51) International Patent Classification⁷: H03M 1/06
 <i>// 1/46, 1/80</i></p> <p>(21) International Application Number: PCT/US00/18056</p> <p>(22) International Filing Date: 30 June 2000 (30.06.2000)</p> <p>(25) Filing Language: English</p> <p>(26) Publication Language: English</p> <p>(30) Priority Data:
 60/141,992 1 July 1999 (01.07.1999) US</p> <p>(71) Applicant <i>(for all designated States except US)</i>: BURR-BROWN CORPORATION [US/US]; 6730 South Tucson Boulevard, Tucson, AZ 85760 (US).</p> | <p>(72) Inventors; and
 (75) Inventors/Applicants <i>(for US only)</i>: KALTHOFF, Timothy, V. [US/US]; 11141 East Escalante Road, Tucson, AZ 85730 (US). RUNDEL, Bernd, M. [US/US]; 330 East Morning Sun Court, Tucson, AZ 85704 (US).</p> <p>(74) Agent: FRALEY, R., Lee; Snell & Wilmer, One Arizona Center, 400 East Van Buren Street, Phoenix, AZ 85004-2202 (US).</p> <p>(81) Designated States <i>(national)</i>: AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZW.</p> <p>(84) Designated States <i>(regional)</i>: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW). Eurasian</p> |
|--|--|

[Continued on next page]

(54) Title: CAPACITOR ARRAY

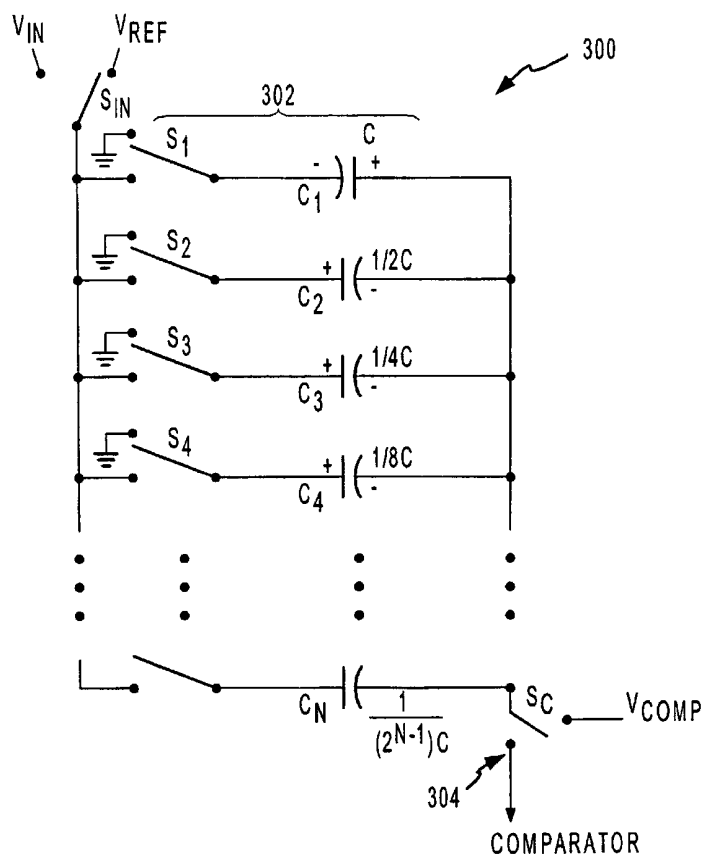

(57) Abstract: A capacitor array is configured to negate or cancel the voltage coefficient of the capacitors within the array, and thus reduce and/or eliminate the voltage coefficient non-linearities present within the A/D converter. In the capacitor array, a first capacitor is suitably configured with at least one additional capacitor in the array such that the charge across the array is linear with respect to an input voltage applied to the input of the array. In addition, the voltage coefficient non-linearities of the first capacitor can be suitably canceled by the inverse voltage coefficient non-linearities of any additional capacitors within the balance of the array, thereby reducing the potential for non-linearities within the A/D converter.

WO 01/03302 A1



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

— *Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.*

Published:

— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CAPACITOR ARRAY

FIELD OF THE INVENTION

The present invention relates to a capacitor array for use within an analog-to-digital
5 converter. More particularly, the present invention relates to a capacitor array configured to
reduce and/or eliminate the non-linearities within an analog-to-digital converter that may be
created by the voltage coefficient of the capacitors utilized therewithin.

BACKGROUND OF THE INVENTION

Resistor networks have been used for sampling methodologies of analog-to-digital
10 converters. Over the past several years, Complementary Metallic Oxide Semiconductor (CMOS)
integrated circuit technology is becoming more commonplace with A/D converters in that the
CMOS technology is relatively inexpensive and yet versatile in allowing designers to include
digital logic circuitry and analog circuitry in the same integrated circuit.

As the requirements for precision have continued to increase with respect to analog-to-
15 digital (A/D) converters, the use of resistor networks for sampling has been substantially reduced
due to the difficulty in producing accurate resistors using CMOS technology. Instead, the
technique of charge redistribution, which utilizes capacitor networks instead of resistor networks,
has become the most commonly used methodology in CMOS analog-to-digital converters.
Despite the resulting improvement, the demands on designers for further improvements in the
20 precision for capacitive charge redistribution techniques continues to increase as well.

An exemplary A/D converter which employs capacitive charge redistribution is discussed
more fully in U.S. Patent No. 5,852,415, issued on December 22, 1998 to Cotter et al. The six-

bit converter disclosed therein generally comprises an array of binary-weighted capacitors configured with a comparator circuit, together with a series of switches which purport to enable sampling by the A/D converter. In that A/D converter, for example, one switch is configured to connect a common terminal of the capacitors to ground while another series of switches are
5 configured for selectively connecting the other terminal of the capacitors to ground, to an input voltage, V_{in} , or to a reference voltage, V_{ref} . During operation, that A/D converter samples the input voltage by charging up the capacitor array to the input voltage, V_{in} , during a sampling step. Next, the A/D converter redistributes this charge on the capacitors to the input of the comparator circuit during a holding step. Finally, during a charge redistribution step, the A/D
10 converter selectively compares the voltage at the comparator circuit to the reference voltage to iteratively derive a digital representation of the analog input voltage, V_{in} .

Unfortunately, with respect to the Cotter et al. design, as the input voltage changes, the value of the capacitance also changes, thus resulting in non-linearities within the A/D converter. Specifically, the voltage coefficient of capacitance, namely the rate of fractional change in
15 capacitance as a function of the change in voltage, tends to create a non-linear charge on the capacitors within the array. These voltage coefficient non-linearities generally result from, *interalia*, processing variations in the doping levels of the capacitors during manufacture. Moreover, the size of the depletion regions within the capacitors can be significantly affected depending on manufacturing techniques. Accordingly, these voltage-coefficient non-linearity
20 characteristics can be more problematic to the A/D converter, and particularly those A/D converters which use polypoly-type capacitors.

Some manufacturing approaches directed to reducing the non-linearities resulting from the voltage coefficient of capacitance within A/D converters have employed metal oxide capacitors due to their minimal depletion region and low or essentially non-existent voltage coefficient. However, such capacitors are larger in area, *e.g.*, often 2 or more times larger than low cost, production level, polypoly-type capacitors, and thus require a larger layout area. Further, these metal oxide capacitors can be more difficult to manufacture, such as by requiring additional critical metallurgical steps, and thus can be very expensive to produce.

Other manufacturing approaches directed to reducing the non-linearities resulting from voltage coefficient of capacitors have included the precise controlling and matching of the doping levels on the capacitors in an attempt minimize the depletion region of the involved capacitors. However, such doping techniques can significantly increase the manufacturing costs of the capacitors. Moreover, such doping techniques are not able to reduce the non-linearities within the capacitor array to the standards expected to be required in the future for precision and accuracy in A/D converters, *e.g.*, to errors of less than 1 LSB.

Another approach for minimizing the impact on linearity created by voltage coefficients in capacitors is disclosed more fully in U.S. Patent No. 4,878,151 issued to Gallichio on October 31, 1989, and which describes an "anti-parallel" capacitor arrangement having two capacitors connected such that the polarity of one capacitor is connected to the reverse polarity of the other capacitor. Gallichio states that the change in capacitance of each capacitor as the input voltage is varied cancels out the linear variation in the capacitance of each capacitor due to the reverse polarity of the two capacitors.

Further, U.S. Patent No. 4,918,454, issued on April 17, 1990 to Early et al., discloses that if two capacitors are combined in parallel, one with a negative voltage across and the other with a positive voltage across, the dominant first order coefficient, *i.e.*, the first order coefficient in a Taylor series expansion of the voltage coefficient for a given capacitance, and which corresponds
5 to the dominant non-linearity of the capacitor, can be canceled out. In general, this Taylor series expansion can be expressed as:

$$C = C_{\text{NOMINAL}} + K_1V + K_2V^2 + \dots$$

Thus, in addition to the dominant first order capacitive voltage coefficient, K_1 , there also exists second order, K_2 , third order, K_3 , etc., coefficients which also must be addressed to have a
10 perfectly linear capacitor.

With reference to Figure 1, a schematic representation of the anti-parallel configuration, and with reference to Figure 2, a cross-sectional diagram of an anti-parallel configuration, each as disclosed by Early et al. are shown. As shown, Early et al. discloses an anti-parallel configuration in which two capacitors 28 and 30, are directly connected with their polarity
15 reversed with respect to each other to provide a single capacitor component having a low voltage coefficient.

Unfortunately, the implementation of the capacitor component disclosed in Early et al. into an array of capacitors for charge redistribution, with each capacitor component within the array comprising at least two capacitors configured in an "anti-parallel" manner, *i.e.*, the polarity
20 of each capacitor within the capacitor component alternating from positive to negative, would have its disadvantages. As one will appreciate, such a configuration and interconnection process would require a sizable layout area when producing such an array arrangement. Moreover, such

an interconnection process could prove to be quite complicated during manufacture. For example, the requirements for the layout area would be greatly increased due to the need for excess space to provide the interconnections from the top plate of one capacitor to the bottom plate of another adjacent capacitor. Another disadvantage is that an array of capacitor components comprising capacitors successively configured in an anti-parallel manner could introduce these coupling effects into the capacitive network of the A/D circuit. These coupling effects, which result from the effects of the plurality of crossing interconnections, would lead to crosstalk, dynamic switching errors, and dc accuracy problems. Accordingly, the manufacturing costs and complexity would be increased for such a capacitor array comprising a plurality of anti-parallel capacitors within an A/D converter.

Accordingly, a need exists for a capacitor array which overcomes the above described problems with prior art A/D converters. In particular, a need exists for a capacitor array configured to reduce and/or eliminate the voltage coefficient non-linearities present within an A/D converter, without complicating the manufacturing and layout requirements for the A/D converter. Further, a need exists for a method for negating the voltage coefficient of the capacitors as used within an A/D converter to facilitate minimal linearity errors of less than 1 LSB.

SUMMARY OF THE INVENTION

A capacitor array in accordance with the present invention addresses many of the shortcomings of the prior art. In accordance with one aspect of the present invention, the capacitor array is configured to negate or cancel the influence of the voltage coefficient of the

capacitors within the array, and thus reduce and or eliminate the voltage coefficient related non-linearities present within the A/D converter. In accordance with an exemplary embodiment, a first capacitor within the array is suitably configured with at least one additional capacitor in the array such that the charge across the array is linear with respect to an input voltage applied to the input of the array. In addition, the voltage coefficient induced non-linearities from the first capacitor can be suitably canceled by the inverse voltage coefficient induced non-linearities of any additional capacitors within the balance of the array, thereby reducing the potential for non-linearities within the A/D converter.

BRIEF DESCRIPTION OF THE DRAWINGS

10 A more complete understanding of the present invention may be derived by referring to the detailed description and claims when considered in connection with the Figures, where like reference numbers refer to similar elements throughout the Figures, and:

Figure 1 is a schematic representation of an exemplary anti-parallel configuration of the prior art;

15 Figure 2 is a cross-sectional diagram of an anti-parallel configuration of the prior art;

Figure 3 illustrates a schematic representation of an exemplary embodiment of a capacitor array in accordance with the present invention;

Figure 4 illustrates a schematic representation of a capacitor arrangement in accordance with one aspect of the present invention; and

20 Figures 5A and 5B illustrate a schematic representation of another exemplary embodiment of a capacitive array in accordance with the present invention.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS OF THE INVENTION

The present invention may be described herein in terms of various hardware components and processing steps. It should be appreciated that such components may be realized by any number of hardware components configured to perform the specified functions. For example, the present invention may employ various integrated circuit components, *e.g.*, transistors, memory elements, digital signal processing elements, integrators, and the like, which may carry out a variety of functions under the control of one or more microprocessors or other control devices. In addition, those skilled in the art will appreciate that the present invention may be practiced in any number of conversion contexts and that the exemplary embodiment described herein is merely one exemplary application for the invention. Moreover, with respect to various embodiments, many devices will be described as either connected or coupled to another device. It should be noted that such connections can be facilitated by direct connection to another device, or by connection through another device, such as, for example, a gain block or other functional component. Further, it should be noted that the present invention may employ any number of conventional techniques for filtering, signal processing and conditioning, and the like. Such general techniques that may be known to those skilled in the art are not described in detail herein.

As discussed above, a need exists for a capacitor array that can reduce and/or eliminate the voltage coefficient non-linearities, and yet is easier to manufacture and can utilize low cost, production level capacitors. In accordance with the present invention, a capacitor array is suitably configured to cancel out the dominant voltage coefficient non-linearities present in the

capacitors to prevent the capacitor array from detrimentally affecting the integrated circuit device in which it operates.

In accordance with an exemplary embodiment, with reference to Figure 3, a capacitor array circuit 300, as may be used with an A/D converter, is illustrated. In accordance with this
5 exemplary embodiment, capacitor array circuit 300 suitably comprises three voltage sources, an input voltage V_{IN} , a reference voltage V_{REF} , and a comparison voltage V_{COMP} , an input switch, S_{IN} , a comparator switch, S_C , and a capacitor array network 302. Comparison voltage V_{COMP} suitably comprises a comparison reference for a comparator device during the conversion process. In addition, comparison voltage V_{COMP} can comprise a positive or negative voltage
10 reference, or can be suitably connected to ground. Input switch S_{IN} and comparator switch, S_C can comprise any device for switching analog signals, such as, for example, transistor devices, or any other device hereinafter devised.

Capacitor array network 302 preferably comprises an array of capacitors, C_1 - C_N , with each such capacitor having a corresponding reference switch, S_1 - S_N . Like switches S_C and S_{IN} ,
15 reference switches S_1 - S_N can comprise any device for switching analog signals, now known or hereinafter devised. Preferably, switches S_1 - S_N suitably comprise transistor devices, *e.g.*, CMOS transistors configured in PMOS and/or NMOS arrangements.

In accordance with an exemplary embodiment of the present invention, capacitor C_1 , which suitably represents the most significant bit "MSB", is suitably configured such that its top
20 plate, also referred to as its positive terminal, is connected to comparator switch S_C , while the remaining capacitors C_2 - C_N are suitably configured such that their bottom plates, also referred to as their negative terminals, are connected to comparator switch S_C . It should be noted, however,

that the use of the terms “positive terminal” and “negative terminal” are for the purposes of a naming convention for illustration and do not necessarily imply a particular polarity or voltage potential across the capacitors C_2 - C_N .

Continuing in accordance with this exemplary embodiment of the present invention,
5 capacitor C_1 is suitably configured such that its bottom plate, i.e., its negative terminal, is connected to its corresponding reference switch S_1 , while the remaining capacitors C_2 - C_N are suitably configured such that their top plates, i.e., their positive terminals, are connected to their corresponding reference switches S_2 - S_N . However, it should be noted that the connection of capacitors C_1 - C_N could be suitably reversed in polarity in accordance with other embodiments of
10 the present invention. For example, capacitor C_1 could have its positive terminal connected to reference switch S_1 , while capacitors C_2 - C_N could have their positive terminals connected to comparator switch S_C .

Although capacitors C_1 and C_2 - C_N do not comprise individual or multiple capacitors configured in an “anti-parallel” manner, it has been discovered that the present configuration
15 tends to negate the dominant first-order non-linearities, as well as any other odd-order non-linearities, caused by the voltage coefficients influences of the capacitors. In effect, capacitor C_1 within the array is suitably configured with capacitors C_2 - C_N in the array such that the charge across the array is linear with respect to an input voltage applied to the input of the array. Accordingly, the voltage coefficients of the capacitors are reduced, i.e., the dominant first-order
20 non-linearities may be effectively canceled within the capacitor array, and thus the performance of the A/D converter is improved. As a result, such a capacitor array realizes an improved

linearity of approximately 2-3 times over prior art capacitor arrays, with the distortion improving by an average of 6-9dB.

However, in addition to the above improvements, it should also be noted that the interconnection process for the capacitor array of the present invention is much simpler than an array of capacitors comprised of separate anti-parallel capacitors, i.e., simpler than array wherein each such capacitor in the array would comprise at least two capacitors configured in an “anti-parallel” manner. Moreover, the layout area required for the capacitor array of the present invention has been significantly reduced from an array configuration of individual, anti-parallel capacitors. Still further, although the capacitors as utilized in the capacitor array in accordance with an exemplary embodiment of the present invention can be highly doped, the configuration of the capacitor array of the present invention permits even production level, low cost capacitors to be utilized as well.

In accordance with another aspect of the present invention, capacitor array 302 suitably comprises a N-bit array configuration to facilitate analog-to-digital conversion. Accordingly, capacitor array 302 can also be expanded to include smaller arrays, e.g., 2-bit arrays, or larger arrays, e.g., 32-bit or larger arrays, as well as any configuration in between. In accordance with an exemplary embodiment, capacitor array 302 comprises a 16-bit array.

In addition, in accordance with an exemplary embodiment, capacitor array 302 suitably comprises an array of binary weighted capacitors. For example, if the capacitance value of C_1 is C , then the capacitance value of C_2 is $1/2C$, the capacitance value of C_3 is $1/4C$, and so on, such that the capacitance value of C_N is $1/(2^{N-1})C$. As a more specific example, in a 16-bit array, if the

capacitance value of C_1 is C , then the capacitance value of C_{16} is $1/2^{15} C$, i.e., the capacitance value of C_{16} is $3.05^{-5} C$.

In addition, prior art capacitor arrays as used in many A/D converters often have difficulty in matching their desired capacitance values, and in particular those A/D converters employing a binary weighted capacitor scheme. Typically, this capacitance matching problem is a result of process variations during manufacture of capacitors which may cause underage and overage of the capacitor values within the capacitor arrays. In accordance with another aspect of the present invention, although each capacitor C_1 - C_N can comprise a single capacitor, each capacitor C_1 - C_N can also be comprised of a plurality of smaller capacitors. However, unlike the capacitor taught by Early et al., the plurality of smaller capacitors comprising each capacitor C_1 - C_N are configured in a parallel manner, rather than an "anti-parallel" manner. With reference to Figure 4, in accordance with this aspect, any one of capacitor components C_1 - C_N can comprise a plurality of capacitors configured in a parallel manner to provide a desired capacitance value.

In addition, the plurality of capacitors comprising each capacitor C_1 - C_N can be configured in various manners to provide a capacitor having a capacitance value of C_N equal to $1/(2^{N-1})C$. For example, in a case where equal value capacitors are utilized to provide capacitor components C_1 - C_N , capacitor component C_1 can comprise 32 smaller equal value capacitors configured in parallel, capacitor component C_2 can comprise 16 of the smaller equal value capacitors, and capacitor component C_3 can comprise 8 of the smaller equal value capacitors, and so on. However, it should also be noted that each of capacitors C_1 - C_N could also comprise a plurality of capacitors of unequal values, and that the capacitors can be suitably configured in a series or a

series/parallel combination such that the capacitance value for any capacitor component C_1 - C_N is a function of $1/(2^{N-1})C$.

Having generally described a capacitor array circuit 300 as may be used with an A/D converter in accordance with an exemplary embodiment, the operation of a capacitor array circuit 300 configured to perform an N-bit analog-to-digital conversion by measuring an analog voltage and converting the analog voltage to a corresponding N-bit digital word will now be described. In accordance with this aspect, capacitor array circuit 300 is configured to switch between three modes, such as a sampling mode, a holding mode and a conversion mode.

In the sampling mode, switch S_{IN} is suitably connected to receive the analog input voltage V_{IN} , and switches S_1 through S_N are suitably closed such that capacitors C_1 through C_N are connected to the input voltage V_{IN} through a first terminal, with the second terminal of each of the capacitors C_1 - C_N connected to V_{COMP} by switch S_C . At the end of the sampling mode, capacitors C_1 - C_N collectively store a charge proportional to the input voltage, V_{IN} . Moreover, as a result of the configuration of capacitor C_1 with respect to capacitors C_2 - C_N as discussed above, the charge across capacitors C_1 - C_N is linear with respect to input voltage, V_{IN} , in spite of dominant first order voltage coefficients within capacitors C_1 - C_N .

In the hold mode, ground switch S_C preferably switches from V_{COMP} to an input comparison device, such as a comparator. Thereafter, switch S_1 suitably opens. Meanwhile, reference switches S_2 - S_N suitably switch from the voltages sources to ground. However, switch S_1 remains closed. Finally, input switch S_{IN} suitably selects the reference voltage, V_{REF} . Accordingly, capacitor C_1 , which represents the most significant bit or "MSB" of the array, is connected to the reference voltage V_{REF} .

In the conversion mode in which charge redistribution occurs, each of the capacitors C_1 - C_N are suitably connected in a sequential process to the reference voltage V_{REF} . Here, capacitors C_2 - C_N are sequentially disconnected on the first terminal from ground and are switched to the reference voltage V_{REF} , while continuing to be coupled to the comparator on the second terminal.

5 Accordingly, capacitor array circuit 300 sequentially derives an output digital word bit-by-bit by doing a comparison between a summing node 304 and V_{COMP} , as the switches S_2 - S_N are toggled between ground and the reference voltage, V_{REF} . For example, with respect to capacitor C_1 , if the comparator detects at summing node 304 a voltage above V_{COMP} , the bit corresponding to capacitor C_1 , i.e, the MSB, is set to a digital "zero" value, and switch S_1 is suitably switched to
 10 ground. On the other hand, if the comparator detects a voltage below V_{COMP} , the bit corresponding to capacitor C_1 is set to a digital "one" value, and switch S_1 remains suitably connected to the reference voltage, V_{REF} . Thereafter, capacitor array circuit 300 repeats this sequence separately for each capacitor C_2 - C_N , i.e., reference switch S_2 switches from ground to the reference voltage, V_{REF} , the comparison is made between summing node 304 and V_{COMP} , a
 15 decision is made as to the position to leave switch S_2 , and the sequence is continued.

Accordingly, as a result of the sampling, holding and conversion modes described above, the position of switches S_1 - S_N of capacitor array 300 are representative of an N-bit digital word that is representative of the input voltage V_{IN} . Once the conversion into the N-bit digital word has taken place, the entire three-mode conversion process can then start again with the sampling
 20 step of a new input voltage value for V_{IN} . However, as a result of the configuration of capacitor C_1 with respect to capacitors C_2 - C_N of capacitor array 302, the dominant voltage coefficient non-linearities are substantially eliminated during operation.

This ability to cancel out the dominant voltage coefficient non-linearities results from the binary weighted scheme for the capacitors which provides that the weight of capacitor C_1 is suitably balanced against its weight in sum of the capacitors it is trying to negate, e.g., capacitors C_2 - C_N . For example, if capacitor C_1 has a weight of $32C$, capacitor C_2 has a weight of $16C$, and
 5 so on, such that capacitor C_N has a weight of $1/(2^{N-1})C$, the weight of capacitor C_1 suitably balances out the weight in sum of capacitors C_2 - C_N . Preferably, this cancellation suitably occurs during the sampling step, wherein reference switches S_1 - S_N are suitably connected to the input voltage V_{IN} .

Without limiting generally the foregoing, a more detailed exemplary embodiment
 10 comprising a 16-bit capacitor array circuit 500 for an A/D converter is illustrated with reference to Figures 5A and 5B. In this exemplary embodiment, capacitor array circuit 500 suitably comprises an array of capacitors, C_1 - C_{16} , with each such capacitor having a corresponding reference switch, S_1 - S_{16} , suitably configured as described above. Moreover, capacitors C_1 - C_{16} are configured in a binary-weighted manner, i.e., the effective capacitance value of capacitor C_N
 15 is $1/(2^{N-1})C$. In accordance with a preferred embodiment, capacitor C_6 comprises a single capacitor having a capacitance value between 0.1 and 2.0pF, e.g., a 0.65484pF value capacitor. In addition, each preceding capacitor component C_5 - C_1 comprises a capacitance value twice as great as the subsequent capacitor in the array. For example, capacitor C_5 can comprise two similarly sized capacitors as capacitor C_6 , capacitor C_4 comprises 4 similarly sized capacitors as
 20 capacitor C_6 , and so on such that capacitor C_1 comprises 32 capacitors having a similar capacitance value as capacitor C_6 , i.e., capacitors C_1 - C_N comprise binary weighted unit values. However, C_1 - C_N need not comprise binary weighted unit values, and can comprise a single

capacitor configuration, or any other number of capacitors such that each capacitor C_N has a capacitance value of $1/(2^{N-1})C$.

As discussed above, to completely cancel out all the odd-order voltage coefficient errors present within the array, a complete matching of the capacitor array weighted values would be provided. However, in that the weight of capacitor C_1 , for example $32C$, substantially matches the weighted sum of capacitors C_2 - C_N , which have a weighted sum, for example, of $16 + 8 + 4 + \dots 1/(2^{N-1})C$, complete 100% matching may not be easily attainable without further modifications. However, cancellation of the first order dominant non-linearities may only provide benefits to the capacitor array after 90% matching, i.e., the second order non-linearities can begin to dominate at approximately 90% matching and higher, in many embodiments. Accordingly, in an exemplary embodiment, modest cancellation, for example, cancellation of the odd order voltage coefficients greater than 90%, and preferably approximating 97% is provided.

Continuing with this embodiment, capacitor array circuit 500 can also include a scaling down step for scaling down the effective charge on any subsequent capacitors within an array. For example, the scaling down step may comprise the implementation of a capacitor C_8 preferably configured to scale down the value of successive capacitors, such as, for example, capacitor C_7 , to have an effective capacitance value of $1/2$ of capacitor C_6 . Preferably, capacitor C_8 is configured in series between capacitor C_6 and capacitor C_7 . In a preferred embodiment, capacitor C_8 comprises a 0.67pF capacitor, but may comprise various other capacitance values as well. In accordance with this embodiment, with scaling down capacitor C_8 preferably configured to scale down the value of successive capacitors, such as, for example, capacitor C_7 , the weight of capacitor C_1 will be balanced against the weighted sum of capacitors C_2 C_6 . In addition, it

should be noted that the scaling down step may include the reduction of the reference voltage V_{REF} seen by a subsequent capacitor, e.g., C_7 , to effectively scale down the effective charge on capacitors C_7 - C_N .

In addition, capacitors C_{12} - C_7 are configured in a manner similar to capacitors C_6 - C_1 .

- 5 Stated another way, capacitor C_{12} may comprise a single capacitor, e.g., a 0.6644pF value capacitor, with each preceding capacitor C_{11} - C_7 comprising, for example, twice the number of capacitors of the subsequent capacitor in the array such that capacitor C_7 comprises 32 equal value capacitors each of a similar capacitance value as capacitor C_{12} , or a single capacitor configuration or any other number of capacitors such that each capacitor C_N has a capacitance
- 10 value of $1/(2^{N-1})C$.

- While the exemplary embodiment illustrates scaling down capacitor C_s configured in series between capacitor C_6 and capacitor C_7 , it should be noted that scaling down capacitor C_s can be suitably configured anywhere in between capacitors C_1 - C_N . Moreover, scaling down capacitor C_s can also comprise multiple capacitors in a series, parallel, or series/parallel
- 15 configuration.

- With respect to capacitors C_{13} - C_{16} , although each capacitor could also comprise a plurality of capacitors, in this embodiment capacitors C_{13} - C_{16} comprise single capacitors, e.g., capacitor C_{15} comprises a single capacitor having a value 1/8 of the value of capacitor C_{12} . Although not shown, capacitor array circuit 500 could also comprise a second scaling down
- 20 capacitor C_{s2} configured between capacitors C_{12} and C_{13} to suitably scale down the value of capacitors C_{13} - C_{16} . Moreover, additional scaling down capacitors C_s may also be implemented in between capacitors C_1 - C_N .

The present invention has been described above with reference to various exemplary embodiments. However, those skilled in the art will recognize that changes and modifications may be made to the exemplary embodiments without departing from the scope of the present invention. For example, the various components of the capacitor array may be implemented in
5 alternate ways depending upon the particular application or in consideration of any number of cost functions associated with the operation of the system, *e.g.*, the capacitors or switches may be laid out in different sequences or in different areas of an integrated circuit. In addition, the techniques described herein may be extended or modified for use with various other applications, such as, for example, a digital-to-analog (D/A) converter. These and other changes or
10 modifications are intended to be included within the scope of the present invention.

CLAIMS

We claim:

1. A capacitor array configured for minimizing the voltage coefficient non-linearities within an integrated circuit, said capacitor array comprising:
5 a first capacitor having a first polarity and a first weighted value; and
at least one other capacitor having a second polarity and a second weighted value,
wherein said first capacitor is coupled to said at least one other capacitor such that said first
polarity of said first capacitor is reversed with respect to said second polarity of said at least one
other capacitor during sampling of an input voltage; and
10 wherein said first weighted value is balanced against said second weighted value to
negate the dominant odd-order capacitive voltage coefficient non-linearities influences within the
array.
2. A capacitor array according to claim 1, wherein said first capacitor and said at
least one other capacitor are configured in a binary-weighted scheme.
- 15 3. A capacitor array according to claim 2, wherein said capacitor array further
comprises a scaling down capacitor configured to adjust the equivalent capacitance of said at
least one other capacitor.
4. A capacitor array for use within an analog-to-digital converter, said capacitor
array comprising:
20 a first capacitor component having a top plate and a bottom plate; and
at least one other capacitor component, each said at least one other capacitor component
having a top plate and a bottom plate, wherein said top plate of said first capacitor is connected

to said bottom plate of each of said at least one other capacitor, and said bottom plate of said first capacitor is connected to said top plate of each said at least one other capacitor only during a sampling of an input voltage by said capacitor array, and

wherein errors produced by first order voltage coefficients of said first capacitor component and said at least one other capacitor component within said capacitor array are canceled to reduce the non-linearities present within said analog-to-digital converter.

5 5. A capacitor array according to claim 4, wherein said first capacitor component and said at least two other capacitor components each comprise one of a single capacitor and a plurality of capacitors, said plurality of capacitors being configured in parallel with identical
10 polarity.

6. A capacitor array according to claim 4, wherein said capacitor array is configured in a binary-weighted scheme.

7. A sampling circuit for use within an analog-to-digital converter, said sampling circuit comprising:

15 a pair of voltage terminals comprising a reference voltage terminal and an input voltage terminal;

a plurality of switches comprising an input switch, a comparator switch, and a plurality of reference switches; and

a plurality of capacitors configured in a parallel array, wherein only one of said plurality
20 of capacitors is configured in a reverse polarity arrangement with any other capacitors of said plurality of capacitors to reduce the voltage coefficient non-linearities within said sampling circuit.

8. A sampling circuit according to claim 7, wherein said wherein said plurality of capacitors further comprises a scaling down capacitor configured to adjust the equivalent capacitance of said plurality of capacitors.

9. A capacitor array for use within an analog-to-digital converter, said capacitor
5 array comprising:

a first capacitor component; and

at least one other capacitor component, wherein said first capacitor component is selectively configurable with said at least one other capacitor component such that a voltage charge across said capacitor array is linear with respect to an input voltage received by said
10 capacitor array, and wherein odd-order voltage coefficient non-linearities of said capacitor array are canceled.

10. A capacitor array according to claim 9, wherein said first capacitor component and said at least one other capacitor component do not include an anti-parallel configuration of capacitors.

15 11. A capacitor array of claim 10, wherein said capacitor array is configured in a binary-weighted scheme.

12. A capacitor array of claim 11, wherein said capacitor array further comprises a scaling down capacitor configured to adjust the equivalent capacitance of said plurality of capacitors.

1/5

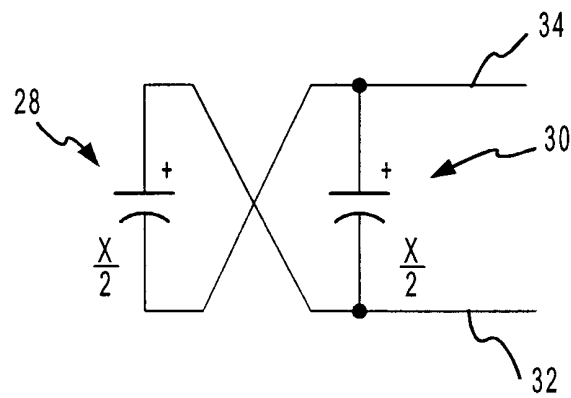


FIG.1

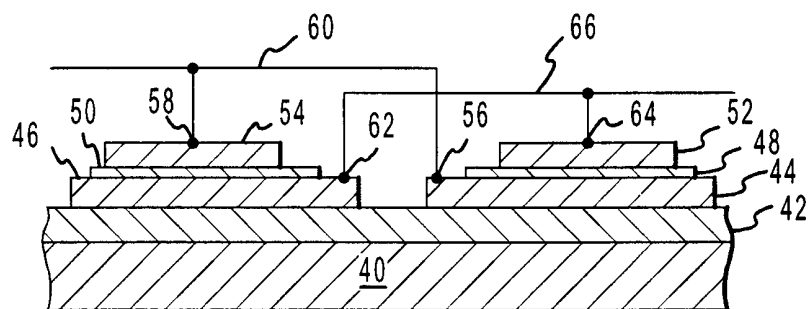


FIG.2

2/5

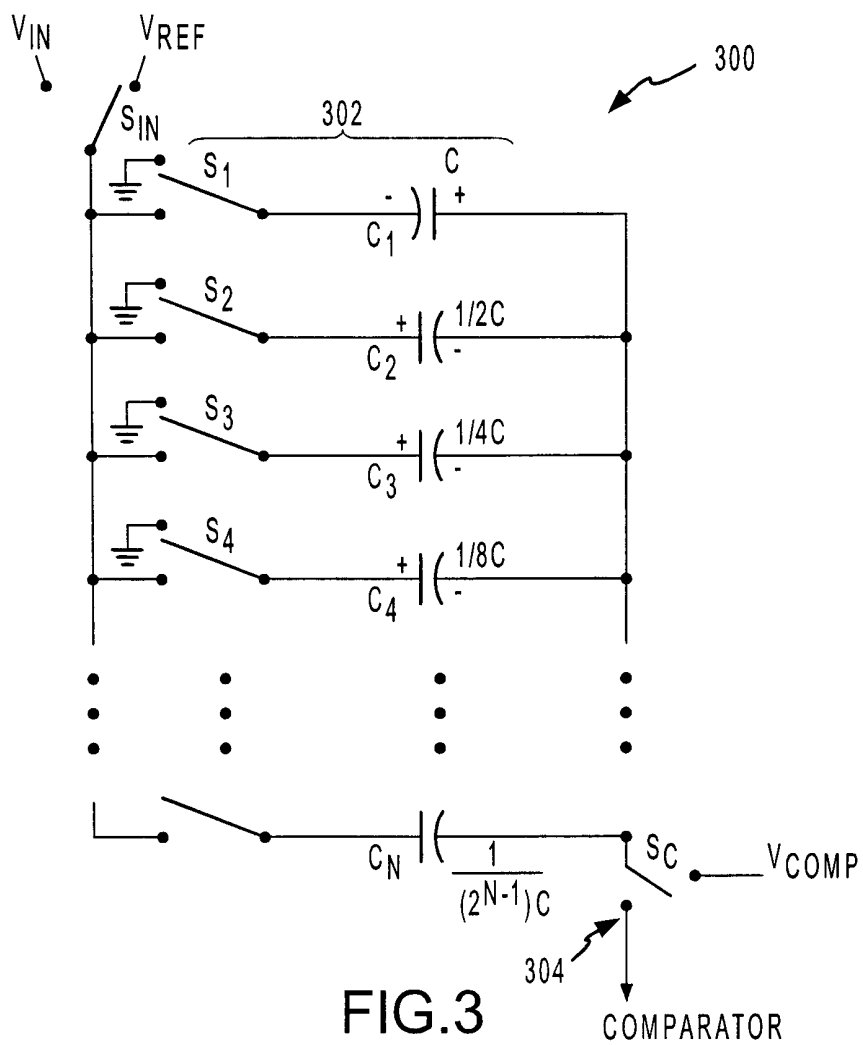


FIG.3

COMPARATOR



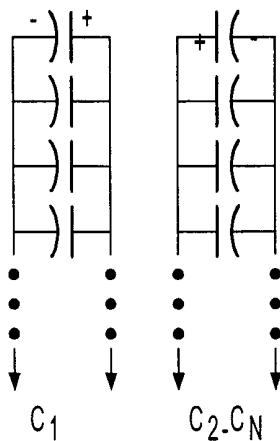


FIG.4

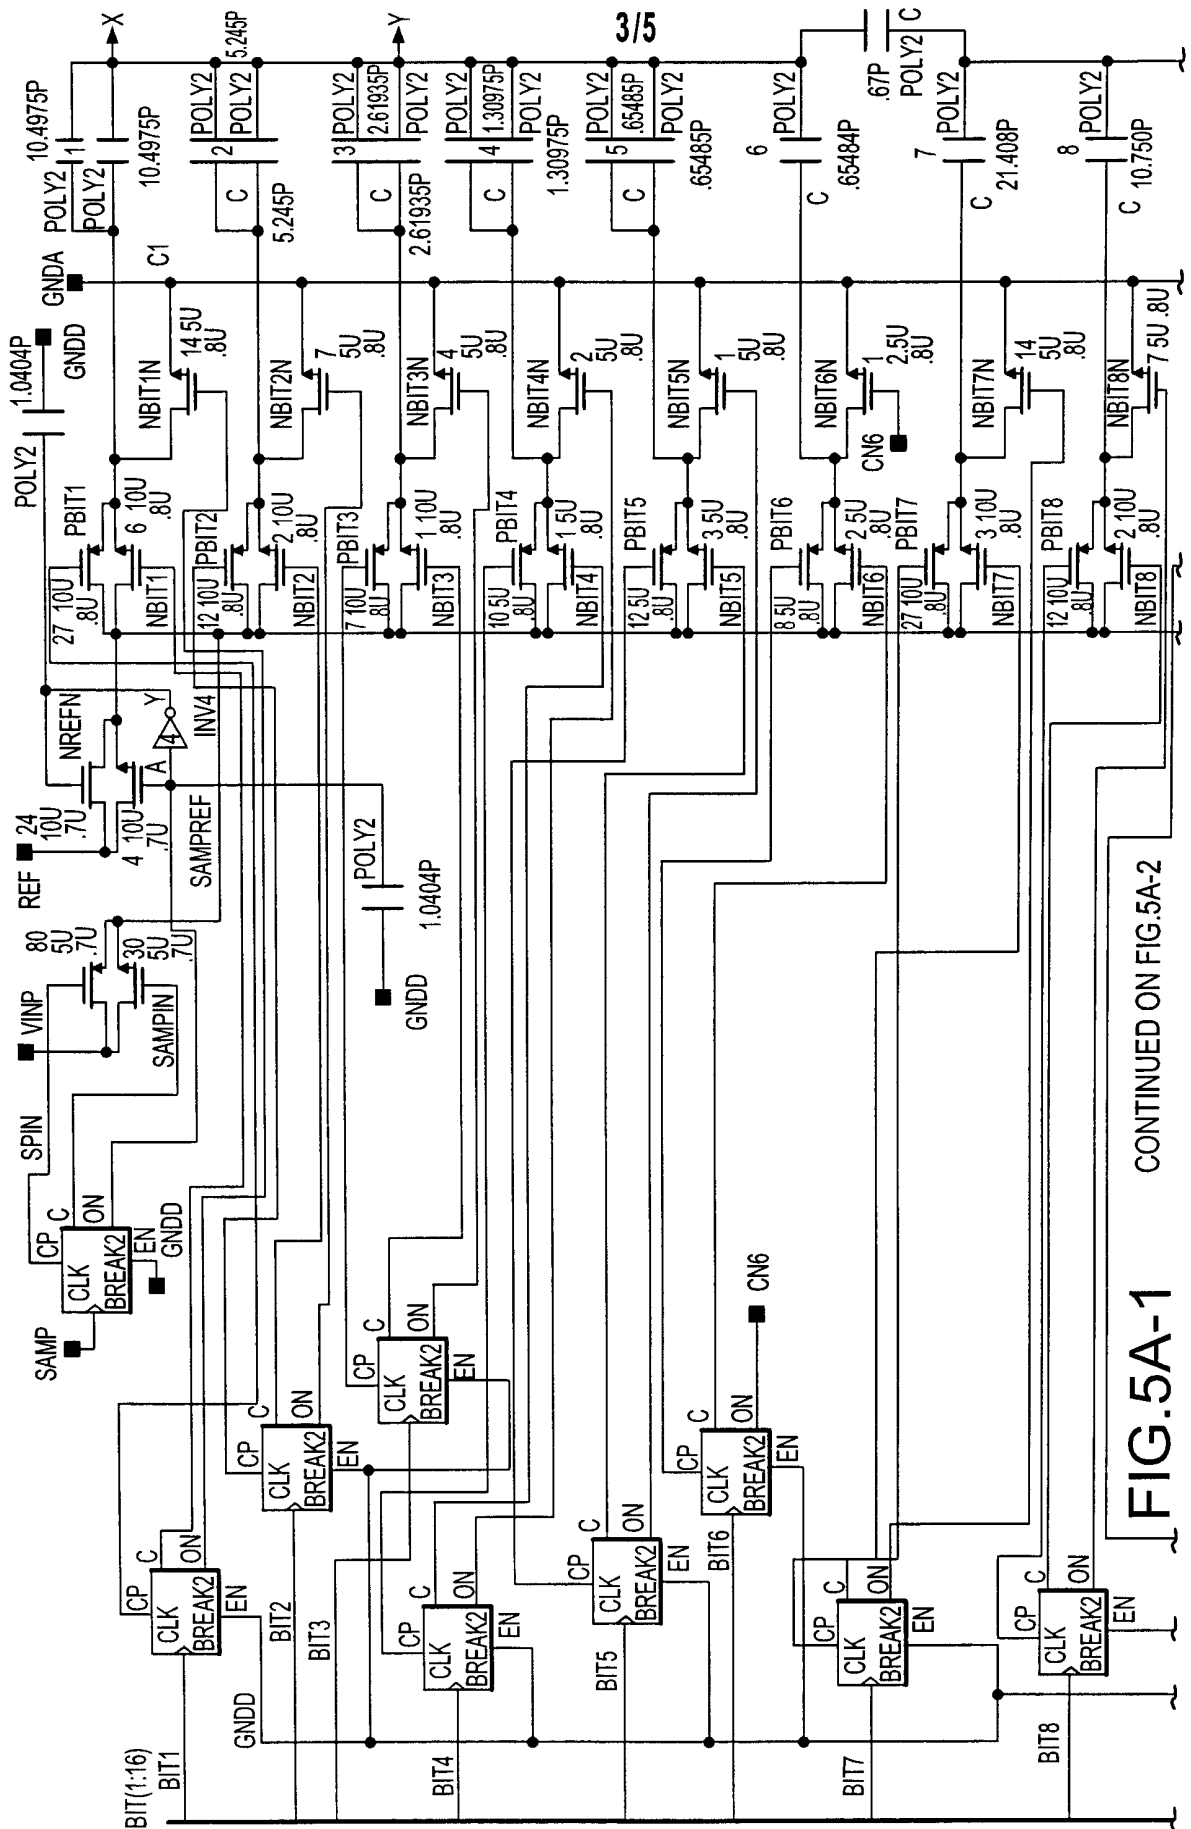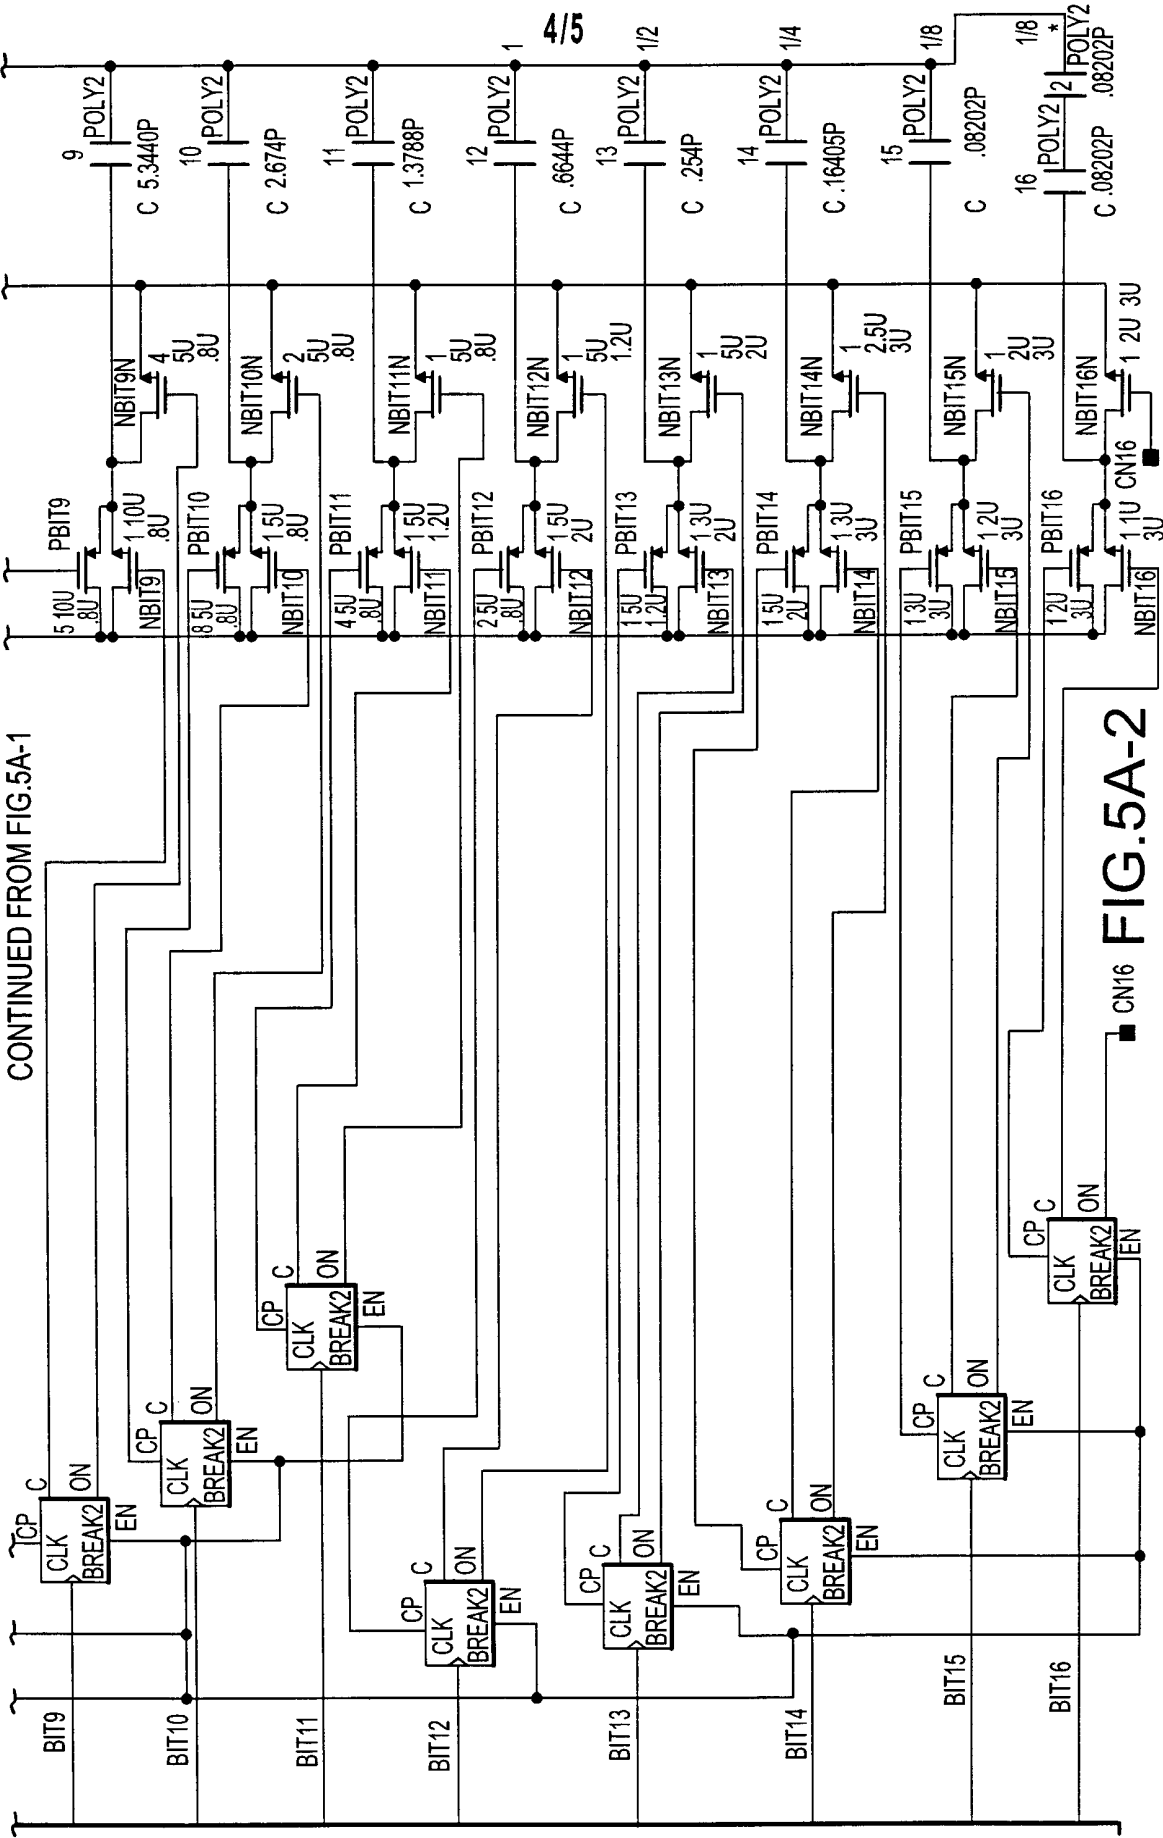

CONTINUED ON FIG.5A-2

FIG.5A-1



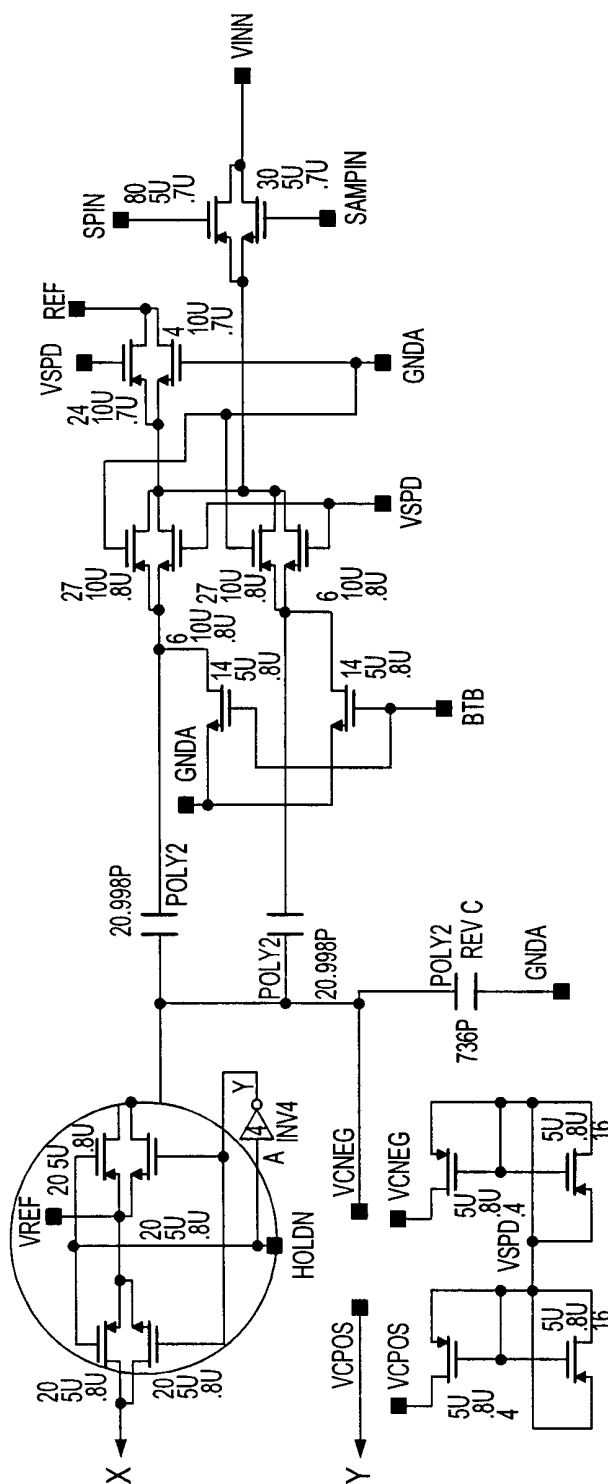


FIG. 5B

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/18056

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H03M1/06 //H03M1/46, H03M1/80

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H03M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, IBM-TDB, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 918 454 A (SCOTT III BAKER P L ET AL) 17 April 1990 (1990-04-17) cited in the application column 9, line 39 -column 10, line 44; figures 2, 10A-10C -----	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

23 October 2000

Date of mailing of the international search report

30/10/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Beindorff, W

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/18056

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4918454 A	17-04-1990	DE 3933552 A	19-04-1990
		GB 2223879 A, B	18-04-1990
		JP 2038934 C	28-03-1996
		JP 2210859 A	22-08-1990
		JP 7056942 B	14-06-1995
		US 5208597 A	04-05-1993
