

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 August 2005 (25.08.2005)


PCT

(10) International Publication Number
WO 2005/078468 A2

- (51) International Patent Classification⁷: **G01R 33/34**
- (21) International Application Number:
PCT/US2005/001813
- (22) International Filing Date: 20 January 2005 (20.01.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/537,782 20 January 2004 (20.01.2004) US
- (71) Applicant (for all designated States except US): **THE UNIVERSITY OF HOUSTON SYSTEM** [US/US];
The University of Houston, Assoc. Gen. Counsel, Off.
IP Management, 316 E Cullen Building, Houston, Texas
77204-2015 (US).
- (72) Inventor: **XIE, Leiming P.** [US/US]; 6310 Rampart
Street, APT 30, Houston, Texas 77081 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **WOSIK, Jaroslaw**
[PL/US]; 2807 Conway, Houston, Texas 77025 (US).
NESTERUK, Krzysztof [PL/PL]; Szegedynska 5 m.92,
PL-01-957 Warsaw (PL).
- (74) Agent: **STROZIER, Robert, W.**; P.O. Box 429, Bellaire,
Texas 77402 (US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,

[Continued on next page]

(54) Title: SUPERCONDUCTING LOOP, SADDLE AND BIRDCAGE MRI COILS

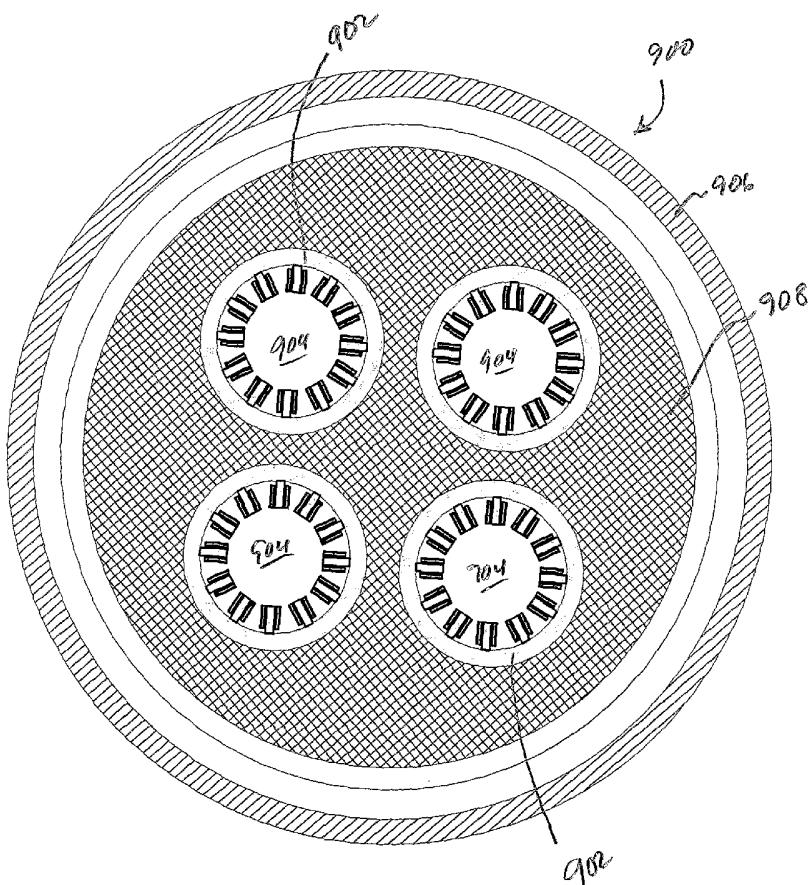

(57) Abstract: New MRI coil and resonators are disclosed based solely on superconducting inductive element and built-in capacitive elements as well as hybrid superconducting-metal inductive and capacitive elements having superior SNR. Single and multiple small animal MRI imaging units are also disclosed including one or more resonators of this invention surrounding one or more small animal cavities. Methods for making and using the MRI coils and/or arrays are also disclosed.



TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TITLE: SUPERCONDUCTING LOOP, SADDLE AND BIRDCAGE MRI COILS

INVENTOR: Jaroslaw Wosik, Krzysztof Nesteruk, Leiming P.Xie

ASSIGNEE: THE UNIVERSITY OF HOUSTON SYSTEM

RELATED APPLICATIONS

[0001] The present application claims provisional priority to United States Provisional Patent Application Serial No. 60/537782 filed January 20, 2004, the entire contents of which is hereby incorporated by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0002] The present invention relates to the general field of magnetic resonance, and to methods and apparatus for their practice.

[0003] More particularly, the present invention relates to an apparatus and a method for using the apparatus, where the apparatus includes a housing including at least one cavity for housing a small mammal, where the housing includes a superconducting array of MRI elements cooled by liquid nitrogen and where the housing with an animal therein is designed to place in an MRI instrument and MRI images of the mammal obtained.

2. Description of the Related Art

[0004] It is known that in magnetic resonance imaging (MRI) when receiving signal coil noise dominates, overall system noise, using superconducting receiving coil, increases significantly as does overall signal-to-noise ratio of the MRI system. Superconducting coils in either surface coil or volume coil configuration are formed out of four or more sections of dielectric/superconductor or dielectric/metal strips. Strips are made out of thin high temperature superconducting (HTS) or metal thin films deposited on dielectric rigid or flexible substrates. Such strips are connected together via build-in capacitors. At each of the connections, YBCO layers are separated by dielectric layers to form capacitors. Resonant frequency is determined mainly by a length of the structure and a thickness of the dielectric layer separating the YBCO layers and a dielectric constant of the dielectric layer. Flat surface coils, saddle coils and volume birdcage coils have been designed.

[0005] Birdcage radio frequency coils have been widely used in magnetic resonance imaging because of their efficiency and azimuthal B₁ field homogeneity and design of all superconducting birdcage for small animals has a practical potential. Thus, there is a need in the art for efficient small animal including small mammal MRI birdcage devices that have low noise and/or

improved signal-to-noise ratios and have the capability of simultaneously housing multi-animals in a single device.

SUMMARY OF THE INVENTION

[0006] The present invention provides a MRI single coil including composite structures of dielectric layers and superconducting layers and/or metallic layers, where the layers are constructed to form inductive regions of the superconducting layers and/or metallic layers interconnected by capacitive regions formed by superconducting layers and/or metallic layer having a dielectric layer interposed therebetween.

[0007] The present invention provides a MRI phased array of coils of this invention constructed in such a way as to form MRI housings including a single animal tube or multiple animal tubes, each tube having one or more MRI arrays associated therewith.

[0008] The present invention also provides a multi-animal apparatus adapted for simultaneous measurements of multi-animals, where the apparatus includes a plurality of animal tubes, each tube including one or more MRI coils or coil arrays of this invention. In one preferred embodiment, each animal tube includes a birdcage-like MRI coil array. The apparatus also includes a cryogenic system for cooling the MRI coils or MRI coil arrays.

[0009] The present invention also provides an MRI resonator apparatus comprising four superconducting members, each member including a superconducting layer, where the members arranged to form a closed shape having four overlapping regions, and separating dielectric layers interposed between the superconducting layers at the overlapping regions to form built-in capacitors. Each member comprises a substrate dielectric layer upon which the superconducting layer was formed. The substrate dielectric layers can be rigid. Two of the substrate dielectric layers can be rigid and two of the substrate dielectric layers can be flexible. The members are straight. Two of the members can be straight and two of the members can be curvilinear. Two of the members can be straight and two of the members can be arcuate. The substrate dielectric layers can be the separating dielectric layers. The apparatus can further comprise a metal layer formed on an exposed portion of a dielectric layer or a external dielectric layer formed form on an exposed portion of a superconducting layer with a metal layer formed on the outer surface of the external dielectric layer to form coupling or decoupling capacitive elements. The apparatus can further comprise wires bonded to the metal layers, where the metal wires are adapted to link a plurality of the apparatus together to form arrays or to connect the apparatus to a pre-amplifier.

[0010] The present invention also provides a hybrid MRI resonator apparatus comprising two superconducting members, each member including a superconducting layer, two metal member,

-3-

and separating dielectric layers, where the superconducting members and the metal members are arranged to form a closed shape having four overlapping regions and the separating dielectric layers are interposed between the superconducting layers and the metal members at the overlapping regions to form built-in capacitors. Each superconducting member comprises a substrate dielectric layer upon which the superconducting layer was formed. The substrate dielectric layers can be rigid. Two of the substrate dielectric layers can be rigid and two of the substrate dielectric layers can be flexible. The superconducting members can be straight or curvilinear or arcuate. The substrate dielectric layers can be the separating dielectric layers. The apparatus can further comprise a metal layer formed on an exposed portion of a dielectric layer or a external dielectric layer formed form on an exposed portion of a superconducting layer with a metal layer formed on the outer surface of the external dielectric layer to form coupling or decoupling capacitive elements. The apparatus can further comprise wires bonded to the metal layers, where the metal wires are adapted to link a plurality of the apparatus together to form arrays or to connect the apparatus to a pre-amplifier.

[0011] The present invention provides a birdcage-type resonator apparatus comprising a plurality of coils apparatus including four members, each member including a superconducting layer, where the members arranged to form a closed shape having four overlapping regions, and separating dielectric layers interposed between the superconducting layers at the overlapping regions to form built-in capacitors, and at least one small animal cavity, where the coil apparatus are arranged around the cavity to permit MRI imaging of an animal placed within the cavity. Each member comprises a substrate dielectric layer upon which the superconducting layer was formed. The substrate dielectric layers can be rigid. Two of the substrate dielectric layers can be rigid and two of the substrate dielectric layers can be flexible. The members can be straight. Two of the members can be straight and two of the members can be curvilinear. Two of the members can be straight and two of the members can be arcuate. The substrate dielectric layers can be the separating dielectric layers. The apparatus further comprises a metal layer formed on an exposed portion of a dielectric layer or a external dielectric layer formed form on an exposed portion of a superconducting layer with a metal layer formed on the outer surface of the external dielectric layer to form coupling or decoupling capacitive elements. The apparatus further comprises wires bonded to the metal layers, where the metal wires are adapted to link a plurality of the apparatus together to form arrays or to connect the apparatus to a pre-amplifier.

[0012] The present invention also provides a birdcage-type resonator apparatus comprising a plurality of coils apparatus including two superconducting members, each member including a

-4-

superconducting layer, two metal member, and separating dielectric layers, and at least one small animal cavity, where the coil apparatus are arranged around the cavity to permit MRI imaging of an animal placed within the cavity and where the superconducting members and the metal member are arranged to form a closed shape having four overlapping regions and the separating dielectric layers are interposed between the superconducting layers and the metal members at the overlapping regions to form built-in capacitors. Each superconducting member comprises a substrate dielectric layer upon which the superconducting layer was formed. The substrate dielectric layers can be rigid. Two of the substrate dielectric layers can be rigid and two of the substrate dielectric layers can be flexible. The superconducting members can be straight. The superconducting members can be curvilinear. The superconducting members can be arcuate. The substrate dielectric layers can be the separating dielectric layers. The apparatus further comprises a metal layer formed on an exposed portion of a dielectric layer or a external dielectric layer formed form on an exposed portion of a superconducting layer with a metal layer formed on the outer surface of the external dielectric layer to form coupling or decoupling capacitive elements. The apparatus further comprises wires bonded to the metal layers, where the metal wires are adapted to link a plurality of the apparatus together to form arrays or to connect the apparatus to a pre-amplifier.

[0013] The present invention also provides a small animal MRI apparatus comprising a vacuum housing including at least one cylindrical cavity adapted to receive a small animal, a coolant reservoir including a coolant, a coolant inlet, a coolant outlet and a cold plate forming an internal end of the reservoir, a resonator of this invention surrounding each cavity or a plurality of coils of this invention positioned within the housing to permit MRI imaging of an animal in each of the cavities.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The invention can be better understood with reference to the following detailed description together with the appended illustrative drawings in which like elements are numbered the same:

[0015] **Figures 1A-K** depict two different loop detector elements of this invention, a fabrication method, expanded views of portions of the structure showing built in capacitors and a corresponding circuit diagram;

[0016] **Figures 2A&B** depict a single saddle loop or coil (**A**) of this invention and a tube made by placing mating saddles together (**B**);

[0017] **Figure 3A&B** depict a preferred embodiment of birdcage type MRI coil array of this

-5-

invention;

[0018] **Figure 3C&C** depict another preferred embodiment of birdcage type MRI coil array of this invention;

[0019] **Figures 4A&B** depict a preferred embodiment of a mixed metal / superconductor MRI resonator of this invention;

[0020] **Figures 4C&D** depict another preferred embodiment of a mixed metal / superconductor MRI resonator of this invention;

[0021] **Figures 4E** depicts a schematic diagrams corresponding to the resonators of Figures 4A-D;

[0022] **Figures 5A&B** depict a preferred birdcage-type hybrid coil array resonator of this invention;

[0023] **Figures 5D-E** depict another preferred birdcage-type hybrid coil array resonator of this invention;

[0024] **Figures 6A&B** depict another preferred birdcage-type hybrid coil array resonator of this invention;

[0025] **Figures 7A&B** depict another preferred birdcage-type hybrid coil array resonator of this invention;

[0026] **Figures 8A&B** depict a preferred small animal MRI apparatus of this invention;

[0027] **Figure 9** depicts another preferred small animal MRI apparatus of this invention;

[0028] **Figure 10** depicts another preferred small animal MRI apparatus of this invention; and

[0029] **Figures 11A-D** depict physical characteristics of the coils resonators of this invention.

DETAILED DESCRIPTION OF THE INVENTION

[0030] The inventors have discovered that a new small animal or multi-small animal MRI apparatus can be designed that has an improved signal-to-noise ratio. The apparatus includes one or more small animal tubes designed to receive a small animal and at least one MRI coil or coil array associated therewith each tube. In one preferred embodiment, the coils or coil arrays are fabricated solely from superconducting materials and dielectric materials. In another preferred embodiment, the coils or coil arrays are fabricated from superconducting materials, metallic conducting materials and dielectric materials. The apparatuses also include a cryogenic cooling system. The multi-animal versions of these apparatus provide improved MRI images simultaneously for all the animals within the multiple animal apparatus.

[0031] The present invention broadly relates to an MRI coil or an array of MRI coils. Each coil includes a plurality of inductive elements, where each inductive element is formed of a

superconducting layer deposited on a dielectric substrate or a metallic conducting layer or member. Each coil also includes an equal plurality of built-in capacitive elements interconnecting adjacent pairs of the inductive elements, where each capacitive element is formed from two superconducting layers with a dielectric layer interposed therebetween or a superconducting layer and a metallic conducting layer with a dielectric layer interposed therebetween. The coils can be rectangular in shape, circular in shape or elliptical in shape and can be flat, curved or curvilinear.

[0032] The present invention also broadly relates to a small animal MRI apparatus including at least one small animal cavity or tube designed to receive a small animal. Each tube includes an effective number of MRI coils or coil arrays sufficient to provide adequate MRI data about the animal or animals in the apparatus. The apparatus also includes a cryogenic cooling unit for maintaining each coil or array in a superconducting condition. The apparatus preferably includes multiple cavities, each cavity with coils or arrays so MRI data can be acquired from each animal simultaneously.

[0033] The present invention also broadly relates to method for acquiring MRI data on multiple small animals including the step of placing one or more small animals in the multiple small animal apparatus of this invention. After placing the animals in the apparatus, the small animal MRI apparatus is positioned within an MRI apparatus. The MRI coils or arrays within the apparatus are then Cooled to a superconducting state. MRI data is then collected simultaneously from each of the animals in the apparatus.

[0034] A significant improvement of the signal-to-noise ratio (SNR) for magnetic resonance imaging (MRI) applications, in which the thermal noise of the *rf* receiver probe dominates the system noise, can be achieved either by cooling a normal metal probe or by using superconductors. The noise in an MRI system is primarily due to thermal noise in the receiver coil and body, which is described by the Nyquist formula: $V_n = 4k(T_b R_b + T_c R_c) \Delta f$, where k is Boltzman's constant, T_b and T_c represent the body and coil temperatures, respectively, and Δf is the bandwidth of the receiver.

[0035] MRI is a widely used diagnostic tool, that provides unsurpassed ability to image soft tissue. In MRI, the subject is placed in a *dc* magnetic field, a sequence of magnetic field gradients and *rf* excitation pulses are then applied to the subject, and relaxing nuclei (usually protons) produce weak decaying *rf* signals that are detected by an *rf* receiver probe. Such signals are weak due to the small differences in energy level populations of parallel and anti-parallel spins nuclei, (about 6 ppm at 1.5T) that contribute to the signal. In both research and clinical

MRI, there is a need for high resolution and/or fast scan imaging, and the signal-to-noise ratio (SNR) is the main limitation on fulfilling these requirements. This makes the overall SNR the most important parameter of MRI systems.

[0036] Noise in the system, in general, is created by conductive losses in the probe and in the body. There are two regimes of such conductive losses in MRI system. In the first regime, the loss in the body dominates, so the SNR is primarily body loss dependent. While, in the second regime, the loss in the coil dominates, so the SNR is primarily coil loss dependent. In the body-loss dependent regime, there is little advantage in reducing ohmic coil loss. However, in the coil loss dependent regime, it has long been recognized that cooling the probe reduces coil noise, and, therefore, can significantly increase the SNR of the measurements.

[0037] The discovery and development of high-temperature superconducting (HTS) materials has resulted in several attempts to build practical probes with improved SNR. Indeed, preliminary studies have shown that for selected applications, where the MRI system noise is in the coil loss regime (low-field MRI, high-field microscopy, and small-volume MRI), HTS MRI receiver coils perform significantly better than comparable copper coils. HTS thin films are very attractive for use in surface receiver coils, because such films at 77 K exhibit an extremely low surface resistance R_s (about 150 μW at 10 MHz). This low surface resistance is several orders of magnitude lower than the surface resistance of copper at the same frequency and temperature. In addition, HTS materials have relatively high critical temperature which can simplify cryostat design and affords for a short distance between the superconducting coil and the body or body part of the imaged.

[0038] One limitation when using surface probes for human imaging is their relatively small field of view. As previously mentioned, phased arrays can be used to allow small coils to cover a large region of interest, while preserving the improved SNR. Recently, the use of arrays has been complemented by elucidating optimal data combinations. For example, a set of weighting coefficients are derived, by which each pixel of each image is weighted in order to achieve an optimal combination. The limit of operation may not be defined solely by SNR, but may also have contributions from the time available for image acquisition in such techniques as functional brain imaging, real-time cardiac MRI, and pediatric MRI.

[0039] Until recently, increases in MRI acquisition speed was limited by the speed at which the field gradients could be switched. However, the hardware speed has increased to the point where the main limitations are now physiological. Faster gradient switching used for imaging and/or applying more rf power per unit time cause nerve stimulation and heating, respectively. To

overcome these limitations, two new techniques, known as SMASH (SiMultaneous Acquisition of Spatial Harmonics) (see D. K. Sodickson, W. J. Manning, "Simultaneous acquisition of spatial harmonics (SMASH); fast imaging with rf coils," *Magn. Reson. Med.* vol. 38, pp. 591-603, 1997) and SENSE (SENSitivity Encoding) (see K. P. Prussman, M. Weigner, M. B. Scheidegger, and P. Boesiger, "SENSE: sensitivity encoding for fast MRI," *Magn. Reson. Med.* , vol. 42, pp. 952-962, 1999), have been developed and successfully demonstrated in a number of applications. These two techniques and their variants provide faster imaging by using known arrays of receiver coils, but they also make use of the unique sensitivity profiles of elements of a receiver array in order to complement the spatial encoding generally accomplished through repeated application of phase encoding magnetic field gradients.

[0040] As the number of array elements increases and their size continues to decrease, conductive losses become more dominant. These losses can overwhelm any SNR gains expected from use of smaller coils that express less body noise. The use of cryogenically cooled copper/HTS coils can extend the depth at which SNR gains can be achieved through phased array acquisition. The potential SNR gain using large arrays increases with the number of elements: SNR gain goes up significantly when a single coil ($N=1$) is replaced with four coils ($N=4$), and it increases even more for $N=8$ or $N=16$ arrays. Thus, the potential advantage of cryogenically cooled//HTS receive arrays with a large number of elements becomes even greater. These SNR gains can be used alongside parallel imaging to achieve higher accelerations while preserving maximum available image SNR. Properly designed *rf* receiver coils are sensitive to *rf* magnetic fields, while being substantially insensitive to *rf* electric fields. That is why an MRI coil is always designed to form a *rf* resonator.

[0041] Our invention includes designs of both superconducting single coil resonators and coil array resonators and hydride single coil and coil array resonators. Superconducting coil in either surface coil or volume coil configuration is formed out of four or more sections of dielectric/superconductor or dielectric/metal strips. Strips are made out of thin HTS or metal thin films deposited on dielectric rigid or flexible substrates. Such strips are connected together via in build capacitors. At each of the connection YBCO layers and separated them dielectric layer form a capacitor. Resonant frequency is determined mainly by length of the structure and separating YBCO layers dielectric thickness and dielectric constant. Both surface flat, saddle coils and volume birdcage coils were designed. Birdcage radiofrequency coils have been widely used in magnetic resonance imaging because of their efficiency and azimuthal B1 field homogeneity and design of all superconducting birdcage for small animals has a practical

potential. In the invention both single coil and phased array configurations are described. In addition, an idea for multi-animal simultaneous measurement set up is shown for both flat and birdcage-like superconducting arrays. A small cryogenic system for cooling down superconducting coils is also shown.

Suitable Materials

[0042] Suitable dielectric material for use in this invention include, without limitations, any dielectric material compatible with the superconductors or metallic conductors used to fabricate the MRI coils or coil arrays of this invention. Exemplary examples include, without limitation, SiO_2 , Si_3N_4 , Al_2O_3 , Y_2O_3 , La_2O_3 , Ta_2O_5 , TiO_2 , HfO_2 , ZrO_2 , or the like or mixture or combinations thereof.

[0043] Suitable superconducting material for use in this invention include, without limitations, any high temperature superconducting material capable of being deposited using well known thin film deposition techniques. Preferred high temperature superconducting materials include, without limitation, high temperature superconducting materials having a T_c above a temperature of liquid nitrogen or liquid carbon dioxide. One preferred class of superconducting materials include, without limitations, high temperature cuprate superconductors. Exemplary examples of cuprate superconductors include, without limitation, $\text{YBa}_2\text{Cu}_3\text{O}_7$, $\text{La}_{2-x}\text{Ba}_x\text{CuO}_4$, $\text{La}_{2-x}\text{Sr}_x\text{CuO}_4$, $\text{La}_{2-x}\text{Sr}_x\text{CaCuO}_4$, $\text{Bi}_2\text{Sr}_2\text{Ca}_2\text{Cu}_3\text{O}_{10}$, $\text{Tl}_2\text{Ba}_2\text{Ca}_2\text{Cu}_3\text{O}_{10}$, $\text{Hg}_{0.8}\text{Tl}_{0.2}\text{Ba}_2\text{Ca}_2\text{Cu}_3\text{O}_{8.33}$, $\text{HgBa}_2\text{Ca}_2\text{Cu}_3\text{O}_8$, $\text{HgBa}_2\text{Ca}_3\text{Cu}_4\text{O}_{10+}$, $\text{HgBa}_2\text{Ca}_{1-x}\text{Sr}_x\text{Cu}_2\text{O}_{6+}$, $\text{HgBa}_2\text{CuO}_4^+$, $\text{TlBa}_2\text{Ca}_2\text{Cu}_3\text{O}_{9+}$, $\text{Tl}_2\text{Ba}_2\text{Ca}_2\text{Cu}_3\text{O}_{10}$, $\text{Tl}_{1.6}\text{Hg}_{0.4}\text{Ba}_2\text{Ca}_2\text{Cu}_3\text{O}_{10+}$, $\text{Tl}_{0.5}\text{Pb}_{0.5}\text{Sr}_2\text{Ca}_2\text{Cu}_3\text{O}_9$, $\text{Tl}_2\text{Ba}_2\text{CaCu}_2\text{O}_6$, $\text{TlBa}_2\text{Ca}_3\text{Cu}_4\text{O}_{11}$, $\text{TlBa}_2\text{CaCu}_2\text{O}_{7+}$, $\text{Tl}_2\text{Ba}_2\text{CuO}_6$, $\text{Bi}_{1.6}\text{Pb}_{0.6}\text{Sr}_2\text{Ca}_2\text{Sb}_{0.1}\text{Cu}_3\text{O}_y$, $\text{Bi}_2\text{Sr}_2\text{Ca}_2\text{Cu}_3\text{O}_{10}$, $\text{Bi}_2\text{Sr}_2\text{CaCu}_2\text{O}_9$, $\text{Bi}_2\text{Sr}_2\text{Ca}_{0.8}\text{Y}_{0.2}\text{Cu}_2\text{O}_8$, $\text{Bi}_2\text{Sr}_2\text{CaCu}_2\text{O}_8$, $\text{AuBa}_2\text{Ca}_3\text{Cu}_4\text{O}_{11}$, $\text{AuBa}_2(\text{Y}, \text{Ca})\text{Cu}_2\text{O}_7$, $\text{AuBa}_2\text{Ca}_2\text{Cu}_3\text{O}_9$, $\text{NdBa}_2\text{Cu}_3\text{O}_7$, $\text{GdBa}_2\text{Cu}_3\text{O}_7$, $\text{YBa}_2\text{Cu}_3\text{O}_7$, $\text{Y}_2\text{Ba}_4\text{Cu}_7\text{O}_{15}$, $\text{TmBa}_2\text{Cu}_3\text{O}_7$, $\text{YbBa}_2\text{Cu}_3\text{O}_7$, $\text{Sn}_2\text{Ba}_2(\text{Y}_{0.5}\text{Sr}_{0.5})\text{Cu}_3\text{O}_8$, $\text{La}_2\text{Ba}_2\text{CaCu}_5\text{O}_{9+}$, $(\text{Sr}, \text{Ca})_5\text{Cu}_4\text{O}_{10}$, $\text{Pb}_2\text{Sr}_2(\text{Y}, \text{Ca})\text{Cu}_3\text{O}_8$, $\text{GaSr}_2(\text{Y}, \text{Ca})\text{Cu}_2\text{O}_7$, $(\text{In}_{0.3}\text{Pb}_{0.7})\text{Sr}_2(\text{Ca}_{0.8}\text{Y}_{0.2})\text{Cu}_2\text{O}_x$, $(\text{La}, \text{Sr}, \text{Ca})_3\text{Cu}_2\text{O}_6$, $\text{La}_2\text{CaCu}_2\text{O}_{6+}$, $(\text{Eu}, \text{Ce})_2(\text{Ba}, \text{Eu})_2\text{Cu}_3\text{O}_{10+}$, $(\text{La}_{1.85}\text{Sr}_{0.15})\text{CuO}_4$, SrNdCuO , $(\text{La}, \text{Ba})_2\text{CuO}_4$, $(\text{Nd}, \text{Sr}, \text{Ce})_2\text{CuO}_4$, $\text{Pb}_2(\text{Sr}, \text{La})_2\text{Cu}_2\text{O}_6$, $(\text{La}_{1.85}\text{Ba}_{0.15})\text{CuO}_4$, or the like, or mixtures or combinations thereof.

[0044] Suitable metallic material for use in this invention include, without limitations, copper, silver, gold, platinum, other noble metals, alloys thereof, or mixture or combinations thereof.

Fully Superconducting Coils

[0045] Referring now to **Figures 1A-C**, a preferred embodiment of a substantially rectangular, superconducting MRI coil or loop apparatus of this invention, generally **100**, is shown to include four superconducting films **102** deposited on four dielectric strips **104**. The strips **104** are

arranged into the substantially rectangular coil 100 so that the superconducting films 102 face each other at overlapping end portions 106. At the end portions 106, dielectric films 108 are interposed between facing superconducting film portions 110. The overlapping end portions 106 form built in capacitors electronically interconnecting superconducting inductive portions 112 of the films 102.

[0046] Alternatively, looking at **Figures 1D-F**, another preferred embodiment of a superconducting coil device of this invention, generally 100, is shown to include four superconducting films 102 deposited on four dielectric strips 104. The strips 104 are arranged into the substantially rectangular coil 100 so that the superconducting films 102 face up forming built in capacitors at overlapping end portions 106, which electronically interconnect superconducting inductive portions 112 of the films 102.

[0047] Referring now to **Figures 1G-H**, a manufacturing process for forming the loops or coils of **Figure 1A-F** is shown. A superconducting film ring 102 is deposited onto a circular substrate 104. Then films of dielectric 114 are deposited on top of portions 116 of the film 102. Then small superconducting films 118 are deposited on top of the portions 120 of the dielectric films 114. The coils can be fabricated using, for example, a multi-target pulsed laser deposition technique and standard photolithography or ion milling.

[0048] One primary coil design parameter is the filling factor, which indicates how much of the coil's shape is adjusted to accommodate a shape of a body for which the coil is intended. HTS technology, in principle, requires flat epitaxially polished dielectric substrates and as a result such HTS MRI coils have different coil-body distances in the coil's center than at their edges. To overcome this deficiency, the apparatuses of the present invention are fabricated by depositing sections of HTS films on very thin flexible dielectric substrates. Such deposition is possible using an ion beam assisted deposition technique or a variant of ion beam assisted deposition.

[0049] Referring now to **Figures 1I-J**, two constructions for attaching the coils of this invention to the outside world are shown. Looking at **Figure 1I**, one construction 150 includes a substrate 152 having deposited thereon a first film 154 of superconducting material. Deposited on the top of the film 154 is a dielectric film 156. And deposited on the dielectric film 156 is a second film 158 of superconducting material. The construction 150 also includes a metal pad 160 having bonded thereto a wire 162 for communication with the an MRI instrument. Looking at **Figure 1J**, another construction 164 includes a bottom film 166 of a superconducting material, a top film 168 of a superconducting material and a dielectric film 170 interposed therebetween. The construction 164 also includes a wire 172 bonded to the metal pad metal pad 174 deposited on

the a top film 168.

[0050] Referring now to **Figure 1K**, an electrical schematic 180 is shown that is the electrical equivalent of the coils constructions of **Figures 1A-H**. The schematic 180 includes four inductors 182 interconnected by four capacitors 184. Depending on the inductance of the inductors and the capacitance of the capacitors, the coils forms a resonance circuit, which is capable of transmitting and receiving RF signals corresponding to resonances of magnetically active nuclei.

Fully Superconducting Curvilinear Coils

[0051] Referring now to **Figures 2A**, a preferred embodiment of a saddle or curvilinear loop or coil of this invention, generally 200, is shown to include two straight members 202, where each straight member 202 comprises a superconductor film 204 deposited on a rigid dielectric substrate 206. The saddle coil 200 also includes two curved member 208, where each curved member 208 comprises a plurality of superconducting film sections 210 deposited on a flexible dielectric substrate 212. The saddle coil 200 also includes four capacitors 214 formed from overlapping regions 216 of the two straight members 202 and the two curved members 208. At the overlapping regions 216, dielectric films 218 are formed to separate an end portion 220 of the superconducting films 204 from end superconducting film sections 222 of the curved members 208. If the straight members 202 are flipped over, then the dielectric films 218 are not needed as was shown in **Figures 1D-F**. Of course, depending on the deposition technique used to form the superconducting films, the film could be formed without being formed of separated sections, where each section is flat and not curves.

Birdcage-Type Resonator Using Curvilinear Coils

[0052] Looking at **Figure 2B**, a preferred embodiment of an animal MRI or birdcage apparatus 224 is shown to include two saddle coils 200 arranged in a closed configuration forming an animal cavity 226. In such a closed configuration, the saddles 200 work either as a single coil or an array of two coils. Preferably, the superconductors are high temperature superconductors such as a YBCO superconductors. However, any other high temperature superconductor can be used as well. It should be recognized that the resonance frequency of the coils 200 are controlled by well known factors such as the dielectric used, the thickness of the superconducting and dielectric layers, the diameter of curvature to name a few and one of ordinary skill in the art can adjust these parameters to form coils having a desired shape and desired resonance frequency.

Fully Superconducting Birdcage-Type Resonators

[0053] Referring now to **Figures 3A&B**, another preferred embodiment of an all

-12-

superconducting birdcage apparatus, generally 300, is shown to include eight straight members or legs 302, where each straight member 302 comprises an outer rigid dielectric substrate film 304, an inner dielectric film 306 and a superconductor film 308 interposed therebetween. The birdcage 300 also includes four circular members 310, where each curved member 310 comprises a superconducting film 312 deposited on a flexible dielectric substrate 314. As in the birdcage of **Figures 2A&B**, the superconducting film 312 is preferably fabricated as a plurality of substantially flat section; however, as fabrication techniques progress, the superconducting film 312 may eventually be of a fabricated curvilinear form. The legs 302 and the circular members 310 are configured to form a generally cylindrical animal cavity 316. The legs 302 and circular or arcuate members 310 overlap at first and second overlap regions 318 and 320, each overlap region 318 or 320 forms a capacitor interconnecting inductors formed by the superconducting films. This design forms a low-pass birdcage resonator. The flexible dielectric substrates are generally between about 30 and about 50 μm thick and formed of yttrium, strontium, zirconium dielectric or a sapphire dielectric film. The inner dielectric film is generally teflon, other polymers, silica titanate or similar dielectric materials.

[0054] Referring now to **Figures 3C&D**, another preferred embodiment of an all superconducting birdcage apparatus, generally 300, is shown to include four straight members or legs 302, where each straight member 302 comprises an outer rigid dielectric substrate film 304, an inner dielectric film 306 and a superconductor film 308 interposed therebetween. The birdcage 300 also includes four circular or arcuate members 310, where each curved member 310 comprises a superconducting film 312 deposited on a flexible dielectric substrate 314. As in the birdcage of **Figures 2A&B**, the superconducting film 312 is preferably fabricated as a plurality of substantially flat section; however, as fabrication techniques progress, the superconducting film 312 may eventually be of a fabricated curvilinear form. The legs 302 and the circular members 310 are configured to form a generally cylindrical animal cavity 316. The legs 302 and circular or arcuate members 310 overlap at overlap regions 318, each overlap region 318 forms a capacitor interconnecting inductors formed by the superconducting films in the legs. The apparatus 300 also includes four arcuate sections 320 interlaced with the legs 304, where the sections 320 form capacitors interconnecting inductor form by the arcuate members 310. The four legged apparatus forms a band-pass birdcage resonator, where the capacitors are placed not only on the legs, but also on the ring. The four flat strips comprise a YBCO/substrate composite and the four flexible strips comprises a YBCO/buffer-layer/flexible ZrO_2 composite to form a four legs band-pass birdcage resonator.

Hybrid Coils

[0055] In order to accommodate requirements for usually complicated shapes of optimized MRI coils as well as to allow relatively easy cooling of HTS coils, we have also designed hybrid (HTS/cooper) MRI coils or arrays. Referring now to **Figures 4A&B**, a preferred mixed superconducting-metal coil of this invention, generally **400**, is shown to include two copper blocks **402** and two legs **404**, where each leg **404** includes a dielectric substrate layer **406** and a superconducting layer **408** deposited thereon. The blocks **402** are positioned at end portions **410** of the legs **404** with the superconducting layer **408** of the legs **404** facing the copper blocks **402**. The coil **400** also includes dielectric strips **412** interposed between the copper blocks **402** and end portions **414** the superconducting layer **408** of the legs **404**. The coil **400** also includes metal pads **416** formed on end portions **418** of the dielectric layers **406** of the legs **402**. The copper blocks **402**, dielectric strips **412** and the end portions **414** of the superconducting layers **408** combine to form built-in internal capacitors interconnecting the copper blocks **404** and the superconducting layers **408**. The end portions **414** of the superconducting layers **408**, the end portions **418** of the dielectric layers **406**, and the metal pads **416** form built-in external capacitors.

[0056] Referring now to **Figures 4C&D**, another preferred mixed superconducting-metal coil of this invention, generally **400**, is shown to include two copper blocks **402** and two legs **404**, where each leg **404** includes a dielectric substrate layer **406** and a superconducting layer **408** deposited thereon. The blocks **402** are positioned at end portions **410** of the legs **404** with the dielectric substrate layer **406** of the legs **404** facing the copper blocks **402**. The coil **400** also includes dielectric strips **412** formed on end portions **414** the superconducting layer **408** of the legs **404** and metal tabs **416** formed on the dielectric strips **412**. The copper blocks **402**, end portions **418** of the dielectric layer **406**, and the end portions **414** of the superconducting layers **408** combine to form built-in internal capacitors interconnecting the copper blocks **404** and the superconducting layers **408**. The end portions **414** of the superconducting layers **408**, the dielectric strips **412**, and the metal tabs **416** form built-in external capacitors.

[0057] The main concept of these mixed or composite coils are the same as in the fully superconducting coils of **Figures 1A-F**; however, two sections of the HTS films are replaced with copper blocks allowing the coils to be directly cooled by a cooling system, *i.e.*, the copper or other metallic blocks can be placed in direct contract with a cooled surface. As with the fully superconducting coils, the mixed or composited coils of **Figures 4A-D** include built in capacitors using two conducting layers separated by a dielectric layer.

[0058] Referring now to **Figure 4E**, an equivalent circuit, generally **450**, is shown that

corresponds to the coils of **Figures 4A-D**. The circuit **450** includes inductors **452** interconnected by internal capacitors **454** and capacitively isolated from external electronic components by external capacitors **456**. The circuit **450** also includes a virtual ground plane **458**.

[0059] The hybrid MRI resonators of this invention include two sections of YBCO/substrate and two pieces of copper which are interconnected via the built-in internal capacitors **454**. Two of the metal pads **416** are adapted to couple the resonator to a scanner amplifier, while the other two metal pads **416** are adapted to decouple adjacent resonators if the individual coils are used in an array configuration. Two ways of creating capacitors are shown. As shown in **Figures 4A&B**, the built-in internal capacitors **454** comprise the copper block **402**/the dielectric strip **412**/the superconducting layer **408** such as a YBCO layer. As shown in **Figures 4C&D**, the built-in internal capacitors **454** comprise the copper block **402**/the dielectric substrate layer **406**/the superconducting layer **408** such as a YBCO layer. The built-in internal capacitors **454** in conjunction with the conductive elements which form the inductors **452** for the coil resonator, while the built-in external capacitors **456** interconnect metal and superconducting films into single loop (resonator). The external capacitors **456** are designed to either connect the resonator to an amplifier or for decoupling array elements.

Birdcage-Type Resonators Using Hybrid Coils

[0060] Referring now to **Figures 5A&B**, a preferred embodiment of a mixed superconducting-metal birdcage array resonator, generally **500**, is shown to include twelve hybrid coils **502** as shown in **Figures 4A&B** arranging in a circular configuration forming a cavity **504**. In the coils **502**, the copper blocks **402** include a portion **506** that extends out past the coils layers **406**, **408**, **412**, and **416**. The portions **506** are designed to directly contact a cold inner surface **508** of a metal ring **510** that would be in contact with a coolant on its outer surface **512**. The resonator **500** forms a cylinder having a cavity into which a small animal can be placed and the assembly then placed in an MRI device. The resonator **500** is cooled by bring the outer surface of the metal ring **510** in contact with a coolant, such as liquid nitrogen. The resonator **500** is an example of phased array made out of hybrid (metal/superconductor) resonators of **Figures 4A-D**. The individual coils **502** can be mutually de-coupled, as it is required for phased array use via the built-in capacitors and wires leading from the metal pads from one coil to the next or from a coil to a pre-amplifier or amplifier associated with the MRI device. Although an outer metal ring, preferably a copper ring, is shown in Figure 5B, the ring can be constructed out of any good heat conductor, metal or non-metal. Preferred non-metal rings can be made out of polycrystalline sapphire or other non-metal thermal conducting materials.

-15-

[0061] Referring now to **Figures 5C&D**, another preferred embodiment of a mixed superconducting-metal birdcage array resonator, generally **550**, is shown to include two thermal conducting members **552** (only one shown), each member **552** including a circular aperture **554** therethrough having twelve equally spaced, circularly configured protrusions **556** extending into the aperture **554**. On each lateral side **558** of each protrusion **556** are placed legs **560** extending between the two members **552** to form an elongate resonator where the aperture **554** comprises the small animal cavity. Looking from the protrusions **556** out, each leg **560** includes an inner, rigid dielectric substrate layer **562** in contact with a side **558** of a protrusion **556** and a superconducting layer **564**. These two layer **562** and **564** extend between the two member **552**. Each leg **560** also includes a dielectric strip **566** formed on or in contact with an end portion **568** of the superconducting layer **564**. Each dielectric strip **566** in turn has deposited thereon or is in contact with a metal pad **570**. The metal pads **570** can have a wire **572** bonded thereto by a solder bump **574** so that the individual coils can be formed into an array and/or connected to pre-amplifiers or amplifiers associated with the MRI device. The resonator **550** can also include clamps **576** designed to hold the two legs **560** per protrusion against the protrusions **556**. The member **552** are designed to directly contact a coolant on their outer surfaces **578**. The resonator **550** forms a cylinder having a cavity into which a small animal can be placed and the assembly then placed in an MRI device. The resonator **550** is cooled by bring the outer surfaces **578** of the members **552** in contact with a coolant, such as liquid nitrogen. The resonator **550** is an example of phased array made out of hybrid (metal/superconductor) coils. The individual coils **502** can be mutually de-coupled, as it is required for phased array use via the built-in capacitors and wires leading from the metal pads from one coil to the next or from a coil to a pre-amplifier or amplifier associated with the MRI device. The members **552** are preferably made out of copper, but other metal will work, especially metals having a high thermal and electric conductivities.

[0062] Referring now to **Figures 5E**, a schematic corresponding to the hybrid arrays of **Figures 5A-D** is shown to include the coil capacitors **C** and coil inductors **L** along with coupling, decoupling, tuning and matching elements **CC**, **DC** and **CM**. The outputs **O/P** are forwarded to preamps that can be either within the cooled area or external thereto. The coupling, decoupling, tuning and matching elements can be similarly applied to any array of MRI coils of this inventor or to any single MRI coil of this invention.

[0063] Referring now to **Figures 6A&B**, another preferred embodiment of a mixed superconducting-metal birdcage resonator of this invention, generally **600**, is shown to include a metallic tube **602** having formed on an outer surface **604** of the tube **602** two curvilinear

-16-

superconducting layers **606** and two straight superconducting layers **608**. The curvilinear layers **606** are disposed radially across end portions **610** of the tube **602**, while the straight layers **608** run axially from end portions **612** of the curvilinear layers **608**. At their overlapping regions **614** and **616**, a layer **618** of mica or other dielectric material is interposed therebetween. These overlapping regions form built-in capacitors interconnecting inductive elements formed by the non-overlapping **620** of the superconducting layers **606** and **608**.

[0064] Referring now to **Figures 7A&B**, another preferred embodiment of a mixed superconducting-metal birdcage array resonator, generally **700**, is shown to include two metallic rings **702** and two straight superconducting legs **704** connecting the rings **702** at opposite sides of each ring **702** at flattened sections **706** with a dielectric layer **707** interposed between the flattened section **706** of the rings **702** and overlapping portions **708** of the legs **704**.

[0065] In **Figures 6A&B and 7A&B**, the dielectric layer or mica layer is generally about 20 μ m thick. The ring or tube is generally about 10 mm thick and about 2" long and about 2.5" in diameter. The resonators resonate at a frequency of about 200 MHz. Of course, the resonate frequency can be changed by changing the capacitance of the built-in capacitors and the inductance of the inductive regions of the superconducting layer and metallic layers.

[0066] Referring now to **Figures 8A&B**, a preferred small animal MRI resonator apparatus, generally **800**, is shown to include a plastic or non-magnetic cryostat housing **802** having a cylindrical aperture **804** therethrough defining a small animal cavity. Surrounding the aperture **804**, is a cylindrical MRI resonator **806** of this invention in thermal contact with a thermally conductive plate **808**. The plate **808** comprises the outer surface of a liquid nitrogen reservoir **810**. The housing **802** also includes a ring sealing member **812** having two electrical feed tube **814** extending therethrough. The housing **802** is capable of being placed under a vacuum. The cryostat **800** includes a vacuum shroud **802**, a liquid nitrogen container **810** with one side wall made out of a sapphire plate **808**. The container **810** includes a liquid nitrogen inlet **816** and a liquid nitrogen outlet **818**. The plate temperature will be uniformly at 77K and will not dependent on level of liquid nitrogen in the container **810**. The MRI resonator **806** comprises copper and/or YBCO materials and will be in thermal contact with the plate **808**. In this apparatus **800**, the aperture **804** can either extend the entire length of the housing or it can stop at the plate **808** so that the small animal is confined within the part of the apparatus **800** surrounded by the resonator **806**.

[0067] Referring now to **Figure 9**, another preferred small animal MRI resonator apparatus, generally **900**, is shown to include four hybrid arrays **902** of **Figures 5A-D**, each array **902**

-17-

defining having a small animal cavity 904. The four arrays 902 are housed in a vacuum shroud or housing 906 and are in thermal contact with a plate 908 which forms an outer surface of a liquid nitrogen reservoir (not shown). The housing 906 includes a top (not shown) that seals the housing 906 so that the interior can be evacuated, where the top includes electrical wiring feed throughs as described previously. The apparatus 900 can accommodate up to four animals and MRI data can be acquired on each simultaneously or separately.

[0068] Referring now to **Figure 10**, another preferred small animal MRI resonator apparatus, generally 1000, is shown to include a non-conductive housing 1002 having four small animal tubes 1004. The housing 1002 also includes eight flat MRI coil or MRI array apparatuses 1006, where each tube 1004 is adjacent three MRI apparatuses 1006. The eight MRI apparatuses 1006 are in thermal contact with a thermally conducting plate 1008 which forms an outer surface of a liquid nitrogen reservoir (not shown). The housing 1002 includes a top (not shown) that seals the housing 1002 so that the interior can be evacuated, where the top includes electrical wiring feed throughs as described previously. The apparatus 1000 can accommodate up to four animals and MRI data can be acquired on each simultaneously or separately. The rigid flat MRI apparatuses 1006 comprise preferably HTS coils and by sharing coils, a reduced number of HTS coils are needed for such systems. Each tube in which a mouse is placed is surrounded by array of superconducting coils.

[0069] Referring now to **Figures 11A-D**, illustrate the physical characteristic so MRI coils and arrays made therefrom. Looking at **Figures 11A&B**, the magnetic fields generated by the coils of this invention are shown. Looking at **Figures 11C&D**, the SNR for these coils is shown.

[0070] The inventors have found that when tuning and matching circuitry is placed next to the superconducting array and cooled together with the array, the entire system has superior performance. In fact, cooling the two circuit elements together is preferred because it allow us to take advantage of the high Q of the arrays of this invention. The inventors have also found that by integrating a pre-amplifier into this circuitry so that the pre-amp is cooled as well results in further noise reduction. Looking at **Figures 12A&B**, the performance of a circuit having the tuning and matching circuitry within the small animal device and cooled simultaneously produces improved SNR. **Figure 12B** also shows the tuning and matching circuitry for a coil similar to the coils of this invention disclosed in PCT Application Serial No. PCT/US03/33933, filed 24 October 2003, published as WO04038431, incorporated herein by reference. The tuning and matching circuitry shown in **Figure 12B** can be use with the coils and arrays of this invention as well. Co-cooling the matching and tuning circuitry, applies, in general, not only to thin film

-18-

arrays, but also to saddle, birdcage and hybrid coils/arrays. In fact, we have installed such low temperature circuit in our cryostat, which designing idea is presented in the provisional.

[0071] All references cited herein are incorporated by reference. While this invention has been described fully and completely, it should be understood that, within the scope of the appended claims, the invention could be practiced otherwise than specifically described. Although the invention has been disclosed with reference to its preferred embodiments, from reading this description those of skill in the art can appreciate changes and modifications that may be made which do not depart from the scope and spirit of the invention as described above and claimed hereafter.

CLAIMS

We claim:

[0072] 1. An MRI coil apparatus comprising:

four members, each member including a superconducting layer, where the members arranged to form a closed shape having four overlapping regions, and

separating dielectric layers interposed between the superconducting layers at the overlapping regions to form built-in capacitors.

[0073] 2. The apparatus of claim 1, wherein each member comprises a substrate dielectric layer upon which the superconducting layer was formed.

[0074] 3. The apparatus of claim 2, wherein the substrate dielectric layers are rigid.

[0075] 4. The apparatus of claim 2, wherein two of the substrate dielectric layers are rigid and two of the substrate dielectric layers are flexible.

[0076] 5. The apparatus of any of the preceding claims, wherein the members are straight.

[0077] 6. The apparatus of claims 1, 2, 3, or 4, wherein two of the members are straight and two of the members are curvilinear.

[0078] 7. The apparatus of claims 1, 2, 3, or 4, wherein two of the members are straight and two of the members are arcuate.

[0079] 8. The apparatus of any of the preceding claims, wherein the substrate dielectric layers are the separating dielectric layers.

[0080] 9. The apparatus of any of the preceding claims, further comprising:

a metal layer formed on an exposed portion of a dielectric layer or a external dielectric layer formed form on an exposed portion of a superconducting layer with a metal layer formed on the outer surface of the external dielectric layer to form coupling or decoupling capacitive elements.

-20-

[0081] 10. The apparatus of claim 9, further comprising:

wires bonded to the metal layers, where the metal wires are adapted to link a plurality of the apparatus together to form arrays or to connect the apparatus to a pre-amplifier.

[0082] 11. A hybrid MRI coil apparatus comprising:

two superconducting members, each member including a superconducting layer,
two metal member, and
separating dielectric layers,

where the superconducting members and the metal member are arranged to form a closed shape having four overlapping regions and the separating dielectric layers are interposed between the superconducting layers and the metal members at the overlapping regions to form built-in capacitors.

[0083] 12. The apparatus of claim 11, wherein each superconducting member comprises a substrate dielectric layer upon which the superconducting layer was formed.

[0084] 13. The apparatus of claim 12, wherein the substrate dielectric layers are rigid.

[0085] 14. The apparatus of claim 12, wherein two of the substrate dielectric layers are rigid and two of the substrate dielectric layers are flexible.

[0086] 15. The apparatus of claims 11, 12, 13, or 14 wherein the superconducting members are straight.

[0087] 16. The apparatus of claims 11, 12, 13, or 14, wherein the superconducting members are curvilinear.

[0088] 17. The apparatus of claims 11, 12, 13, or 14, wherein superconducting members are arcuate.

[0089] 18. The apparatus of claims 11, 12, 13, 14, 15, 16 or 17, wherein the substrate dielectric layers are the separating dielectric layers.

-21-

[0090] 19. The apparatus of 11, 12, 13, 14, 15, 16 17 or 18, further comprising:

a metal layer formed on an exposed portion of a dielectric layer or a external dielectric layer formed form on an exposed portion of a superconducting layer with a metal layer formed on the outer surface of the external dielectric layer to form coupling or decoupling capacitive elements.

[0091] 20. The apparatus of claim 19, further comprising:

wires bonded to the metal layers, where the metal wires are adapted to link a plurality of the apparatus together to form arrays or to connect the apparatus to a pre-amplifier.

[0092] 21. A birdcage-type resonator apparatus comprising:

a plurality of coils apparatus including:

four members, each member including a superconducting layer, where the members arranged to form a closed shape having four overlapping regions, and separating dielectric layers interposed between the superconducting layers at the overlapping regions to form built-in capacitors, and

at least one small animal cavity,

where the coil apparatus are arranged around the cavity to permit MRI imaging of an animal placed within the cavity.

[0093] 22. The apparatus of claim 21, wherein each member comprises a substrate dielectric layer upon which the superconducting layer was formed.

[0094] 23. The apparatus of claim 22, wherein the substrate dielectric layers are rigid.

[0095] 24. The apparatus of claim 22, wherein two of the substrate dielectric layers are rigid and two of the substrate dielectric layers are flexible.

[0096] 25. The apparatus of 21, 22, 23 or 24, wherein the members are straight.

[0097] 26. The apparatus of claims 21, 22, 23, or 24, wherein two of the members are straight and two of the members are curvilinear.

-22-

[0098] 27. The apparatus of claims 21, 22, 23, or 24, wherein two of the members are straight and two of the members are arcuate.

[0099] 28. The apparatus of claims 21, 22, 23, 24, 25, 26 or 27, wherein the substrate dielectric layers are the separating dielectric layers.

[0100] 29. The apparatus of claims 21, 22, 23, 24, 25, 26, 27 or 28, further comprising:
a metal layer formed on an exposed portion of a dielectric layer or a external dielectric layer formed form on an exposed portion of a superconducting layer with a metal layer formed on the outer surface of the external dielectric layer to form coupling or decoupling capacitive elements.

[0101] 30. The apparatus of claim 29, further comprising:
wires bonded to the metal layers, where the metal wires are adapted to link a plurality of the apparatus together to form arrays or to connect the apparatus to a pre-amplifier.

[0102] 31. A birdcage-type resonator apparatus comprising:
a plurality of coils apparatus including:
two superconducting members, each member including a superconducting layer,
two metal member, and
separating dielectric layers, and
at least one small animal cavity,

where the coil apparatus are arranged around the cavity to permit MRI imaging of an animal placed within the cavity and where the superconducting members and the metal member are arranged to form a closed shape having four overlapping regions and the separating dielectric layers are interposed between the superconducting layers and the metal members at the overlapping regions to form built-in capacitors.

[0103] 32. The apparatus of claim 31, wherein each superconducting member comprises a substrate dielectric layer upon which the superconducting layer was formed.

[0104] 33. The apparatus of claim 32, wherein the substrate dielectric layers are rigid.

-23-

[0105] 34. The apparatus of claim 32, wherein two of the substrate dielectric layers are rigid and two of the substrate dielectric layers are flexible.

[0106] 35. The apparatus of claims 31, 32, 33, or 34 wherein the superconducting members are straight.

[0107] 36. The apparatus of claims 31, 32, 33, or 34, wherein the superconducting members are curvilinear.


[0108] 37. The apparatus of claims 31, 32, 33, or 34, wherein superconducting members are arcuate.


[0109] 38. The apparatus of claims 31, 32, 33, 34, 35, 36 or 37, wherein the substrate dielectric layers are the separating dielectric layers.

[0110] 39. The apparatus of 31, 32, 33, 34, 35, 36 37 or 38, further comprising:
a metal layer formed on an exposed portion of a dielectric layer or a external dielectric layer formed form on an exposed portion of a superconducting layer with a metal layer formed on the outer surface of the external dielectric layer to form coupling or decoupling capacitive elements.

[0111] 40. The apparatus of claim 39, further comprising:
wires bonded to the metal layers, where the metal wires are adapted to link a plurality of the apparatus together to form arrays or to connect the apparatus to a pre-amplifier.

[0112] 41. A small animal MRI apparatus comprising:
a vacuum housing including at least one cylindrical cavity adapted to receive a small animal,
a coolant reservoir including a coolant, a coolant inlet, a coolant outlet and a cold plate forming an internal end of the reservoir,
a resonator of claims 21-40 surrounding each cavity or a plurality of coils of claims 1-20 positioned within the housing to permit MRI imaging of an animal in each of the cavities.

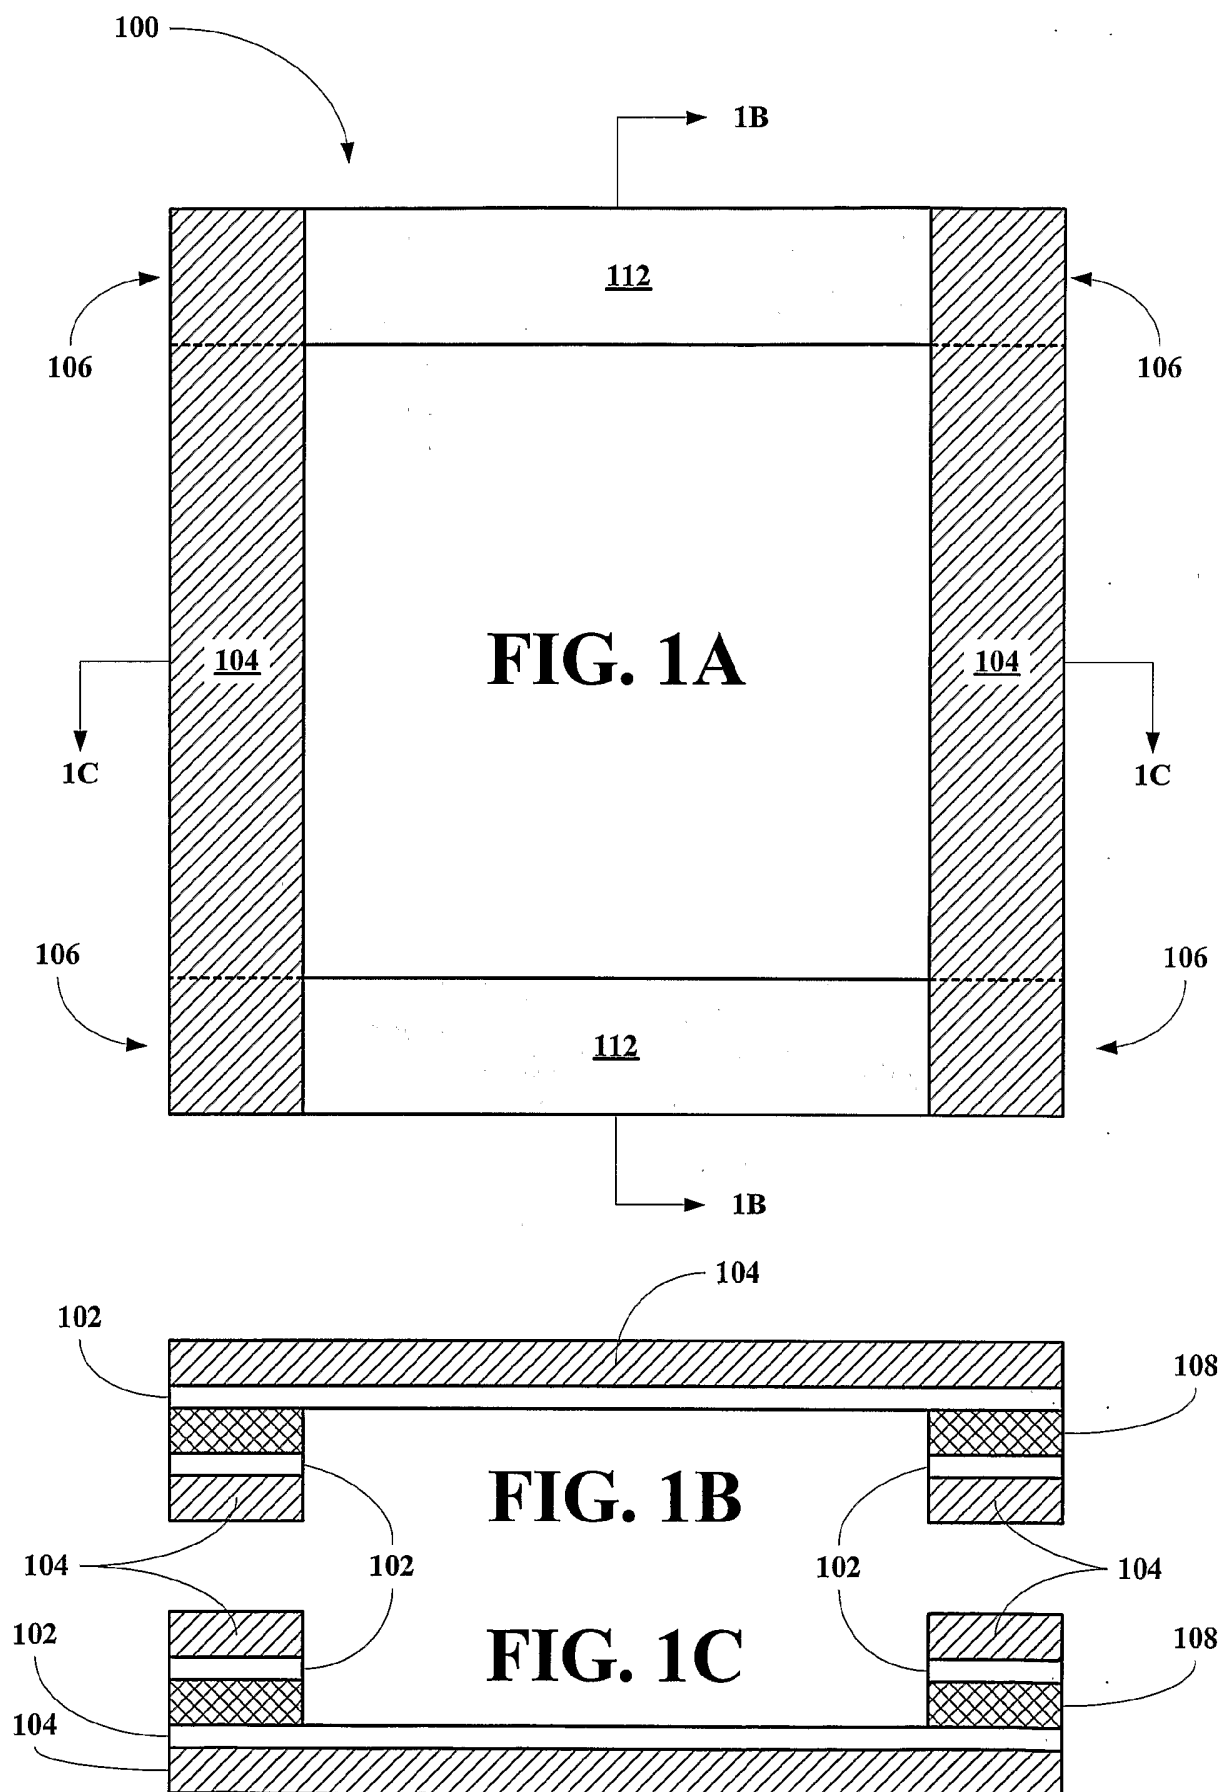

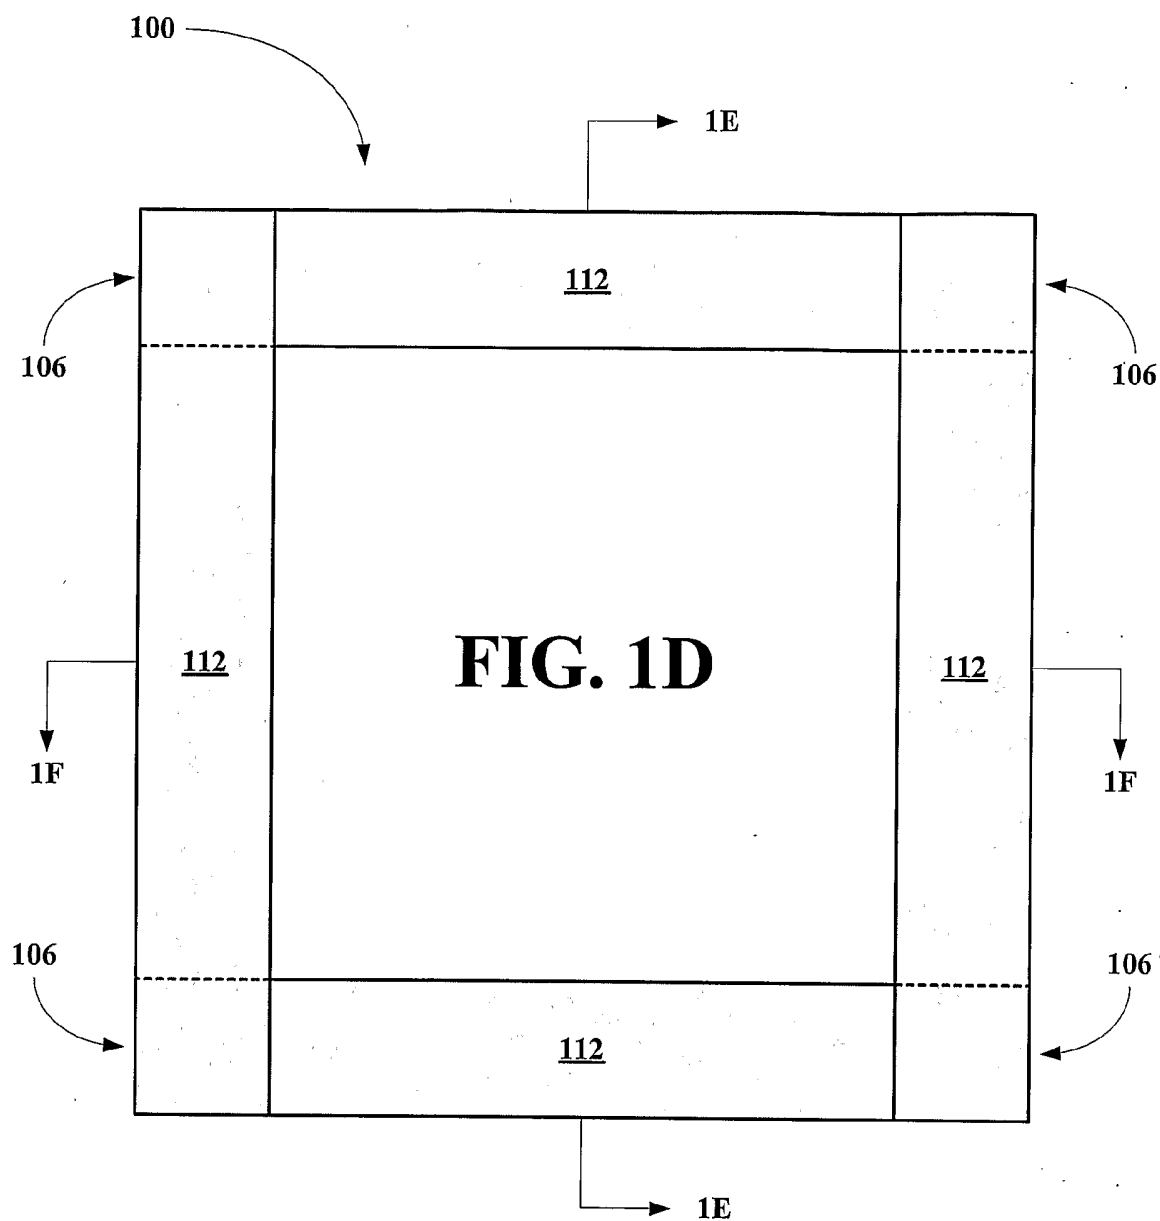

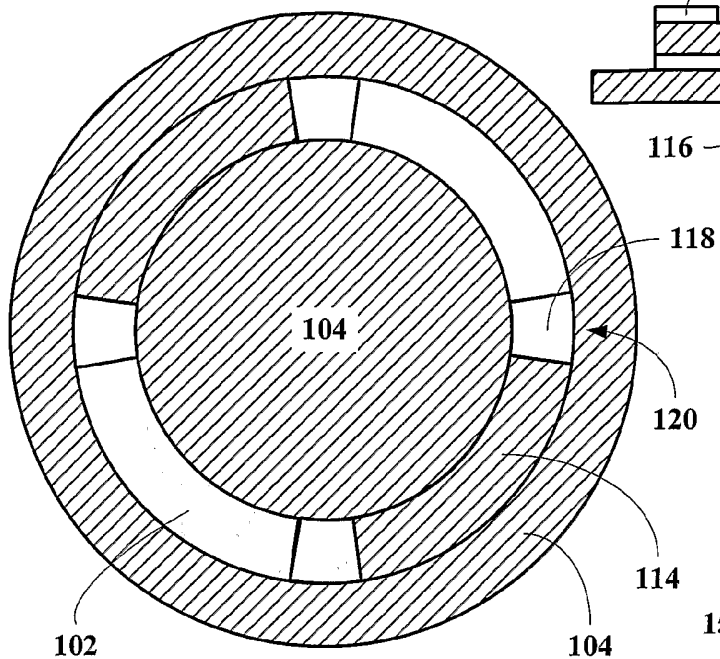


FIG. 1G

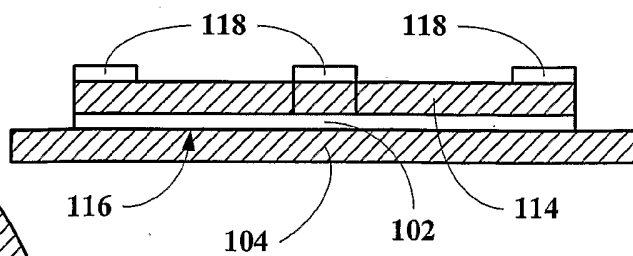


FIG. 1H

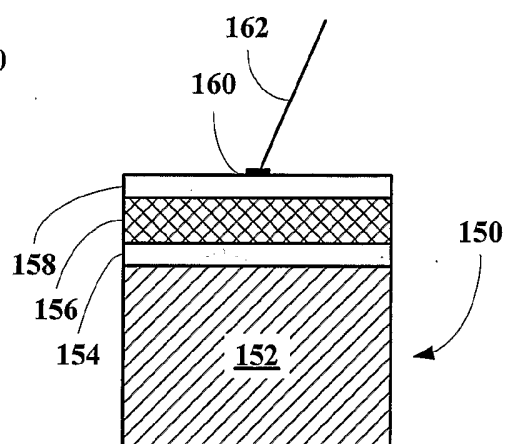


FIG. 1I

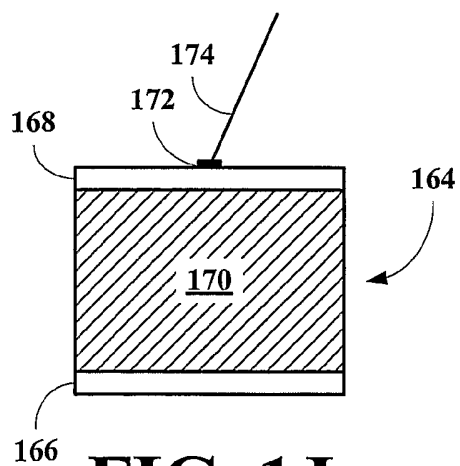


FIG. 1J

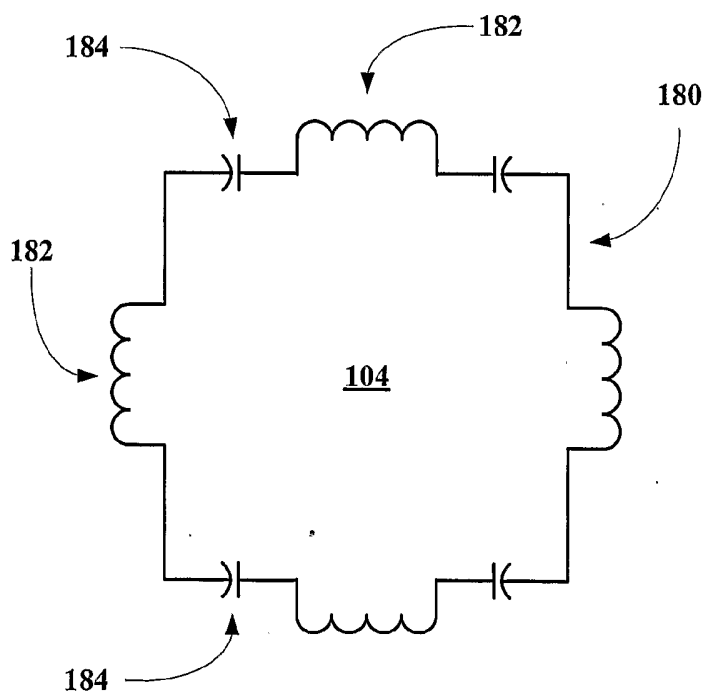


FIG. 1K

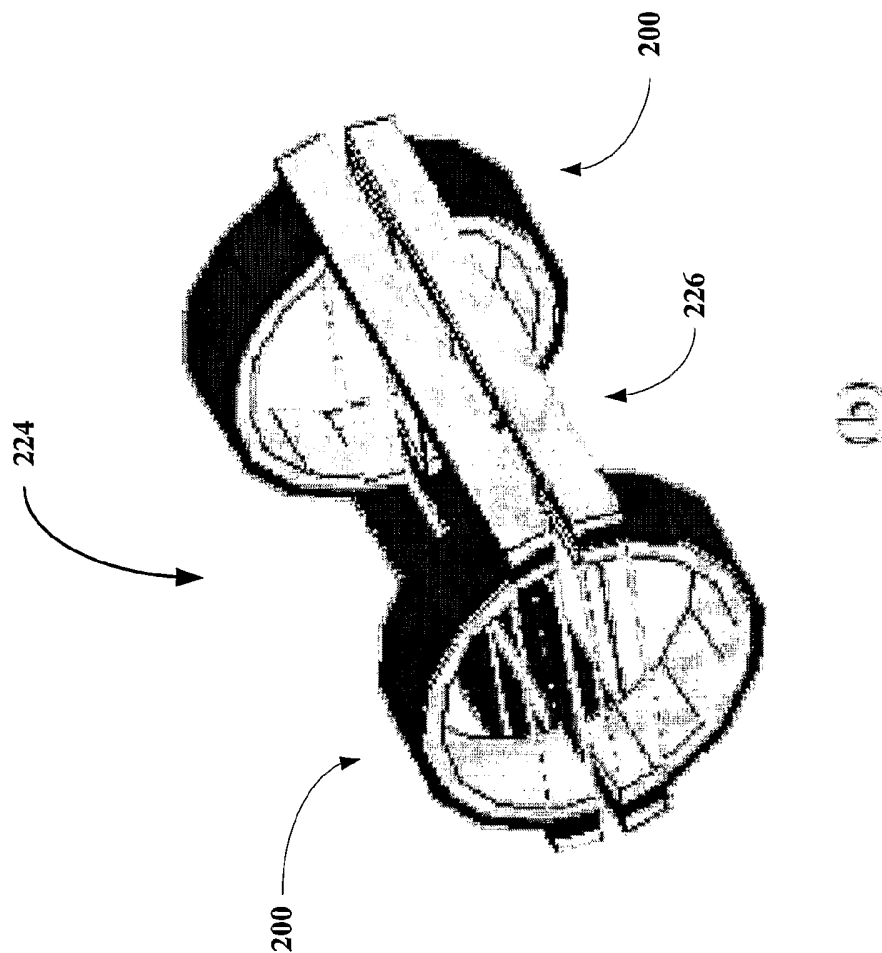


FIG. 2B

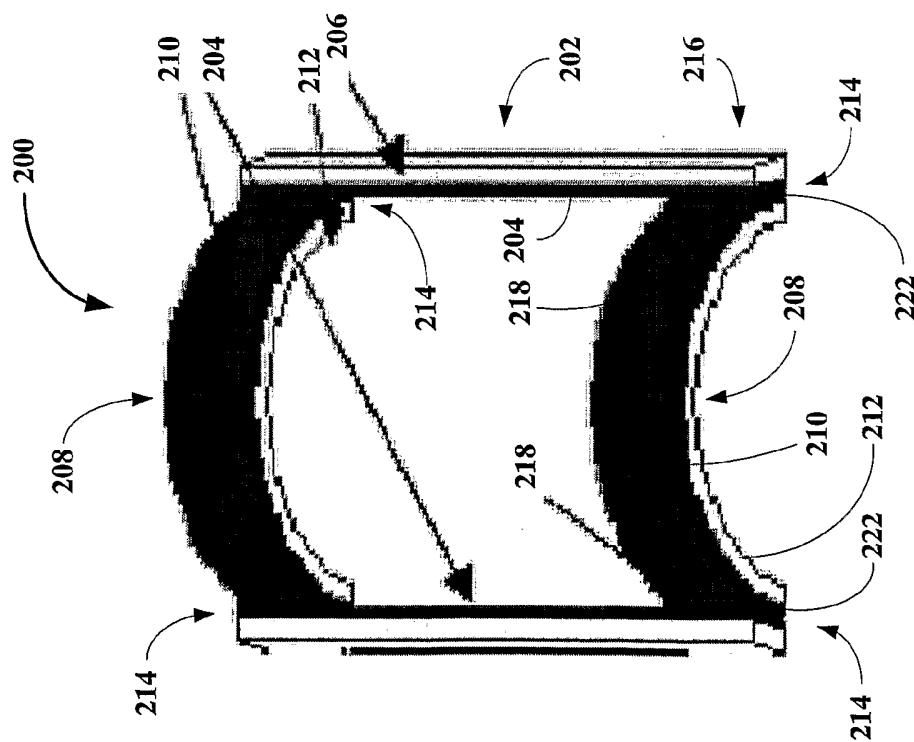


FIG. 2A

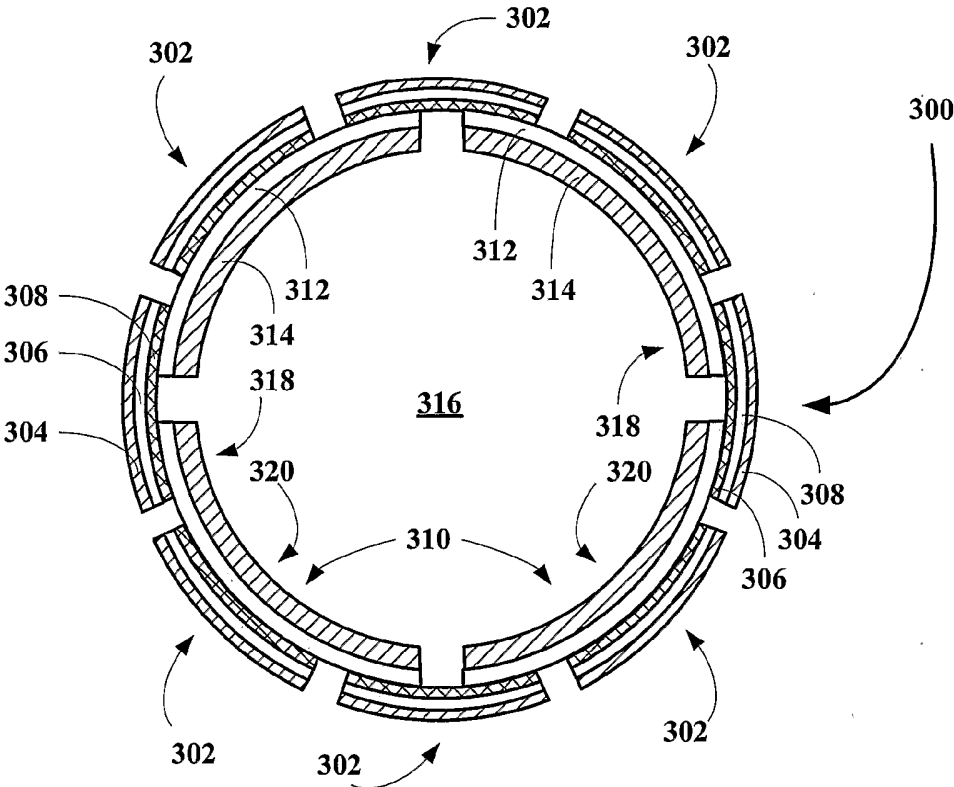


FIG. 3A

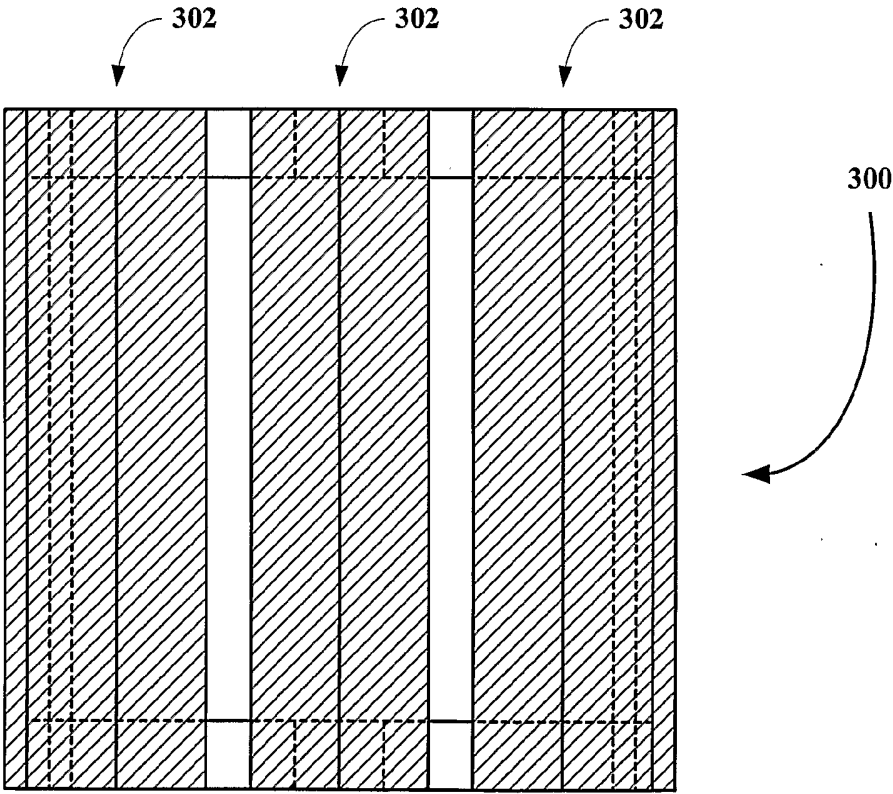


FIG. 3B

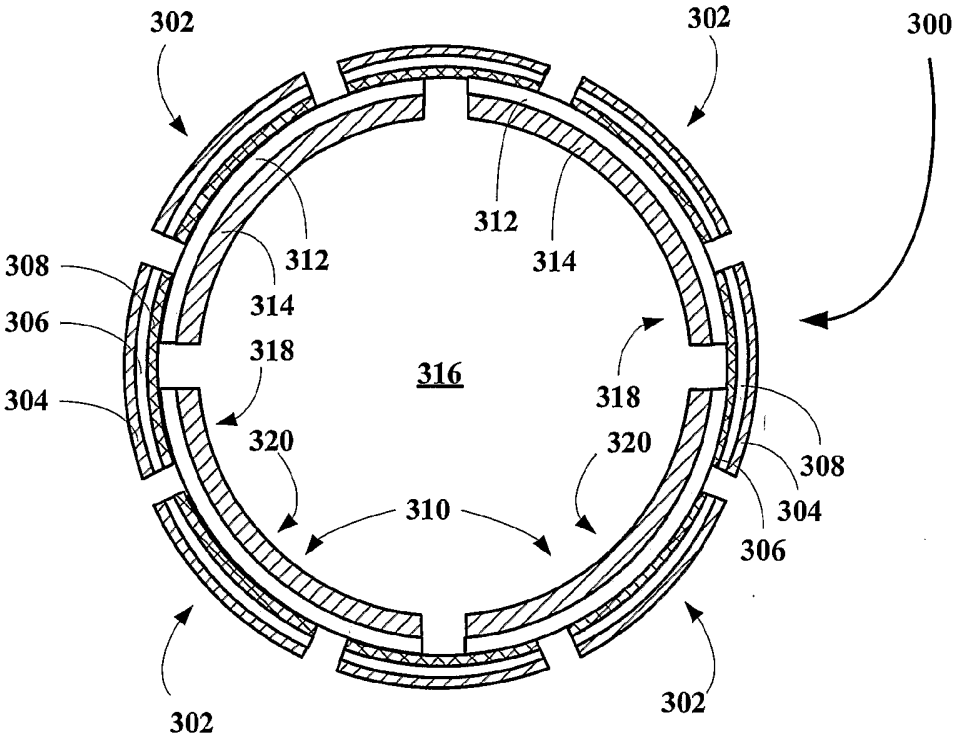


FIG. 3C

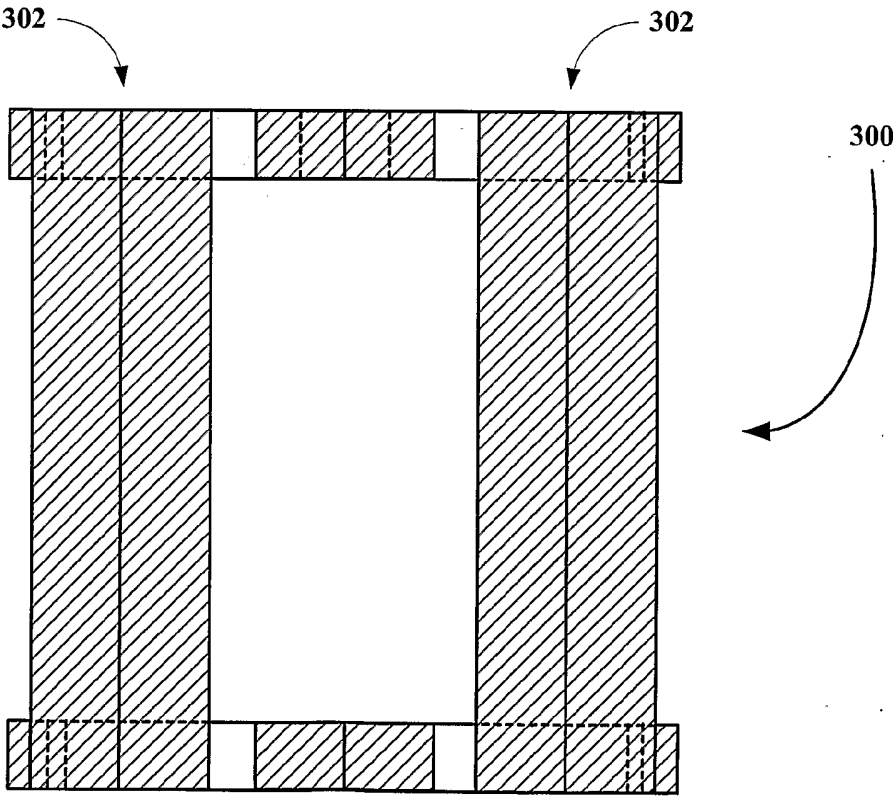


FIG. 3D

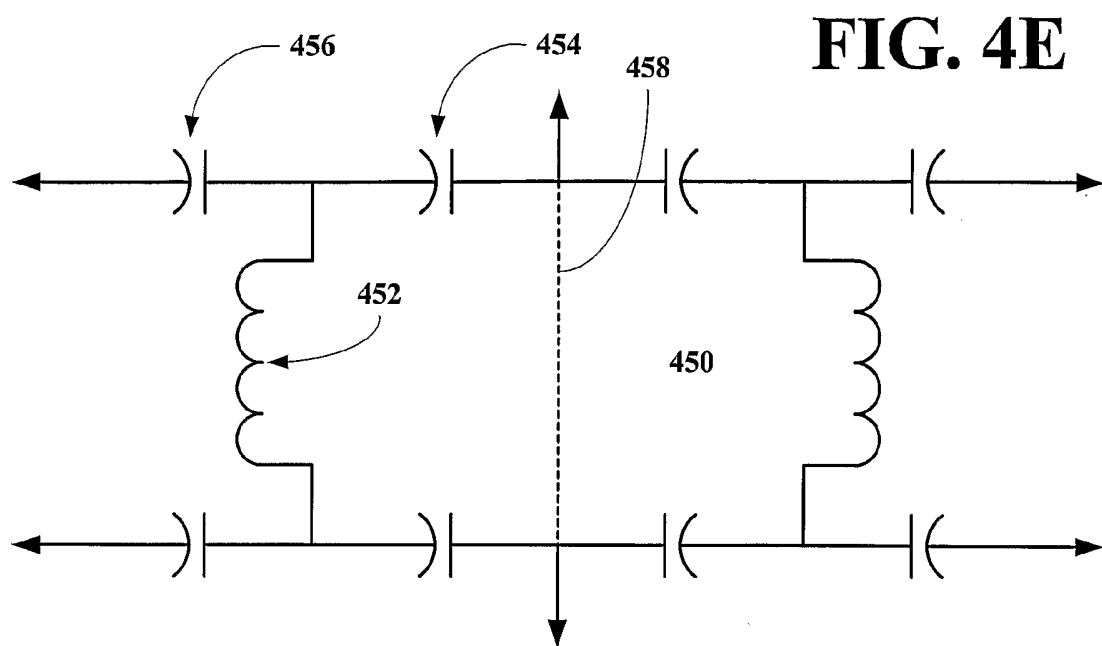


FIG. 4E

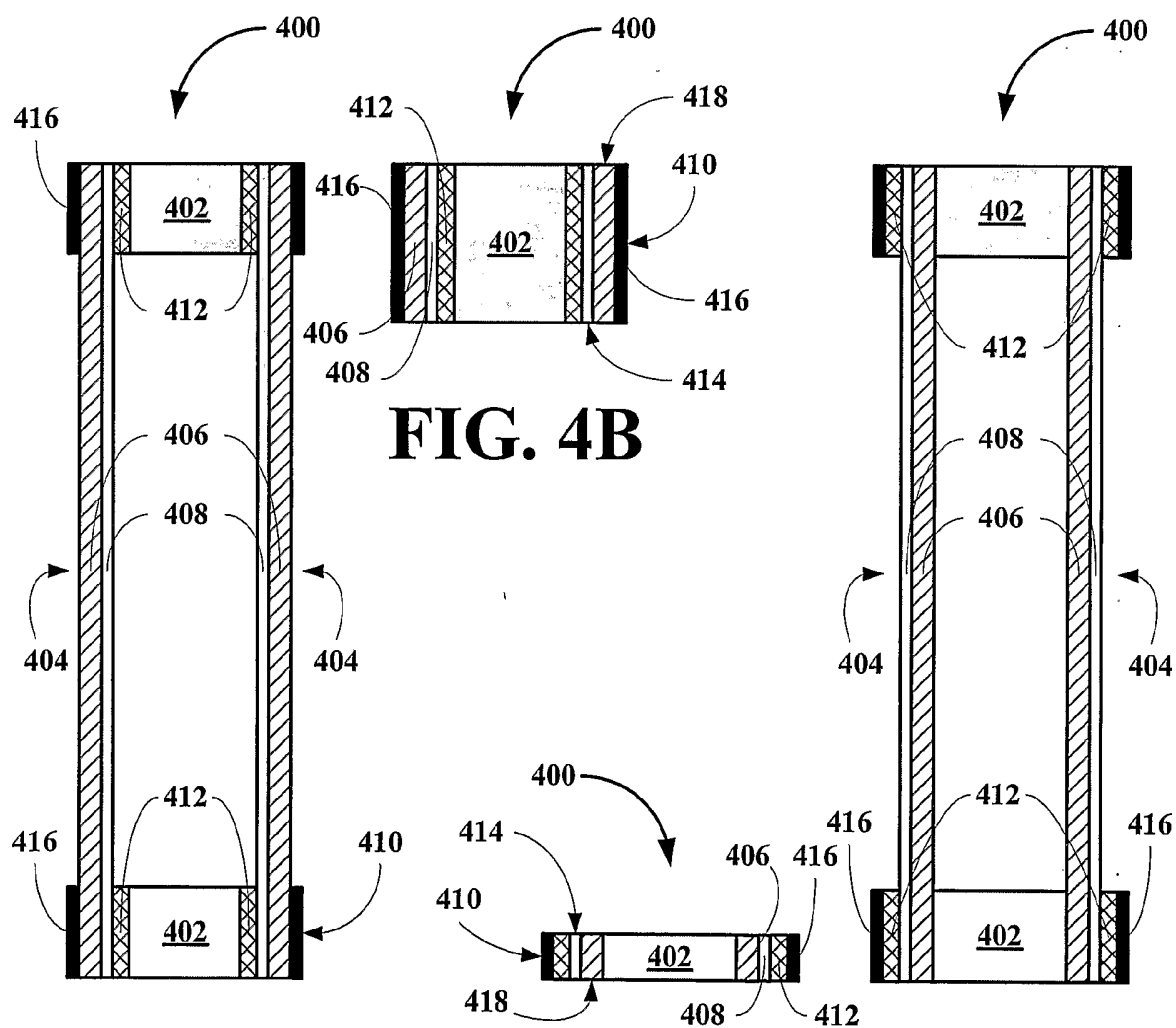


FIG. 4B

FIG. 4A

FIG. 4D

FIG. 4C

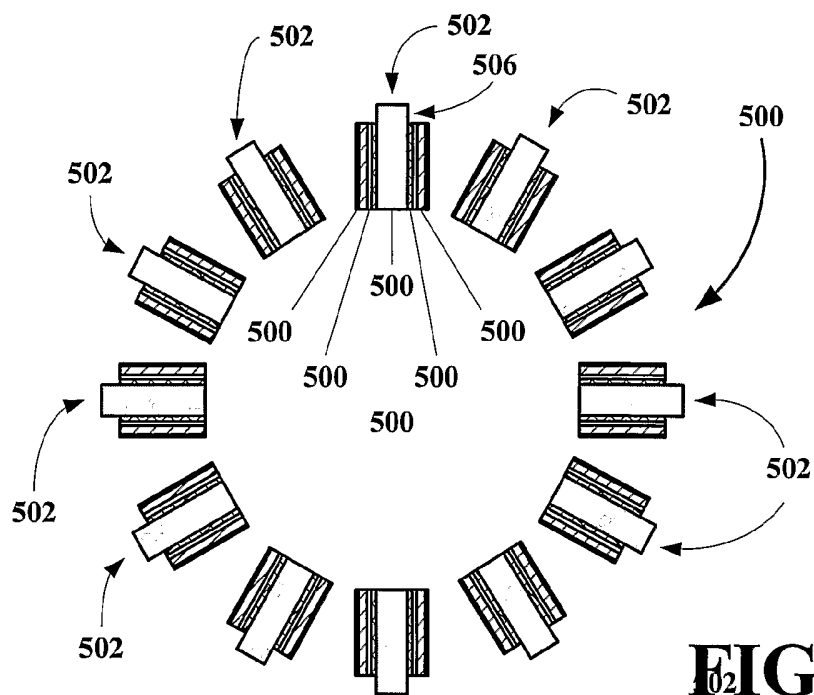


FIG. 5A

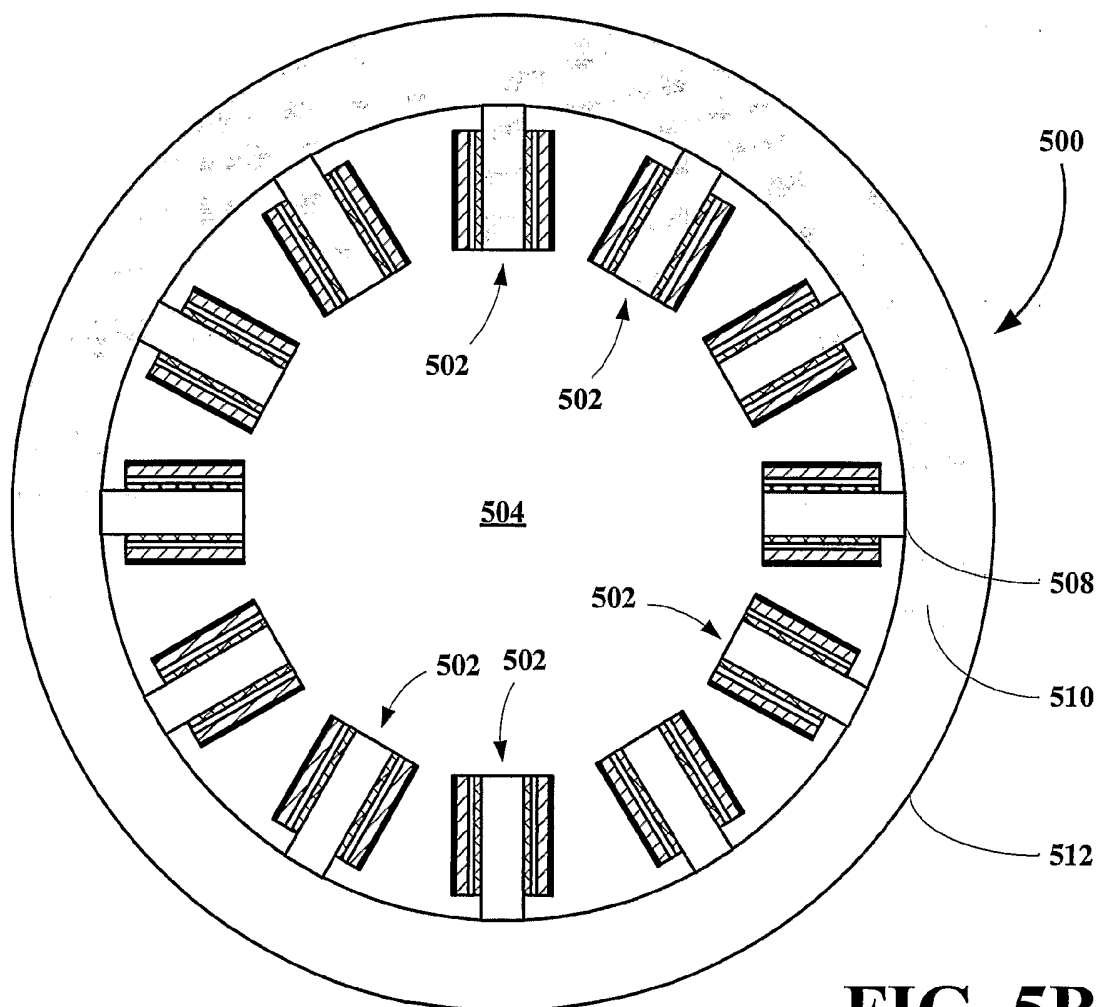


FIG. 5B

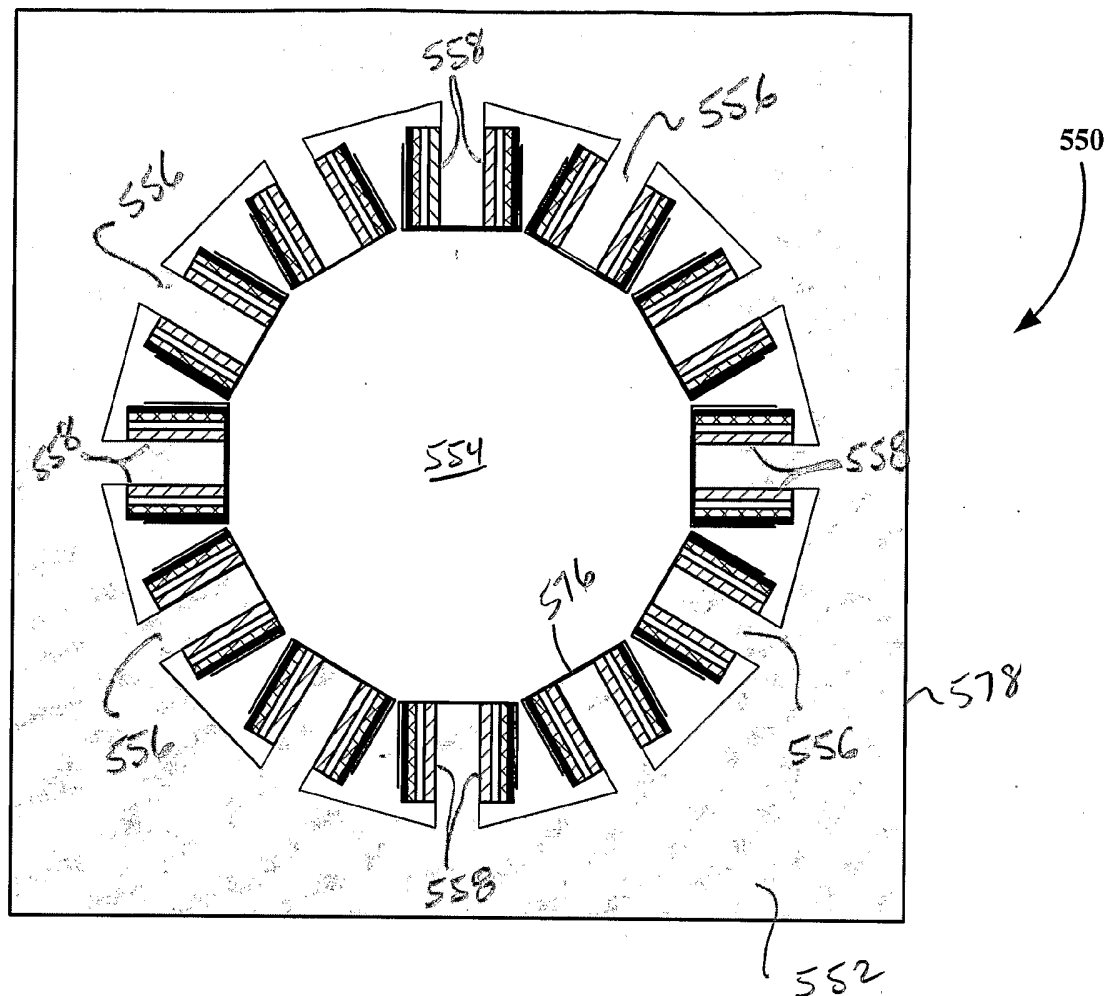


FIG. 5C

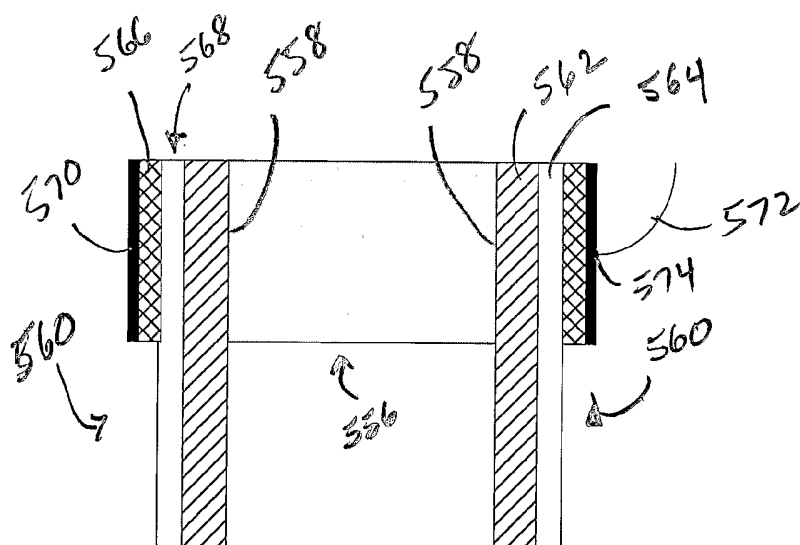


FIG. 5D

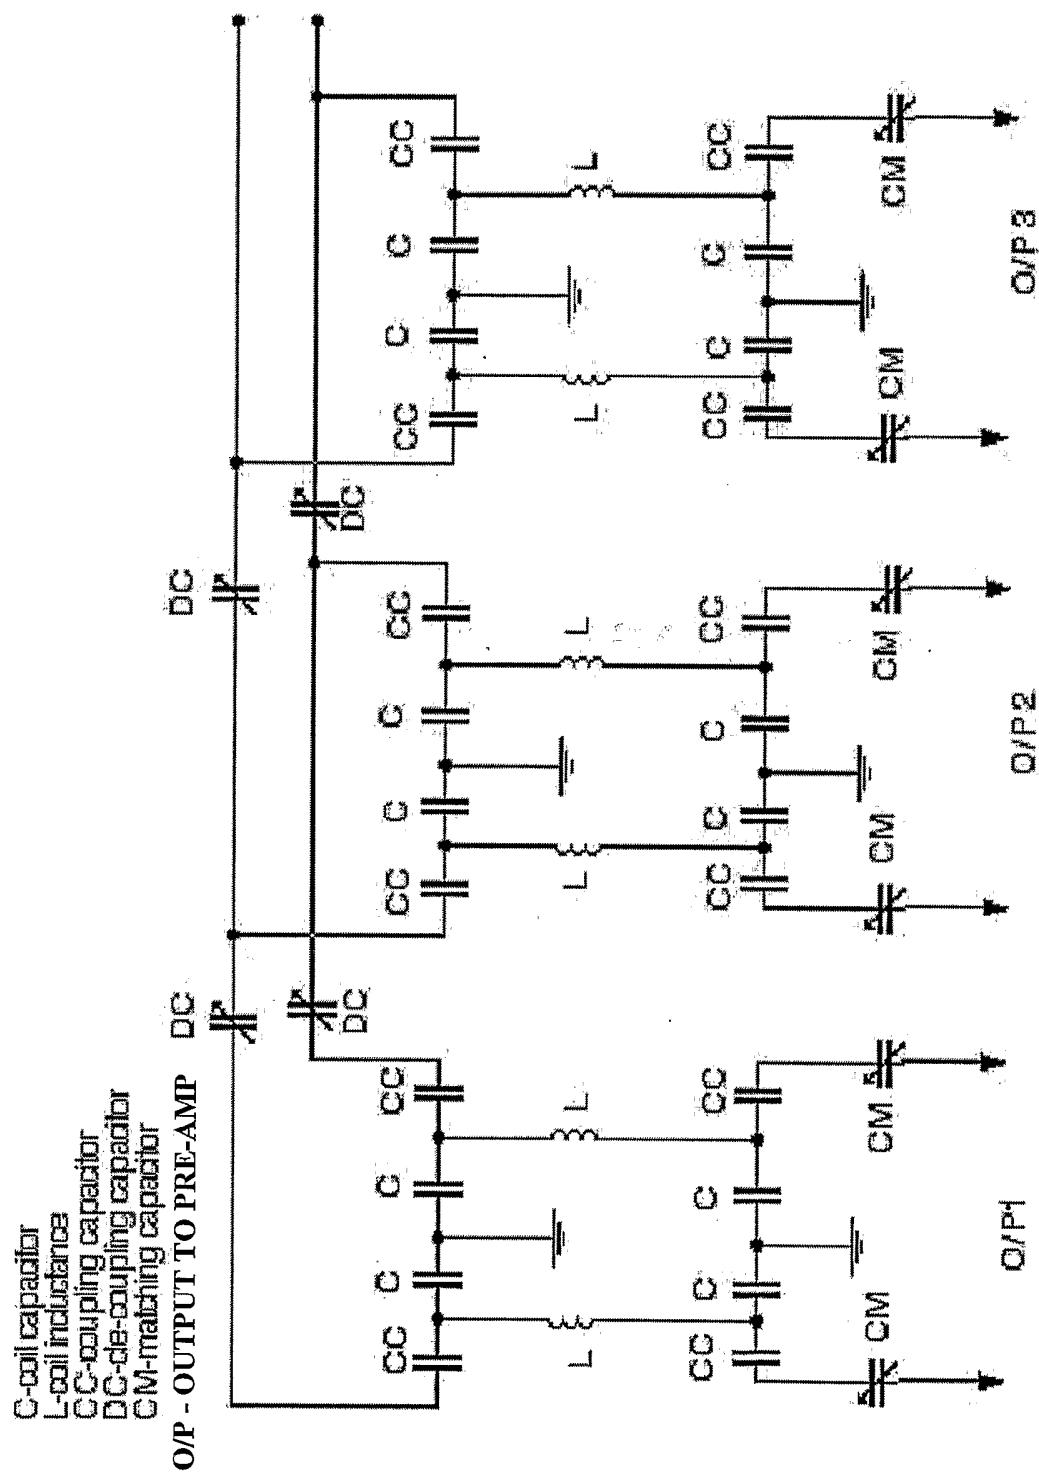


FIG. 5E

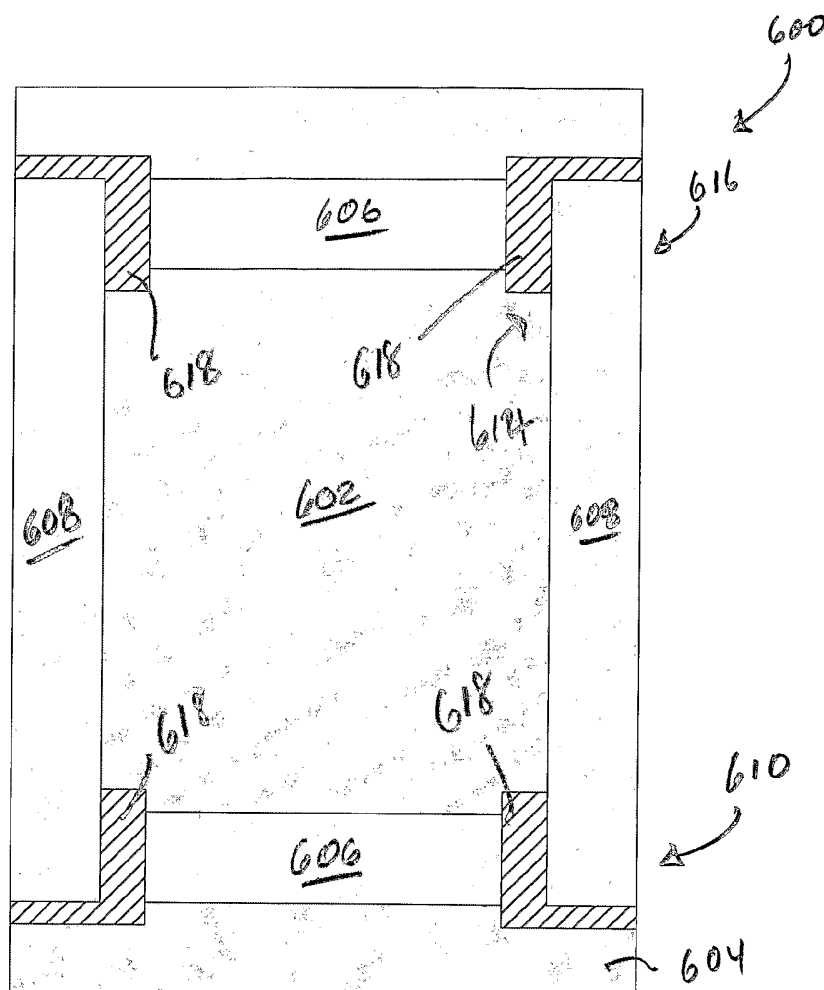


FIG. 6A

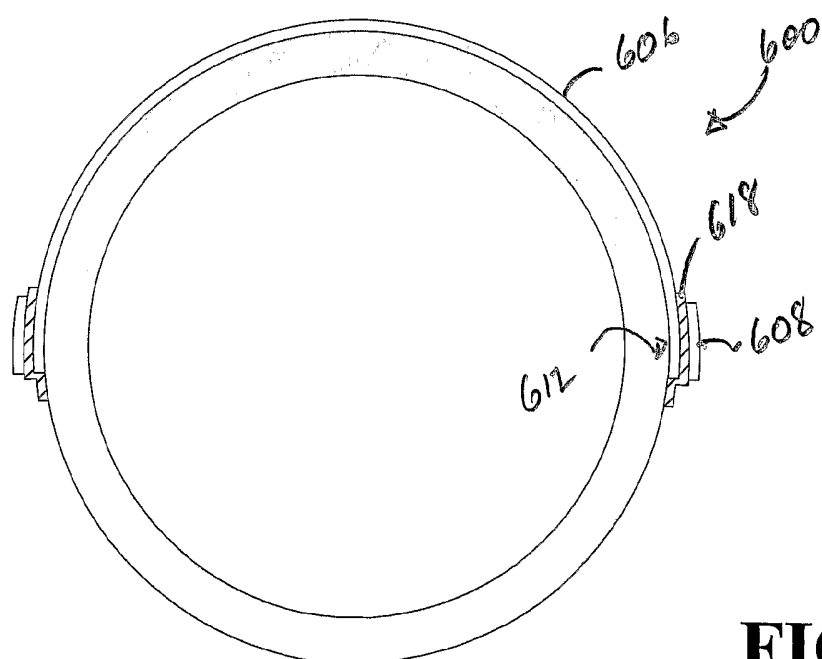


FIG. 6B

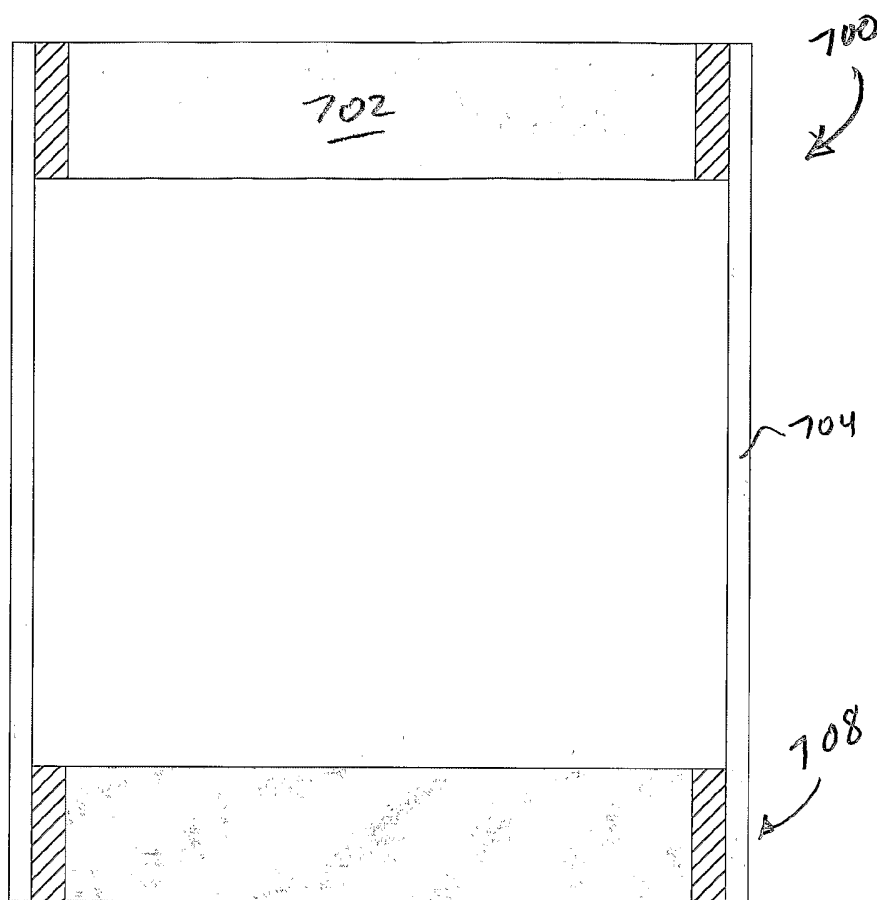


FIG. 7A

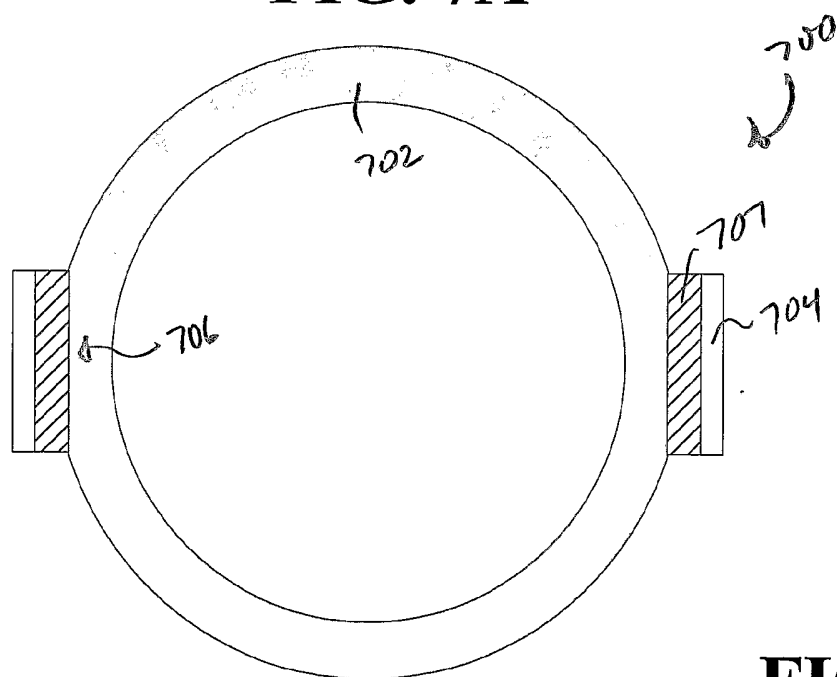


FIG. 7B

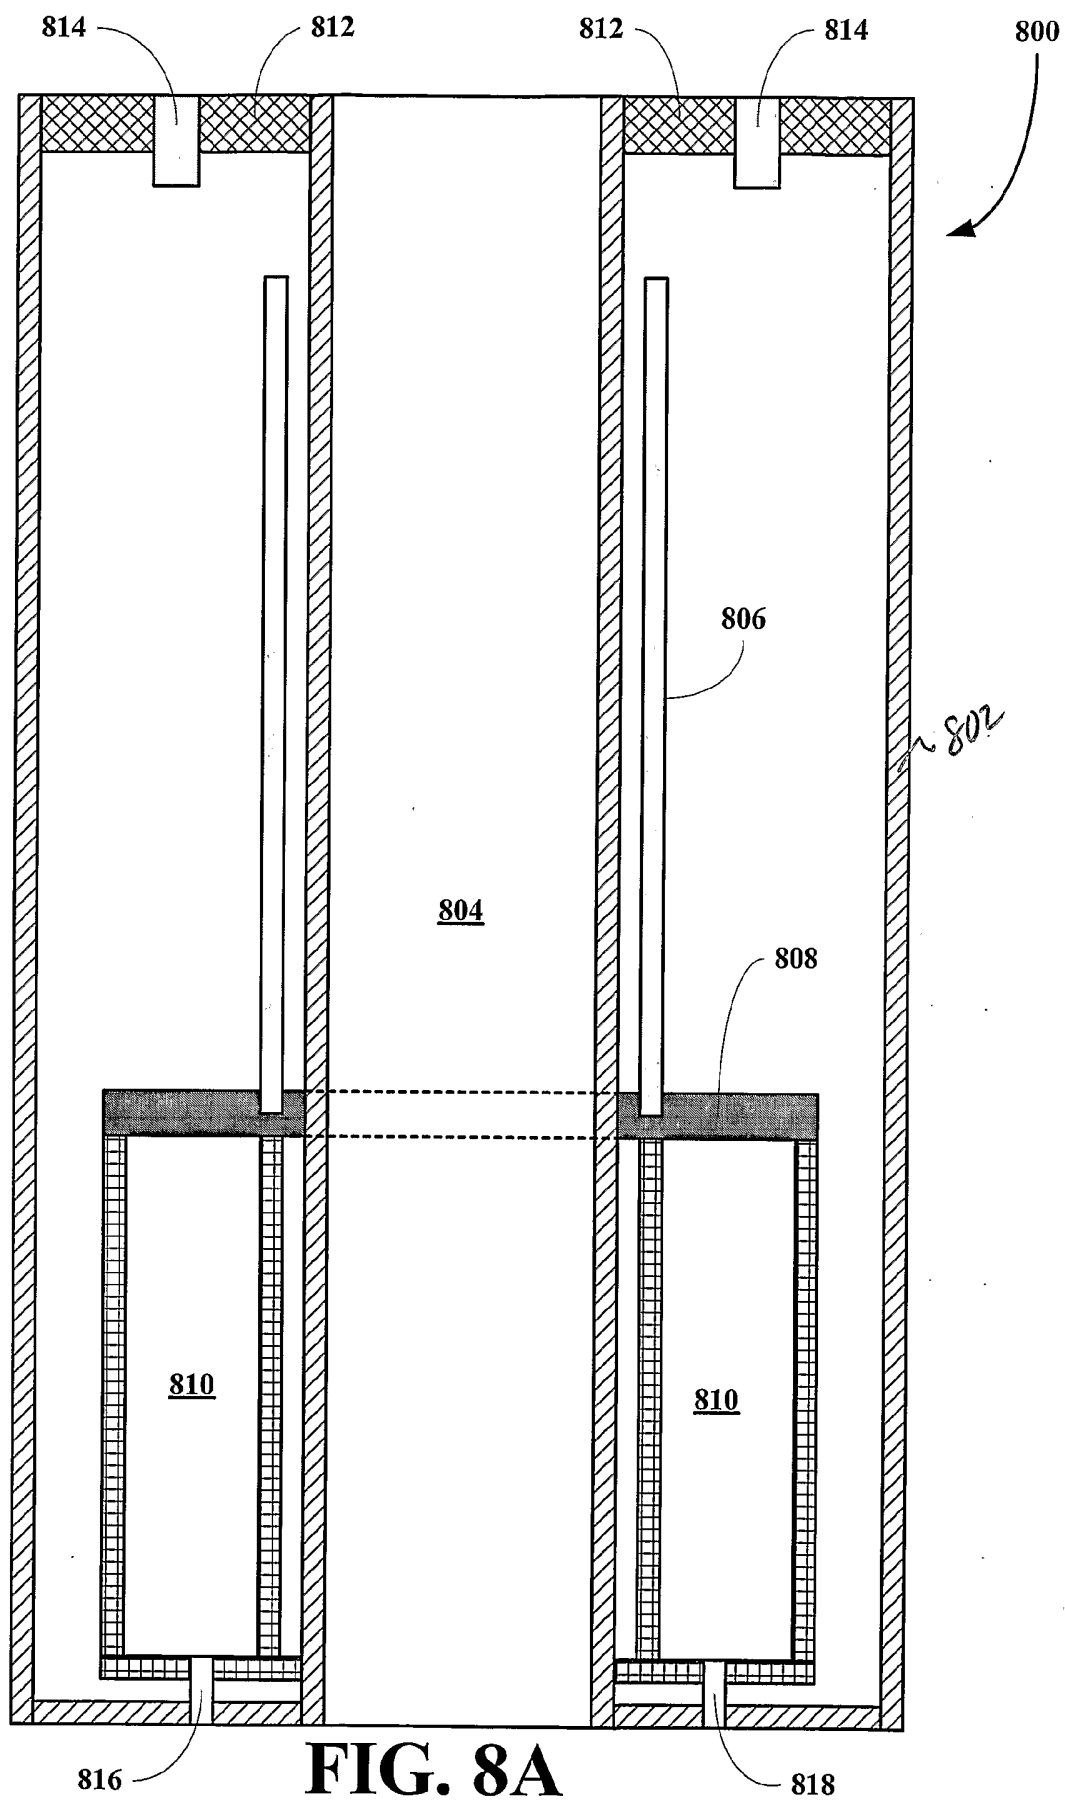


FIG. 8A

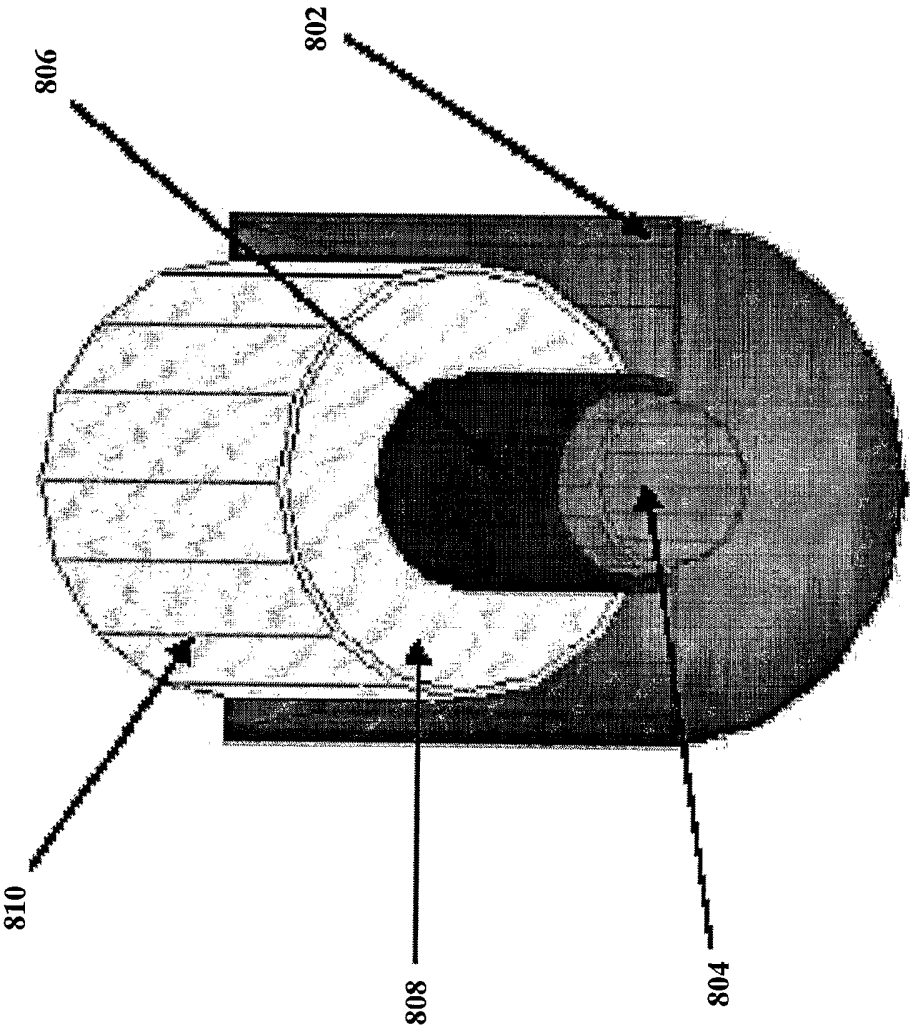
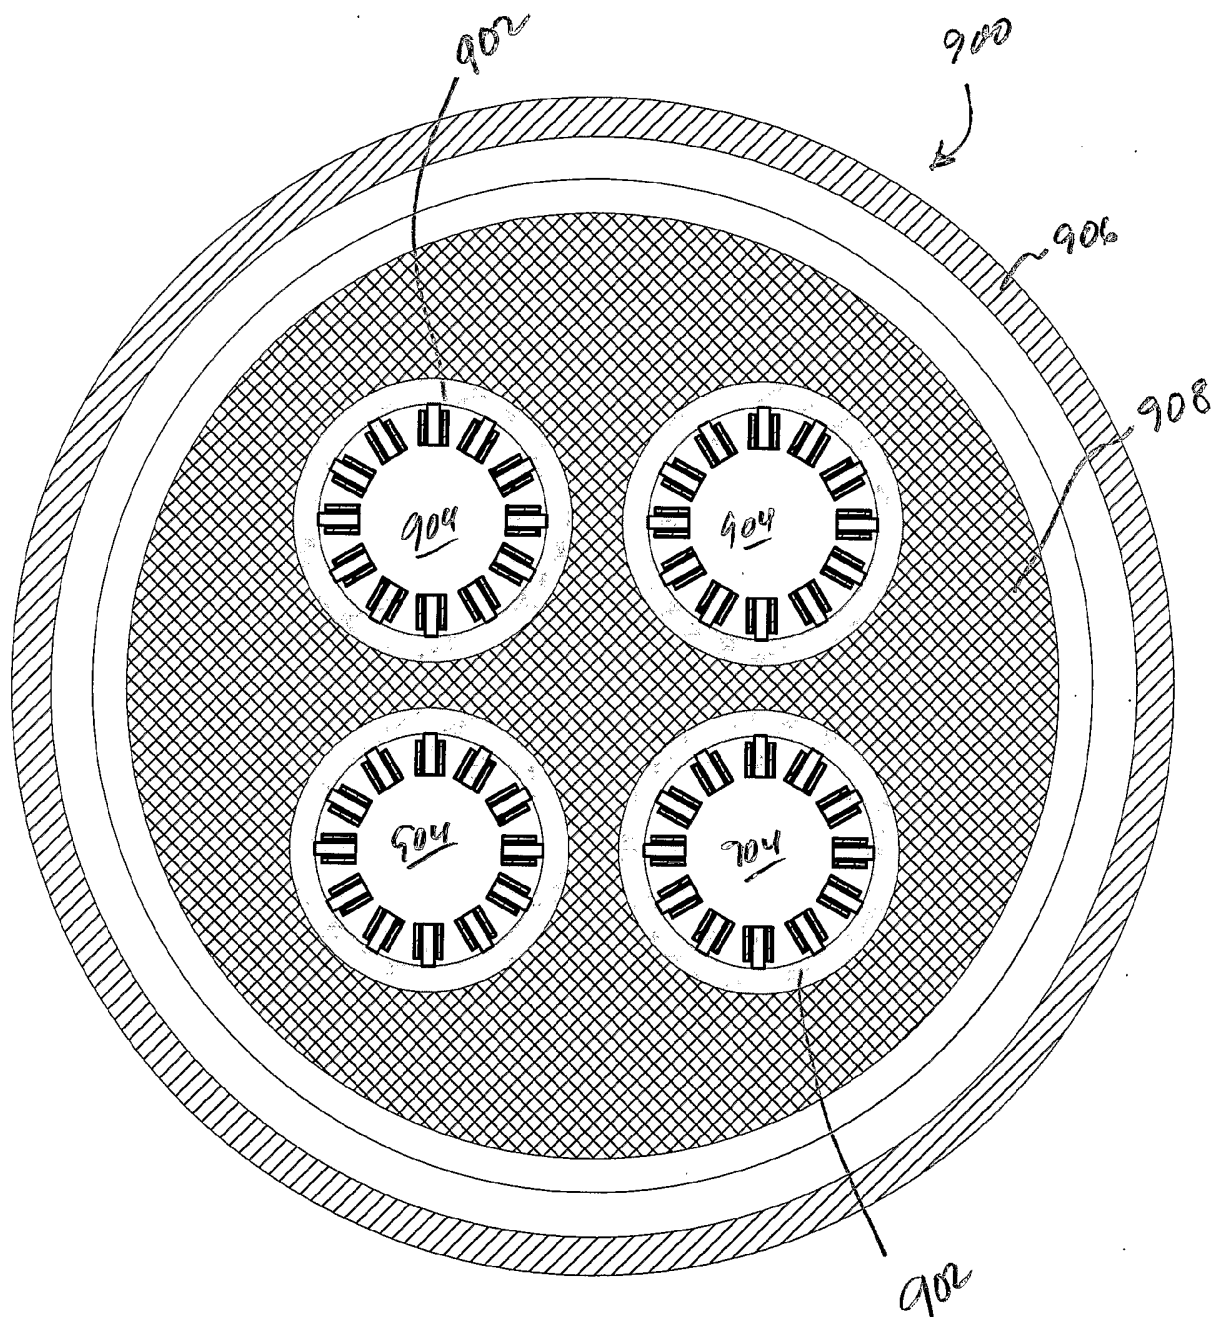
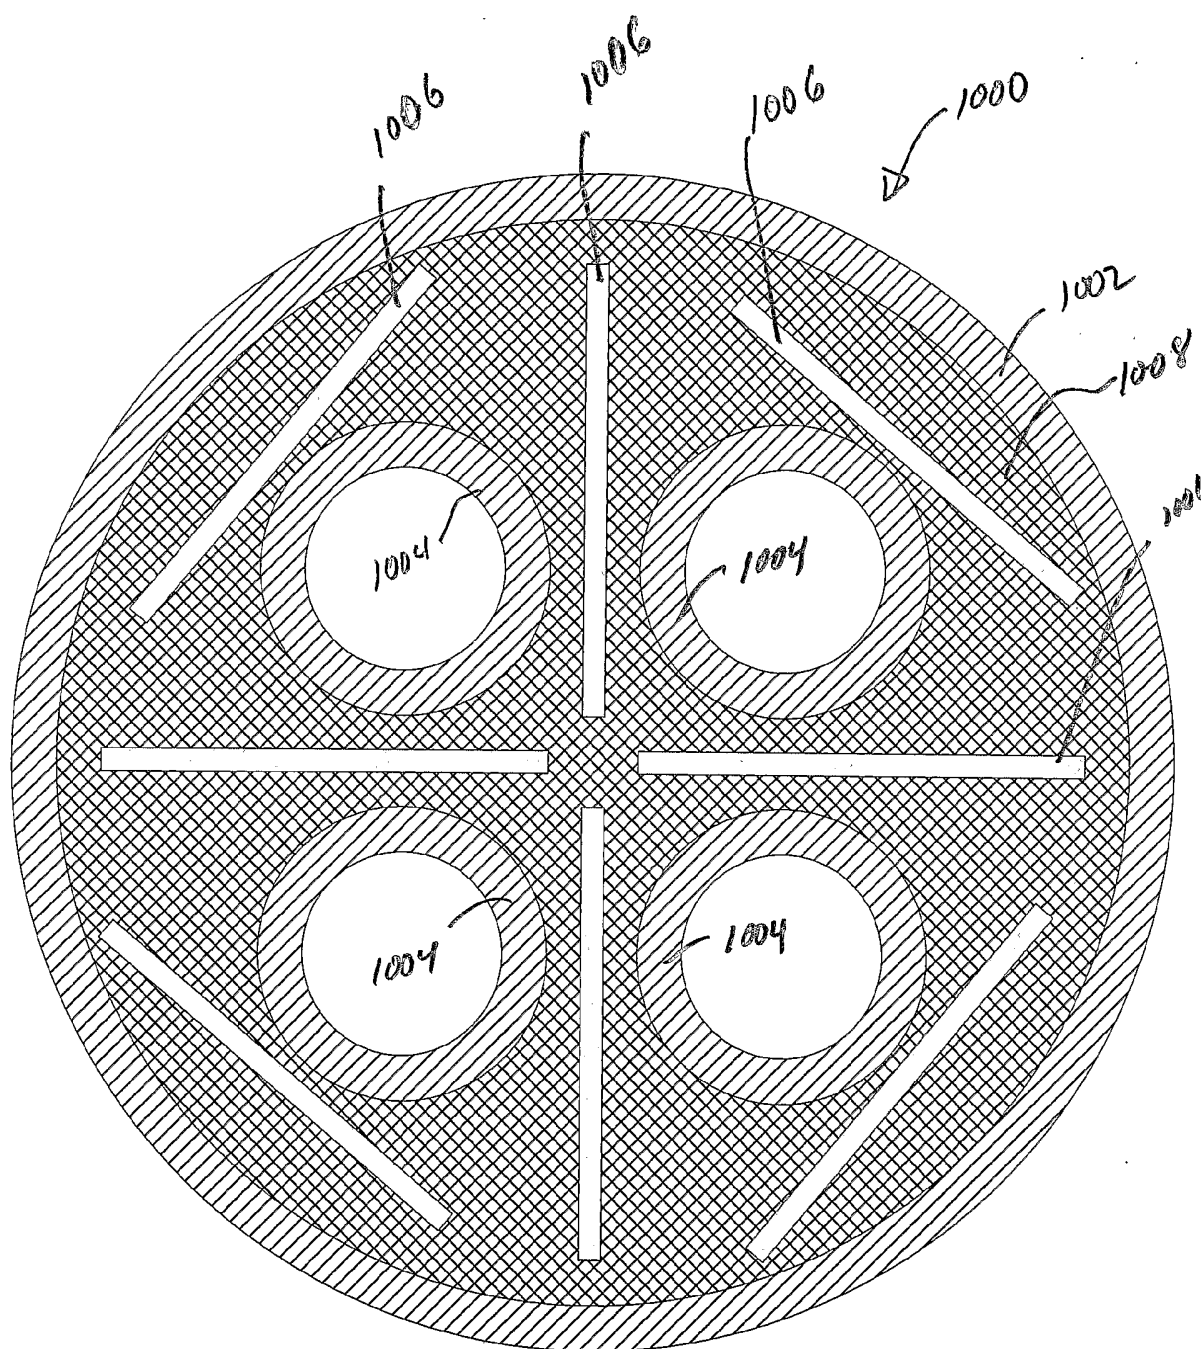


FIG. 8B

**FIG. 9**

**FIG. 10**

IV. ADDITIONAL INFORMATION

SNR for two saddle coils in horizontal position.

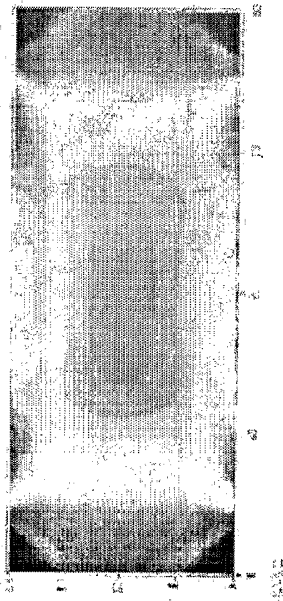


FIG. 11A

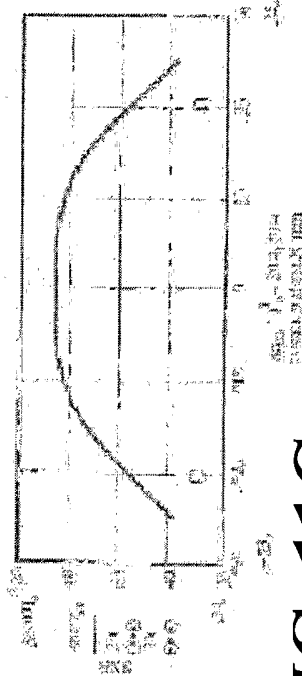


FIG. 11C



FIG. 11B

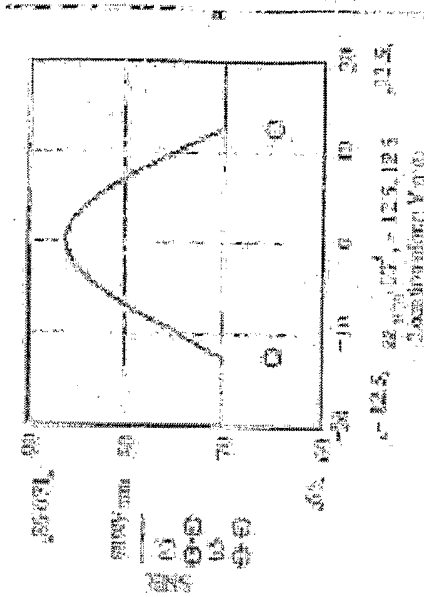
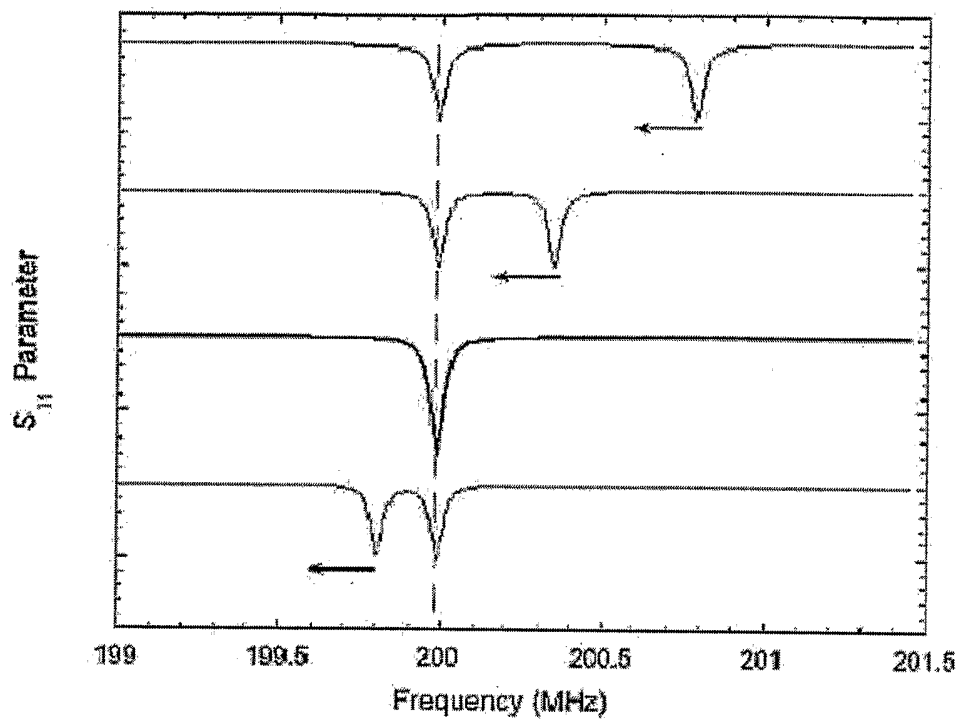
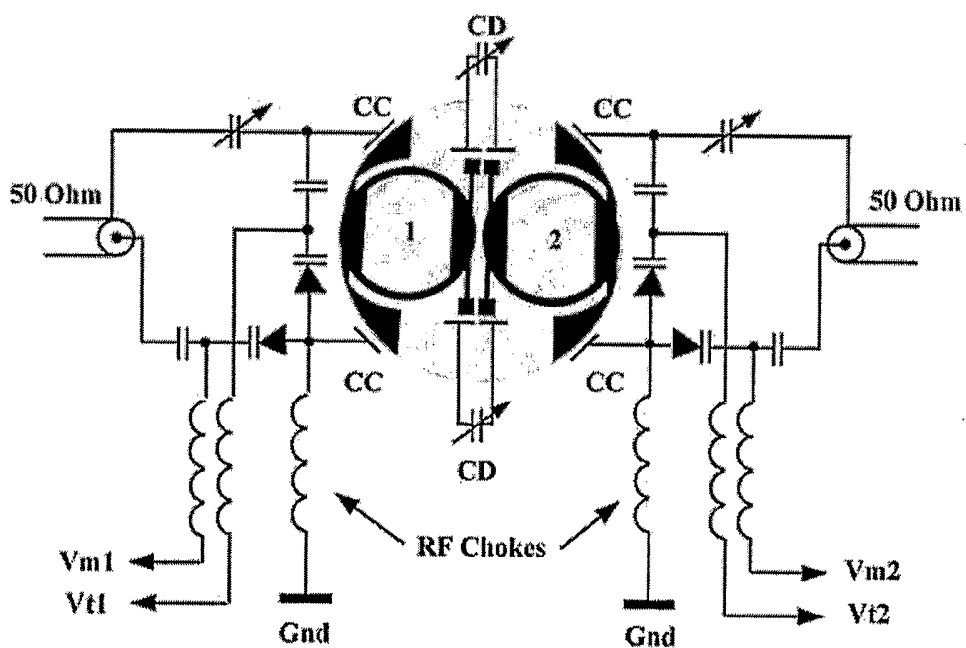


FIG. 11D

**FIG. 12A****FIG. 12B**