



(51) International Patent Classification:

H02J 50/20 (2016.01) *H02J 50/50* (2016.01)

(21) International Application Number:

PCT/IB2020/060595

(22) International Filing Date:

11 November 2020 (11.11.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2019904254 12 November 2019 (12.11.2019) AU
62/934,511 12 November 2019 (12.11.2019) US

(71) Applicant: **EMROD LIMITED** [NZ/NZ]; 1 Watt Street,
Parnell, Auckland, 1052 (NZ).

(72) Inventors: **KUSHNIR, Zvi**; 21 Golf Road, Epsom, Auckland, 1023 (NZ). **SIMPKIN, Raymond Andrew**; 27 Island Bay Road, Beach Haven, Auckland, 0626 (NZ).

(74) Agent: **AJ PARK**; Level 22, State Insurance Tower, 1 Willis Street, Wellington (NZ).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(54) Title: SYSTEM AND METHOD FOR LONG-RANGE WIRELESS POWER TRANSFER

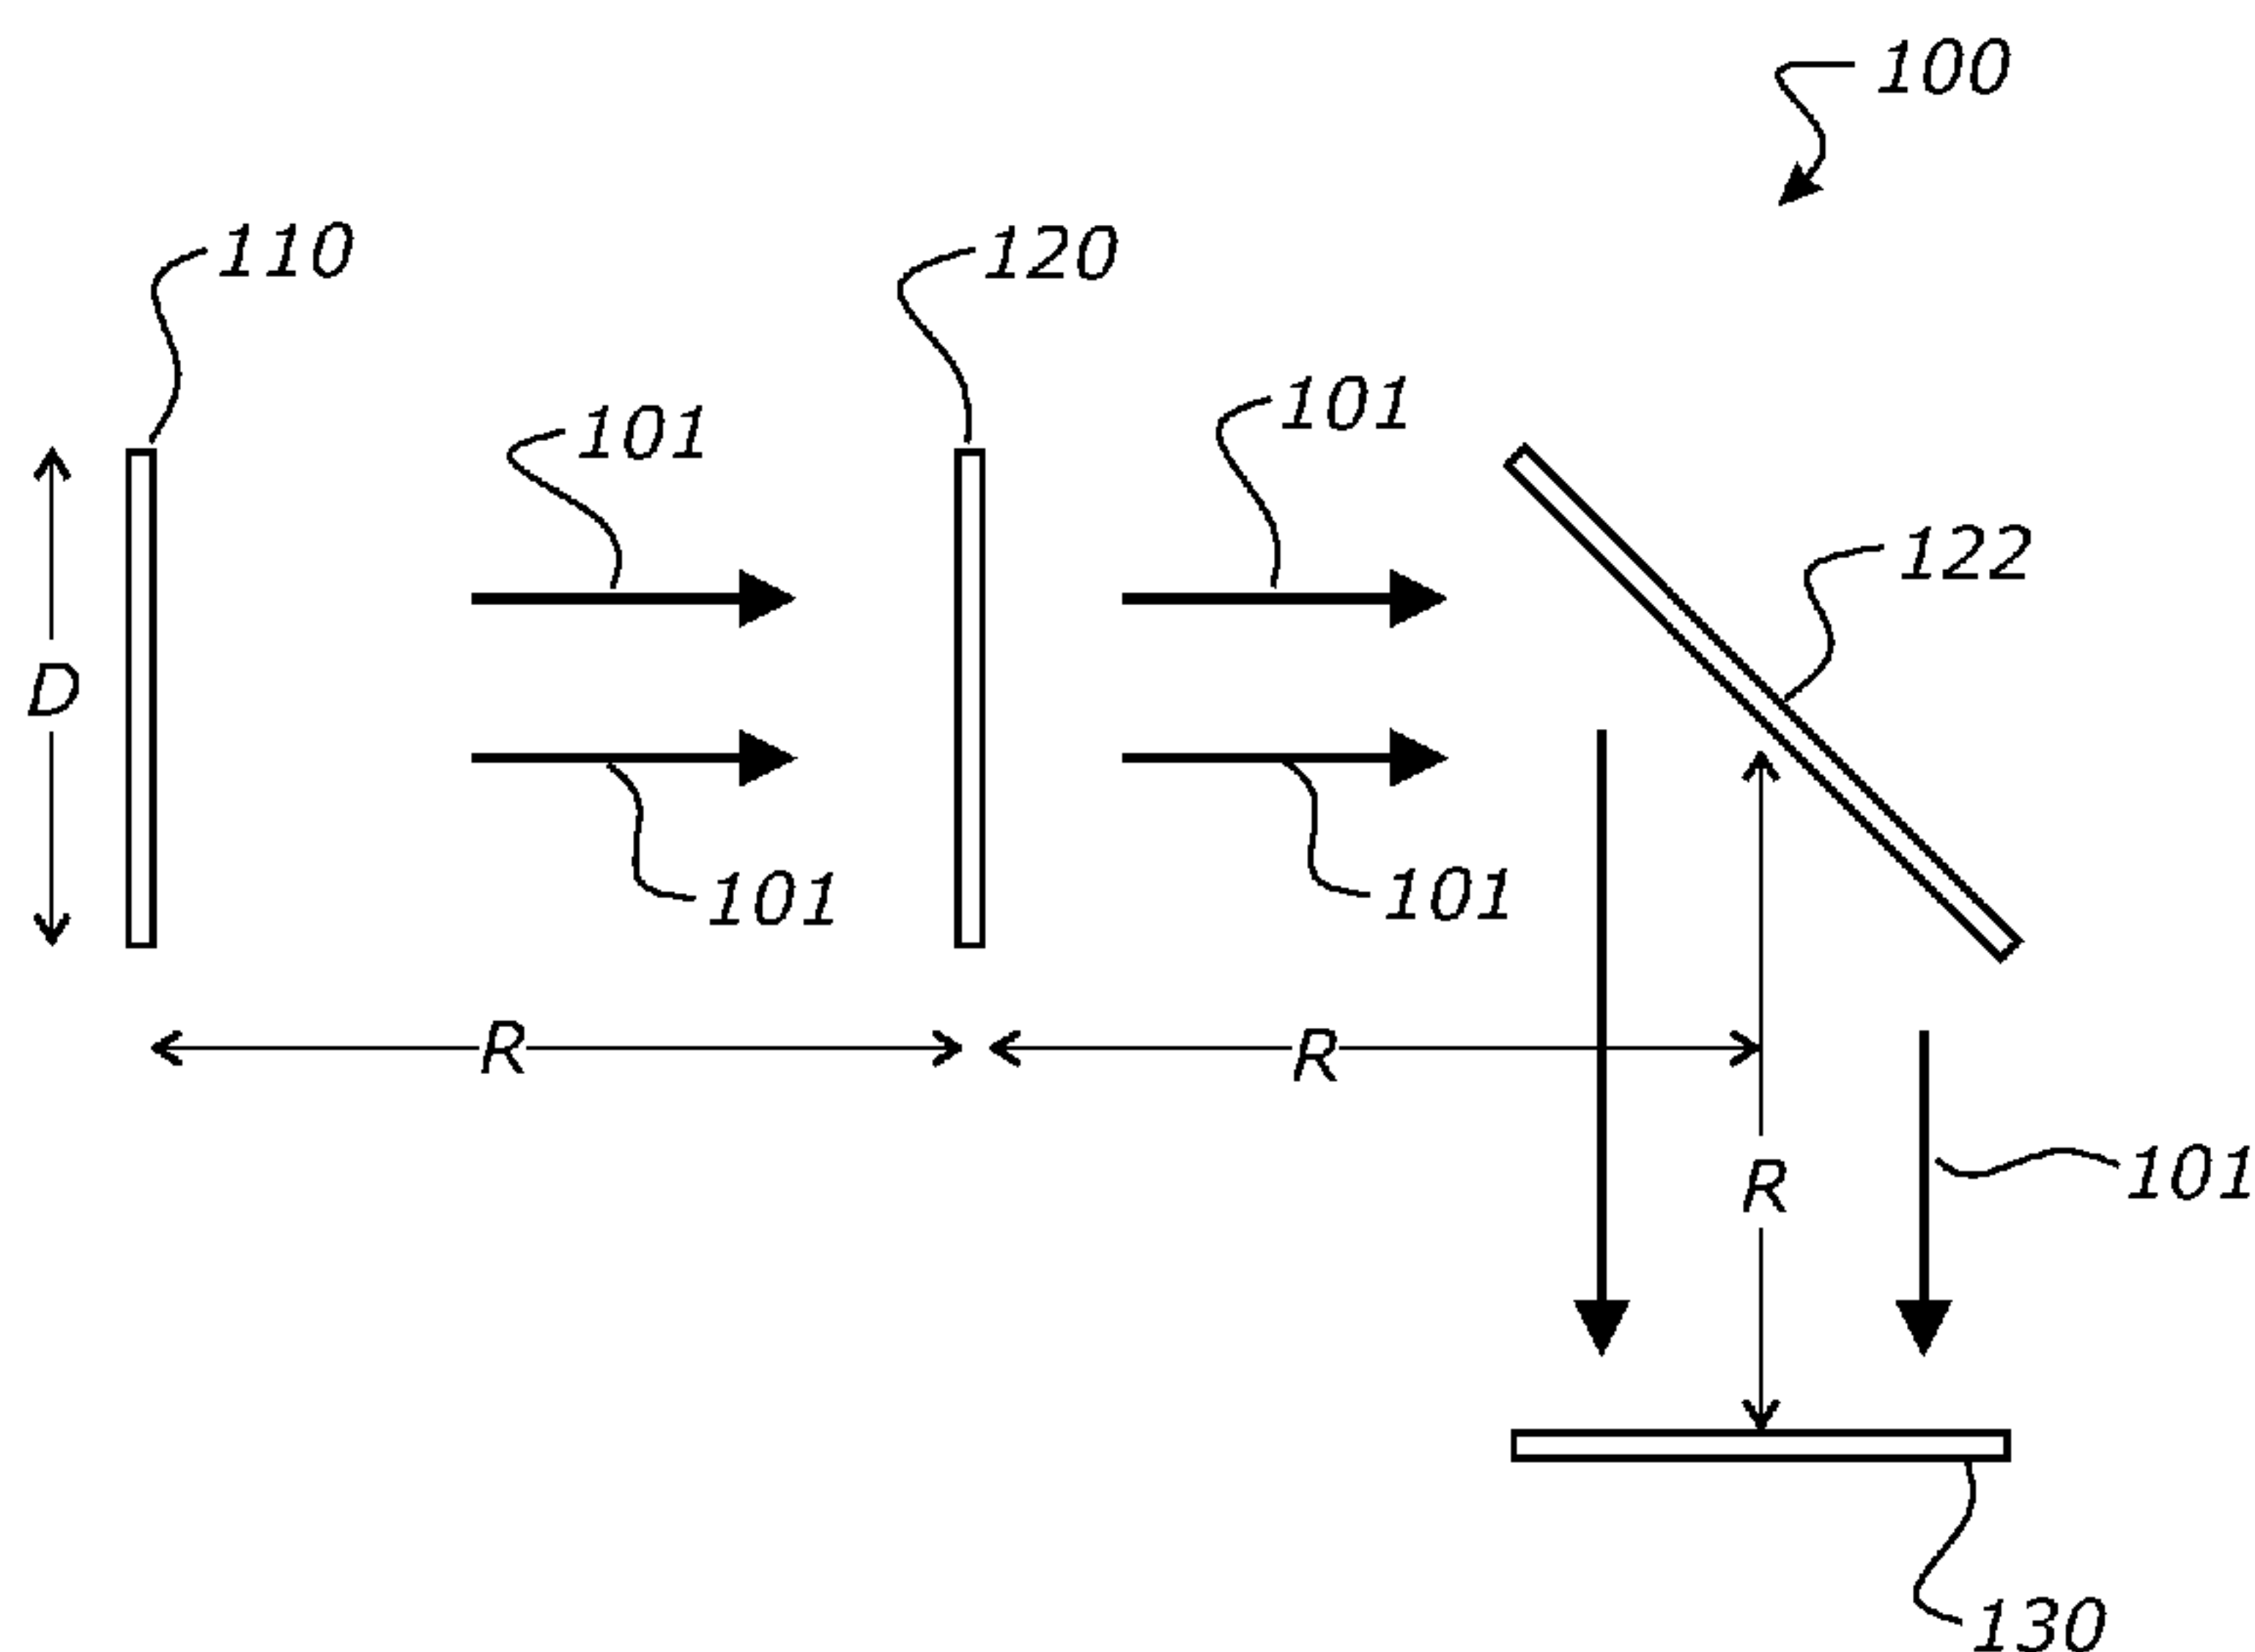


FIGURE 1

(57) Abstract: A long-range wireless power transfer system 100 is disclosed. The system 100 comprises at least a transmitting antenna 110 that is configured to receive electric power from a power source as an input, convert the input electric power into electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam. The rectifying antenna 130 is positioned or configured to be positioned at a distance from the transmitting antenna 110. The rectifying antenna 130 is configured to receive the directional beam and convert the electromagnetic energy into electricity. In certain embodiments, the system 100 utilise one or more phase correcting devices 120, 122 to maintain the directional beam as the collimated beam and to increase a range to which the directional beam is maintained as the collimated or substantially collimated beam.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

SYSTEM AND METHOD FOR LONG-RANGE WIRELESS POWER TRANSFER

The invention relates to a system and method for a long-range wireless power transfer.

BACKGROUND OF THE INVENTION

5 Transmittting electricity using transmission lines is well-known.

However, transmitting power using transmission lines/cables have several disadvantages. Laying power cables can be expensive as it requires substantial labour, equipment and land area. Further, installing and maintaining power cables can be costly. In addition, transmission lines cannot be easily implemented in all geographical locations. 10 Overhead transmission lines are not aesthetically pleasing and can be damaged for example in severe weather conditions. Although, underground power cables may solve some of these problems, they too have several disadvantages such as difficulty in detecting faults, and are difficult and expensive to upgrade.

One of the problems with transferring power wirelessly using electromagnetic beams over a long distance is ability to transfer power in an efficient manner because 15 electromagnetic waves can easily diverge in other directions during transmission of energy from a transmitting end to a receiving end, thereby causing loss of much of the energy in free space. This means the energy received at the receiving end may not be sufficient to provide power or be economically viable compared to physical line-based 20 alternatives.

OBJECT OF THE INVENTION

It is an object of the present invention to provide a system and/or method for a long-range wireless power transfer which overcomes or at least partially ameliorates some of the abovementioned challenges, augments the current line-based solutions, or 25 which at least provides the public with a useful choice.

SUMMARY OF INVENTION

In a first aspect, the present invention resides in a long-range wireless power transfer system comprising:

a transmitting antenna that is a phased array antenna having an array of 30 antenna elements that are radiating elements, the phased array antenna being configured to receive electric power from a power source as an input, convert the input electric power into electromagnetic energy, and radiate the electromagnetic energy into

free space as a directional beam that is a collimated or substantially collimated beam, the collimated or substantially collimated beam being produced by controlling phase and amplitude of each of the antenna elements;

at least one phase correcting device positioned or configured to be positioned at a first distance from the transmitting antenna, the at least one phase correcting device being a multi-layer structure having at least three layers with a central dielectric core sandwiched between at least two layers on two opposite portions of the dielectric core with at least one of the layers being a dielectric skin made of at least one dielectric material, the at least one phase correcting device being configured to:

receive the directional beam radiated from the transmitting antenna, perform a phase correcting operation on the directional beam, the phase correcting operation being maintaining the directional beam as the collimated or substantially collimated beam and increasing a range to which the directional beam is maintained as the collimated or substantially collimated beam, and

transmit the phase corrected directional beam to the free space; and a rectifying antenna positioned or configured to be positioned at a second distance from the transmitting antenna with the at least one phase correcting device positioned or configured to be positioned between the transmitting antenna and the rectifying antenna, the rectifying antenna configured to receive the directional beam from the at least one phase correcting device and convert the electromagnetic energy into electricity.

In a second aspect, the present invention resides in a long-range wireless power transfer system comprising:

a transmitting antenna configured to receive electric power from a power source as an input, convert the input electric power into electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam;

at least one phase correcting device positioned or configured to be positioned at a first distance from a transmitting antenna, the at least one phase correcting device being configured to:

receive the directional beam radiated from the transmitting antenna, perform a phase correcting operation on the directional beam for maintaining the directional beam as the collimated or substantially collimated beam and for increasing a range to which the directional beam is maintained as the collimated or substantially collimated beam, and

transmit the phase corrected directional beam to the free space; and

a rectifying antenna positioned or configured to be positioned at a second distance from the transmitting antenna with the at least one phase correcting device

positioned or configured to be positioned between the transmitting antenna and the rectifying antenna, the rectifying antenna configured to receive the directional beam from the at least one phase correcting device and convert the electromagnetic energy into electricity.

5 One or more following statements may apply to the invention as defined above in the first and/or second aspects.

In one embodiment, the electromagnetic energy is a microwave energy.

10 In one embodiment, the transmitting antenna is a phased array antenna having an array of antenna elements that are radiating elements and the collimated or substantially collimated beam is produced by controlling phase and amplitude of each of the antenna elements.

In one embodiment, each antenna element has an electronically controlled phase shifter to facilitate electronic steering of the directional beam.

In one embodiment, each antenna element is a patch antenna element.

15 In one embodiment, each antenna element is made from metallic segments etched onto a substrate.

In one embodiment, each antenna element comprises at least a low-loss dielectric element made out of a low-loss dielectric material.

20 In one embodiment, each antenna element is a radome element formed as a hemispherical shell or a substantially hemispherical shell.

In one embodiment, the radome element has a thin radome element wall with a wall thickness of no more than one quarter of a wavelength in a material that the radome element wall is made of.

25 In one embodiment, the wavelength of the electromagnetic energy in a form of electromagnetic waves in the material that the radome element wall is made of is given by:

$$\lambda_d = \frac{\lambda}{n_d}$$

where λ_d is the wavelength of electromagnetic waves in the radome wall material, λ is the free-space wavelength and n_d is the refractive index of the radome wall material.

In one embodiment, the radome element is larger than the antenna element to cover the antenna element.

In one embodiment, the at least one phase correcting device is an electromagnetic wave transparent phase correcting device.

5 In one embodiment, the at least one phase correcting device is a straight through phase correcting device that allows the directional beam that is incident on it to travel through in a straight direction without diverting the directional beam into another direction.

10 In one embodiment, the straight-through phase correcting device is a composite multi-layer structure comprising at least three layers with a or the dielectric core sandwiched between at least two dielectric skins on two opposite portions of the dielectric core.

15 In one embodiment, the dielectric skins comprise metasurfaces to simultaneously provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

In one embodiment, the metasurfaces are incorporated on the dielectric skins.

In one embodiment, thickness of the dielectric skin on each portion of the dielectric core is less than one-tenth of a wavelength in a material that the dielectric skin is made of.

20 In one embodiment, the dielectric core is made from a low-loss dielectric material.

In one embodiment, aor the dielectric core is of at least three layers with at least one metamaterial layer sandwiched between two dielectric support layers.

In one embodiment, the at least one metamaterial layer is a metasurface.

25 In one embodiment, thickness of the dielectric core is between one-tenth and one whole wavelength in the dielectric material that the dielectric core is made of.

In one embodiment, the dielectric core has a refractive index between 1 and 3.

In one embodiment, the at least one phase correcting device is a reflective phase correcting device that allows the directional beam to divert to another direction at

an angle by reflecting the directional beam that is incident on the reflective phase correcting device into said another direction.

In one embodiment, the angle is between 60 degrees and 120 degrees, preferably, 90 degrees or substantially 90 degrees.

5 In one embodiment, the reflective phase correcting device is a composite multi-layer structure having at least three layers with a or the dielectric core sandwiched between a dielectric skin on a first portion of the dielectric core and a reflective ground plane on a second portion of the dielectric core, the second portion being opposite the first portion.

10 In one embodiment, in the reflective phase correcting device, the dielectric core is sandwiched between the at least two layers on two opposite portions of the dielectric core with at least one of the layers being the dielectric skin the other layer being a reflective ground plane

In one embodiment, the dielectric skin comprises a metasurface to
15 simultaneously provide phase shift to an incoming wavefront and complete reflection with minimal loss of power.

In one embodiment, the transmitting antenna has a transmitting antenna aperture.

In one embodiment, the transmitting antenna aperture has a dimension, D ,
20 aperture efficiency, ϵ , such that for wavelength, λ , and distance, R , between transmitting antenna and down-range phase-correcting device or rectenna, at least one of the following inequalities apply:

$$D^2 \geq 4\lambda R/\epsilon$$

$$D^2 \geq \pi\lambda R/\epsilon$$

25 In one embodiment, $D^2 \geq 4\lambda R/\epsilon$ applies for a circular aperture of diameter, D .

In one embodiment, $D^2 \geq \pi\lambda R/\epsilon$ applies for a square aperture of side dimension, D .

In one embodiment, size of the rectifying antenna is same or substantially the
30 same as the size of the transmitting antenna aperture.

In one embodiment, the rectifying antenna is part of a rectifying antenna structure comprising solid state rectifying components wherein the rectifying antenna comprises an array of receiving antenna elements that are electrically connected to the solid-state rectifying components.

5 In one embodiment, the solid-state rectifying components are Schottky diodes.

In one embodiment, the rectifying antenna is part of a rectifying antenna structure, the rectifying antenna structure comprising:

a central core having a first portion and a second portion that are opposite to each other, wherein the central core is made of at least one dielectric material;

10 a dielectric skin comprising a metasurface disposed to a first portion of the central core and the rectifying antenna is positioned at the second portion of the central core; and

a rectifying circuit that is electrically connected to the rectifying antenna to rectify the incoming electromagnetic energy to produce a direct current (DC) output
15 which is then delivered to a required load.

In one embodiment, the rectifying antenna is formed as a rectifying antenna array having a plurality of rectifying antenna elements.

In one embodiment, the central core is made of a low-loss dielectric material.

20 In one embodiment, thickness of the central core lies between one-tenth and one whole wavelength in the dielectric material that the central core is made of.

In one embodiment, the central core has a refractive index of between 1 and 3

In one embodiment, thickness and refractive index of the central core vary over the surface of the rectifying antenna to achieve impedance match that is desired.

In one embodiment, the system is an earth-based system.

25 In one embodiment, the system is configured to wirelessly transfer the power up to and beyond 100 meters range.

In one embodiment, the transmitting antenna is configured to operate in a radiating near-field region within which an electromagnetic field is substantially confined to the collimated or substantially collimated beam.

30 In one embodiment, the transmitting antenna is configured to operate in a radiating near-field region within which an electromagnetic field is substantially confined

to the collimated or substantially collimated beam, by applying a spherical phase distribution across an aperture plane of the transmitting antenna so as to achieve a degree of beam focusing in the radiating near-field region.

In one embodiment, in the radiating near-field region, the maximum on-axis field strength exceeds that in the or an antenna aperture due to constructive interference, and occurs at a range, R_{max} wherein for antenna array elements being excited in-phase, the value of R_{max} is given by:

$$R_{max} = \frac{A_{eff}}{\pi\lambda}$$

where, λ is the wavelength of radiation and A_{eff} is the effective area of the transmitting antenna aperture.

In a third aspect, the present invention resides in a long-range wireless power transfer system, the system comprising:

a transmitting antenna that is a phased array antenna having an array of antenna elements that are radiating elements, the phase array antenna being configured to receive an electric power from a power source as an input, convert the input electric power into electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam, the collimated or substantially collimated beam being produced by controlling phase and amplitude of each of the antenna elements;

at least one phase correcting device positioned or configured to be positioned at a first distance from the transmitting antenna, the at least one phase correcting device being configured to:

receive the directional beam radiated from the transmitting antenna,

perform a phase correcting operation on the directional beam for maintaining the directional beam as the collimated or substantially collimated beam and for increasing a range to which the directional beam is maintained as the collimated or substantially collimated beam, and

transmit the phase corrected directional beam to the free space; and

a rectifying antenna positioned or configured to be positioned at a second distance from the transmitting antenna with the at least one phase correcting device positioned or configured to be positioned between the transmitting antenna and the rectifying antenna, the rectifying antenna configured to receive the directional beam from the at least one phase correcting device and convert the electromagnetic energy into electricity,

wherein the at least one phase correcting device utilises at least one metasurface to provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

In a fourth aspect, the present invention resides in a long-range wireless power transfer system, the system comprising:

a transmitting antenna that is configured to receive an electric power from a power source as an input, convert the input electric power into electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam;

at least one phase correcting device positioned or configured to be positioned at a first distance from a transmitting antenna, the at least one phase correcting device being configured to:

receive the directional beam radiated from the transmitting antenna, perform a phase correcting operation on the directional beam for maintaining the directional beam as the collimated or substantially collimated beam and for increasing a range to which the directional beam is maintained as the collimated or substantially collimated beam, and

transmit the phase corrected directional beam to the free space; and

a rectifying antenna positioned or configured to be positioned at a second distance from the transmitting antenna with the at least one phase correcting device positioned or configured to be positioned between the transmitting antenna and the rectifying antenna, the rectifying antenna configured to receive the directional beam from the at least one phase correcting device and convert the electromagnetic energy into electricity,

wherein the at least one phase correcting device utilises at least one metasurface to provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

One or more following statements may apply to the invention as defined above in the third and fourth aspects.

In one embodiment, the electromagnetic energy is a microwave energy.

In one embodiment, the at least one phase correcting device utilises at least two metasurfaces to provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

In one embodiment, the at least one phase correcting device utilises at least three metasurfaces to provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

5 In one embodiment, the at least one phase correcting device is a multi-layer structure having at least three layers with a central dielectric core sandwiched between at least two layers on two opposite portions of the dielectric core with at least one of the layers being a dielectric skin made of at least one dielectric material. In one embodiment, the dielectric skins comprise metasurfaces to simultaneously provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

10 In one embodiment, the metasurfaces are incorporated on the dielectric skins.

In one embodiment, thickness of the dielectric skin on each portion of the dielectric core is less than one-tenth of a wavelength in a material that the dielectric skin is made of.

15 In one embodiment, the dielectric core is made from a low-loss dielectric material.

In one embodiment, a or the dielectric core is of at least three layers with at least one metamaterial layer sandwiched between two dielectric support layers.

In one embodiment, the at least one metamaterial layer is a metasurface.

20 In one embodiment, the system is the one as defined by any one of the statements above and below. One or more statements relating to any one of the first and second aspects as defined above may equally apply to the invention as defined in the third and the fourth aspects.

25 In a fifth aspect, the present invention resides in a long-range wireless power transfer system that utilises at least one metasurface to provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

In one embodiment, the long-range wireless power transfer system utilises at least two metasurfaces to provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

30 In one embodiment, the long-range wireless power transfer system utilises at least three metasurfaces to provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

In one embodiment, the system is the one as defined by one or more of the statements above and below. One or more statements relating to any one of the first to fourth aspects as defined above may equally apply to the invention as defined in the fifth aspect.

5 In a sixth aspect, the present invention resides in a use of at least one metasurface (preferably at least two metasurfaces) to provide phase shift whilst maintaining an impedance matched structure with minimal loss of power in a long-range wireless power transfer system.

10 In one embodiment, the system is the one as defined by one or more of the statements above and below. One or more statements relating to any one of the first to fifth aspects as defined above may equally apply to the invention as defined in the sixth aspects.

 In a seventh aspect, the present invention resides in a transmitting antenna for use in a long-range wireless power transfer system,
15 wherein the transmitting antenna is a phased array antenna having an array of antenna elements that are radiating elements.

 In one embodiment, each antenna element comprises at least a low-loss dielectric element made out of a low-loss dielectric material.

20 In one embodiment, each antenna element is a radome element formed as a hemispherical shell or a substantially hemispherical shell.

 In one embodiment, each antenna element is a radome element formed as a hemispherical shell or a substantially hemispherical shell.

25 In one embodiment, the radome element has a thin radome element wall with a wall thickness of no more than one quarter of a wavelength in a material that the radome element is made of.

 In one embodiment, the radome element is larger than each antenna element to cover the antenna element.

 In one embodiment, each antenna element has an electronically controlled phase shifter to facilitate electronic steering of the directional beam.

30 In one embodiment, each antenna element is a patch antenna element.

In one embodiment, each antenna element is made from metallic segments etched onto a substrate.

In one embodiment, the transmitting antenna is configured to receive electric power from a power source as an input, convert the input electric power into
5 electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam.

In one embodiment, the transmitting antenna has a transmitting antenna aperture.

In one embodiment, the transmitting antenna aperture has a dimension, D ,
10 aperture efficiency, ϵ , such that for wavelength, λ , and distance, R , between transmitting antenna and down-range phase-correcting device or rectenna, at least one of the following inequalities apply:

$$D^2 \geq 4\lambda R/\epsilon$$

$$D^2 \geq \pi\lambda R/\epsilon$$

15

In one embodiment, $D^2 \geq 4\lambda R/\epsilon$ applies for a circular aperture of diameter, D .

In one embodiment, $D^2 \geq \pi\lambda R/\epsilon$ applies for a square aperture of side dimension, D .

In one embodiment, the system is the one as defined by one or more of the
20 statements above and below. One or more statements relating to any one of the first to sixth aspects as defined above may equally apply to the invention as defined in the seventh aspect.

In an eighth aspect, the present invention resides in a phase correcting device for use in a long-range wireless power transfer system, wherein the phase correcting
25 device is a multi-layer structure having at least three layers with a central dielectric core sandwiched between at least two layers on two opposite portions of the dielectric core with at least one of the layers being a dielectric skin made of at least one dielectric material.

In one embodiment, the dielectric skin comprises a metasurface to provide
30 phase shift whilst maintaining an impedance matched structure with minimal loss of power.

In one embodiment, the metasurface is incorporated on the dielectric skin.

In one embodiment, the phase correcting device is an electromagnetic wave transparent phase correcting device.

5 In one embodiment, thickness of the dielectric skin is less than one tenth of a wavelength in the at least one dielectric material that the dielectric skin is made of.

In one embodiment, the dielectric core is made from a low-loss dielectric material.

In one embodiment, thickness of the dielectric core lies between one-tenth and one whole wavelength in the dielectric material that the dielectric core is made of.

10 In one embodiment, the dielectric core has a refractive index of between 1 and 3.

In one embodiment, the phase correcting device is a straight-through phase correcting device that allows the directional beam that is incident on it to travel through in a straight direction without diverting the directional beam into another direction.

15 In one embodiment, the central dielectric core is sandwiched between the dielectric skins on both the opposite portions of the dielectric core.

In one embodiment, the phase correcting device is a reflective phase correcting device that allows the directional beam to divert to another direction at an angle by reflecting the directional beam that is incident on the reflective phase correcting device
20 into said another direction.

In one embodiment, the angle is between 60 degrees and 120 degrees, preferably, 90 degrees or substantially 90 degrees.

In one embodiment, wherein the central dielectric core is sandwiched between the dielectric skin on the first portion of the dielectric core and a reflective ground plane
25 on the second portion of the dielectric core.

In one embodiment, the dielectric skin comprises a metasurface to simultaneously provide phase shift to an incoming wavefront and complete reflection with minimal loss of power.

30 In one embodiment, the phase correcting device is configured to receive the directional beam radiated from a transmitting structure,

perform phase correcting operation on the directional beam for maintaining the directional beam as the collimated or substantially collimated beam and for increasing a range to which the directional beam is maintained as the collimated or substantially collimated beam, and

5 transmit the phase corrected directional beam to a free space.

In one embodiment, the central dielectric core is of at least three layers with at least one metamaterial layer sandwiched between two dielectric support layers.

In one embodiment, the at least one metamaterial layer is a metasurface.

10 In one embodiment, the system is one as defined by one or more of the statements above and below. One or more statements relating to any one of the first to seventh aspects as defined above may equally apply to the invention as defined in the eighth aspect.

15 In a ninth aspect, the present invention resides in a rectifying antenna for use in a long-range wireless power transfer system, wherein the rectifying antenna is part of a rectifying antenna structure comprising solid state rectifying components wherein the rectifying antenna comprises an array of receiving antenna elements that are electrically connected to the solid-state rectifying components.

In one embodiment, the solid-state rectifying components are Schottky diodes.

20 In one embodiment, the system is one as defined by one or more of the statements above and below. One or more statements relating to any one of the first to eighth aspects as defined above may equally apply to the invention as defined in the ninth aspect.

25 In a tenth aspect, the present invention resides in a rectifying antenna structure for use in a long-range wireless power transfer system, the rectifying antenna structure comprising:

 a central core having a first portion and a second portion that are opposite to each other, wherein the central core is made of at least one dielectric material;

 a dielectric skin comprising a metasurface disposed to a first portion of the central core;

30 a rectifying antenna positioned at the second portion of the central core; and
 a rectifying circuit that is electrically connected to the rectifying antenna to rectify the incoming electromagnetic energy to produce a direct current (DC) output.

In one embodiment, the rectifying antenna is formed as a rectifying antenna array having a plurality of rectifying antenna elements.

In one embodiment, the central core is made of a low-loss dielectric material.

5 In one embodiment, thickness of the central core is between one-tenth and one whole wavelength in a dielectric medium of the central core.

In one embodiment, the central core has a refractive index of between 1 and 3.

In one embodiment, the thickness and refractive index of the central core vary over the surface of the rectifying antenna to achieve impedance match that is desired.

10 In one embodiment, the system is one as defined by one or more of the statements above and below. One or more statements relating to any one of the first to ninth aspects as defined above may equally apply to the invention as defined in the tenth aspect.

In an eleventh aspect, the present invention resides in a long-range wireless power transfer method, the method comprising at least the following steps:

15 providing a long-range wireless power transfer system comprising a transmitting antenna, at least one phase correcting device and a rectifying antenna that are operatively connected to each other;

20 using the transmitting antenna to receive an electric power from a power source as an input, convert the input electric power into electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam;

25 using the at least one phase correcting device to receive the directional beam radiated from the transmitting antenna, perform phase correcting operation on the directional beam for maintaining the directional beam as the collimated or substantially collimated beam and for increasing a range to which the directional beam is maintained as the collimated or substantially collimated beam, and transmit the phase corrected directional beam to the free space; and

using the rectifying antenna to receive the directional beam from the at least one phase correcting device and convert the electromagnetic energy into electricity.

30 In one embodiment, the method further comprises positioning the at least one phase correcting device positioned between the transmitting antenna and the rectifying antenna.

In one embodiment, the method further comprises positioning the at least one phase correcting device at or near a distance from the transmitting antenna at which the directional beam starts to diverge.

In one embodiment, the system is an earth-based system.

5 In one embodiment, the system is configured to wirelessly transfer the power up to and beyond 100 meters.

In one embodiment, the transmitting antenna is the one as at defined in any one of the above statements.

10 In one embodiment, the at least one phase correcting device is the one as at defined in any one of the above statements.

In one embodiment, the rectifying antenna is the one as defined in any one of the above statements.

15 In one embodiment, the system is the one as defined in any one of the above statements. One or more statements relating to any one of the first to tenth aspects as defined above may equally apply to the invention as defined in the eleventh aspect.

In a twelfth aspect, the present invention may be said to consist of a long-range wireless power transfer system comprising:

20 a transmitting antenna that is a phase array antenna having an array of antenna elements that are radiating elements, the transmitting antenna being configured to receive electric power from a power source as an input, convert the input electric power into electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam, wherein the collimated or substantially collimated beam is configured to be produced by controlling phase and amplitude of each of the antenna elements; and

25 a rectifying antenna positioned or configured to be positioned at a distance from the transmitting antenna, the rectifying antenna configured to receive the directional beam and convert the electromagnetic energy into electricity,

wherein each antenna element comprises a radome element formed as a hemispherical shell or a substantially hemispherical shell.

30

In a thirteenth aspect, the present invention may be said to consist of a long-range wireless power transfer system comprising:

a transmitting antenna that is configured to receive electric power from a power source as an input, convert the input electric power into electromagnetic energy, and

radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam; and

a rectifying antenna positioned or configured to be positioned at a distance from the transmitting antenna, the rectifying antenna configured to receive the directional
5 beam and convert the electromagnetic energy into electricity,

wherein, the transmitting antenna is a phased array antenna having an array of antenna elements that are radiating elements, each antenna element comprises a radome element formed as a hemispherical shell or a substantially hemispherical shell.

One or more following statements may apply to the invention as defined above
10 in the twelfth and thirteenth aspects.

In one embodiment, the electromagnetic energy is a microwave energy.

In one embodiment, the collimated or substantially collimated beam is produced by controlling phase and amplitude of each of the antenna elements.

In one embodiment, each antenna element has an electronically controlled phase
15 shifter to facilitate electronic steering of the directional beam.

In one embodiment, each antenna element comprises at least a low-loss dielectric element made out of a low-loss dielectric material.

In one embodiment, each antenna element is a patch antenna element.

In one embodiment, each antenna element is made from metallic segments
20 etched onto a substrate.

In one embodiment, the radome element has a thin radome element wall with a wall thickness of no more than one quarter of a wavelength in a material that the radome element wall is made of.

In one embodiment, the wavelength of the electromagnetic energy in a form of
25 electromagnetic waves in the material that the radome element wall is made of is given by:

$$\lambda_d = \frac{\lambda}{n_d}$$

where λ_d is the wavelength of electromagnetic waves in the radome wall material, λ is the free-space wavelength and n_d is the refractive index of the radome wall material.

In one embodiment, the radome element is larger than each antenna element to cover the antenna element.

In one embodiment, the transmitting antenna has a transmitting antenna aperture.

5 In one embodiment, the transmitting antenna aperture has a dimension, D , aperture efficiency, ϵ , such that for wavelength, λ , and distance, R , between transmitting antenna and down-range phase-correcting device or rectenna, at least one of the following inequalities apply:

$$D^2 \geq 4\lambda R/\epsilon$$

10 $D^2 \geq \pi\lambda R/\epsilon$

In one embodiment, $D^2 \geq 4\lambda R/\epsilon$ applies for a circular aperture of diameter, D .

In one embodiment, $D^2 \geq \pi\lambda R/\epsilon$ applies for a square aperture of side dimension, D .

15 In one embodiment, size of the rectifying antenna is same or substantially the same as the size of the transmitting antenna aperture.

In one embodiment, the rectifying antenna is part of a rectifying antenna structure comprising solid state rectifying components wherein the rectifying antenna comprises an array of receiving antenna elements that are electrically connected to the solid -state rectifying components.

20 In one embodiment, the solid-state rectifying components are Schottky diodes.

In one embodiment, the rectifying antenna is part of a rectifying antenna structure, the rectifying antenna structure comprising:

a central core having a first portion and a second portion that are opposite to each other, wherein the central core is made of at least one dielectric material;

25 a dielectric skin comprising a metasurface disposed to a first portion of the central core and the rectifying antenna is positioned at the second portion of the central core; and

a rectifying circuit that is electrically connected to the rectifying antenna to rectify the incoming electromagnetic energy to produce a direct current (DC) output.

30 In one embodiment, the rectifying antenna is formed as a rectifying antenna array having a plurality of rectifying antenna elements.

In one embodiment, the central core is made of a low-loss dielectric material.

In one embodiment, thickness of the central core lies between one-tenth and one whole wavelength in the dielectric material that the central core is made of.

In one embodiment, the central core has a refractive index of between 1 and 3.

5 In one embodiment, thickness and refractive index of the central core vary over the surface of the rectifying antenna to achieve impedance match that is desired.

In one embodiment, the system further comprises at least one phase correcting device positioned or configured to be positioned between the transmitting antenna and the rectifying antenna, the at least one phase correcting device being configured to:

10 receive the directional beam radiated from the transmitting antenna,
perform phase correcting operation on the directional beam for maintaining the directional beam as the collimated or substantially collimated beam and for increasing a range to which the directional beam is maintained as the collimated or substantially collimated beam, and

15 transmit the phase corrected directional beam to the free space.

In one embodiment, the at least one phase correcting device is an electromagnetic wave transparent phase correcting device.

In one embodiment, the at least one phase correcting device is a straight through phase correcting device that allows the directional beam that is incident on it to travel through in a straight direction without diverting the directional beam into another direction.

In one embodiment, the straight-through phase correcting device is a composite multi-layer structure comprising at least three layers with a central dielectric core sandwiched between at least two dielectric skins on two opposite portions of the dielectric core.

In one embodiment, the central dielectric core is of at least three layers with at least one metamaterial layer sandwiched between two dielectric support layers.

In one embodiment, the at least one metamaterial layer is a metasurface.

In one embodiment, the dielectric skins comprise metasurfaces to simultaneously provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

In one embodiment, the metasurfaces are incorporated on the dielectric skins.

In one embodiment, thickness of the dielectric skin on each portion of the dielectric core is less than one-tenth of a wavelength in a material that the dielectric skin is made of.

5 In one embodiment, the dielectric core is made from a low-loss dielectric material.

In one embodiment, thickness of the dielectric core is between one-tenth and one whole wavelength in the dielectric material that the dielectric core is made of.

In one embodiment, the dielectric core has a refractive index between 1 and 3.

10 In one embodiment, the at least one phase correcting device is a reflective phase correcting device that allows the directional beam to divert to another direction at an angle by reflecting the directional beam that is incident on the reflective phase correcting device into said another direction.

15 In one embodiment, the angle is between 60 degrees and 120 degrees, preferably, 90 degrees or substantially 90 degrees.

In one embodiment, the reflective phase correcting device is a composite multi-layer structure having at least three layers with a central dielectric core sandwiched between a dielectric skin on a first portion of the dielectric core and a reflective ground plane on a second portion of the dielectric core, the second portion being opposite the
20 first portion.

In one embodiment, the dielectric skin comprises a metasurface to simultaneously provide phase shift to an incoming wavefront and complete reflection with minimal loss of power.

In one embodiment, the metasurface is incorporated on the dielectric skin.

25 In one embodiment, the system is an earth-based system.

In one embodiment, the system is configured to wirelessly transfer the power up to and beyond 100 meters.

In a fourteenth aspect, the present invention resides in a long-range wireless power transfer method, the method comprising at least the following steps:

providing a long-range wireless power transfer system comprising a transmitting antenna that is a phased array antenna having an array of antenna elements that are radiating elements and a rectifying antenna that are operatively connected to each other;

5 using the transmitting antenna to receive an electric power from a power source as an input, convert the input electric power into electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam, the collimated or substantially collimated beam being produced by controlling phase and amplitude of each of the antenna elements; and
10 using the rectifying antenna to receive the directional beam and convert the electromagnetic energy into electricity.

In a fifteenth aspect, the present invention resides in a long-range wireless power transfer method, the method comprising at least the following steps:

providing a long-range wireless power transfer system comprising a transmitting antenna and a rectifying antenna that are operatively connected to each other;
15 using the transmitting antenna to receive an electric power from a power source as an input, convert the input electric power into electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam; and
20 using the rectifying antenna to receive the directional beam and convert the electromagnetic energy into electricity.

One or more following statements may apply to the invention as defined above in the fourteenth and fifteenth aspects.

In one embodiment, the method further comprises:
25 positioning the phase correcting device between the transmitting antenna and the rectifying antenna.

In one embodiment, the method further comprises:
30 using the phase correcting device to receive the directional beam radiated from the transmitting antenna, perform phase correcting operation on the directional beam for maintaining the directional beam as the collimated or substantially collimated beam and for increasing a range to which the directional beam is maintained as the collimated or substantially collimated beam, and transmit the phase corrected directional beam to the free space to be received by the rectifying antenna.

In one embodiment, the method further comprises positioning the phase correcting device at or near a distance from the transmitting antenna at which the
35 directional beam starts to diverge.

In one embodiment, the system is an earth-based system.

In one embodiment, the system is configured to transfer the power up to and beyond 100 meters.

5 In one embodiment, the long-range wireless power transfer method is configured to transfer the power up to and beyond 100 meters.

In one embodiment, the system is the one as defined in one or more statements of the twelfth or thirteenth aspect.

10 Other aspects of the invention may become apparent from the following description which is given by way of example only and with reference to the accompanying drawings.

In this specification where reference has been made to patent specifications, other external documents, or other sources of information, this is generally for the purpose of providing a context for discussing the features of the invention. Unless specifically stated otherwise, reference to such external documents is not to be construed
15 as an admission that such documents, or such sources of information, in any jurisdiction, are prior art, or form part of the common general knowledge in the art.

For purposes of the description hereinafter, the terms "upper", "lower", "right", "left", "vertical", "horizontal", "top", "bottom", "lateral", "longitudinal" and derivatives thereof shall relate to the invention as it is oriented in the drawing figures. However, it is
20 to be understood that the invention may assume various alternative variations, except where expressly specified to the contrary. It is also to be understood that the specific devices illustrated in the attached drawings and described in the following description are simply exemplary embodiments of the invention. Hence, specific dimensions and other physical characteristics related to the embodiments disclosed herein are not to be
25 considered as limiting.

It is acknowledged that the term "comprise" may, under varying jurisdictions, be attributed with either an exclusive or an inclusive meaning. For the purpose of this specification, and unless otherwise noted, the term 'comprise' shall have an inclusive meaning, allowing for inclusion of not only the listed components or elements, but also
30 other non-specified components or elements. The terms 'comprises' or 'comprised' or 'comprising' have a similar meaning when used in relation to the system or to one or more steps in a method or process.

As used hereinbefore and hereinafter, the term "and/or" means "and" or "or", or both.

As used hereinbefore and hereinafter, "(s)" following a noun means the plural and/or singular forms of the noun.

5 When used in the claims and unless stated otherwise, the word 'for' is to be interpreted to mean only 'suitable for', and not for example, specifically 'adapted' or 'configured' for the purpose that is stated.

 Unless stated otherwise, a phase correction device may be any suitable device for correcting phase to allow directional beam to be collimated or substantially
10 collimated. Some non-limiting examples of phase correction device include phase plate, phase corrector, aberration corrector, wave-plate, wave-front corrector, phase correcting relay, collimator or a combination thereof.

 Unless stated otherwise, the term 'earth-based' is to be interpreted as being fully based within the planet Earth and/or within its atmosphere and excludes any system and
15 component(s) of the system located outside the stratosphere of the Earth.

 Unless stated otherwise, the system that is 'earth-based' is to be interpreted excludes any system and component(s) of such system that are satellite based.

 Unless stated otherwise, the term 'free space' does not refer to outer space. Rather it refers to the space that is devoid of physical obstructions that might hinder
20 propagation of a signal or beam. In the context of this patent specification, the term 'physical obstruction' suggests trees, buildings, hills, mountains, and other significant material objects and does not suggest atomic, molecular, or other particulate matter that is/are commonly present in the atmosphere. Neither does the term 'physical obstruction' suggest climatic conditions such as water vapor, rain, snow, sleet, or hail.

25 It is known that the word 'substantially' can in some instances, be used to broaden the term. It should be stated that, in this specification, use of the word 'substantially' with a term, to define a characterizing feature(s), gets all the benefit (i.e. benefit of any broadening) afforded by the use of the word 'substantially', and also includes within its scope the feature(s) being the term exactly (without broadening). For
30 example, if a feature is described/defined in the present specification as being 'substantially collimated' then that includes, within its scope, the feature being 'close' to collimated (in so far the word 'substantially' is deemed to broaden the term 'substantially'), and also includes within its scope the feature being 'exactly' collimated.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention will be described by way of example only and with reference to the drawings, in which:

- Figure 1:** is schematic diagram of a preferred example of a long-range wireless power transfer system according to the present invention.
- Figure 2:** shows a configuration for gain enhancement of a transmitting antenna using a radome element.
- Figure 3A:** shows an example of measured radiation pattern of the transmitting antenna with radome element of Figure 2 in place.
- Figure 3B:** shows an example of measured radiation pattern of the transmitting antenna without the radome element of Figure 2 in place.
- Figure 4:** is a schematic diagram showing a structure of a straight-through phase correcting device according to an embodiment of the present invention. Also, shown is the flow direction of directional electromagnetic beam when the straight-through phase correcting device is used as part of the system of Figure 1.
- Figure 5:** is a schematic diagram showing a structure of a reflective phase correcting device according to an embodiment of the present invention. Also, shown is the flow direction of directional electromagnetic beam when the reflective phase correcting device is used as part of the system of Figure 1.
- Figure 6:** is a schematic diagram showing a preferred example of a phase correcting device according to the present invention. Figures 7-12 relate to the schematic diagram of Figure 6.
- Figure 7:** show a normalised shunt susceptance b_1 versus phase delay through the device of Figure 6 for various phase factors.
- Figure 8:** show a normalised shunt susceptance b_2 versus phase delay through the device of Figure 6 for various phase factors.
- Figure 9:** show behaviour of b_1 and b_2 versus phase delay through the device of Figure 6 for dielectric thickness equivalent to 90 degrees.
- Figure 10A:** shows an example of an array of circular patches on a rhombic lattice.
- Figure 10B:** shows an example of an array of square patches on a square lattice.
- Figure 10C:** shows an example of an array of crosses on a square lattice.
- Figure 11:** shows a typical behaviour of a patch and aperture-type FSS layers (metasurfaces) as a function of frequency.
- Figure 12:** is a schematic diagram showing an application of the phase correcting device of Figure 6.

Figure 13: is a schematic diagram showing a schematic diagram of rectifying antenna structure according to an embodiment of the present invention. Also, shown is the flow direction of directional electromagnetic beam when the of rectifying antenna structure is used as part of the system of Figure 1.

5 **Figure 14:** is a schematic diagram showing a schematic representation of a phase array transmitting antenna used to transmit electromagnetic energy in the form of a collimated beam or a substantially collimated beam with little angular divergence to a rectifying antenna. Figures 15, 16A, 16B, 17, 18A, 18B, 19A, 19B , 20A and 20B relate to the schematic diagram of Figure 14.

10 **Figure 15:** shows the computed magnitude of the electric field strength along the range axis for a square antenna of width D , operating at a single wavelength, λ .

Figure 16A: shows a phase distribution of electric field across transverse axis at 20.8m range in an unfocussed case.

15 **Figure 16B:** shows an amplitude of electric field across transverse axis at 20.8m range in an unfocussed case.

Figure 17: is a schematic diagram showing an antenna with a spherical phase distribution applied across the aperture plane.

Figure 18A: shows a phase plot at a range $R'_{max} = 17.2\text{m}$ for a focused case.

Figure 18B: shows an amplitude plot at a range $R'_{max} = 17.2\text{m}$ for a focused case.

20 **Figures 19A and 19B :** show phase distribution of electric field across aperture plane.

Figures 20A and 20B: are contour plots showing spatial distribution of the electric field strength in the unfocused and focused cases.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

25 Transferring power wirelessly using electromagnetic waves (such as, but not limited to, microwaves) over a long distance in an efficient manner can be difficult. This is mainly because the electromagnetic waves or beams can easily diverge to other directions during transmission of energy. This means the energy received at the receiving end may not be sufficient to provide power.

30 Therefore, is desirable to have a system and method for efficient transfer electrical power over a reasonably long-distance with a very minimal waste or loss of energy during transmission. It is also desirable to have a system and method for efficient transfer of electrical power that is not too complex and cost efficient to implement and maintain.

35 The present invention relates to a long-range wireless power transfer system and method for facilitating long-range wireless power transfer using a beam waveguide.

The range of wireless power transfer system may be up to and beyond 100 meters. The present invention uses gain-enhanced radiating elements and meta-surfaces to facilitate down-range impedance-matched, collimated or substantially collimated electromagnetic beams for efficient wireless power transfer. The present invention may also use phase
5 correcting device(s) such as straight through phase correcting device(s) and/or reflective phase correcting devices for extending the useful range of a collimated or substantially collimated electromagnetic beam.

With reference to Figure 1, there is shown an example of a long-range wireless power transfer system 100 of the present invention. As shown, the system 100
10 comprises a transmitting antenna 110, at least one phase correcting device 120, 122 and a rectifying antenna 130.

The transmitting antenna 110 is configured to receive an electric power from a power source (AC source) as an input, convert the input electric power into electromagnetic energy (for example microwave energy) and radiate the electromagnetic
15 energy into free space as a directional beam. For example, a transmitting antenna 110 may comprise a receiver or transceiver for receiving an electric power from a power source as an input and a convertor for converting the input electric power into electromagnetic energy to enable the transmitting antenna 110 to radiate/transmit the electromagnetic energy into free space as a directional beam 102. In Figure 1, arrows
20 101 show direction of the directional beam 102. Directional beam 102 may comprise a plurality of rays.

In Figure 1, two phase correcting devices 120, 122 are shown. Phase correcting device 120 is a straight through phase correcting device and phase correcting device 122 is a reflective phase correcting device and these will be described later in this
25 specification in more detail. Any number of phase correcting devices may be used as desired or as necessary. For example, the system 100 may only use straight through phase correcting device 120. Alternatively, the system 100 may only use reflective phase correcting device 122. Similarly, the system 100 may use more than one straight through phase correcting device 120 and/or more than one reflective phase correcting
30 device 122.

As illustrated in Figures 1, 4 and 5, the phase correcting devices 120, 122 are configured to receive the directional beam 102 radiated from the transmitting antenna 122 in the direction shown by arrows 101 . Upon receiving the directional beam 102, the phase correction devices 120, 122 are configured to perform phase correcting operation
35 on the directional beam. Such phase correction operation allows the phase correcting devices 120, 122 to maintain the directional beam as a collimated or substantially

collimated beam. Also, by correcting the phase of the directional beam using phase correcting devices 120, 122, range to which the directional beam 102 is maintained as collimated or substantially collimated beam can be increased. This is described later in more detail. After performing any desired phase correcting operation, the phase
5 correcting devices 122, 124 will then transmit the phase corrected directional beam to free space.

The rectifying antenna 130 (which is a rectenna) is configured to receive directional beam from the phase correcting device (in this example from phase correcting device 122) and convert the electromagnetic energy into electricity (DC electricity). For
10 example, the rectifying antenna 130 may comprise a receiver for receiving the directional beam from the phase correcting device 122 as an input and a convertor for converting the input electric power into electromagnetic energy.

As shown in Figure 1, the phase correcting devices 120, 122 and rectifying antenna 130 are positioned at different distances from the transmitting antenna with the
15 phase correcting structure devices 120, 122 positioned between/intermediate the transmitting antenna 110 and the rectifying antenna 130. In Figure 1, each of the three distances as shown as R, but each of those three distances need not be the same.

It can be appreciated that the directional beam transmitted from the transmitting antenna 110 can maintain the collimation or substantial collimation up to a
20 particular range after which the directional beam will start to diverge resulting in a loss of energy transfer. Such loss of energy is not desirable for efficient power transfer. Therefore, by having at least one phase correcting device 120, 122 at a suitable distance (preferably, at or near the distance at which the directional beam starts to diverge), collimation or substantial collimation of the directional beam can be maintained/
25 restored. Consequently, the range to which the directional beam 102 is maintained as collimated or substantially collimated can be increased thereby allowing the system 100 to provide efficient wireless transfer of the power over a long distance.

The system 100 is most preferably earth-based and this is advantageous as none of the components of the system 100 need to be based in satellite or in outer
30 space.

The transmitting antenna 110, the phase correcting devices 122, 124 and the rectifying antenna 130 according to the embodiments of the present invention will now be described in more detail.

Transmitting antenna

As mentioned above, the transmission antenna 110 is configured to convert input electric power into electromagnetic energy (e.g. microwave energy) that is then radiated into free space to produce a collimated (preferably highly, i.e., substantially collimated), directional beam 102.

5 The transmitting antenna 110 may be a phased array antenna having an array of antenna elements that are radiating elements and the collimated or substantially collimated beam may be produced by controlling the phase and amplitude of each of the antenna elements. Figure 2 shows a single antenna element 112 of an array of antenna elements of the transmitting antenna 110. Each of the antenna element 112 may have
10 an electronically controlled phase shifter to facilitate electronic beam steering, i.e. to facilitate steering of the directional beam 102.

Each of the antenna element 112 may be a patch antenna element and each antenna element 112 may be made from metallic segments etched into a substrate. In other words, each radiating element may consist of a patch antenna configuration made
15 from metallic segments etched onto a substrate.

As shown in Figure 2, the antenna element 112 may comprise a radome element 114 which can be a low loss dielectric element. The radome element 114 may be hemispherical, substantially hemispherical or similar dome shaped element to allow for antenna gain enhancement. The radome element 114 may be a thin-walled radome
20 element. Preferably, the wall thickness of the radome element is no more than one quarter of a wavelength thick in the material that the radome wall is made of. The wavelength of electromagnetic waves in the radome wall material, denoted λ_d is given by the formula:

$$\lambda_d = \frac{\lambda}{n_d}$$

25 ... (1)

where in the above, λ is the free-space wavelength and n_d is the refractive index of the radome wall material.

As shown the radome element 114 is larger than the antenna element 112 to
30 cover the antenna element 112.

As mentioned above, the transfer of power, wirelessly, is efficient only if the energy is confined to a collimated or substantially collimated directional beam 102,

preferably highly or substantially collimated beam. Due to diffraction, collimation or substantial collimation of the directional beam cannot be maintained over an arbitrarily long distance in front of the transmitting antenna 110. For example, for a circular antenna aperture of size, D , radiating at a wavelength λ , the maximum distance, R , over which a collimated or substantially collimated beam exists is given by:

$$R = \frac{D^2 \epsilon}{4\lambda}$$

... (2)

In equation (2) above, ϵ is the aperture efficiency of the electric field distribution extending across the antenna face.

As an example, for an antenna with aperture dimension $D = 25\text{m}$, radiating with a uniform aperture distribution ($\epsilon = 1$) at a wavelength of 0.050m , gives a useful collimated or substantially collimated beam out to a range of about $3,000\text{m}$ (3Km).

This range can be extended if each radiating element, i.e. antenna element 112 of the transmitting array, i.e. transmitting antenna 110 can be modified to increase its far-field directivity. This can be achieved by adding structures placed in front of the antenna elements, preferably patch antenna elements. As shown in Figure 2, one way to implement this is by covering each antenna element 112 with a thin-walled, radome (shell) element 114 of diameter larger (preferably slightly larger) than that of the antenna element 112. The radome element 114 may be a low-loss dielectric element comprising at least a dielectric material.

Such radome element 114 can radiate a scattered wave that can constructively interfere with the main radiation pattern of the transmitting antenna 110, more specifically radiation pattern of each transmitting antenna element, to produce directivity enhancement in the forward direction. This effectively increases the electrical size of the antenna aperture over and above its actual physical size thereby enhancing the collimated or substantially collimated range of the directional beam 102 as per equation (2).

Figure 3a shows an example of measured radiation pattern of the transmitting antenna element 112 with the radome element 114 in place and Figure 3b shows an example of measured radiation pattern of the transferring antenna 110 without such radome element 114 in place. As shown in Figure 3a, there is a boresight gain enhancement of $+2.5\text{dB}$ as compared to bare antenna of Figure 3b that is normalised to 0db on boresight.

To illustrate this in more detail, the far field gain, G , of any square antenna of dimension D and aperture efficiency ϵ is given by:

$$G = \frac{4\pi}{\lambda^2} D^2 \epsilon$$

... (3)

5 Thus, the distance/range over which useful collimation or substantial collimation of directional beam 102 can be maintained is directly proportional to the far-field gain. Enhancing the gain of individual antenna element 112 therefore enhances the range of the directional beam 102 by the same factor. Hence, it can be appreciated that the use of gain-enhancing structures such as a radome elements 112 over antenna elements 112
10 increases the range of wireless power transfer.

Phase correcting device

 In addition or alternative to the use of gain-enhanced radiating elements, i.e. antenna elements 112 and radome element 114 (radome shells which can be a dielectric radome shells) for the transmitting antenna 110 as described above, another method of
15 increasing the range of the collimation or substantial collimation of the directional beam 102 is to use one or more phase correcting structures/phase correcting device(s) 120 in the path of the directional beam 102. As explained above and shown in Figure 1, system 100 may comprise two phase correcting devices namely the straight through phase correcting device 120 and the reflective phase correcting device 122. Also, as mentioned
20 above any number of phase correcting devices may be used as desired or as necessary. In certain embodiments, only one phase correcting device 120 or 122 may be used.

 In one example, the system 100 according to the present invention may comprise enhanced radiating elements, i.e. antenna elements 112 and radome element 114 (radome shells which can be a dielectric radome shells) for the transmitting antenna
25 110 as described above, but no phase correcting device.

 The straight-through phase correcting device 120 is for allowing the directional beam that is incident on it to travel through the device 120 in a straight direction without diverting the directional beam into another direction. The straight through phase correcting device 120 can transmit a high proportion of power incident on and modify the
30 phase of the wavefront of the directional beam 102 in a desired fashion. On the other hand, the reflective phase correcting device 122, is for allowing the directional beam 102 to divert to another direction at an angle by reflecting the directional beam 102 that is incident on the reflective phase correcting device into another direction. The reflective

phase correcting device 122 can reflect all of the power incident on its surface but modify the phase of the wavefront of the directional beam 102 in a desired fashion, for the purpose of directing the incident wave/incident directional beam at an angle, preferably, but not exclusively, 90 degrees as shown schematically in Figure 1. The angle may be
5 any angle between 60 degrees and 120 degrees.

As shown in Figure 1, the straight-through phase correcting device 120 is preferably placed down or configured to be placed down at a distance R from the transmitting antenna 110. Preferably, the distance R is measured from aperture of the transmitting antenna 110. The straight-through phase correcting device 120 is designed
10 to perform phase correcting operation on the directional beam 102 (wavefront on the directional beam 102) emanating from the transmitting antenna 110.

The straight-through phase correcting device 120 may introduce a phase delay distribution across extent of the directional beam 102 incident on it such that any diverging beam behaviour caused by a non-planar incident wavefront of the directional
15 beam 102 is corrected, as in a manner of a lens. The emerging wavefront of the directional beam 102 from the straight-through phase correcting device 120 will then be similar to that produced at the aperture plane of the transmitting antenna 110 and will therefore largely reproduce the propagation characteristics of the transmitting antenna 110 over the range from zero to R, for a similar distance in front of the straight-through
20 phase correcting device 120 or the plane of the straight-through phase correcting device 120. It can therefore be appreciated that this will extend the useful range over which a collimation or substantial collimation of the directional beam 102 is maintained. Multiple straight-through phase correcting devices may be cascaded to further increase the useful range of the collimated or substantially collimated beam.

It may also be important to design a phase correcting device so that the wavefront of the directional beam 102 that is incident on the phase correcting device suffers minimal reflection loss, i.e. the phase correcting device is impedance matched to the directional beam/wave incident on it. This can maximise the amount of power transmitted through such phase correcting device which may be an important aspect in
25 efficient wireless power transfer.
30

Therefore, one aspect of the present invention resides design of a phase correcting device, such as a straight-through phase correcting device 120 that utilises at least two metasurfaces to simultaneously provide any desired phase shift whilst maintaining an impedance-matched structure with minimal losses.

The straight-through phase correcting device 120 as shown in Figure 4 is preferably electromagnetically transparent.

The straight-through phase correcting device 120 may be a composite multi-layer structure which in this example is a three-layer structure with a central dielectric core 152 sandwiched between outer layers that are dielectric skins 151, 153 on two opposite portions of the dielectric core 153. The multi-layer-structure can comprise more than three layers. In certain embodiments, the dielectric core can be of at least three layers with at least one metamaterial layer sandwiched between two dielectric support layers. That metamaterial layer may be a metasurface. An example of such an embodiment is described later with reference to Figures 6 to 11.

The dielectric skins 151, 153 comprise/incorporate metasurfaces to simultaneously provide phase shift whilst maintaining an impedance matched structure with minimal loss of power. The dielectric skins 151, 153 are preferably thin with the thickness of each skin being no more than one tenth of a wavelength in the dielectric medium of the skins. The dielectric medium of the skins is the dielectric material that the skins are made of.

The dielectric core 152 is preferably made from a low-loss dielectric material such as a foam. The thickness of the dielectric core is preferably between one-tenth and one whole wavelength in the medium of the dielectric core. The medium of the dielectric core is the material that the dielectric core is made of. The dielectric core preferably has a refractive index of between 1 and 3. The thickness and refractive index may vary over the surface of the device 120 to achieve the desired phase shift.

In Figure 4, the directional beam 102a that is incident on the device 120 is shown as a diverging wavefront and the directional beam 102b that is transmitted from the device 120 is shown as a phase-corrected and collimated or substantially collimated wavefront. Each of the directional beams 102a, 102b may comprise a plurality of rays.

The phase and amplitude of the transmitted and reflected waves from the device 120 may be determined using the standard equivalent transmission line method involving the so-called 'ABCD matrix approach'.

A two-by-two matrix with elements A, B, C & D can be defined for each layer with the overall system matrix found by matrix multiplying all three individual matrices as follows:

$$\begin{bmatrix} A & B \\ C & D \end{bmatrix} = \begin{bmatrix} A_1 & B_1 \\ C_1 & D_1 \end{bmatrix} \begin{bmatrix} A_2 & B_2 \\ C_2 & D_2 \end{bmatrix} \begin{bmatrix} A_1 & B_1 \\ C_1 & D_1 \end{bmatrix}$$

... (4)

In the above matrices the matrix elements with subscript '1' refer to the metasurfaces which are taken as identical in design for both outer layers that are dielectric skins 151, 153 on two opposite portions of the dielectric core 152. This gives a symmetric structure which is required for impedance matching purposes. The metasurfaces are assumed to have negligible thickness even though they may reside on a fibre-glass or plastic substrate (taken as electrically thin).

Similarly, in the above matrices, the matrix elements with subscript '2' refer to the central dielectric core 152. For the intended application, the directional beam 102 that is incident on the device 120 may impinge on the device 120 at or close to normal incidence. Under these conditions, the matrix elements can be defined in terms of the thickness and refractive index of the various materials as follows:

For the (thin) metasurfaces/dielectric skins 151, 153:

$$A_1 = D_1 = 1$$

$$B_1 = 0$$

$$C_1 = jb$$

where b is the normalised shunt susceptance of the metasurface and $j = \sqrt{-1}$

For the dielectric core 152:

$$A_2 = D_2 = \cos\theta$$

$$B_2 = \frac{j\sin\theta}{n}$$

$$C_2 = jn\sin\theta$$

$$\theta = knd$$

$$k = \frac{2\pi}{\lambda}$$

where λ is the free-space wavelength, n the refractive index of the core material and d is its thickness.

Inserting the above expressions for the matrix elements into equation (3) and performing the necessary matrix multiplication gives the following for the system matrix elements:

$$\begin{aligned} A &= D = \cos\theta - \frac{b\sin\theta}{n} \\ B &= \frac{j\sin\theta}{n} \\ C &= 2jb\cos\theta + jn\sin\theta - \frac{jb^2\sin\theta}{n} \end{aligned} \quad \dots (5)$$

The transmission and reflection coefficients, T and Γ , respectively, are defined in terms of the ABCD matrix elements as follows:

$$\begin{aligned} T &= \frac{2}{A + B + C + D} \\ \Gamma &= \frac{(A + B) - (C + D)}{A + B + C + D} \end{aligned}$$

...

Inspection of the expression in equation (6) for the reflection coefficient, Γ , shows that for the case of a perfectly matched structure, giving a reflection coefficient of zero, requires that both $A = D$ and $B = C$.

The condition $A = D$ is automatically satisfied due to the symmetry of the structure. Imposing the other condition, $B = C$, gives the following expression on using the matrix element expressions in equation (5):

$$b^2 - 2bncot\theta - n^2 + 1 = 0$$

The two solutions to this quadratic equation are:

$$b = n \cot \theta \pm \sqrt{n^2 \operatorname{cosec}^2 \theta - 1}$$

... (7)

Equation (7) is the key expression that specifies the required metasurface properties via the normalised shunt susceptance, b , in terms of the refractive index, n , and electrical thickness, θ , of the central dielectric core 152.

If the transmission coefficient, T , is now evaluated using equation (5) but the conditions for a perfectly matched structure, namely, $A = D$ and $B = C$, is also imposed the expression is obtained:

$$T_0 = \frac{1}{A + B} = \frac{1}{\left[\cos \theta - \frac{b \sin \theta}{n} + \frac{j \sin \theta}{n} \right]}$$

where, the subscript '0' has been used for the transmission coefficient to indicate that it applies when the reflection coefficient is zero.

Now using the solutions for b given by equation (6) gives the following:

$$\cos \theta - \frac{b \sin \theta}{n} = \mp \sqrt{1 - \frac{\sin^2 \theta}{n^2}}$$

which gives:

$$T_0 = \frac{1}{\left[\frac{j \sin \theta}{n} \mp \sqrt{1 - \frac{\sin^2 \theta}{n^2}} \right]} = \frac{1}{\left[j \chi \mp \sqrt{1 - \chi^2} \right]}$$

... (8)

where $\chi = \sin \theta / n$

The expression for T_0 in equation (8) can be re-written in polar form as a modulus and phase, namely, $T_0 = |T_0| \exp(j\phi_0)$, where ϕ_0 is the phase function (radians) for a matched structure.

From equation (8), evaluating the modulus of $T_0 = |T_0| = \sqrt{\chi^2 + 1 - \chi^2} = 1$. This confirms the expected result for an impedance-matched structure with zero reflection coefficient, that is, 100% transmission (neglecting any dissipative losses). Again, from (8), the phase of T_0 is given by:

5

$$\phi_s = \tan^{-1} \left[\frac{\chi}{\mp \sqrt{1 - \chi^2}} \right]$$

... (9)

Using the results of equations (7) and (9), we can find the required normalised shunt susceptance of the metasurface for a matched impedance condition for a given phase shift introduced by the structure of the phase c . The resulting expression is as follows:

10

$$b = \frac{(\cos\theta \pm \cos\phi_0)}{\sin\phi_0}$$

... (10)

Equations (9) and (10) guide the design procedure for the impedance-matched device 120. For a given phase shift, ϕ_0 , required at a given position over the surface of the device 120 to phase-correct the incoming wavefront, the core design required (thickness and refractive index) are defined by equation (8) through the parameter χ .

15

The metasurface properties (determined by b) are then given by the expression in equation (10) for the core design arising from equation (9).

20

Thus, impedance matching can be obtained for device 120 for any specified phase shift by adjusting the design of the metasurface at each desired location on the surface of the device 120. This optimises power transfer through the device 120 whilst producing a phase-corrected wavefront that extends the useful range of the electromagnetic directional beam 102.

25

The reflective phase correcting device 122 is used to divert the directional beam, typically, but not exclusively, at right angles to the incident directional beam is similar in form to the straight-through phase correcting device 120 as described above, except that one of the dielectric skins incorporating metasurfaces may be replaced with a metallic ground plane, which is a reflective ground plane. This is shown in Figure 5 where the central dielectric core 162 is sandwiched between a dielectric skin 161 incorporating a

30

metasurface on one portion (front face) of the central core 163 and a metallic ground plane 163 on the opposite portion (rear face) of the dielectric core 163. Such arrangement ensures complete reflection of the directional beam 102 that is incident on the reflective phase correcting device 122. Incident radiation/directional beam impinging on the single metasurface layer (i.e. dielectric skin 162 incorporating a metasurface) of the device 122 can have its phase front modified by the metasurface. Such design allows for re-collimated or substantially re-collimated reflected directional beam. In Figure 5, the diverging wavefront of the directional beam 102 that is incident on the device 122 is denoted by reference numeral 102c and the directional beam 102 that is transmitted from the device 122 is denoted by reference numeral 102c. As shown, the directional beam 102c is a diverging beam and the directional beam 102b is a phase corrected and collimated or substantially collimated beam.

Another embodiment of the phase correcting device according to the present invention that is in the form of an impedance matched multi-layer structure or metalens will now be described with reference to Figures 6 to 11. The phase correcting device described with reference to Figures 6 to 11 may be used in addition to or in alternative to the phase correcting devices 120 and 122 in the system 100 as described above.

The phase correcting device according 120a of Figure 6 is a passive planar structure incorporating multiple metasurface layers within a composite sandwich configuration. The metasurfaces in this case are arrays of metallic patches or apertures in a metallic screen, typically etched from a thin metal-clad substrate. The electromagnetic properties of the metallic metasurfaces are controlled by the size, shape and periodicity of the array elements.

With the use of phase correcting device 120a (i.e. metalens), a means of imparting given phase advance or phase delay onto an incident plane wave impinging on the structure at, or near, normal incidence, whilst eliminating any reflected wave from the front surface of the structure can be provided. This latter property is equivalent to matching the input wave impedance of the structure to that of a free space.

In certain embodiments, the present invention resides in the construction of a planar lens (metalens) for focusing or steering a beam of incident electromagnetic radiation whilst maximising the electromagnetic wave energy that is transmitted through the lens. The impedance-matched property of the lens structure, plus the use of low-loss dielectric materials such as low-density foams, and thin-dielectric polymer substrates, ensures that energy lost through surface reflections and dissipation is minimised,

One aspect of the lens design is to select suitable electromagnetic properties for the metasurfaces such that a prescribed phase advance or delay can be achieved whilst simultaneously eliminating reflections.

One other advantageous aspect of this design is that a constant overall panel thickness can be used. This is achieved by using three metasurface layers, each separated from each other by a fixed thickness of low-density dielectric foam, i.e. by dielectric support layer 152a and dielectric support layer 152b. There are sufficient degrees of freedom in the design process to allow a constant panel thickness to be used for all desired phase shifts whilst simultaneously achieving an impedance match. This greatly simplifies the design and manufacture of the lens (metalens) structure.

Focusing or beam deflection properties are achieved by constructing a large planar sandwich structure divided into a number of discrete zones, each zone having its own prescribed phase shift. Each zoned panel has a particular metasurface design to achieve the necessary phase properties.

For each phase zone, one metasurface may be centrally located in the multi-layer sandwich, whilst the other two metasurfaces may be placed on the outermost surfaces of the sandwich. The outer layers may have identical properties, whilst the central metasurface may have different properties, in general. This results in a sandwich structure that has mirror symmetry about its central plane.

The choice of metasurface properties can also be important. There is a mathematical relationship between the properties of the outer metasurfaces or metasurface layers 151a, 153a and central metasurface or metasurface layer 155a that may need to be satisfied to achieve a given phase shift whilst maintaining an impedance-matched surface. Thus, the metasurface properties are not independent of each other for the phase correcting device 120a to work in the desired way.

As mentioned above, the phase correcting device 120a in Figure 6 is in the form of an impedance-matched planar metalens structure using three metasurfaces 151a, 153a and 155a and two dielectric cores 152a, 152b. Therefore, the phase correcting device may also be referred to as metalens or lens. In Figure 2, the dielectric core 152 comprises at least two dielectric layers (i.e. dielectric support layers) 152a and 152b and at least one metasurface layer 155a sandwiched between the dielectric support layers 152a, 152b.

The design shown in Figure 6 can impart a prescribed phase shift to an incoming wavefront of directional beam i.e., 102a for which the incident ray directions impinge on

the lens at, or close to, normal incidence, whilst simultaneously maintaining an impedance match to free-space, thereby minimising the amplitude of any reflected wavefront, i.e., directional beam 102b. In figure 6, the directional beam 102b may be collimated or substantially collimated beam.

5 The key elements in achieving these properties are the three metasurfaces 151a, 153a, 155a incorporated into the outermost and central planes of the overall structure of the phase correcting device 120a. This is intended to be utilised as the key component of a planar lens of fixed thickness in which the properties of the metasurfaces are locally altered to provide a given phase shift for a particular portion of an incoming
10 wavefront, i.e. directional beam 102a, whilst minimising reflections from the metalens (phase correcting device 102a) and maintaining a constant physical thickness - with no need to alter the dielectric properties of any of the layers.

 The metasurfaces 151a, 153a, 155a may themselves can be considered as having negligible thickness and typically consist of arrays of printed metallic elements or
15 apertures in a conducting plane, that are etched from a thin metal-clad dielectric substrate in the manner similar to that used in the manufacture of a printed circuit board.

 In order to produce an impedance-match for an incoming plane wave, i.e. directional beam 102a (that is, to eliminate a reflected wave, i.e. directional beam 102b
20 and maximise transmission of energy through the structure), one of the necessary requirements is to have a structure that is symmetric about its centre line. In Figure 7, this is achieved by having identical thicknesses of dielectric support layers of thickness, d , and refractive index, n . Furthermore, sandwiched between these dielectric layers is the central metasurface 155a. Finally, to further achieve the required symmetry, the
25 outermost metasurfaces 151a, 153a is identical in design but will in general have different properties to the central metasurface 155a.

 In designing the lens to produce a prescribed phase delay/advance over a given portion of the lens surface whilst maintaining an impedance-matched condition, the properties of the two metasurface designs are adjusted accordingly for a given dielectric
30 layer thickness and refractive index.

 Mathematical analysis of the metalens , i.e. phase correcting device 120a of Figure 6 will now be described.

To ascertain the required metasurface properties, the multi-layer structure of Figure 6 is analysed using the well-established cascaded 'ABCD' matrix method as follows:

$$\begin{bmatrix} A & B \\ C & D \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ jb_1 & 1 \end{bmatrix} \begin{bmatrix} \cos\phi & j\frac{\sin\phi}{n} \\ jn\sin\phi & \cos\phi \end{bmatrix} \begin{bmatrix} 1 & 0 \\ jb_2 & 1 \end{bmatrix} \begin{bmatrix} \cos\phi & j\frac{\sin\phi}{n} \\ jn\sin\phi & \cos\phi \end{bmatrix} \begin{bmatrix} 1 & 0 \\ jb_1 & 1 \end{bmatrix} \quad \dots (11)$$

In equation (11), each 2 x 2 matrix on the right-hand side represents the properties of the five individual layers in the structure in terms of an equivalent transmission line.

The outermost metasurfaces 151a, 153a are denoted by a normalised shunt susceptance b_1 , where the normalisation factor is the admittance of free-space (= $1/376.73 \Omega^{-1}$).

Similarly, for the central metasurface 155a, the normalised shunt susceptance is denoted by b_2 .

In equation (11), we also have $j = \sqrt{-1}$.

The dielectric support layers 152a, 152b are represented by the remaining matrix $\begin{bmatrix} \cos\phi & j\frac{\sin\phi}{n} \\ jn\sin\phi & \cos\phi \end{bmatrix}$, which appears twice in the cascade. The thickness, d , and refractive index, n , are the same for each dielectric support layer 152a, 152b. The propagation phase is denoted by $\phi = \frac{2\pi nd}{\lambda_0}$ where λ_0 is the free-space wavelength.

This set of matrix elements in equation (11) corresponds to the case of a normally incident plane-wave which is assumed to adequately represent the incident electromagnetic field. This will be sufficient for the large-aperture lenses envisaged that are illuminated from a source that is at a distance much larger than the lens diameter. Under this small incidence-angle assumption, the properties of the lens will be almost independent of the plane of incidence and incident wave's polarisation.

The left-hand side of equation (11) is the resultant 2 x 2 matrix arising from the matrix product of all five layers and has matrix elements, A, B, C & D. The transmission and reflection coefficients of the multi-layer structure, denoted by T and Γ , respectively, are then found from the following formulae:

$$T = \frac{2}{A + B + C + D}$$

... (12)

$$\Gamma = \frac{(A + B) - (C + D)}{A + B + C + D}$$

... (13)

5

On performing the matrix multiplications in equation (11), the matrix elements are as follows:

$$A = D = \frac{b_1 b_2}{2n^2} + \left[1 - \frac{b_1 b_2}{2n^2}\right] \cos 2\phi - \left[b_1 + \frac{b_2}{2}\right] \left(\frac{\sin 2\phi}{n}\right)$$

10

... (14)

$$B = j \left[-\left(\frac{b_2}{2n^2}\right) + \left(\frac{b_2}{2n^2}\right) \cos 2\phi + \left(\frac{\sin 2\phi}{n}\right) \right]$$

... (15)

15

$$C = j \left[\left(\frac{b_2}{2}\right) \left(1 + \left(\frac{b_1^2}{n^2}\right)\right) + \left(2b_1 + \left(\frac{b_2}{2}\right) \left(1 - \left(\frac{b_1^2}{n^2}\right)\right)\right) \cos 2\phi + (n^2 - b_1(b_1 + b_2)) \left(\frac{\sin 2\phi}{n}\right) \right]$$

... (16)

20

In equation (14), the matrix elements A and D are purely real quantities and are numerically equal to each other which follows from the symmetry of the multi-layer structure about the central plane.

Equations (15) and (16) show that the matrix elements B and C are purely imaginary quantities, which also results from the symmetry of the structure.

Inspection of equation (13) for the reflection coefficient of the multi-layer structure indicates that for an impedance-matched condition ($\Gamma = 0$) it is required that:

$$A + B = C + D$$

... (17)

5 Since by equation (14) $A = D$ is automatically satisfied, the condition for an impedance match in equation (16) reduces to the requirement that $B = C$. Thus, using the expressions in (15) and (16) gives the following equation for an impedance match:

$$\left(\frac{b_2}{2}\right)\left(1 + \left(\frac{b_1^2}{n^2}\right) + \left(\frac{1}{n^2}\right)\right) + \left(2b_1 + \left(\frac{b_2}{2}\right)\left(1 - \left(\frac{b_1^2}{n^2}\right) - \left(\frac{1}{n^2}\right)\right)\right)\cos 2\phi + (n^2 - 1 - b_1(b_1 + b_2))\left(\frac{\sin 2\phi}{n}\right) = 0$$

10 ... (18)

For the impedance-matched condition of equation (17), the transmission coefficient defined by equation (12) reduces to the following form given that $A = D$ and $B = C$:

15

$$T_{matched} = \frac{1}{A + B}$$

... (19)

20 In equation (19), the impedance matched condition means that the magnitude of the transmission coefficient, $T_{matched}$, will be unity, barring any dissipative losses. If low-loss materials are used for the dielectric layers in the multi-layer structure of the phase correcting device 120a, then these dissipative loss can be assumed negligible and the refractive index, n , taken as a purely real number. Therefore, equation (19) represents a pure phase shift imparted on the incident wavefront.

25 Inspection of equations (14) and (15) shows that A is purely real and B purely imaginary. Therefore, equation (19) can be written in the following form:

$$T_{matched} = \frac{1}{\alpha + j\beta} = \frac{\exp\left(-j\tan^{-1}\left(\frac{\beta}{\alpha}\right)\right)}{\sqrt{\alpha^2 + \beta^2}}$$

... (20)

Where in equation (20), $\alpha = A$ and $\beta = -jB$

From equation (20), it is clear that the phase delay, θ , (in radians) is given by:

$$\theta = \tan^{-1} \left(\frac{\beta}{\alpha} \right) \quad \dots (21)$$

Re-arranging equation (21) gives:

$$\alpha = \beta \cot \theta \quad \dots (22)$$

Equation (20) can now be re-written using the results of equations (21) and (22) to give:

$$T_{matched} = \frac{1}{\alpha + j\beta} = \frac{\exp(-j\theta)}{\beta \sqrt{1 + \cot^2 \theta}} = \frac{\exp(-j\theta) \sin \theta}{\beta} \quad \dots (23)$$

Since the magnitude of $T_{matched}$ is unity (for the assumed lossless media) under impedance-matched conditions, equation (23) requires that:

$$\beta = \sin \theta \quad \dots (24)$$

Using equation (15) in equation (24) to express β then gives an expression for the normalised shunt susceptance of the central metasurface, b_2 , for a given phase delay, θ , and electrical thickness for the dielectric layers, ϕ , viz:

$$b_2 = 2n \cot \phi - n^2 \sin \theta \operatorname{cosec}^2 \phi \quad \dots (25)$$

An expression for the normalised shunt susceptance of the outermost metasurfaces, b_1 , can be found by using the expression for α in equation (22) and equating this to the expression for A given by equation (14), viz:

$$A = \alpha = \beta \cot \theta = \frac{b_1 b_2}{2n^2} + \left[1 - \frac{b_1 b_2}{2n^2} \right] \cos 2\phi - \left[b_1 + \frac{b_2}{2} \right] \left(\frac{\sin 2\phi}{n} \right) \quad \dots(26)$$

Using equation (24) to express β , and equation (25) for b_2 , gives, after some algebraic manipulation:

$$b_1 = n \cot \phi - \cot \left(\frac{\theta}{2} \right) \quad \dots (27)$$

Equations (25) and (27) are the key expressions that guide the design of the metalens. For a given phase delay, θ , dielectric phase factor, ϕ , and refractive index, n , the required values of normalised shunt susceptance for the metasurfaces giving an impedance-matched structure (b_1 and b_2) are readily found from equations (25) and (27).

Metasurface design and realisation

Graphs/plots of b_1 and b_2 are shown in Figures 7 and 8, respectively, as a function of phase delay through the lens structure for various values of the electrical thickness of the dielectric layer, ϕ . In the graphs shown in Figures 7 and 8, the refractive index of the dielectric has been set to 1.095 which is typical of the low-density, low-loss foam material envisaged in a physical embodiment of the lens. Such a material has a dielectric constant of 1.2, the square root of which gives the refractive index of 1.095.

There are some important observations concerning the graphs shown in Figures 7 and 8:

- The phase delay is permitted to have negative as well as positive values, that is, spanning the full range -180 to +180 degrees. A negative phase delay is equivalent to a positive phase advance.
- For negative values of the normalised shunt susceptance, a metasurface has inductive properties that are realised in practice by a periodic array of apertures in a thin, electrically conducting sheet.
- For positive values of the normalised shunt susceptance, a metasurface has capacitive properties that are realised in practice by an array of electrically conducting patches that are insulated from each other.
- A metasurface is resonant when the normalised shunt susceptance is either zero or +/- infinity. Zero susceptance corresponds to a perfectly

transparent metasurface, whilst an infinite value corresponds to a perfectly reflecting one. For an impedance-matched lens with, ideally, no reflection for an incoming wave, it is clear that reflection resonances (infinite susceptance values) are to be avoided.

- Transmission resonances (zero susceptance) do not present an issue fundamentally in realising a practical embodiment of the matched lens. However, the transverse dimensions of resonant elements are typically between one-quarter and one half-wavelength in size and also exhibit maximum dissipative losses at the resonant frequency. It is preferable, therefore, to use smaller, non-resonant elements in the lens design.

Inspection of Figures 7 and 8 for the values of b_1 and b_2 shows that for positive phase delays (right-hand half of the horizontal axis in the plots), b_1 is mostly negative (inductive) but can pass through zero (a transmission resonance) and become positive (capacitive) for certain combinations of dielectric thickness and phase delay. The same observation can be made concerning b_2 .

For values of b_1 and b_2 that correspond to negative phase delays (shown on the left-hand half of the horizontal axis in Figures 7 and 8), b_1 is almost always positive (capacitive) but can pass through zero (a transmission resonance) and become negative (inductive) for a few combinations of dielectric thickness and phase delay. The same observation can also be made concerning b_2 .

For ease of lens design, i.e. phase correcting device 120a design, negative phase delays (phase advances) are preferable since a wide range of phase values can be accomplished using only non-resonant, capacitive metasurface elements, that is, periodic arrays of conducting patches that can be made small, with an array periodicity that is also small compared to the wavelength. This latter condition makes the properties of the metasurface less dependent on the plane and angle of incidence, albeit that this assumed to be small in this analysis.

A particular example of shunt susceptance values that remain capacitive for both b_1 and b_2 over a wide range of phase advances is shown in Figure 9 for the case when the dielectric layers have an electrical thickness $\phi = \frac{\pi}{2}$ (90 degrees). This thickness corresponds to one quarter of a wavelength in the dielectric medium, which in this example is chosen to have a dielectric constant of 1.2, that is, a refractive index of 1.095.

Figure 9 shows a behaviour of b_1 and b_2 versus phase delay through lens (phase correcting device 120a) for dielectric thickness equivalent to 90 degrees. The refractive

index is 1.095. For the particular case shown in Figure 9, the equations (25) and (27) for the shunt susceptance become somewhat simplified, viz:

$$b_2(\phi = \pi/2) = -n^2 \sin \theta \quad \dots(28)$$

$$b_1(\phi = \pi/2) = -\cot\left(\frac{\theta}{2}\right) \quad \dots(29)$$

Note that the phase delay θ is negative in Figure 9 corresponding to a phase advance, thereby giving positive shunt susceptance values in the above equations (28) and (29). Phase advance values from 20 to 180 degrees can be readily achieved using the design approach illustrated in Figure 9 for quarter-wavelength dielectric layers.

Physical realisation of the required normalised shunt susceptance values for a given phase advance can be achieved using the known properties of periodic arrays of metallic patches, often referred to as Frequency Selective Surfaces (FSS), which are a form of metasurface. Some typical array element designs and lattices are shown in Figures 10A, 10B and 10C. Figure 10A shows an example of an array of circular patches on a rhombic lattice. Figure 10B is an example of an array of square patches on a square lattice. Figure 10C is an example of an array of crosses on a square lattice.

In Figures 10A, 10B and 10C, the shaded areas denote the metallic region of the surface. For frequencies below resonance, this type of metasurface produce a positive shunt susceptance, namely one that is capacitive. These metasurfaces can be readily manufactured using conventional etching techniques applied to thin, metal-clad dielectric substrates, or by inkjet printing techniques using highly conducting inks.

Although may not be useful for the lens design of the present invention, negative shunt susceptance values, giving inductive metasurfaces, can be produced in a similar fashion. The main difference between this type of metasurface and its capacitive counterpart is that the shaded areas shown in Figures 10A, 10B and 10C represent the aperture regions etched from a continuous metallic plane.

Figure 11 shows a typical behaviour of patch and aperture-type Frequency Selective Surface (FSS) layers (metasurfaces) as a function of frequency. Figure 11 shows a typical normalised shunt susceptance behaviour for patch and aperture-type

metasurfaces versus normalised frequency. Resonance occurs a normalised frequency of 1. The desired shunt susceptance value at a given frequency is obtained by adjusting the size of the patch/aperture element along with the periodicity and type of array lattice.

5 It is usual to assume that there are a large number of array elements in a given metasurface design so that a detailed electromagnetic analysis of the array properties can be approached by assuming an infinite periodic array. This allows the analysis to be carried out on just a single unit cell in the lattice in conjunction with a periodic boundary condition that invokes Floquet's Theorem for such periodic structures.

10 Computational electromagnetic techniques such as the Method of Moments (MoM), Finite Elements (FE) and the Finite Difference Time Domain (FDTD) method are all well-established and exist as commercially available software packages that enable the design and analysis of the above-mentioned metasurfaces to be readily implemented.

15 Regarding the macro-structure of the metalens itself, one approach is to divide the aperture of the lens into a number of zones over which different phase advances are realised to produce the desired outgoing wavefront (converging, diverging, collimated or substantially collimated, for example).

20 The array periodicity and lattice type can be made the same over the entire lens surface (that is, over all zones) but each zone tile would contain a sub-array of elements whose size was chosen to achieve a the required shunt susceptance value for the desired phase advance over that particular zone.

25 Alternatively, one could implement a smooth, gradual transition of element sizes over the entire lens surface, still keeping the periodicity and lattice type the same over the entire aperture. This however would be more difficult to design and more challenging to manufacture.

 One application of the phase correcting device 120a that is in the form of an impedance matched multi-layer structure or metalens as described above will now be described with reference to Figure 12.

30 The range over which power can be transferred by the transmitted electromagnetic energy beam, whilst remaining collimated or substantially collimated, is dictated by the antenna aperture size and the wavelength of operation. In particular, the usable range is proportional to the area of the transmitting antenna and inversely proportional to the wavelength. A planar, phased array antenna is envisaged as the radiating structure for the transmitter or transmitting antenna which facilitates control

over the phase and amplitude of the array elements as a means of providing control over the emerging beam's wavefront.

With the antenna aperture size determined in the above manner, long-range performance can result in a large number of expensive phased array components.

5 However, one way to de-couple the need for a large exit aperture (to achieve the desired range) and the high cost of phased array components is to use a passive, phase-correcting metalens to achieve the large exit aperture.

10 The lens can then be illuminated by a separate phased array antenna placed behind the lens. This antenna has smaller aperture dimensions than the exit aperture of the metalens and therefore requires fewer components, thereby reducing the cost of the transmitting antenna. This is akin to a parabolic reflector dish being illuminated by a much smaller feed antenna near its focal point.

15 The metalens concept differs from this in that the lens is transparent to incoming electromagnetic waves except for imparting a phase shift across the wavefront. It has the same physical thickness across its entire aperture, is highly transparent. The particular metalens structure envisaged is impedance matched to incoming electromagnetic waves, and provides the required phase advance or phase delay across the exit aperture to produce the desired, phase-corrected transmitted wavefront. The emerging wavefront could be a plane-wave, converging or diverging wavefront as
20 required.

The required phase shift will vary over the surface of the lens and this can be realised by using different metasurface properties at different locations across the lens aperture. The three-layer metalens design methodology described previously allows the various phase shifts to be realised in practice in the form of tiles that are assembled to
25 form the complete metalens structure.

The amplitude and phase of each phased-array transmitting antenna element is adjusted to provide the desired illumination field onto the metalens. Having electronic control of the phase-array antenna elements permits modifications and real-time corrections to be made to the illuminating field.

30 Reverting now to Figure 12 which is a schematic of the concept of metalens 120a as described above, a planar, three-layer metalens 120a may be used to phase-correct the illuminating field to produce the desired output wavefront over a larger aperture than that of the transmitting antenna 110. Shown in Figure 12 is the case of an emerging plane-wave. Converging wavefronts (which produce focusing) can be realised by

reconfiguring the metalens properties to give the required phase distribution across its exit aperture.

In Figure 12, directional beam 102, 102a relates to illuminating wavefront emitted by the transmitting antenna of aperture size d and direction beam 102, 102 relate to emerging, phase corrected wavefront. Exit aperture size D is also shown.

The self-same configuration described above with reference to Figure 12 for the transmitting portion of a long-range wireless power transfer system can be equally applied to the receiving part or rectifying antenna 130, with the direction of energy flow reversed.

For the receiver or rectifying antenna 130, the metalens (i.e. phase correcting device 120a) now focuses the incoming electromagnetic wave from the transmitting antenna 110 onto a rectifying antenna 130 placed behind the metalens. The size of the rectifying antenna 130 can therefore be reduced in the same way as that of the transmitting antenna 110, thereby saving on component costs and weight.

Rectifying antenna (rectenna)

Rectifying antenna 130 of the long-range wireless power transfer system 100 is the terminating structure for receives the directional beam 102 delivered by the rest of the system and converts the incident electromagnetic energy back into electricity. In other words, the rectifying antenna is configured to receive the directional beam from the phase correcting device(s) 120, 122 and convert the electromagnetic energy into electricity. This rectifying antenna can be referred to as 'rectenna'.

The rectifying antenna 130 may be of a similar size as the aperture of transmitting antenna 110. The rectifying antenna 130 may consist an array of antenna elements that may in turn be electrically connected to solid-state rectifying components such as Schottky diodes. Such rectifying components and their associated circuitry can rectify the incoming electromagnetic energy to produce a direct current (DC) output which is then delivered to the required load.

For efficient electromagnetic-to-DC conversion, the antenna elements (patched elements) of the rectifying antenna may incorporate an impedance-matching layer at the interface with free-space. Such impedance-matching layer may incorporate a metasurface. The metasurface may be designed and tuned to eliminate any reflected waves from the front surface of the rectenna, thus maximising energy transfer to the rectifying elements.

Figure 13 is a schematic diagram showing the rectifying antenna concept using front-mounted metasurface for impedance matching. This rectifying antenna concept described with reference to Figure 13 may be applied to the rectenna 130 as described above.

5 As shown in Figure 13, the rectifying antenna structure 200 may comprise a central core 203. The central core 203 is preferably made from a low-loss dielectric material such as a foam. The thickness of the central core 203 is preferably between one-tenth and one whole wavelength in the dielectric material of the core. The central
10 core 203 preferably has a refractive index of between 1 and 3. The thickness and refractive index may vary over the surface of the rectifying antenna to achieve the desired impedance match.

 The central core 203 may comprise a first portion 201 which is the front face and a second portion 202 which is the rear face opposite the first portion 201. The first
15 portion 201 may comprise dielectric skin 206. The dielectric skin 206 may comprise/incorporate a metasurface for impedance matching to directional beam 102e (incident wavefront/electromagnetic energy) that is incident on the rectifying antenna structure 200. The dielectric skin 202 is preferably thin with the thickness of the skin being no more than one-tenth of a wavelength in the dielectric medium of the skin. The dielectric medium of the skin is the dielectric material that the skin is made of.

20 Rectifying antenna array 205 (receiving antenna array) may be positioned at the second portion 202 of the central core 203. Rectifying circuit 208 (solid-state rectifying components such as Schottky diodes) may be electrically connected to the rectifying antenna array 205 to produce DC output 210 which is then delivered to the required load.

25 The rectifying antenna array 205 may comprise plurality of antenna elements electrically connected rectifying circuits (solid-state rectifying components such as Schottky diodes) to produce DC output which is then delivered to the required load.

 Such rectifying antenna structure 200 as described above comprising impedance matching layer incorporating metasurface allows for efficient electromagnetic-to-DC
30 conversion. The metasurface may be designed and tuned to eliminate any reflected waves from the front surface of the rectenna, thus maximising energy transfer to the rectifying elements.

 Similar to transmitting antenna as described above, the rectifying antenna array 205 may optionally comprise plurality of antenna elements whereby each antenna

element is covered by an electrically small radome shell designed to increase the antenna gain of each receiving antenna element compared to the case with no radome shells present. In other words, each antenna element may comprise a radome element which may be a low-loss dielectric element. The radome element may be hemispherical,
 5 substantially hemispherical or similar dome shaped element to allow for gain enhancement of the rectifying antenna array 205. The radome element may be a thin-walled radome element. Preferably, the wall thickness of the radome element is no more than one quarter of a wavelength thick in the material that the radome wall is made of. The wavelength of electromagnetic waves in the radome wall material, denoted λ_d is
 10 given by the formula:

$$\lambda_d = \frac{\lambda}{n_d}$$

... (30)

where in the above, λ is the free-space wavelength and n_d is the refractive index
 15 of the radome wall material.

The radome element may be larger than the antenna element of the rectifying antenna array 205 to cover the antenna element of the rectifying antenna array.

Focusing in the radiating near-field region as a means to increase the range of wireless power transfer using electromagnetic beams.

20 In the present invention, the transmitting antenna 110 may operate in the radiating near field region within which the electromagnetic field is substantially confined to a collimated or substantially collimated beam. This is ideally suited to directional power transfer to a receiving antenna or rectenna 130 of similar size.

Described herein is a method to increase the range over which an
 25 electromagnetic beam can be propagated with minimal beam divergence by the use of focusing. The primary use for this invention is for efficient long-range wireless power transfer using electromagnetic radiation or beam such as a microwave beam.

The key principle of the system proposed herein is to operate the transmitting antenna in the radiating near-field region rather than the far-field radiation zone. The
 30 latter is characterized by a diverging beam with an angular distribution that remains unchanged with distance and an inverse square-law for the power density as a function of range.

By contrast, the radiating near-field region (which occurs nearer to the antenna aperture than the distance at which far-field conditions commence) maintains a beam extent that is mostly confined to a cylinder of comparable size to the antenna aperture. This beam displays only modest beam divergence with power density levels comparable to those in the antenna aperture plane. There is no inverse square-law decay of the power density in the radiating near-field. This makes it highly attractive for long-range wireless power transfer purposes. By placing a similarly sized receiving antenna at the maximum range over which radiating near-field conditions are maintained, results in highly efficient power transfer with little beam loss.

The range over which the radiating near-field extends is proportional to the aperture area of the transmitting antenna and inversely proportional to the wavelength. Thus, for a given range of operation, at a specified wavelength, the antenna size must be chosen large enough to achieve the required radiating near-field conditions. To this end, any means by which the useable range of such a system can be increased without increasing the size of the antennas is an advantage.

The present invention may achieve this range extension by applying a spherical phase distribution across the aperture plane of the transmitting antenna so as to achieve a degree of beam focusing in the radiating near-field.

This creates a converging wavefront emanating from the transmitting antenna which partially offsets the natural beam divergence caused by diffraction. This results in a narrowing of the beam waist as one moves away from the antenna. The beam waist eventually attains a minimum size, at which the phase front is almost planar, before diverging again as one moves to increasing distance. At a particular range, this diverging wavefront expands such that the amplitude distribution of the electromagnetic field mimics that in the antenna aperture plane, with a phase front that is the conjugate of the spherical distribution originally imparted on the aperture field. This 'image' of the aperture field essentially reproduces the antenna plane distribution at this distance from the antenna (barring a phase conjugation). The distance from the antenna aperture at which this image occurs is greater than that without focusing, which is the means by which an increased range for the system described is achieved.

Figure 14 shows a schematic representation of a phase array transmitting antenna used to transmit electromagnetic energy in the form of a collimated beam or a substantially collimated beam with little angular divergence to a receiving/rectifying antenna 130 (rectenna) as described above. In Figure 14, the transmitting antenna 110 and the receiving or rectifying antenna 130 are operating in the radiating near-field. The transmitting antenna 110 is a planar phased-array transmitting antenna with

electronically controllable electric field amplitude and phase distributions across aperture and the rectifying antenna may be planar receiving antenna. The transmitting antenna 110 and the rectifying antenna 130 may be the ones as described above. The beam divergence is minimal if the distance R between the transmitting antenna 110 and the receiving antenna is limited to within the radiating near field region. Range R is given by the following formula:

$$Range = R \leq R_{max} = \frac{A_{eff}}{\pi\lambda} \quad \dots (31)$$

where in the above, $A_{eff} = A\epsilon$ is the effective area of the transmitting antenna aperture having a physical aperture area, A , and ϵ is the aperture efficiency (dictated by the amplitude taper across antenna) and λ is the free space wavelength.

Figure 15 shows the computed magnitude of the electric field strength along the range axis for a square antenna of width D , operating at a single wavelength, λ . The range, R , spans the radiating near-field region for which R has yet to reach the Fraunhofer limit describing the onset of the far-field region ($> 2D^2/\lambda$). The field strength is normalized with respect to the maximum value in the aperture plane. Figure 15 shows normalised axial electric field strength versus range where aperture efficiency=0.85; $D=1.92\text{m}$ and frequency= 5.8GHz.

In the example of Figure 15, the frequency used is 5.8GHz and the antenna is made up of an array of patch antenna elements with pitch 30mm. The antenna width is 1.92m, giving a square array of 64 x 64 patches. A Gaussian amplitude taper is applied across both principal axes in the antenna aperture plane (range = 0) such that the field at the antenna edges is a factor $1/e$ down on the maximum level in the aperture. This amplitude tapering creates a smoother near-field beam distribution than that from a uniform aperture field, with lower sidelobes. In the example of Figure 15, all elements are excited in-phase - that is, there is no focusing applied.

As the plot of electric field in Figure 15 shows, in the radiating near-field region, the on-axis field strength does not decay with increasing range, R , according to a reciprocal law (corresponding to an inverse square-law for the power) as it does in the radiating far-field, but oscillates about the aperture-plane intensity before smoothly decaying.

In the radiating near-field region, the maximum on-axis field strength exceeds that in the antenna aperture due to constructive interference, and occurs at a range,

R_{max} . For the case of the antenna array elements being excited in-phase, the value of R_{max} is given by the formula:

$$R_{max} = \frac{A_{eff}}{\pi\lambda}$$

... (32)

5 where, λ is the wavelength of radiation and A_{eff} is the effective area of the transmitting antenna aperture. The effective area is defined as the physical area multiplied by the aperture efficiency. In the example shown in Figure 15, the aperture efficiency is 0.85 for the Gaussian taper used. The resulting value for R_{max} is 20.8m.

10 The characteristic of the phase front across the beam at this range (where the maximum field strength occurs) is substantially that of a plane wave over most of the antenna aperture width. This phase distribution is illustrated in Figure 16A. Figure 16A shows phase distribution of electric field across transverse axis at range= R_{max} =20.8m and unfocussed case. The corresponding electric field amplitude is shown in Figure 16B. Figure 16B shows amplitude of electric field across transverse axis (normalised to
15 maximum aperture field strength), unfocussed case and range= R_{max} =20.8m

 Figures 16A and 16B show that for ranges up to R_{max} , there is minor beam divergence, which favours efficient radiated power transfer to the rectifying antenna 130. The important characteristics of the radiating near-field approach for power transfer are,
20 therefore, the direct proportionality of the useful range with the aperture area of the transmitting antenna 110, and the reciprocal dependence on the wavelength.

 At first glance, R_{max} may appear to be the maximum range over which the electromagnetic beam (such as microwave beam) may be transferred to the rectifying antenna 130 without losing substantial amounts of power due to the diverging beam
25 characteristics introduced by diffraction. However, the useful range for power transfer can be extended by exploiting one other characteristic of the radiating near-field region, namely, the possibility of focusing the transmitted beam. This can be achieved with a phased array antenna by applying a suitable (and programmable) phase distribution across the radiating elements.

30 Figure 17 shows the axial field distribution for the same antenna as described above but with a spherical phase distribution applied across the aperture plane. This phase distribution may be determined by placing a point on the range axis a distance, f , from the antenna aperture (the focal length) and then adding a phase correction to each

of the transmitting antenna's array elements such that radiation from all elements arrives in phase at point, f . Figure 17 shows normalised axial electric field strength versus range-focussed case with $f=50\text{m}$; aperture efficiency= 0.85 ; $D=1.92\text{m}$ and frequency= 5.8GHz .

5 It is important to note that when applying this type of focusing to the antenna aperture elements, the maximum field strength along the range axis does not occur at the focal point, f , but moves to a location closer to the antenna aperture than in the unfocused case. In the above example, the focal point is set to a range of 50m and the maximum field strength is then located at a range $= R'_{max} = 17.2\text{m}$. The maximum field
10 strength is increased in amplitude with focusing as Figure 17 indicates.

As with the unfocused case, the phase distribution across the beam at the range where the maximum field strength occurs is substantially plane. However, the amplitude of the field at this range has a narrower beam waist by virtue of focusing. The phase and amplitude plots at a range $R'_{max} = 17.2\text{m}$ for this focused case are shown in Figures 18A
15 and 18B, respectively, to illustrate these points. Figures 18A and 18B show phase distribution of electric field across beam at range $= R'_{max} = 17.2\text{m}$; focused case with $f=50\text{m}$.

Since the maximum field strength and planar wavefront for the focused case occur at a shorter range than without focusing, it may appear to be counterintuitive as to
20 how focusing helps to extend the useful range for power transfer.

However, having reached a minimum at R'_{max} , the beam waist broadens once again as the range increases to a point where the original aperture field distribution is closely replicated. The range at which this occurs can be found by inspection of Figure 17. The axial field strength attains its original value of unity (that of the maximum in the
25 aperture plane) at a range of 39.6m for the focused case.

By comparison, for the unfocused case, Figure 15 shows that the on-axis field strength attains its original aperture field value of unity at a range of 32.4m which is only 82% of the range for the same field strength using focusing.

The phase and amplitude distributions across the beam for focused and
30 unfocused cases are shown in Figures 19A and 19B, respectively, along with the distributions in the aperture plane of the transmitting antenna for comparison. Figure 19A and 19B show phase distribution of electric field across aperture plane; across transverse axis at range 39.6m for focused case; at range 32.4m for unfocused case. In Figure 19A, $D=1.92\text{m}$, frequency= 5.8GHz and $f=50\text{m}$. In Figure 19A, reference

numerals 1901, 1902 and 1903 correspond to phase at 39.6m (focused), phase in aperture plane, and phase at 32.4m (unfocussed) respectively. Similarly, in Figure 19B reference numerals 1901, 1902 and 1903 correspond to field at 39.6m range(focused), field in aperture plane, and field at 32.4m (unfocussed) respectively.

5 It is apparent from Figure 19B that the amplitude of the focused field across the beam at a range of 39.6m closely resembles that of the aperture field and is more tightly confined across the transverse plane than the unfocused case at a range of 32.4m.

 The focused distribution in Figure 19B can be thought of as an image of the aperture-plane field distribution. The phase of this field at this range, shown in Figure
10 19A, is similar to that in the aperture plane (with the focusing phase taper applied) except for having the opposite sense. That is, a convex phase front in the aperture plane has become a concave one of similar curvature at the extended range of 39.6m – an example of phase conjugation.

 The curvature of the phase front for the unfocused case in Figure 19A at a range
15 of 32.4m is quite different from that of the focused field and aperture plane.

 Therefore, the useful range for power transfer using a microwave beam in the radiating near-field can be increased by focusing a Gaussian distribution in the manner as described above.

 The example shown allows a rectenna of similar-sized aperture to the
20 transmitting antenna to be placed at a range of 39.6m when the focusing technique is used, compared to 32.4m without focusing – an increase of 22% in this example. In addition, the field amplitude distribution across the beam for the focused case more closely replicates that of the aperture field and is more tightly confined (less spill over) than that of the unfocused example having the same peak amplitude.

25 Equally important from a practical viewpoint, for a given range between transmitter and receiver, this focusing technique can be used as a way to reduce the aperture area of the antennas by this same factor.

 To illustrate the spatial distribution of the electric field strength in the unfocused and focused cases, Figures 20A and 20B on the following page show contour plots in a
30 horizontal plane for the system described previously. Figure 20A shows relative electric field strength contours in a horizontal plane through beam. Figure 20B shows relative electric field strength contours in a horizontal plane through beam. Figure 20B is a focussed case with f being 50m.

Where in the foregoing description reference has been made to elements or integers having known equivalents, then such equivalents are included as if they were individually set forth.

5 It will of course be realised that while the foregoing description has been given by way of illustrative example(s) of the present invention, all such modifications and variations thereto as would be apparent to a person skilled in the art are deemed to fall within the broad scope and ambit of the various aspects of invention as is hereinbefore described and/or defined in the claims.

CLAIMS:

1. A long-range wireless power transfer system comprising:

a transmitting antenna that is a phased array antenna having an array of antenna elements that are radiating elements, the phased array antenna being configured to receive electric power from a power source as an input, convert the input electric power into electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam, the collimated or substantially collimated beam being produced by controlling phase and amplitude of each of the antenna elements;

at least one phase correcting device positioned or configured to be positioned at a first distance from the transmitting antenna, the at least one phase correcting device being a multi-layer structure having at least three layers with a central dielectric core sandwiched between at least two layers on two opposite portions of the dielectric core with at least one of the layers being a dielectric skin made of at least one dielectric material, the at least one phase correcting device being configured to:

receive the directional beam radiated from the transmitting antenna, perform a phase correcting operation on the directional beam, the phase correcting operation being maintaining the directional beam as the collimated beam and increasing a range to which the directional beam is maintained as the collimated or substantially collimated beam, and

transmit the phase corrected directional beam to the free space; and a rectifying antenna positioned or configured to be positioned at a second distance from the transmitting antenna with the at least one phase correcting device positioned or configured to be positioned between the transmitting antenna and the rectifying antenna, the rectifying antenna configured to receive the directional beam from the at least one phase correcting device and convert the electromagnetic energy into electricity.

2. A system as claimed in claim 1, wherein the electromagnetic energy is a microwave energy.

3. A system as claimed in claim 1 or 2, wherein each antenna element has an electronically controlled phase shifter to facilitate electronic steering of the directional beam.

4. A system as claimed in claim 3 or 4, wherein each antenna element is a patch antenna element.

5. A system as claimed in any one of claims 3 to 5, wherein each antenna element is made from metallic segments etched onto a substrate.

6. A system as claimed in claim 7, wherein each antenna element is a radome element formed as a hemispherical shell or a substantially hemispherical shell.

5 7. A system as claimed in any one of preceding claims, wherein the at least one phase correcting device is an electromagnetic wave transparent phase correcting device.

8. A system as claimed in any one of preceding claims, wherein the at least one phase correcting device is a straight through phase correcting device that allows the directional beam that is incident on it to travel through in a straight direction without
10 diverting the directional beam into another direction.

9. A system as claimed in any one of claims 1 to 8, wherein the at least one dielectric skin comprises metasurface to simultaneously provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

10. A system as claimed in claim 9, wherein the metasurfaces are incorporated on
15 the dielectric skins.

11. A system as claimed in any one of claims 1 to 10, wherein the dielectric core is made from a low-loss dielectric material.

12. A system as claimed in any one of claims 1 to 11, wherein the central dielectric core is of at least three layers with at least one metamaterial layer or metasurface
20 sandwiched between two dielectric support layers.

13. A system as claimed in any one of claims 1 to 12, wherein the at least one phase correcting device is a reflective phase correcting device that allows the directional beam to divert to another direction at an angle by reflecting the directional beam that is incident on the reflective phase correcting device into said another direction.

25 14. A system as claimed in claim 13, wherein in the reflective phase correcting device the dielectric core is sandwiched between the at least two layers on two opposite portions of the dielectric core with at least one of the layers being the dielectric skin the other layer being a reflective ground plane.

15. A system as claimed in any one of preceding claims, wherein the rectifying
30 antenna is part of a rectifying antenna structure comprising solid state rectifying components wherein the rectifying antenna comprises an array of receiving antenna elements that are electrically connected to the solid -state rectifying components.

16. A system as claimed in claim 15, wherein the solid-state rectifying components are Schottky diodes.

17. A system as claimed in any one of claims 1 to 14, wherein the rectifying antenna is part of a rectifying antenna structure, the rectifying antenna structure comprising:

5 a central core having a first portion and a second portion that are opposite to each other, wherein the central core is made of at least one dielectric material;

a dielectric skin comprising a metasurface disposed to a first portion of the central core and the rectifying antenna is positioned at the second portion of the central core; and

10 a rectifying circuit that is electrically connected to the rectifying antenna to rectify the incoming electromagnetic energy to produce a direct current (DC) output which is then delivered to the required load.

18. A system as claimed in claim 17, the rectifying antenna is formed as a rectifying antenna array having a plurality of rectifying antenna elements.

15 19. A system as claimed in claim 17 or 18, wherein the central core is made of a low-loss dielectric material.

20. A long-range wireless power transfer system, the wireless power transfer system comprising:

20 a transmitting antenna that is a phase array antenna having an array of antenna elements that are radiating elements, the phase array antenna being that is configured to receive an electric power from a power source as an input, convert the input electric power into electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam, the collimated or substantially collimated beam being produced by controlling phase and
25 amplitude of each of the antenna elements;

at least one phase correcting device positioned or configured to be positioned at a first distance from the transmitting antenna, the at least one phase correcting device being configured to:

receive the directional beam radiated from the transmitting antenna,

30 perform a phase correcting operation on the directional beam for

maintaining the directional beam as the collimated or substantially collimated

beam and for increasing a range to which the directional beam is maintained as the collimated beam, and

transmit the phase corrected directional beam to the free space; and

35 a rectifying antenna positioned or configured to be positioned at a second

distance from the transmitting antenna with the at least one phase correcting device

positioned or configured to be positioned between the transmitting antenna and the rectifying antenna, the rectifying antenna configured to receive the directional beam from the at least one phase correcting device and convert the electromagnetic energy into electricity,

5 wherein the at least one phase correcting device utilises at least one metasurface to provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

21. A system as claimed in claim 21 or 22 wherein the at least one phase correcting device utilises at least two metasurfaces to provide phase shift whilst maintaining an
10 impedance matched structure with minimal loss of power.

22. A long-range wireless power transfer system comprising:
 a transmitting antenna that is a phased array antenna having an array of antenna elements that are radiating elements, the transmitting antenna being configured to receive electric power from a power source as an input, convert the input
15 electric power into electromagnetic energy, and radiate the electromagnetic energy into free space as a directional beam that is a collimated or substantially collimated beam, wherein the collimated or substantially collimated beam is configured to be produced by controlling phase and amplitude of each of the antenna elements; and
 a rectifying antenna positioned or configured to be positioned at a distance from
20 the transmitting antenna, the rectifying antenna configured to receive the directional beam and convert the electromagnetic energy into electricity,
 wherein each antenna element comprises a radome element formed as a hemispherical shell or a substantially hemispherical shell.

25 23. A system as claimed in claim 22, wherein the electromagnetic energy is a microwave energy.

24. A system as claimed in any one of claims claim 22 or 23, wherein each antenna element has an electronically controlled phase shifter to facilitate electronic steering of the directional beam.

30 25. A system as claimed in any one of claims 22 to 24, wherein the radome element is larger than the antenna element to cover the antenna element.

26. A system as claimed in any one of claims 22 to 25, wherein the transmitting antenna has a transmitting antenna aperture having

a dimension, D , such that for wavelength, λ , and distance, R , between transmitting antenna and down-range phase-correcting device or rectenna, at least one of the following inequalities apply:

$$D^2 \geq 4\lambda R,$$

5 $D^2 \geq \pi\lambda R.$

27. A system as claimed in claim 26, wherein size of the rectifying antenna is same or substantially the same as the size of the transmitting antenna aperture.

28. A system as claimed in any one of claims 22 to 27, wherein the rectifying antenna is part of a rectifying antenna structure comprising solid state rectifying components wherein the rectifying antenna comprises an array of receiving antenna elements that are electrically connected to the solid -state rectifying components.

10

29. A system as claimed in claim 28, wherein the solid-state rectifying components are Schottky diodes.

30. A system as claimed in any one of claims 28 to 29, wherein the rectifying antenna is part of a rectifying antenna structure, the rectifying antenna structure comprising:

15

a central core having a first portion and a second portion that are opposite to each other, wherein the central core is made of at least one dielectric material;

a dielectric skin comprising a metasurface disposed to a first portion of the central core and the rectifying antenna is positioned at the second portion of the central core; and

20

a rectifying circuit that is electrically connected to the rectifying antenna to rectify the incoming electromagnetic energy to produce a direct current (DC) output.

31. A system as claimed in claim 30, wherein the rectifying antenna is formed as a rectifying antenna array having a plurality of rectifying antenna elements.

25

32. A system as claimed in any claim 30 or 31, wherein the central core is made of a low-loss dielectric material.

33. A system as claimed in any one of claims 30 to 32, wherein thickness of the central core lies between one-tenth and one whole wavelength in the dielectric material that the central core is made of.

30

34. A system as claimed in any one of claims 30 to 33, wherein the central core has a refractive index of between 1 and 3.

35. A system as claimed in claim 34, wherein thickness and refractive index of the central core vary over the surface of the rectifying antenna to achieve impedance match that is desired.

36. A system as claimed in any one of claims 35, wherein the system further comprises at least one phase correcting device positioned or configured to be positioned between the transmitting antenna and the rectifying antenna, the at least one phase correcting device being configured to:

receive the directional beam radiated from the transmitting antenna,

perform phase correcting operation on the directional beam for maintaining the directional beam as the collimated or substantially collimated beam and for increasing a range to which the directional beam is maintained as the collimated or substantially collimated beam, and

transmit the phase corrected directional beam to the free space.

37. A system as claimed in claim 36, wherein the at least one phase correcting device is an electromagnetic wave transparent phase correcting device.

38. A system as claimed in claim 36 or 37, wherein the at least one phase correcting device is a multi-layer structure having at least three layers with a central dielectric core sandwiched between at least two layers on two opposite portions of the dielectric core with at least one of the layers being a dielectric skin made of at least one dielectric material.

39. A system as claimed in any one of claims 36 to 38, wherein the at least one phase correcting device is a straight through phase correcting device that allows the directional beam that is incident on it to travel through in a straight direction without diverting the directional beam into another direction.

40. A system as claimed in any one of claims 36 to 38, wherein the at least one phase correcting device is a reflective phase correcting device that allows the directional beam to divert to another direction at an angle by reflecting the directional beam that is incident on the reflective phase correcting device into said another direction.

41. Use of at least one metasurface to provide phase shift whilst maintaining an impedance matched structure with minimal loss of power in a long-range wireless power transfer system as claimed in any one of the preceding claims.

42. A transmitting antenna of the long-range wireless power transfer system as claimed in any one claims 1 to 40 wherein the transmitting antenna is a phased array antenna having an array of antenna elements that are radiating elements, each antenna

element comprising a low-loss dielectric element made out of a low-loss dielectric material.

43. A phase correcting device of the long-range wireless power transfer system as claimed in any one of claims 1 to 21, wherein the phase correcting device is a multi-layer structure having at least three layers with a central dielectric core sandwiched between at least two layers on two opposite portions of the dielectric core with at least one of the layers being a dielectric skin made of at least one dielectric material.

44. A phase correcting device as claimed in claim 43, wherein the dielectric skin comprises a metasurface to provide phase shift whilst maintaining an impedance matched structure with minimal loss of power.

45. A phase correcting device as claimed in claim 44, wherein the metasurface is incorporated on the dielectric skin.

46. A phase correcting device as claimed in any one of claims 43 to 45, wherein the phase correcting device is an electromagnetic wave transparent phase correcting device.

47. A phase correcting device as claimed in any one of claims 43 to 46, wherein thickness of the dielectric skin is less than one tenth of a wavelength in the at least one dielectric material that the dielectric skin is made of.

48. A phase correcting device as claimed in any one of claims 43 to 47, wherein the dielectric core is made from a low-loss dielectric material.

49. A phase correcting device as claimed in any one of claims 43 to 48, wherein thickness of the dielectric core lies between one-tenth and one whole wavelength in the dielectric material that the dielectric core is made of.

50. A phase correcting device as claimed in any one of claims 43 to 49, wherein the dielectric core has a refractive index of between 1 and 3.

51. A phase correcting device as claimed in any one of claims 43 to 50, wherein the phase correcting device is the straight-through phase correcting device that allows the directional beam that is incident on it to travel through in a straight direction without diverting the directional beam into another direction.

52. A phase correcting device as claimed in claim 51, wherein the dielectric core is sandwiched between the dielectric skins on both the opposite portions of the dielectric core.

53. A phase correcting device as claimed in any one of claims 51 or 52, wherein the phase correcting device is a reflective phase correcting device that allows the directional beam to divert to another direction at an angle by reflecting the directional beam that is incident on the reflective phase correcting device into said another direction.

5 54. A phase correcting device as claimed in claim 53, wherein the angle is 90 degrees or substantially 90 degrees.

55. A phase correcting device as claimed in claim 53 or 54, wherein the dielectric core is sandwiched between the dielectric skin on the first portion of the dielectric core and a reflective ground plane on the second portion of the dielectric core.

10 56. A phase correcting device as claimed in any one of claims 53 to 55, wherein the dielectric skin comprises a metasurface to simultaneously provide phase shift to an incoming wavefront and complete reflection with minimal loss of power.

15 57. A phase correcting device as claimed in any one of claims 43 to 56, wherein the dielectric core is of at least three layers with at least one metamaterial layer or metasurface sandwiched between two dielectric support layers.

58. A rectifying antenna of the long-range wireless power transfer system as claimed in any one of the preceding claims, wherein the rectifying antenna is part of a rectifying antenna structure comprising solid state rectifying components wherein the rectifying antenna comprises an array of receiving antenna elements that are electrically connected
20 to the solid-state rectifying components.

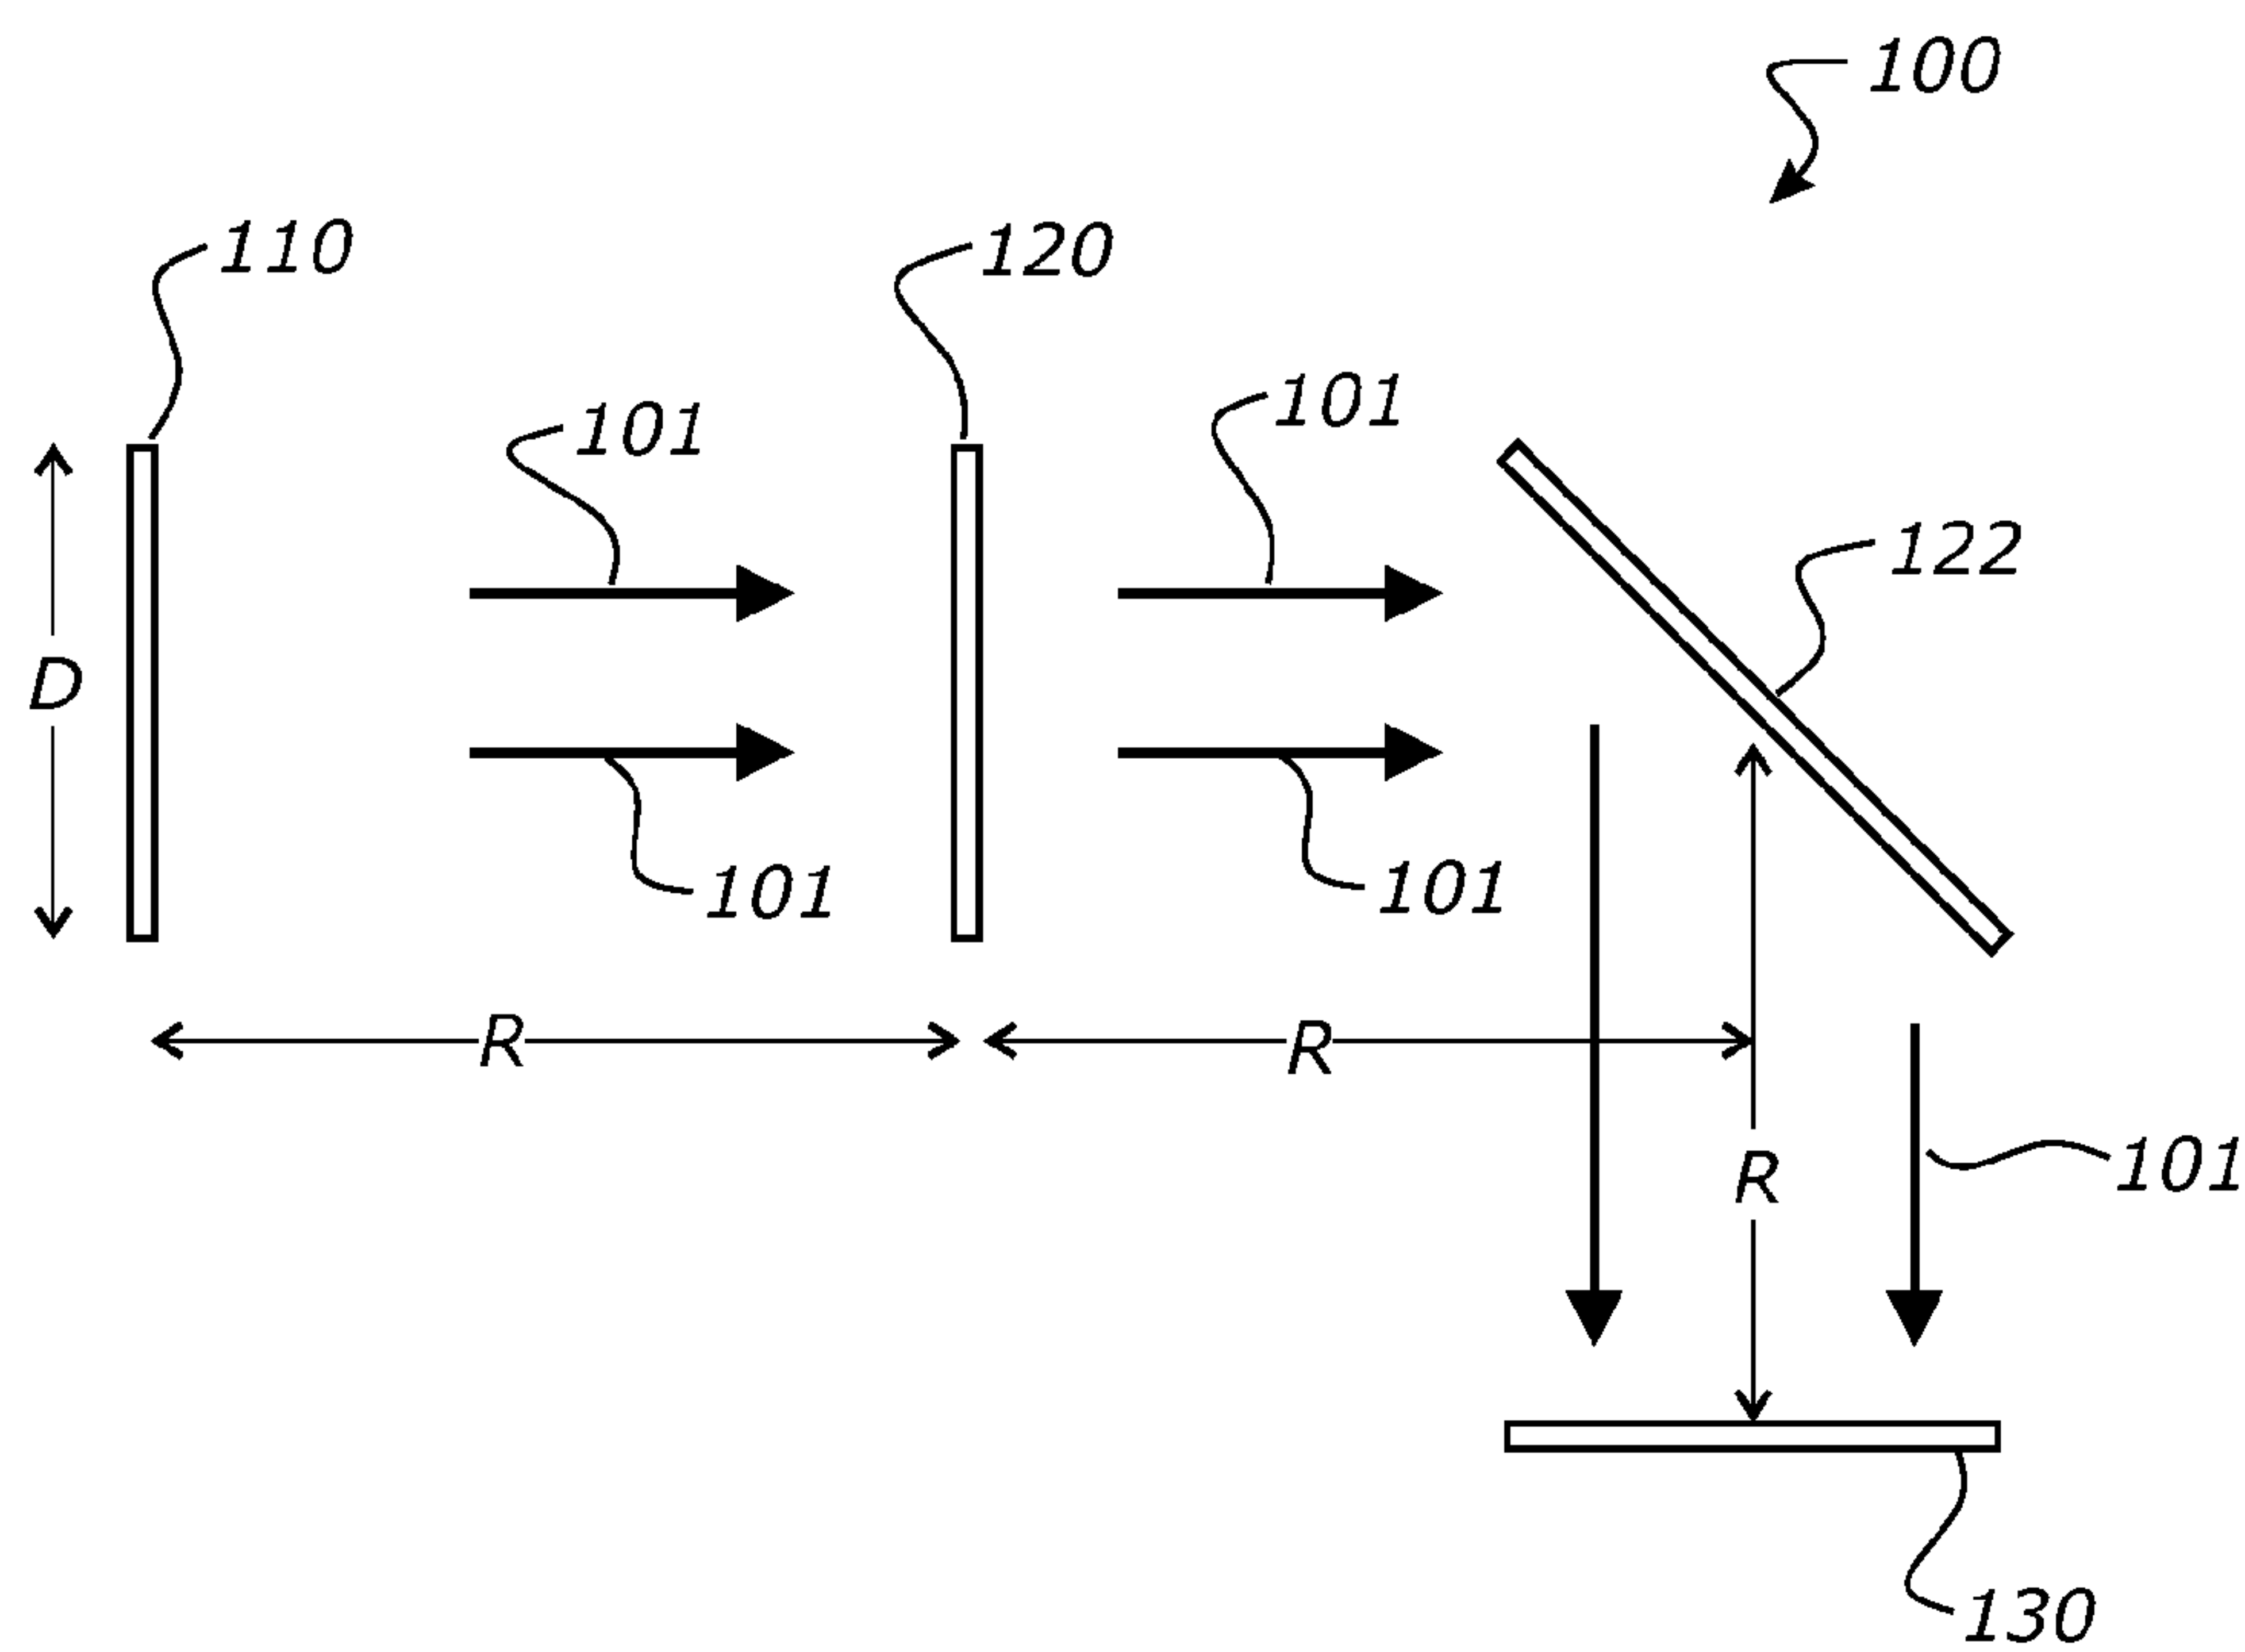


FIGURE 1

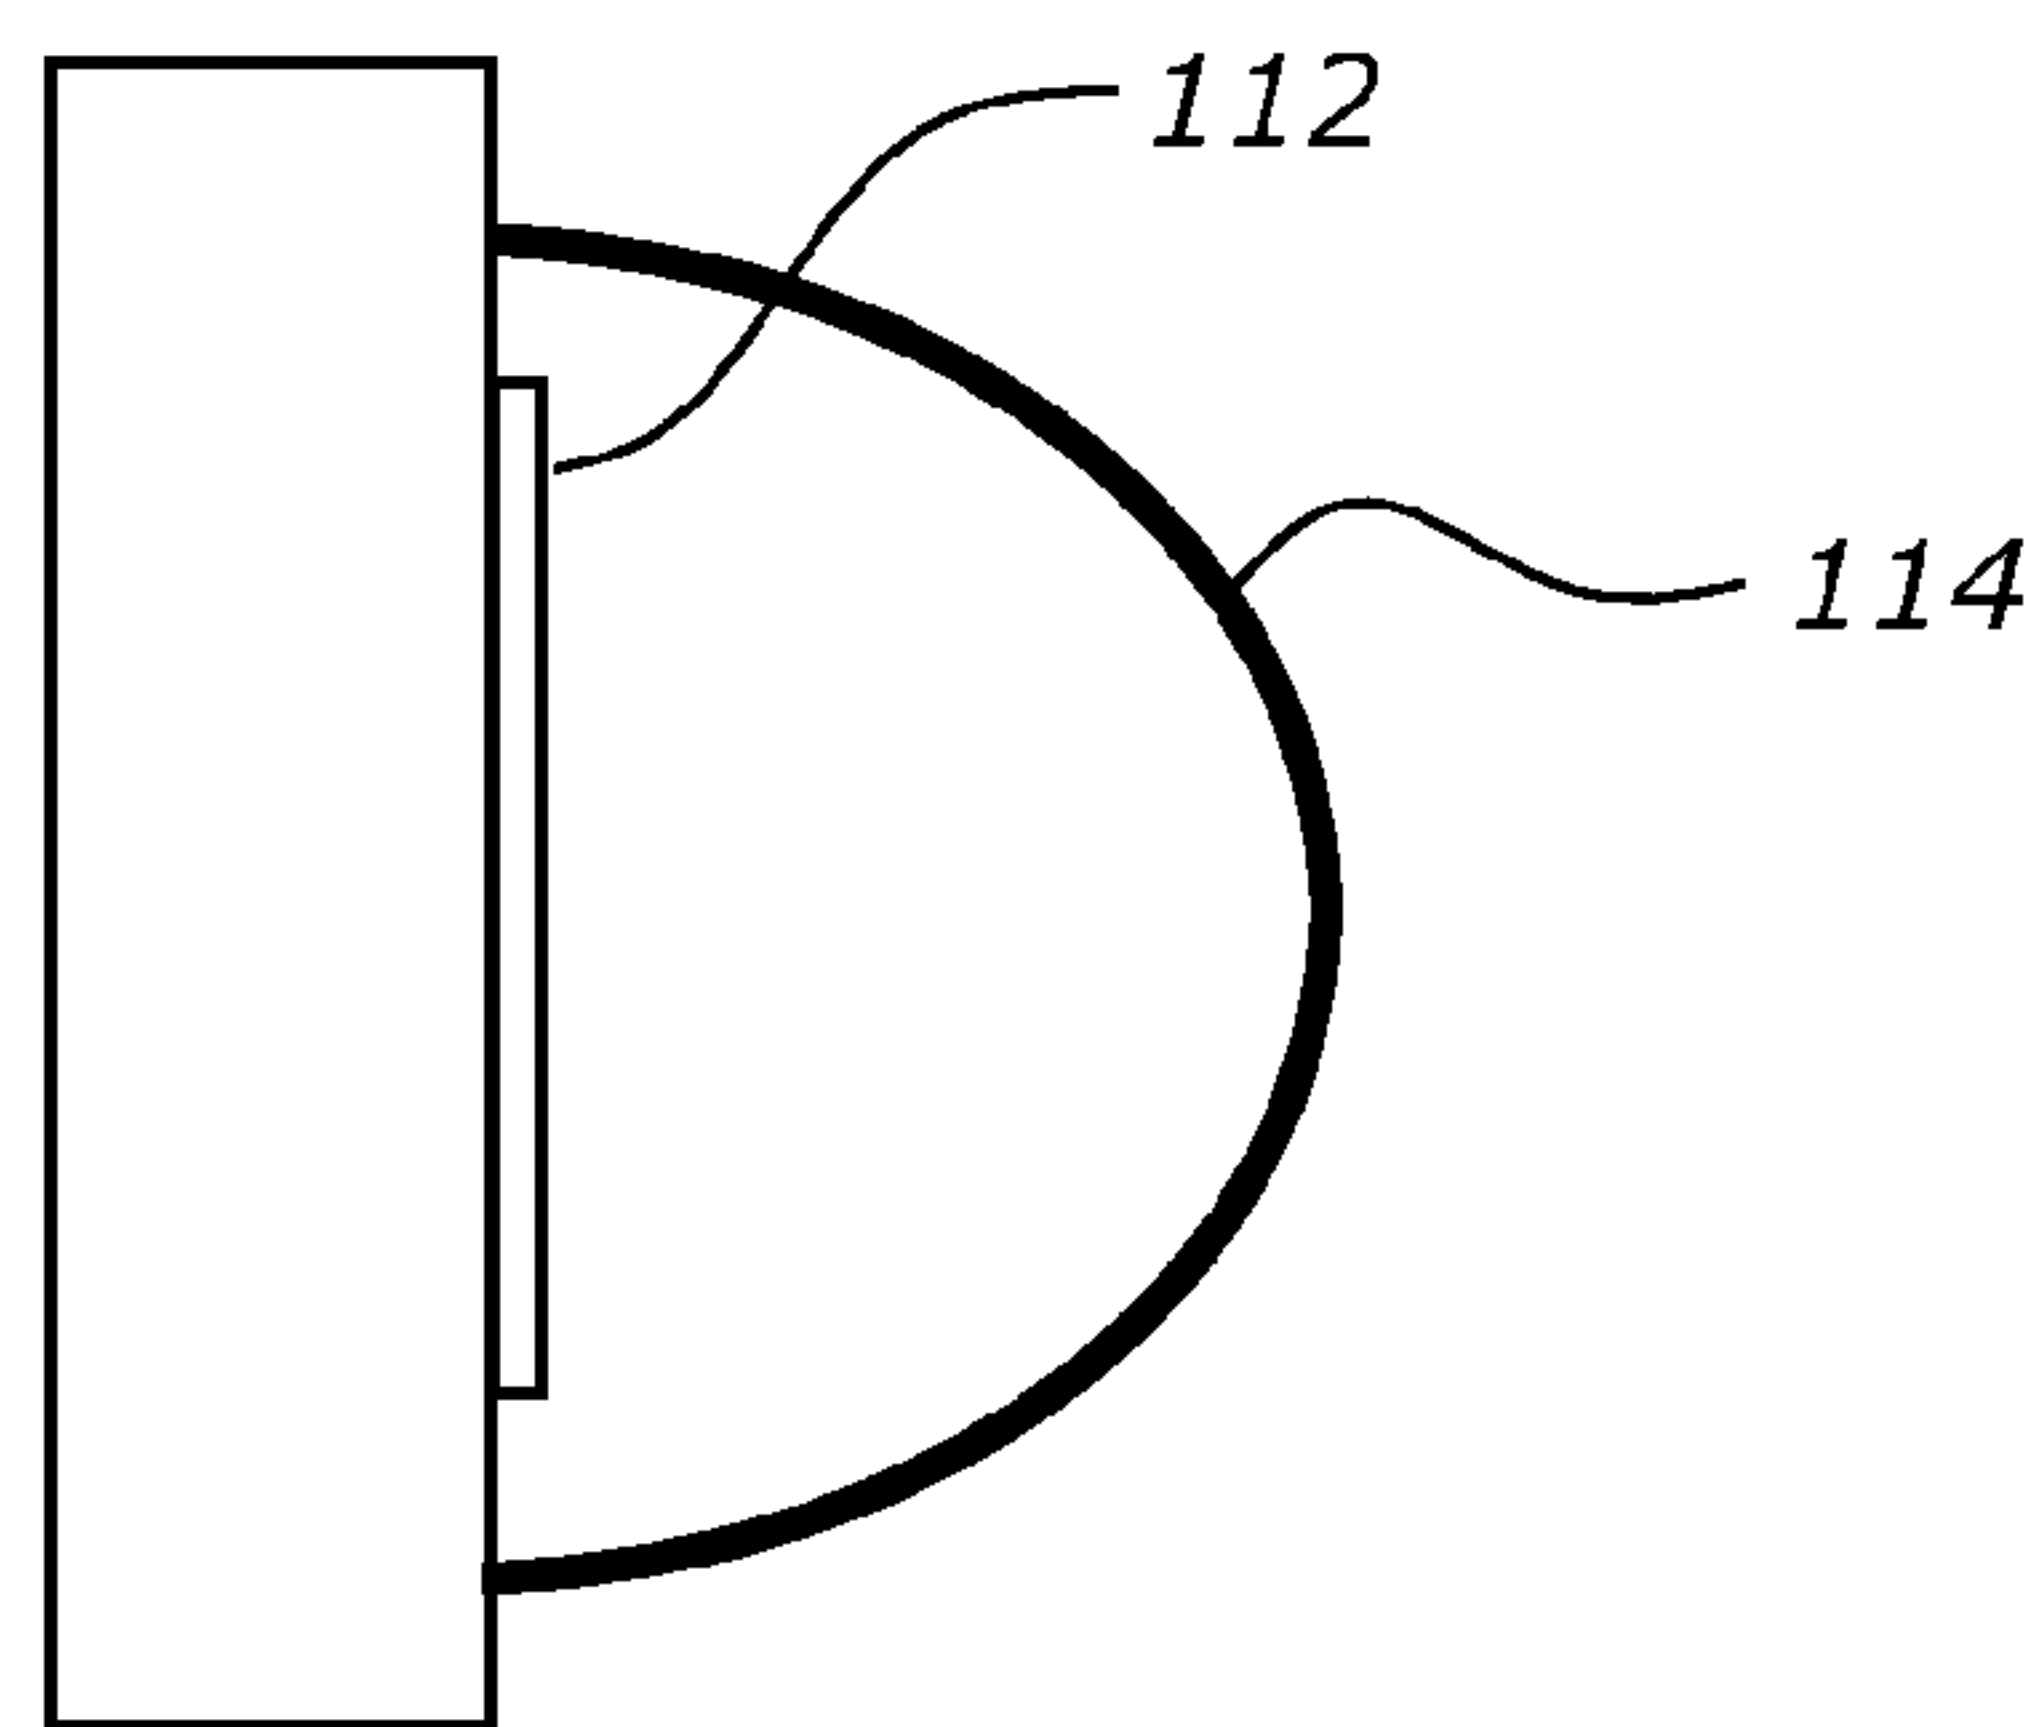
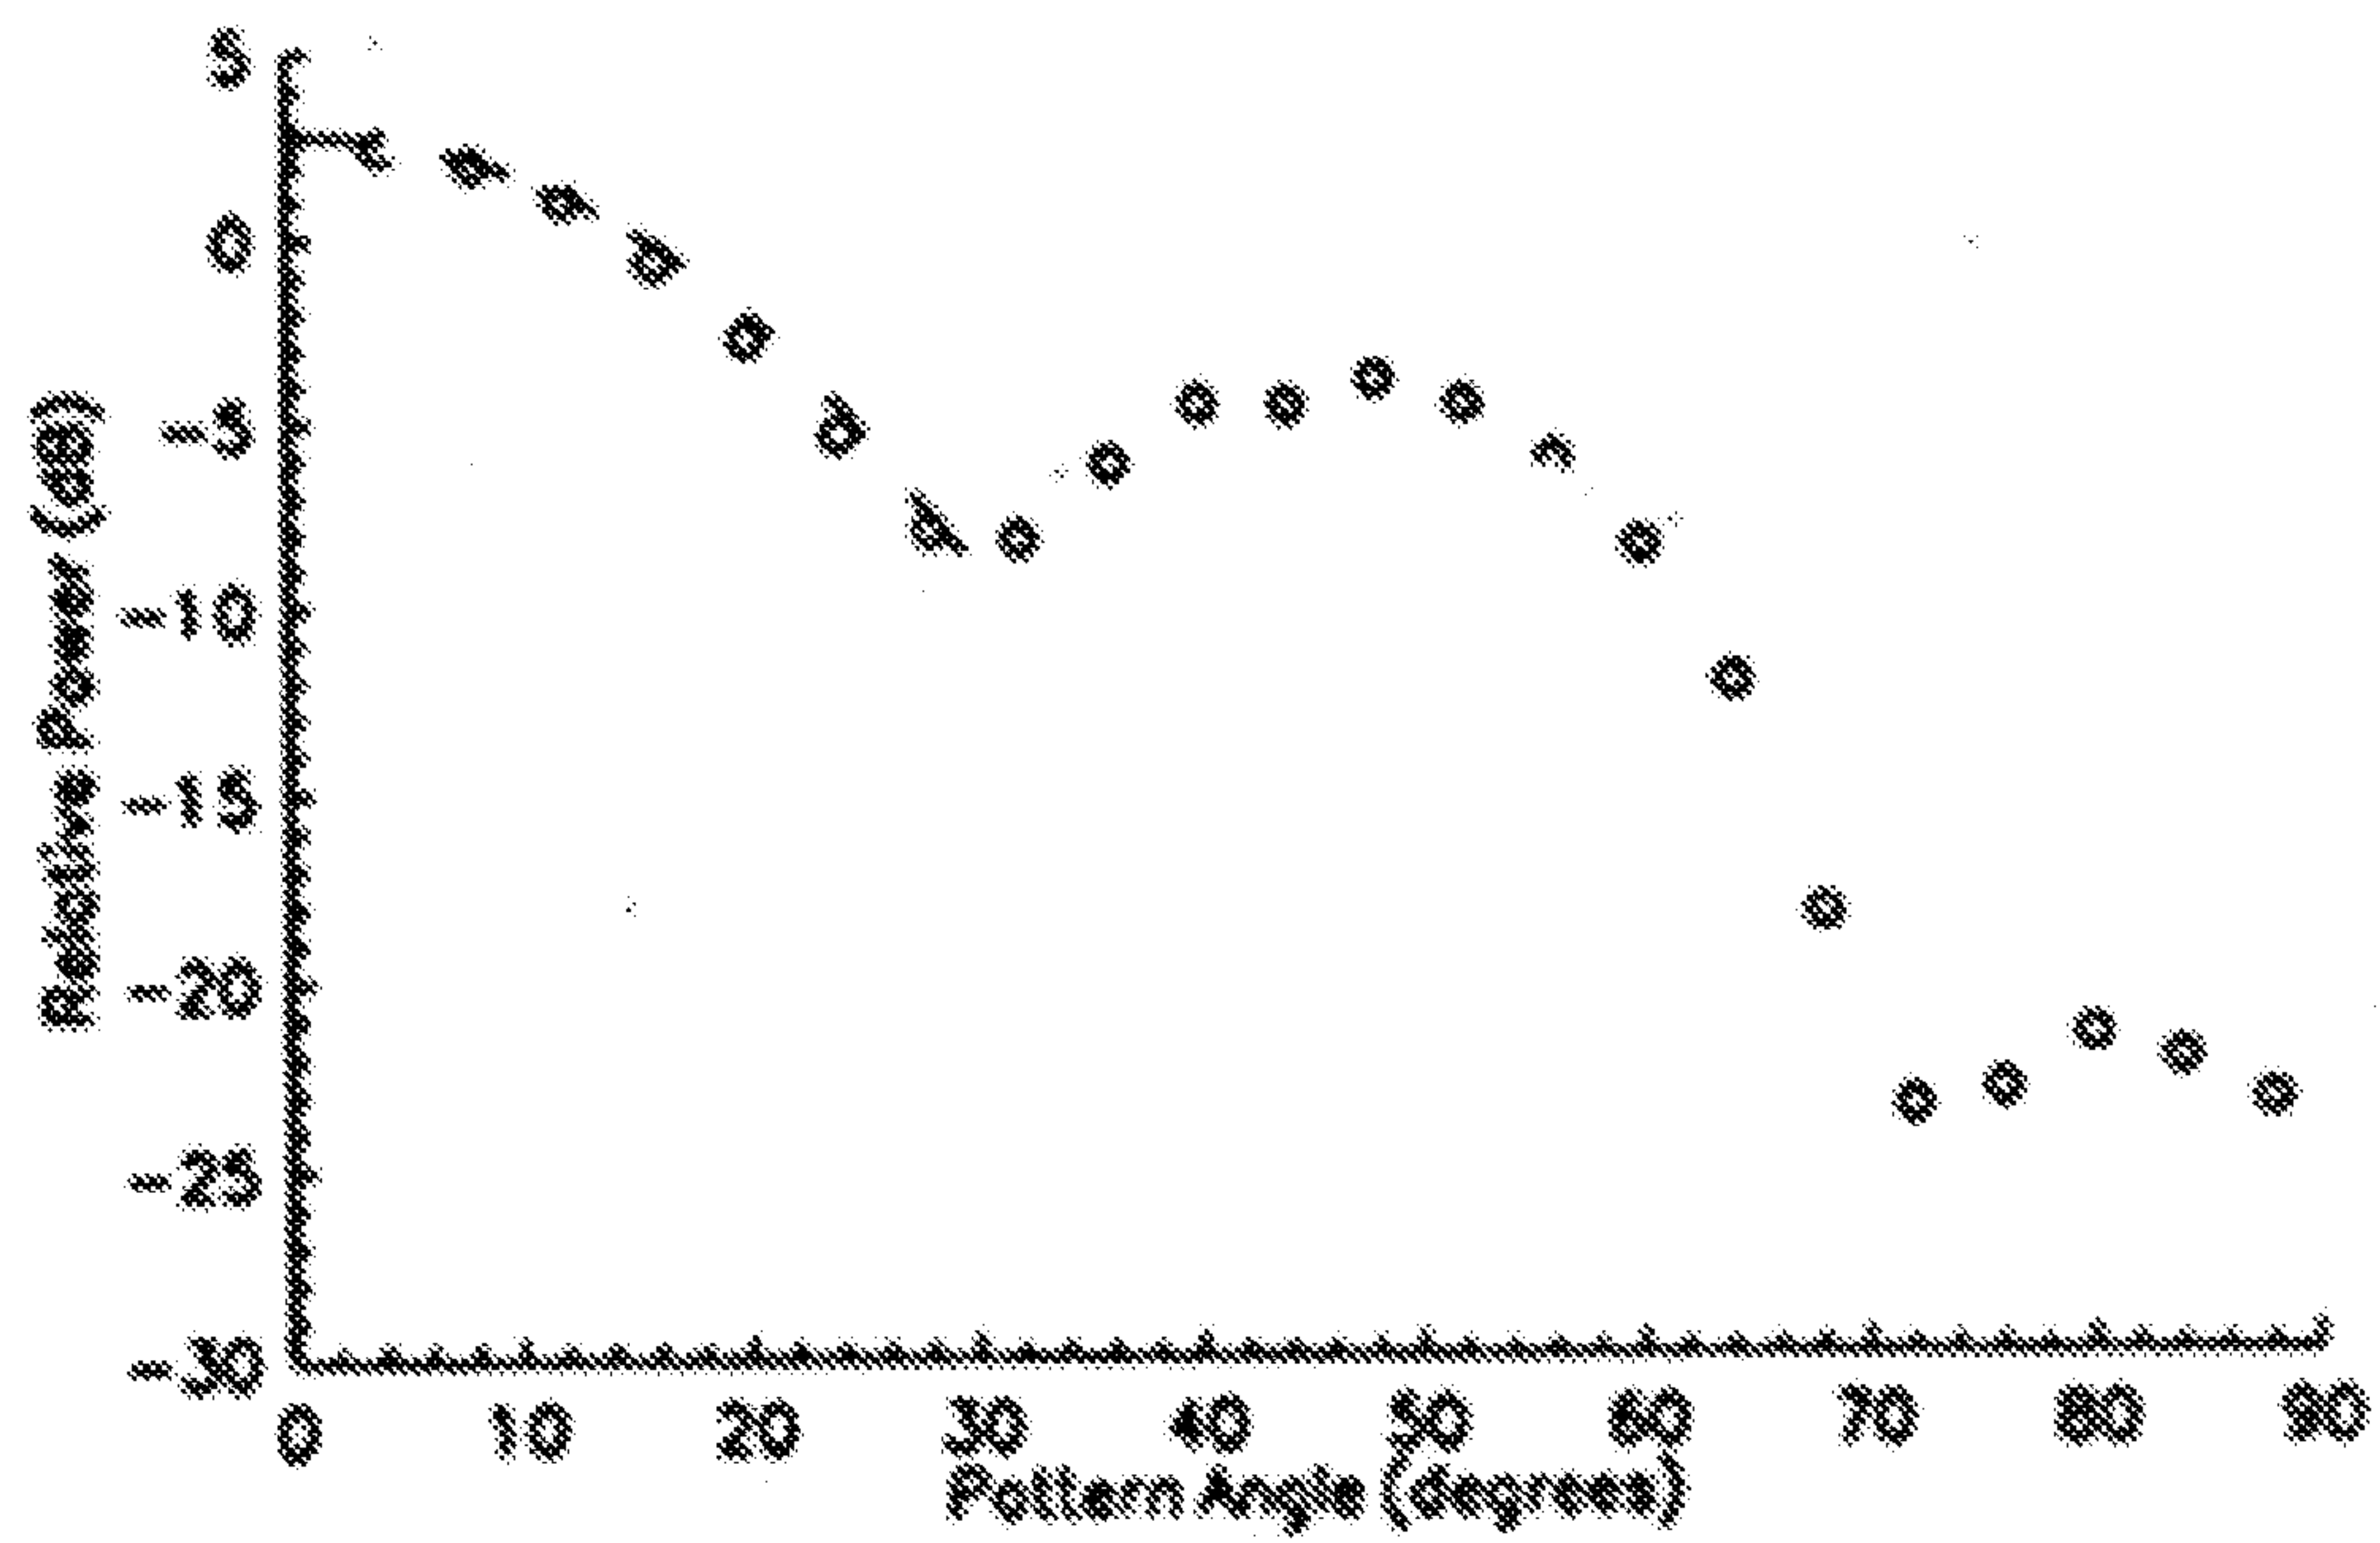
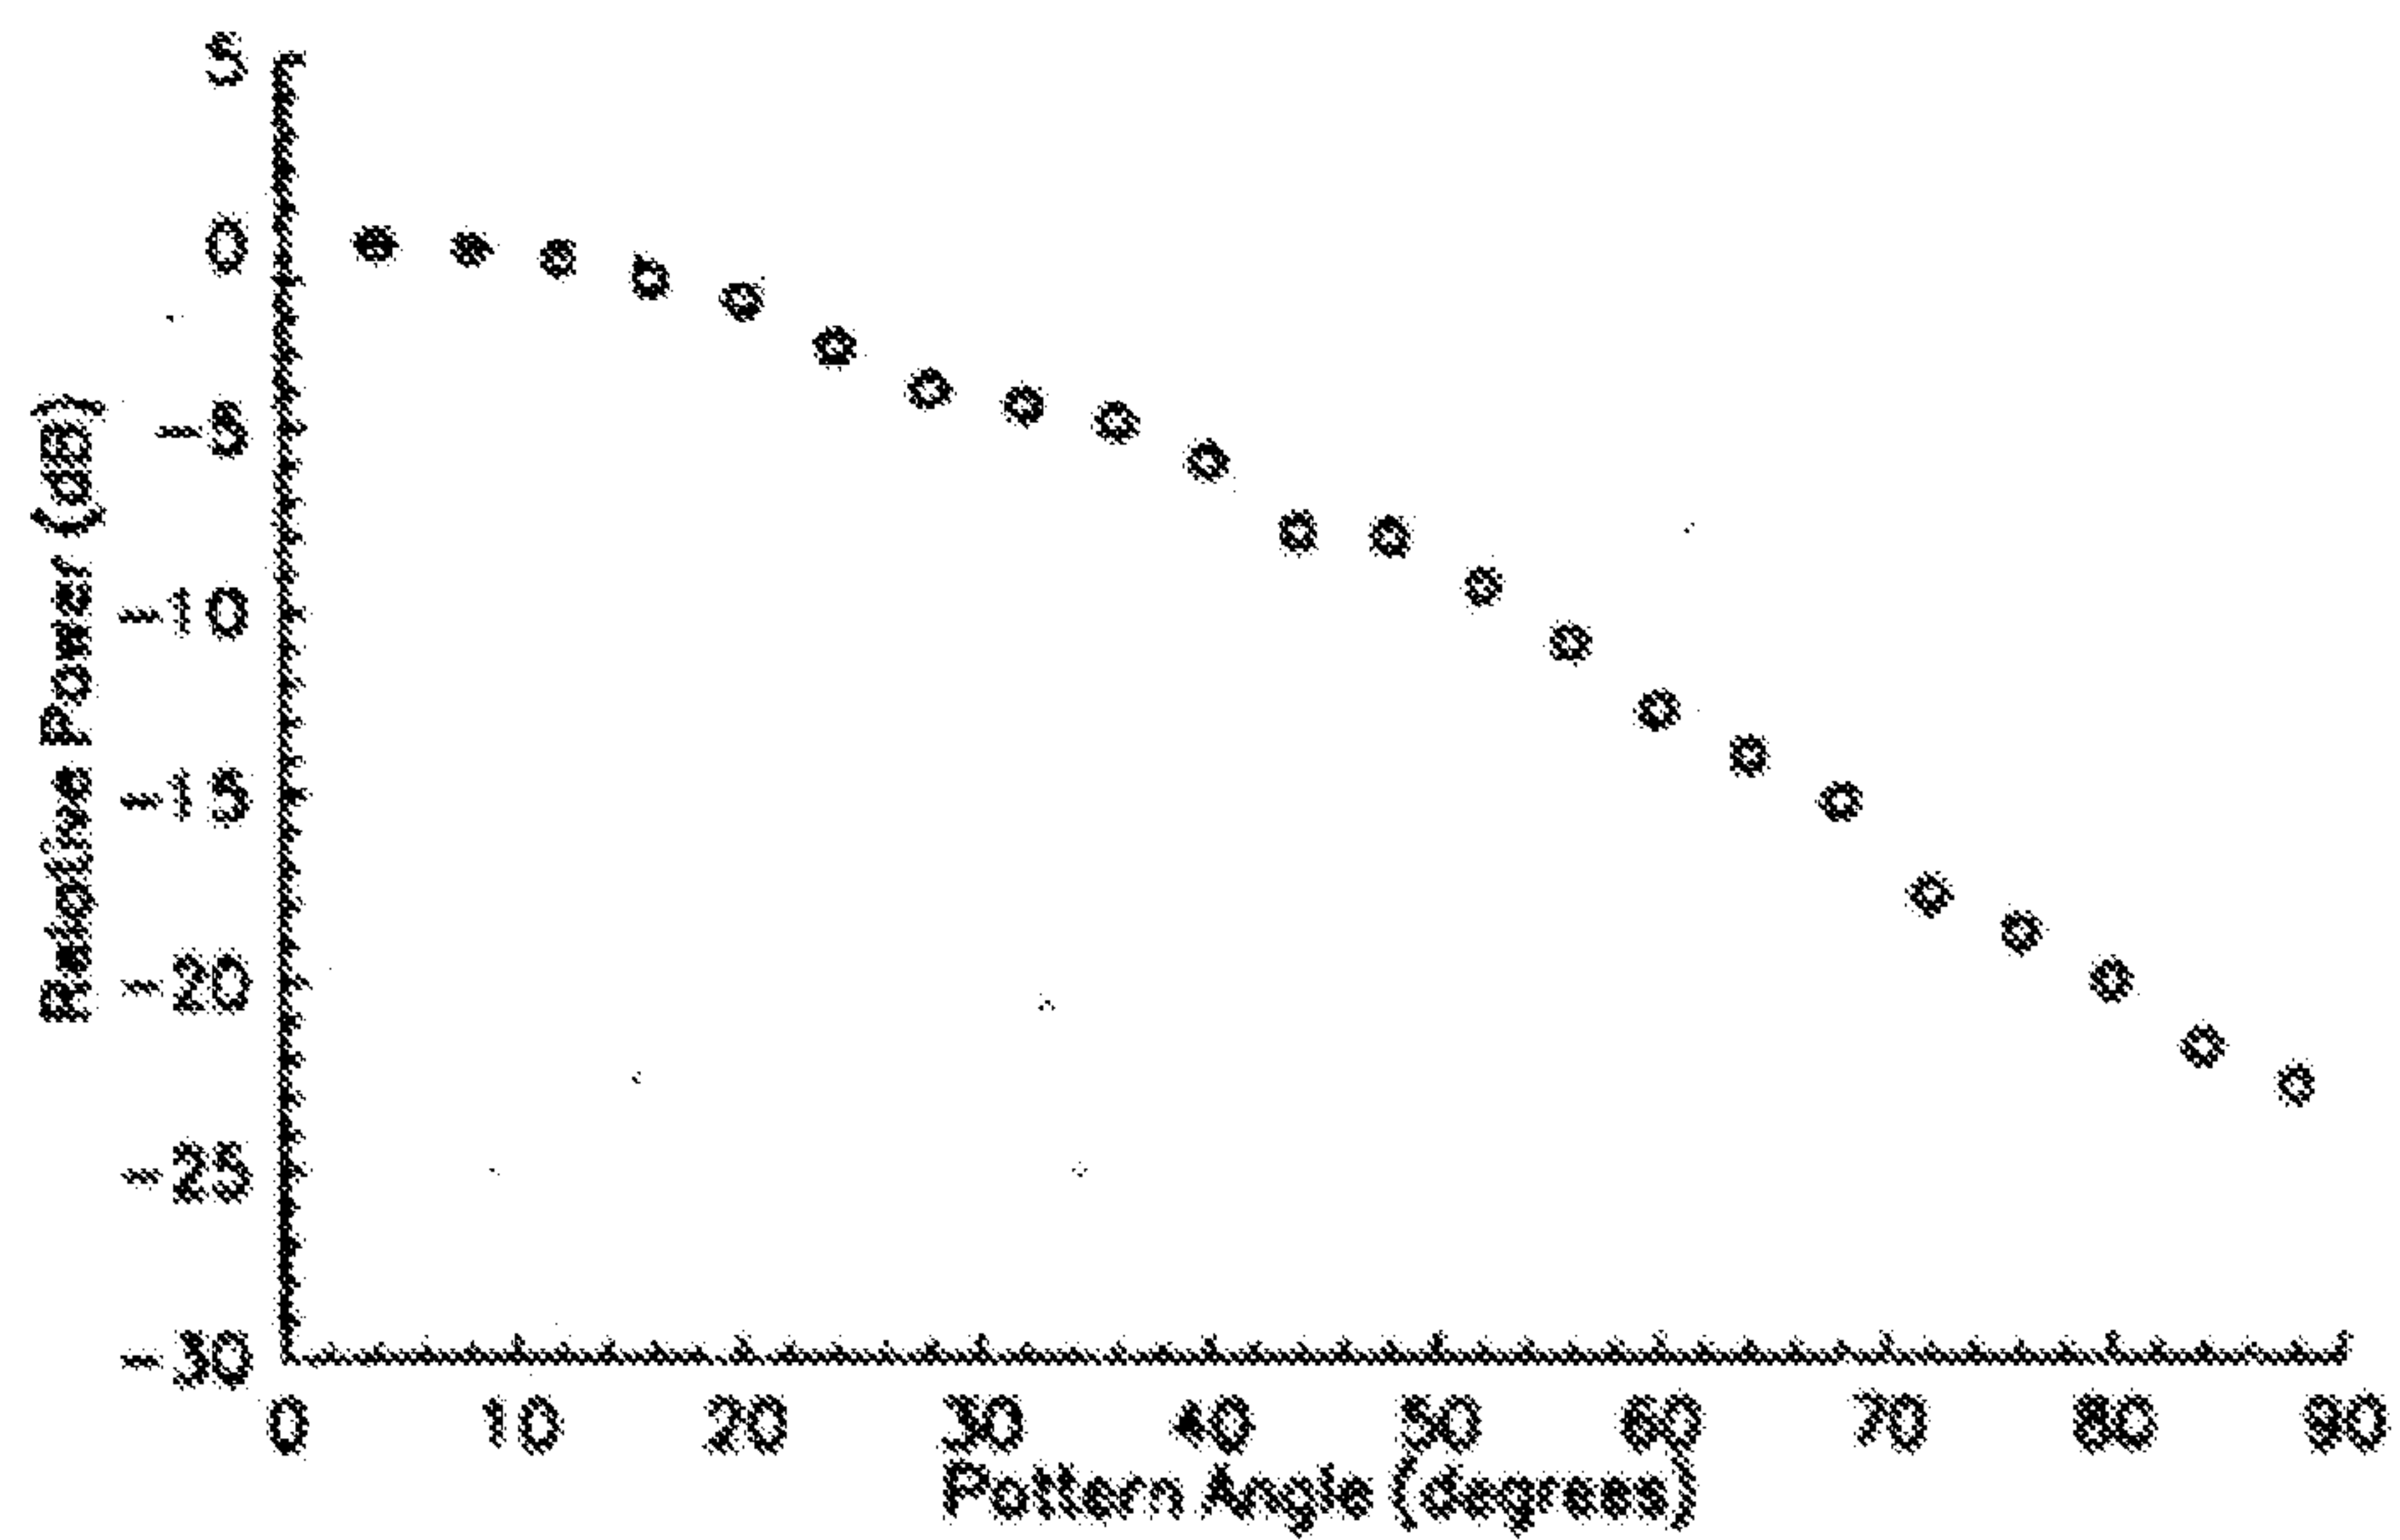


FIGURE 2

**FIGURE 3A****FIGURE 3B**

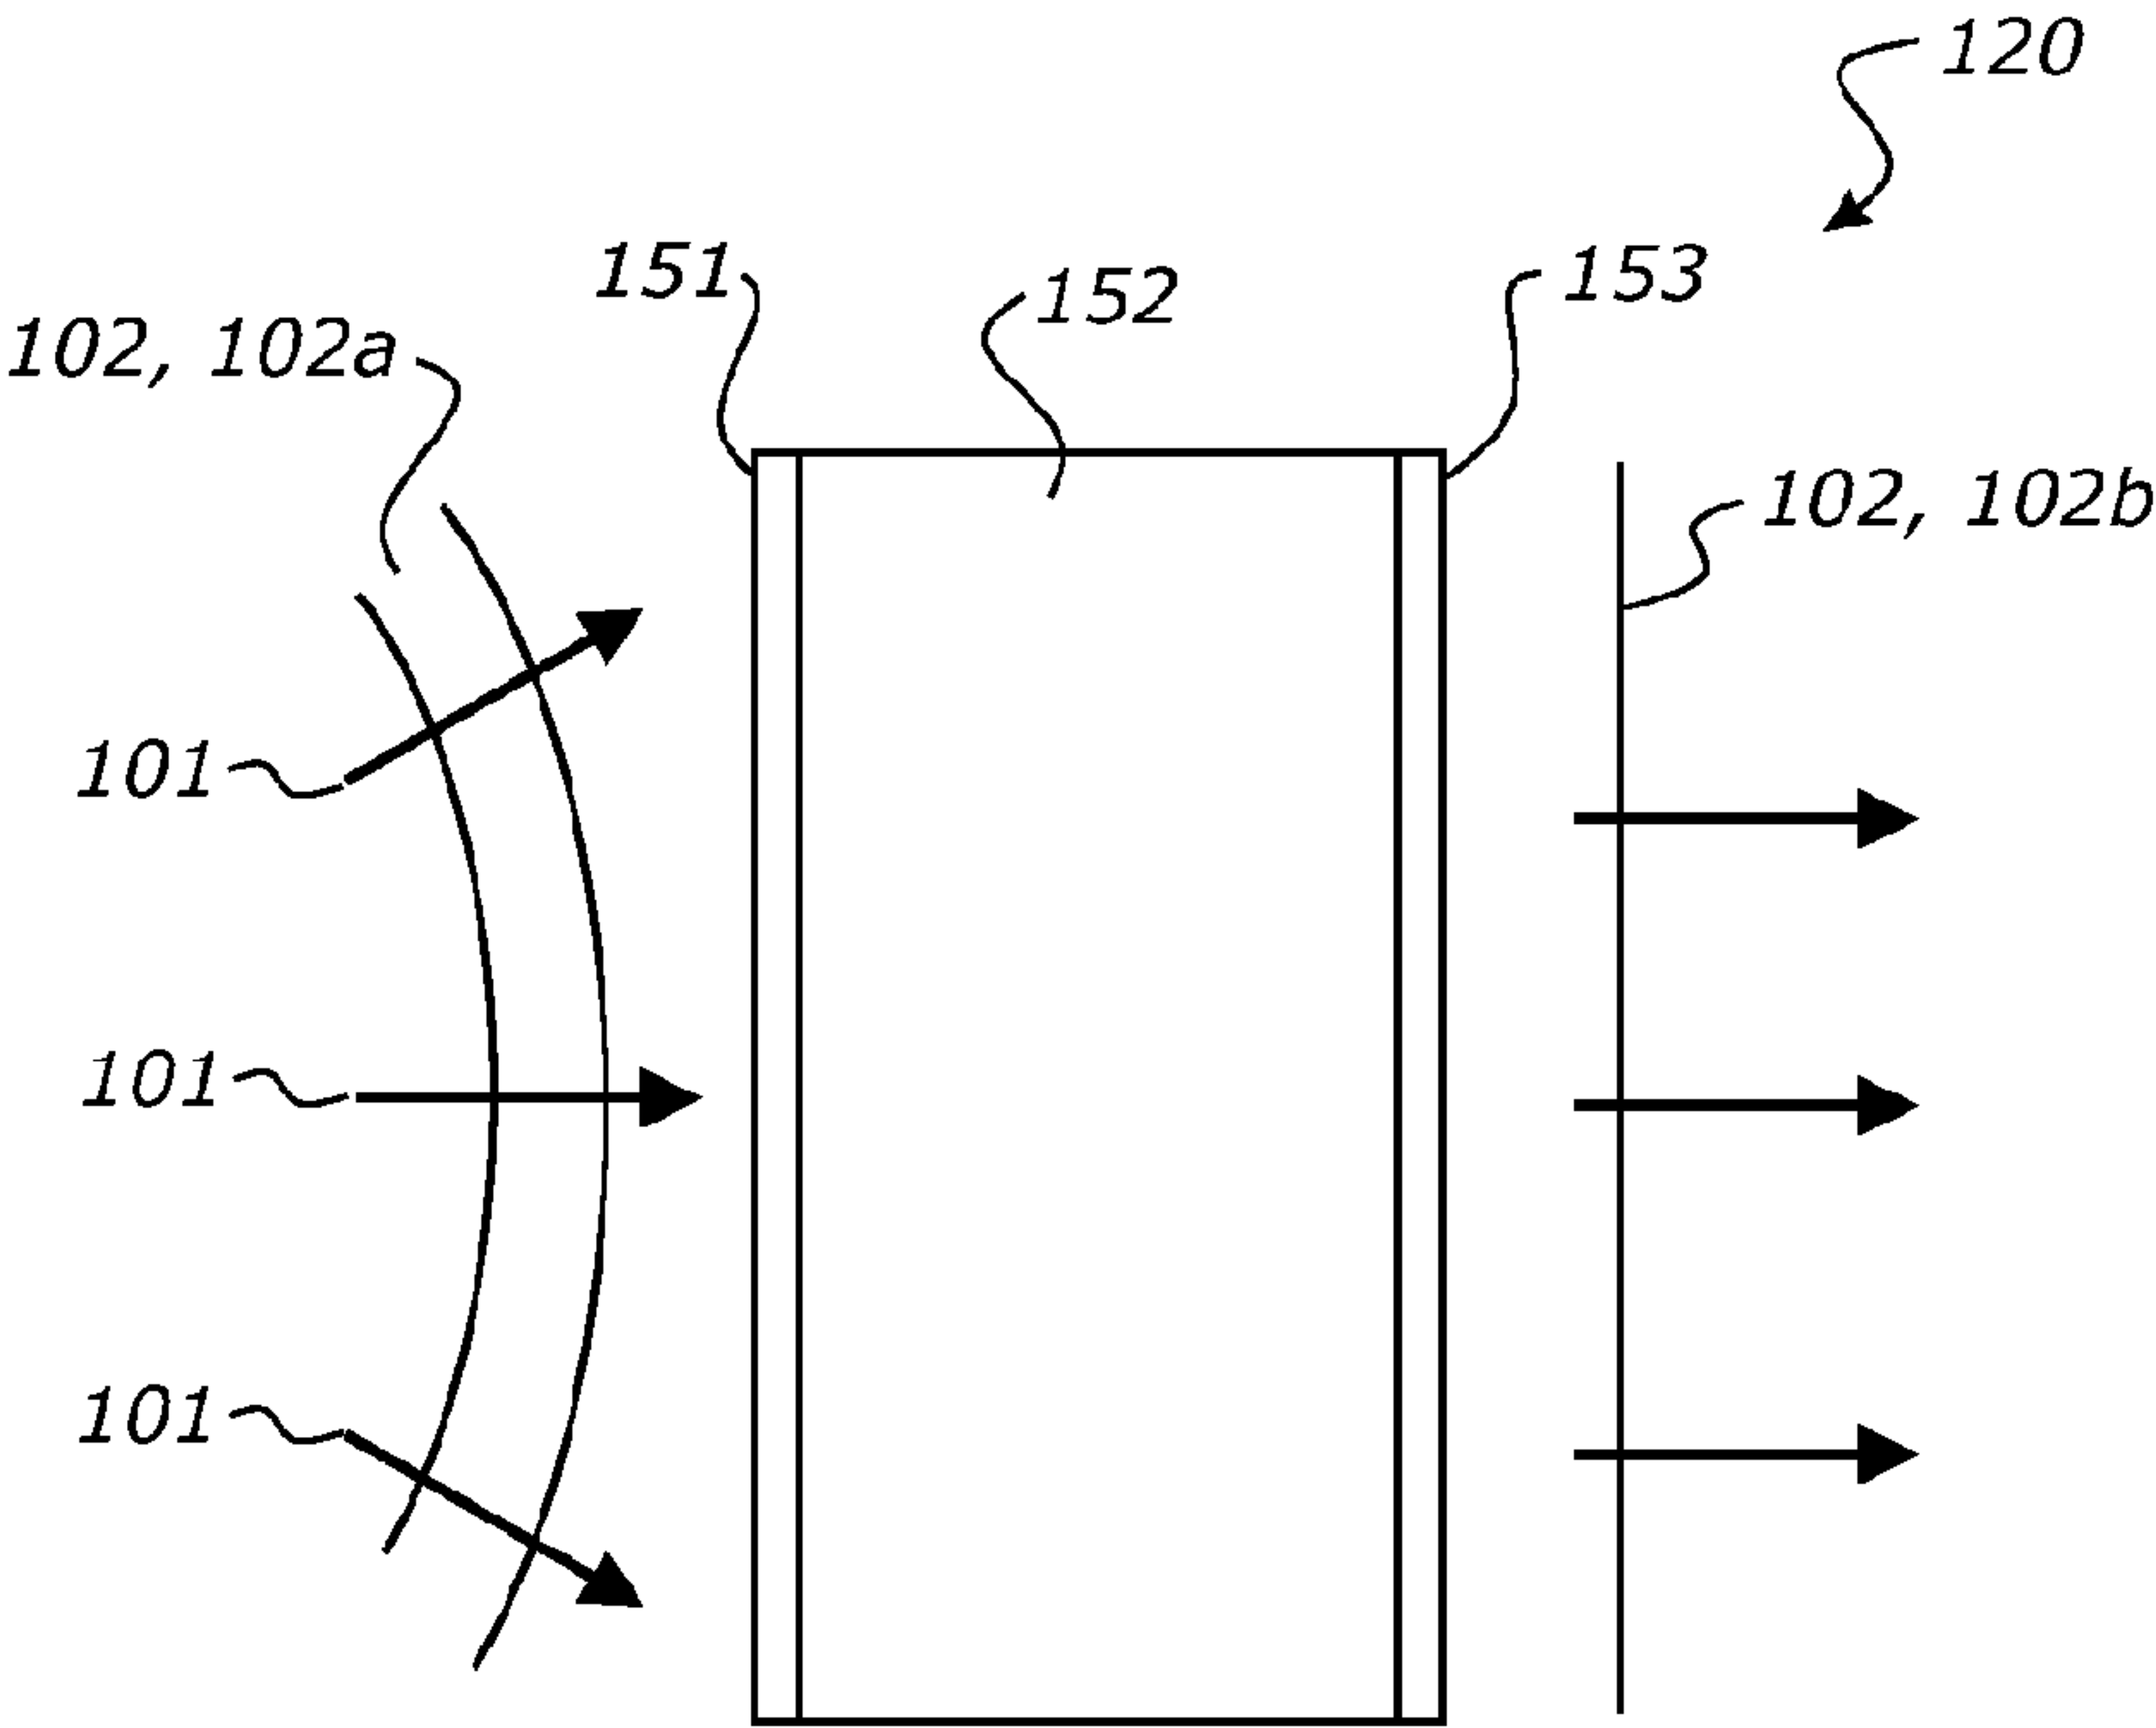


FIGURE 4

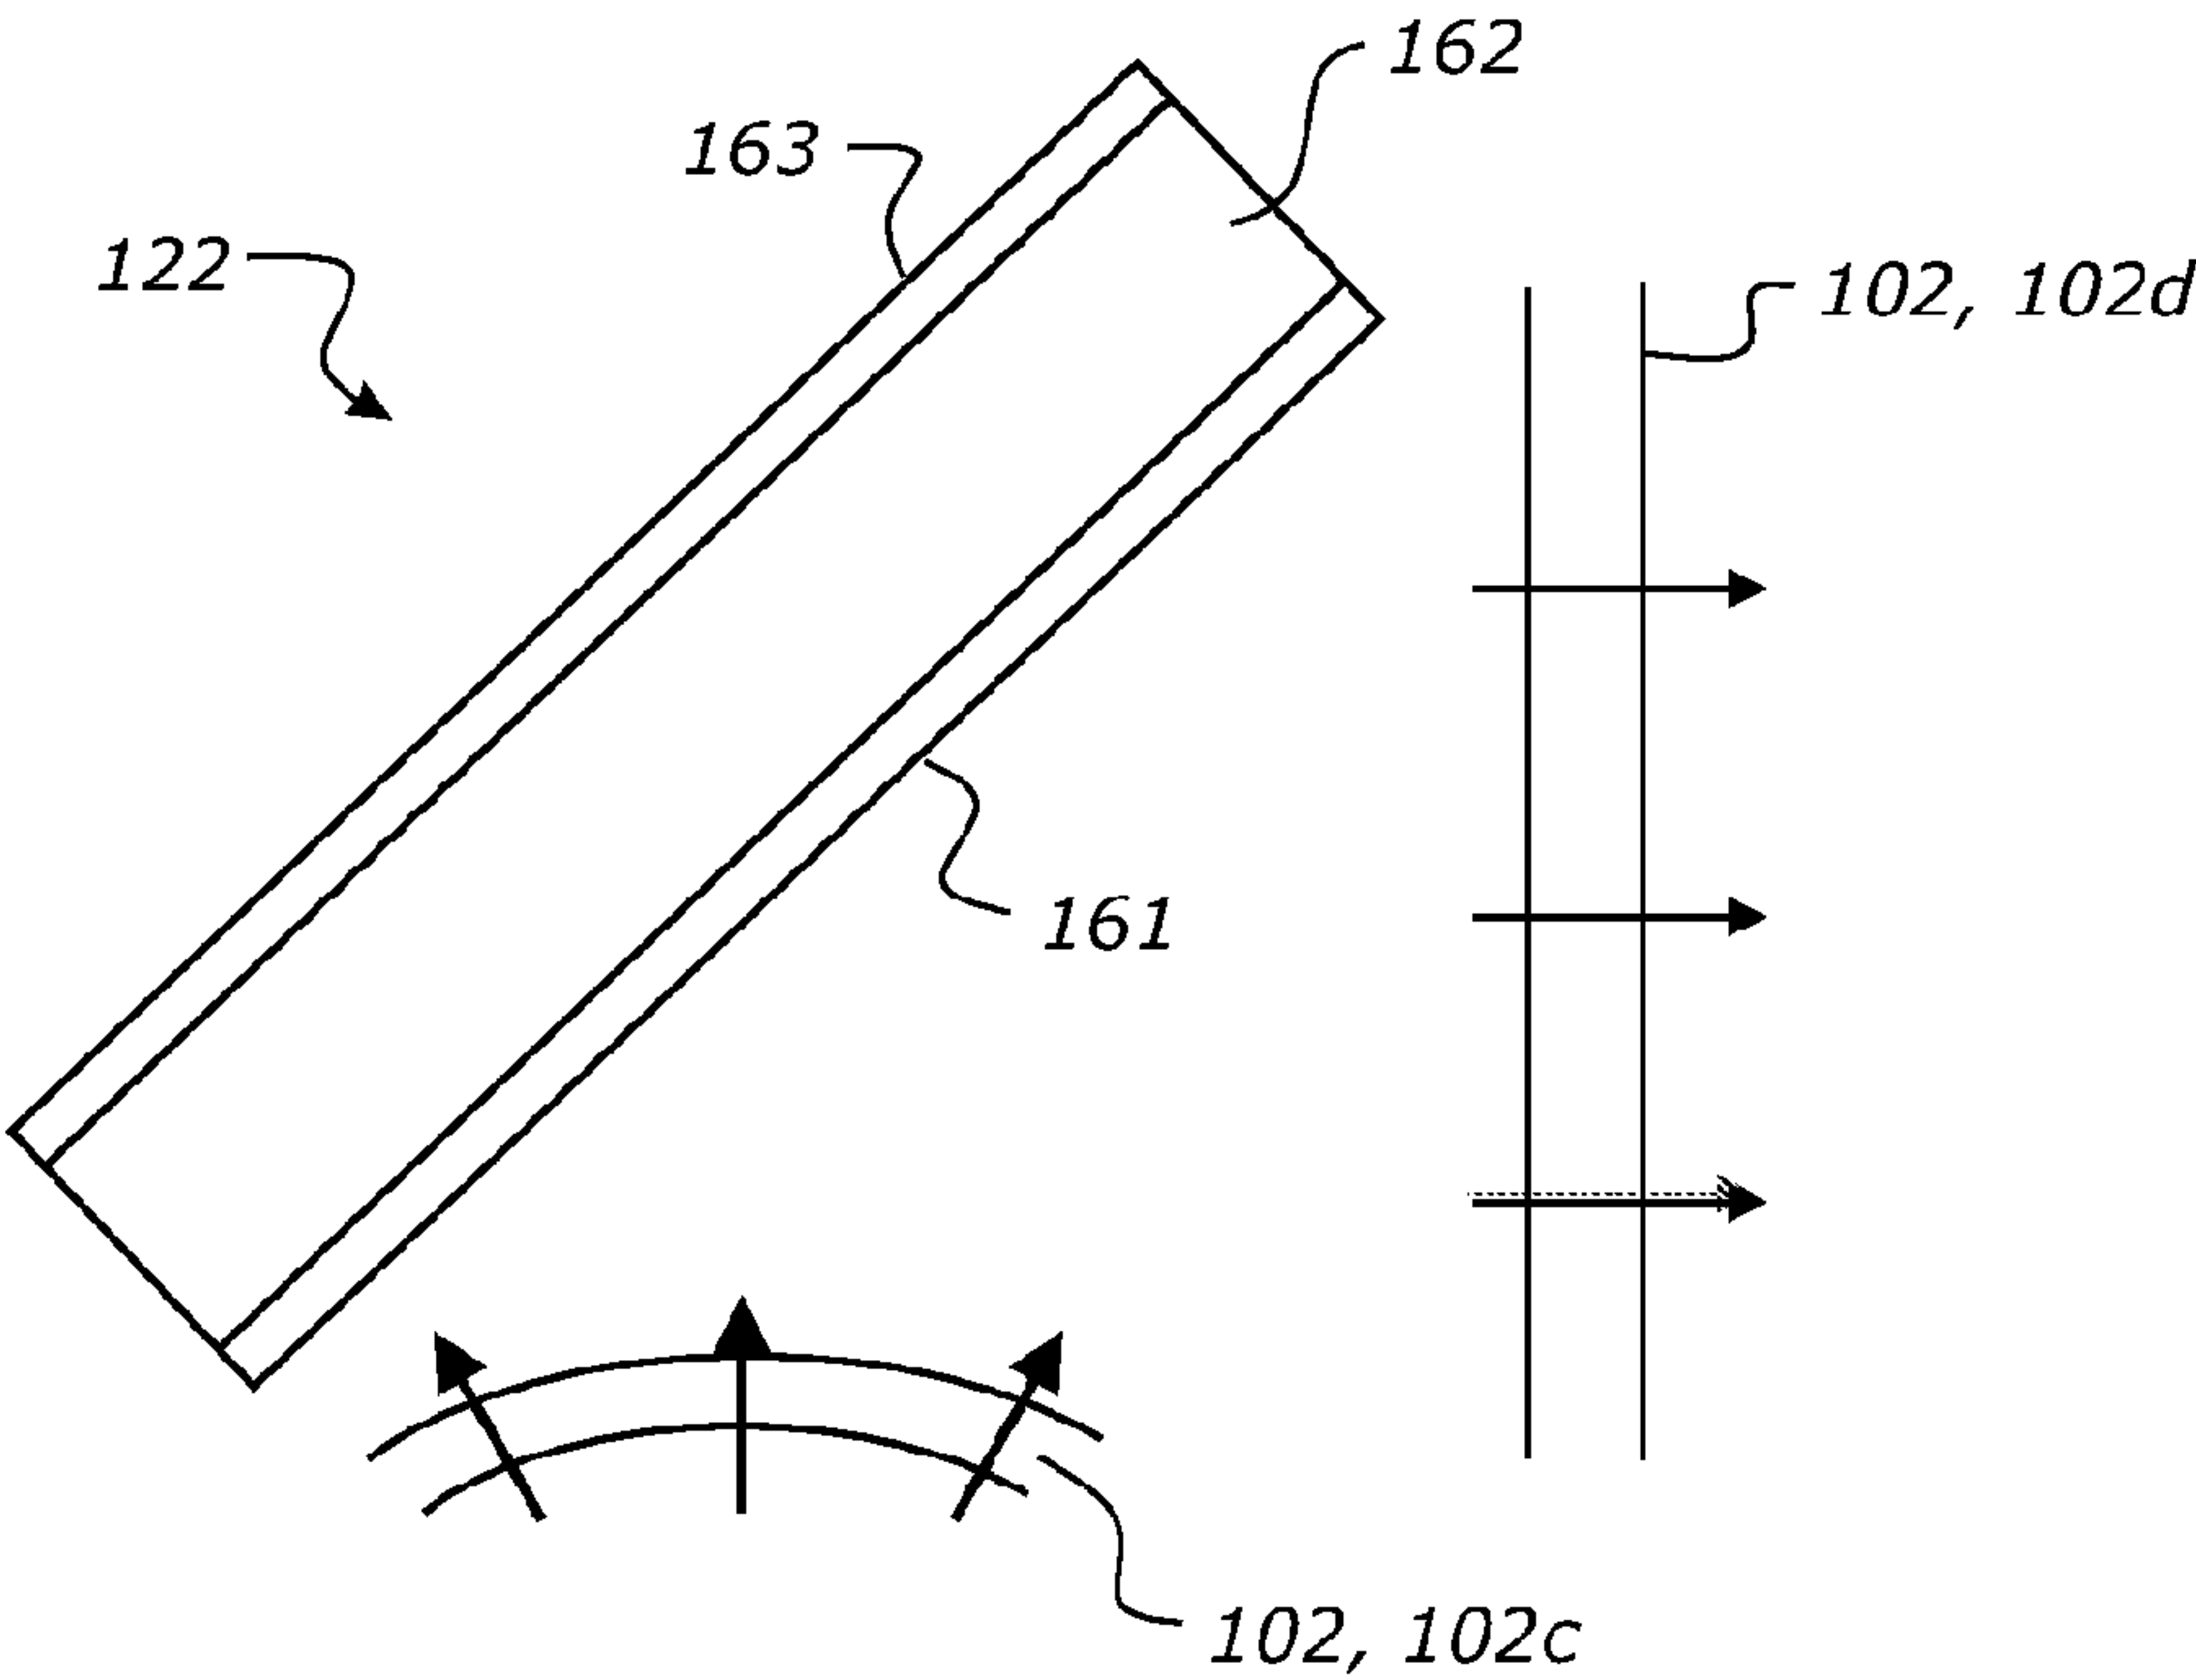


FIGURE 5

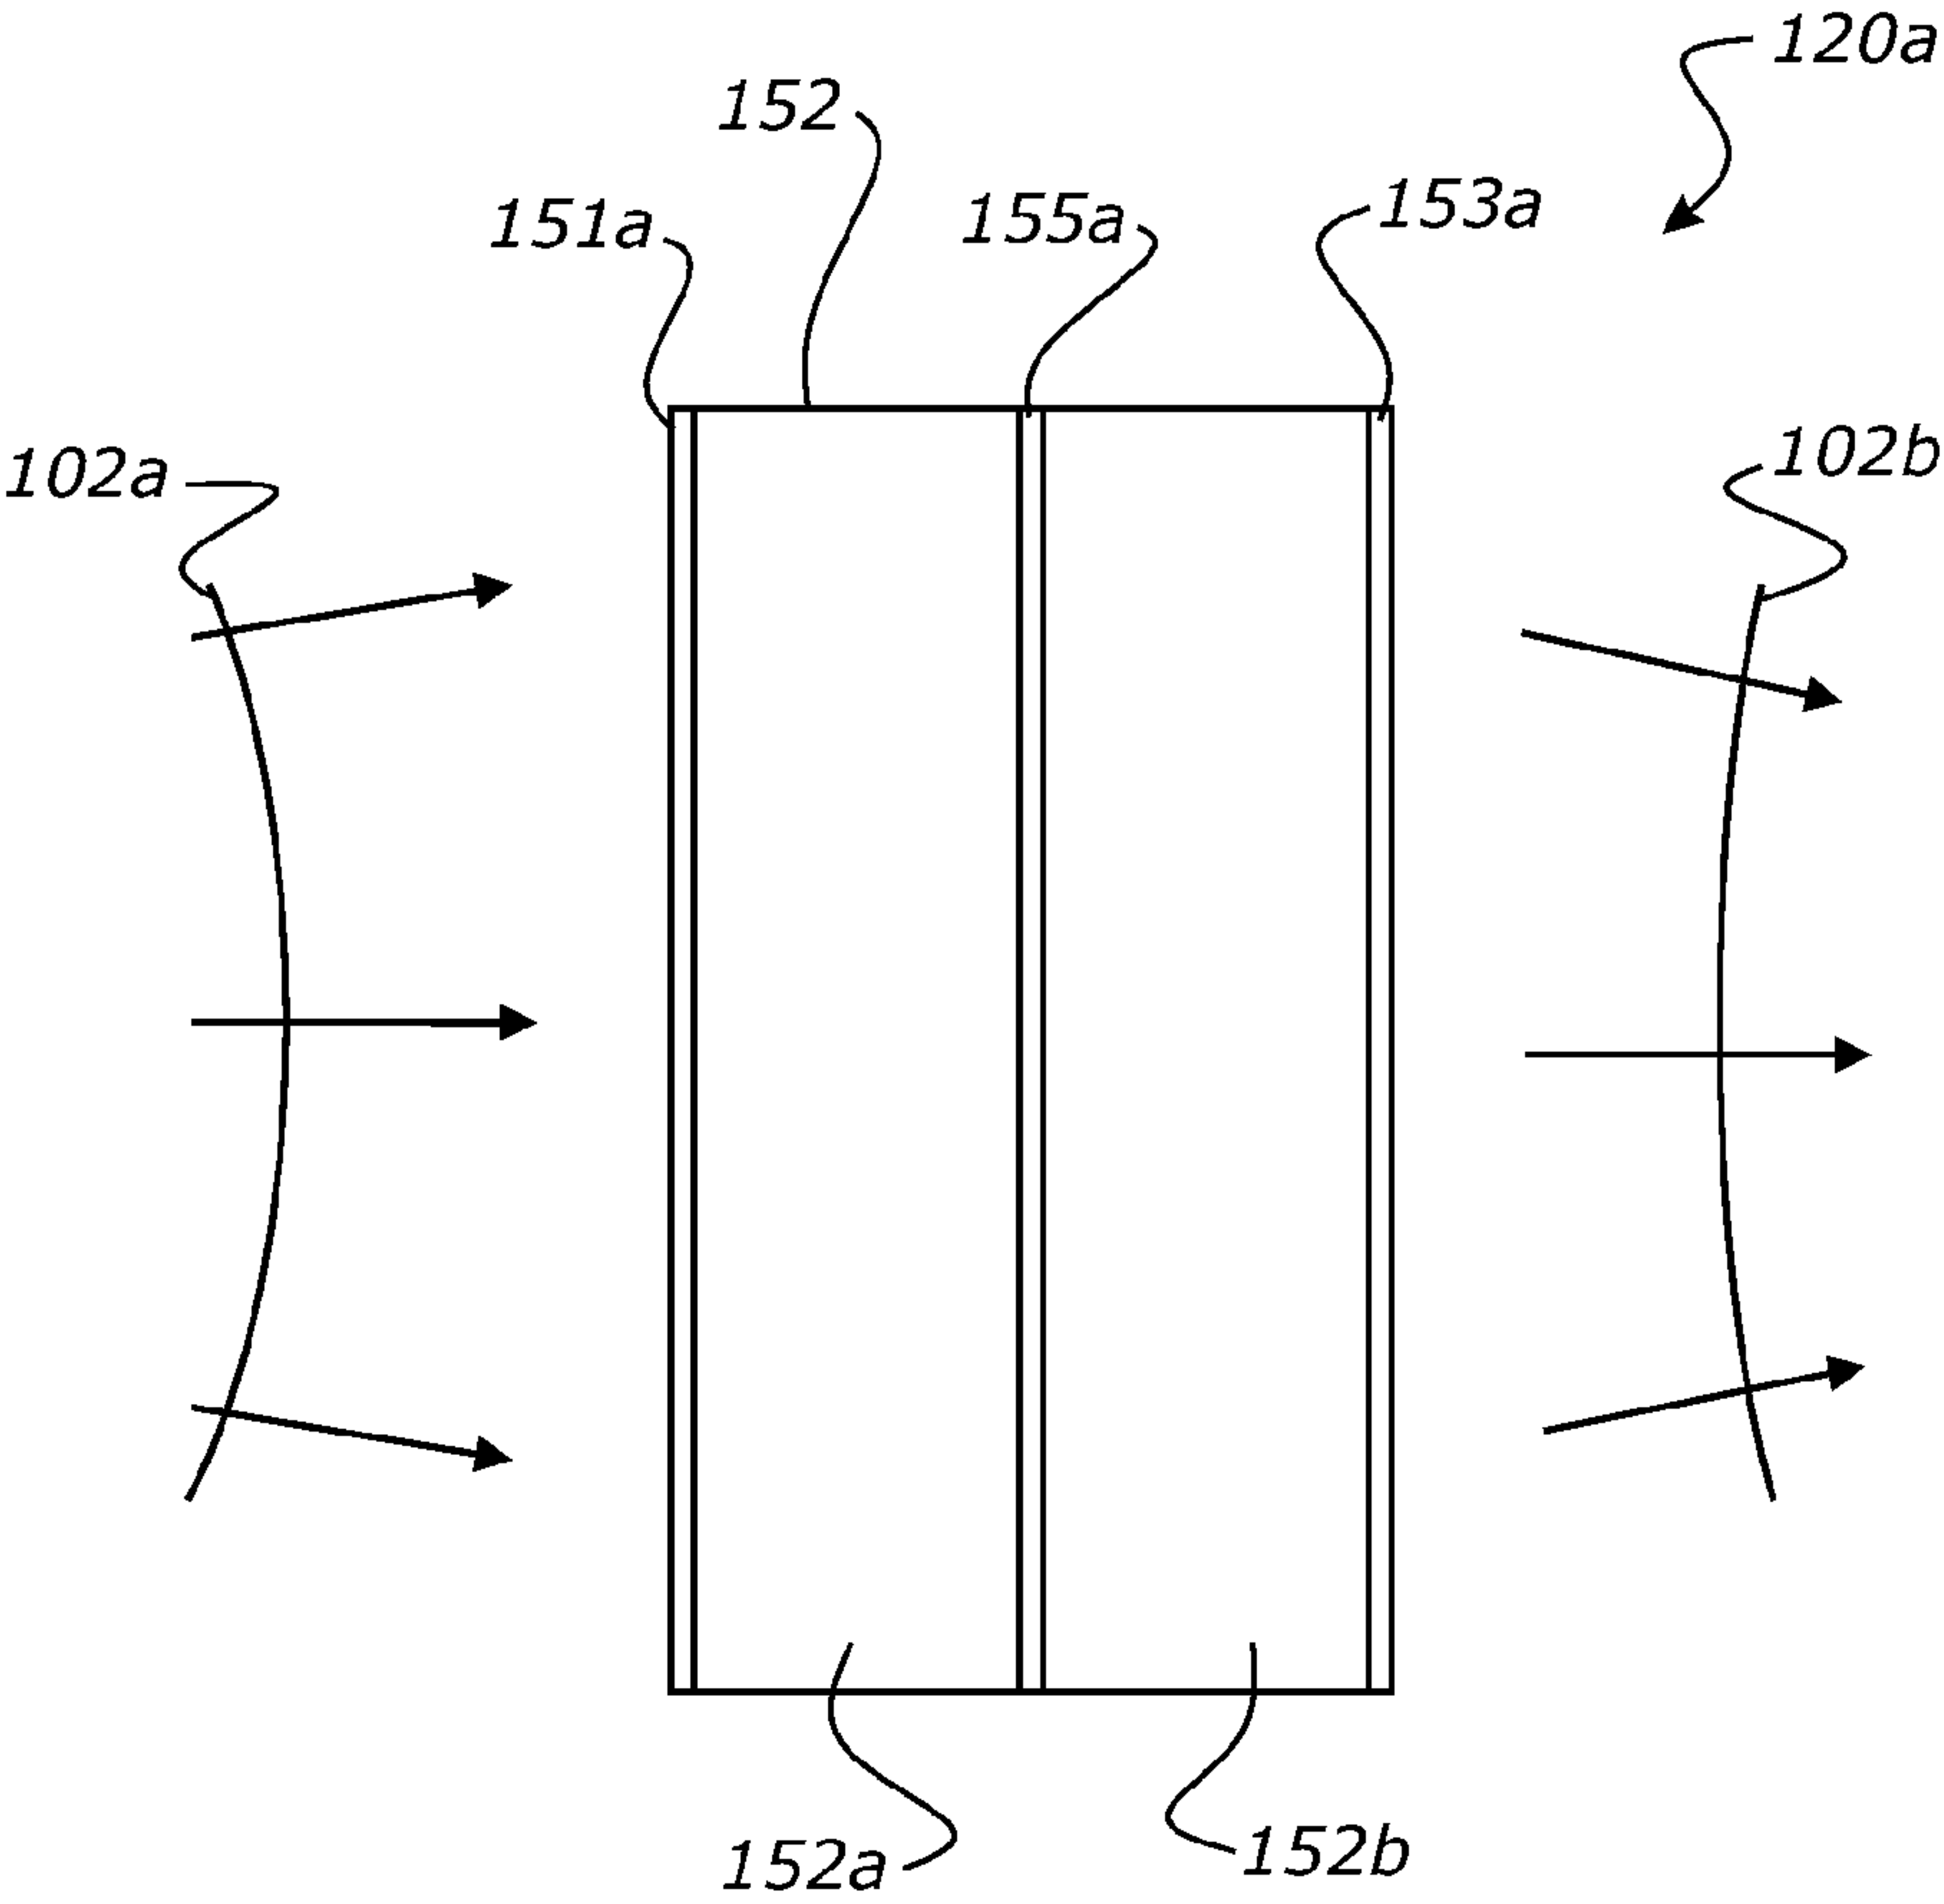


FIGURE 6

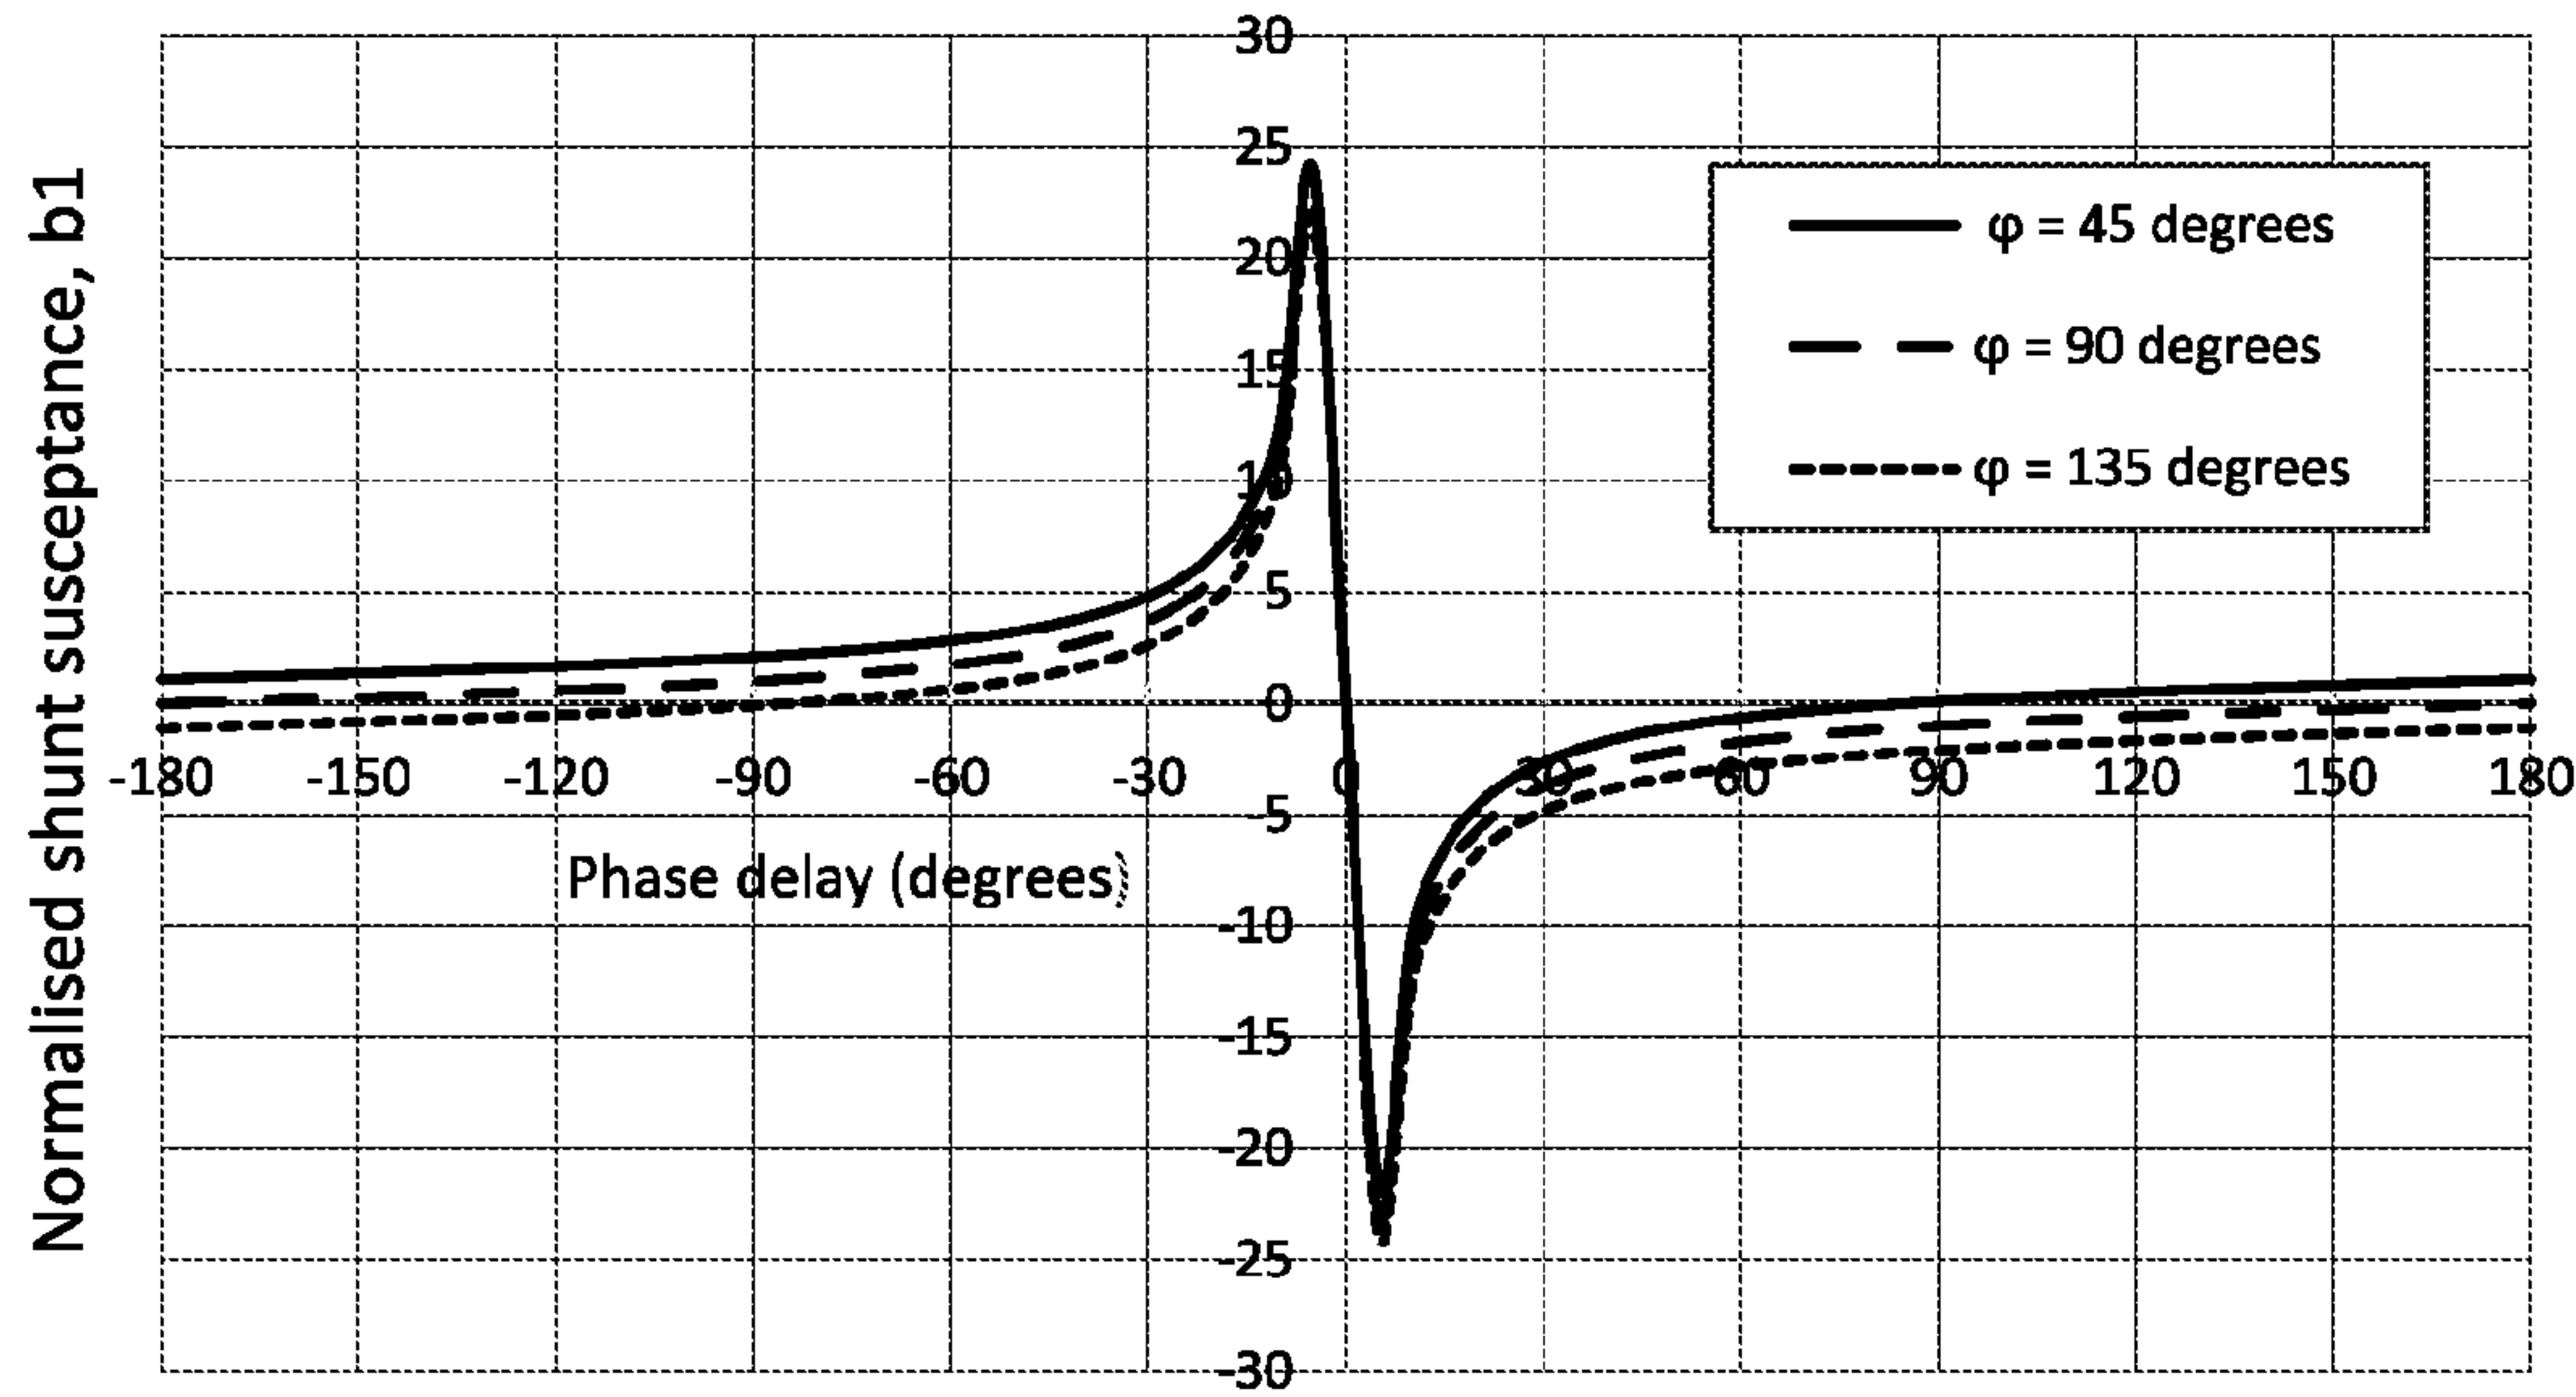


FIGURE 7

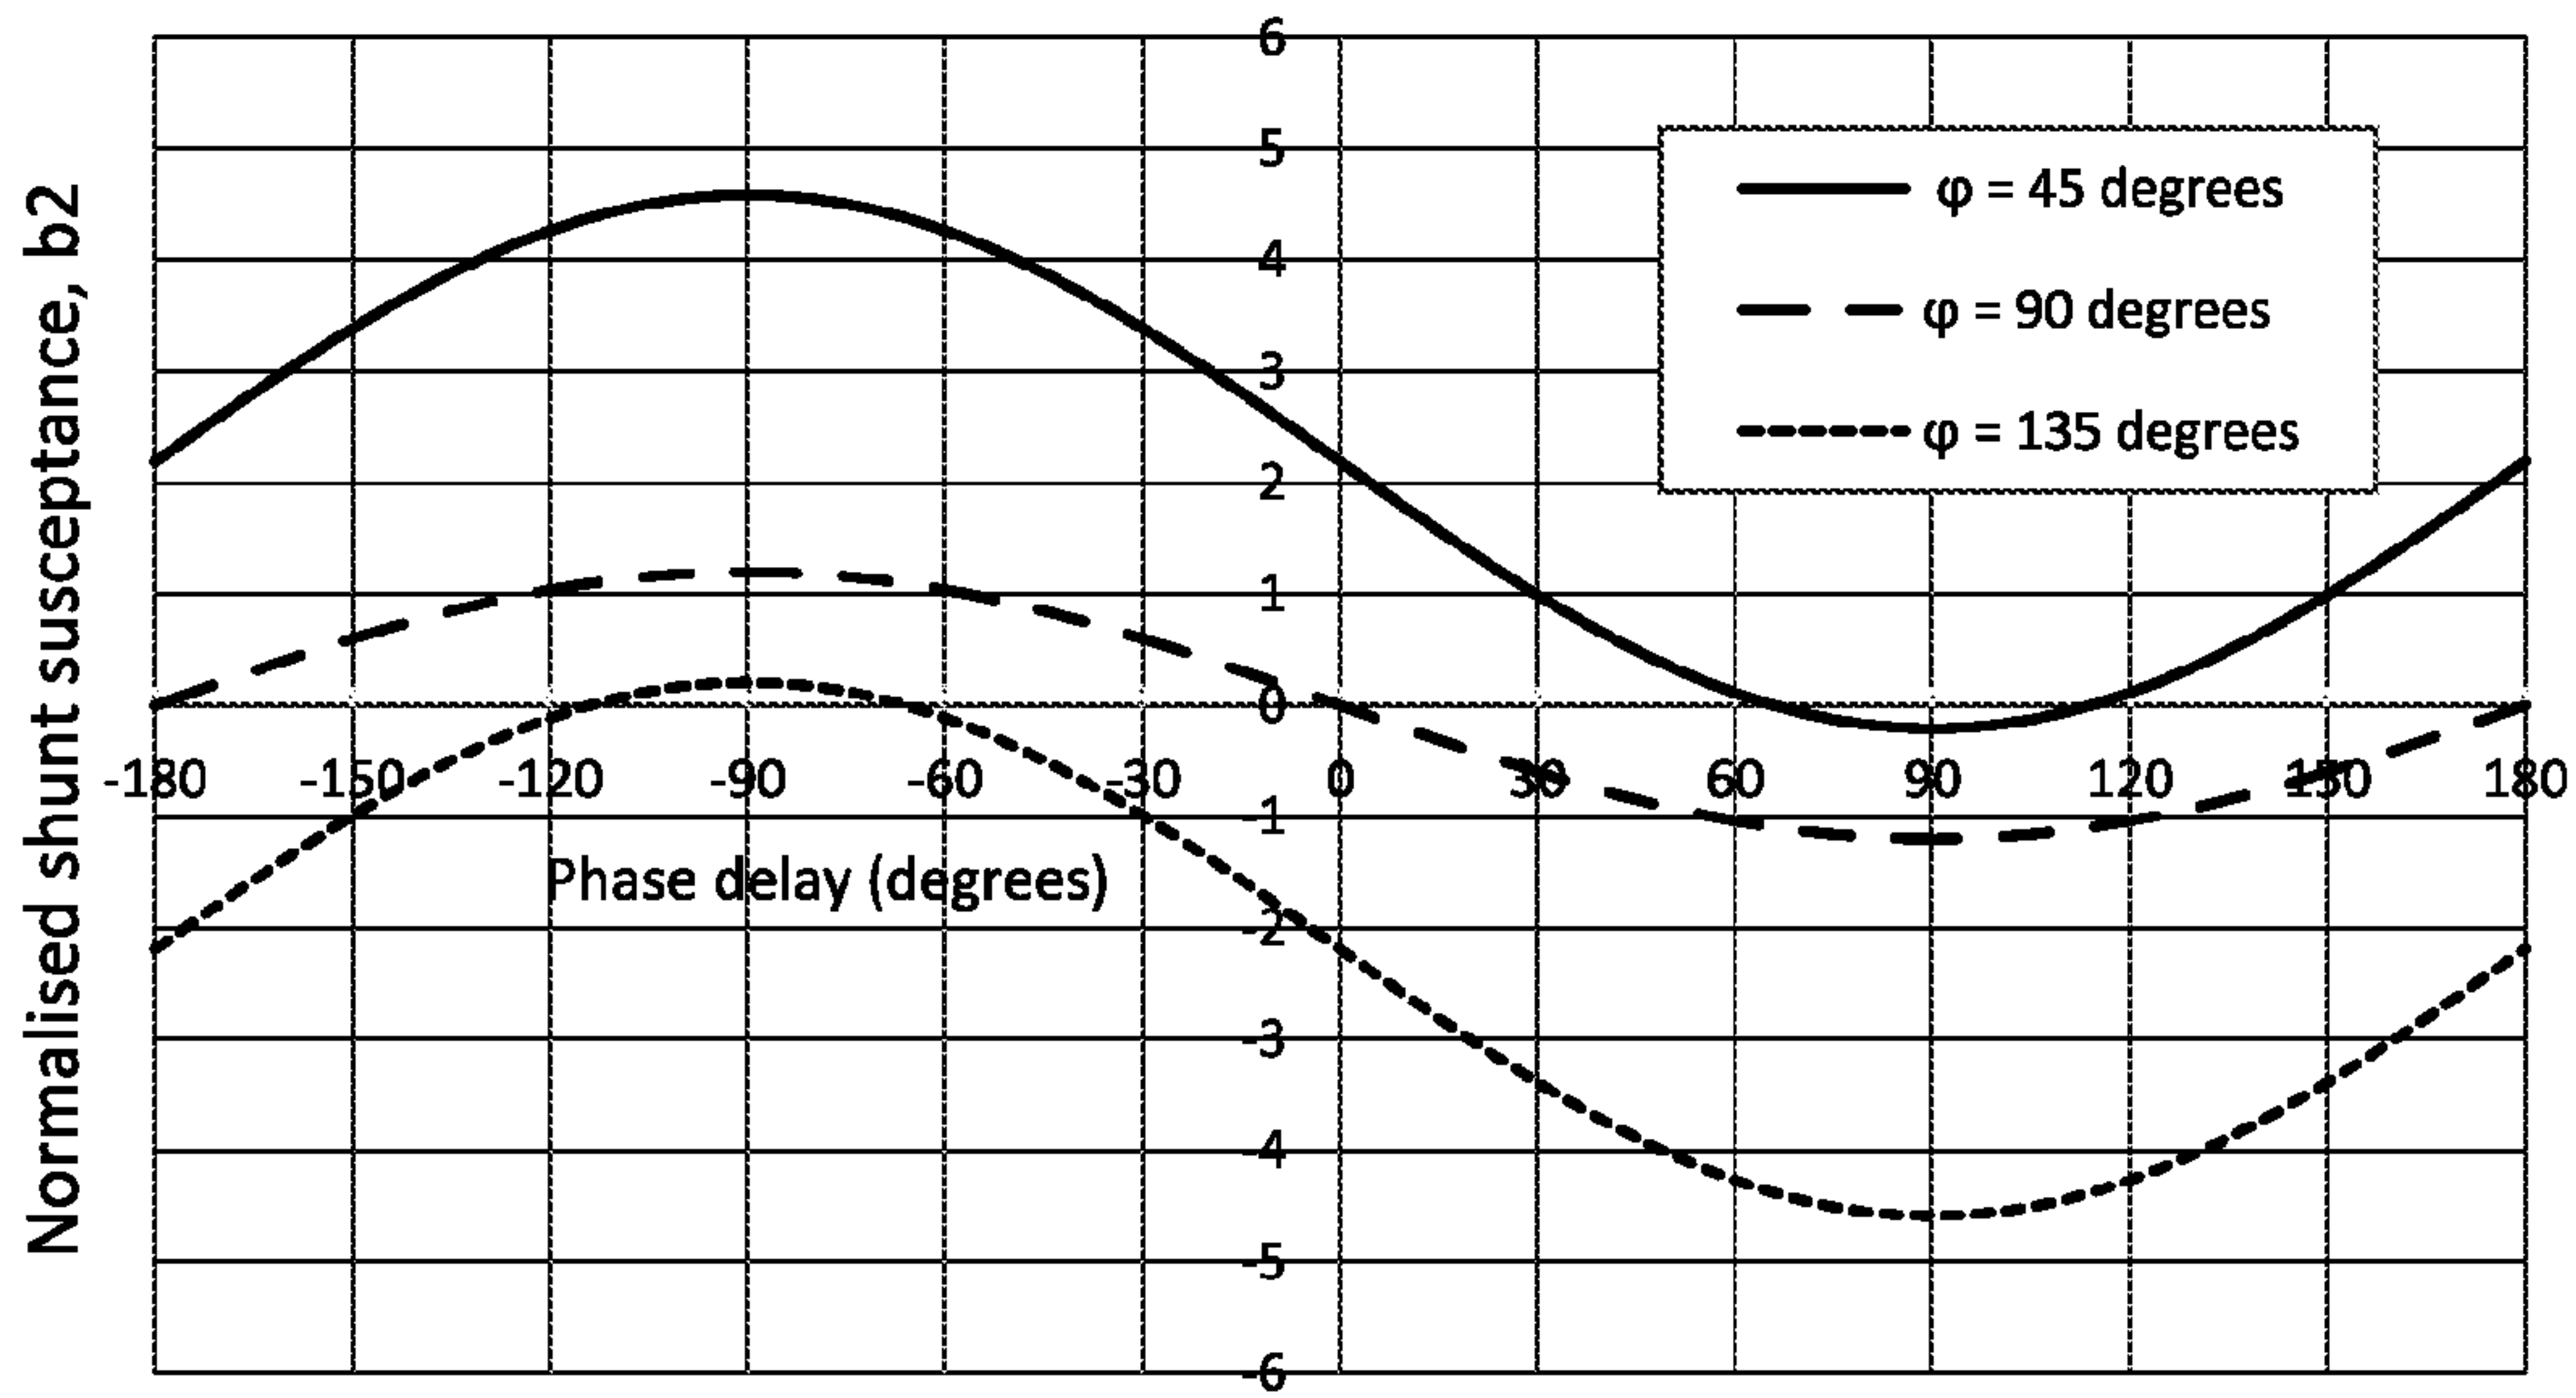


FIGURE 8

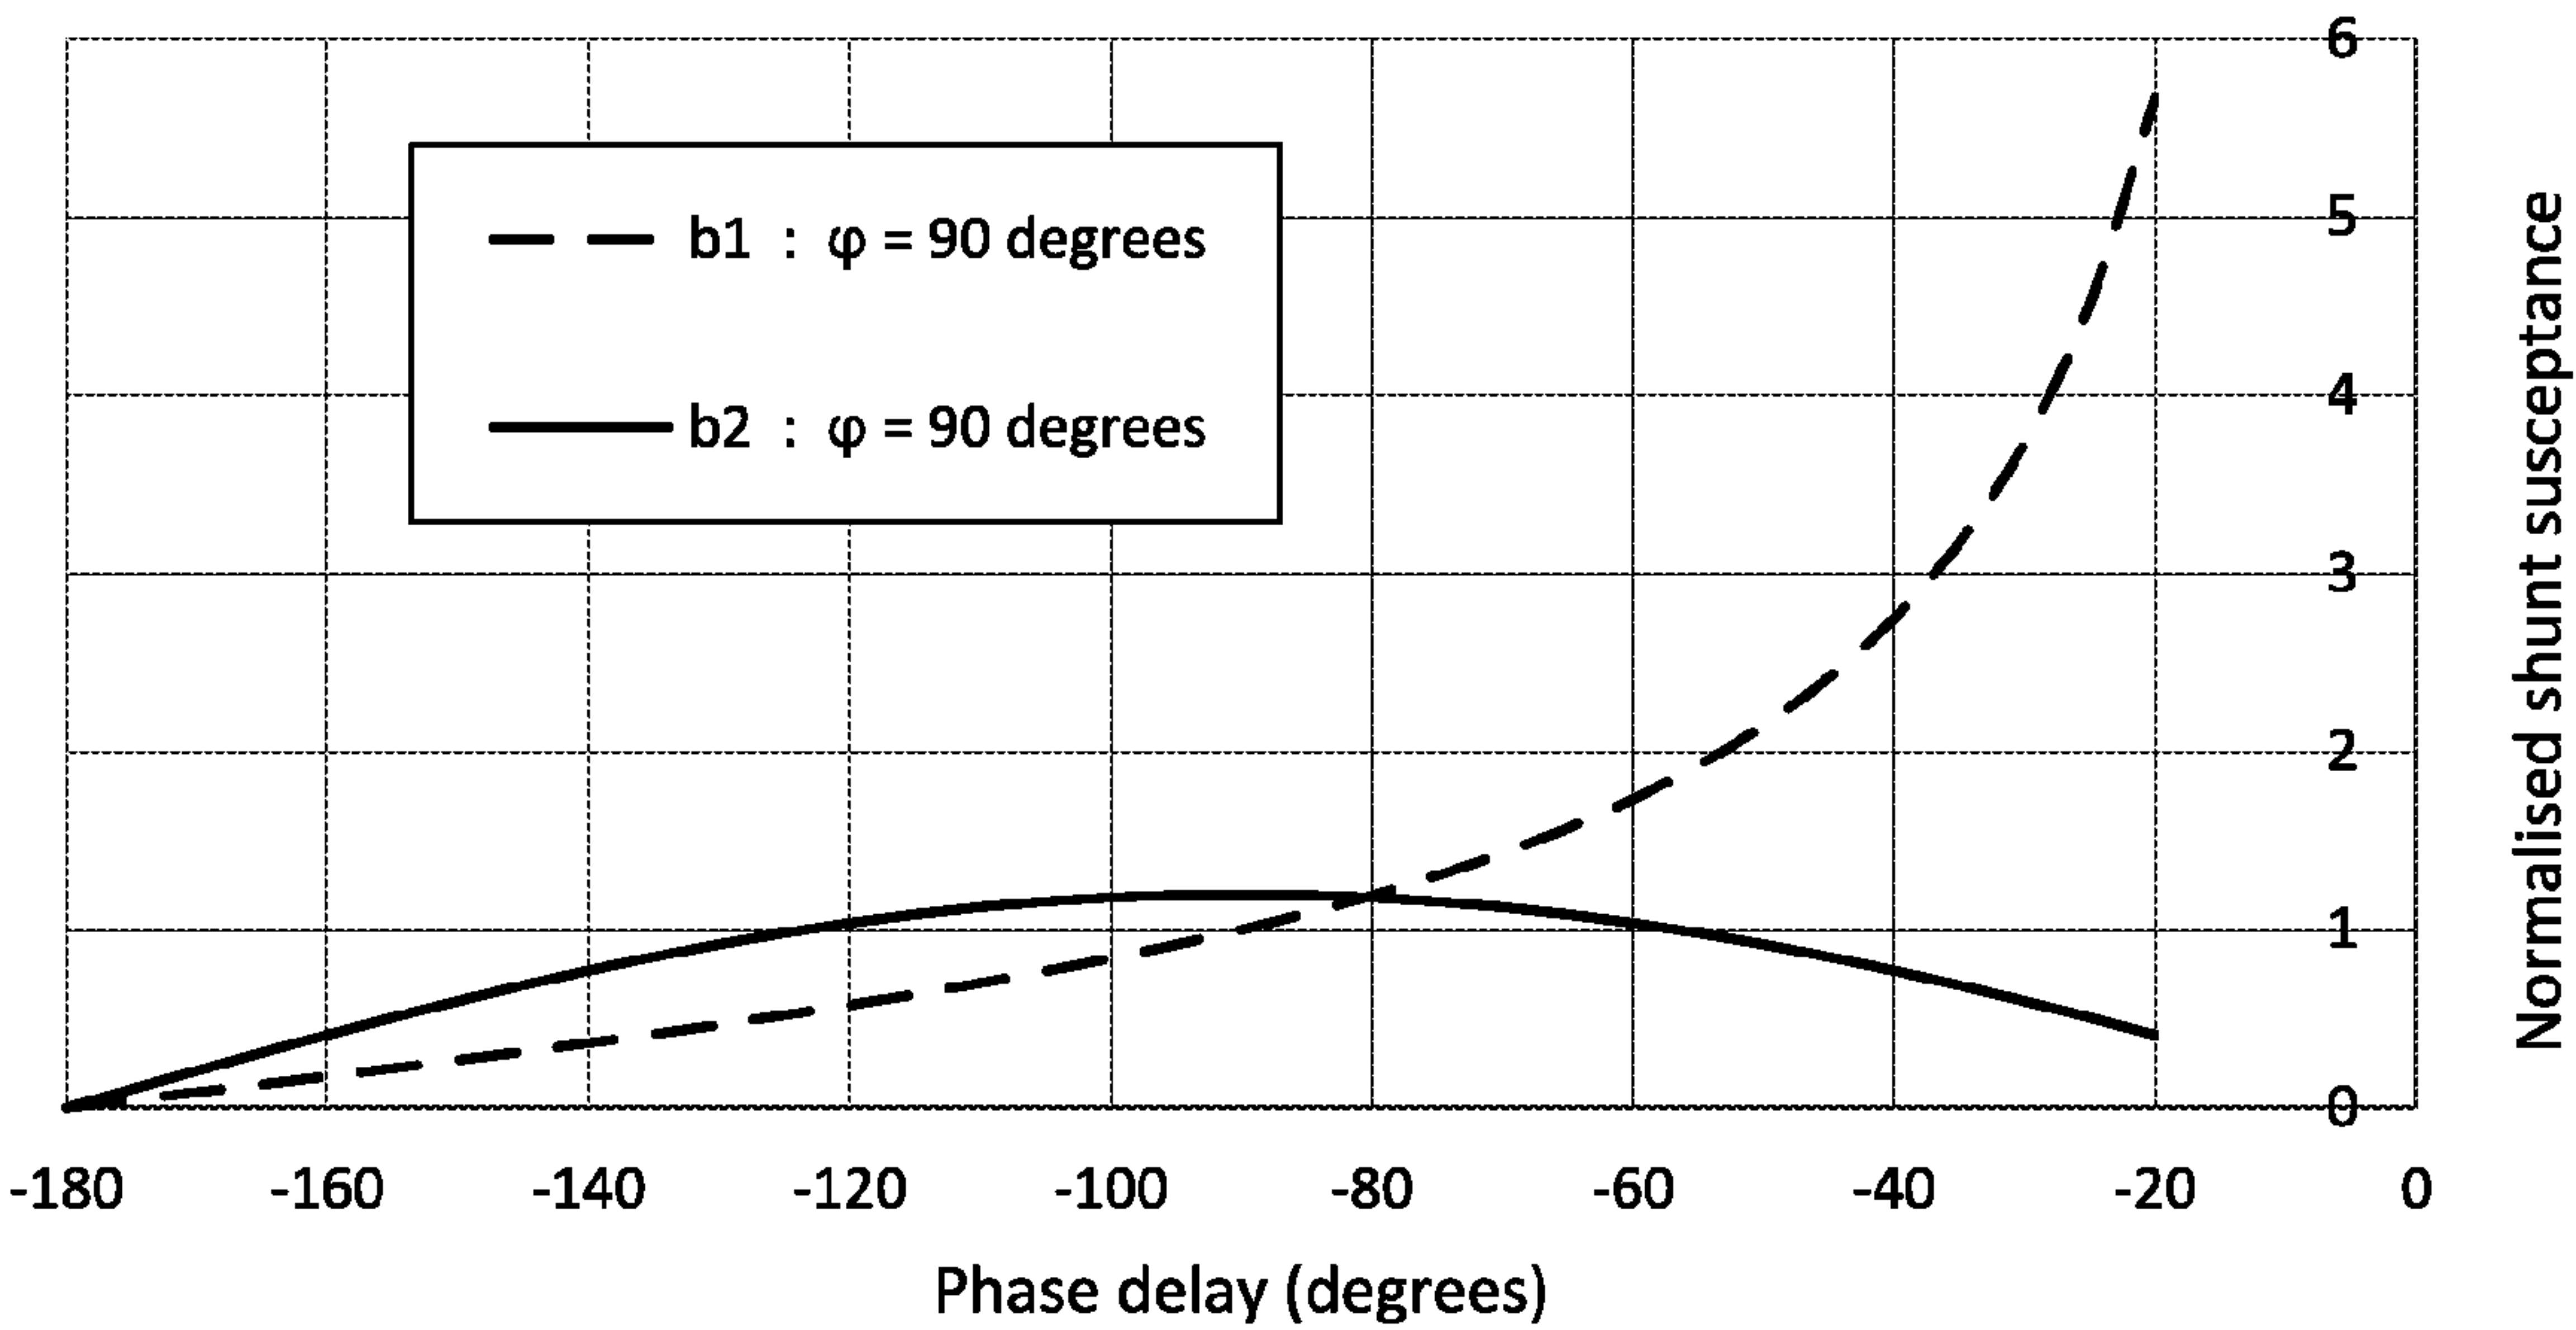


FIGURE 9

FIGURE 10A

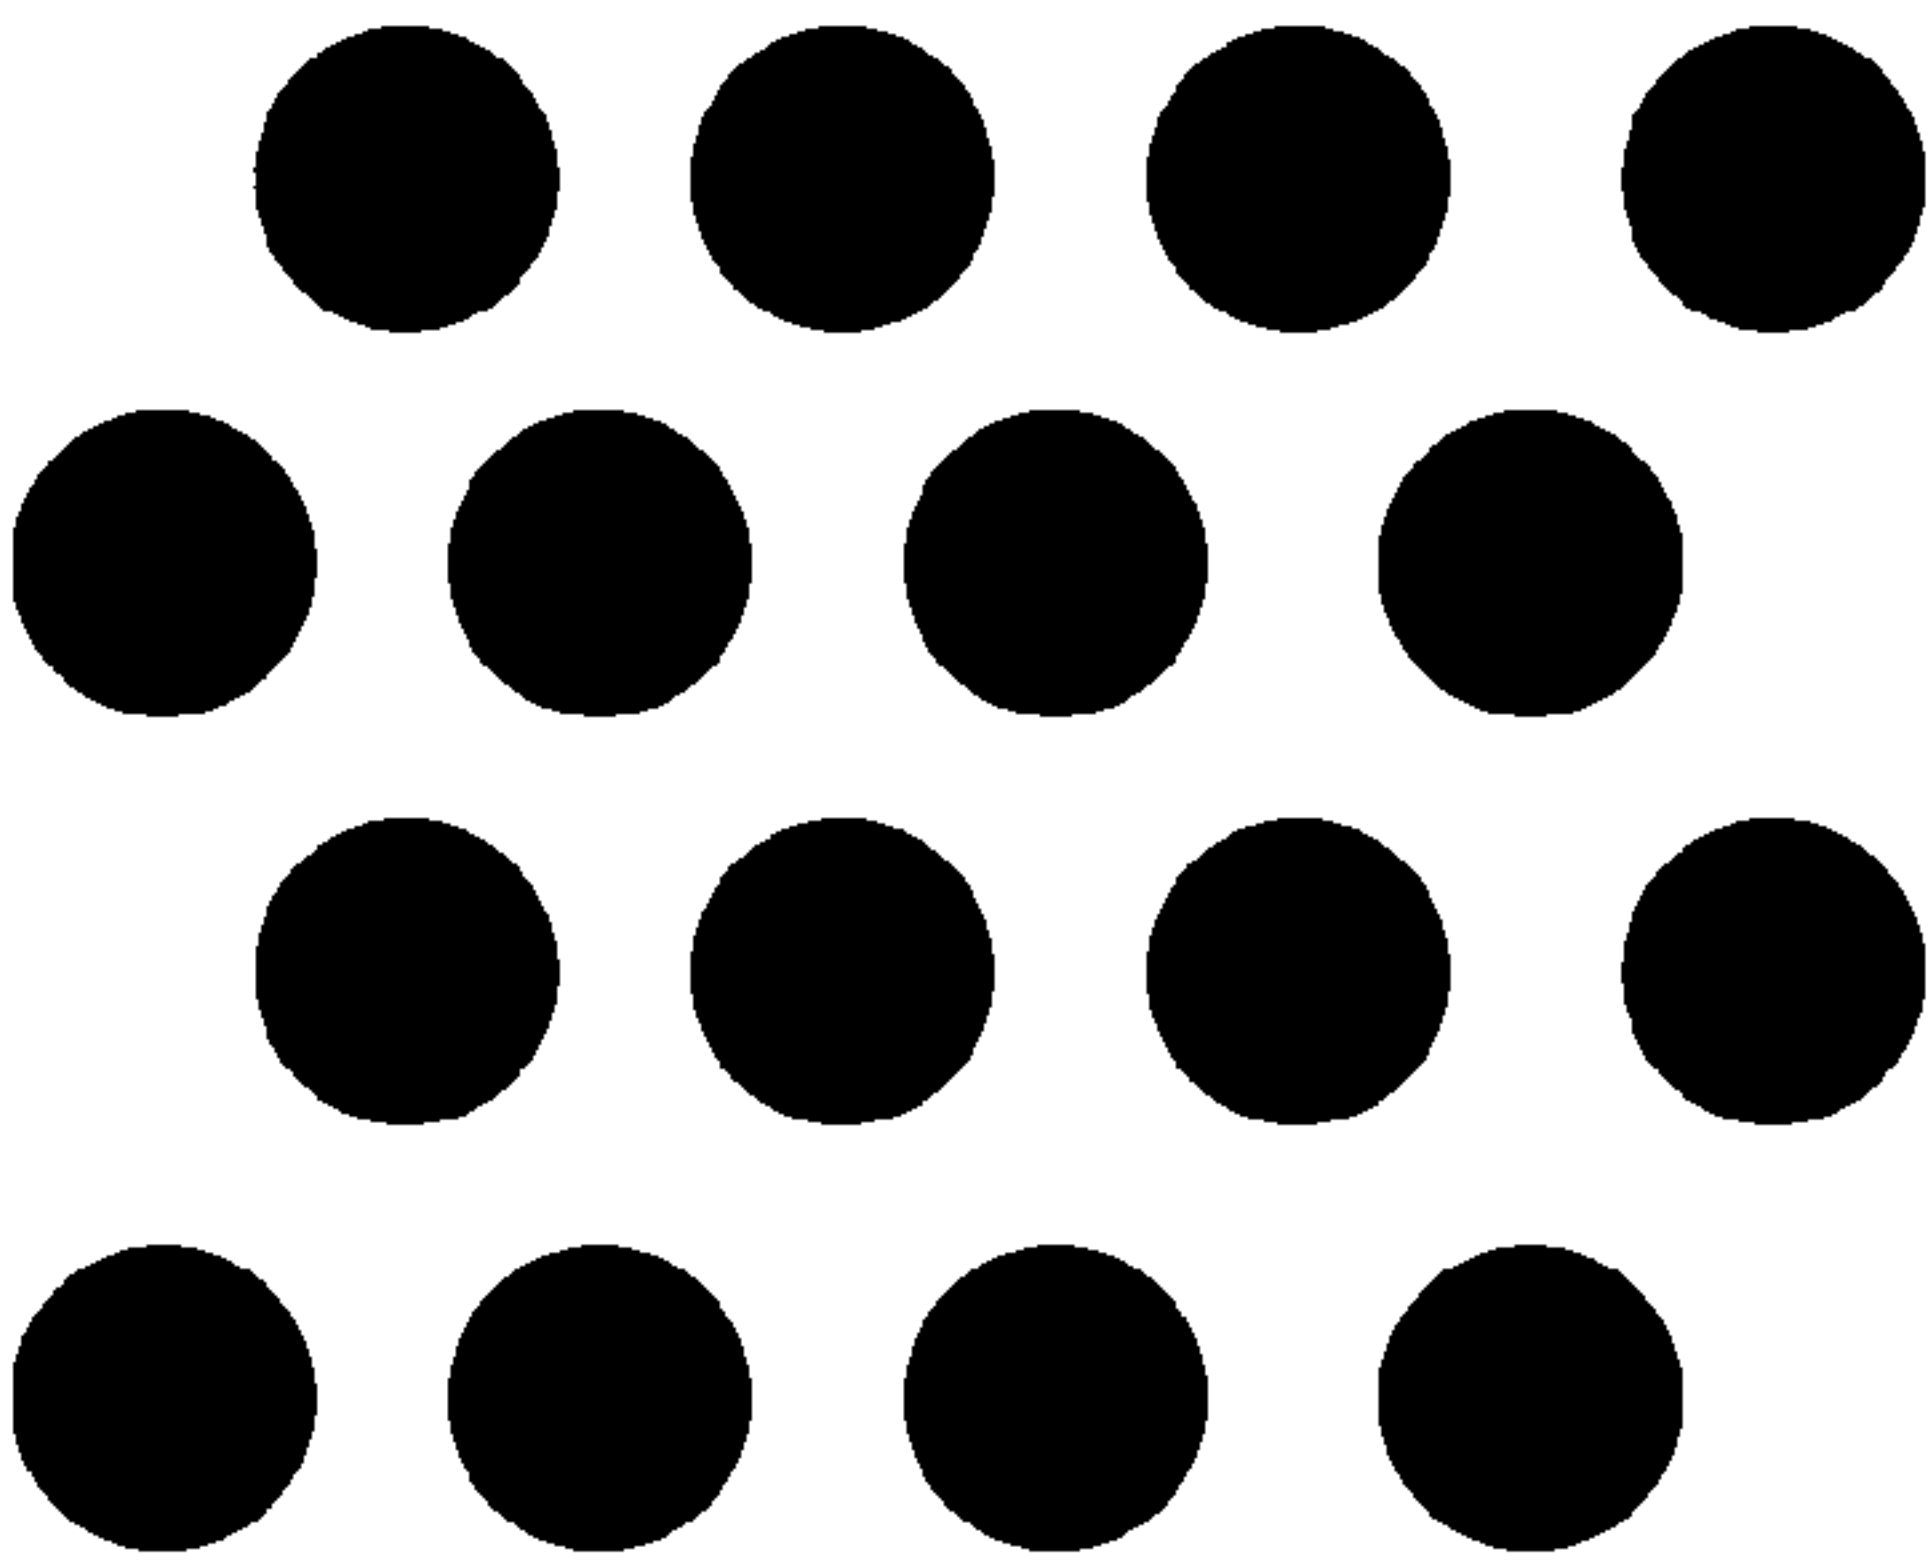


FIGURE 10B

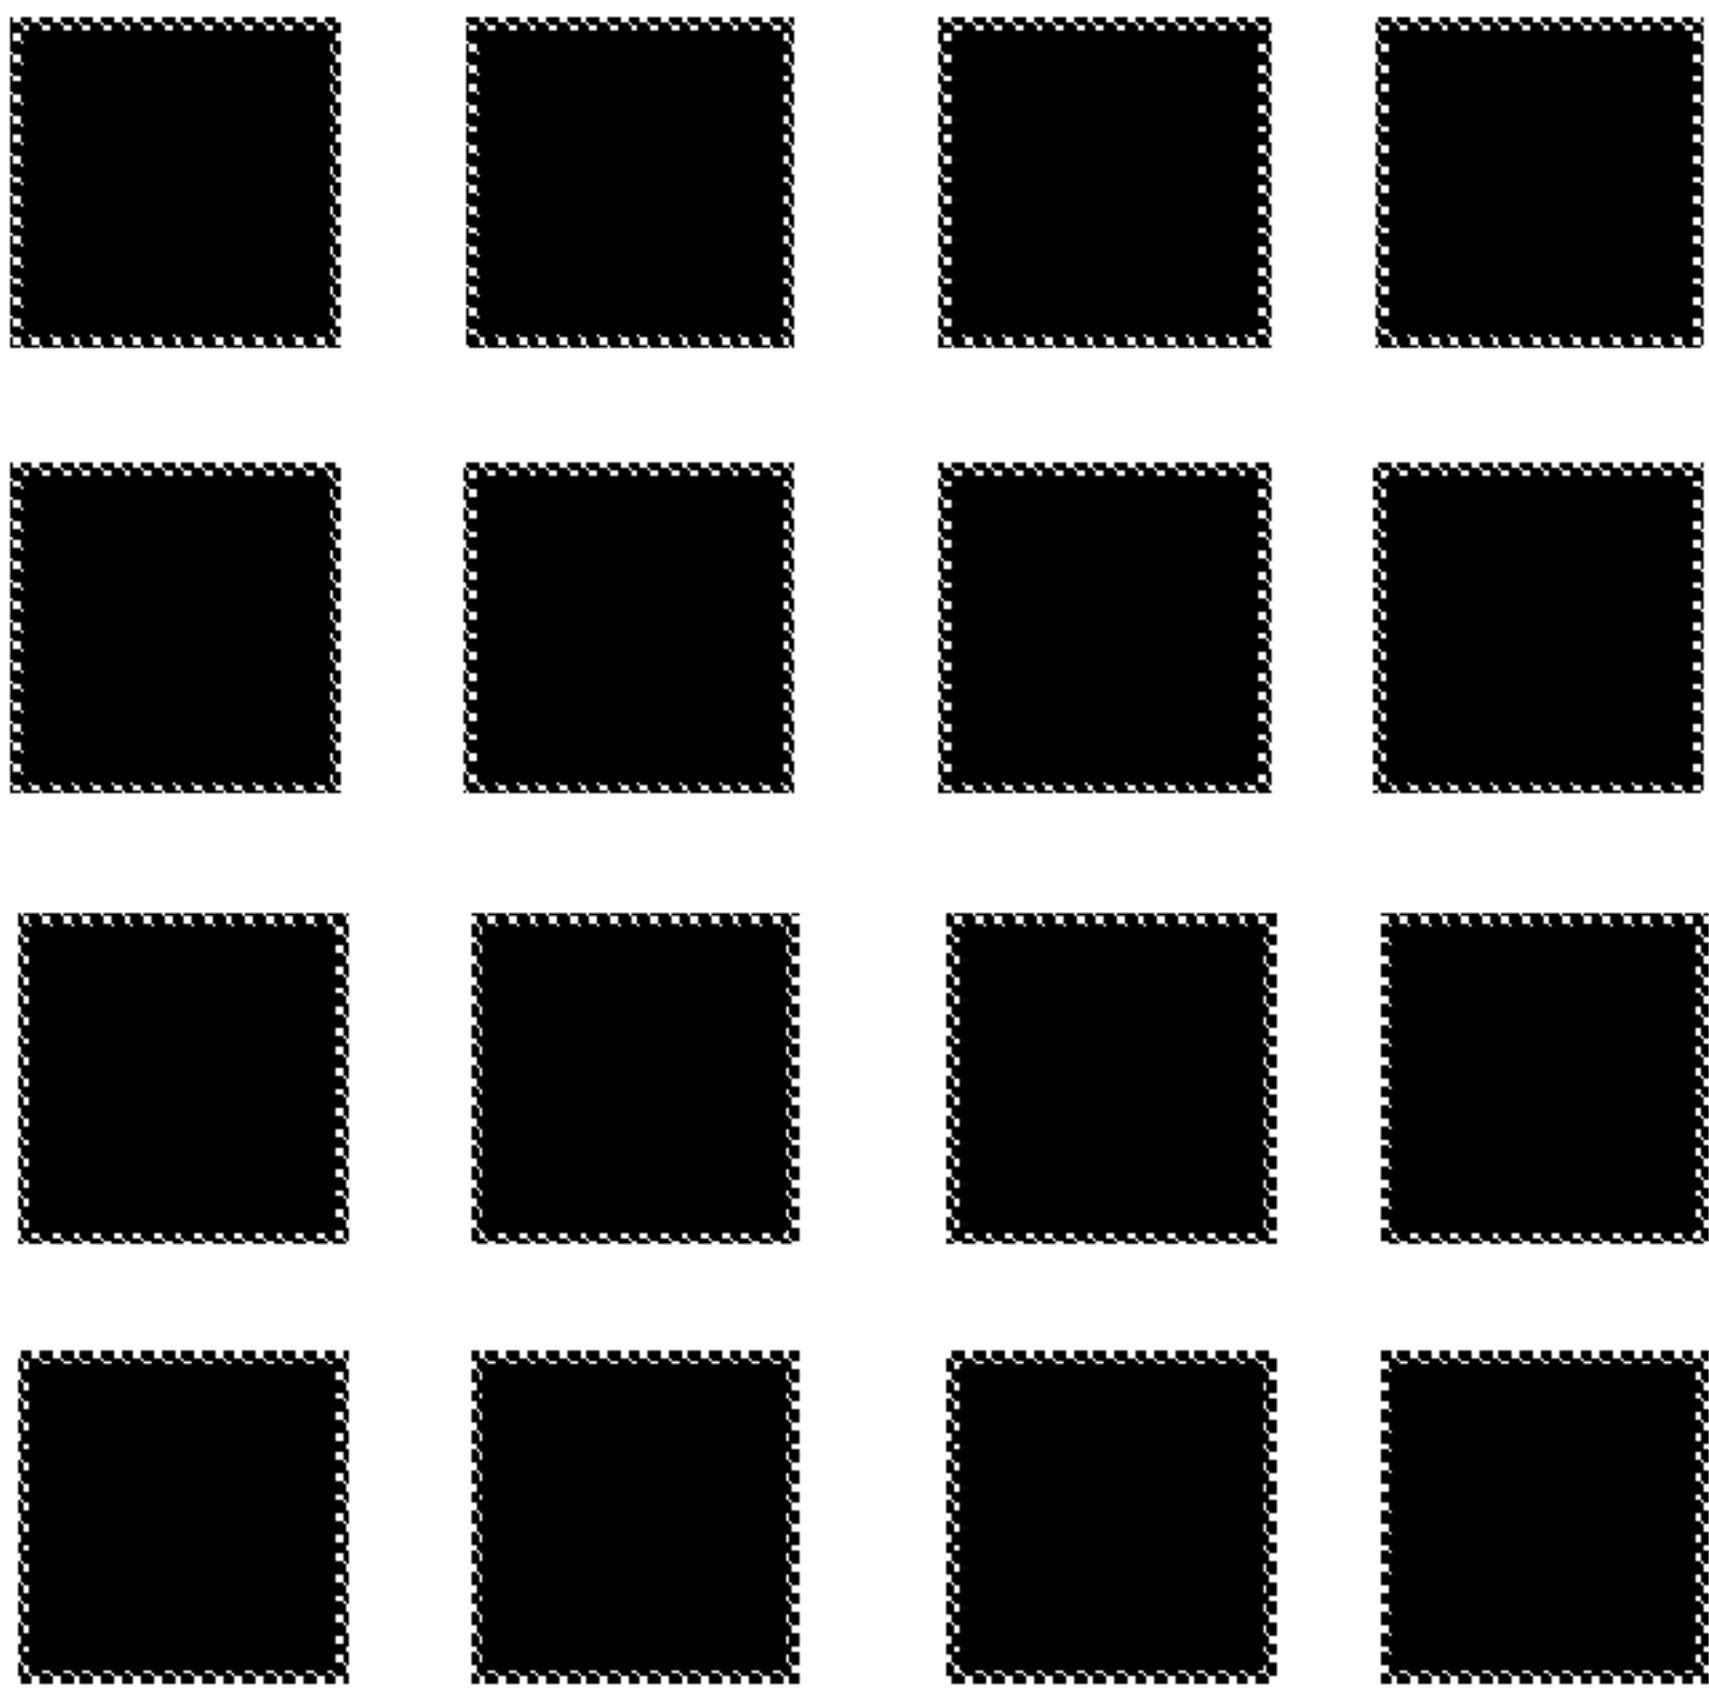
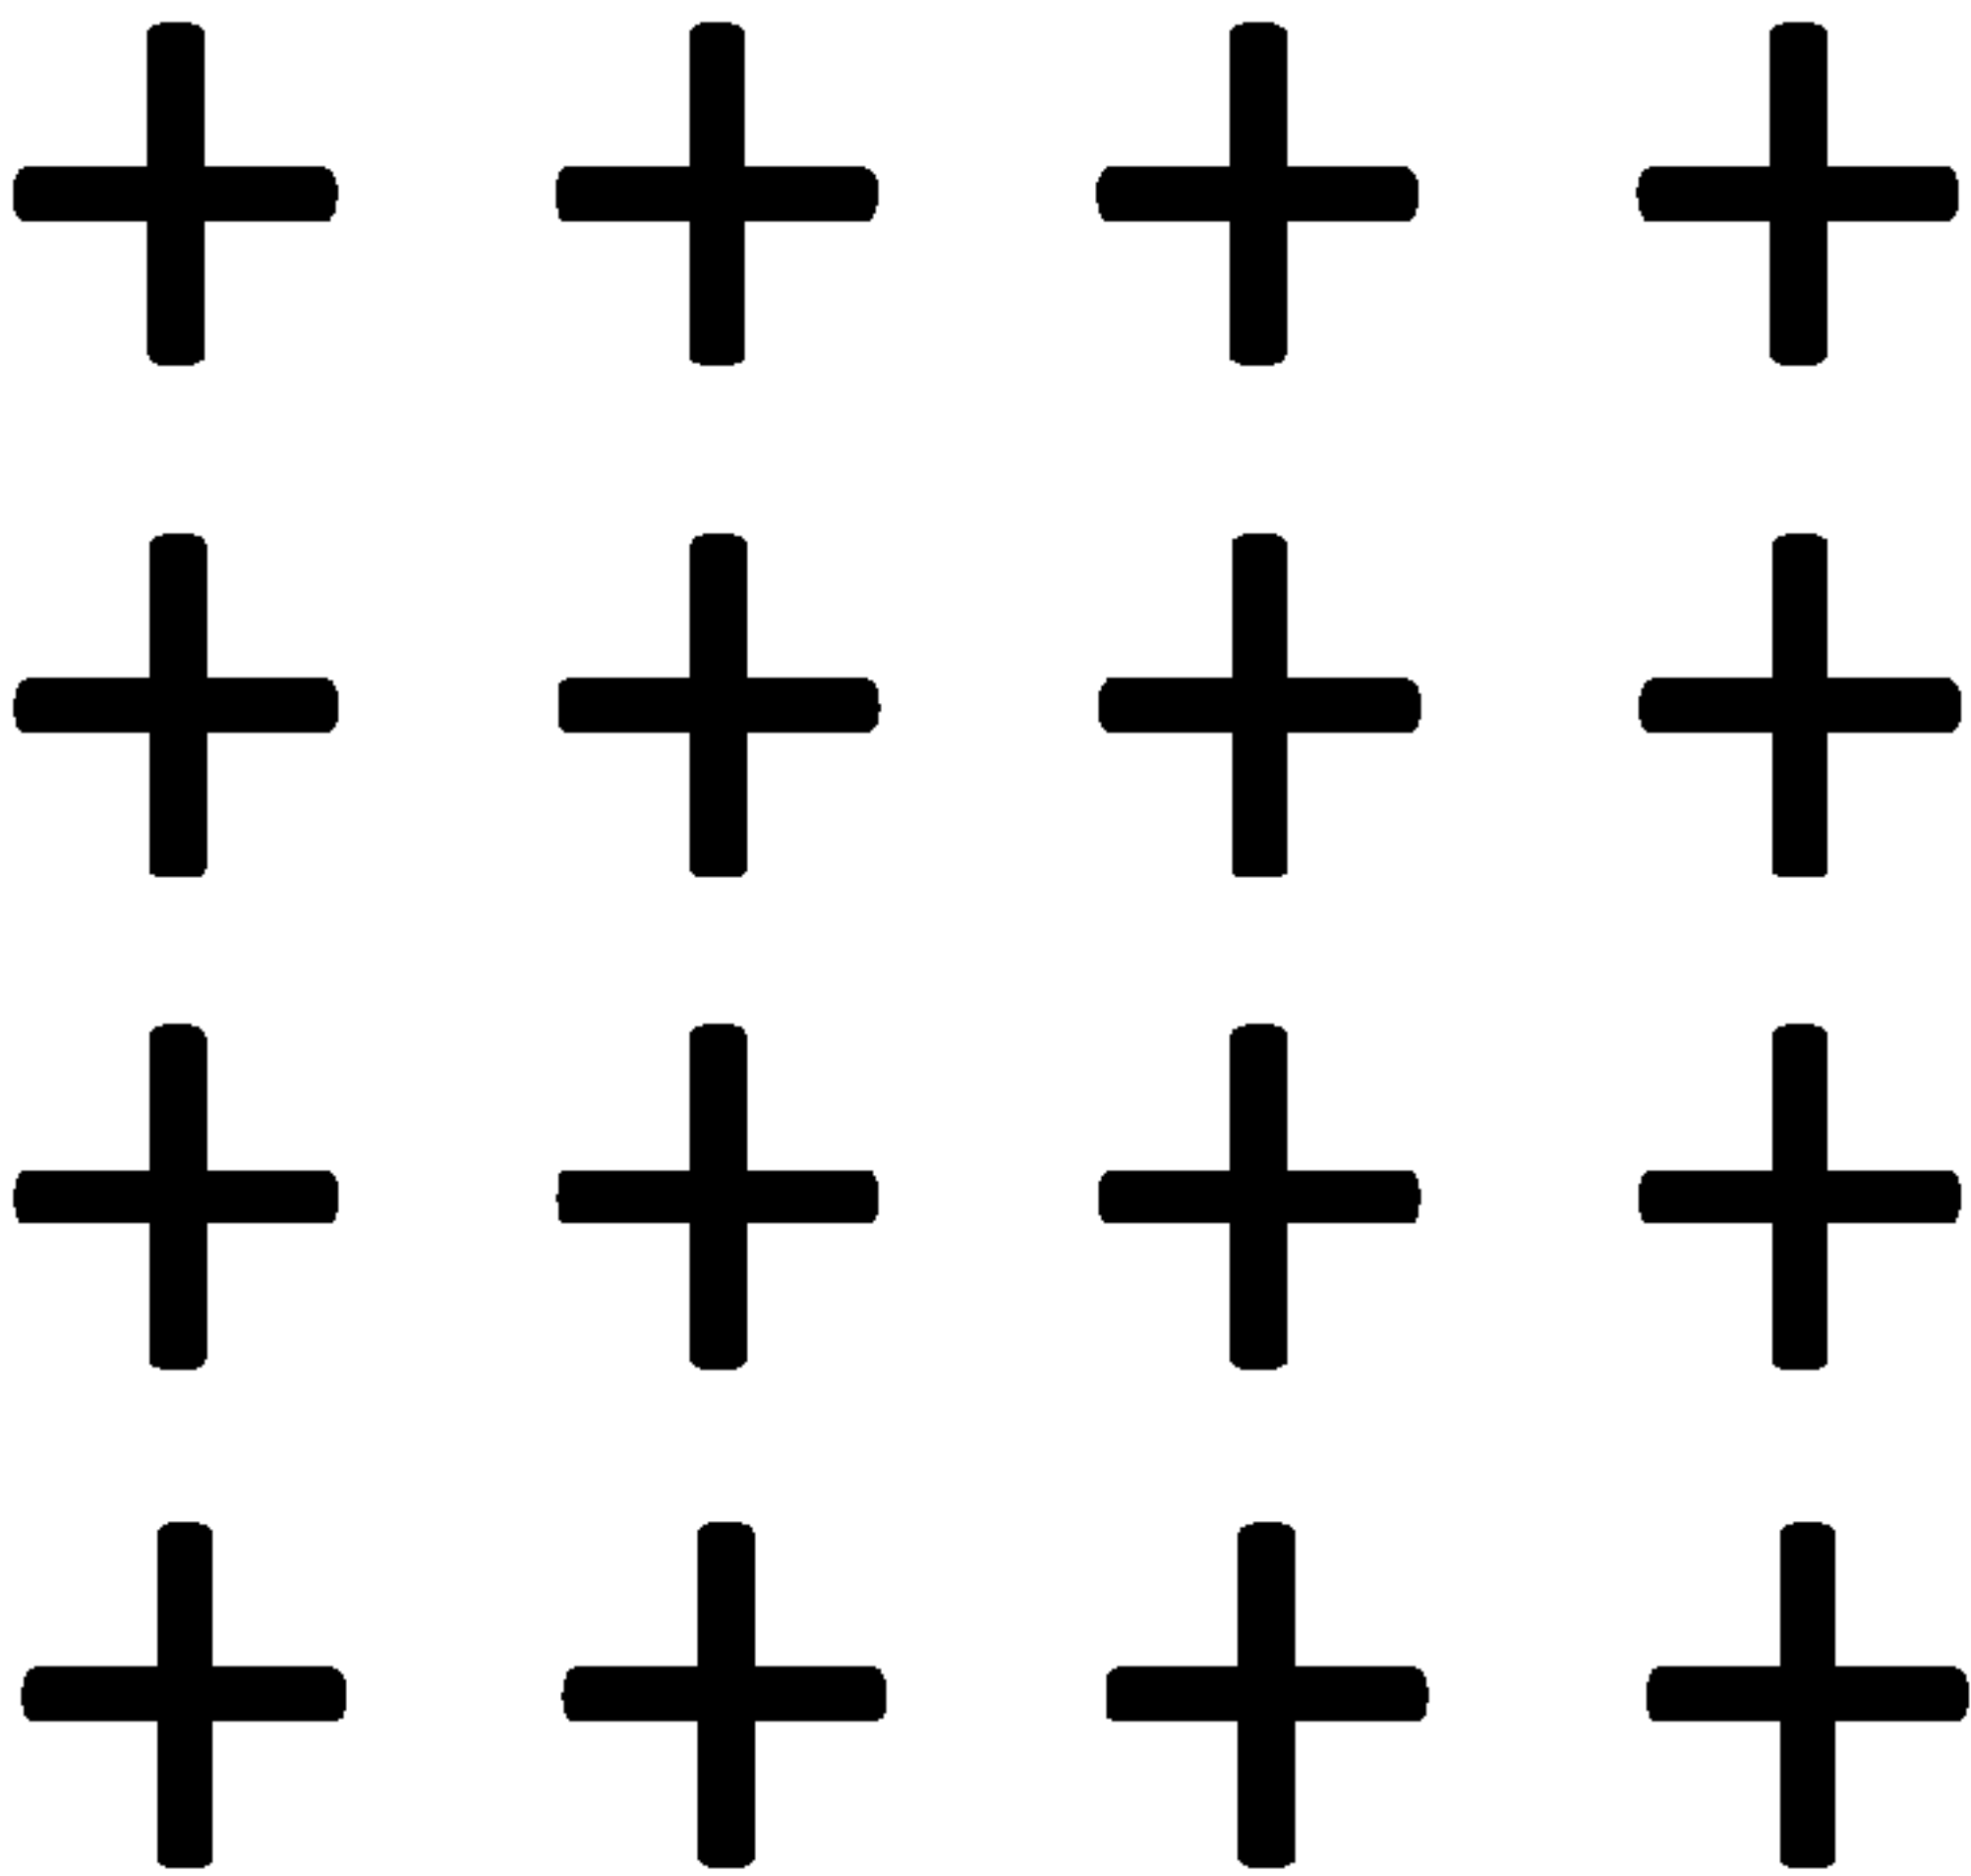


FIGURE 10C



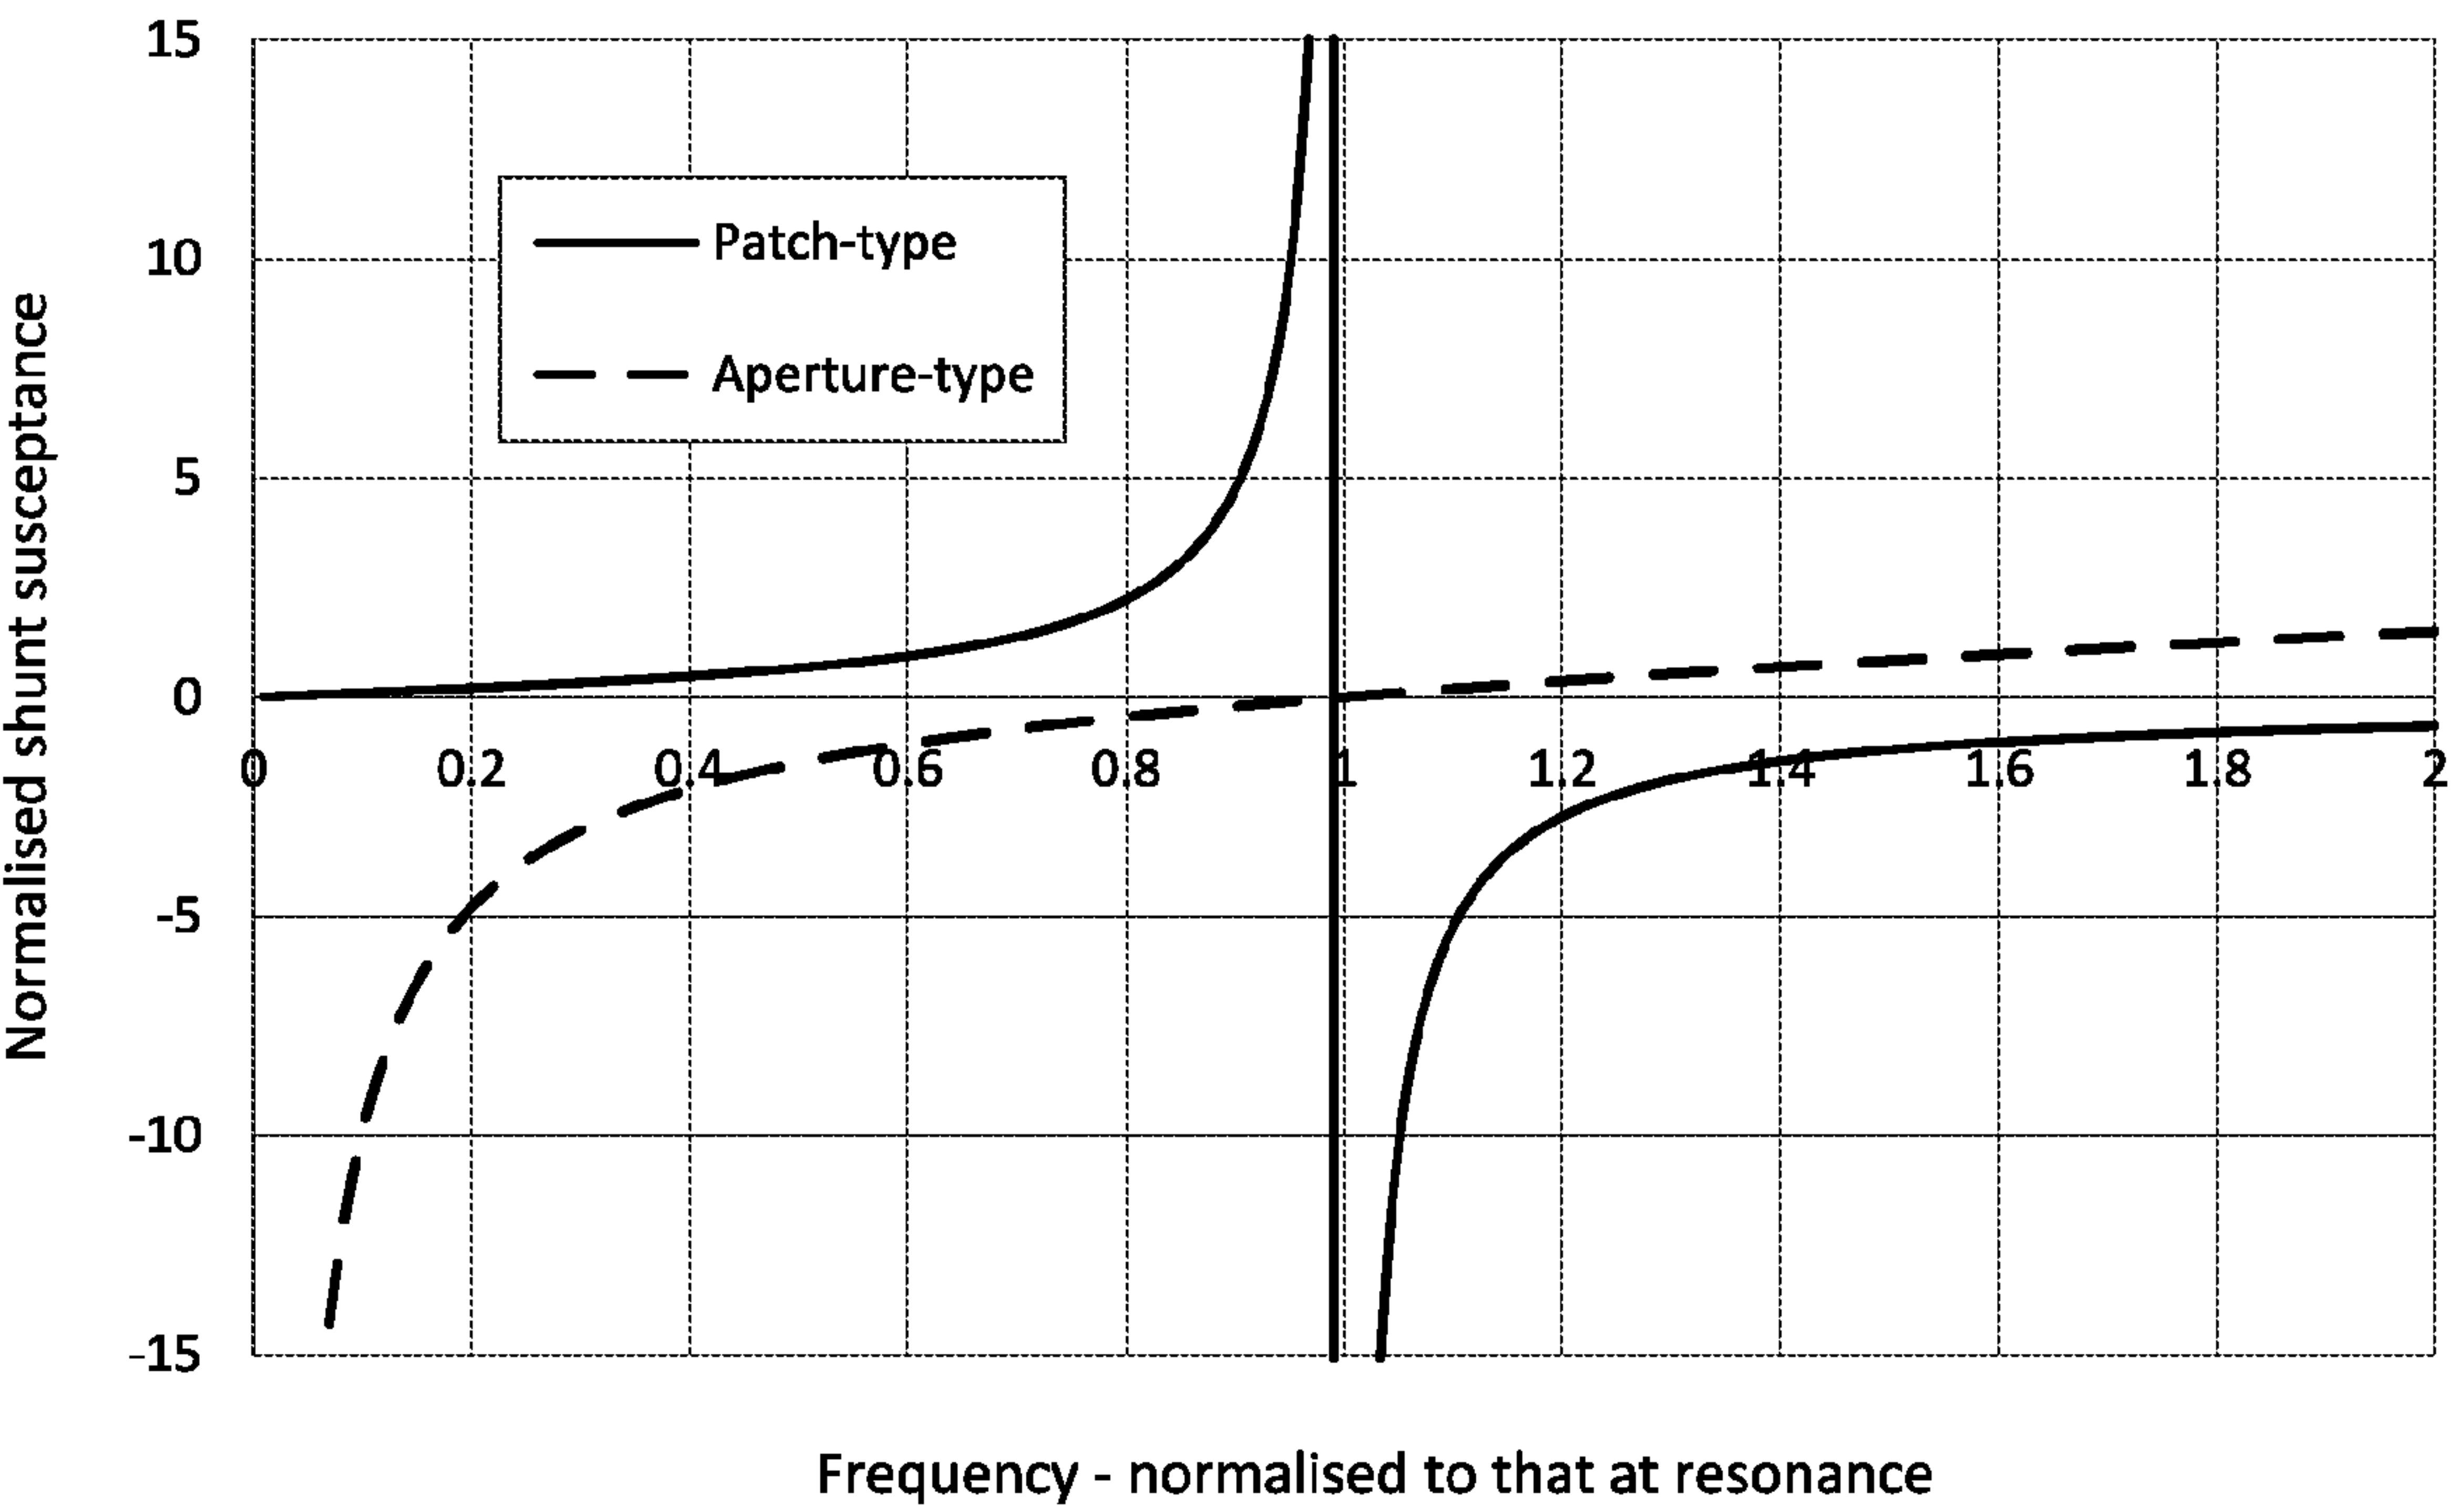


FIGURE 11

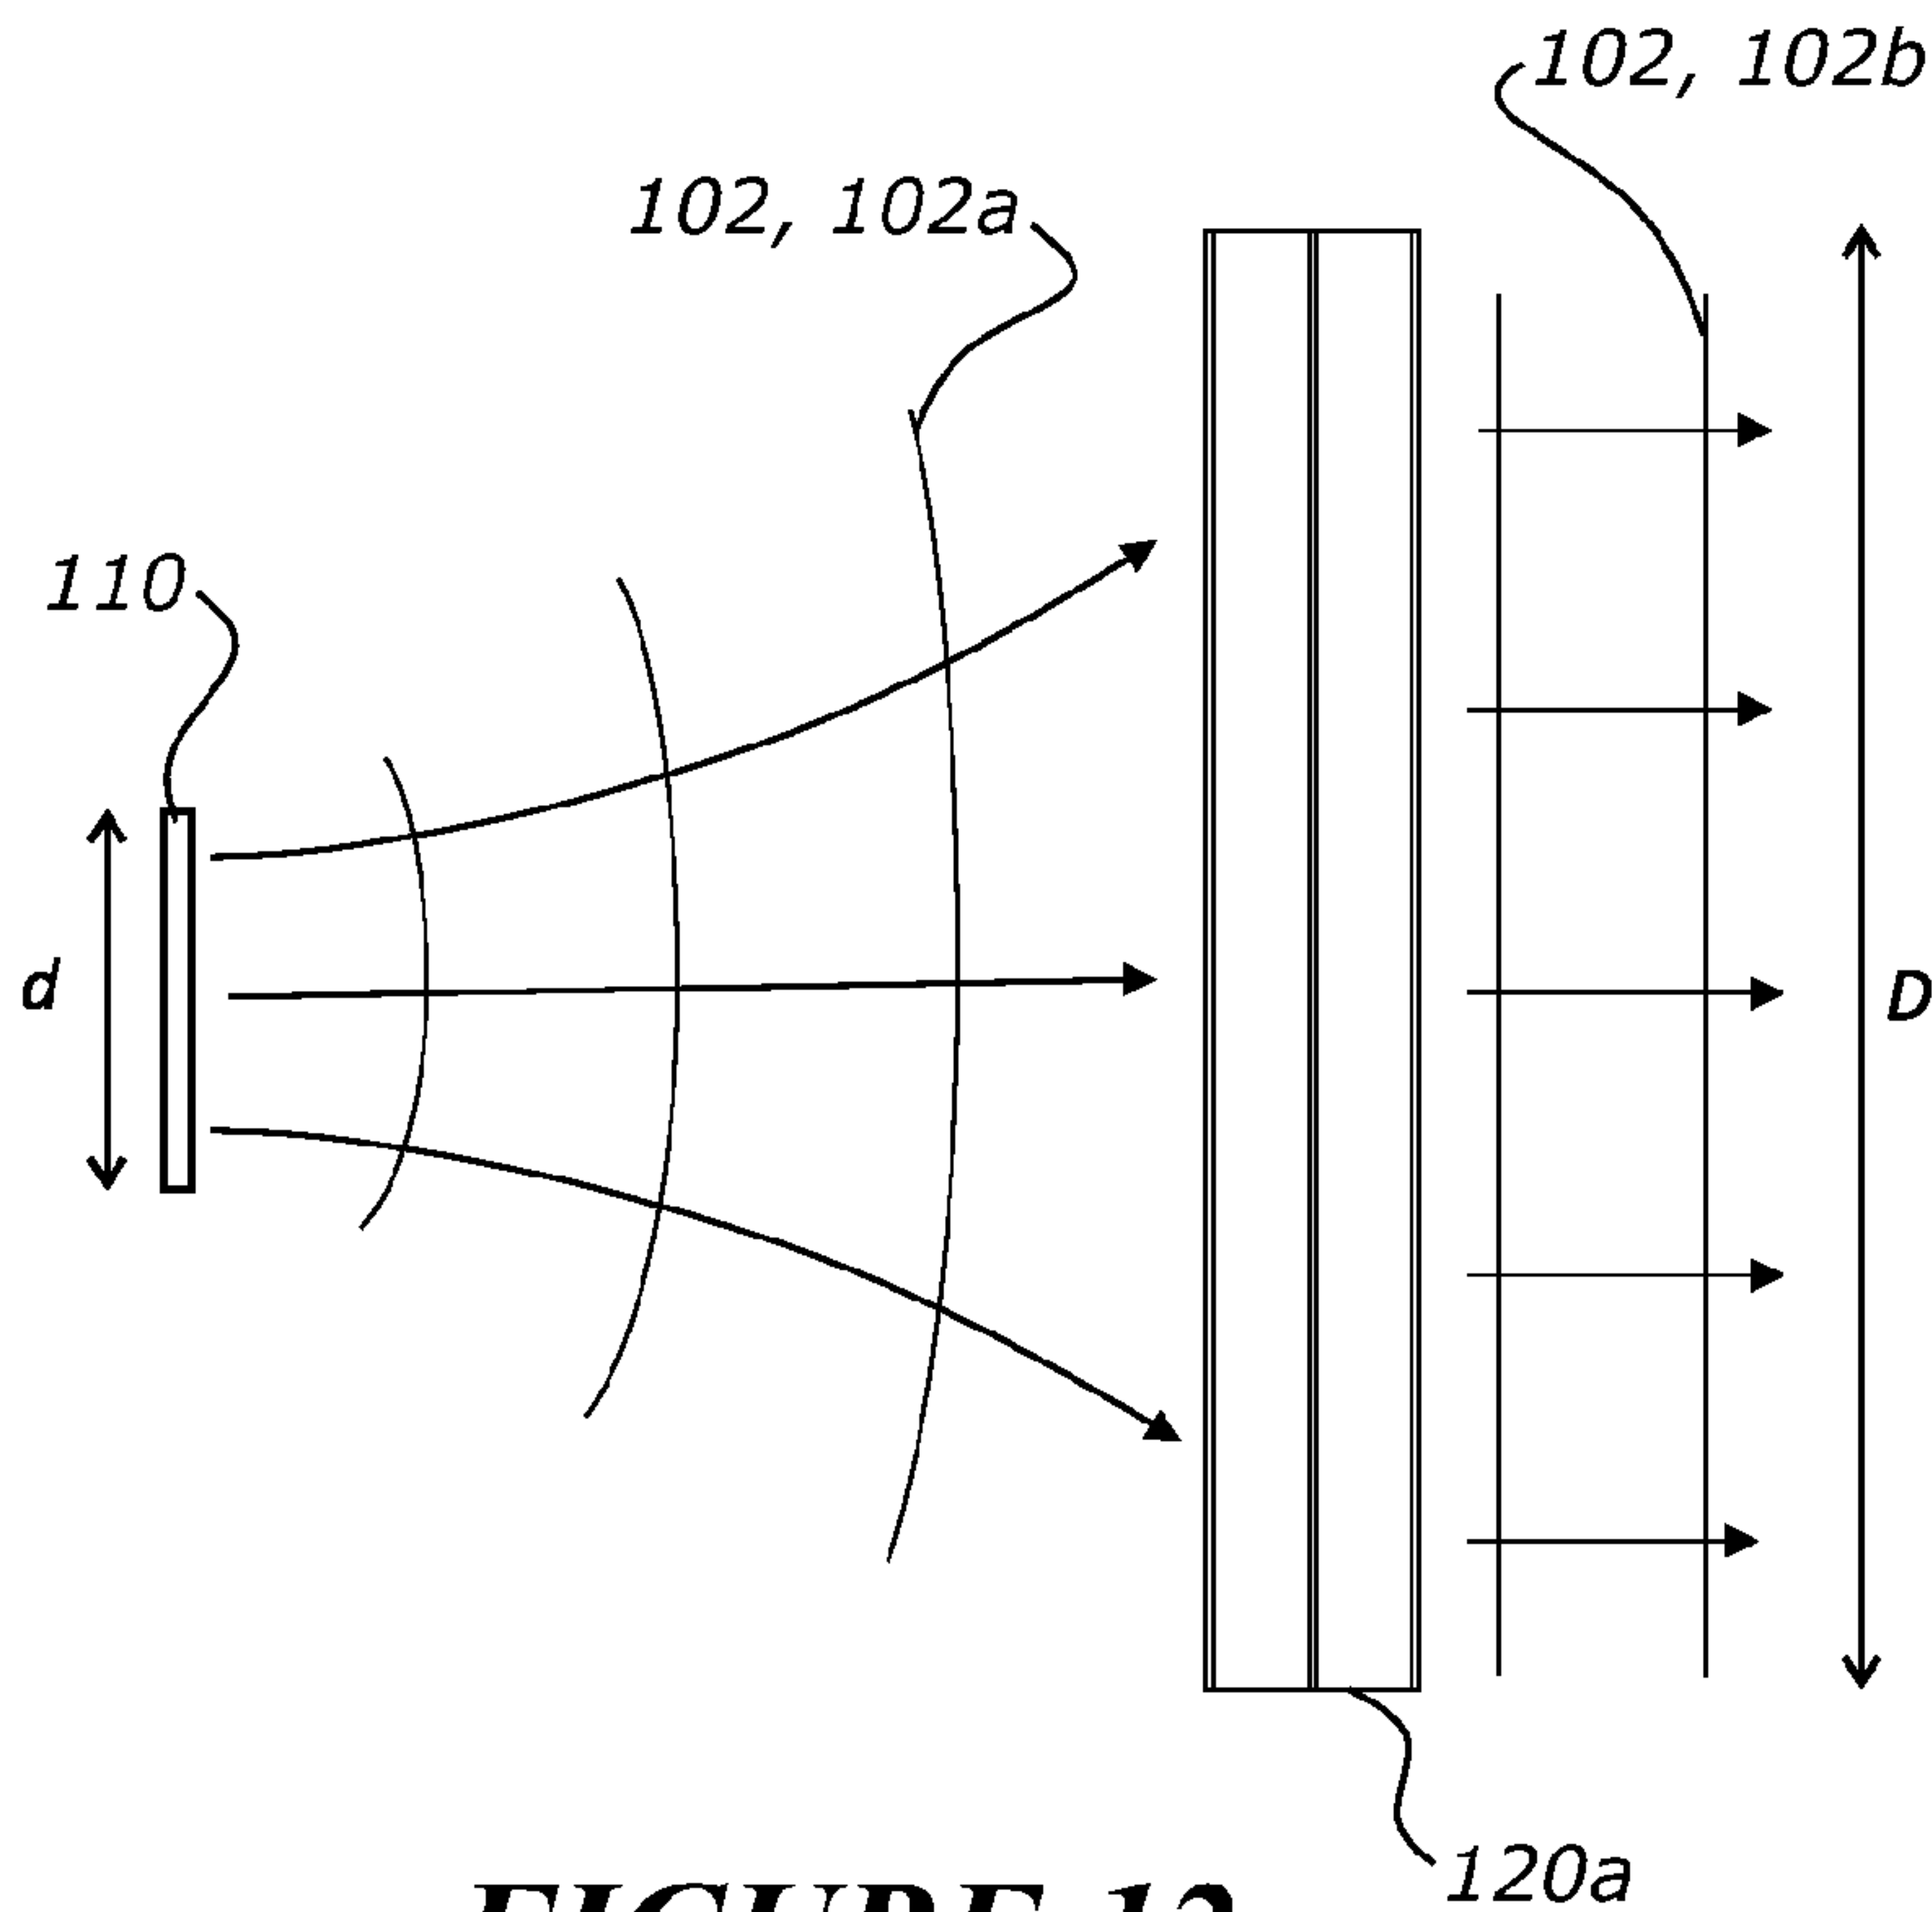


FIGURE 12

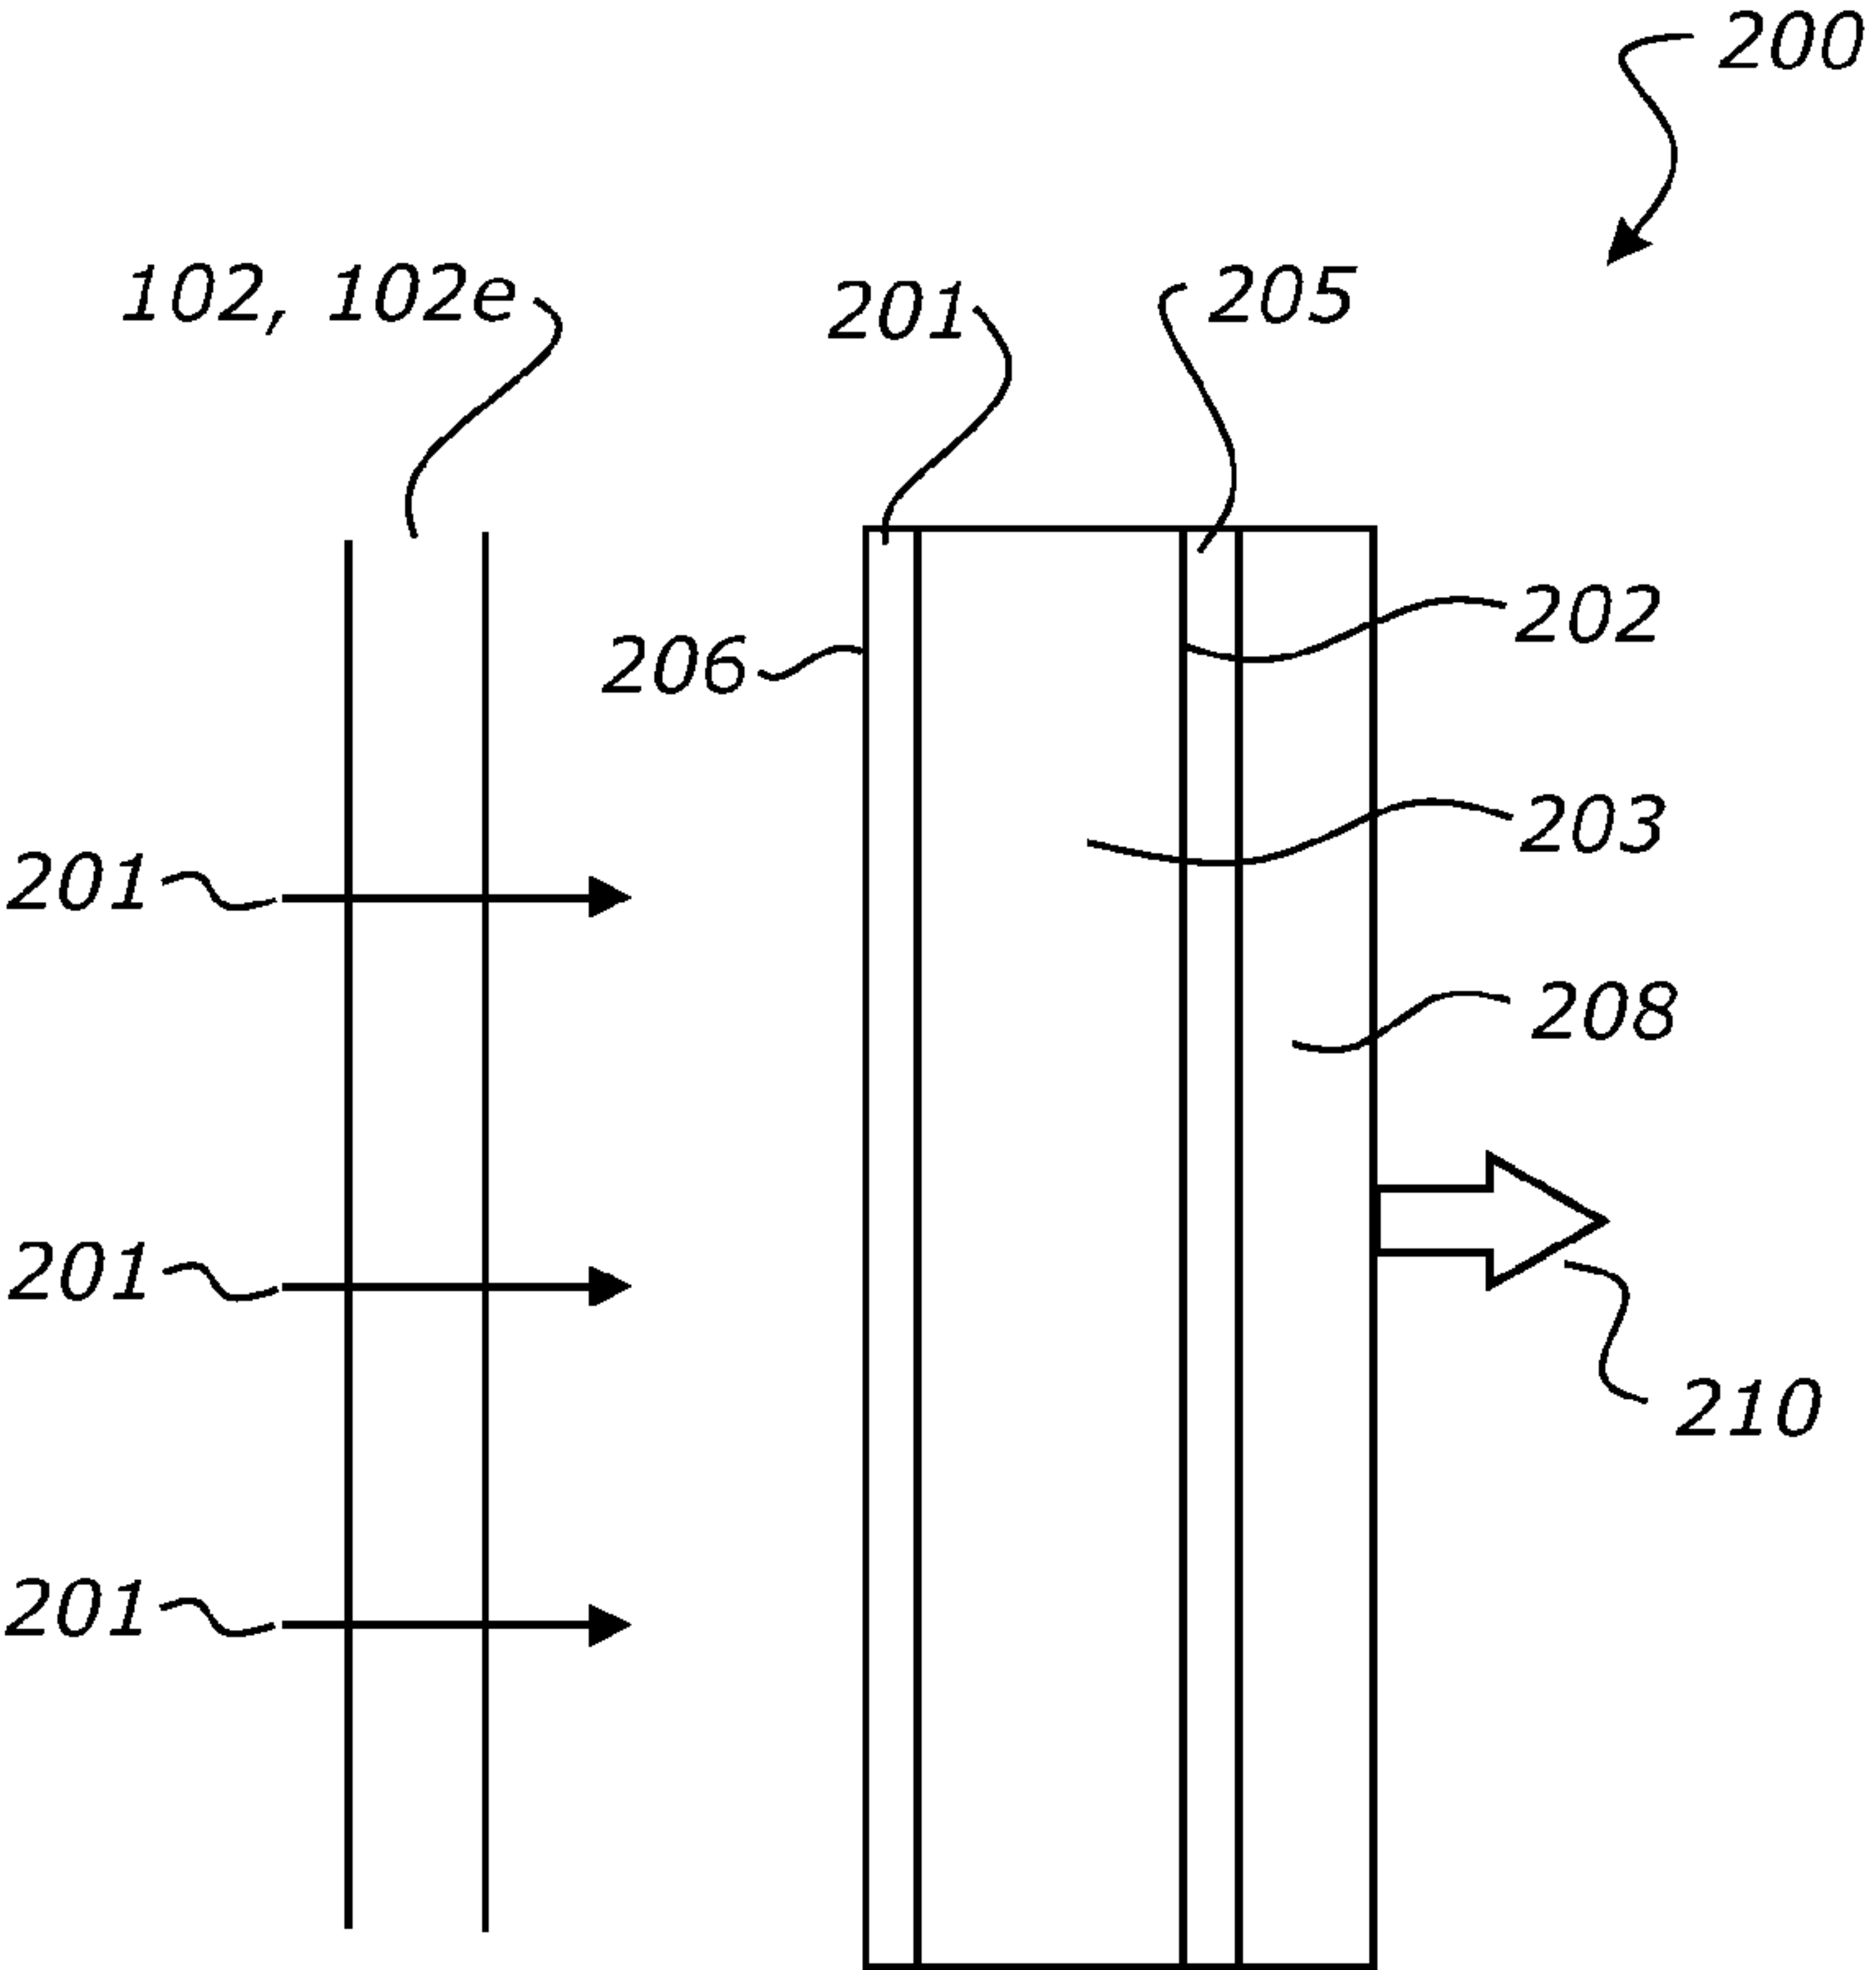


FIGURE 13

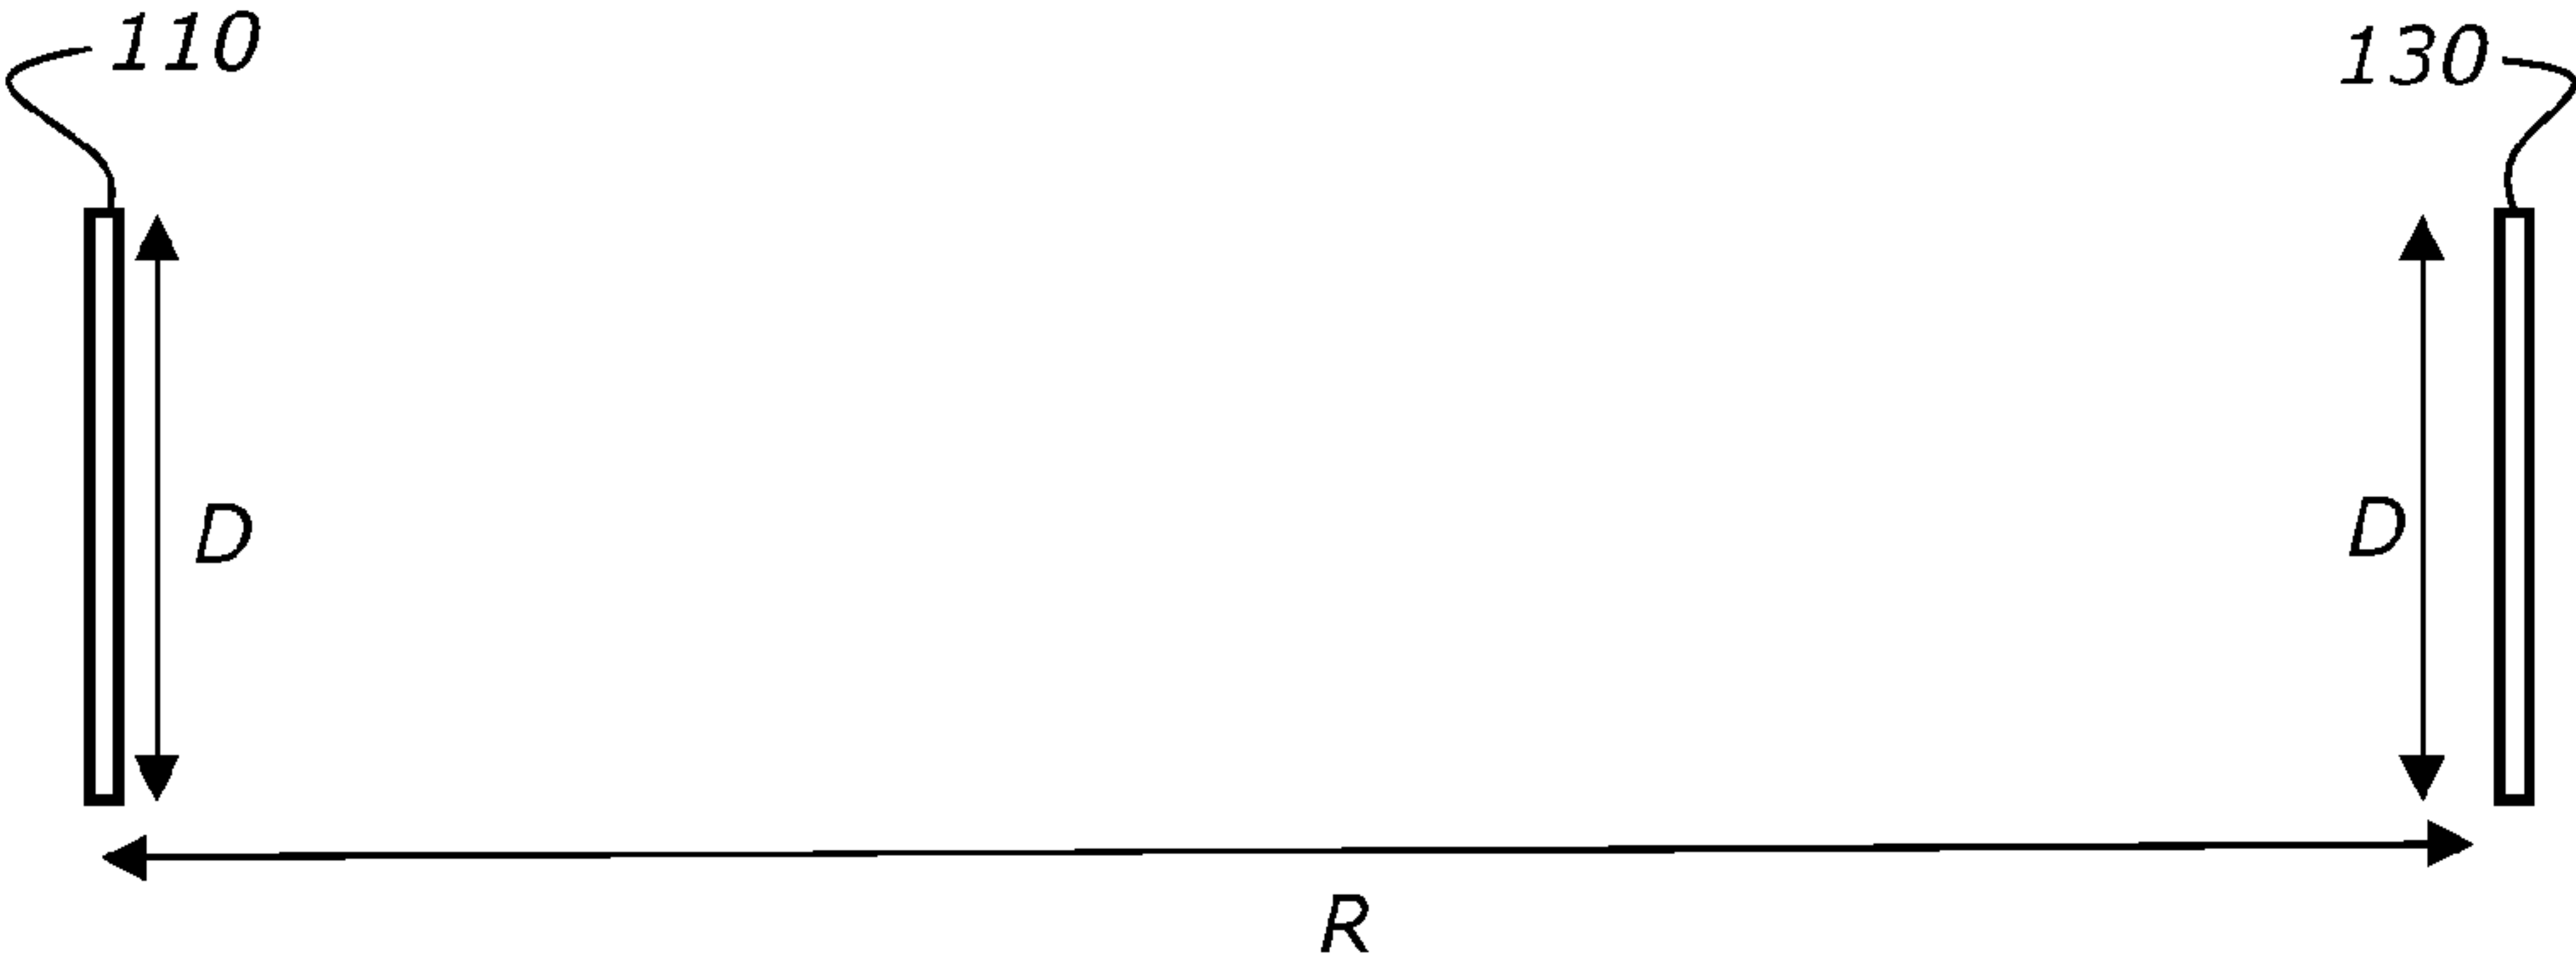


FIGURE 14

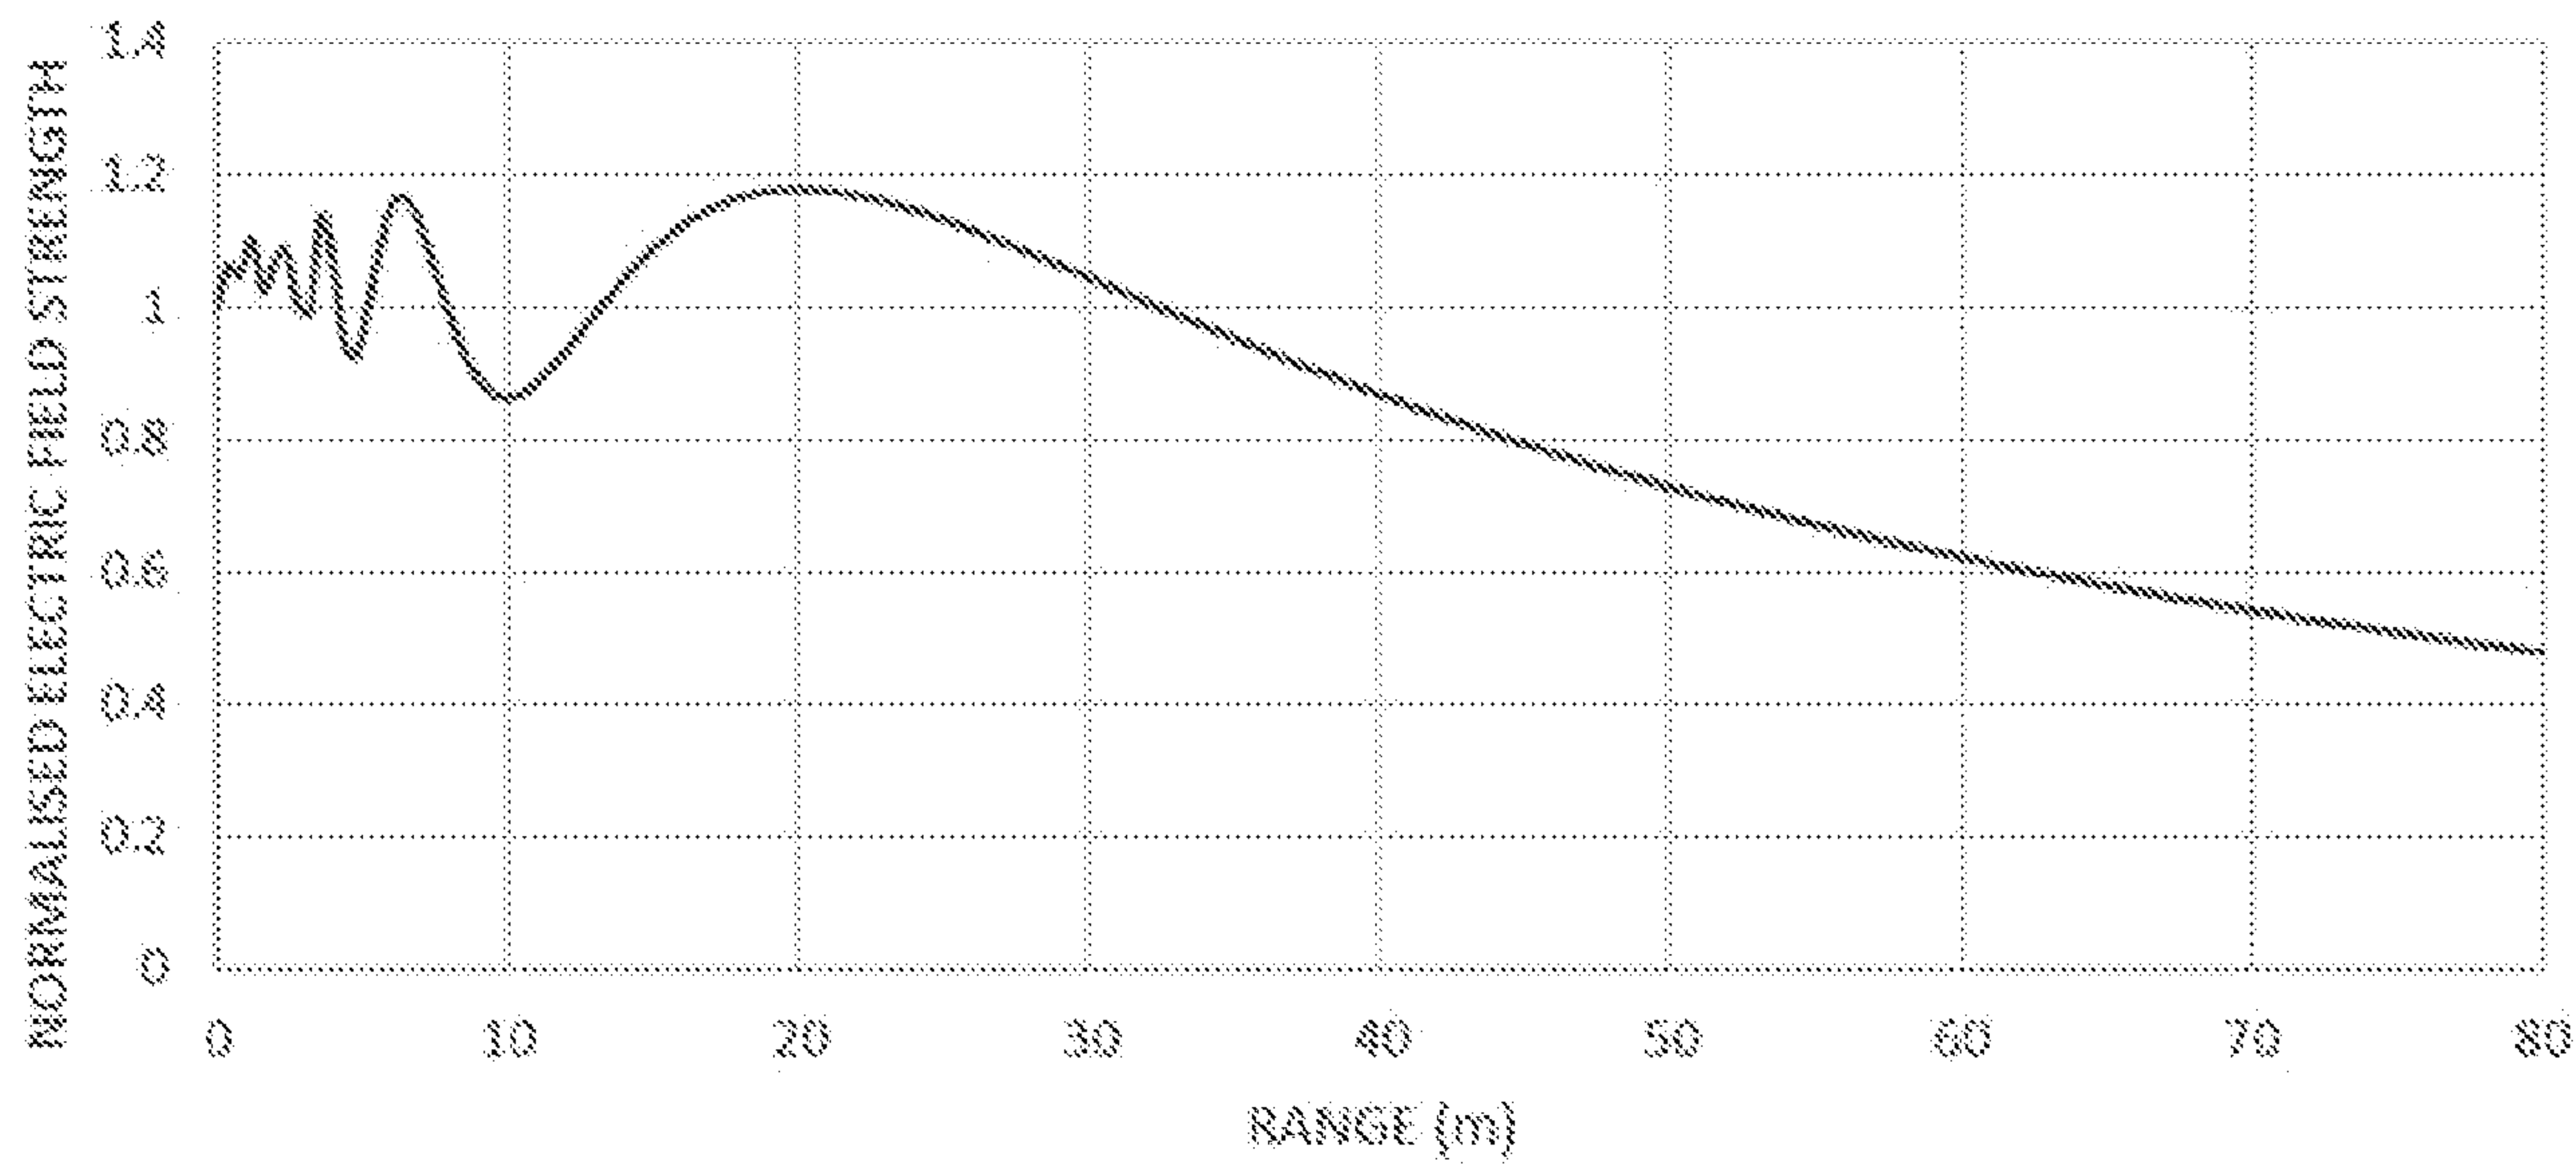


FIGURE 15

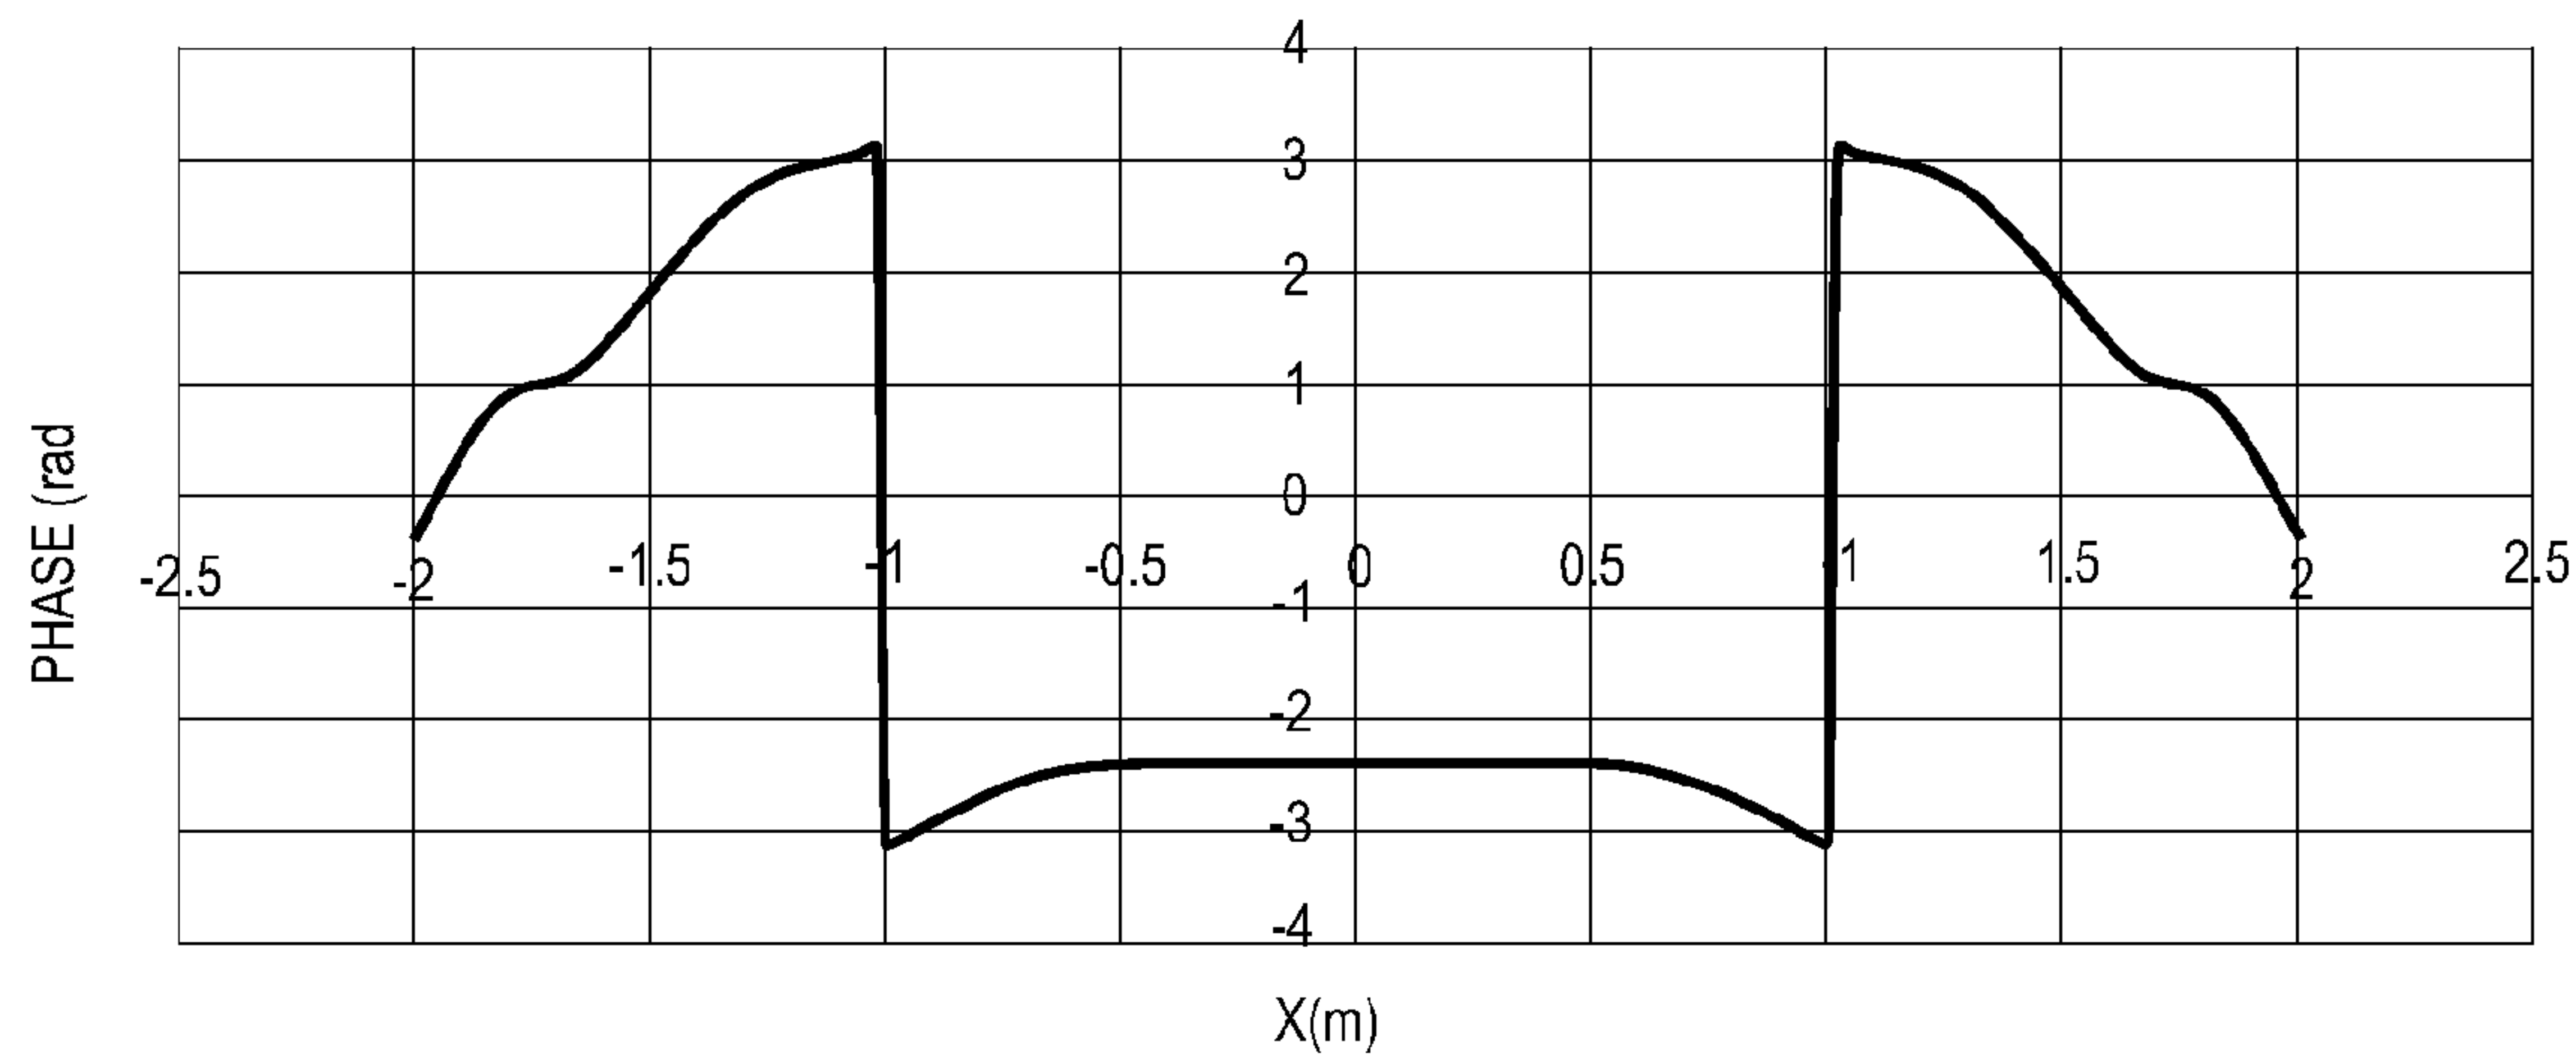


FIGURE 16A

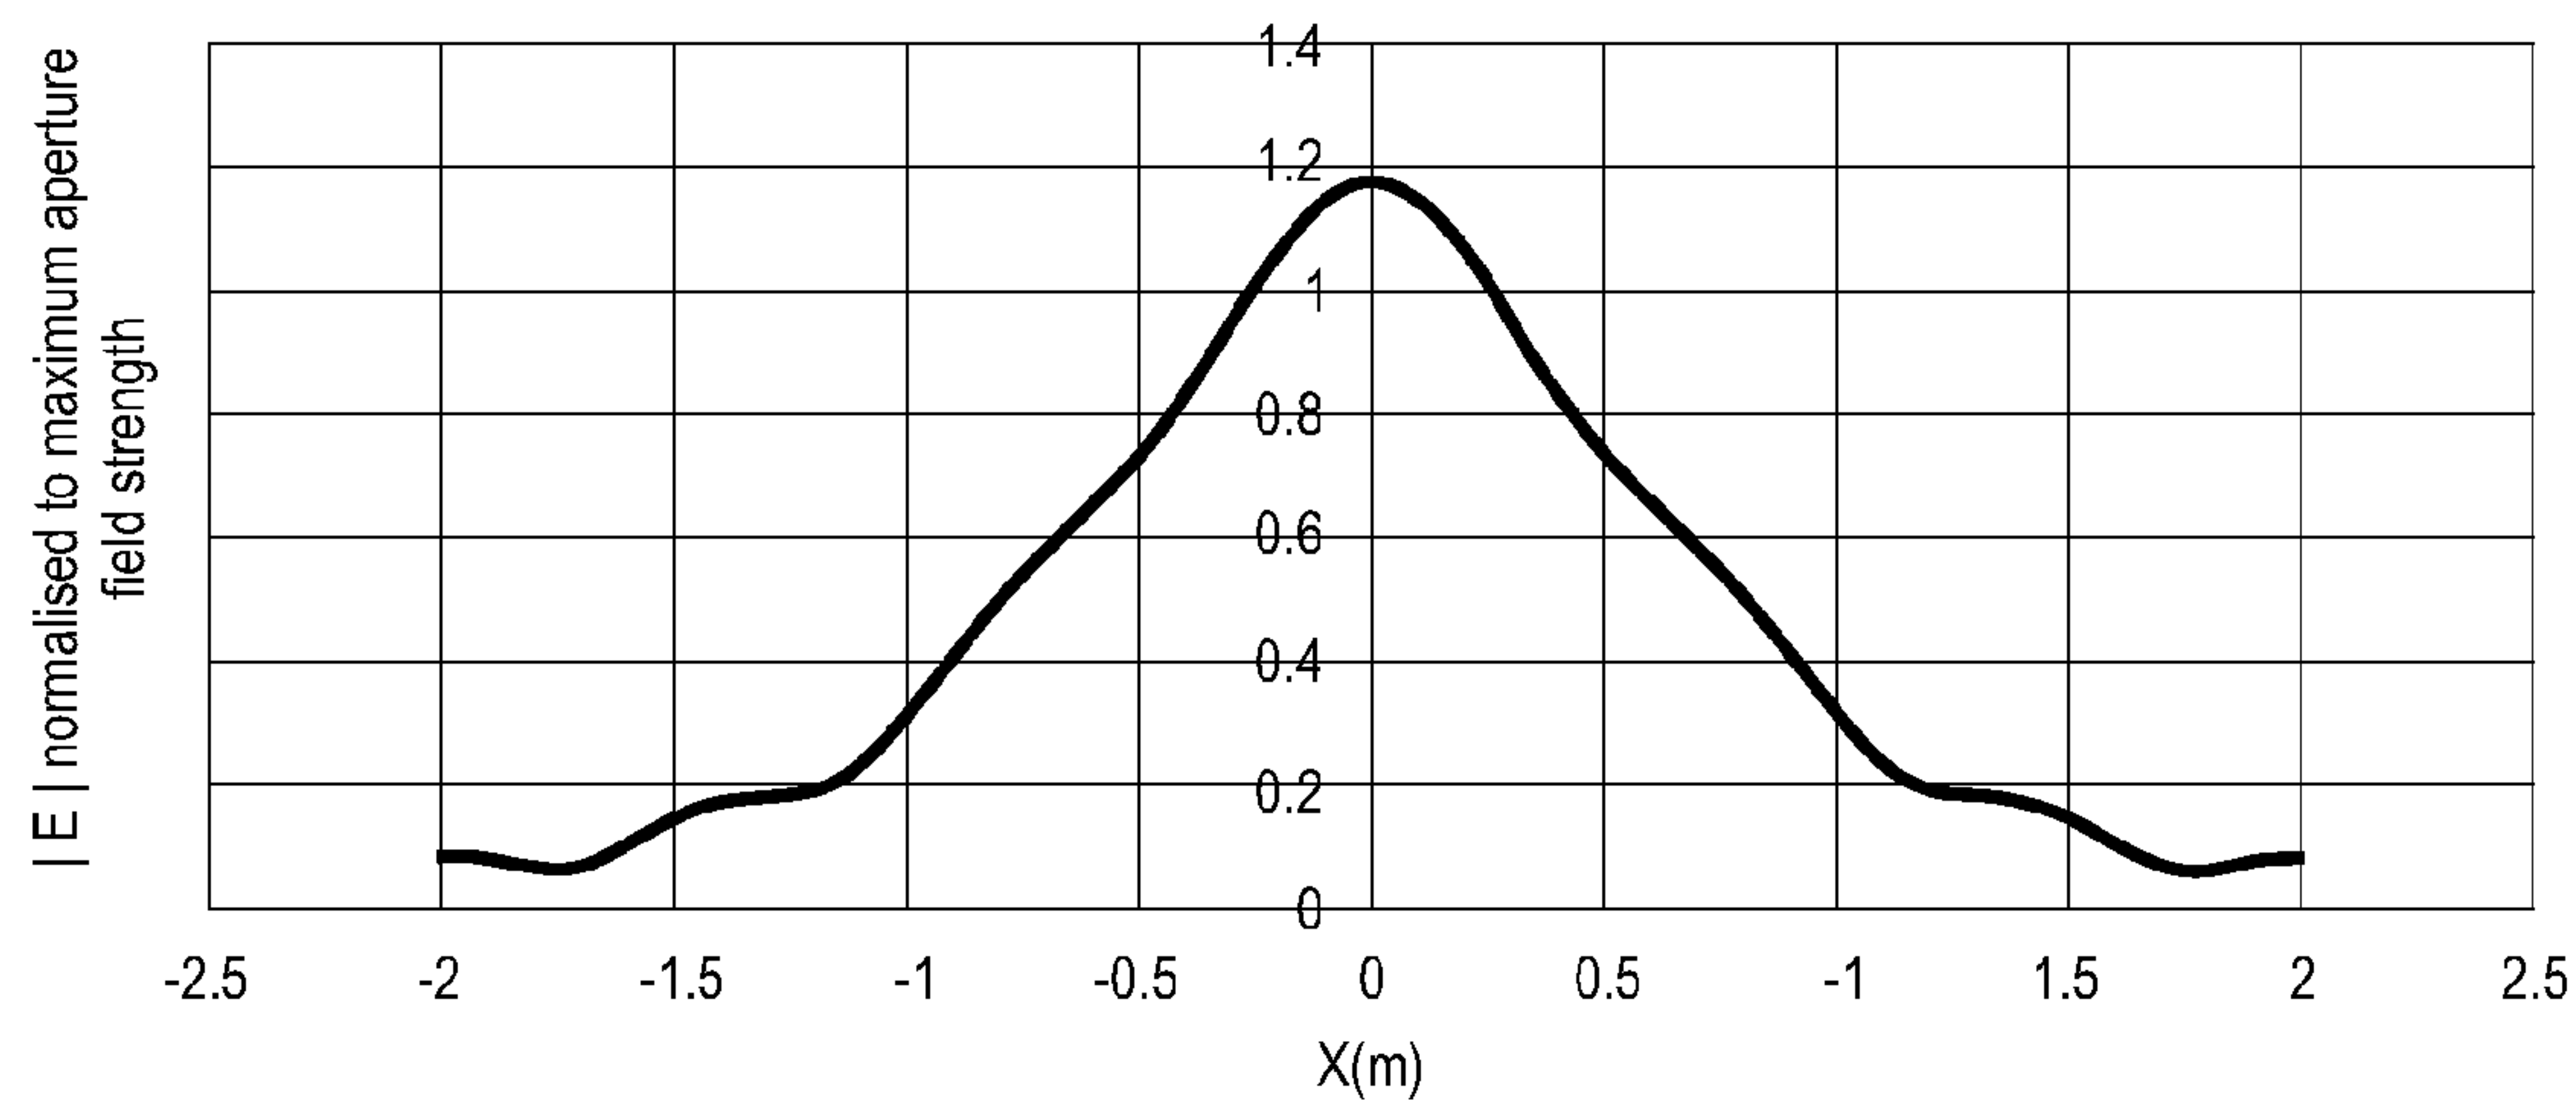


FIGURE 16B

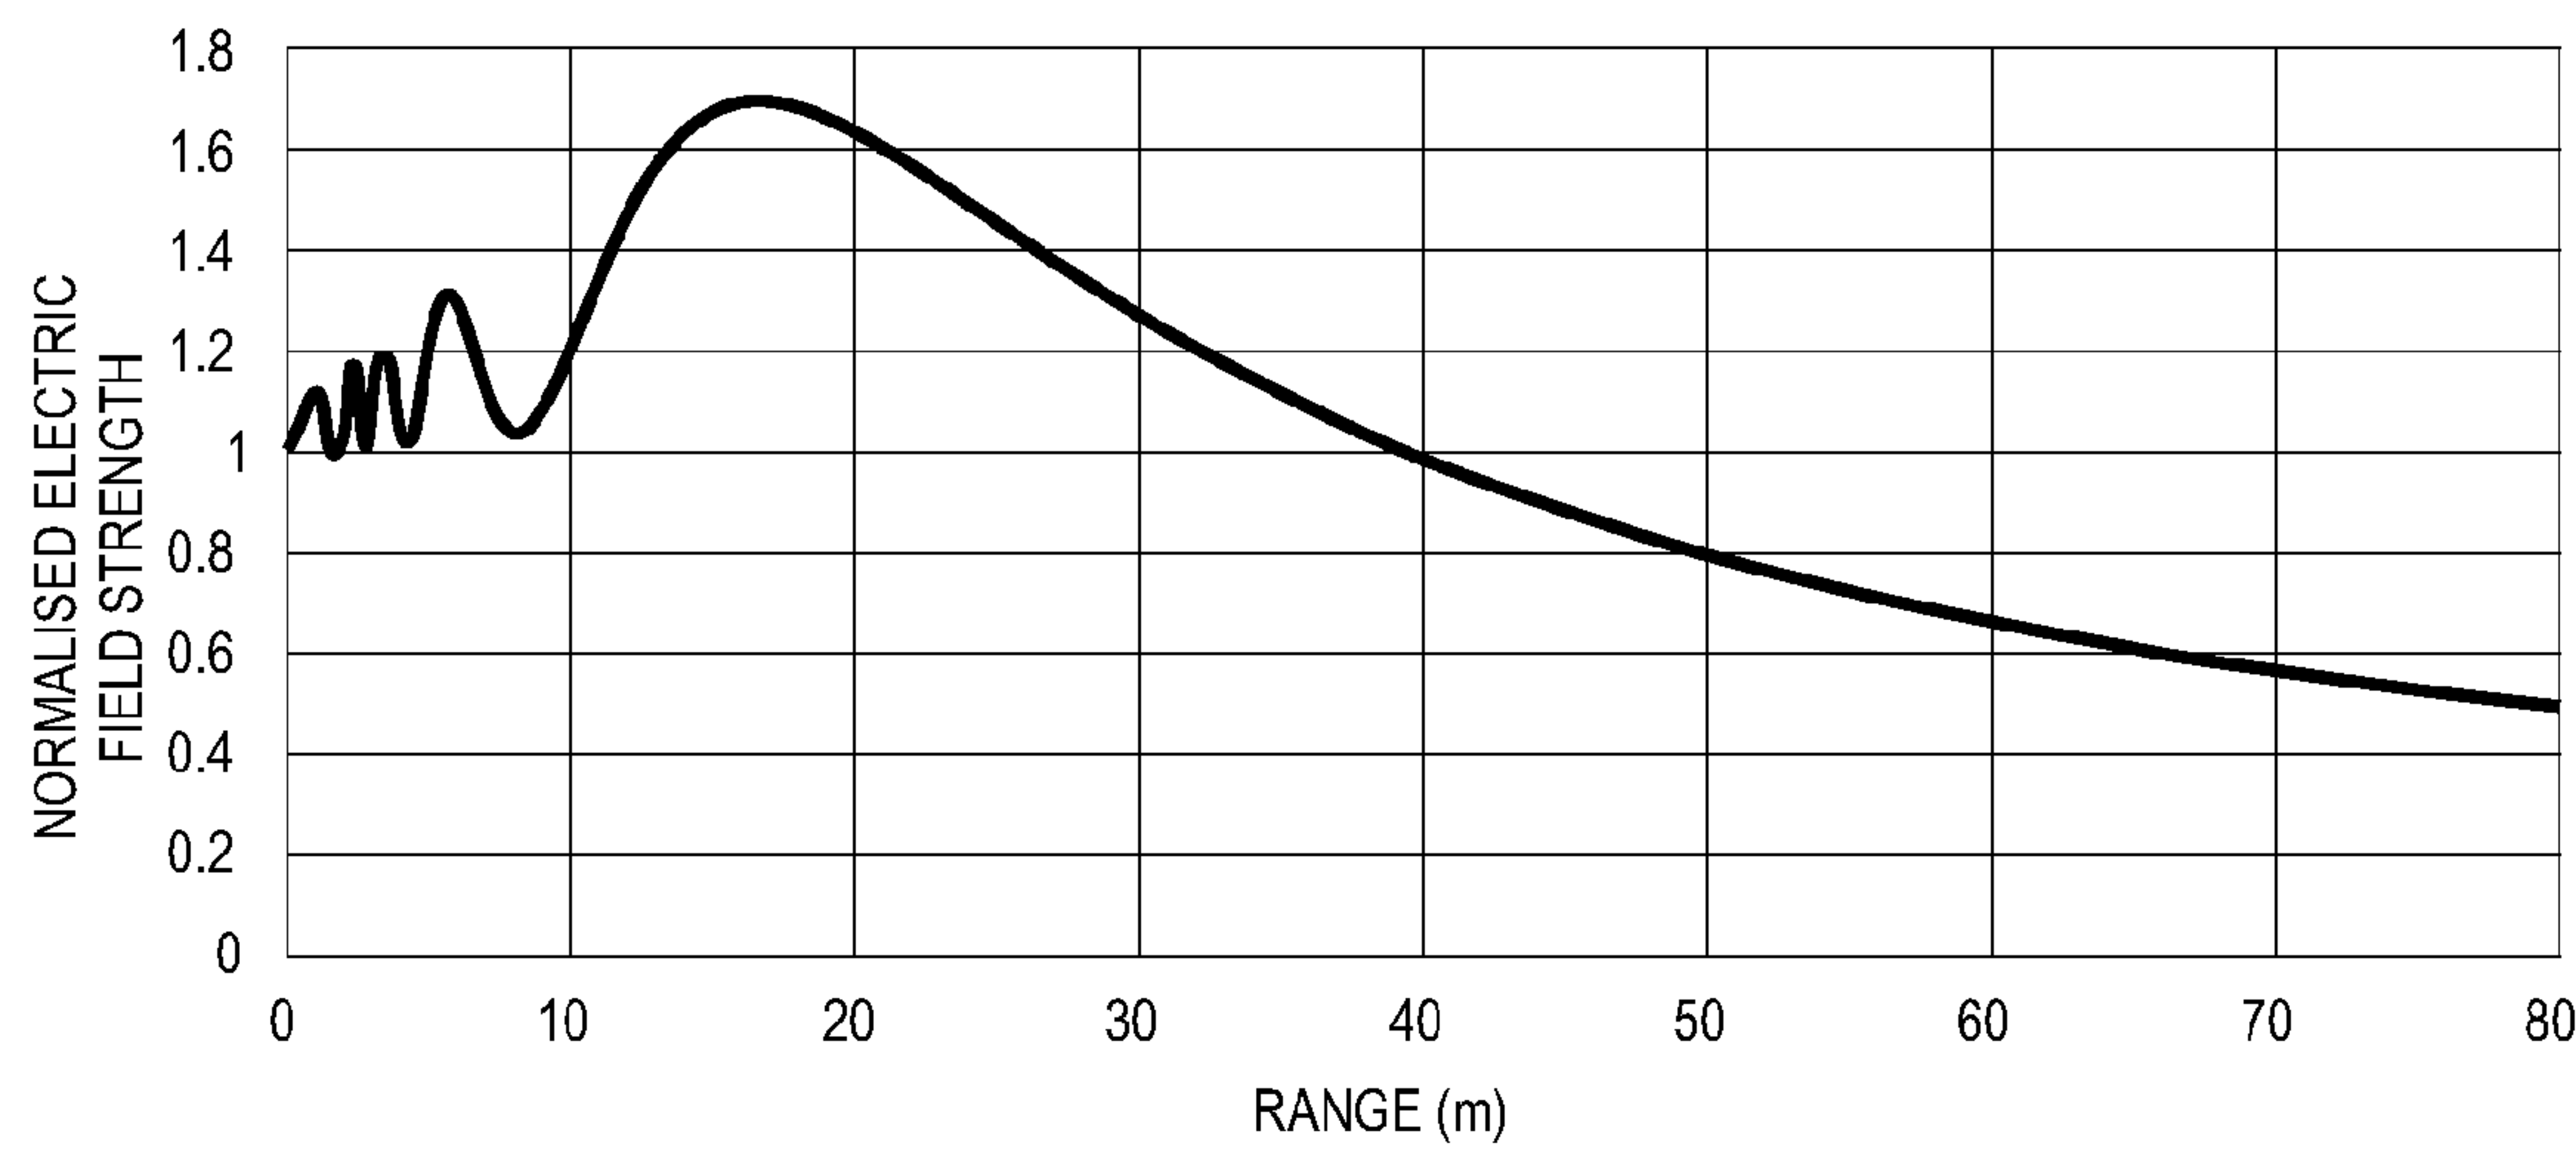


FIGURE 17

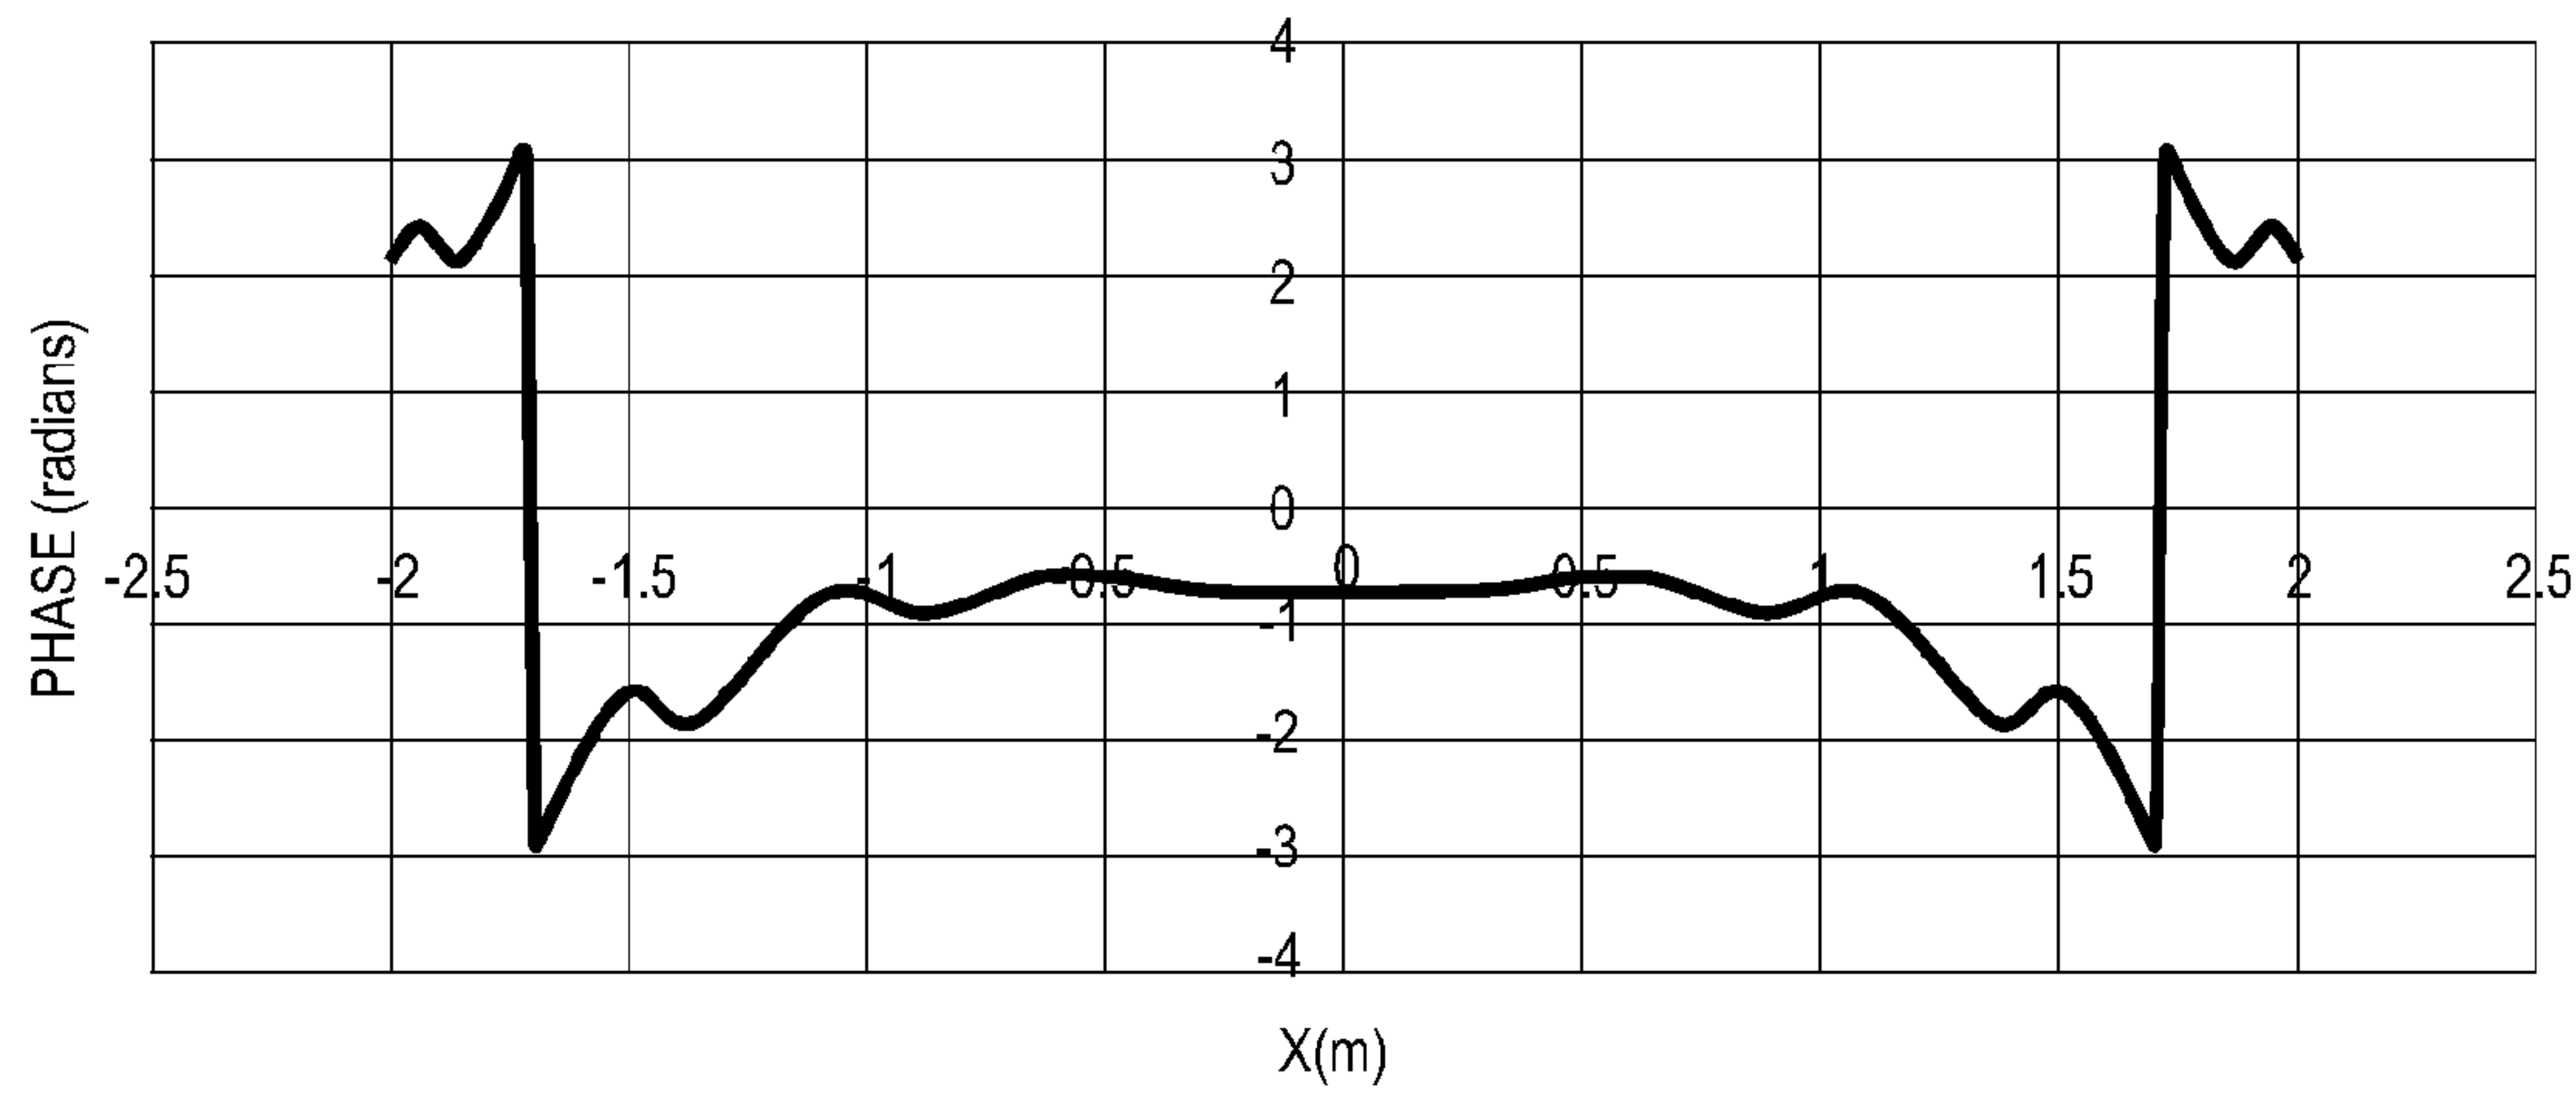


FIGURE 18A

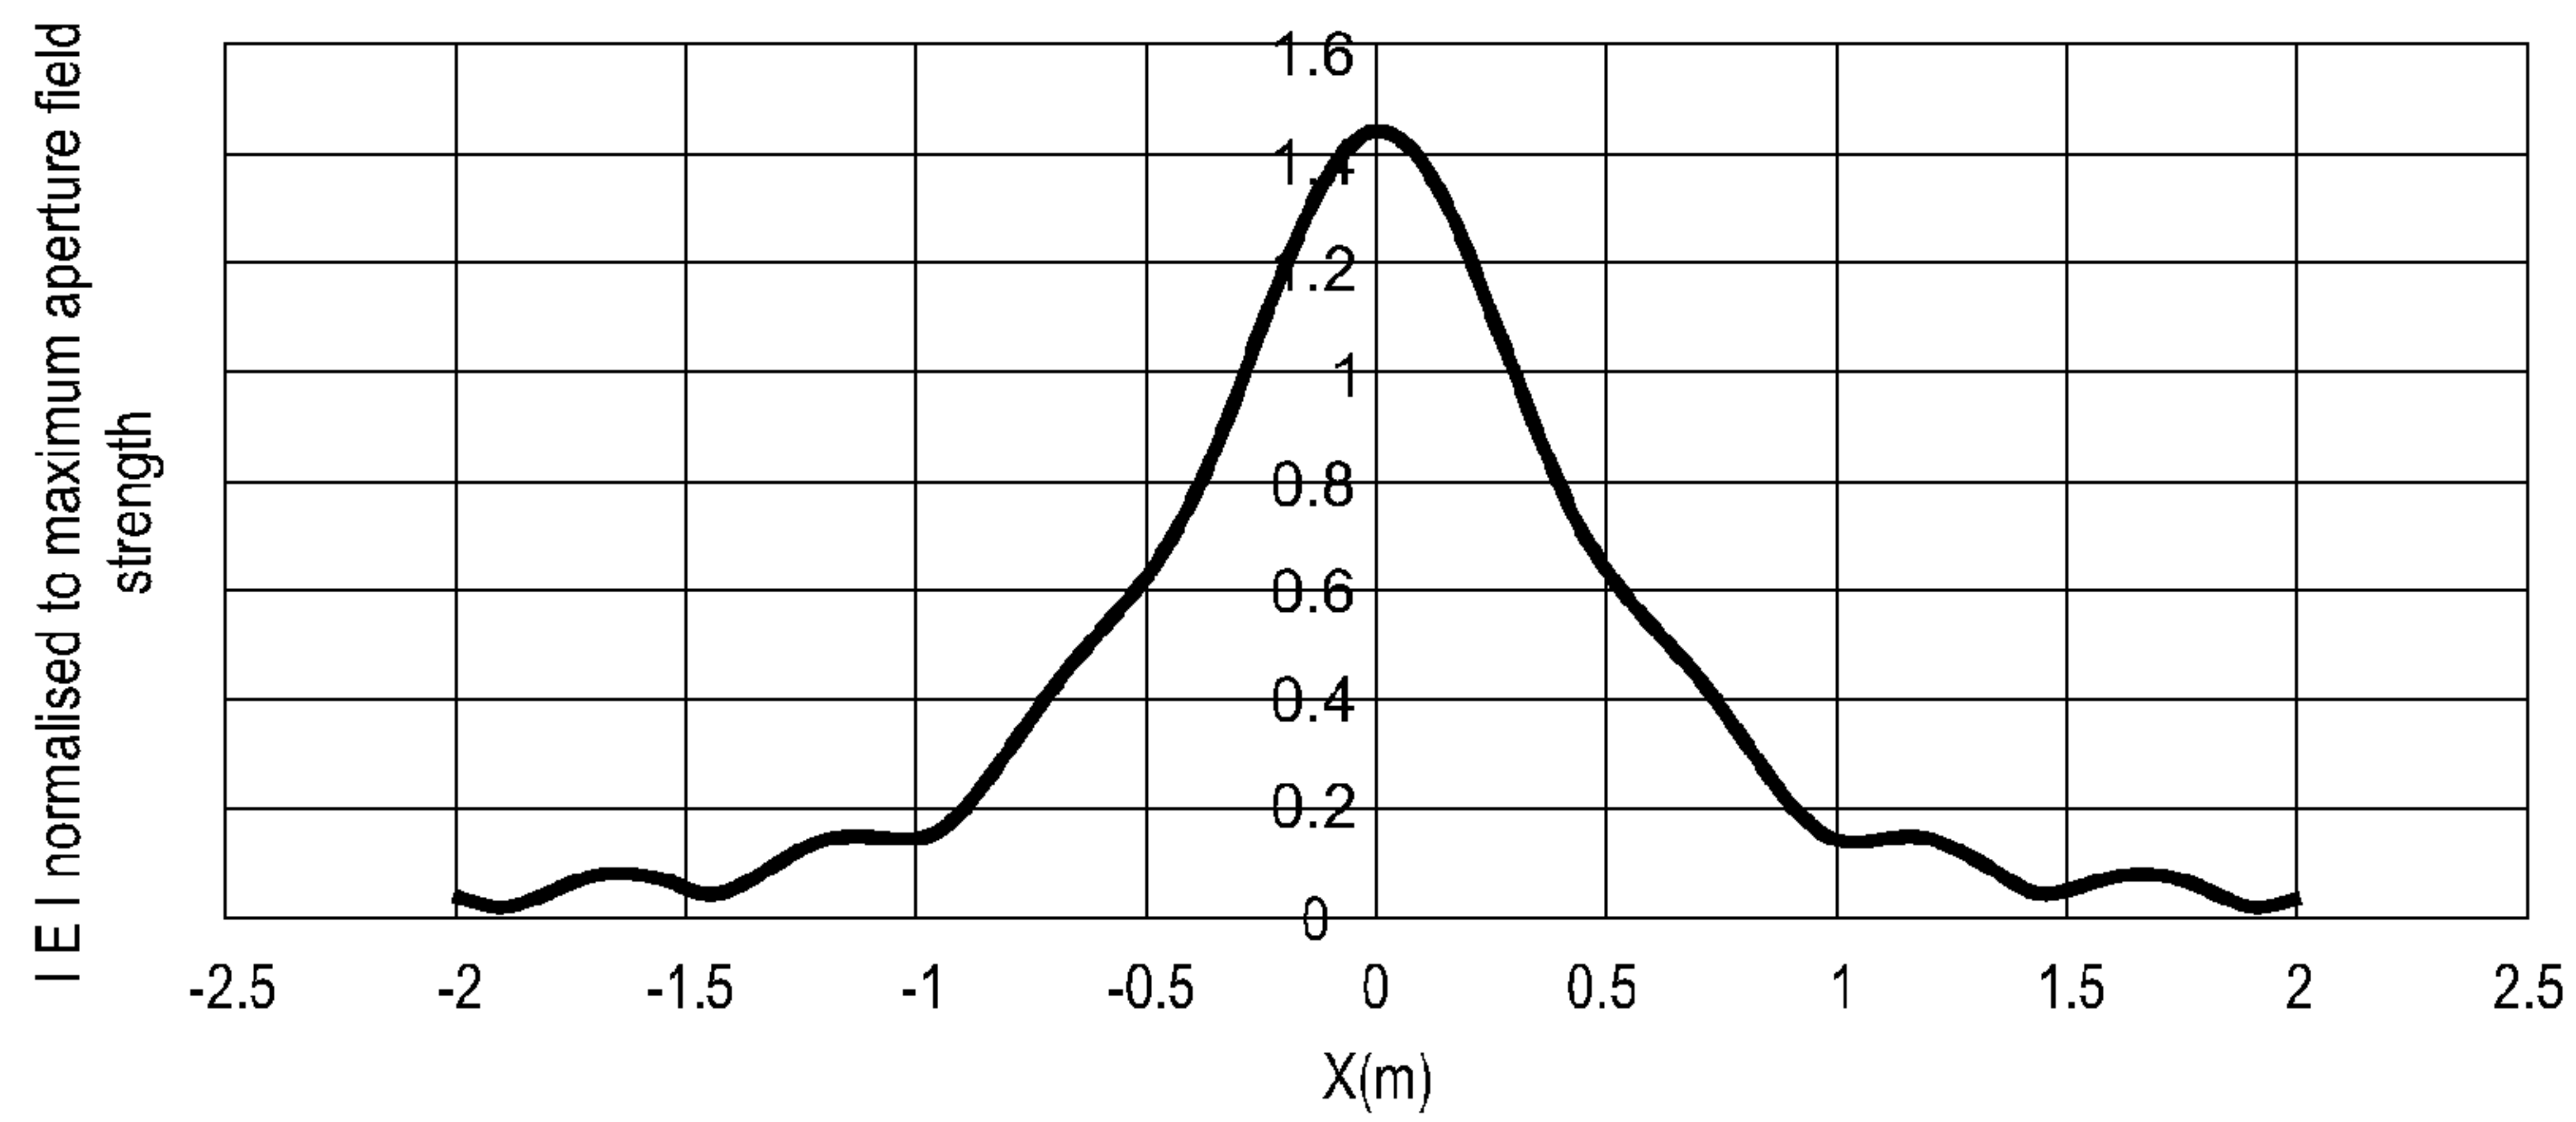


FIGURE 18B

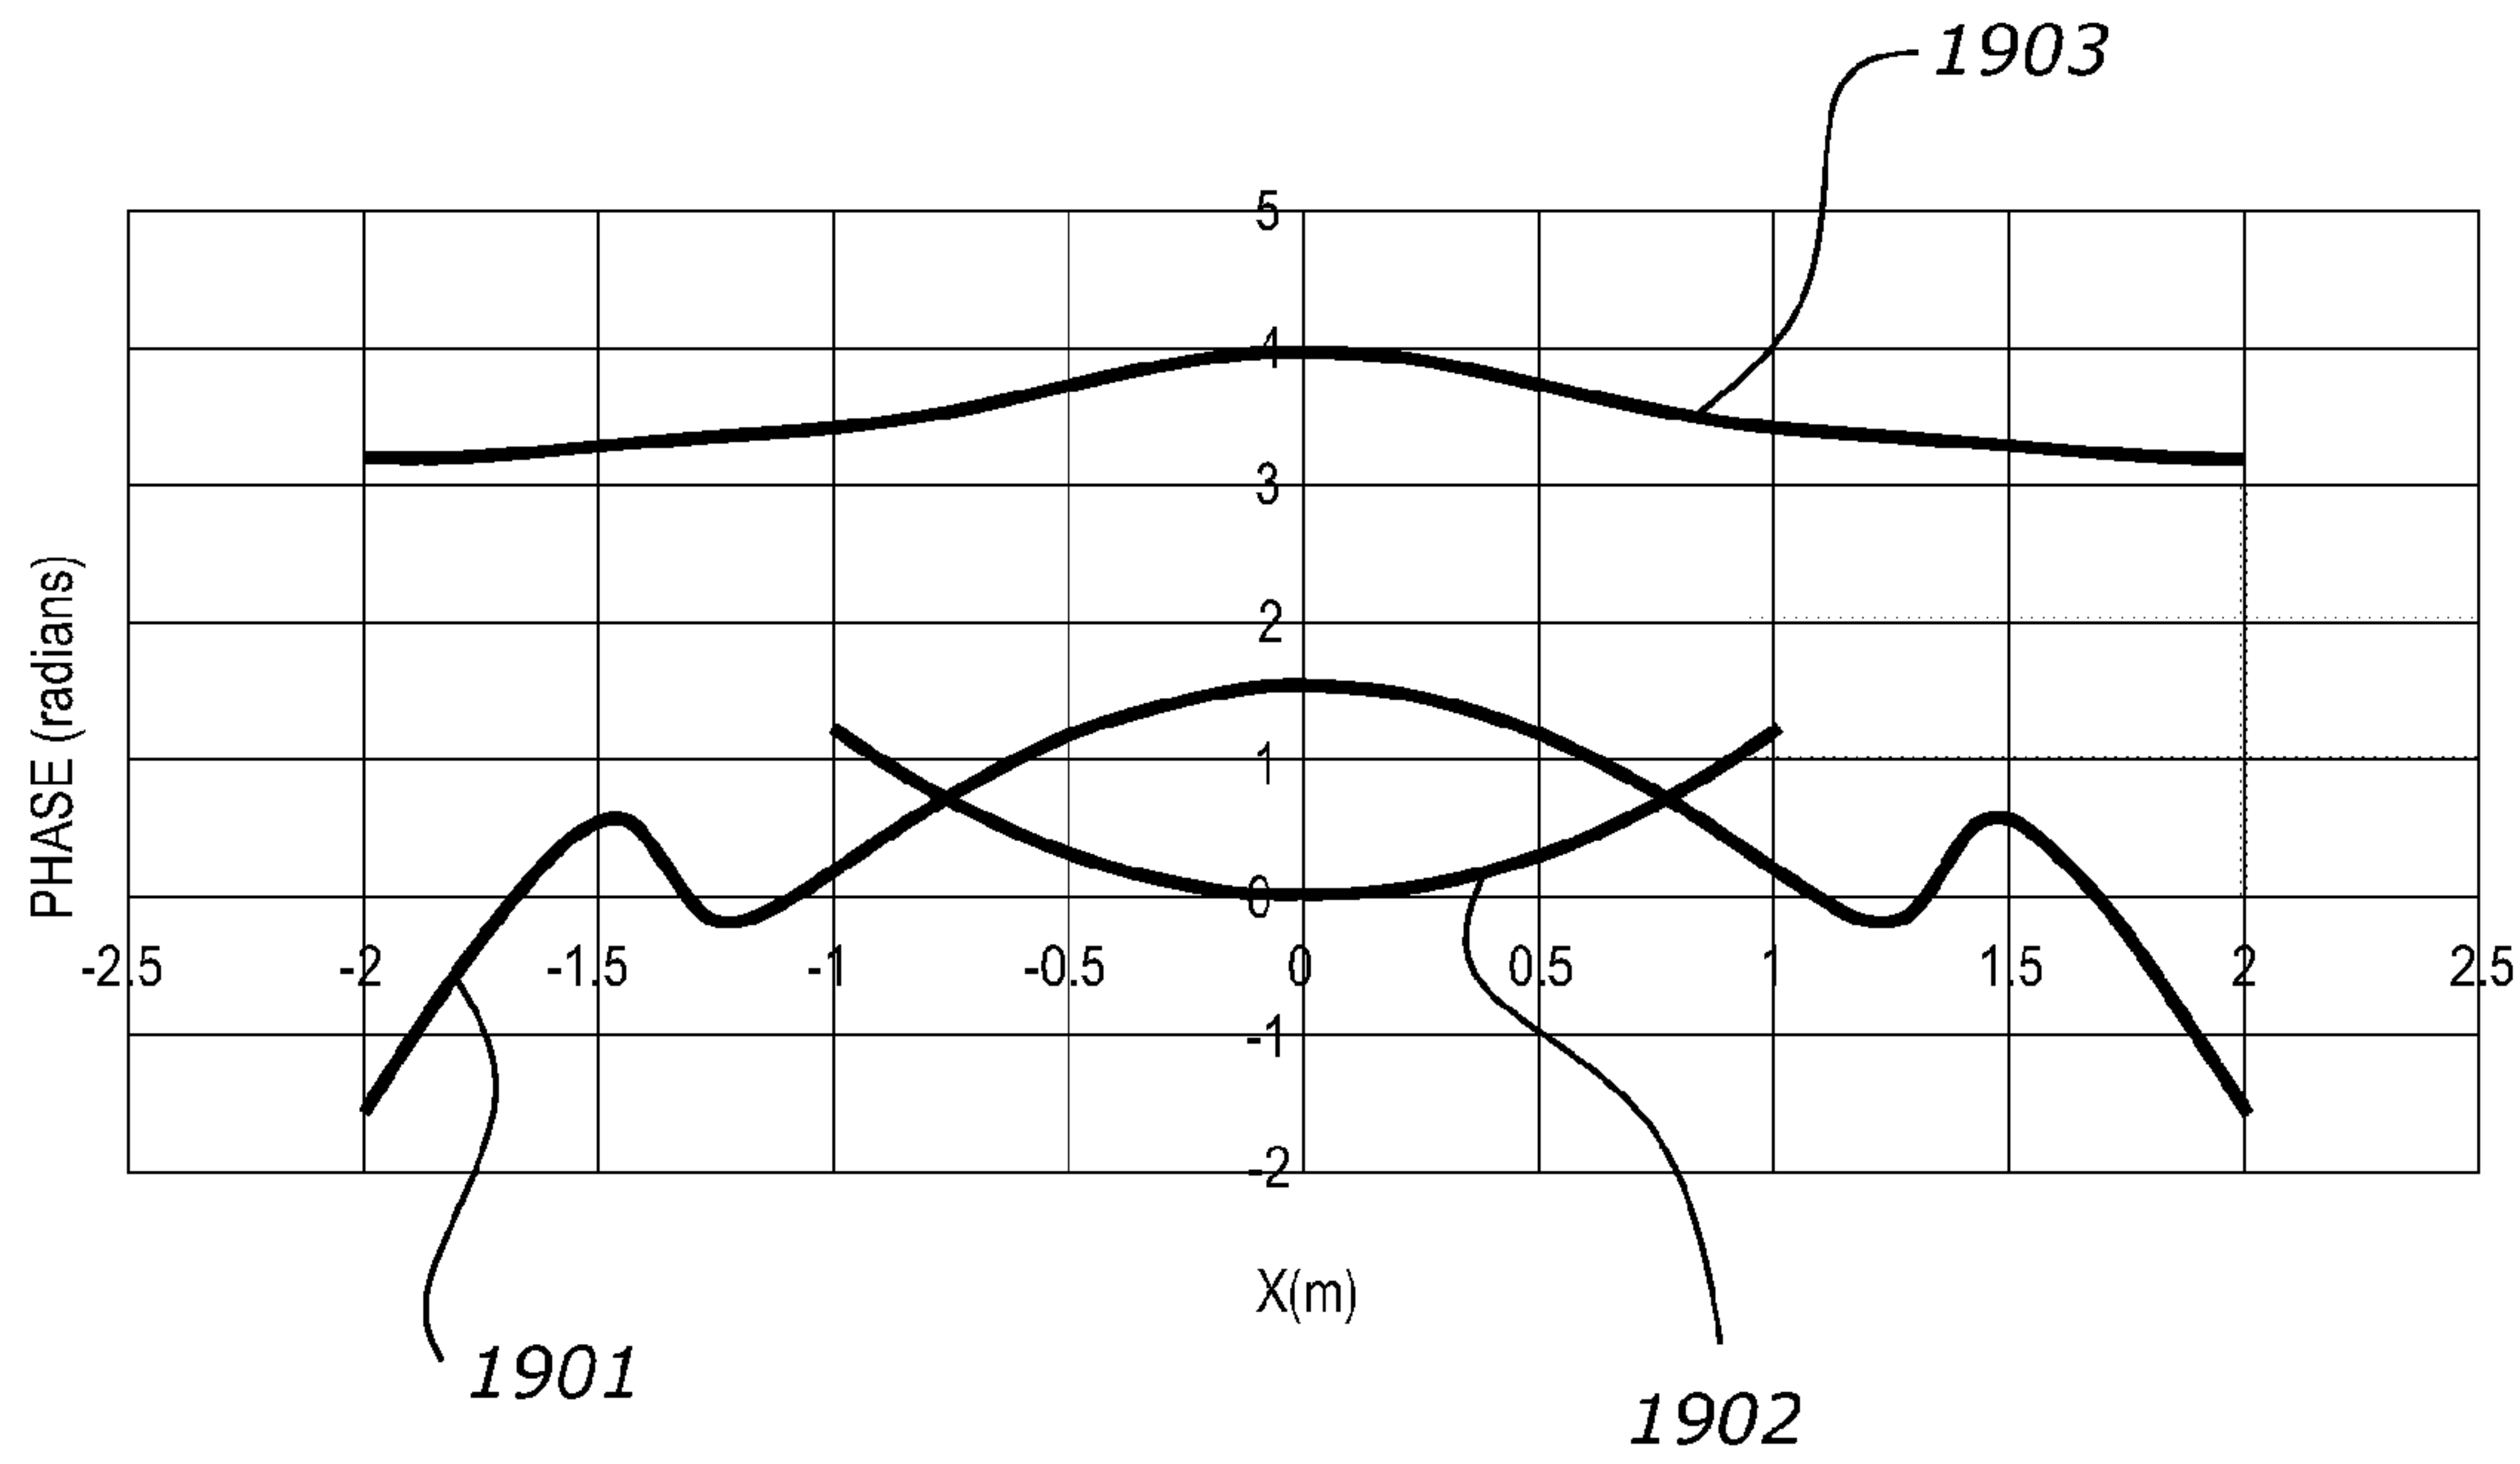


FIGURE 19A

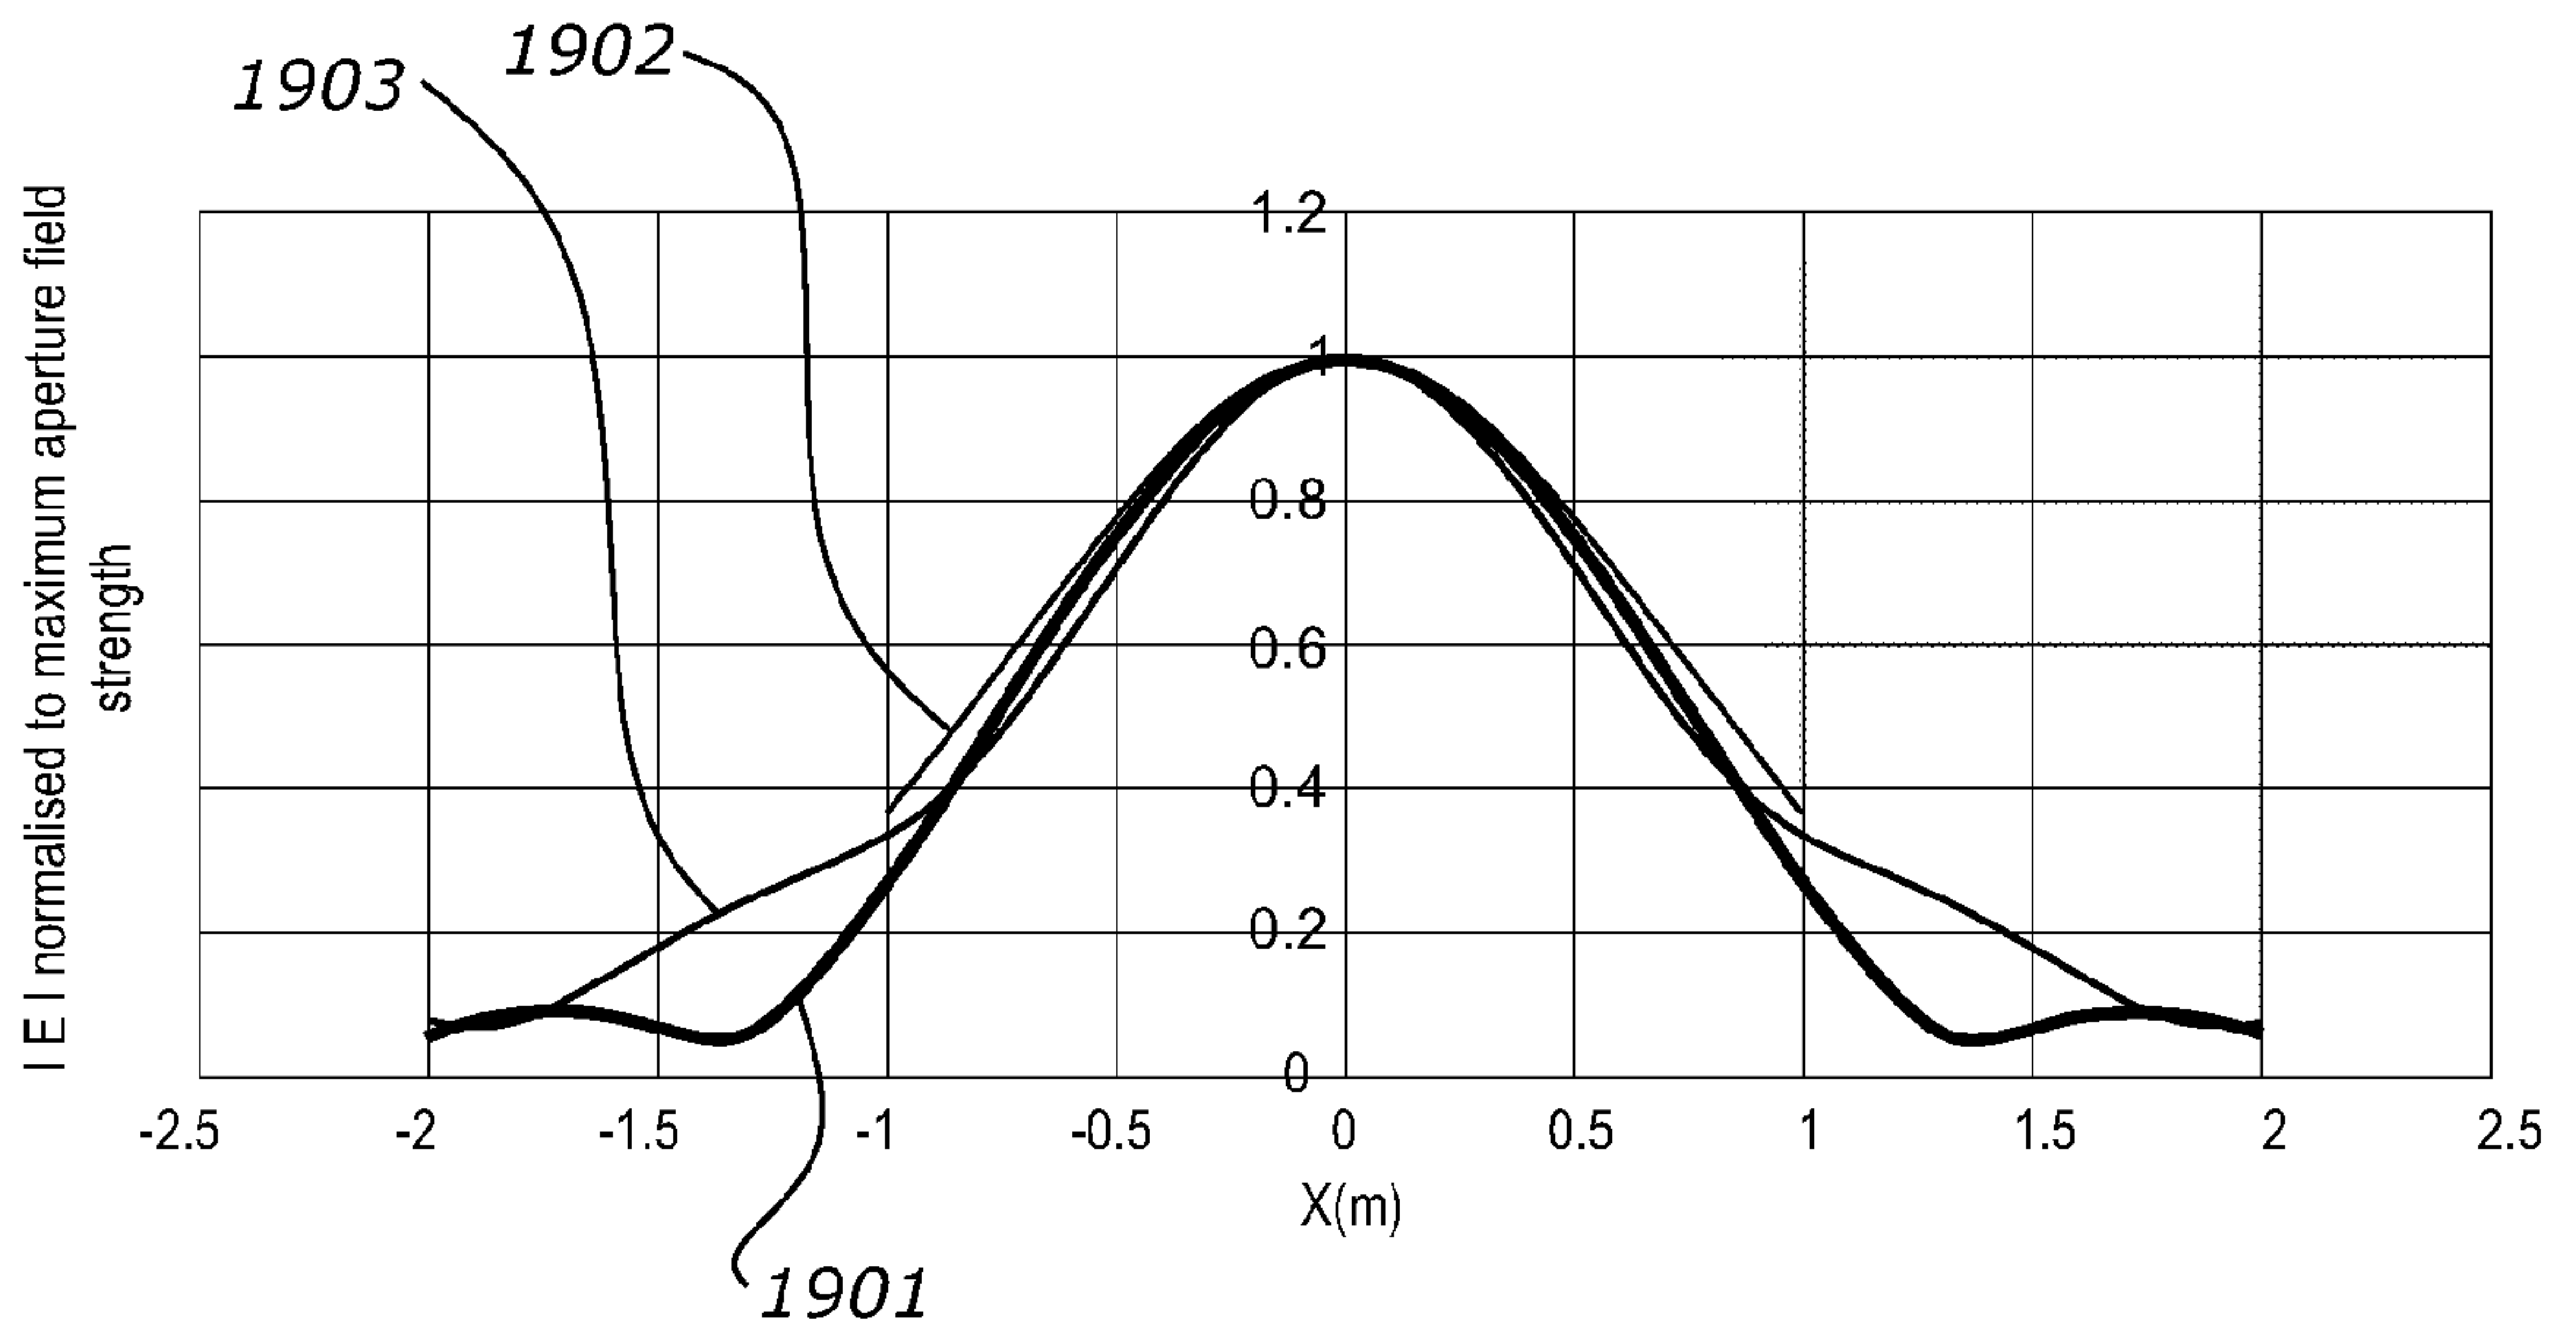
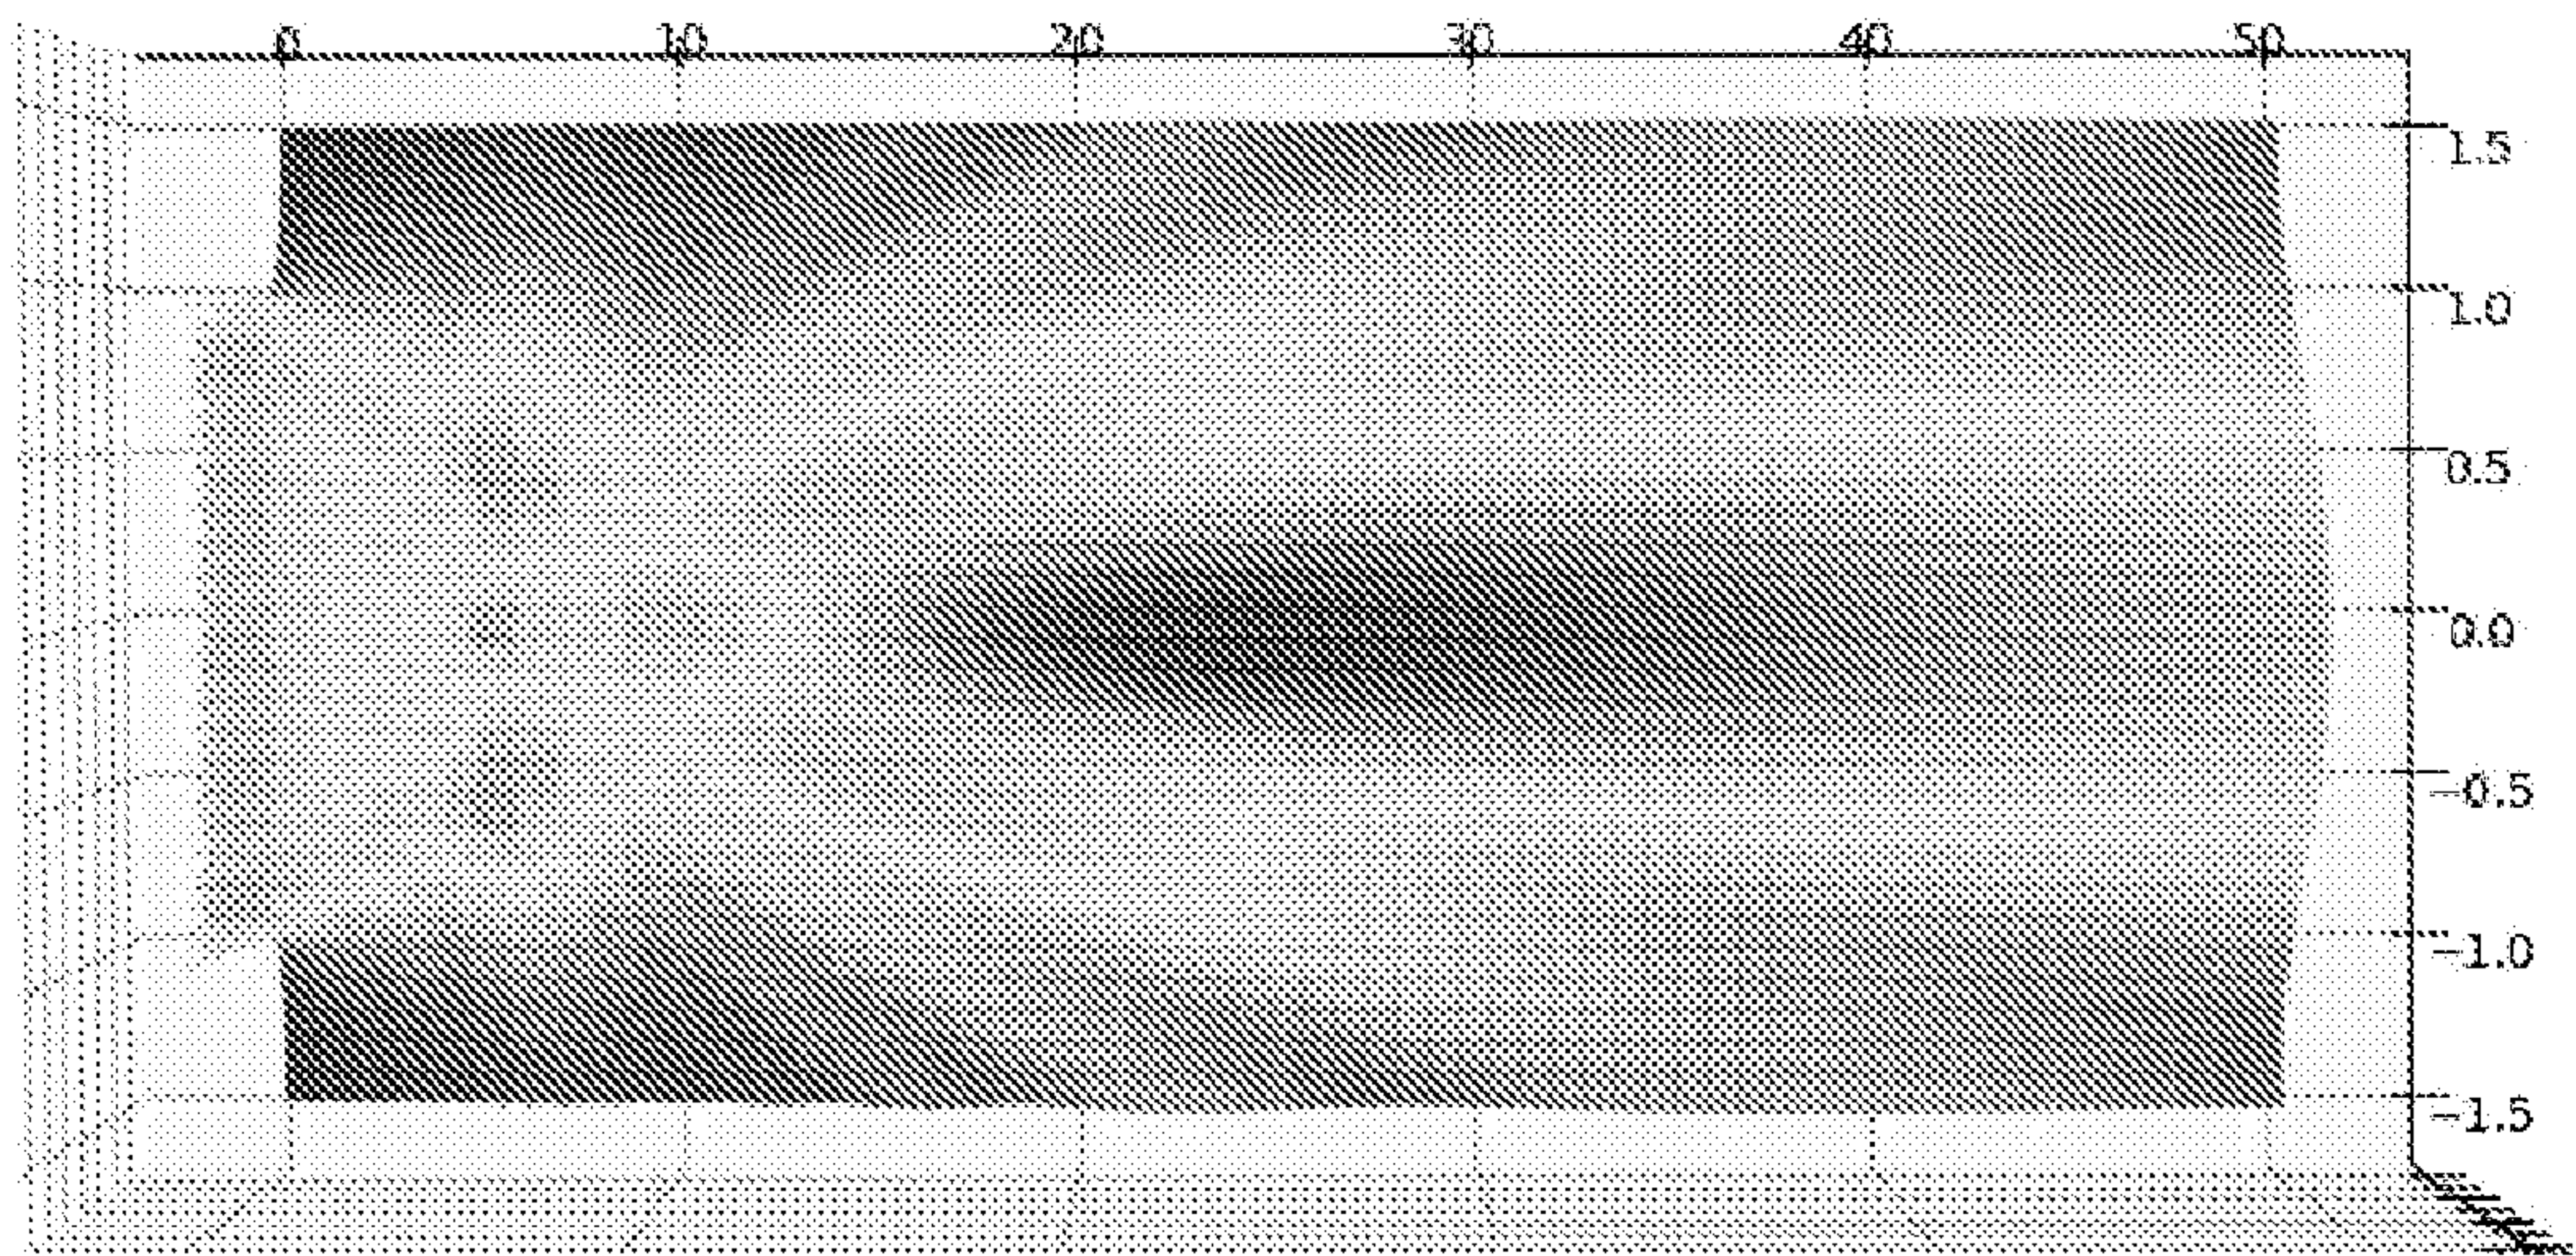
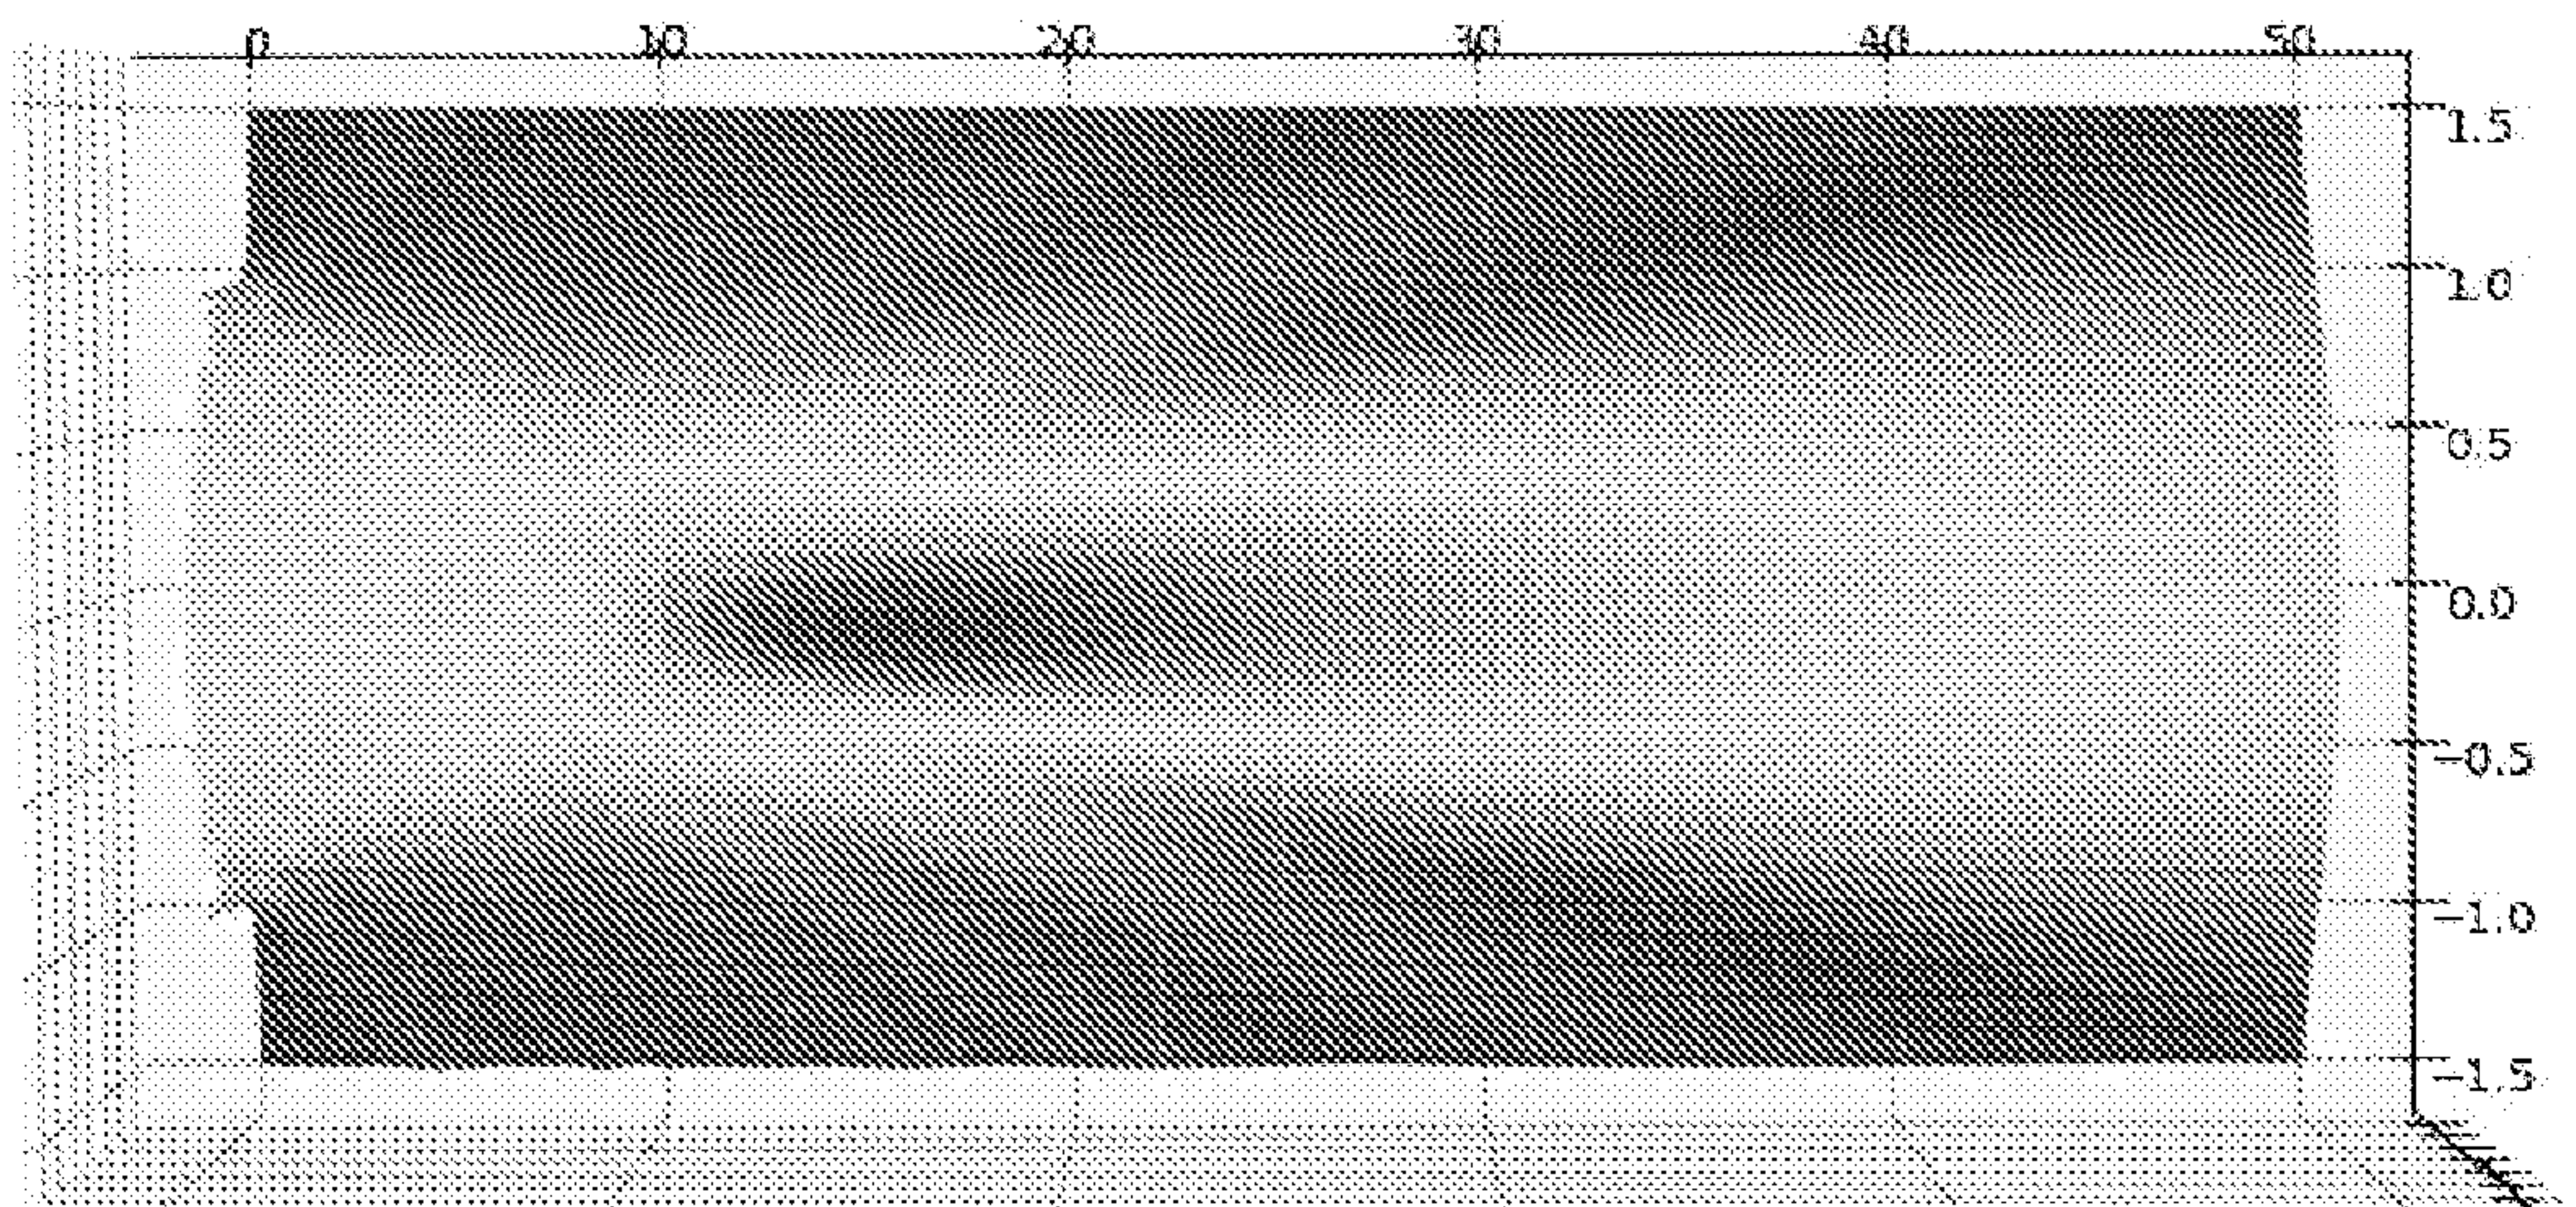


FIGURE 19B

***FIGURE 20A******FIGURE 20B***

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2020/060595

A. CLASSIFICATION OF SUBJECT MATTER

H02J 50/20 (2016.01) H02J 50/50 (2016.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PATENW with CPC/IPC: H02J50/20, H02J50/50, H04B5/0037 and keywords wireless power transfer; lens; phased array, radome antenna, beam collimation and similar terms.

Google Patents and Espacenet were searched with similar keywords/symbols as above- see the SIS for details.

Applicant/Inventor name search was conducted in the DOCDB, DWPI and in the internal databases provided by IP Australia.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	

☒ Further documents are listed in the continuation of Box C☒ See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"D" document cited by the applicant in the international application	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

18 December 2020

Date of mailing of the international search report

18 December 2020

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
Email address: pct@ipaustalia.gov.au

Authorised officer

Dr. Lu Yang
AUSTRALIAN PATENT OFFICE
(ISO 9001 Quality Certified Service)
Telephone No. +61262837949

INTERNATIONAL SEARCH REPORT		International application No.
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		PCT/IB2020/060595
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 2012/0274147 A1 (STECHEER ET AL.) 01 November 2012 See the whole document in particular the abstract, figures 1-3, 5 and 12, paras 0005, 0030, 0033-0035, 0041, 0044-0046, 0049-0050, 0056, 0069 and 0095. See the whole document in particular the abstract, figures 1-3, 5 and 12, paras 0005, 0030, 0033-0035, 0041, 0044-0046, 0049-0050, 0056, 0069 and 0095.	1-12, 15-39, 41-52 and 57-58 40
X	CN 110098669 A (CHINA SHIP RESEARCH AND DESIGN CENTER) 06 August 2019 See the whole document in particular the title, abstract, figures 1-2, paras 0032-0034 and 0036-0037.	1-5, 7-12, 15-20, 41-52 and 57-58
X	Massa A et al. 'Array Designs for Long-Distance Wireless Power Transmission: State-of-the-Art and Innovative Solutions', Proceedings of the IEEE, vol. 101, no. 6, June 2013. See the whole document in particular the abstract, figures 4, 6, 8, Sections II.C, III.A and IV.A.	1-5, 7-12, 15-21, 41-52 and 57-58
X Y	US 10211674 B1 (ENERGOUS CORPORATION) 19 February 2019 See the whole document in particular the abstract, figures 3, 18-19 and 25-28, Col. 6 line 61- Col. 7 line 4. Col. 7 lines 24-27, lines 32-51, Col. 8 lines 16-20, lines 23-25, Col. 16 lines 27-35, Col. 27 lines 10-13, Col. 42 lines 2-9, Col. 44 lines 43-64. See the whole document in particular the abstract, figures 3, 18-19 and 25-28, Col. 6 line 61- Col. 7 line 4. Col. 7 lines 24-27, lines 32-51, Col. 8 lines 16-20, lines 23-25, Col. 16 lines 27-35, Col. 27 lines 10-13, Col. 42 lines 2-9, Col. 44 lines 43-64.	1-5, 7-20 and 41-58 40
X Y	EP 3496231 A1 (SAMSUNG ELECTRONICS CO., LTD.) 12 June 2019 See the whole document in particular the abstract, figures 1-2 and 10, paras 0007-0008, 0016-0017, 0028, 0061 and 0082-0086. See the whole document in particular the abstract, figures 1-2 and 10, paras 0007-0008, 0016-0017, 0028, 0061 and 0082-0086.	1-5, 7-14, 17, 19-20 and 41-57 40
X	WO 2014/194061 A2 (ESCAPE DYNAMICS, INC.) 04 December 2014 See the whole document in particular the abstract, figure 1, paras 0019, 0023-0025 and 0039.	22 and 26-27
Form PCT/ISA/210 (fifth sheet) (July 2019)		

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
US 2012/0274147 A1	01 November 2012	US 2012274147 A1	01 Nov 2012
		EP 2702697 A1	05 Mar 2014
		JP 2014518059 A	24 Jul 2014
		KR 20140036201 A	25 Mar 2014
		WO 2012148450 A1	01 Nov 2012
CN 110098669 A	06 August 2019	CN 110098669 A	06 Aug 2019
US 10211674 B1	19 February 2019	US 10211674 B1	19 Feb 2019
		CA 2676204 A1	28 Aug 2008
		CN 101611305 A	23 Dec 2009
		CN 101611305 B	14 Sep 2011
		CN 105453377 A	30 Mar 2016
		CN 105453384 A	30 Mar 2016
		CN 105453384 B	19 Jul 2019
		CN 105830305 A	03 Aug 2016
		CN 106849384 A	13 Jun 2017
		CN 107040048 A	11 Aug 2017
		CN 107231821 A	03 Oct 2017
		CN 107360732 A	17 Nov 2017
		CN 107360732 B	22 Nov 2019
		CN 107408448 A	28 Nov 2017
		CN 107408448 B	14 Jun 2019
		CN 107409054 A	28 Nov 2017
		CN 107409054 B	30 Jun 2020
		CN 108702675 A	23 Oct 2018
		CN 109041586 A	18 Dec 2018
		CN 110289701 A	27 Sep 2019
		EP 2113076 A2	04 Nov 2009
		EP 2113076 B1	22 Oct 2014
		EP 3025413 A1	01 Jun 2016
		EP 3025413 B1	15 Jan 2020
		EP 3031123 A1	15 Jun 2016
		EP 3031123 B1	12 Feb 2020
		EP 3087650 A1	02 Nov 2016
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		EP 3087650 B1	06 Nov 2019
		EP 3148051 A1	29 Mar 2017
		EP 3160010 A1	26 Apr 2017
		EP 3238323 A1	01 Nov 2017
		EP 3238323 B1	07 Aug 2019
		EP 3241224 A1	08 Nov 2017
		EP 3241277 A1	08 Nov 2017
		EP 3241277 B1	05 Feb 2020
		EP 3241347 A1	08 Nov 2017
		EP 3395101 A1	31 Oct 2018
		EP 3398242 A1	07 Nov 2018
		EP 3637624 A1	15 Apr 2020
		GB 2446934 A	27 Aug 2008
		JP 2010519505 A	03 Jun 2010
		JP 5180973 B2	10 Apr 2013
		JP 2018506251 A	01 Mar 2018
		JP 6546282 B2	17 Jul 2019
		JP 2018504874 A	15 Feb 2018
		JP 6630360 B2	15 Jan 2020
		JP 2018504879 A	15 Feb 2018
		JP 6653328 B2	26 Feb 2020
		JP 2018506252 A	01 Mar 2018
		JP 2019506120 A	28 Feb 2019
		JP 2019506826 A	07 Mar 2019
		KR 20170033257 A	24 Mar 2017
		KR 20170035338 A	30 Mar 2017
		KR 20170100020 A	01 Sep 2017
		KR 20170100649 A	04 Sep 2017
		KR 20170101969 A	06 Sep 2017
		KR 20170102171 A	07 Sep 2017
		KR 20180090893 A	13 Aug 2018
		KR 20180095707 A	27 Aug 2018
		TW 201728038 A	01 Aug 2017
		TW 201728049 A	01 Aug 2017
		US 2014375255 A1	25 Dec 2014
		US 9124125 B2	01 Sep 2015
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		US 2015015194 A1	15 Jan 2015
		US 9130397 B2	08 Sep 2015
		US 2015015195 A1	15 Jan 2015
		US 9143000 B2	22 Sep 2015
		US 2015171656 A1	18 Jun 2015
		US 9252628 B2	02 Feb 2016
		US 9368020 B1	14 Jun 2016
		US 2013240747 A1	19 Sep 2013
		US 9404862 B2	02 Aug 2016
		US 2015333529 A1	19 Nov 2015
		US 9419443 B2	16 Aug 2016
		US 9438045 B1	06 Sep 2016
		US 9438046 B1	06 Sep 2016
		US 9450449 B1	20 Sep 2016
		US 9521926 B1	20 Dec 2016
		US 2016020649 A1	21 Jan 2016
		US 9537354 B2	03 Jan 2017
		US 2015326052 A1	12 Nov 2015
		US 9537357 B2	03 Jan 2017
		US 2015349850 A1	03 Dec 2015
		US 9537358 B2	03 Jan 2017
		US 2016100312 A1	07 Apr 2016
		US 9538382 B2	03 Jan 2017
		US 9787103 B1	10 Oct 2017
		US 2015340910 A1	26 Nov 2015
		US 9793758 B2	17 Oct 2017
		US 2015326063 A1	12 Nov 2015
		US 9800080 B2	24 Oct 2017
		US 9800172 B1	24 Oct 2017
		US 2015326142 A1	12 Nov 2015
		US 9806564 B2	31 Oct 2017
		US 9812890 B1	07 Nov 2017
		US 2015326069 A1	12 Nov 2015
		US 9819230 B2	14 Nov 2017
		US 2015102681 A1	16 Apr 2015
		US 9824815 B2	21 Nov 2017
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		US 9825674 B1	21 Nov 2017
		US 2015029397 A1	29 Jan 2015
		US 9831718 B2	28 Nov 2017
		US 2016020830 A1	21 Jan 2016
		US 9838083 B2	05 Dec 2017
		US 9843201 B1	12 Dec 2017
		US 2015042264 A1	12 Feb 2015
		US 9843213 B2	12 Dec 2017
		US 2015326027 A1	12 Nov 2015
		US 9843229 B2	12 Dec 2017
		US 2016100124 A1	07 Apr 2016
		US 9843763 B2	12 Dec 2017
		US 2016149437 A1	26 May 2016
		US 9847669 B2	19 Dec 2017
		US 9847677 B1	19 Dec 2017
		US 2015326025 A1	12 Nov 2015
		US 9847679 B2	19 Dec 2017
		US 9853458 B1	26 Dec 2017
		US 9853692 B1	26 Dec 2017
		US 2016099610 A1	07 Apr 2016
		US 9859756 B2	02 Jan 2018
		US 9859757 B1	02 Jan 2018
		US 9859758 B1	02 Jan 2018
		US 9859797 B1	02 Jan 2018
		US 2016099758 A1	07 Apr 2016
		US 9866279 B2	09 Jan 2018
		US 9867062 B1	09 Jan 2018
		US 9871387 B1	16 Jan 2018
		US 9871398 B1	16 Jan 2018
		US 9876379 B1	23 Jan 2018
		US 9876380 B1	23 Jan 2018
		US 9876394 B1	23 Jan 2018
		US 9876536 B1	23 Jan 2018
		US 2016056966 A1	25 Feb 2016
		US 9876648 B2	23 Jan 2018
		US 9882394 B1	30 Jan 2018
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		US 9882395 B1	30 Jan 2018
		US 2015123496 A1	07 May 2015
		US 9882427 B2	30 Jan 2018
		US 9882430 B1	30 Jan 2018
		US 9887584 B1	06 Feb 2018
		US 2016099756 A1	07 Apr 2016
		US 9887739 B2	06 Feb 2018
		US 2016056669 A1	25 Feb 2016
		US 9891669 B2	13 Feb 2018
		US 9893538 B1	13 Feb 2018
		US 2016099613 A1	07 Apr 2016
		US 9893554 B2	13 Feb 2018
		US 9893555 B1	13 Feb 2018
		US 2016099755 A1	07 Apr 2016
		US 9893768 B2	13 Feb 2018
		US 9899844 B1	20 Feb 2018
		US 9899861 B1	20 Feb 2018
		US 2015340911 A1	26 Nov 2015
		US 9899873 B2	20 Feb 2018
		US 2016099757 A1	07 Apr 2016
		US 9900057 B2	20 Feb 2018
		US 2016099612 A1	07 Apr 2016
		US 9906065 B2	27 Feb 2018
		US 2014008992 A1	09 Jan 2014
		US 9912199 B2	06 Mar 2018
		US 9917477 B1	13 Mar 2018
		US 9923386 B1	20 Mar 2018
		US 9935482 B1	03 Apr 2018
		US 9939864 B1	10 Apr 2018
		US 2015333572 A1	19 Nov 2015
		US 9941705 B2	10 Apr 2018
		US 9941707 B1	10 Apr 2018
		US 2016013678 A1	14 Jan 2016
		US 9941747 B2	10 Apr 2018
		US 2017077765 A1	16 Mar 2017
		US 9941752 B2	10 Apr 2018
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		US 2016099611 A1	07 Apr 2016
		US 9941754 B2	10 Apr 2018
		US 2017085120 A1	23 Mar 2017
		US 9948135 B2	17 Apr 2018
		US 9954374 B1	24 Apr 2018
		US 9965009 B1	08 May 2018
		US 9966765 B1	08 May 2018
		US 2015349574 A1	03 Dec 2015
		US 9966784 B2	08 May 2018
		US 9967743 B1	08 May 2018
		US 9973008 B1	15 May 2018
		US 2016099601 A1	07 Apr 2016
		US 9973021 B2	15 May 2018
		US 9979440 B1	22 May 2018
		US 9991741 B1	05 Jun 2018
		US 10003211 B1	19 Jun 2018
		US 2016054396 A1	25 Feb 2016
		US 10008889 B2	26 Jun 2018
		US 10014728 B1	03 Jul 2018
		US 2016183056 A1	23 Jun 2016
		US 10021523 B2	10 Jul 2018
		US 10038337 B1	31 Jul 2018
		US 10050462 B1	14 Aug 2018
		US 10056782 B1	21 Aug 2018
		US 10063064 B1	28 Aug 2018
		US 2016181854 A1	23 Jun 2016
		US 10063105 B2	28 Aug 2018
		US 2015340909 A1	26 Nov 2015
		US 10063106 B2	28 Aug 2018
		US 10075008 B1	11 Sep 2018
		US 2016099614 A1	07 Apr 2016
		US 10075017 B2	11 Sep 2018
		US 10090699 B1	02 Oct 2018
		US 10090886 B1	02 Oct 2018
		US 2016313240 A1	27 Oct 2016
		US 10094770 B2	09 Oct 2018
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		US 10103552 B1	16 Oct 2018
		US 2014009108 A1	09 Jan 2014
		US 10103582 B2	16 Oct 2018
		US 10116170 B1	30 Oct 2018
		US 2016191121 A1	30 Jun 2016
		US 10122415 B2	06 Nov 2018
		US 10124754 B1	13 Nov 2018
		US 2016013656 A1	14 Jan 2016
		US 10128693 B2	13 Nov 2018
		US 2014376646 A1	25 Dec 2014
		US 10128695 B2	13 Nov 2018
		US 2016204622 A1	14 Jul 2016
		US 10128699 B2	13 Nov 2018
		US 10134260 B1	20 Nov 2018
		US 2016099602 A1	07 Apr 2016
		US 10141768 B2	27 Nov 2018
		US 2015326068 A1	12 Nov 2015
		US 10141791 B2	27 Nov 2018
		US 10148097 B1	04 Dec 2018
		US 2016020616 A1	21 Jan 2016
		US 10148133 B2	04 Dec 2018
		US 10153645 B1	11 Dec 2018
		US 10153653 B1	11 Dec 2018
		US 2017179771 A1	22 Jun 2017
		US 10158257 B2	18 Dec 2018
		US 10170917 B1	01 Jan 2019
		US 2018131238 A1	10 May 2018
		US 10186911 B2	22 Jan 2019
		US 2016099609 A1	07 Apr 2016
		US 10186913 B2	22 Jan 2019
		US 10193396 B1	29 Jan 2019
		US 10199849 B1	05 Feb 2019
		US 2014357309 A1	04 Dec 2014
		US 10206185 B2	12 Feb 2019
		US 2015022009 A1	22 Jan 2015
		US 10211680 B2	19 Feb 2019
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		US 2015326051 A1	12 Nov 2015
		US 10211682 B2	19 Feb 2019
		US 10223717 B1	05 Mar 2019
		US 2015123483 A1	07 May 2015
		US 10224758 B2	05 Mar 2019
		US 10224982 B1	05 Mar 2019
		US 10230266 B1	12 Mar 2019
		US 10243414 B1	26 Mar 2019
		US 10263432 B1	16 Apr 2019
		US 2017110887 A1	20 Apr 2017
		US 10270261 B2	23 Apr 2019
		US 2017077764 A1	16 Mar 2017
		US 10291056 B2	14 May 2019
		US 10291066 B1	14 May 2019
		US 2018183494 A1	28 Jun 2018
		US 10291294 B2	14 May 2019
		US 2018205232 A1	19 Jul 2018
		US 10298024 B2	21 May 2019
		US 2018212523 A1	26 Jul 2018
		US 10298133 B2	21 May 2019
		US 2018159355 A1	07 Jun 2018
		US 10305315 B2	28 May 2019
		US 2017077736 A1	16 Mar 2017
		US 10312715 B2	04 Jun 2019
		US 2018212454 A1	26 Jul 2018
		US 10396588 B2	27 Aug 2019
		US 2018337534 A1	22 Nov 2018
		US 10396604 B2	27 Aug 2019
		US 2016054395 A1	25 Feb 2016
		US 10439448 B2	08 Oct 2019
		US 2018262014 A1	13 Sep 2018
		US 10483768 B2	19 Nov 2019
		US 2018159338 A1	07 Jun 2018
		US 10498144 B2	03 Dec 2019
		US 2019222070 A1	18 Jul 2019
		US 10516301 B2	24 Dec 2019
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		US 2019089203 A1	21 Mar 2019
		US 10523058 B2	31 Dec 2019
		US 2018254639 A1	06 Sep 2018
		US 10554052 B2	04 Feb 2020
		US 2017110888 A1	20 Apr 2017
		US 10778041 B2	15 Sep 2020
		US 2018375340 A1	27 Dec 2018
		US 10790674 B2	29 Sep 2020
		US 2019011356 A1	10 Jan 2019
		US 10816459 B2	27 Oct 2020
		US 2008212073 A1	04 Sep 2008
		US 2013302322 A1	14 Nov 2013
		US 2014008993 A1	09 Jan 2014
		US 2014354063 A1	04 Dec 2014
		US 2014354221 A1	04 Dec 2014
		US 2014368048 A1	18 Dec 2014
		US 2014368161 A1	18 Dec 2014
		US 2014375253 A1	25 Dec 2014
		US 2015001949 A1	01 Jan 2015
		US 2015015192 A1	15 Jan 2015
		US 2015022008 A1	22 Jan 2015
		US 2015022010 A1	22 Jan 2015
		US 2015028694 A1	29 Jan 2015
		US 2015041459 A1	12 Feb 2015
		US 2015042265 A1	12 Feb 2015
		US 2015076917 A1	19 Mar 2015
		US 2015076927 A1	19 Mar 2015
		US 2015077036 A1	19 Mar 2015
		US 2015077037 A1	19 Mar 2015
		US 2015102764 A1	16 Apr 2015
		US 2015102769 A1	16 Apr 2015
		US 2015130285 A1	14 May 2015
		US 2015155738 A1	04 Jun 2015
		US 2015162751 A1	11 Jun 2015
		US 2015222126 A1	06 Aug 2015
		US 2015270741 A1	24 Sep 2015
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		US 2015318729 A1	05 Nov 2015
		US 2015326024 A1	12 Nov 2015
		US 2015326026 A1	12 Nov 2015
		US 2015326070 A1	12 Nov 2015
		US 2015326072 A1	12 Nov 2015
		US 2015326143 A1	12 Nov 2015
		US 2015333528 A1	19 Nov 2015
		US 2015333573 A1	19 Nov 2015
		US 2015340903 A1	26 Nov 2015
		US 2016012695 A1	14 Jan 2016
		US 2016013677 A1	14 Jan 2016
		US 2016056635 A1	25 Feb 2016
		US 2016241044 A1	18 Aug 2016
		US 2016241045 A1	18 Aug 2016
		US 2016319028 A1	03 Nov 2016
		US 2018048178 A1	15 Feb 2018
		US 2018226840 A1	09 Aug 2018
		US 2018241255 A1	23 Aug 2018
		US 2019074728 A1	07 Mar 2019
		US 2019393928 A1	26 Dec 2019
		US 2020006988 A1	02 Jan 2020
		US 2020021128 A1	16 Jan 2020
		WO 2008101637 A2	28 Aug 2008
		WO 2014182768 A1	13 Nov 2014
		WO 2014182788 A2	13 Nov 2014
		WO 2014182826 A1	13 Nov 2014
		WO 2014197454 A1	11 Dec 2014
		WO 2014197472 A1	11 Dec 2014
		WO 2014197478 A1	11 Dec 2014
		WO 2014200857 A1	18 Dec 2014
		WO 2014204679 A1	24 Dec 2014
		WO 2014209586 A1	31 Dec 2014
		WO 2014209587 A1	31 Dec 2014
		WO 2014209588 A1	31 Dec 2014
		WO 2015002862 A1	08 Jan 2015
		WO 2015006103 A1	15 Jan 2015
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		WO 2015006106 A1	15 Jan 2015
		WO 2015006128 A1	15 Jan 2015
		WO 2015009885 A1	22 Jan 2015
		WO 2015009892 A1	22 Jan 2015
		WO 2015009896 A1	22 Jan 2015
		WO 2015013490 A1	29 Jan 2015
		WO 2015013505 A1	29 Jan 2015
		WO 2015020987 A1	12 Feb 2015
		WO 2015020988 A1	12 Feb 2015
		WO 2015020991 A1	12 Feb 2015
		WO 2015038573 A1	19 Mar 2015
		WO 2015038576 A1	19 Mar 2015
		WO 2015038618 A1	19 Mar 2015
		WO 2015038773 A1	19 Mar 2015
		WO 2015054137 A1	16 Apr 2015
		WO 2015054150 A1	16 Apr 2015
		WO 2015054478 A1	16 Apr 2015
		WO 2015066031 A1	07 May 2015
		WO 2015066046 A1	07 May 2015
		WO 2015069498 A1	14 May 2015
		WO 2015084912 A1	11 Jun 2015
		WO 2015088875 A1	18 Jun 2015
		WO 2015088877 A1	18 Jun 2015
		WO 2016106259 A1	30 Jun 2016
		WO 2016106260 A1	30 Jun 2016
		WO 2016106261 A1	30 Jun 2016
		WO 2016106262 A1	30 Jun 2016
		WO 2016106263 A1	30 Jun 2016
		WO 2016106264 A1	30 Jun 2016
		WO 2016109311 A1	07 Jul 2016
		WO 2016109312 A1	07 Jul 2016
		WO 2016109313 A1	07 Jul 2016
		WO 2016109314 A2	07 Jul 2016
		WO 2016109315 A1	07 Jul 2016
		WO 2016109316 A1	07 Jul 2016
		WO 2016109318 A1	07 Jul 2016
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			

INTERNATIONAL SEARCH REPORT		International application No.	
Information on patent family members		PCT/IB2020/060595	
This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.			
Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
EP 3496231 A1	12 June 2019	WO 2016109324 A1	07 Jul 2016
		WO 2016109327 A1	07 Jul 2016
		WO 2017112923 A1	29 Jun 2017
		WO 2017112942 A1	29 Jun 2017
		WO 2017117452 A1	06 Jul 2017
		EP 3496231 A1	12 Jun 2019
		EP 3496231 B1	19 Aug 2020
		KR 20180031188 A	28 Mar 2018
		US 2019372399 A1	05 Dec 2019
		WO 2018052177 A1	22 Mar 2018
WO 2014/194061 A2	04 December 2014	WO 2014194061 A2	04 Dec 2014
		US 2014354064 A1	04 Dec 2014
End of Annex			
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.			