



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : C11D 1/14, 1/22, 3/20, 7/08, C23G 1/02</p>	A1	<p>(11) International Publication Number: <b>WO 97/06228</b></p> <p>(43) International Publication Date: 20 February 1997 (20.02.97)</p>
<p>(21) International Application Number: PCT/US96/12685</p> <p>(22) International Filing Date: 2 August 1996 (02.08.96)</p> <p>(30) Priority Data: 95870097.3 9 August 1995 (09.08.95) EP (34) Countries for which the regional or international application was filed: BE et al.</p> <p>(71) Applicant (for all designated States except US): THE PROCTER &amp; GAMBLE COMPANY [US/US]; One Procter &amp; Gamble Plaza, Cincinnati, OH 45202 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): RAPISARDA, Dario [IT/IT]; Viale G. Marconi, 451, I-Rome (IT). VOS, Eddy [BE/BE]; Koetsierweg 15, B-3210 Linden (BE).</p> <p>(74) Agents: REED, T., David et al.; The Procter &amp; Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	
<p>(54) Title: ACIDIC CLEANING COMPOSITIONS</p> <p>(57) Abstract</p> <p>Compositions are described which are aqueous cleaning compositions for removing limescale on hard surfaces which comprise maleic acid, an acid which has a first pKa not exceeding 5, or mixtures thereof, and an acid-stable thickener. Said compositions exhibit improved limescale removal performance and improved surface safety when used to treat hard surfaces. Said compositions are particularly suitable to be used for removing limescale in large appliances like automatic dish washers and washing machines.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Larvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## Acidic cleaning compositions

5

10

### Technical field

15 The present invention relates to aqueous acidic liquid  
cleaning compositions. More specifically, acidic  
compositions are described which give optimal performance  
in removing limescale stains and encrustations while  
ensuring appropriate surface safety. The compositions  
20 herein may be used on a variety of surfaces, ranging from  
bathrooms, toilets and kitchen surfaces to various  
appliances like automatic dish washers and washing  
machines.

25

### Background

Tap water contains a certain amount of solubilized ions  
which upon water evaporation eventually deposit as salts  
30 such as calcium carbonate on surfaces which are often in  
contact with said water, resulting in an anaesthetic  
aspect of said surfaces. This limescale formation and  
deposition phenomenon is even more acute in places where  
water is particularly hard.

35

It is well known in the art that limescale can be removed  
chemically with acidic solutions, and a great variety of

acidic cleaning compositions have been described for this purpose.

5 However, in many instances acidic compositions may cause the problem that they present hazards to the surfaces treated therewith. Indeed the acids which are used in acidic compositions, such as phosphoric acid and the like can damage the surfaces being treated. In particular, some corrosion/staining may occur when metal surfaces  
10 such as aluminium, chromed steel or stainless steel are treated with such acids.

It is therefore an object of the present invention to obviate this issue in providing a cleaning composition  
15 possessing excellent limescale removing capacity while being safe to the surfaces treated therewith.

It is also desirable to formulate a composition particularly suitable to remove limescale in large  
20 appliances like automatic dish washers and washing machines. Indeed, limescale deposits in said appliances may build-up on the heater element making heat exchange more difficult. In other words, limescale deposits in said appliances are undesirable not only because they  
25 result in an anaesthetic aspect but also as said limescale deposits may result in higher consumption of energy, poorer machine performance and eventually malfunction.

30 It is thus a further object of the present invention to formulate a cleaning composition suitable to be used for removing limescale in large appliances, said composition possessing excellent limescale removing capacity while being safe to the surfaces treated therewith, especially  
35 metal surfaces like heating elements, walls, bottom and any inner part.

It has now been found that the above objects are met by formulating liquid compositions comprising an acid-stable thickener and a specific acidic system, i.e. maleic acid and a second acid which has a first pKa not exceeding 5, or mixtures thereof. Indeed it has been found that the compositions of the present invention comprising maleic acid, said second acid and said acid-stable thickener are significantly safer to the surfaces treated therewith, than the same compositions without said acid-stable thickener, while being also particularly effective in removing limescale. In other words, the use of acid-stable thickeners in an aqueous acidic liquid composition comprising maleic acid and said second acid improves surface safety of the surfaces treated with said composition. Furthermore, it has been found, in the broadest aspect of the present invention, that the use of an acid-stable thickener, in an aqueous acidic liquid composition comprising maleic acid improves limescale removing performance.

An advantage of the aqueous acidic liquid compositions of the present invention particularly suitable for removing limescale in large appliances such as automatic dish washers and/or washing machines is that said compositions provide excellent limescale removal on different types of limescale deposition present in said automatic dish washers and/or washing machines, e.g. on the severe limescale deposits which build up on the warm parts such as the heating element as well as on homogeneous lighter deposits which build up on the extended surfaces like the walls. The aqueous acidic liquid compositions according to the present invention allow to obtain better limescale removing performance at lower total acid level as compared to the powder/granular limescale removal compositions available on the market. Another advantage is that the aqueous acidic liquid compositions according

to the present invention allow to prevent tough limescale encrustations build-up that provokes higher energy consumption, less washing effectiveness and possible damages to the machines.

5

A further advantage of this invention is that said compositions are safe to different hard-surfaces including metal surfaces such as aluminium, chromed steel or stainless steel as well as synthetic materials such as rubber hoses, plastic trays and polymeric connections that are for example found in large appliances.

10

EP-A-0 496 188 discloses a composition comprising nonionic surfactants together with maleic acid whereby good limescale removal is provided. Although EP-A-0 496 188 discloses thickeners in general as an optional ingredient, no levels are disclosed.

15

EP-A-601 990 discloses a self thickened acidic composition having a viscosity of 10 cps to 700 cps at 60 rpm shear rate at 20°C and comprising an organic acid or mixtures thereof, preferably maleic acid and a thickening system comprising from 0.5% to 15% by weight of the total composition of a mixture of a nonionic surfactant and a cationic surfactant. More particularly, EP-A-601 990 discloses compositions which are thickened without the use of a thickener compound.

20

25

US-5 232 632 discloses foam liquid hard surface detergent compositions, suitable to be packed in a non-aerosol spray delivery package, comprising a mixture of zwitterionic and nonionic surfactants, a hydrophobic solvent, a polycarboxylate detergent builder and a polymeric shear thinning thickener such as xanthum gum. Preferred compositions have a pH of from 1 to 5.5, however no maleic acid is disclosed.

30

35

US-4 891 150 discloses thickened acidic cleansing and descaling compositions. Thickening is obtained by adding different surfactants or mixtures thereof. Pure thickeners such as xanthum gum are mentioned as not being  
5 suitable to be used in the acidic compositions disclosed in US 4 891 150. No maleic acid is disclosed.

GB-A-2 106 927 discloses toilet bowl cleaners which have a pH between 2.2 and 3.5 and comprise a non-volatile  
10 water soluble organic acid such as dicarboxylic acids having from 2 to 3 carbon atoms, a detergent and a cellulose ether thickener, preferably methyl hydroxypropyl cellulose at levels of from 0.5% to 1.2% by weight of the total composition. GB 2 106 927 teaches  
15 away from the use of maleic acid. Indeed it is mentioned in it that maleic acid was not screened for its solubility because of its inherent toxicity.

WO 95/07957 discloses acidic cleansing compositions for  
20 cleaning hard surfaces, said compositions being particularly suitable to be applied thereto by means of spray-type dispensers. Said compositions comprise a strong acid alone or in combination with a weak acid, a surfactant and a thickening amount of an organic polymer  
25 thickener such as xanthum gum. Maleic acid and sulphamic acid are mentioned amongst the weak acids and sulphuric acid is mentioned amongst the strong acids. However no levels for the weak organic acids are disclosed in the description and no example discloses  
30 maleic acid.

EP-A-411 708 discloses an acidic aqueous liquid composition comprising a detergent, an organic acid having 2 to 10 carbon atoms, an aminoalkylenephosphonic  
35 and phosphoric acid. Indeed the addition of an aminoalkylenephosphonic and phosphoric acid on top of mixtures of acids likes succinic, glutaric and adipic

acid, improves the safety of the acidic compositions for use on enamel surfaces. The compositions therein are microemulsions which may be thickened by the addition of a thickener such as alkyl cellulose. However the acidic system of the present invention comprising maleic acid at a given level and a second acid which has a first pKa not exceeding 5 is nowhere disclosed in EP-A-411 708.

None of the above mentioned prior art documents discloses the compositions of the present invention whereby improved limescale removal performance and improved safety to the surfaces treated therewith is achieved. Also none of the above mentioned prior art documents discloses the use of a thickened aqueous acidic liquid composition comprising maleic acid and a second acid which has a first pKa not exceeding 5, or mixtures thereof, for removing limescale in large appliances like automatic dish-washers and/or washing machines.

20

#### Summary of the invention

The present invention is an aqueous acidic liquid cleaning composition suitable for removing limescale deposits from hard-surfaces, having a pH below 2 and comprising from 0.05% to 45% by weight of the total composition of maleic acid, a second acid which has a first pKa not exceeding 5 and from 0.01% to 5% by weight of the total composition of an acid-stable thickener.

30

The present invention further encompasses a process of treating hard-surfaces, wherein a composition according to the present invention, is applied in its neat form or in a diluted form, onto said surfaces, then left to act onto said surfaces and then removed by rinsing.

35



The present invention also encompasses the use of a thickened aqueous acidic liquid composition comprising maleic acid and a second acid which has a first pKa not exceeding 5, or mixtures thereof, for removing limescale  
5 in automatic dish washers and/or washing machines.

The present invention also encompasses the use of an acid-stable thickener, in an aqueous acidic liquid composition comprising maleic acid and a second acid  
10 which has a first pKa not exceeding 5 to improve surface safety of the surfaces treated therewith.

The present invention yet encompasses the use of an acid-stable thickener, in an aqueous acidic liquid composition  
15 comprising maleic acid to improve limescale removing performance.

#### Detailed description of the invention


20 The compositions according to the present invention are designed for removing limescale or soils comprising limescale as an essential component. Thus the compositions according to the present invention comprise  
25 maleic acid as an essential ingredient. The compositions according to the present invention comprise from 0.01% to 45% by weight of the total composition of maleic acid, preferably from 1% to 25% and more preferably from 6% to 20%. This percentage is calculated on the basis of the  
30 molecular weight of the acid form, but maleic anhydride is equally convenient for use in the compositions according to the present invention. Indeed maleic anhydride is generally cheaper and it is transformed into the acid form when incorporated in an aqueous medium.

35

The compositions of the present invention further comprise as an essential ingredient a second acid which has a first pKa not exceeding 5, or mixtures thereof. Said second acid is desired to strengthen the limescale removal performance. Preferably the second acids to be used herein which are particularly efficient to remove limescale on many surfaces, have their first pKa not exceeding 4, more preferably not exceeding 3, and most preferably not exceeding 2. According to the present invention said acids can be organic or inorganic acids. Examples of inorganic acids are sulphonic acid derivatives, sulphamic acid (pKa=0.1), hydrochloric acid (pKa<0), nitric acid (pKa<0), phosphoric acid (pKa=2.1) and sulphuric acid (pKa=0.4). An example of organic acid is citric acid (pKa=3.06). Particularly suitable to be used herein are sulphonic acid derivatives including alkyl sulphonic acids and aryl sulphonic acids.

Suitable alkyl sulphonic acids for use herein are C1-C6 linear or branched alkylsulphonic acids or mixtures thereof, such as methanesulphonic acid (pKa=1.9) commercially available for example from Aldrich, William Blythe & Co. Ltd. or Elf. Atochem.

Suitable aryl sulphonic acids for use herein are according to the formula :

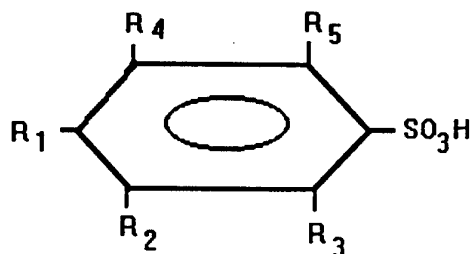

wherein  $R_1$ ,  $R_2$ ,  $R_3$ ,  $R_4$  and  $R_5$  are each H or  $SO_3H$ , or linear or branched  $C_0$ - $C_4$  alkyl chain; or mixtures thereof.

5 Preferred arylsulphonic acids to be used according to the present invention are those which comprise no or only one alkyl chain. Indeed, we have found that said arylsulphonic acids are particularly effective at removing limescale, which is not the case for their  
10 longer alkyl chain homologues. Also we have found that said arylsulphonic acids are particularly safe to the surface treated therewith. Particularly suitable arylsulphonic acids for use herein are benzene sulphonic acid ( $pK_a=0.7$ ), toluene sulphonic acid and cumene  
15 sulphonic acid. Amongst these three, at equal weight %, we have found that the shorter the alkyl chain, down to no chain at all, the better the limescale removing performance.

20 Preferred acids having a first  $pK_a$  not exceeding 5 to be used herein are sulphamic acid, sulphuric acid, aryl sulphonic acids, alkyl sulphonic acids, or mixtures thereof, more preferred are sulphamic acid, sulphuric acid, benzene sulphonic acid or mixtures thereof and  
25 highly preferred is benzene sulphonic acid. Indeed, benzene sulphonic acid is the most preferred acid which has a first  $pK_a$  not exceeding 5 to be used herein, as it has been found to be significantly safer for the surfaces treated than the other acids which have a first  $pK_a$  not  
30 exceeding 5, whilst maintaining the advantage in limescale removal performance of said acids.

The compositions of the present invention comprise from 0.1% to 20% by weight of the total composition of a  
35 second acid which has a first  $pK_a$  not exceeding 5, or mixtures thereof, preferably from 0.1% to 10% and more preferably from 0.1% to 7%.

The acidic system of the present invention comprising maleic acid and a second acid which has a first pKa not exceeding 5, or mixtures thereof, has been found to provide excellent limescale removal performance and improved surface safety as compared to the same acidic system without maleic acid, this at a given contact time. More particularly the weight ratio of maleic acid to said second acid is such that the surface safety is improved. Accordingly the weight ratio of maleic to said second acid which has a first pKa not exceeding 5, is greater than 3, preferably is from 3 to 50 and more preferably from 3 to 25. Said ratio is dependent on the specific second acid used and thus is different for each second acid or mixtures thereof used.

The compositions according to the present invention further comprise an acid-stable thickener as an essential ingredient. By "acid-stable thickener" it is meant herein any thickener which allows when stored in acidic medium in rapid aging test (RAT) at 50°C for 10 days that said acidic medium does not lose more than 50% of its initial viscosity and does not separate from said medium.

The acid-stable thickeners to be used herein can be any acid-stable thickener known in the art to thicken liquid compositions and especially aqueous compositions. Acid-stable thickeners are desired in the compositions of the present invention as they allow to formulate thickened compositions at low total thickening compound level, as compared for example to the level of acid-stable thickening surfactant systems which would be required in absence of said acid-stable thickeners to get the same viscosity.

Particularly preferred acid-stable thickeners to be used herein include synthetic thickeners such as polyurethanes

or co-polyacrilates or polyacrilamides, polysaccharide thickeners such as substituted cellulose materials or carboxymethylcellulose or hydroxymethylcellulose and naturally occurring thickeners like xanthum gum or derivatives thereof, or mixtures thereof.

Particularly suitable acid-stable thickeners to be used herein are polysaccharide thickeners such as xanthum gum and derivatives thereof. Xanthum gum and derivatives thereof may be commercially available for instance from Kelco under the trade name Keltrol RD®, Kelzan S® or Kelzan T®.

Xanthum gum or derivatives thereof are preferred to be used herein as they are physically and chemically stable in the acidic conditions of the compositions of the present invention, this even at pH below 1.5. Also the acidic liquid compositions of the present invention are chemically stable, i.e. there is virtually no chemical changes of the different ingredients due to reaction between different ingredients, and physically stable, i.e. that no phase separation occurs when stored in rapid aging test (RAT) at 50 °C for 10 days.

The compositions according to the present invention comprise from 0.05% to 5% by weight of the total composition of an acid-stable thickener, or mixtures thereof, preferably from 0.05% to 1% by weight, more preferably from 0.05% to 0.8% and most preferably from 0.1% to 0.7%.

Accordingly, the compositions according to the present invention have a viscosity of from 30 cps to 1500 cps at 20°C, preferably of from 40 cps to 800 cps and more preferably of from 100 cps to 600 cps, when measured with a Carri-med rheometer CLS 100 at 7.5 rpm.

It has now been found that the compositions of the present invention comprising maleic acid, a second acid which has a first pKa not exceeding 5 and an acid-stable thickener exhibit improved surface safety to the surface treated therewith as compared to the same compositions without any acid-stable thickener. This surface safety benefit is even more noticeable when the second acid which has a first pKa not exceeding 5 is present at high levels, e.g., more than 3% by weight of the total composition. Thus an aspect of the present invention is the use of an acid-stable thickener, in an aqueous acidic liquid composition comprising maleic acid and a second acid which has a first pKa not exceeding 5 to improve surface safety of the surfaces treated therewith.

By "surface safety improvement" it is to be understood that less damage to the surface treated is observed with the compositions of the present invention compared to the same compositions without any acid-stable thickener, this at a given time of contact. A method suitable for measuring surface safety is a visual grading method mentioned hereinafter in the examples.

It has also been observed that the compositions of the present invention comprising maleic acid, a second acid which has a first pKa not exceeding 5 and an acid-stable thickener exhibit improved limescale removal properties as compared to the same compositions but without such acid-stable thickener, this when applied neat onto the surfaces treated, i.e. per se in a liquid form, and especially when applied in the form of a spray. It has further been observed that the addition of an acid-stable thickener, or mixtures thereof, improves limescale removal performance of an aqueous acidic liquid composition, even in the absence of said second acid. Thus another aspect of the present invention is the use of an acid-stable thickener, in an aqueous acidic liquid

composition comprising maleic acid to improve limescale removing performance.

Improved limescale removing performance has been observed  
5 for different types of limescale stains, including the  
kitchen-type stains and the bathroom-type stains, i.e.  
for stains which contain not only calcium carbonate but  
also soap scum and/or grease. Also excellent limescale  
performance has been observed when used under diluted  
10 conditions. Accordingly the compositions of the present  
invention are particularly suitable for removing  
limescale in large appliances like automatic dish washers  
and/or washing machines.

15 A further advantage with a composition according to the  
present invention suitable to be used for removing  
limescale in an automatic washer and/or washing machine  
is that when dispensed onto the interior walls of said  
washer/machine the drainage of said composition to the  
20 bottom of said washer/machine is slowed down, thereby  
avoiding that said composition is evacuated from the  
interior of said washer/machine before the washing cycle  
starts, or stays in dead corners of said washer/machine  
during the washing cycle (e.g., parts of a washing  
25 machine that are not involved in the washing process like  
the drainage hose before the pump in washing machines).  
Accordingly the compositions of the present invention  
when used for descaling large appliances allow a further  
descaling action during the washing cycle and very simple  
30 usage instructions, without the need to open the  
washer/machine after the cycle has started and without  
the need of a specifically designed package execution for  
controlled/delayed delivering of the composition.  
Indeed, the composition is applied neat directly on the  
35 interior surfaces of said washer/machine where it starts  
its descaling action and continues said descaling action

during the washing cycle before being finally removed by rinsing which occurs at the end of the washing cycle.

5 The compositions according to the present invention have a pH below 2, preferably of from 0 to 1.5 and more preferably of from 0.3 to 1.

10 The compositions according to the present invention may further comprise optional ingredients such as a surfactant or mixtures thereof. Preferably the compositions according to the present invention comprise up to 30% by weight of the total composition of said surfactant or mixtures thereof, more preferably from 0.05% to 10%, more preferably from 0.1% to 8% and most  
15 preferably from 0.1% to 3%. All types of surfactants may be used in the present invention including nonionic, anionic, cationic, amphoteric or zwitterionic surfactants. It is also possible to use mixtures of such surfactants without departing from the spirit of the  
20 present invention.

Suitable nonionic surfactants to be used herein are alkoxyated alcohol nonionic surfactants which can be readily made by condensation processes which are well  
25 known in the art. However, a great variety of such alkoxyated alcohols, especially ethoxyated and/or propoxyated alcohols is also conveniently commercially available. Surfactants catalogs are available which list a number of surfactants, including nonionics.

30 Accordingly, preferred alkoxyated alcohols for use herein are nonionic surfactants according to the formula  $RO(E)e(P)pH$  where R is a hydrocarbon chain of from 2 to 24 carbon atoms, E is ethylene oxide and P is propylene  
35 oxide, and e and p which represent the average degree of, respectively ethoxylation and propoxylation, are of from 0 to 24. The hydrophobic moiety of the nonionic compound



can be a primary or secondary, straight or branched alcohol having from 8 to 24 carbon atoms. Preferred nonionic surfactants for use in the compositions according to the invention are the condensation products of ethylene oxide with alcohols having a straight alkyl chain, having from 6 to 22 carbon atoms, wherein the degree of ethoxylation is from 1 to 15, preferably from 5 to 12. Such suitable nonionic surfactants are commercially available from Shell, for instance, under the trade name Dobanol<sup>R</sup> or from Shell under the trade name Lutensol<sup>R</sup>. These nonionics are preferred because they have been found to allow the formulation of a stable product without requiring the addition of stabilisers or hydrotopes. When using other nonionics, it may be necessary to add hydrotopes such as cumene sulphonate or solvents such as butyldiglycolether.

Suitable anionic surfactants for use herein are according to the formula  $R_1SO_3M$  wherein  $R_1$  represents a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 24 carbon atoms and alkyl phenyl radicals containing from 6 to 15 carbon atoms in the alkyl group. M is a salt forming cation which typically is selected from the group consisting of sodium, potassium, ammonium, and mixtures thereof.

Other suitable anionic surfactants can be represented by the water-soluble salts of an alkyl sulfate or an alkyl polyethoxylate ether sulfate wherein the alkyl group contains from 6 to 24 carbon atoms, and preferably from 1 to 30 ethoxy groups for the alkyl polyethoxylate ether sulfates.

Suitable cationic surfactants to be used herein include derivatives of quaternary ammonium, phosphonium, imidazolium and sulfonium compounds. Preferred cationic

surfactants for use herein are according to the formula  $R_1R_2R_3R_4N^+ X^-$ , wherein X is a counteranion,  $R_1$  is a  $C_8$ - $C_{20}$  hydrocarbon chain and  $R_2$ ,  $R_3$  and  $R_4$  are independently selected from H or  $C_1$ - $C_4$  hydrocarbon chains. In a preferred embodiment of the present invention,  $R_1$  is a  $C_{12}$ - $C_{18}$  hydrocarbon chain, most preferably  $C_{14}$ ,  $C_{16}$  or  $C_{18}$ , and  $R_2$ ,  $R_3$  and  $R_4$  are all three methyl, and X is halogen, preferably bromide or chloride, most preferably bromide. Examples of cationic surfactants are stearyl trimethyl ammonium bromide (STAB), cetyl trimethyl ammonium bromide (CTAB) and myristyl trimethyl ammonium bromide (MTAB).

Suitable zwitterionic surfactants contain both cationic and anionic hydrophilic groups on the same molecule at a relatively wide range of pH's. The typical cationic group is a quaternary ammonium group, although other positively charged groups like phosphonium, imidazolium and sulfonium groups can be used. The typical anionic hydrophilic groups are carboxylates and sulfonates, although other groups like sulfates, phosphonates, and the like can be used. A generic formula for some preferred zwitterionic surfactants is




wherein  $R_1$  is a hydrophobic group;  $R_2$  and  $R_3$  are each  $C_1$ - $C_4$  alkyl, hydroxy alkyl or other substituted alkyl group which can also be joined to form ring structures with the N;  $R_4$  is a moiety joining the cationic nitrogen atom to the hydrophilic group and is typically an alkylene, hydroxy alkylene, or polyalkoxy group containing from 1 to 4 carbon atoms; and X is the hydrophilic group which is preferably a carboxylate or sulfonate group. Preferred hydrophobic groups  $R_1$  are alkyl groups containing from 8 to 22, preferably less than 18, more preferably less than 16 carbon atoms. The hydrophobic

group can contain unsaturation and/or substituents and/or linking groups such as aryl groups, amido groups, ester groups and the like. In general, the simple alkyl groups are preferred for cost and stability reasons.

5

Other specific zwitterionic surfactants have the generic formulas:



wherein each  $R_1$  is a hydrocarbon, e.g. an alkyl group containing from 8 up to 20, preferably up to 18, more preferably up to 16 carbon atoms, each  $R_2$  is either a  
 15 hydrogen (when attached to the amido nitrogen), short chain alkyl or substituted alkyl containing from one to 4 carbon atoms, preferably groups selected from the group consisting of methyl, ethyl, propyl, hydroxy substituted ethyl or propyl and mixtures thereof, preferably methyl,  
 20 each  $R_3$  is selected from the group consisting of hydrogen and hydroxy groups and each  $n$  is a number from 1 to 4, preferably from 2 to 3, more preferably 3, with no more than one hydroxy group in any  $(C(R_3)_2)$  moiety. The  $R_1$  groups can be branched and/or unsaturated. The  $R_2$  groups  
 25 can also be connected to form ring structures. A surfactant of this type is a  $C_{10}$ - $C_{14}$  fatty acylamidopropylene(hydroxypropylene)sulfobetaine that is available from the Sherex Company under the trade name "Varion CAS sulfobetaine"®.

30

Suitable amphoteric surfactants are surfactants which are similar to the zwitterionic surfactants but without the quaternary group. However, they contain an amine group that is protonated at the low pH of the composition to  
 35 form cationic group and they may also possess an anionic group at these pHs.

The compositions according to the present invention are aqueous. Accordingly, the compositions according to the present invention comprise from 10% to 95% by weight of the total composition of water, preferably from 50% to 90%, most preferably from 70% to 85%.

The compositions according to the present invention may further comprise a variety of other ingredients including perfumes, colorants, bactericide, dyes, chelants, pigments, solvents, stabilizers, corrosion inhibitors and the like.

The compositions according to the present invention are particularly suitable for treating hard-surfaces including metal surfaces which can be found in a kitchen or in a bathroom. Indeed, the compositions of the present invention exhibit good limescale removing properties for both the kitchen-type stains and the bathroom-type stains, i.e. for stains which contain not only calcium carbonate but also soap scum and/or grease.

Accordingly, the present invention encompasses a process of treating hard-surfaces wherein an aqueous acidic liquid composition according to the present invention is applied in its neat form or in diluted form, onto said surfaces, then left to act onto said surfaces and then removed by rinsing. Said process can be used both for treating metal surfaces found in bathrooms, kitchens or appliances.

The expression "used in diluted form" herein includes dilution by the user. Typical dilution levels are of from 0.5% to 50% by weight of the composition.

The expression "treating" includes removing limescale deposits while being safe to the surfaces treated as well

as washing when the compositions according to the present invention further comprise surfactants.

5 The compositions according to the present invention are also particularly suitable for treating hard-surfaces including metal surfaces which can be found in large appliances such as automatic dish washers and/or washing machines. It has now been found that thickened aqueous acidic liquid compositions comprising maleic acid and a  
10 second acid which has a first pKa not exceeding 5 are particularly suitable for descaling large appliances. Thus a broader aspect of the present invention is the use of thickened aqueous acidic liquid compositions comprising maleic acid and a second acid which has a  
15 first pKa not exceeding 5 for removing limescale in automatic dish washers and/or washing machines. Said thickened compositions have a viscosity as already defined herein before.

20 The performance and rheological behaviour of said thickened compositions are adapted to the dishwasher and washing machine cycle and allow maximum performance with an usage procedure that does not impact on consumer habits (e.g. no need to open the machine after the  
25 washing cycle has started) and without the need of specifically designed package execution for delayed controlled release of the compositions. Indeed said thickened compositions may be applied directly on the limescale deposits present in the dishwasher and/or  
30 washing machine, thereby performing their action before the washing cycle and during said washing cycle once said dishwasher and/or washing machine has been switched on.

35 Accordingly the present invention further encompasses a process for removing limescale in a large appliance like an automatic dish washer and/or a washing machine, wherein a thickened aqueous acidic liquid composition

comprising maleic acid and a second acid which has a first pKa not exceeding 5, or mixtures thereof, is dispensed onto the surfaces to be treated in its neat form, then left to act onto said surfaces, preferably  
5 during 2 minutes to 20 minutes and more preferably during 5 minutes to 10 minutes, before said appliance (washer/machine) is switched on. In this latter stage said washer and/or machine undergoes a washing cycle which allow to complete the descaling action and finally  
10 removes said composition by rinsing.

By "to switch on" it is to understood herein that said washer and/or machine undergoes a washing cycle without prewash. It is to understood also that said washing  
15 cycle is conducted without the addition of any detergent and in so called empty conditions, i.e. without charge (free of clothes or free of dishes).

The compositions to be used in the application of treating large appliances preferably contain low levels  
20 of surfactants if present, preferably below 1% by weight of the total composition and more preferably from 0.1% to 0.9%. In the application of treating large appliances it is preferred to use the cationic surfactants described  
25 hereinbefore as the surfactant, if surfactants are present.

The compositions according to the present invention have been found to provide excellent limescale removal  
30 performance under usage conditions of large appliances, i.e. said compositions can be used diluted and in hot conditions (up to 90 °C).

The compositions according to the present invention are  
35 also particularly suitable to be applied to the surfaces to be treated by means of a spray-type dispenser while being safe both to the user and to the surfaces treated

therewith. Accordingly the compositions according to the present invention are easy to handle in a safe way. Indeed, the addition of an acid-stable thickener such as xanthum gum which is a shear thinning thickener in an acidic aqueous liquid composition also allows to prevent the inhalation by the user of said acidic composition when sprayed via spray-type dispenser and thus avoid any potential health issue due to the presence of acids in said acidic liquid composition. Thus another aspect of the present invention is an acidic composition packaged in a spray-type dispenser, said acidic liquid composition comprising from 0.01% to 45% by weight of the total composition of maleic acid, a second acid which has a first pKa not exceeding 5, and an acid-stable shear thinning thickener.

Another advantage of the present invention is that the acidic liquid cleaning compositions of the present invention comprising an acid-stable thickener such as xanthum gum which is a shear thinning thickener may be easily dispensed onto the surface to be treated via a spray-type dispenser such as for instance a trigger-sprayer. Indeed, said compositions result in a shear thinning behaviour for ease of dispensing, i.e. said compositions are thinner at higher shear rates. Thus said compositions pass easily through the pumping mechanism of a spray-type dispenser where the shear rate is high and immediately after recover their thickened character when reaching the surface to be treated and adhere thereto. Also, the life time of a spray-type dispenser head is extended, i.e. the shear thinning behaviour of said compositions prevents clogging of said head.

Suitable spray-type dispensers to be used according to the present invention include manually operated foam trigger-type dispensers sold for example by Specialty Packaging Products, Inc. or Continental Sprayers, Inc.

These types of dispensers are disclosed, for instance, in US-4,701,311 to Dunning et al. and US-4,646,973 and US-4,538,745 both to Focarracci. Particularly preferred to be used herein are spray-type dispensers such as T 8500®  
5 commercially available from Continental Spray International or T 8100® commercially available from Canyon, Northern Ireland. In such a dispenser the liquid composition is divided in fine liquid droplets resulting in a spray that is directed onto the surface to be  
10 treated. Indeed, in such a spray-type dispenser the composition contained in the body of said dispenser is directed through the spray-type dispenser head via energy communicated to a pumping mechanism by the user as said user activates said pumping mechanism. More particularly,  
15 in said spray-type dispenser head the composition is forced against an obstacle, e.g. a grid or a cone or the like, thereby providing shocks to help atomise the liquid composition, i.e. to help the formation of liquid droplets.

20

A further advantage of the present invention is that the acidic liquid cleaning compositions of the present invention may be applied uniformly to a relatively large area of a surface to be treated via a spray-type  
25 dispenser, thereby ensuring improved cleaning performance, especially on encrusted soils.

Yet another advantage of the present invention is that also eye irritation and/or damage is prevented when  
30 spraying an acidic liquid cleaning composition according to the present invention.

The present invention is further illustrated by the following experimental data and examples.

35



1) Experimental data

The following compositions were made by mixing the listed ingredients in the listed proportions (weight % unless otherwise specified).

Compositions	I	II	III	IV	V
10 Maleic acid	16	16	18	16	18
Benzenesulphonic acid	2	--	--	--	--
Sulphamic acid	--	2	--	2	--
Kelzan T®	0.3	0.3	0.3	--	--
Water and minors	-----up to 100%-----				
15 Viscosity (cps) at 7.5 1/sec	180	180	180	<10	<10
Surface safety	B	B	--	Ref.	--
20 limescale removal performance	B	B	B	Ref.	W

25

Compositions I and II are representative of the compositions of the present invention they comprise maleic acid, a second acid which has a first pKa not exceeding 5 and an acid-stable thickener, i.e. xanthum gum commercially available from KELCO. Composition III is also representative of the present invention and comprises maleic acid as the acid and an acid stable thickener. Composition IV comprises maleic acid, a second acid which has a first pKa not exceeding 5 and is free of an acid-stable thickener. Composition V comprises maleic acid and is free of an acid-stable thickener.

35

The following test were carried out:

5 The surface safety test:

The surface safety test method was conducted on an aluminium surface. Similar aluminium bars were dipped into the tested compositions I, II and IV and left soak for 4 hours at room temperature (25°). At the end of the exposure time, the surfaces were rinsed with soft water and wiped dry. The comparison between the surfaces treated with the different compositions mentioned herein before was done visually. The surface treated with Composition IV was taken as a reference and compared to the surfaces treated with compositions I and II.

B (better) = less surface damage as compared to reference.

20 Limescale removing test:

The limescale removal tests have been conducted measuring the weight loss of a marble block (6 +/- 0.2 gr.). Compositions I, II, III and V were compared to composition IV, taken as a reference. B (better) stands for more weight loss of the marble block as compared to the reference. W (worse) stands for less weight loss of the marble block as compared to the reference.

3 ml. of each of the compositions I to V was applied with a pipette on blocks put on a 90° (i.e. vertical) plan and left act for 10 minutes. After this the compositions were rinsed and the process was repeated three times.

35 The above results show that the compositions of the present invention when used to treat hard-surfaces such as metal surfaces exhibit improved surface safety to the

surfaces treated therewith as well as improved limescale removal performance (see compositions I and II versus IV). Accordingly the compositions of the present invention have been found to be particularly suitable for cleaning large appliances like automatic dish washers and/or washing machines. The above results also demonstrate that the use of an acid-stable thickener in an acidic composition comprising maleic acid alone or in combination with a second acid improves the limescale removal performance of said composition (see composition II versus composition IV and composition III versus composition V).

2) Examples

Further examples of compositions according to the present invention are the following. These compositions are made comprising the listed ingredients in the listed proportions (weight %).

		<u>Compositions</u>					
<u>Ingredients:</u> (% by weight)		1	2	3	4	5	6
Maleic acid		16	8	20	16	16	14
30 Benzenesulphonic acid		2	2	2	2	/	2
Sulphamic acid		1	/	/	1	/	1
Sulphuric acid		/	/	/	/	2	/
Xanthum gum		0.3	0.5	0.8	0.6	0.3	0.3
35 Waters & Minors		----- up to 100 -----					
Viscosity (cps)		180	320	950	480	180	180


at 7.5 l/sec

Compositions 1 to 6 were found to provide excellent  
limescale removal performance as well as excellent  
5 surface safety to the surfaces treated therewith.  
Furthermore, said compositions were found to be  
particularly suitable for descaling large appliances like  
automatic dish washers and washing machines. Finally when  
applied on the surfaces to be treated via a spray-type  
10 dispenser said compositions are safe to the user, i.e.  
they prevent inhalation by the user of acidic droplets.

5

What is claimed is:

1. An aqueous acidic liquid cleaning composition having a pH below 2, suitable for removing limescale deposits from hard-surfaces, comprising from 0.01% to 45% by weight of the total composition of maleic acid, a second acid which has a first pKa not exceeding 5, and from 0.05% to 5% by weight of the total composition of an acid-stable thickener.
2. A composition according to claim 1 wherein said composition comprises from 1% to 25% by weight of the total composition of maleic acid, and preferably from 6% to 20%.
3. A composition according to any of the preceding claims comprising from 0.1% to 20% by weight of the total composition of said second acid which has a first pKa not exceeding 5, or mixtures thereof, preferably from 0.1% to 10% and more preferably from 0.1% to 7%.
4. A composition according to any of the preceding claims wherein said second acid is selected from the group of sulphamic acid, sulphuric acid, alkyl sulphonic acids wherein the alkyl chain is a C1 to C6 linear or branched alkyl chain, aryl sulphonic acids according to the following formula :

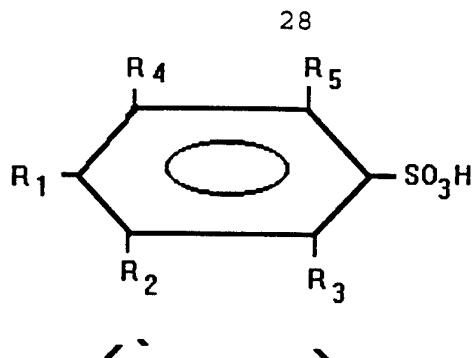

5 wherein R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>, R<sub>4</sub> and R<sub>5</sub> are each H or SO<sub>3</sub>H, or linear or branched C<sub>0</sub>-C<sub>4</sub> alkyl chain; or mixtures thereof.

10 5. A composition according to any of the preceding claims wherein said second acid is selected from the group of sulphamic acid, sulphuric acid, benzene sulphonic acid or mixtures thereof, and preferably is benzene sulphonic acid.

15 6. A composition according to any of the preceding claims wherein said composition comprises from 0.05% to 1% by weight of the total composition of said acid-stable thickener, or mixtures thereof, preferably from 0.05% to 0.8% and more preferably from 0.1% to 0.7%.

20 7. A composition according to any of the preceding claims wherein said thickener is a synthetic thickener including polyurethanes, co-polyacrilates and polyacrilamides, or a polysaccharide thickener including substituted cellulose materials, carboxymethylcellulose, hydroxymethylcellulose and naturally occurring thickeners, or mixtures thereof, and preferably is xanthum gum or derivatives thereof or mixtures thereof.

30

8. A composition according to any of the preceding claims wherein said composition further comprises a surfactant selected from the group of nonionic, anionic, cationic, zwitterionic, amphoteric surfactants or mixtures thereof, and preferably is a cationic surfactant according to the formula  $R_1R_2R_3R_4N^+ X^-$ , wherein X is a counteranion,  $R_1$  is a C<sub>8</sub>-C<sub>20</sub> hydrocarbon chain and  $R_2$ ,  $R_3$  and  $R_4$  are independently selected from H or C<sub>1</sub>-C<sub>4</sub> hydrocarbon chains.
9. A composition according to any of the preceding claims wherein the pH is below 1.5 and preferably is from 0.3 to 1.
10. A process of treating hard-surfaces, wherein a composition according to any of the preceding claims is applied in its neat form or in a diluted form onto said surfaces, then left to act onto said surfaces and then removed by rinsing.
11. A process of treating hard surfaces according to claim 10 wherein said composition is dispensed from a spray-type dispenser.
12. The use of thickened aqueous acidic liquid compositions comprising maleic acid and a second acid which has a first pKa not exceeding 5 for removing limescale in automatic dish washers and/or washing machines.
13. An acidic liquid composition packaged in a spray-type dispenser, comprising from 0.01% to 45% by weight of the total composition of maleic acid, a second acid which has a first pKa not exceeding 5, and an acid-stable shear thinning thickener.

14. The use of an acid-stable thickener, in an aqueous acidic liquid composition comprising maleic acid and a second acid which has a first pKa not exceeding 5 to improve surface safety of the surfaces treated therewith.

5

15. The use of an acid-stable thickener, in an aqueous acidic liquid composition comprising maleic acid to improve limescale removing performance.

10

16. The use of an acid-stable thickener according to claim 15 wherein said composition is dispensed to the surfaces to be treated via a spray-type dispenser.



**INTERNATIONAL SEARCH REPORT**

International application No.  
PCT/US96/12685

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) : C11D 1/14, 1/22, 3/20, 7/08; C23G 1/02  
US CL : Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 510/108, 219, 220, 238, 247, 253, 269, 406, 426, 434, 488; 134/3,41,42

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS, STN

search terms: maleic acid, sulfamic acid, sulfonic acid, lime scale, acidic, thickener, xanthan gum

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E,Y	US 5,554,320 A (YIANAKOPOULOS) 10 September 1996 (10-09-96), abstract, column 2, lines 49 to 56, column 3, lines 12 to 26, column 4, lines 7 to 56, column 12, lines 5 to 36, column 15, line 19 to column 16, line 8.	1-3, 6-16
E,Y	US 5,462,697 A (YIANAKOPOULOS) 31 October 1995 (31-10-95), column 4, lines 3 to 52, column 12, lines 9 to 25, column 14, lines 49 to 62, column 15, lines 5 to 14, 33 to 46.	1-3, 6-16
L,Y	EP 0,666,305 A1 (CARRIE et al) 09 August 1995 (09-08-95), see the entire document.	1-16
L,Y	EP 0,666,306 A1 (CARRIE) 09 August 1995 (09-08-95), see the entire document.	1-3, 6, 8-10, 14-15

Further documents are listed in the continuation of Box C.  See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 07 OCTOBER 1996	Date of mailing of the international search report 23 DEC 1996
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer PAUL LIEBERMAN <i>Paul Lieberman</i> Telephone No. (703) 308-2523

**INTERNATIONAL SEARCH REPORT**

International application No.  
PCT/US96/12685

**C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,364,551 A (LENTSCH et al) 15 November 1994 (15-11-94), column 3, lines 44 to 53, column 4, line 61 to column 5 line 35, column 7, line 55 to column 8, line 15, claims 8 and 12.	1-9, 13-16
Y	EP 0,601,990 A1 (CARRIE et al) 15 June 1994 (15-06-94), abstract, page 2, line 44 to page 3, line 32.	1-3, 6, 9
Y	JP 4-332799 A (KAO CORP.) 19 November 1992 (19-11-92), abstract.	1-6, 8-9
Y	EP 0,411,708 A2 (THOMAS et al) 06 February 1991 (06-02-91), abstract, page 2, lines 45 to 55, page 4, lines 17 to 22, page 5, lines 17 to 36, page 7, lines 19 to 58.	1-3, 6-16

**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/US96/12685

**A. CLASSIFICATION OF SUBJECT MATTER:**

**US CL :**

510/108, 219, 220, 238, 247, 253, 269, 406, 426, 434, 488; 134/3,41,42