



US00RE49449E

(19) **United States**
(12) **Reissued Patent**
Szczeszynski et al.

(10) **Patent Number:** **US RE49,449 E**
(45) **Date of Reissued Patent:** ***Mar. 7, 2023**

(54) **CHARGE PUMP WITH TEMPORALLY-VARYING ADIABATICITY**

USPC 327/536
See application file for complete search history.

(71) Applicant: **pSemi Corporation**, San Diego, CA (US)

(56) **References Cited**

(72) Inventors: **Gregory Szczeszynski**, Hollis, NH (US); **Oscar Blyde**, Melrose, MA (US); **David M. Giuliano**, Bedford, NH (US)

U.S. PATENT DOCUMENTS

(73) Assignee: **PSEMI CORPORATION**, San Diego, CA (US)

4,214,174 A	7/1980	Dickson
4,812,961 A	3/1989	Essaff et al.
5,132,606 A	7/1992	Herbert
5,301,097 A	4/1994	McDaniel
5,563,779 A	10/1996	Cave et al.
5,717,581 A	2/1998	Canclini
5,737,201 A	4/1998	Meynard et al.
5,761,058 A	6/1998	Kanda et al.

(*) Notice: This patent is subject to a terminal disclaimer.

(Continued)

(21) Appl. No.: **17/133,909**

FOREIGN PATENT DOCUMENTS

(22) Filed: **Dec. 24, 2020**

CN	101399496	4/2009
CN	102210102	10/2011

(Continued)

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **10,162,376**
Issued: **Dec. 25, 2018**
Appl. No.: **15/460,596**
Filed: **Mar. 16, 2017**

OTHER PUBLICATIONS

Abutbul—"Step-Up Switching-Mode Converter with High Voltage Gain Using a Switched-Capacitor Circuit" IEEE Transactions on Circuits and Systems I, vol. 50, pp. 1098-1102, Aug. 2003, Doc 7587.

(Continued)

U.S. Applications:

(63) Continuation of application No. 14/719,815, filed on May 22, 2015, now Pat. No. 9,658,635, which is a continuation of application No. 14/027,716, filed on Sep. 16, 2013, now Pat. No. 9,041,459.

Primary Examiner — My Trang Ton

(74) Attorney, Agent, or Firm — Finnegan, Henderson, Farabow, Garrett & Dunner, LLP

(51) **Int. Cl.**
G05F 3/02 (2006.01)
H02M 3/07 (2006.01)


(57) **ABSTRACT**

Operation of a charge pump is controlled to optimize power conversion efficiency by using an adiabatic mode with some operating characteristics and a non-adiabatic mode with other characteristics. The control is implemented by controlling a configurable circuit at the output of the charge pump.

(52) **U.S. Cl.**
CPC **G05F 3/02** (2013.01); **H02M 3/07** (2013.01)

(58) **Field of Classification Search**
CPC G05F 3/02; G06F 3/0416; G06F 3/044; G11C 16/0433; H02M 3/07

24 Claims, 5 Drawing Sheets

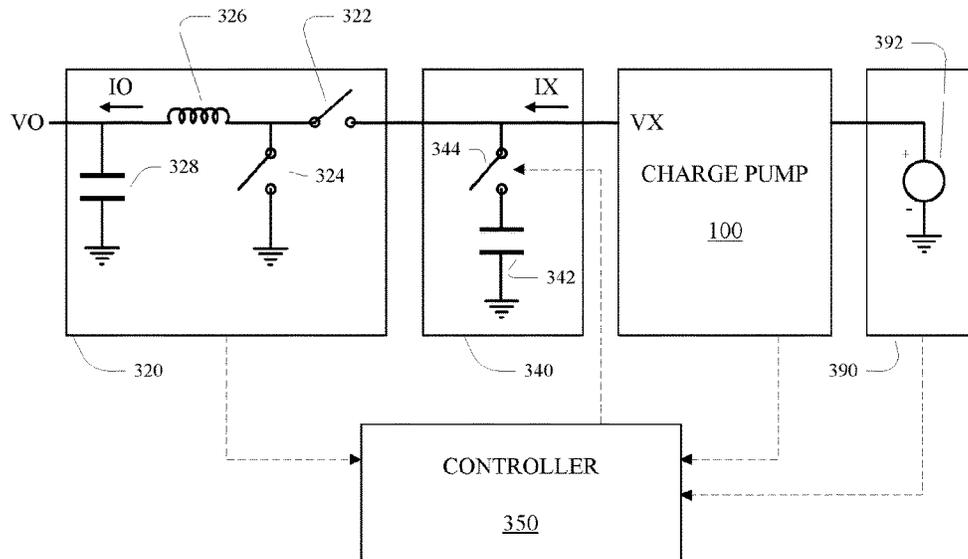

(56)

References Cited

U.S. PATENT DOCUMENTS

5,801,987 A 9/1998 Dinh
 5,907,484 A 5/1999 Kowshik et al.
 5,978,283 A 11/1999 Hsu et al.
 6,107,864 A 8/2000 Fukushima
 6,169,457 B1 1/2001 Ichimaru
 6,255,896 B1 7/2001 Li
 6,476,666 B1 11/2002 Palusa et al.
 6,486,728 B2 11/2002 Kleveland
 6,501,325 B1 12/2002 Meng
 6,504,422 B1 1/2003 Rader et al.
 6,759,766 B2 7/2004 Hiratsuka et al.
 6,927,441 B2 8/2005 Pappalardo et al.
 6,980,181 B2 12/2005 Sudo
 7,145,382 B2 12/2006 Ker et al.
 7,190,210 B2 3/2007 Azrai et al.
 7,224,062 B2 5/2007 Hsu
 7,239,194 B2 7/2007 Azrai et al.
 7,250,810 B1 7/2007 Tsen
 7,408,330 B1 8/2008 Zhao
 7,511,978 B2 3/2009 Chen et al.
 7,595,682 B2 9/2009 Lin et al.
 7,659,760 B2 2/2010 Doi
 7,679,430 B2 3/2010 Fort
 7,705,672 B1 4/2010 Rodriguez
 7,724,551 B2 5/2010 Yanagida
 7,777,459 B2 8/2010 Williams
 7,782,027 B2 8/2010 Williams
 7,786,712 B2 8/2010 Williams
 7,807,499 B2 10/2010 Nishizawa
 7,808,324 B1 10/2010 Woodford
 7,812,579 B2 10/2010 Williams
 7,928,705 B2 4/2011 Hooijschuur et al.
 7,999,601 B2 8/2011 Schlueter et al.
 8,018,216 B2 9/2011 Kakehi
 8,035,148 B2 10/2011 Goldstein
 8,040,174 B2 10/2011 Likhterov
 8,048,766 B2 11/2011 Joly et al.
 8,111,054 B2 2/2012 Yen et al.
 8,159,091 B2 4/2012 Yeates
 8,164,369 B2* 4/2012 Raghunathan H03L 7/0891
 327/149
 8,193,604 B2 6/2012 Lin et al.
 8,212,541 B2 7/2012 Perreault et al.
 8,339,184 B2 12/2012 Kok et al.
 8,350,549 B2 1/2013 Kitabatake
 8,384,467 B1 2/2013 O'Keeffe et al.
 8,395,914 B2 3/2013 Klootwijk et al.
 8,436,674 B1 5/2013 Standley
 8,456,874 B2 6/2013 Singer et al.
 8,503,203 B1 8/2013 Szczeszynski et al.
 8,619,443 B2 12/2013 Low
 8,619,445 B1* 12/2013 Low H02M 1/32
 363/59
 9,041,459 B2 5/2015 Szczeszynski
 9,658,635 B2 5/2017 Szczeszynski
 9,742,266 B2 8/2017 Giuliano
 10,162,376 B2 12/2018 Szczeszynski
 2003/0169096 A1 9/2003 Hsu et al.
 2003/0227280 A1 12/2003 Vinciarelli
 2004/0041620 A1 3/2004 D'Angelo et al.
 2004/0080964 A1 4/2004 Buchmann
 2005/0007184 A1 1/2005 Kamijo
 2005/0068073 A1* 3/2005 Shi H03L 7/0812
 327/156
 2005/0136873 A1* 6/2005 Kim H03L 7/0891
 455/260
 2005/0207133 A1 9/2005 Pavier et al.
 2007/0018700 A1 1/2007 Yen
 2007/0210774 A1 9/2007 Kimura et al.
 2007/0230221 A1 10/2007 Lim et al.
 2008/0150621 A1 6/2008 Lesso et al.
 2008/0157732 A1 7/2008 Williams
 2008/0157733 A1 7/2008 Williams
 2008/0239772 A1 10/2008 Oraw et al.
 2009/0102439 A1 4/2009 Williams

2009/0257211 A1 10/2009 Kontani et al.
 2009/0278520 A1 11/2009 Perreault et al.
 2010/0110741 A1 5/2010 Lin et al.
 2010/0140736 A1 6/2010 Lin et al.
 2010/0156370 A1 6/2010 Tseng
 2010/0202161 A1 8/2010 Sims et al.
 2010/0214746 A1 8/2010 Lotfi et al.
 2010/0244189 A1 9/2010 Klootwijk et al.
 2010/0244585 A1 9/2010 Tan et al.
 2010/0244935 A1 9/2010 Kim
 2011/0050325 A1* 3/2011 Schatzberger H02M 3/073
 327/536
 2011/0062940 A1 3/2011 Shvartsman
 2011/0163414 A1 7/2011 Lin et al.
 2011/0241767 A1 10/2011 Curatola
 2011/0273151 A1 11/2011 Lesso et al.
 2011/0304310 A1 12/2011 Sotono
 2012/0126909 A1 5/2012 McCune
 2012/0146177 A1 6/2012 Choi et al.
 2012/0212201 A1 8/2012 Lee
 2012/0313602 A1 12/2012 Perreault et al.
 2012/0326684 A1 12/2012 Perreault et al.
 2013/0049714 A1 2/2013 Chiu
 2013/0094157 A1 4/2013 Giuliano
 2013/0154600 A1 6/2013 Giuliano
 2013/0229841 A1 9/2013 Giuliano
 2013/0245487 A1 9/2013 Aga
 2013/0287231 A1 10/2013 Kropfisch
 2014/0167853 A1 6/2014 Haruna
 2015/0077175 A1 3/2015 Giuliano
 2015/0077176 A1 3/2015 Szczeszynski
 2015/0326113 A1 11/2015 Szczeszynski
 2017/0285679 A1 10/2017 Szczeszynski
 2018/0006554 A1 1/2018 Giuliano

FOREIGN PATENT DOCUMENTS

CN 105723599 6/2016
 CN 105874398 8/2016
 DE 112014004225 6/2016
 DE 112014004237 6/2016
 EP 2469694 6/2012
 GB 2532686 5/2016
 GB 2534716 8/2016
 JP 10327573 12/1998
 JP 11235053 8/1999
 JP 2010045943 2/2010
 JP 2010045943 A 2/2010
 KR 20160056912 5/2016
 KR 20160056913 5/2016
 TW 201526493 7/2015
 TW 201530997 8/2015
 WO WO2006093600 9/2006
 WO WO2009112900 9/2009
 WO WO2010056912 5/2010
 WO WO2012151466 11/2012
 WO WO2013059446 4/2013
 WO WO2013096416 6/2013
 WO WO2015039077 3/2015
 WO WO2015039079 3/2015

OTHER PUBLICATIONS

Axelrod—"Single-switch single stage switched-capacitor buck converter", Proc. Of NORPIE 2004, 4th Nordic Workshop on Power and Industrial Electronics, Jun. 2004, Doc 7588.
 Han—"A New Approach to Reducing Output Ripple in Switched-Capacitor-Based Step-Down DC-DC Converters" IEEE Transactions on Power Electronics, vol. 21, No. 6, pp. 1548-1555, Nov. 2006, Doc 7589.
 Lei—"Analysis of Switched-Capacitor DC-DC Converters in Soft-Charging Operation" 14th IEEE Workshop on Control and Modeling for Power Electronics, p. 1-7, Jun. 23, 2013, Doc 7590.
 Meynard—"Multi-Level Conversion: High Voltage Choppers and Voltage-Source Inverters" IEEE Power Electronics Specialists Conference pp. 397-403, 1992, Doc 7591.

(56) **References Cited**

OTHER PUBLICATIONS

Middlebrook—"Transformerless DC-to-DC Converters with Large Conversion Ratios" IEEE Transactions on Power Electronics, vol. 3, No. 4, pp. 484-488, Oct. 1988, Doc 7592.

Ng—"Switched Capacitor DC-DC Converter: Superior where the Buck Converter has Dominated" PhD Thesis, UC Berkeley, Aug. 17, 2011, Doc 7593.

Pilawa-Podgurski—"Merged Two-Stage Power Converter Architecture with Soft Charging Switched-Capacitor Energy Transfer" 39th IEEE Power Electronics Specialists Conference, 2008, Doc 7594.

Pilawa-Podgurski—"Merged Two-Stage Power Converter with Soft Charging Switched-Capacitor Stage in 180 nm CMOS" IEEE Journal of Solid-State Circuits, vol. 47, No. 7, pp. 1557-1567, Jul. 2012, Doc 7595.

Sun—"High Power Density, High Efficiency System Two-Stage Power Architecture for Laptop Computers" Power Electronic Specialists Conference, pp. 1-7, Jun. 2006, Doc 7596.

Umeno—"A New Approach to Low Ripple-Noise Switching Converters on the Basis of Switched-Capacitor Converters" IEEE Intl. Symposium on Circuits and Systems, vol. 2, pp. 1077-1080, Jun. 1991, Doc 7597.

Wood—"Design, Fabrication and Initial Results of a 2g Autonomous Glider" IEEE Industrial Electronics Society, pp. 1870-1877, Nov. 2005, Doc 7598.

U.S. Appl. No. 14/027,584, filed Sep. 16, 2013, 43 pages (30096-012001), Doc 7413.

U.S. Appl. No. 14/027,584, filed Oct. 10, 2013, 3 pages (30096-012001), Doc 7427.

U.S. Appl. No. 14/027,584: Restriction Requirement dated Jan. 17, 2014, 6 pages (30096-012001), Doc 7436.

U.S. Appl. No. 14/027,584: Response to Restriction Requirement filed Mar. 17, 2014, 6 pages (30096-012001), Doc 7437.

U.S. Appl. No. 14/027,584: Non-final Office Action dated Apr. 17, 2014, 9 pages (30096-012001), Doc 7438.

U.S. Appl. No. 14/027,584: Response to Non-final Office Action filed Jun. 24, 2014, 45 pages (30096-012001), Doc 7439.

U.S. Appl. No. 14/027,584: Final Office Action dated Jul. 28, 2014, 10 pages (30096-012001), Doc 7440.

U.S. Appl. No. 14/027,584: Response to Final Office Action filed Aug. 19, 2014, 10 pages (30096-012001), Doc 7441.

U.S. Appl. No. 14/027,584: Advisory Action dated Aug. 29, 2014, 4 pages (30096-012001), Doc 7442.

U.S. Appl. No. 14/027,584: RCE and Amendment filed Oct. 24, 2014, 19 pages (30096-012001), Doc 7443.

U.S. Appl. No. 14/027,584: Non-final Office Action dated Mar. 12, 2015, 10 pages (30096-012001), Doc 7444.

U.S. Appl. No. 14/027,584: Notice of Publication dated Mar. 19, 2015, 1 page (30096-012001), Doc 7445.

U.S. Appl. No. 14/027,584: Response to Non-final Office Action dated Jun. 12, 2015, 30 pages (30096-012001), Doc 7446.

U.S. Appl. No. 14/027,584: Final Office Action dated Jul. 2, 2015, 12 pages (30096-012001), Doc 7447.

U.S. Appl. No. 14/027,584: Final Office Action dated Aug. 27, 2015, 12 pages (30096-012001), Doc 7448.

U.S. Appl. No. 14/027,584: Applicant Initialed Interview Summary dated Sep. 2, 2015, 3 pages (30096-012001), Doc 7449.

U.S. Appl. No. 14/027,584: Applicant Initialed Interview Summary, 312 Amendment, and Decision on After Final Consideration Decision dated Sep. 11, 2015, 4 pages (30096-012001), Doc 7450.

U.S. Appl. No. 14/027,584: Advisory Action dated Sep. 11, 2015, 5 pages (30096-012001), Doc 7451.

U.S. Appl. No. 14/027,584: Notice of Appeal and Pre-Brief Conference Request filed Oct. 2, 2015, 11 pages (30096-012001), Doc 7452.

U.S. Appl. No. 14/027,584: Replacement Drawing filed Oct. 5, 2015, 11 pages (30096-012001), Doc 7453.

U.S. Appl. No. 14/027,584: Final Office Action dated Nov. 12, 2015, 14 pages (30096-012001), Doc 7454.

U.S. Appl. No. 14/027,584: Response to Final Office Action dated Nov. 30, 2015, 13 pages (30096-012001), Doc 7455.

U.S. Appl. No. 14/027,584: Advisory Action, Applicant Initialed Interview Summary, and 312 Amendment Initialed dated Dec. 10, 2015, 9 pages (30096-012001), Doc 7456.

U.S. Appl. No. 14/027,584: Notice of Appeal and Pre-Brief Conference Request filed Feb. 11, 2016, 9 pages (30096-012001), Doc 7457.

U.S. Appl. No. 14/027,584: Pre-Brief Conference Decision dated May 9, 2016, 2 pages (30096-012001), Doc 7458.

U.S. Appl. No. 14/027,584: RCE and Amendment filed Jun. 9, 2016, 16 pages (30096-012001), Doc 7459.

U.S. Appl. No. 14/027,584: Notice of Non-Compliant Amendment dated Jun. 17, 2016, 2 pages (30096-012001), Doc 7460.

U.S. Appl. No. 14/027,584: Amendment and Response to Notice of Non-Compliant Amendment filed Jul. 6, 2016, 12 pages (30096-012001), Doc 7461.

U.S. Appl. No. 14/027,584: Non-final Office Action dated Sep. 28, 2016, 13 pages (30096-012001), Doc 7462.

U.S. Appl. No. 14/027,584: Response to Non-final Office Action filed Dec. 28, 2016, 13 pages (30096-012001), Doc 7463.

U.S. Appl. No. 14/027,584: Final Office Action dated Feb. 7, 2017, 8 pages (30096-012001), Doc 7464.

U.S. Appl. No. 14/027,584: Response to Final Office Action dated Apr. 7, 2017, 11 pages (30096-012001), Doc 7465.

U.S. Appl. No. 14/027,584: Notice of Allowance and Allowability dated Apr. 17, 2017, 16 pages (30096-012001), Doc 7466.

U.S. Appl. No. 14/027,584: Issue Fee Payment filed Jul. 14, 2017, 6 pages (30096-012001), Doc 7467.

U.S. Appl. No. 14/027,584: Issue Notification dated Aug. 2, 2017, 6 pages (30096-012001), Doc 7468.

U.S. Appl. No. 15/650,101: Patent Application filed Jul. 14, 2017, 29 pages (30096-012002), Doc 7469.

U.S. Appl. No. 15/650,101: Filing Receipt and Notice to File Missing Parts dated Jul. 24, 2017, 6 pages (30096-012002), Doc 7470.

U.S. Appl. No. 15/650,101: Preliminary Amendment and Response to Notice to File Missing Parts filed Sep. 25, 2017, 12 pages (30096-012002), Doc 7471.

U.S. Appl. No. 15/650,101: Updated Filing Receipt dated Sep. 27, 2017, 4 pages (30096-012002), Doc 7472.

U.S. Appl. No. 15/650,101: Request to Update Name of Applicant filed Oct. 3, 2017, 18 pages (30096-012002), Doc 7473.

U.S. Appl. No. 15/650,101: Replacement Filing Receipt dated Oct. 5, 2017, 3 pages (30096-012002), Doc 7474.

U.S. Appl. No. 15/650,101: Notice of Publication dated Jan. 4, 2018, 1 page (30096-012002), Doc 7475.

U.S. Appl. No. 15/650,101: Request to Change Name of Applicant filed Feb. 27, 2018, 10 pages (30096-012002), Doc 7476.

U.S. Appl. No. 15/650,101: Non-final Office Action dated Jul. 19, 2018, 12 pages (30096-012002), Doc 7477.

U.S. Appl. No. 15/650,101: Response to Non-final Office Action, Terminal Disclaimer and Request to Change Applicant filed Oct. 19, 2018, 47 pages (30096-012002), Doc 7478.

U.S. Appl. No. 15/650,101: Supplemental Amendment filed Oct. 26, 2018, 47 pages (30096-012002), Doc 7479.

U.S. Appl. No. 15/650,101: Final Office Action dated Nov. 5, 2018, 16 pages (30096-012002), Doc 7480.

U.S. Appl. No. 15/650,101: Response to Final Office Action filed Jan. 7, 2019, 40 pages (30096-012002), Doc 7481.

U.S. Appl. No. 15/650,101: Corrected Filing Receipt dated Jan. 9, 2019, 3 pages (30096-012002), Doc 7482.

U.S. Appl. No. 15/650,101: Advisory Action dated Jan. 28, 2019, 4 pages (30096-012002), Doc 7483.

U.S. Appl. No. 15/650,101: Notice of Abandonment dated Oct. 8, 2019, 2 pages (30096-012002), Doc 7484.

PCT/US14/55796: PCT Application filed Sep. 16, 2014, 29 pages (400-012WO1), Doc 7485.

PCT/US14/55796: Intl. Search Report and Written Opinion dated Jan. 2, 2015, 15 pages (400-012WO1), Doc 7486.

PCT/US14/55796: Intl. Preliminary Report on Patentability dated Mar. 22, 2016, 7 pages (400-012WO1), Doc 7499.

CN201480062822: CN Patent Application filed May 16, 2016, 53 pages (30096-012CN1), Doc 7488.

(56)

References Cited

OTHER PUBLICATIONS

CN201480062822: First Office Action dated Jan. 18, 2017, 22 pages (30096-012CN1), Doc 7489.

CN201480062822: Response to First Office Action filed Aug. 2, 2017, 10 pages (30096-012CN1), Doc 7491.

CN201480062822: Second Office Action dated Nov. 16, 2017, 10 pages (30096-012CN1), Doc 7490.

CN201480062822: Notice of Abandonment/Deemed Withdrawn dated Mar. 7, 2018, 1 page (30096-012CN1), Doc 7492.

DE112014004225: DE Application filed Mar. 16, 2016, 53 pages (30096-012DE1), Doc 7494.

GB1604216: GB Application filed Mar. 11, 2016, 24 pages (30096-012GB1), Doc 7495.

GB1604216: Notice of Publication dated Apr. 25, 2016, 2 pages (30096-012GB1), Doc 7496.

GB1604216: Examination Report Under Section 18(3) dated Jun. 22, 2020, 3 pages (30096-012GB1), Doc 7498.

GB1604216: Response to Examination Report Under Section 18(3) and Amendment filed Dec. 21, 2020, 10 pages (30096-012GB1), Doc 7500.

GB1604216: Further Examination Report Under Section 18(3) dated Feb. 1, 2021, 3 pages (30096-012GB1), Doc 7501.

GB1604216: Filing Receipt dated Mar. 18, 2021, 1 page (30096-012GB1), Doc 7502.

GB1604216: Response to Further Examination Report Under Section 18(3) filed Mar. 31, 2021, 12 pages (30096-012GB1), Doc 7503.

GB1604216: Intention to Grant dated Apr. 21, 2021, 2 pages (30096-012GB1), Doc 7613.

GB2104046.4: GB Application filed Mar. 23, 2021, 26 pages (30096-012GB2), Doc 7504.

KR20167009266: KR Application filed Apr. 7, 2016, 69 pages (30096-012KR1), Doc 7507.

TW103131755: TW Application filed Sep. 15, 2014, 26 pages (30096-012TW1), Doc 7509.

U.S. Appl. No. 14/027,716: Patent Application filed Sep. 16, 2013, 35 pages (30096-013001), Doc 7510.

U.S. Appl. No. 14/027,716: Filing Receipt dated Oct. 11, 2013, 3 pages (30096-013001), Doc 7511.

U.S. Appl. No. 14/027,716: Restriction Requirement dated Jan. 16, 2014, 6 pages (30096-013001), Doc 7512.

U.S. Appl. No. 14/027,716: Response to Restriction Requirement dated Jan. 16, 2014, 3 pages (30096-013001), Doc 7513.

U.S. Appl. No. 14/027,716: Non-final Office Action dated Apr. 22, 2014, 10 pages (30096-013001), Doc 7514.

U.S. Appl. No. 14/027,716: Response to Non-final Office Action filed Jul. 16, 2014, 15 pages (30096-013001), Doc 7515.

U.S. Appl. No. 14/027,716: Final Office Action filed Sep. 3, 2014, 9 pages (30096-013001), Doc 7516.

U.S. Appl. No. 14/027,716: Letter Restarting Period for Response dated Sep. 24, 2014, 9 pages (30096-013001), Doc 7517.

U.S. Appl. No. 14/027,716: Response to Final Office Action filed Oct. 17, 2014, 15 pages (30096-013001), Doc 7518.

U.S. Appl. No. 14/027,716: Advisory Action filed Oct. 30, 2014, 4 pages (30096-013001), Doc 7519.

U.S. Appl. No. 14/027,716: Response After Final filed Dec. 23, 2014, 9 pages (30096-013001), Doc 7520.

U.S. Appl. No. 14/027,716: Notice of Allowance and Allowability dated Jan. 23, 2015, 19 pages (30096-013001), Doc 7521.

U.S. Appl. No. 14/027,716: Notice of Publication dated Mar. 19, 2015, 1 page (30096-013001), Doc 7522.

U.S. Appl. No. 14/027,716: Issue Fee Payment filed Apr. 22, 2015, 2 pages (30096-013001), Doc 7523.

U.S. Appl. No. 14/027,716: Issue Notification dated May 6, 2015, 1 page (30096-013001), Doc 7524.

U.S. Appl. No. 14/719,815: Patent Application filed May 22, 2015, 41 pages (30096-013002), Doc 7525.

U.S. Appl. No. 14/719,815: Filing Receipt and Notice to File Corrected Application Papers dated Jun. 3, 2015, 5 pages (30096-013002), Doc 7526.

U.S. Appl. No. 14/719,815: Amendment and Response to Notice to File Corrected Application Papers filed Jul. 29, 2015, 35 pages (30096-013002), Doc 7527.

U.S. Appl. No. 14/719,815: Updated Filing Receipt dated Aug. 5, 2015, 3 pages (30096-013002), Doc 7528.

U.S. Appl. No. 14/719,815: Notice of Publication dated Nov. 12, 2015, 3 pages (30096-013002), Doc 7529.

U.S. Appl. No. 14/719,815: Preliminary Amendment filed Apr. 12, 2016, 9 pages (30096-013002), Doc 7530.

U.S. Appl. No. 14/719,815: Non-final Office Action dated Aug. 23, 2016, 12 pages (30096-013002), Doc 7531.

U.S. Appl. No. 14/719,815: Response to Non-final Office Action filed Nov. 22, 2016, 10 pages (30096-013002), Doc 7532.

U.S. Appl. No. 14/719,815: Notice of Allowance and Allowability dated Dec. 16, 2016, 20 pages (30096-013002), Doc 7533.

U.S. Appl. No. 14/719,815: Amendment and Issue Fee Payment filed Mar. 16, 2017, 15 pages (30096-013002), Doc 7534.

U.S. Appl. No. 14/719,815: Examiner Response to 312 Communication and Amendment dated Apr. 3, 2017, 4 pages (30096-013002), Doc 7535.

U.S. Appl. No. 14/719,815: Examiner's Amendment dated Apr. 27, 2017, 1 page (30096-013002), Doc 7536.

U.S. Appl. No. 14/719,815: Issue Notification dated May 3, 2017, 1 page (30096-013002), Doc 7537.

U.S. Appl. No. 15/460,596: Patent Application filed Mar. 16, 2017, pages (30096-013003), Doc 7538.

U.S. Appl. No. 15/460,596: Filing Receipt and Notice to File Missing Parts dated Mar. 24, 2017, 5 pages (30096-013003), Doc 7539.

U.S. Appl. No. 15/460,596: Preliminary Amendment and Response to Notice to File Missing Parts dated Jun. 26, 2017, 11 pages (30096-013003), Doc 7540.

U.S. Appl. No. 15/460,596: Updated Filing Receipt dated Jun. 28, 2017, 3 pages (30096-013003), Doc 7541.

U.S. Appl. No. 15/460,596: Notice of Publication dated Oct. 5, 2017, 1 page (30096-013003), Doc 7542.

U.S. Appl. No. 15/460,596: Corrected Filing Receipt dated Oct. 6, 2017, 3 pages (30096-013003), Doc 7543.

U.S. Appl. No. 15/460,596: Non-final Office Action dated Jun. 25, 2018, 15 pages (30096-013003), Doc 7544.

U.S. Appl. No. 15/460,596: Response to Non-final Office Action dated Jul. 5, 2018, 28 pages (30096-013003), Doc 7545.

U.S. Appl. No. 15/460,596: Final Office Action dated Aug. 15, 2018, 7 pages (30096-013003), Doc 7546.

U.S. Appl. No. 15/460,596: Amendment, Terminal Disclaimer and Response to Final Office Action dated Sep. 19, 2018, 9 pages (30096-013003), Doc 7547.

U.S. Appl. No. 15/460,596: Notice of Allowance and Allowability dated Oct. 5, 2018, 13 pages (30096-013003), Doc 7548.

U.S. Appl. No. 15/460,596: Corrected Filing Receipt dated Nov. 9, 2018, 3 pages (30096-013003), Doc 7549.

U.S. Appl. No. 15/460,596: Issue Fee Payment filed Nov. 16, 2018, 4 pages (30096-013003), Doc 7550.

U.S. Appl. No. 15/460,596: Issue Notification dated Dec. 5, 2018, 1 page (30096-013003), Doc 7551.

U.S. Appl. No. 17/133,909: Patent Application filed Dec. 24, 2020, 44 pages (30096-013004), Doc 7552.

U.S. Appl. No. 17/133,909: Filing Receipt dated Dec. 29, 2020, 4 pages (30096-013004), Doc 7553.

PCT/US14/55809: PCT Application filed Sep. 16, 2014, 38 pages (30096-013WO1), Doc 7554.

PCT/US14/55809: Intl. Search Report and Written Opinion dated Mar. 31, 2015, 14 pages (30096-013WO1), Doc 7555.

PCT/US14/55809: Intl. Preliminary Report on Patentability dated Mar. 31, 2016, 7 pages (30096-013WO1), Doc 7556.

CN201480062695: CN Application filed May 16, 2016, 50 pages (30096-013CN1), Doc 7558.

CN201480062695: Filing Receipt dated Jun. 1, 2016, 2 pages (30096-013CN1), Doc 7560.

CN201480062695: First Office Action dated Nov. 28, 2017, 10 pages (30096-013CN1), Doc 7561.

(56)

References Cited

OTHER PUBLICATIONS

CN201480062695: Response to First Office Action filed Jun. 12, 2018 (No translation available), 10 pages (30096-013CN1), Doc 7563.

CN201480062695: Second Office Action dated Oct. 15, 2018, 17 pages (30096-013CN1), Doc 7564.

CN201480062695: Response to Second Office Action filed Dec. 29, 2018, 15 pages (30096-013CN1), Doc 7565.

CN201480062695: Third Office Action dated May 8, 2019, 7 pages (30096-013CN1), Doc 7566.

CN201480062695: Response to Third Office Action filed May 8, 2019, 9 pages (30096-013CN1), Doc 7567.

CN201480062695: Notice of Intention to Grant with Allowed Claims dated Aug. 29, 2019, 7 pages (30096-013CN1), Doc 7569.

CN201480062695: Patent Certificate dated Dec. 10, 2019, 4 pages (30096-013CN1), Doc 7570.

CN201911107739: CN Application filed Nov. 13, 2019, 48 pages (30096-013CN2), Doc 7571.

CN201911107739: First Office Action dated Dec. 30, 2020, 20 pages (30096-013CN2), Doc 7573.

DE112014004237: DE Application filed Mar. 16, 2016, 50 pages (30096-013DE1), Doc 7574.

GB1604221.0: GB Application filed Mar. 11, 2016, 25 pages (30096-013GB1), Doc 7576.

GB1604221.0: Examination Report Under Section 18(3) dated Jun. 22, 2020, 2 pages (30096-013GB1), Doc 7578.

GB1604221.0: Response to Examination Report Under Section 18(3) filed Dec. 21, 2020, 7 pages (30096-013GB1), Doc 7579.

GB1604221.0: Further Examination Report Under Section 18(3) dated Feb. 21, 2021, 1 page (30096-013GB1), Doc 7580.

GB1604221.0: Response to Further Examination Report Under Section 18(3) filed Apr. 6, 2021, 14 pages (30096-013GB1), Doc 7586.

GB1604221.0: Intention to Grant dated Apr. 21, 2021, 2 pages (30096-013GB1), Doc 7614.

KR20167009267: KR Patent Application filed Apr. 7, 2016, 68 pages (30096-013KR1), Doc 7582.

KR20167009267: Filing Receipt dated Apr. 7, 2016, 3 pages (30096-013KR1), Doc 7583.

TW103131753: TW Patent Application filed Sep. 15, 2014, 56 pages (30096-013TW1), Doc 7584.

* cited by examiner

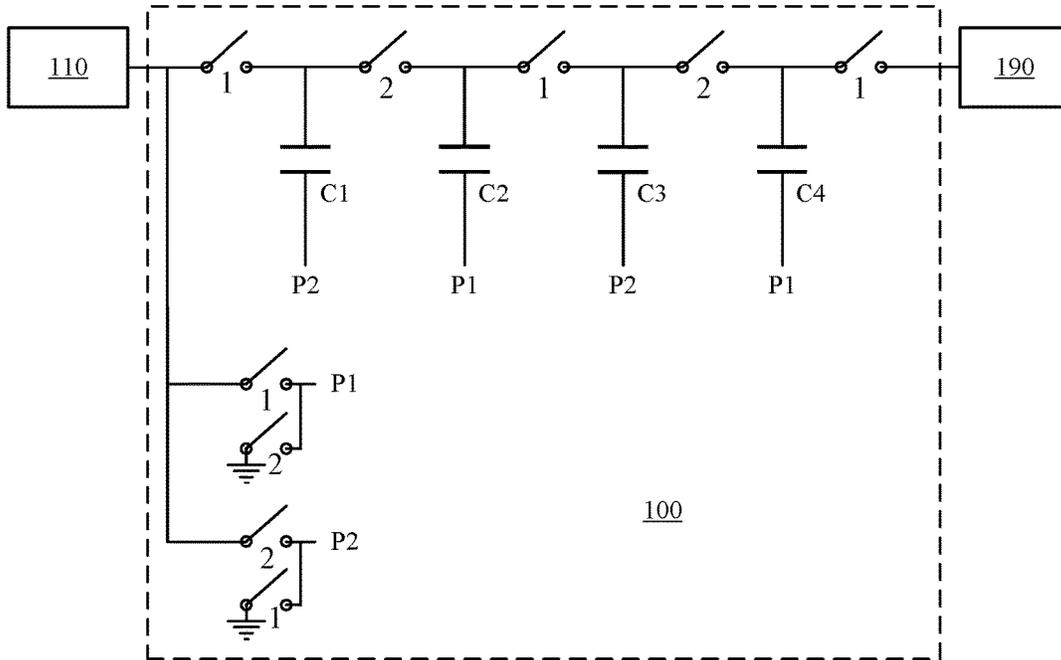


FIG. 1

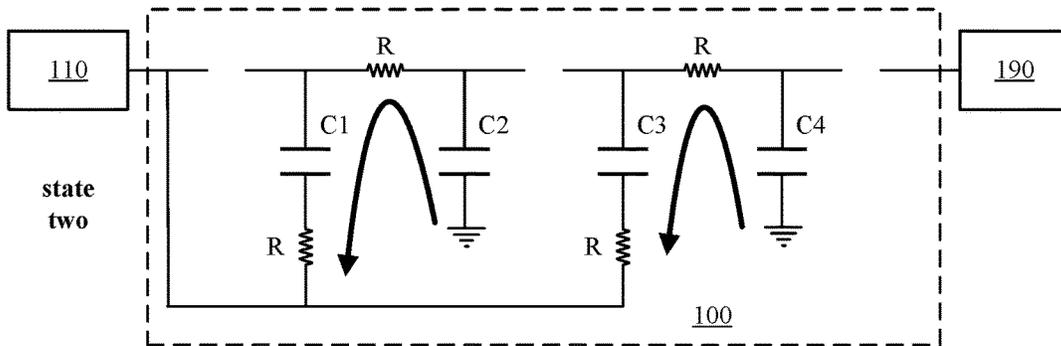


FIG. 2A

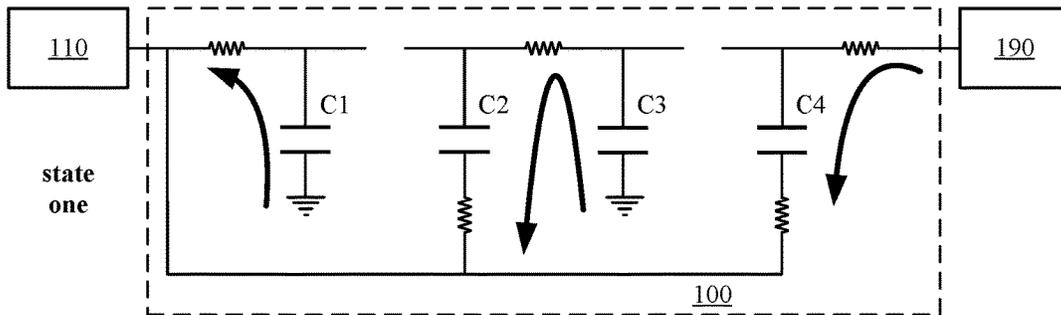


FIG. 2B

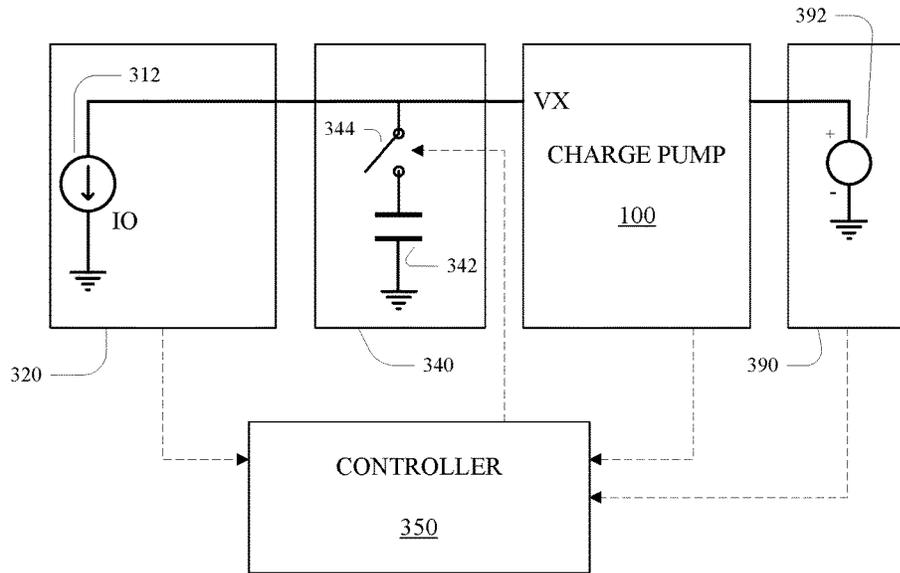


FIG. 3

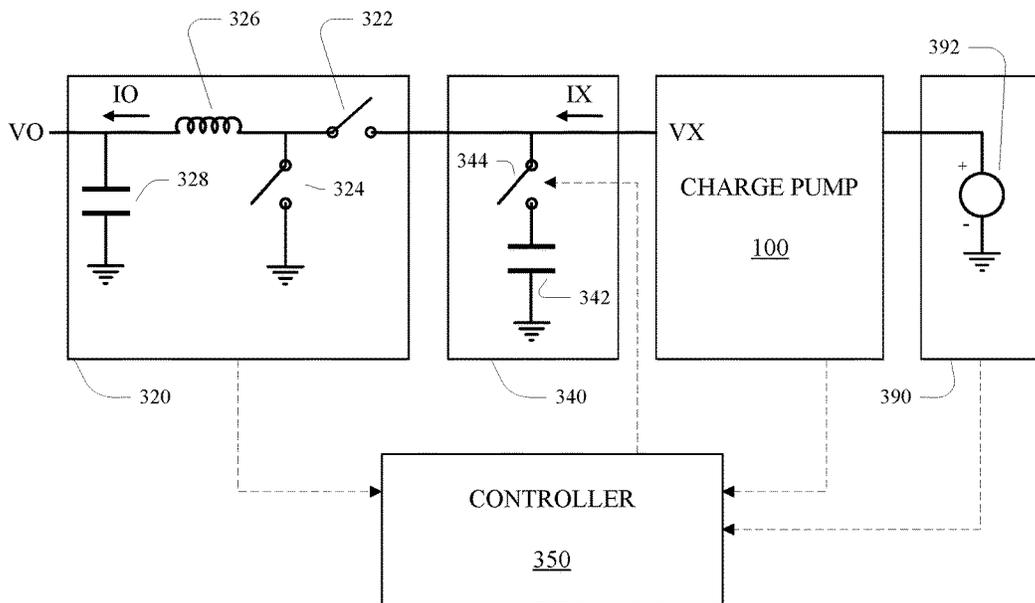


FIG. 4

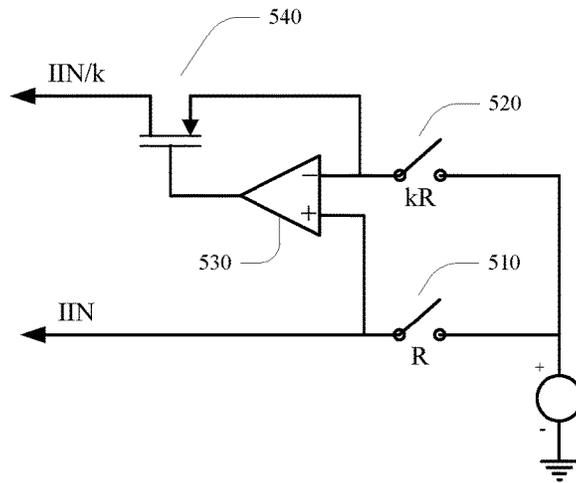


FIG. 5

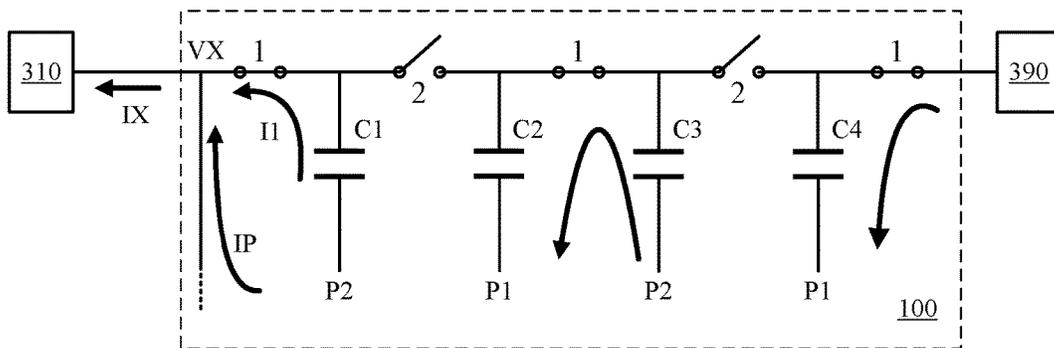
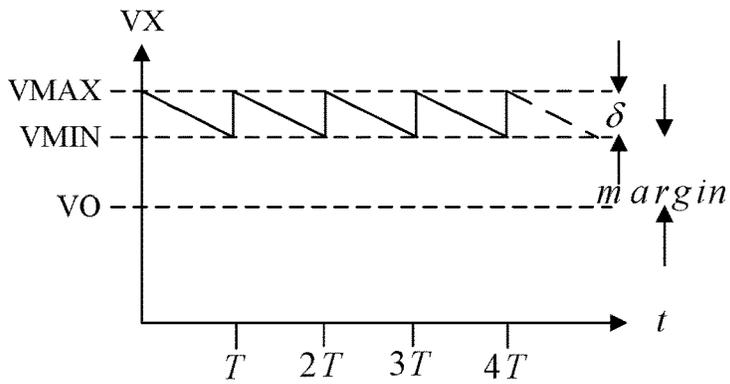
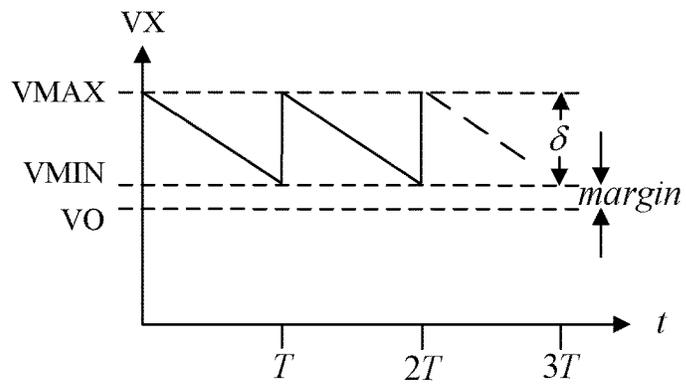
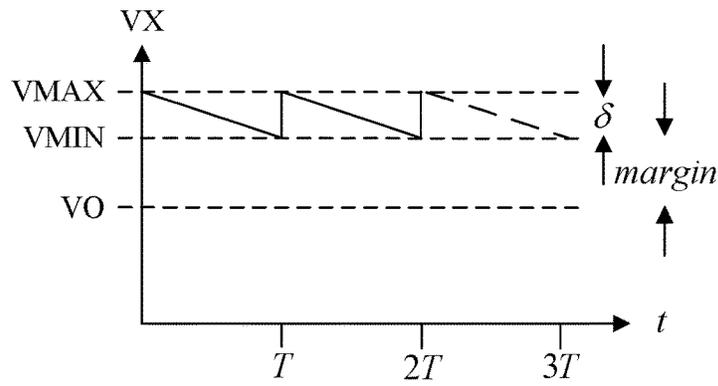


FIG. 6



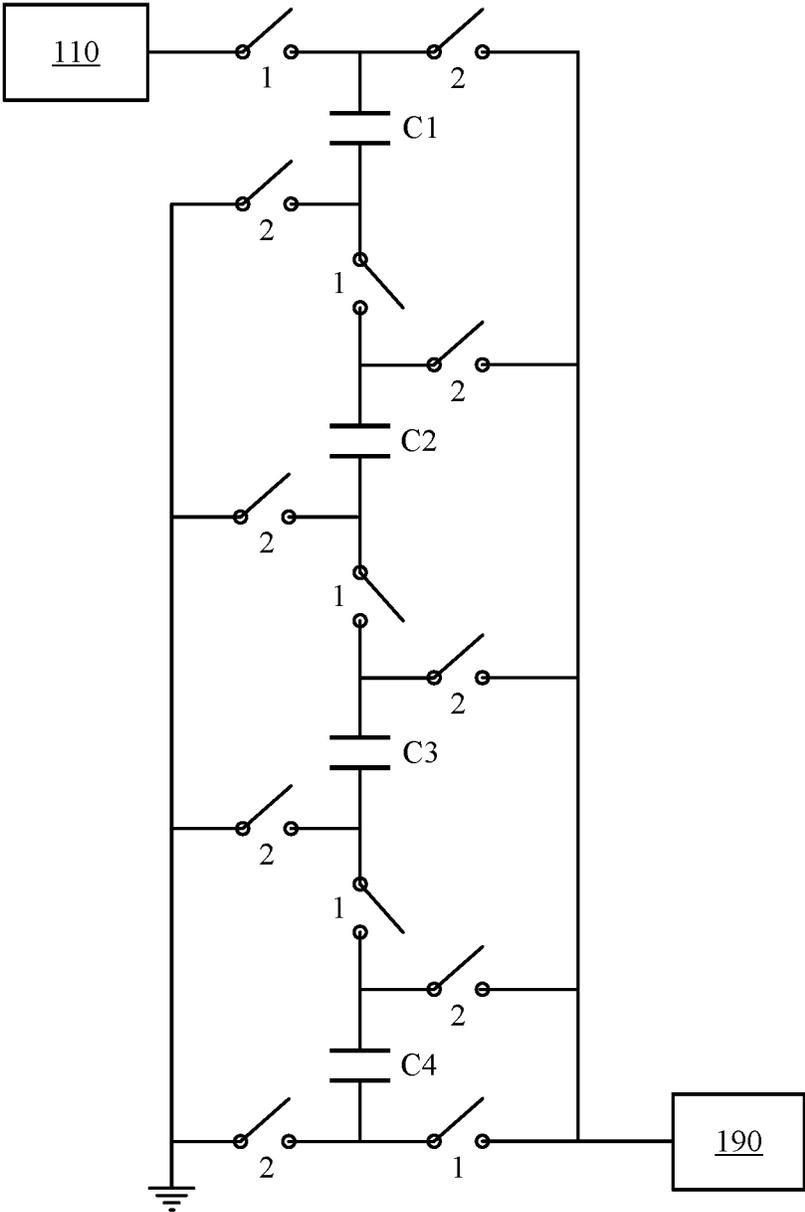


FIG. 8

CHARGE PUMP WITH TEMPORALLY-VARYING ADIABATICITY

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a reissue application of U.S. application Ser. No. 15/460,596, filed Mar. 16, 2017, now U.S. Pat. No. 10,162,376, which is a continuation of U.S. application Ser. No. 14/719,815, filed on May 22, 2015, which claims the benefit of the priority date of U.S. application Ser. No. 14/027,716, filed on Sep. 16, 2013, issued as U.S. Pat. No. 9,041,459 on May 26, 2015, the contents of which are hereby incorporated by reference in their entirety

BACKGROUND

This invention relates to adiabatic power conversion, and in particular to configuration and control for partial adiabatic operation of a charge pump.

Various configurations of charge pumps, including Series-Parallel and Dickson configurations, rely on alternating configurations of switch elements to propagate charge and transfer energy between the terminals of the charge pump. Energy losses associated with charge propagation determine the efficiency of the converter.

Referring to FIG. 1, a single-phase Dickson charge pump 100 is illustrated in a step-down mode coupled to a low-voltage load 110 and a high-voltage source 190. In the illustrated configuration, generally the low-voltage load 110 is driven (on average) by a voltage that is $\frac{1}{5}$ times the voltage provided by the source and a current that is five times the current provided by the high-voltage source 190. The pump is driven in alternating states, referred to as state one and state two, such that the switches illustrated in FIG. 1 are closed in the indicated states. In general, the duration of each state is half of a cycle time T and the corresponding switching frequency of the charge pump 100 is equal to the inverse of the cycle time T.

FIGS. 2A-B illustrate the equivalent circuit in each of states two and state one, respectively, illustrating each closed switch as an equivalent resistance R. Capacitors C1 through C4 have a capacitance C. In a first conventional operation of the charge pump 100, the high-voltage source 190 is a voltage source, for example, a twenty-five volt source, such that the low-voltage load 100 is driven by five volts. In operation, the voltage across the capacitors C1 through C4 are approximately five volts, ten volts, fifteen volts, and twenty volts, respectively.

One cause of energy loss in the charge pump 100 relates the resistive losses through the switches (i.e., through the resistors R in FIGS. 2A-B). Referring to FIG. 2A, during state two, charge transfers from the capacitor C2 to the capacitor C1 and from the capacitor C4 to the capacitor C1. The voltages on these pairs of capacitors equilibrate assuming that the cycle time T is sufficiently greater than the time constant of the circuit (e.g., that the resistances R are sufficiently small. Generally, the resistive energy losses in this equilibration are proportional to the time average of the

square of the current passing between the capacitors and therefore passing to the low-voltage load 110. Similarly, during state one, the capacitors C3 and C2 equilibrate, the capacitor C4 charges, and the capacitor C1 discharges, also generally resulting in a resistive energy loss that is proportional to the time average of the square of the current passing to the low-voltage load 110.

For a particular average current passing to the load 110, assuming that the load presents an approximately constant voltage, it can be shown that the resistive energy loss decreases as the cycle time T is reduced (i.e., switching frequency is increased). This can generally be understood by considering the impact of dividing the cycle time by one-half, which generally reduces the peak currents in the equilibration by one half, and thereby approximately reduces the resistive energy loss to one quarter. So the resistive energy loss is approximately inversely proportional to the square of the switching frequency.

However, another source of energy loss relates to capacitive losses in the switches, such that energy loss grows with the switching frequency. Generally, a fixed amount of charge is lost with each cycle transition, which can be considered to form a current that is proportional to the switching frequency. So this capacitive energy loss is approximately proportional to the square of the switching frequency.

Therefore, with a voltage source and load there an optimal switching frequency that minimizes the sum of the resistive and capacitive energy losses, respectively reduced with increased frequency and increased with increased frequency.

SUMMARY

Patent Publication WO 2012/151466, published on Nov. 8, 2012, describes configurations in which the source and/or load comprise regulating circuits. In particular, in FIGS. 1 and 2A-B, the load 110 can effectively comprise a current sink rather than present a constant voltage in an example of what is referred to as “adiabatic” operation of a charge pump. If the current sink accepts constant current, then the currents illustrated in FIG. 2A effectively remain substantially constant values during the illustrated state. Therefore, the resistive power loss is lower than the resistive loss in the voltage driven case discussed in the Background, and also substantially independent of the cycle time T. In situations in which the load sinks a pulsed current, then for a particular average current, the resistive energy loss generally increases as the duty cycle of the current decreases (and the peak current increases). There is a range of low duty cycles in which the resistive losses with a pulsed current exceed the losses for the same average current that would result from the charge pump driving a relatively constant output voltage, for example, across a large output capacitor.

In one aspect, in general, operation of a charge pump is controlled to optimize power conversion efficiency by using an adiabatic mode with some operating characteristics and a non-adiabatic mode with other characteristics. The control is implemented by controlling a configurable circuit at the output of the charge pump.

In another aspect, in general, operation of a charge pump is controlled so that resistive power losses are minimized by using an adiabatic mode with relatively high duty cycle (i.e., relatively high output current) and using a non-adiabatic mode with relative low duty cycle (e.g., relatively low output current). In some examples, mode is selected by selectively introducing a compensation capacitor at the output of the charge pump to present a substantially constant voltage.

3

In another aspect, in general, an apparatus a charge pump and a controller coupled to the charge pump. The charge pump has a plurality of switch elements arranged to operate in a plurality cycles, with each cycle being associated with a different configuration of the switch elements. The switch elements are configured to provide charging and discharging paths for a plurality of capacitive elements. The controller has an output for controlling timing of the cycles of the charge pump and one or more sensor inputs for accepting sensor signals characterizing operation of the charge pump and/or operation of peripheral circuits coupled to the charge pump. The controller is configured adjust the timing of the cycles of the charge pump according variation of the one or more sensor inputs within cycles of operation of the charge pump.

In another aspect, in general, an apparatus includes a switched capacitor charge pump configured to provide a voltage conversion between terminals including a high voltage terminal and a low voltage terminal. The apparatus also includes a compensation circuit coupled to a first terminal of the charge pump for driving a load by the charge pump, the compensation circuit providing a capacitance configurably couplable to the first terminal of the charge pump. A controller is coupled to charge pump and the configurable circuit, and has an output for configuring the compensation circuit, and one or more sensor inputs for accepting sensor signals characterizing operation of the charge pump and/or operation of peripheral circuits coupled to the charge pump. The controller is configured to configure the compensation circuit according to the sensor signals to affect efficiency of power conversion between a power source coupled to the charge pump and the load coupled to the charge pump via the configurable circuit.

Aspects may include one or more of the following features.

The controller is configured to couple a selected capacitance to the first terminal to optimize an efficiency of the power conversion.

The one or more sensor signals include a sensor signal that characterizes time variation of a current passing to or from the charge pump via the compensation circuit. In some examples, the sensor signal characterizes a duty cycle of a pulsed current passing to or from the charge pump. In some examples, this current passing to or from the charge pump via the compensation circuit is a current passing between the compensation circuit and a peripheral coupled to the charge pump via the compensation circuit.

The one or more sensor signals include a sensor signal that characterizes a voltage at at least one of the terminals of the charge pump and at the peripheral circuit coupled to the charge pump.

The one or more sensor signals include a sensor signal that characterizes switching frequency of the charge pump.

The controller is configured to determine an operating mode from the sensor signals, and to determine the configuration of the compensation circuit according to the determined mode.

The controller is configured to identify at least a mode having fast switching limit operation of the charge pump and a pulsed current load, and increase the capacitance coupled to the first terminal in said mode.

The controller is configured to identify at least a mode having slow switching limit operation of the charge pump and a pulsed current load with a duty cycle less than a threshold duty cycle, and increase the capacitance coupled to the first terminal in said mode.

4

The apparatus further includes a peripheral circuit that includes a regulator coupled to the compensation circuit. The regulator provides a current-based load via the compensation circuit to charge pump. The controller is configured to determining a configuration of the compensation circuit according to an efficiency of power conversion performed by the charge pump. In some examples, the regulator comprises a Buck converter. In some examples, the charge pump comprises a Series-Parallel charge pump. In some examples, the charge pump comprises a Dickson charge pump.

In another aspect, in general, a method is directed to power regulation using a charge pump coupled to a load using a compensation circuit coupled to a terminal of the charge pump. The method includes configuring a capacitance provided by the compensation circuit to a first terminal of the charge pump. The capacitance is selected according to the sensor signals to affect efficiency of power conversion between a power source coupled to the charge pump and the load coupled to the charge pump via the configurable circuit.

The method may include acquiring the sensor signals. The sensor signals may characterize one or more a time variation of a current passing to or from the charge pump via the compensation circuit, a duty cycle of a current passing between the compensation circuit and a peripheral circuit, a voltage at the first terminal of the charge pump, and a voltage at the peripheral circuit coupled to the charge pump.

One advantage of one or more embodiments is that efficient operation is maintained in varying operating modes of the power converter.

Another advantage of one or more embodiments is that a controller does not have to be preconfigured for a particular use of a charge pump and can adapt to the circuit in which the pump is embedded without further configuration. For example, the controller can adapt to the size of pump capacitors used, type of regulator coupled to the pump, switching frequency of the pump and/or regulator, etc.

Other features and advantages of the invention are apparent from the following description, and from the claims.

DESCRIPTION OF DRAWINGS

- FIG. 1 is a single-phase 1:5 Dickson charge pump;
 FIGS. 2A-B are equivalent circuits of the charge pump of FIG. 1 in two states of operation;
 FIGS. 3 and 4 are circuits having a switchable compensating circuit coupled to the charge pump;
 FIG. 5 is a circuit for measuring a charge pump current;
 FIG. 6 is a schematic illustrating charge transfer during one cycle of the charge pump illustrated in FIG. 4;
 FIGS. 7A-C are graphs of output voltage of the charge pump illustrated in FIG. 4 at different output current and switching frequency conditions; and
 FIG. 8 is a single-phase series-parallel charge pump.

DESCRIPTION

As introduced above, as one example, a charge pump **100** illustrated in FIG. 1 may be operated in an “adiabatic” mode in which one or both of a low-voltage peripheral **110** and a high-voltage peripheral **190** may comprise a current source. For example, Patent Publication WO 2012/151466, published on Nov. 8, 2012, and incorporated herein by reference, describes configurations in which the source and/or load comprise regulating circuits. In particular, in FIGS. 1 and 2A-B, the low-voltage load **110** can effectively comprise a current source rather than a voltage source in an example

of what is referred to as “adiabatic” operation of a charge pump. If the current source maintains a constant current from the charge pump, then currents illustrated in FIG. 2A maintain substantially constant values during the illustrated state. Therefore, the resistive losses in the switches through which the current passes are lower than the resistive loss in the voltage load case, and also substantially independent of the switching frequency and the cycle time T. As in the voltage driven case, there capacitive losses in the switches grow with increasing switching frequency, which suggests that lowering the switching frequency is desirable. However, other factors, which may depend on internal aspects of the charge pump, voltage or current characteristics at the terminals of the charge pump, and/or internal aspects of the peripheral elements, such as the source and/or load, may limit the cycle time (e.g., impose a lower limit on the switching frequency).

Referring to FIG. 3, in a first mode of operation, a load 320 can be considered to comprise a constant current source 312 with an output current 10. In some implementations, the load 320 also includes an output capacitor, which for the analysis below can be considered to be small enough such that current passing to the load 320 can be considered to be substantially constant. As introduced above with reference to FIGS. 2A-B, the charge transfer between capacitors in the charge pump 100 during the alternating states of operation of the charge pump 100 are therefore substantially constant in the adiabatic mode of operation.

Continuing to refer to FIG. 3, a compensation circuit 340 is introduced between the charge pump 100 and the load 320. A switch 344 is controllable to selectively introduce a compensation capacitor 342 to the output of the charge pump 100.

Various factors can affect the efficiency of the power conversion illustrated in FIG. 3, including the voltage of an input voltage source 392, the switching frequency of the charge pump 100, and the output current 10 (or somewhat equivalently the input or output current of the charge pump 100). The efficiency is also dependent on whether or not the compensation capacitor 342 is coupled to the output path via the switch 344. As a general approach, a controller 350 accepts inputs that characterize one or more factors that affect efficiency and outputs a control signal that sets the state of the switch 344 according to whether efficiency is expected to be improved introducing the compensation capacitor versus not. A further discussion of logic implemented by the controller 350 is provided later in this Description.

Referring to FIG. 4, in another example, a configuration of a charge pump 100 has a regulator 320 coupled via a compensation circuit 340 to the low-voltage terminal of a charge pump 100, and a voltage source 392 coupled to the high-voltage terminal of the charge pump 100. The regulator 320 (also referred to below generally interchangeably as a “converter”) illustrated in FIG. 4 is a Buck converter, which consists of switches 322, 324, an inductor 326, and an output capacitor 328. The switches open and close (i.e., present high and low impedance, respectively) in alternating states, such that the switch 322 is open when then the switch 324 is closed, and the switch 322 is closed when the switch 324 is open. These switches operate at a frequency than can be lower, higher, or equal to the switches in the charge pump 100, with a duty cycle defined as the fraction of time that the switch 322 in the regulator 320 is closed. A preferred embodiment is when the switching frequency of the charge pump 100 is lower than the regulator 320. However, in the case the charge pump 100 is at a higher frequency than the

regulator 320, the charge-pump 100 is disabled when the regulator 320 is off (low duty cycle) and the charge-pump 100 is enabled when the regulator 320 is on.

In general, the regulator 320 operates at its highest power efficiency when it operates at its highest duty cycle. In some examples, a controller of the regulator (not shown) adjusts the duty cycle in a conventional manner to achieve a desired output voltage VO. During the cycles of the regulator 320 in which the switch 322 is closed, the current passing from the charge pump 100 to the regulator 320 is effectively constant, equal to the current through the inductor 326. Assuming that the switching frequency of the regulator 320 is substantially higher than the switching frequency of the charge pump 100, the charge pump 100 can be considered to be driven by a pulsed current source with an average current equal to the duty cycle times the inductor current.

Note that as introduced above, in situations in which the regulator 320 sinks a pulsed current, then for a particular average current, the resistive energy loss generally increases as the duty cycle of the current decreases, approximately inversely with the duty cycle. There is a range of low duty cycles, and thereby high peak current relative to the average current, in which the resistive losses with a pulsed current exceed the losses for the same average current that would result from the charge pump 100 driving a relatively constant output voltage, for example, across a large output capacitor. Therefore, for a selected range of low duty cycles, the controller 350 closes the switch 344 and introduces a relatively large compensation capacitor 342 at the output of the charge pump 100. The result is that the charge pump 100 is presented with a substantially constant voltage, and therefore operates in a substantially “non-adiabatic” mode. Therefore, the controller 350 is effectively responsive to the output voltage because the duty cycle is approximately proportional to the output voltage. Thereby operating the charge pump 100 in an adiabatic mode at high output voltage and in a non-adiabatic mode at low output voltage; and switches between the adiabatic and non-adiabatic modes at a threshold duty cycle to maintain an optimum efficiency of the overall power conversion.

Examples of control logic implemented in the controller 350 in configurations such as those illustrated in FIGS. 4 and 5 can be under in view of the following discussion.

In general, a charge pump can operate in one of two unique operating conditions, or in the region in between them. In a slow switching limit (SSL) regime the capacitor currents in the charge pump have the time to settle to their final values and capacitor voltages experience significant change in magnitude from beginning to end of a cycle of the charge pump operation. In the fast switching limit (FSL) regime, the capacitors do not reach equilibrium during a cycle of the charge pump operation, for instance, due to a combination of one or more of high capacitances, high switching frequency, and high switch resistances.

Another factor relates to the capacitance at the output of the charge pump 100, which in the circuits of FIG. 4 can be increased by closing the switch 344 to add the compensation capacitor 342 to the output. For small output capacitance, the output current of the charge pump 100 is effectively set by the pulsed current characteristic of the regulator 320. As discussed above, for a given average current, the resistive power losses in the pulsed current case are approximately inversely proportional the duty cycle.

For large output capacitance, the RMS of the output current of the charge pump 100 is effectively determined by the equilibration of the internal capacitors of the charge pump 100 with the compensation capacitor 342 and the

regulator **320**. For a given average current, this resistive power loss is approximately inversely proportional to the square of the peak-to-peak voltage across the internal capacitors in the charge pump **100**.

Four combinations of FSL/SSL and constant/pulsed IO modes of operation are possible. In some examples, each of these four modes is affected in different ways based on the addition of a compensation capacitor **342** as shown in FIGS. **3** and **4**.

Case one: In FSL mode, with constant output current IO as in FIG. **3**, introduction of the compensation capacitor **342** does not substantially affect conversion efficiency.

Case two: In FSL mode with pulsed output current as in FIG. **4**, efficiency increases when the compensation capacitor **342** is introduced, thereby reducing the RMS current seen by the charge pump **100**.

Case three: In SSL mode, with constant output current IO as in FIG. **3**, efficiency generally increases without introduction of the compensation capacitor **342**, thereby yielding adiabatic operation.

Case four: In SSL mode, with pulsed load current as in FIG. **4**, efficiency depends on the relation between the average output current, the duty cycle, and how far the charge pump **100** is operating from the SSL/FSL boundary. For example, at low duty cycle, efficiency generally increases with introduction of the compensation capacitor **342**, thereby yielding non-adiabatic operation. In contrast, at high duty cycle, efficiency generally increases without introduction of the compensation capacitor **342**, thereby yielding adiabatic operation. Furthermore, when the charge pump **100** is in SSL mode, the farther from the SSL/FSL boundary, the lower the duty cycle at which the efficiency trend reverses.

Depending on the relative values of charge pump capacitors, switch resistances and frequency, it is possible that the charge pump operate in a regime between FSL and SSL. In this case, there is effectively a transition point between case four and case two at which the compensation capacitor is introduced according to the overall efficiency of the conversion. As described above, knowledge of the average charging current and its duty cycle is necessary in case four for determining if introduction of the compensation capacitor will improve efficiency.

In some implementations, the controller **350** does not have access to signals or data that directly provide the mode in which the power conversion is operating. One approach is for the controller to receive a sensor signal that represents the input current of the charge pump, and infer the operating mode from that sensor signal.

As an example, a sensor signal determined as a voltage across the switch at the high voltage terminal of the converter (e.g., the switch between source **109** **190** and the capacitor **C4** in FIG. **1**) can be used to represent the current because when the switch is closed, the voltage is the current times the switch resistance.

An alternative circuit shown in FIG. **5** provides a scaled version of the input current IIN. The input switch **510**, with closed resistance R is put in parallel with a second switch with closed resistance kR, for example, fabricated as a CMOS switch where the factor k depends on the geometry of the switch. When the switches are closed the differential amplifier **530** controls the gate voltage of a transistor **540** such that the voltage drop across the two switches are equal, thereby yielding the scaled input current IIN/k, which can be used to form a sensor input signal for the controller.

The sensed input current can be used to determine whether the compensation capacitor should be switched in, for example, according to a transition between case four and case two described above.

One possible method for determining the operation mode of the charge pump **100** consists of taking two or more measurements of the input current IIN and establishing that the difference between the values of consecutive samples is substantially zero for SSL mode, or is above a pre-determined threshold for FSL mode.

Another method is to measure the difference in the voltage of a capacitor in the charge pump **100**. Once the input current IIN is known, the controller **350** can infer the operating mode based upon the voltage ripple on the capacitor over a full cycle. Note that the controller **350** does not necessarily know the particular sizes of capacitors that are used in the charge pump **100**, for example, because the capacitors are discrete capacitors that are not predetermined. However, the capacitor values can be inferred from knowledge of the current, voltage ripple, and frequency, thereby allowing the controller **350** to determine whether the charge pump **100** is operating in the FSL or SSL mode. The controller **350** can then select adiabatic or non-adiabatic charging by controlling the switch **344** to selectively introduce the compensation capacitor **342**.

Other controller logic is used in other implementations. For example, an alternative is for the controller to measure efficiency given by:

$$\eta = VO / (N * VIN)$$

where η is the efficiency, VO is the measured converter output voltage, VIN is the measured converter input voltage, and N is the charge pump conversion ratio.

The controller directly measures the effect of selecting adiabatic vs. non-adiabatic charging on converter efficiency by comparing the average value of the output voltage VO over a complete charge pump cycle.

Other controller logic uses combinations of the approaches described above. For instance, the controller can confirm that the assessment of charge pump operating mode and estimation of efficiency increase by changing the charge pump charging mode.

A traditional method for operating the charge pump **100** is at a fixed frequency in which the switching occurs independently of the load requirement (i.e., the switches in FIG. **1** operate on a fixed time period). Referring to FIG. **6**, during one cycle of the switching of the charge pump **100**, a current II discharges from the capacitor C1 and a current IP discharges other of the capacitors in the charge pump **100**. For a particular intermediate current IX, the longer the cycle time T, the larger the drop in voltage provided by the capacitor C1. A consequence of this is that the switching frequency generally limits the maximum intermediate current IX because the switching frequency for a particular load determines the extent of voltage excursions, and in some cases current excursions (i.e., deviations, variation), at various points and between various points within the charge pump **100** and at its terminals. For a particular design of charge pump **100**, or characteristics of load and/or source of the charge pump **100**, there are operational limits on the excursions.

Referring to FIGS. **7A-C**, the intermediate voltage VX of the charge pump **100** is shown in various current and timing examples. Referring to FIG. **7A**, at a particular intermediate current IX, the intermediate voltage VX generally follows a saw-tooth pattern such that it increases rapidly at the start of each state, and then generally falls at a constant rate.

Consequently, the rate of voltage drop depends on the output current I_O . At a particular output current I_O and switching time, a total ripple voltage δ results, and a margin over the output voltage V_O is maintained, as illustrated in FIG. 7A. (Note that the graphs shown in FIGS. 7A-B do not necessarily show certain features, including certain transients at the state transition times, and related to the high frequency switching of the regulator **320**; however these approximations are sufficient for the discussion below).

Referring to FIG. 7B, in the output current I_O in the circuit in FIG. 4 increases, for instance by approximately a factor of two, the ripple of the intermediate voltage V_X increases, and the minimum intermediate voltage V_{MIN} decreases and therefore for a constant output voltage V_O the margin (i.e. across inductor **316**) in the regulator **320** decreases. However, if the voltage margin decreases below a threshold (greater than zero), the operation of the regulator **320** is impeded.

Referring to FIG. 7C, to provide the regulator **320** with a sufficient voltage margin the switching frequency can be increased (and cycle time decreased), for example, to restore the margin shown in FIG. 7A. Generally, in this example, doubling the switching frequency compensates for the doubling of the output current I_O . However more generally, such direct relationships between output current I_O or other sensed signals and switching frequency are not necessary.

In general, a number of embodiments adapt the switching frequency of the charge pump **100** or determine the specific switching time instants based on measurements within the charge pump **100** and optionally in the low-voltage and/or high-voltage peripherals coupled to the terminals of the charge pump **100**.

In a feedback arrangement shown in FIG. 4, the controller **350** adapts (e.g., in a closed loop or open loop arrangement) the switching frequency. For any current up to a maximum rated current with a fixed switching frequency, the charge pump **100** generally operates at a switching frequency lower than (i.e., switching times greater than) a particular minimum frequency determined by that maximum rated current. Therefore, when the current is below the maximum, capacitive losses may be reduced as compared to operating the charge pump **100** at the minimum switching frequency determined by the maximum rated current.

One approach to implementing this feedback operation is to monitor the intermediate voltage V_X and adapt operation of the charge pump to maintain V_{MIN} above a fixed minimum threshold. One way to adapt the operation of the charge pump **100** is to adapt a frequency for the switching of the charge pump **100** in a feedback configuration such that as the minimum intermediate voltage V_{MIN} approaches the threshold, the switching frequency is increased, and as it rises above the threshold the switching frequency is reduced. One way to set the fixed minimum threshold voltage is as the maximum (e.g., rated) output voltage V_O of the regulator **320**, plus a minimum desired margin above that voltage. As introduced above, the minimum margin (greater than zero) is required to allow a sufficient voltage differential ($V_X - V_O$) to charge (i.e., increase its current and thereby store energy in) the inductor **326** at a reasonable rate. The minimum margin is also related to a guarantee on a maximum duty cycle of the regulator **320**.

A second approach adapts to the desired output voltage V_O of the regulator **320**. For example, the regulator **320** may have a maximum output voltage V_O rating equal to 3.3 volts. With a desired minimum margin of 0.7 volts, the switching of the charge pump **100** would be controlled to

keep the intermediate voltage V_X above 4.0 volts. However, if the converter is actually being operated with an output voltage V_O of 1.2volts, then the switching frequency of the charge pump **100** can be reduced to the point that the intermediate voltage V_X falls as low as 1.9 volts and still maintain the desired margin of 0.7 volts.

In a variant of the second approach, rather than monitoring the actual output voltage V_O , an average of the voltage between the switches **312**, **314** may be used as an estimate of the output voltage V_O .

In yet another variant, the switching frequency of the charge pump **100** is adapted to maintain the intermediate voltage V_X below a threshold value. For example, the threshold can be set such that the intermediate voltage V_X lowers or rises a specific percentage below or above the average of the intermediate voltage V_X (e.g. 10%). This threshold would track the intermediate voltage V_X . Similarly, a ripple relative to an absolute ripple voltage (e.g. 100 mV) can be used to determine the switching frequency.

Note also that the voltage ripple on the output voltage V_O depends (not necessarily linearly) on the voltage ripple on the intermediate voltage V_X , and in some examples the switching frequency of the charge pump **100** is increased to reduce the ripple on the output voltage V_O to a desired value.

Other examples measure variation in internal voltages in the charge pump **100**, for example, measuring the ripple (e.g., absolute or relative to the maximum or average) across any of the capacitors C_1 through C_4 . Such ripple values can be used instead of using the ripple on the intermediate voltage V_X in controlling the switching frequency of the charge pump **100**. Other internal voltages and/or currents can be used, for example, voltages across switches or other circuit elements (e.g., transistor switches), and the switching frequency can be adjusted to avoid exceeding rated voltages across the circuit elements.

In addition to the desired and/or actual output voltages or currents of the regulator **320** being provided as a control input to the controller **350**, which adapts the switching frequency of the charge pump **100**, other control inputs can also be used. One such alternative is to measure the duty cycle of the regulator **320**. Note that variation in the intermediate voltage V_X affects variation in current in the Buck converter's inductor **326**. For example, the average of the intermediate voltage V_X is generally reduced downward with reducing of the switching frequency of the charge pump **100**. With the reduction of the average output voltage V_O , the duty cycle of the regulator **320** generally increases to maintain the desired output voltage V_O . Increasing the duty cycle generally increases the efficiency of a Buck converter. So reducing the switching frequency of the charge pump **100** can increase the efficiency of the regulator **320**.

It should be understood that although the various signals used to control the switching frequency may be described above separately, the switch frequency can be controlled according to a combination of multiple of the signals (e.g., a linear combination, nonlinear combination using maximum and minimum functions, etc.). In some examples, an approximation of an efficiency of the charge pump is optimized.

The discussion above focuses on using the controller **350** to adjust the switching frequency of the charge pump **100** in relatively slow scale feedback arrangement. The various signals described above as inputs to the controller **350** can be used on an asynchronous operating mode in which the times at which the charge pump **100** switches between cycles is determined according to the measurements. As one

example, during state one as illustrated in FIG. 6, the intermediate voltage VX falls, and when VX-VO reaches a threshold value (e.g., 0.7 volts), the switches in the charge pump 100 are switched together from state one to state two. Upon the transition to state two, the intermediate voltage VX rises and then again begins to fall, and when VX-VO again reaches the threshold value, the switches in the charge pump 100 are switched together from state two back to state one.

In some examples, a combination of asynchronous switching as well as limits or control on average switching frequency for the charge pump are used.

Unfortunately, as the intermediate current IX decreases the switching frequency of the charge pump 100 decreases as well. This can be problematic at low currents because the frequency could drop below 20 kHz, which is the audible limit for human hearing. Therefore, once the frequency has dropped below a certain limit, a switch 344 closes and introduces a compensation capacitor 342. This forces the converter into non-adiabatic operation allowing the frequency to be fixed to a lower bound (e.g. 20 kHz). Consequently, the compensation capacitor 342 is introduced when either the duty cycle is low or when the output current IO is low.

Note that the examples above concentrate on a compensation circuit that permits selectively switching a compensation capacitor of a certain fixed capacitance onto the output of the charge pump. More generally, a wide variety of compensation circuits can be controlled. One example is a variable capacitor, which can be implemented as a switched capacitor bank, for example, with power of two capacitances. The optimal choice of capacitance generally depends on the combination of operating conditions (e.g., average current, pulsed current duty cycle, etc.) and/or circuit configurations (e.g., type of regulators, sources, load, pump capacitors), with the determining of the desired capacitance being based on prior simulation or measurement or based on a mechanism that adjusts the capacitance, for instance, in a feedback arrangement. In addition, other forms of compensation circuits, for example, introducing inductance on the output path, networks of elements (e.g., capacitors, inductors).

Note that the description focuses on a specific example of a charge pump. Many other configurations of charge pumps, including Dickson pumps with additional stages or parallel phases, and other configurations of charge pumps (e.g., series-parallel), can be controlled according to the same approach. In addition, the peripherals at the high and/or low voltage terminals are not necessarily regulators, or necessarily maintain substantially constant current. Furthermore, the approaches described are applicable to configurations in which a high voltage supply provides energy to a low voltage load, or in which a low voltage supply provides energy to a high voltage load, or bidirectional configurations in which energy may flow in either direction between the high and the low voltage terminal of the charge pump. It should also be understood that the switching elements can be implemented in a variety of ways, including using Field Effect Transistors (FETs) or diodes, and the capacitors may be integrated into a monolithic device with the switch elements and/or may be external using discrete components. Similarly, at least some of the regulator circuit may in some examples be integrated with some or all of the charge pump in an integrated device.

Implementations of the approaches described above may be integrated into an integrated circuit that includes the switching transistors of the charge pump, either with discrete/off-chip capacitors or integrated capacitors. In other

implementations, the controller that determines the switching frequency of the charge pump and/or the compensation circuit may be implemented in a different device than the charge pump. The controller can use application specific circuitry, a programmable processor/controller, or both. In the programmable case, the implementation may include software, stored in a tangible machined readable medium (e.g., ROM, etc.) that includes instructions for implementing the control procedures described above.

It is to be understood that the foregoing description is intended to illustrate and not to limit the scope of the invention, which is defined by the scope of the appended claims. Other embodiments are within the scope of the following claims.

What is claimed is:

1. An apparatus comprising a switched-capacitor charge pump configured to provide voltage conversion between first and second terminals thereof, a compensation circuit coupled to a first terminal of said charge pump, said compensation circuit having a first configuration and a second configuration, wherein, in said first configuration, said first terminal of said charge pump couples to a capacitance, wherein, in said second configuration, said capacitance is decoupled from said first terminal of said charge pump, and a controller *circuit* coupled to said charge pump and said compensation circuit, said controller *circuit* comprising an output for configuring said compensation circuit, and a first sensor input for accepting a first sensor-signal that, at least in part, characterizes operation of a circuit selected from the group consisting of said charge pump and a peripheral circuit directly coupled to said charge pump, wherein said controller *circuit* is configured to configure said compensation circuit based at least in part on said first sensor-signal to promote efficiency of power conversion between a power source coupled to said charge pump and a load coupled to said charge pump via said compensation circuit.

2. The apparatus of claim 1, wherein said first sensor-signal characterizes a voltage at said peripheral circuit.

3. The apparatus of claim 1, wherein said charge pump comprises a capacitor, and wherein said first sensor-signal characterizes a voltage across said capacitor.

4. The apparatus of claim 1, wherein at least some current that passes from said charge pump to said compensation circuit continues through to an inductor in said peripheral circuit.

5. The apparatus of claim 1, wherein said controller *circuit* comprises a second sensor input for accepting a second sensor-signal that, at least in part, characterizes operation of said circuit.

6. The apparatus of claim 1, wherein said controller *circuit* is configured to determine an operating mode at least in part based on said first sensor-signal, and to determine said configuration of said compensation circuit according to said determined mode.

7. The apparatus of claim 1, wherein said first sensor-signal characterizes a voltage at said first terminal.

8. The apparatus of claim 1, wherein said controller *circuit* is configured to couple said first terminal to said capacitance at times that optimize power-conversion efficiency.

9. The apparatus of claim 1, wherein said first sensor-signal characterizes said switching frequency of said charge pump.

10. The apparatus of claim 1, wherein said first sensor-signal characterizes a voltage at said second terminal.

11. The apparatus of claim 1, wherein said charge pump comprises a series-parallel charge pump.

13

12. The apparatus of claim 1, wherein said first sensor-signal characterizes a duty cycle of a pulsed current passing to or from said charge pump.

13. The apparatus of claim 1, wherein said first sensor-signal characterizes an average of a current passing to said charge pump.

14. The apparatus of claim 1, wherein said peripheral circuit comprises an inductor that is coupled to said compensation circuit.

15. The apparatus of claim 1, wherein said peripheral circuit is coupled between said compensation circuit and said first terminal and wherein said peripheral circuit comprises an inductor, switches, and an output capacitor, wherein control of said switches of said peripheral circuit adjusts a voltage across said output capacitor.

16. The apparatus of claim 1, wherein said peripheral circuit, which is coupled to said compensation circuit, comprises a switch that alternates between being open and being closed, wherein adjustment of a fraction of time during which said switch is closed.

17. The apparatus of claim 1, wherein said peripheral circuit is coupled between said compensation circuit and one of said first and second terminals and wherein said peripheral circuit comprises an inductor that is selectively connected to and disconnected from said compensation circuit.

18. The apparatus of claim 1, further comprising a regulator, wherein said regulator is coupled to said compensation circuit.

19. The apparatus of claim 1, wherein said compensation circuit is coupled to a regulator that achieves a selected output voltage by adjustment of a duty cycle thereof.

20. The apparatus of claim 1, further comprising a regulator, wherein said regulator is coupled between said compensation circuit and said high-voltage terminal.

21. The apparatus of claim 1, further comprising a regulator, wherein said regulator is coupled between said compensation circuit and said low-voltage terminal.

22. A method comprising carrying out voltage conversion, wherein carrying out voltage conversion comprises receiving a sensor signal that characterizes, at least in part, operation of a circuit that is selected from the group consisting of a switched-capacitor charge pump that provides voltage conversion between first and second terminals

14

thereof and a peripheral circuit, wherein said peripheral circuit is directly connected to said switched capacitor charge pump, and based at least in part on said sensor signal, causing a compensation circuit that is coupled to a first terminal of said charge pump to transition between coupling and decoupling a capacitance from said first terminal, and wherein causing said compensating circuit to transition comprises causing said compensation circuit to transition at times that promote efficiency of power conversion between a power source coupled to said charge pump and a load coupled to said charge pump via said compensation circuit.

23. An apparatus comprising a power converter, said power converter comprising first and second terminals, said power converter being configured to cause a second voltage to be maintained at said second terminal in response to presence of a first voltage presented at said first terminal, wherein said power converter further comprises a compensation circuit, a controller *circuit*, a switching network, and capacitors, wherein said switching network interconnects said capacitors, wherein, as a result of transitioning between first and second states thereof, said switching network causes said capacitors to transition between corresponding first and second arrangements, wherein as a result of a transition, electrical charge propagates between said capacitors, wherein said controller *circuit* is connected to receive, from at least one of a first circuit and a second circuit, information indicative of an extent to which said propagation of said electrical charge between said capacitors results in energy loss, wherein said controller *circuit* is configured to cause said compensation circuit to transition between a first configuration and a second configuration based on said information, said transition being one that reduces said extent and that causes a capacitance of said compensation circuit to be switched into or out of communication with said first circuit, wherein said first circuit is a circuit that is formed by said switching network and said capacitors, and wherein said second circuit is a circuit that is directly connected to a circuit that is formed by said capacitors and said switching network.

24. The apparatus of claim 23, wherein said second circuit comprises an inductor.

* * * * *