

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 June 2016 (30.06.2016)

(10) International Publication Number
WO 2016/101200 A1

(51) International Patent Classification:
A24F 47/00 (2006.01)

(21) International Application Number:
PCT/CN2014/094906

(22) International Filing Date:
25 December 2014 (25.12.2014)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: FONTEM HOLDINGS 2 B.V. [NL/NL]; Barbara Strozzi laan 101, 12th Floor, 1083 HN Amsterdam (NL).

(72) Inventor: HON, Lik; Room 2628, 26th Floor, Tower D, Vantone Center, No. 6 Chaowai Avenue, Chaoyang District, Beijing 100020 (CN).

(74) Agent: SBZL IP LAW OFFICE; Suite 901, 9th floor, No. 1 Zhichun Road, Haidian District, Beijing 100083 (CN).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DYNAMIC OUTPUT POWER MANAGEMENT FOR ELECTRONIC SMOKING DEVICE

(57) Abstract: A dynamic output power management unit for a heating circuit (100) of an electronic smoking device is disclosed, the heating circuit (100) having a heating element (10) connected to a power source (20) via a first switching element (30), the unit having at least one voltage detection device to detect voltage values at various points of the heating circuit (100); and a controller (2) configured to deriving a resistance of the heating element (10), estimating a discharge time or a power consumption value of the power source (20) such that an energy converted in a period of time is substantially identical to a predetermined energy conversion value for a same period of time.



WO 2016/101200 A1

DYNAMIC OUTPUT POWER MANAGEMENT FOR ELECTRONIC SMOKING DEVICE

TECHNICAL FIELD

The present invention relates to a output power management unit (PMU) for
5 electronic smoking devices.

BACKGROUND OF THE INVENTION

An electronic smoking device, such as an electronic cigarette, usually has an heating element for vaporizing liquid and a power supply for providing power to the heating element. In some cases, the heating element can be a component of an
10 atomizer. Providing a consistent energy supply to the heating element improves the consistency of each puff. Each puff on average takes about the same time (e.g. 2.5 seconds/puff). A consistent energy supply to the heating element for each puff may be achieved via consistent power output of the power supply during this interval.

Typically, the power supply is a disposable or rechargeable battery with working
15 voltage decreasing over its useful life. The decreasing voltage may result in inconsistent puffs. Moreover, the heating elements may have resistances that vary in operation due to factors, such as the amount of e-solution, the heating element contacts, and the operating temperature.

Therefore, there is a need for a dynamic output power management unit to
20 provide a stable output power in response to the changing capacity of the battery, and/or the changing resistance of the heating element.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic drawing of an electronic cigarette or similar vaporizing device.

Fig.1A is a diagram showing a heating circuit of an electronic cigarette including a dynamic output power management unit;

Fig.1B is a diagram showing another embodiment of a heating circuit of an electronic cigarette including a dynamic output power management unit;

5 Fig.2 is a diagram showing the discharging time of a power supply when the heating element has a constant resistance;

Fig.3 is a diagram showing the discharging time of a power supply when the heating element has a variable resistance;

10 Fig.4 is a diagram showing the discharging time of another power supply when the heating element has a variable resistance;

Fig.5 is a block diagram illustrating the dynamic output power management unit in Fig.1A;

Fig.6 is a block diagram illustrating the dynamic output power management unit in Fig.1B;

15 Fig.7A is a flowchart of a control method by the power management unit illustrated in Fig.5;

Fig.7B is a flowchart of a control mechanism implemented by the power management unit illustrated in Fig.5 according another embodiment of the invention;

20 Fig.8A is a flowchart of an alternative control method by the power management unit illustrated in Fig.6;

Fig.8B is a flowchart of an alternative control method by the power management unit illustrated in Fig.6; and

Fig.9 is a block diagram illustrating another example of the dynamic output power management unit in Fig.1B.

DETAILED DESCRIPTION

A dynamic output power management unit for an electronic cigarette, cigar pipe etc. provides a substantially constant amount of vaporized liquid in a predetermined time interval, for example, the duration of one puff. This can increase compatibility of an electronic cigarette to various types of heating elements, and /or may compensate for dropping output voltage of the power source.

For conventional electronic cigarettes, a heating circuit typically includes a heating element connected to the power source via a switching element which is turned on when a puff is detected and is still on for a constant time of time for each puff. In contrast, with the present PMU the discharging time of the power source is adjusted dynamically to obtain more consistent vaporization over the same time interval. Consequently a more consistent amount of aerosol may be inhaled by a user during each puff.

To compensate for an output voltage of the power source which drops over the discharging time, waveform control techniques, for example, PWM (pulse width modulation) technique maybe used to control at least one switching element within the heating circuit, to control the active time of the heating circuit. A waveform generator can be used to generate the desired control waveform. The waveform generator can be a PWM waveform generator within a PWM controller or PWM module in a microcontroller, for example, a MOSFET. A high-time and low-time ratio is determined, which is then used by the PWM controller for controlling the ON/OFF switching of the heating circuit.

In designs where the resistance of the heating element changes as the working temperature changes, the instantaneous resistance of the heating element may be measured in real-time by incorporating a reference component, for example a reference resistor, into the heating circuit to control the active time of the heating circuit.

Changing resistance of the heating element may change the amount of aerosol generated during the process of vaporization, resulting in variation in the amount of the

resulting in variations in the amount or character of the vapor generated, the nicotine for example, need to be controlled within a particular range so that human being's throat will not be irritated or certain administrative regulatory requirements could be meet. Therefore, another benefit of the dynamic output power management technique is that it can be compatible to various types of heating elements, for example, metal coils and heating fiber among others. Especially for heating element made from fibers, carbon fiber bundles for example, of which a precise resistance cannot be feasibly maintained for all the carbon fiber bundles in a same batch, the dynamic output management technique is desirable since it can adjust the output power within a range in responsive to carbon fiber bundles with resistance within a range of, for example 1.5 ohms. This would alleviate the burden of the manufacturing process of the carbon fiber bundle and lower the cost of the carbon fiber bundles as a result.

Fig. 1 shows an example of an electronic cigarette which may have a size and shape generally comparable to a real tobacco cigarette, typically about 100 mm with a 7.5 mm diameter, although lengths may range from 70 to 150 or 180 mm, and diameters from 5 to 20 mm. A power source or battery 20 is contained within the electronic cigarette housing, which is optionally divided into a first housing 8 and a second housing 9. One or more inlets 4 are provided in the housing, and an outlet 14 is located at the back end of the electronic cigarette. An electronic controller 2 including the PMU is electrically connected to the battery and to the heating element 10, which may be in the form of a wire coil. A liquid holding container or space 15 may surround a channel 12 extending from the heating element 10 to the outlet 14.

Referring to Fig.1A, a heating circuit 100 includes the heating element 10, the power source 20, and a switching element 30 connected between the heating element 10 and the power source 20. The heating coil can be treated or remain substantially dry during working so that it has a substantially constant resistance at the working temperature range. The first switching element 30 can be a first MOSFET switch, which is configurable between an On state and an OFF state by a first control waveform. The power source 20 can be a common battery, for example, a Nickel-Hydrogen rechargeable battery, a Lithium rechargeable battery, a Lithium-manganese disposable

battery, or a zinc- manganese disposable battery. The first control waveform can be generated by a waveform generator which can be included in the power management unit 200 or can be implemented by a dedicated circuitry or by a processor or a controller implementing functions.

5 Fig.5 shows an alternative embodiment where the PMU 200 has at least one voltage detector 201 for detecting output voltage of the power source 20. A discharging time estimation device 202 estimates the discharging time of the power source in the duration of a puff based on the output voltage detected and a resistance of the heating element stored in a memory device 203. A waveform pattern deriving device 204
10 determines the hightime and lowtime ratio of the first control waveform based on the estimated discharging time and a predetermined power consumption P and a time a puff normally lasts t_p stored in the memory. A waveform generator 205 generates first control waveform according to the pattern determined.

As illustrated in Fig.7A, at step S101 detection of the working voltage of the
15 power supply can be done at the beginning of each puff to derive the time the heating element should be powered. The predetermined power consumption P and the time a puff normally lasts t_p are known parameters and can be stored in advance within the memory device 203, for example, registers within a microcontroller.

The energy consumption of the heating element for one puff is estimated based
20 on the resistance of the heating element using Equation 1, which is then used at step 102 for deriving a period of time that needed for providing the heating element with the desired energy:

$$\text{Equation 1: } P \times t_p / t_{h-p} = V^2 / R_h \text{ or } t_{h-p} / t_p = P \times R_h / V^2 ;$$

wherein P is a predetermined power consumption of the heating element for one
25 puff; t_{h-p} is the time of the heating element should be powered on; t_p is the time a puff normally last; V is the working voltage of the power supply; and R_h is the resistance of the heating element.

With the estimated time that the heating element is to be powered, at step S103 a waveform pattern can be derived.

For example, the derived t_{h-p} can be equal to or greater than the duration of a puff t_p . In this circumstances, the first MOSFET switch 30 can be maintained at the OFF state during the entire puff duration. The output of the power source 20 that applied onto the heating element 10 in this puff then presents in the form of a DC output.

In other examples, the derived t_{h-p} can be smaller than the duration of each puff t_p . In this case, the first MOSFET switch 30 can be configured according to different control waveforms of different hightime and lowtime ratios, to reflect the ratio of t_{h-p} to t_p .

A waveform device, for example the waveform generator 205 is then used at step S104 to generate the first control waveform according to the derived waveform pattern.

In a further embodiment, as illustrated in Fig.7B, a puff can be divided into multiple interval cycles, for example N interval cycles, each cycle t_c will last for a time of $t_c = t_p/N$, S201. Working voltage of the power source can be slightly different in the respective interval cycles and discharging time of the power source for each interval cycle can be derived accordingly based on detection of the working voltage at the beginning of each interval cycle S202. Similar algorithms as described above can be applied to each cycle to determine the time the heating element should be powered for the duration of t_c . The time of the heating element should be powered for each cycle t'_{h-p} can be derived at step S203 from Equation 2:

$$\text{Equation 2: } t'_{h-c}/t_c = P \times R_h/V^2;$$

wherein P is a predetermined power consumption of the heating element for one interval cycle, and the predetermined power consumption for one interval cycle can be a result of the predetermined power consumption for a cycle divided by the number of interval cycles.

Similarly, with the estimated time that the heating element is to be powered at step S204, a waveform pattern can be derived.

The derived t'_{h-p} can be equal to or greater than the duration of an interval cycle t_c . The first MOSFET switch 30 can thus be maintained at the OFF state during the entire interval cycle. The output of the power source 20 applied to the heating element 10 in this interval cycle is in the form of a DC output.

5 In other examples, the derived t'_{h-p} can be smaller than the duration of each puff t_c , and the first MOSFET switch 30 can be configured according to different control waveforms of different hightime and lowtime ratios, to reflect the ratio of t'_{h-p} to t_c . In accordance with this step, energy converted in a period of time is substantially identical to a predetermined energy conversion value for a same period of time.

10 A waveform device, for example the waveform generator 205 is then used in step S205 to generate the first control waveform according to the derived waveform pattern. The process is repeated until waveforms for all interval cycles of the puff are generated. Bipolar transistors and diodes can also be used as switching elements for activating or deactivating the heating circuit instead of using MOSFET's as switching elements

15 The first control waveform can be a PWM (Pulse Width Modulation) waveform and the waveform generator can be a PWM waveform generator. The PWM waveform generator can be part of a microprocessor or part of a PWM controller.

The design in Fig.1B includes the elements of Fig.1A and further includes a reference element 40, for example a reference resistor or a set of reference resistors
20 connected in series or in parallel and having a substantially constant resistance value. The reference element 40 is connected in series with the heating element 10 and disconnected from the heating circuit via a second switching element 50, for example a second MOSFET switch which is configurable between an On state and an OFF state by a second control waveform. The reference resistor 40 has a known resistance R_f that
25 is consistent over the working temperature and working time of the electronic cigarette.

A block diagram of the power management unit 200 of Fig.1B is illustrated in Fig.6. The unit 200 has at least one voltage detector 201 for detecting an output voltage of the power source 20 and/or a voltage drop across the reference resistor, and/or a

voltage drop across the heating element. A heating element resistance calculation unit 206 calculates the instantaneous resistance or mean value of the resistance of the heating element based on the detected output voltage of the power source and/or the voltage drop across the reference resistor and/or the voltage drop across the heating element, and a resistance value of the reference resistor stored within a memory device 203. A discharging time estimation device 202 estimates the discharging time of the power source in the duration of a puff based on the output voltage detected and the calculated resistance of the heating element. A waveform pattern deriving device 204 determines the hightime and lowtime ratio of the first control waveform based on the estimated discharging time and a predetermined power consumption P and a time a puff normally lasts t_p stored in the memory 203. A waveform generator 205 generates the first control waveform according to the pattern determined.

To detect an output voltage of a power source, and/or a voltage drop across a reference resistor and/or a voltage drop across a heating element 10, the first MOSFET switch 30 is configured to the ON state and the second MOSFET switch 50 is configured to the OFF state. The power source 20, the reference resistor 40 and the heating element 10 are connected as a closed circuit. As illustrated in Fig.8A, at step S301 detection of the working voltage of the power source 20 and/or the voltage drop across the heating element 10 are performed. The instantaneous resistance can then be derived at step S302 by calculating with reference to the resistance of the reference resistor 40 and the voltages measured using Equation 3.

$$\text{Equation 3: } R_h = V_2 \times R_f / (V_1 - V_2);$$

wherein R_h is the instantaneous resistance of the heating element; R_f is the resistance of the reference resistor; V_1 is the working voltage of the DC power source; and V_2 is the voltage drop across the heating element.

Alternatively or in addition, at step S302 voltage drop across the reference resistor 40 can be detected for deriving the instantaneous resistance of the heating element 10. Equation 3 can in turn be slightly adjusted to involve the voltage drop of the reference resistor 40 instead of the output voltage of the power source 20.

5 The measurement and calculation of the instantaneous resistance of the heating element can be repeated, and a mean value of can be derived from the result of the repeated calculation results and can be used for further processing.

After the instantaneous resistance or the mean resistance of the heating element is calculated. An output voltage of the power source 20 is detected again with the first
10 MOSFET switch in the OFF state and the second MOSFET switch in the ON state. A discharging time of the power source for one puff is then estimated at step S303 based on the calculated resistance of the heating element and the newly detected output voltage of the power source using Equation 1. After the discharging time is estimated, at step S304 a waveform pattern can be determined and control waveforms can be
15 generated at step S305.

Likewise, in this embodiment, as illustrated in Fig.8B, a puff can also be divided into multiple interval cycles, for example N interval cycles, each cycle t_c lasting for a time of $t_c = t_p/N$, S401. Equation 2 can again be used to derive the time of the heating element that should be powered for each cycle.

20 At a beginning of a first time interval, the first MOSFET switch 30 is ON and the second MOSFET switch 50 is OFF. Voltage drop across the reference resistor 40 and the output voltage of the power source are then detected at step S402. The instantaneous resistance of the heating element 10 can then be derived from Equation 3 at step S403.

25 After the instantaneous resistance of the heating element is derived, the first MOSFET switch 20 is configured to the OFF state and the second MOSFET resistor 50 is configured to the ON state whereby the reference resistor 40 is disconnected from the heating circuit 100. The output voltage V of the power source 20 is then detected again

and the discharging time of the power source 20, that is, the time that the first MOSFET switch 20 needs to be maintained at the OFF state in the interval cycle for a desired energy conversion at the heating element, is derived according to Equation 2 at step S404.

5 The time that the first MOSFET switch 30 should be maintained at the OFF state is then derived for each interval cycle following the same process as mentioned above. In some embodiments, the instantaneous resistance of the heating element is derived at the beginning of each puff and is only derived once and is then used for deriving the time that the first MOSFET switch 30 should be at the OFF state for the duration of the
10 puff. In other embodiments, the instantaneous resistance of the heating element 10 is derived at the beginning of each interval cycle and is used only for deriving the time that the first MOSFET switch 30 needs to be maintained at the OFF state for that interval cycle. Deriving the instantaneous resistance of the heating element may be desirable if the heating element is very sensitive to its working temperature.

15 Similarly, a mean value of the resistance for the reference resistor can be derived instead and used for deriving the time that the first MOSFET switch needs to be configured at the OFF state.

 In some embodiments, the derived t'_{h-p} can be equal to or greater than the duration of each interval cycle t_c . In this case, the first MOSFET switch 30 will be
20 maintained at the OFF state during the entire interval cycle and based on the ratio of t'_{h-p} to t_c , the first MOSFET switch 30 may also be maintained at the OFF state for a certain period of time in a subsequent interval cycle or the entire duration of the subsequent interval cycle. The power source 30 supplies a DC output current to the heating element 10 in this interval cycle or interval cycles.

25 In other embodiments, the derived t'_{h-p} can be smaller than the duration of each interval cycle t_c . Then, the first MOSFET switch 30 is configured according to different control waveforms, for example PWM waveforms of different high time and low time ratios, to reflect the ratio of t'_{h-p} to t_c .

For example, at step S405 a waveform pattern is then determined according to the ratio of t'_{h-p} to t_c and the first and the second control waveforms are generated according to the determined waveform pattern at step S406. Control waveforms for all interval cycles are generated by repeating the above steps at step S407. Similar to the first control waveform, the second control waveform can also be a PWM waveform and the waveform generator can be a PWM waveform generator. The PWM waveform generator can also be part of a microprocessor or part of a PWM controller.

Alternatively or in addition to the embodiment described in Fig.1B, the reference resistor 40 can be arranged in parallel with the heating element 10. In this arrangement, the instantaneous resistance of the heating element 10 can be derived with reference to the current flow across each branch of the heating circuit. In some embodiments, the voltage across the reference resistor 40 and the heating element 10 can be detected by a voltage probe, a voltage measurement circuit, or a voltage measurement device.

Calculations according to Equations 1 to 3 can be performed by a processor or a controller executing instruction codes or by dedicated calculation circuits designed to perform the above mentioned logic. A microprocessor having a PWM function and a storage function may be used. The storage function can store the instructions code that when executed by the microprocessor can implement the logic as described above.

In a further embodiment, instead of deriving the discharging time to generate the control waveforms, an estimated power consumption of the heating element can be derived for generating the control waveforms.

As illustrated in Fig.9, the power management unit in this example includes an ADC 201 for detecting a first output voltage of the power source 20 and/or a voltage drop across the reference resistor 40, and/or a voltage drop across the heating element 10. A heating element resistance calculation unit 206 calculates the instantaneous resistance or mean value of the resistance of the heating element based on the detected first output voltage of the power source and/or the voltage drop across the reference resistor and/or the voltage drop across the heating element. A resistance value of the reference resistor 40 stored within a memory device 203. A power

consumption estimation device 207 estimates the power consumption during a given period of time, for example the duration of a puff or an interval cycle within the puff, based on a second output voltage detected and the calculated resistance of the heating element. A waveform pattern deriving device 204 determines the hightime and lowtime ratio of the first control waveform based on the estimated power consumption and a predetermined power consumption P stored in the memory 203. A waveform generator 205 generates a first control waveform according to the pattern determined.

The heating element in this example may be a carbon fiber based heating element. An ADC of a microcontroller reads the voltage ratio of the carbon fiber heating element V_{Wick} and the voltage drop V_{res} across a reference resistor having a resistance of $R_{standard}$. The resistance of the standard resistor is known, and the resistance of the carbon fiber heating element can be derived by Equation 4:

Equation 4:

The reference resistor is then disconnected from the heating circuit and the carbon fiber heating element. The ADC then reads the closed circuit voltage of the carbon fiber V_{close} . The power of the carbon fiber can be calculated by Equation 5:

Equation 5:
$$P_{CF} = \frac{V_{close}^2}{R_{Wick}}$$

The estimated power P_{CF} can be for example 3.2W which is higher than a predetermined value of 2.5W, the ON and OFF time of the first MOSFET switch 30 can then be determined by determining the hightime and lowtime ratio of the control waveform.

For example, in every 50ms long cycles, the hightime is , the lowtime is 50ms. $High\ time = 11\ ms$.

A control waveform is then generated by the waveform generator to configure the ON/OFF time of the first MOSFET switch 30.

In case the estimated P_{CF} is smaller than the predetermined value of 2.5W, the output waveform to the first MOSFET controller will be all OFF, and the output of the power source will be provided as DC.

Figs. 2 to 4 are diagrams showing testing results of the heating circuit using the power management unit. These results shows substantially constant output have been maintained even though the resistance of the heating element may vary during the working cycle of the heating element and/or the battery voltage may drop with the lapse of time.

Testing result 1: Substantially constant resistance of the heating element with decreasing battery capacity

In one example, dynamic discharging tests using the dynamic output power management unit of Fig.1A were carried out on a dry heating element, i.e., a heating element having substantially consistent resistance. The results are shown in Fig.2, wherein the data lines from the top to the bottom represent the battery voltage V, the output energy in J at 280 mAh, and the discharge time in ms, i.e. the powered time, over testing time in seconds.

In some examples, the resistance of the heating element changes depending on the working condition of the heating element, e.g. amount of e-solution the heating element contacts, carbonization around/in the heating element, and the working temperature. The heating element may be a conventional heating element or a fiber based heating element, for example a carbon fiber heating element .

Example 2: Wetted heating element with decreasing battery capacity

In another example, wet dynamic discharging tests using the dynamic output power management unit of Fig.1A or 1B were carried out on a wetted heating element, i.e., the resistance of the heating element may change when it has different amount of liquid. The results are shown in Fig.3. The data lines from the top to the bottom represent the resistance of the heating element in ohms, the battery voltage V, the

output energy in J, at 240 mAh, and the discharge time in ms, i.e. the powered time, over testing time in seconds.

Example 3: Wetted heating element with decreasing battery capacity

The results for another set of wet dynamic discharging tests are shown in Fig.4.

- 5 The data lines from the top to the bottom represent the resistance of the heating element in ohms, the battery voltage V, the output energy in J at 280 mAh, and the discharge time in ms, i.e. the powered time, over testing time in seconds.

The power management system described may include dynamic output power management unit for a heating circuit of an electronic smoking device, with the PMU
10 having at least one voltage detection device to detect an output voltage of a power source, and/or a voltage drop across a heating element operable to be connected to or disconnected from the power source via a first switching element, and/or a voltage drop across a reference element operable to be connected to or disconnected from the heating circuit via a change of state of a second switching element from a first state to a
15 second state and from a second state to the first state. A controller is configured to change the second switching element from the first state to the second state; to receive a first detection result from the detection device; derive a resistance of the heating element; change the second switching element from the second state to the first state; receive a second detection result from the voltage detection device; and derive a
20 discharging time of the power source as a function of the resistance of the heating element and the second voltage detection. As a result, energy converted in a period of time is substantially identical to a predetermined energy conversion value for a same period of time.

The power management system described may operate on instructions stored on
25 non-transitory machine-readable media, the instructions when executed causing a processor to control a voltage detection device to detect a first output voltage of a power source, and/or a voltage drop across a heating element operably connected to the power source via a first switching element, and/or a voltage drop across a reference element operably connected to the power source via a second switching element. The

first output voltage is detected when the reference element is connected to the power source. The instructions may direct the processor to derive a resistance of the heating element as a function of the at least two of the first output voltage of a power source, the voltage drop across the heating element and the voltage drop across the heating
5 element, and to control the voltage detection device to detect a second output voltage of the power source. The processor may then estimate the discharging time of the power source for the puff as a function of the second output voltage of the power source and the derived resistance of the heating element such that an energy converted in the puff is substantially identical to a predetermined energy conversion value for one puff.

Claims:

1. An electronic smoking device, comprising
an atomizer including an electrical resistance heating element;
a power source connected to the heating element and to a controller;
5 a first circuit connected to the controller and to the power source for measuring output voltage of the power source;
a second circuit connected to the controller and to the heating element for measuring resistance of the heating element; and
the controller adjusting electrical power supplied from the power source to the
10 heating element based on power source voltage and heating element resistance.
2. The smoking device of claim 1 with the second circuit comprising a reference resistor and a pair of switches for switching the reference resistor into and out of a series connection with the heating element.
3. The smoking device of claim 1 with the controller including a memory for storing
15 a resistance value.
4. An electronic smoking device comprising:
an atomizer including an electrical resistance heating element;
a power source connected to the heating element and to a dynamic output power management system including:
20 a reference element having a substantially constant resistance;
a second switching element operable to change from a first state to a second state to connect the reference element to the heating circuit and from the second state to the first state to disconnect the reference element from the heating circuit; and
a power management unit, comprising

at least one voltage detection device to detect an output voltage of a power source, and/or a voltage drop across the reference element, and/or a voltage drop across the heating element; and

5 a controller configured to
change the second switching element from the first state to the second state;
receive a first detection result from the detection device;
derive a resistance of a heating element in the heating circuit;
10 change the second switching element from the second state to the first state;
receive a second detection result from the voltage detection device; and
derive an active time of the heating circuit as a function of
15 the resistance of the heating element and the second detection result such that an energy converted by the heating element in a period of time is substantially identical to a predetermined energy conversion value for a same period of time.

20 5. A method of operating an electronic smoking device, comprising,
detecting an output voltage of a power source of a heating circuit in the electronic smoking device; and
estimating a discharging time of the power source as a function of the output voltage of the power source and a resistance of a heating element such that
25 an energy converted in the puff is substantially identical to a predetermined energy conversion value for one puff.

6. The method of claim 5 further comprising deriving a pattern of a waveform based on the estimated discharging time and a predetermined discharging time for each puff; and generating a control waveform for a switching element in the heating circuit
30 based on the derived pattern.

7. The method of claim 5 wherein detecting of a first output voltage of a power source is performed at the beginning of a puff.

8. A method of operating an electronic smoking device, comprising,

5 detecting a first output voltage of a power source, and/or a voltage drop across a heating element operably connected to the power source via a first switching element, and/or a voltage drop across a reference element operably connected to the power source via a second switching element, wherein the first output voltage is detected when the reference element is connected to the power source;

10 deriving a resistance of the heating element as a function of the at least two of the first output voltage of a power source, the voltage drop across the heating element and the voltage drop across the heating element;

detecting a second output voltage of the power source; and

15 estimating the discharging time of the power source for the puff as a function of the second output voltage of the power source and the derived resistance of the heating element such that an energy converted in the puff is substantially identical to a predetermined energy conversion value for one puff.

9. The method of claim 8 wherein detecting of a first output voltage of a power source is performed at the beginning of a puff.

20 10. The method of claim 8 further comprising deriving a pattern of a control waveform based on the estimated discharging time and a predetermined discharging time for each puff; and generating a control waveform for the first switching element based on the derived pattern.

11. A method for power management for a heating circuit of an electronic smoking device, comprising,

25 dividing the duration of a puff into a number of interval cycles;

detecting in each interval cycle a first output voltage of a power source, and/or a voltage drop across a heating element operably connected to the power source via a first switching element, and/or a voltage drop across a reference element operably connected to the power source via a second switching element, wherein the first output
5 voltage is detected when the reference element is connected to the power source;

deriving a resistance of the heating element as a function of the at least two of the first output voltage of a power source, the voltage drop across the heating element and the voltage drop across the heating element;

detecting a second output voltage of the power source; and

10 estimating the discharging time of the power source for the interval cycle as a function of the second output voltage of the power source and the derived resistance of the heating element such that an energy converted in the interval cycle is substantially identical to a predetermined energy conversion value for one interval cycle.

12. The method of claim 11 wherein detecting of a first output voltage of a power
15 source is performed at the beginning of each interval cycle.

13. The method of claim 11 further comprising

deriving a pattern of a control waveform based on the estimated discharging time and a predetermined discharging time for each interval cycle; and

20 generating a control waveform for the first switching element based on the derived pattern.

14. An electronic smoking device, comprising:

a tubular housing;

a battery connected to a heating element and a controller in the housing;

a liquid supply in the housing for providing liquid to the heating element;

a battery measuring circuit connected to the controller and to the battery for measuring output voltage of the battery;

a heating element resistance measuring circuit connected to the controller and to the heating element for measuring resistance of the heating element; and

5 the controller adjusting direct current electrical power supplied from the battery to the heating element based on battery voltage and heating element resistance.

15. The device of claim 14 with the heating element resistance measuring circuit and the battery measuring circuit included in the controller.

10 16. The device of claim 14 with the controller provides current from the battery to the heating element so that the product of the current times the voltage to the heating element varies by less than 15% over the charge life of the battery.

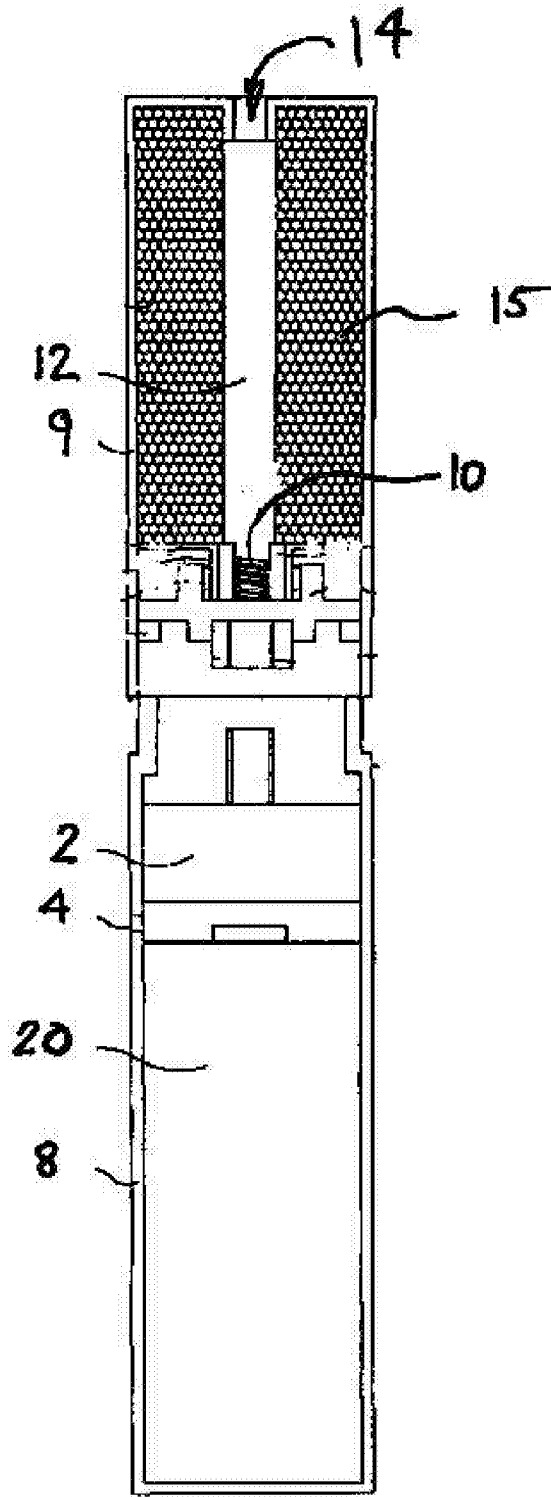


FIG. 1

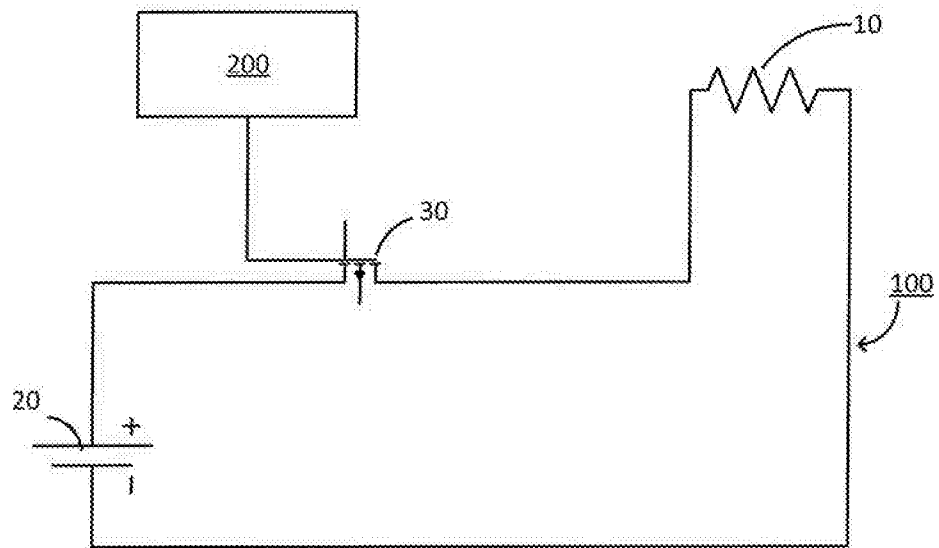


Fig.1A

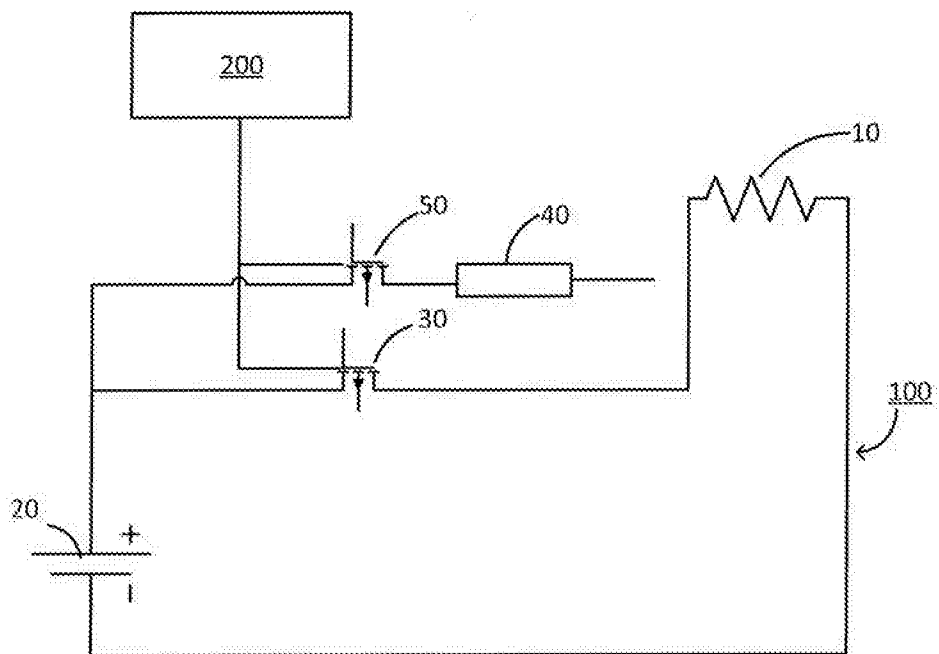


Fig.1B

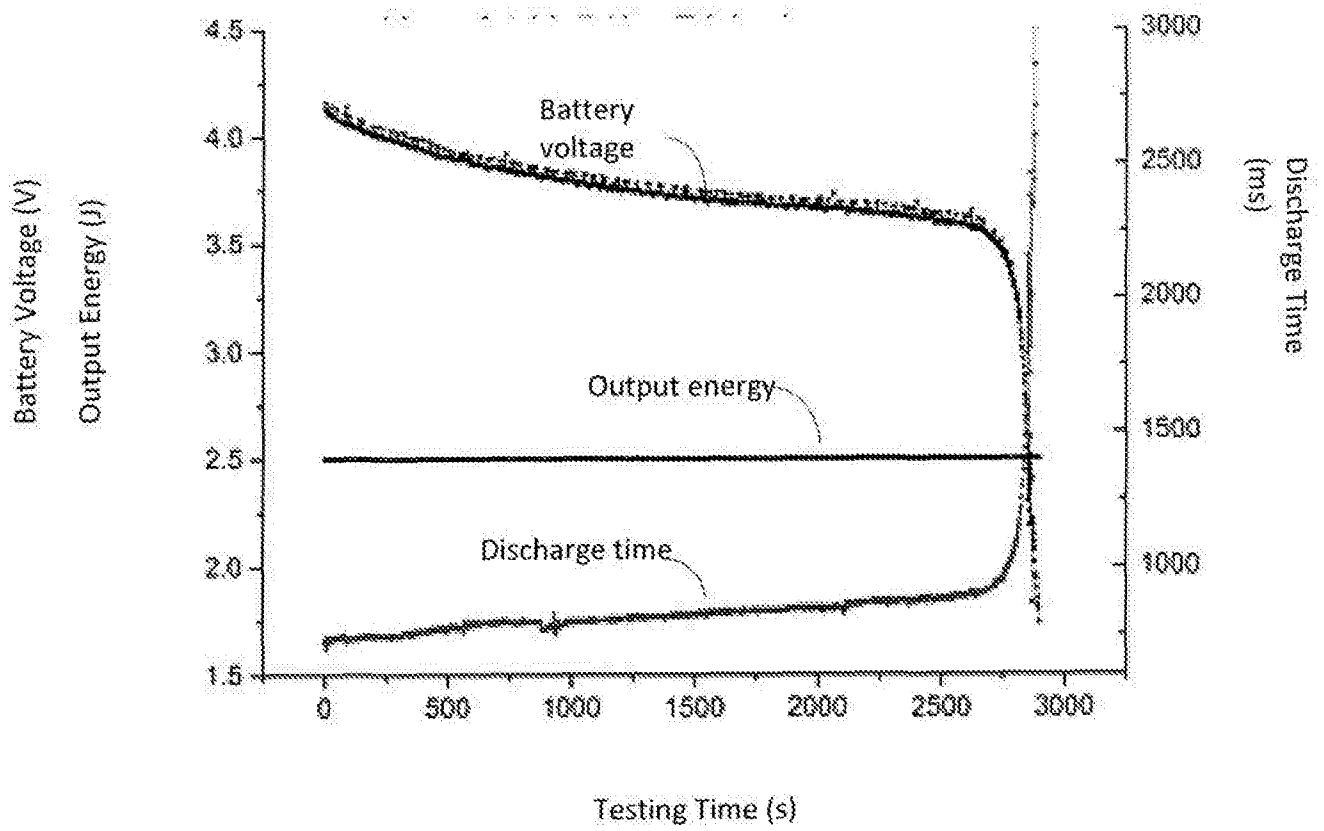


Fig.2

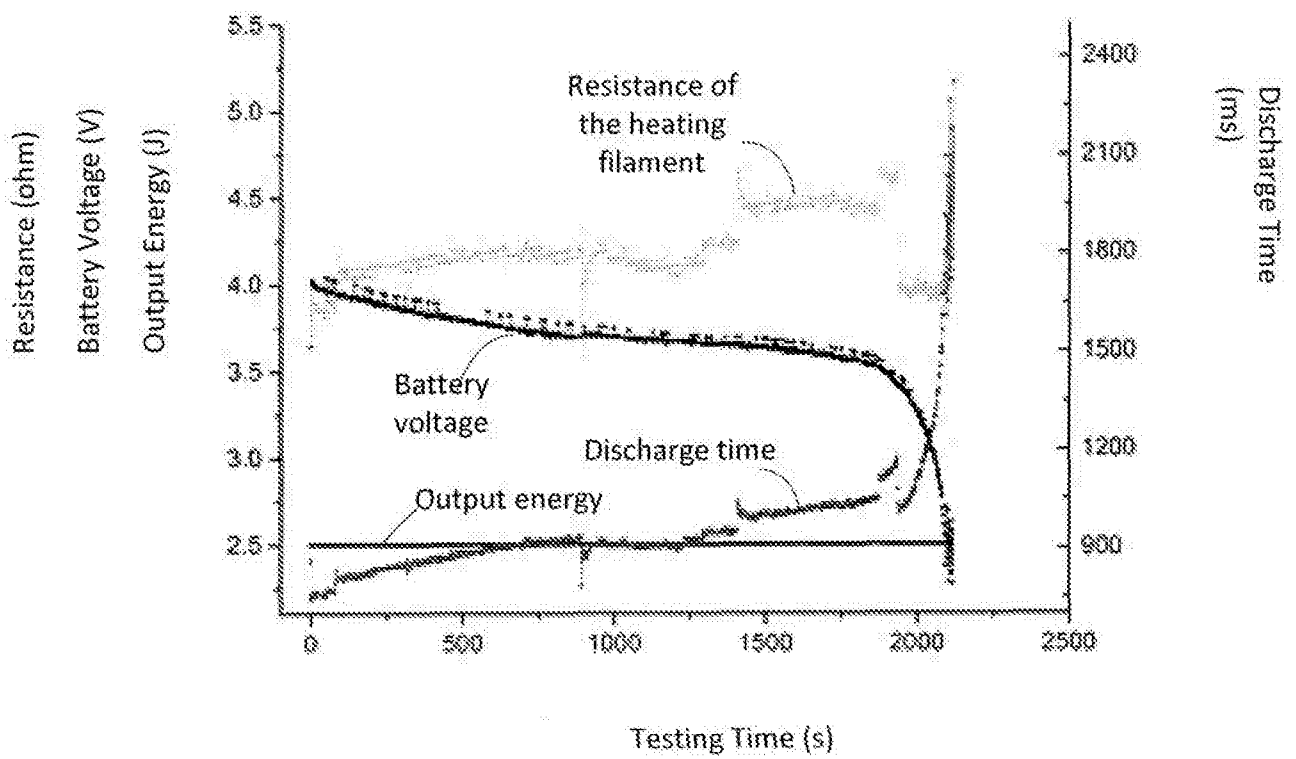


Fig.3

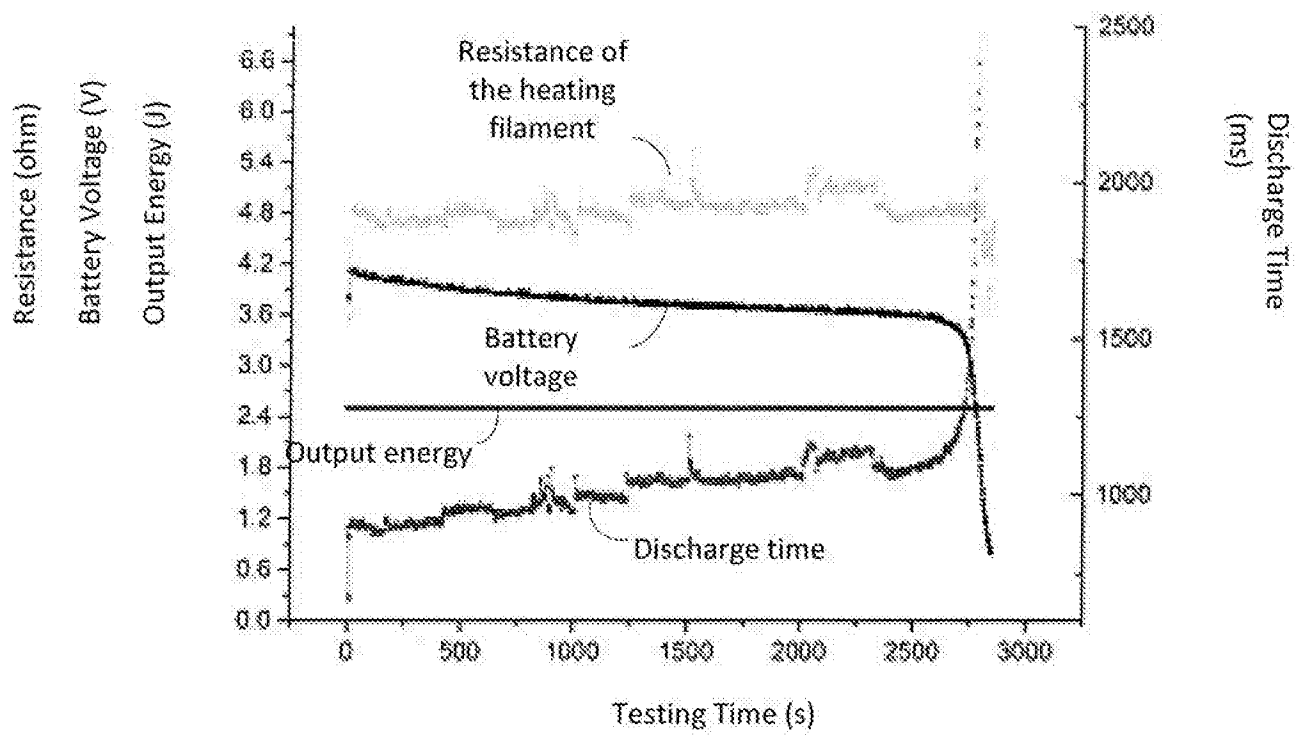
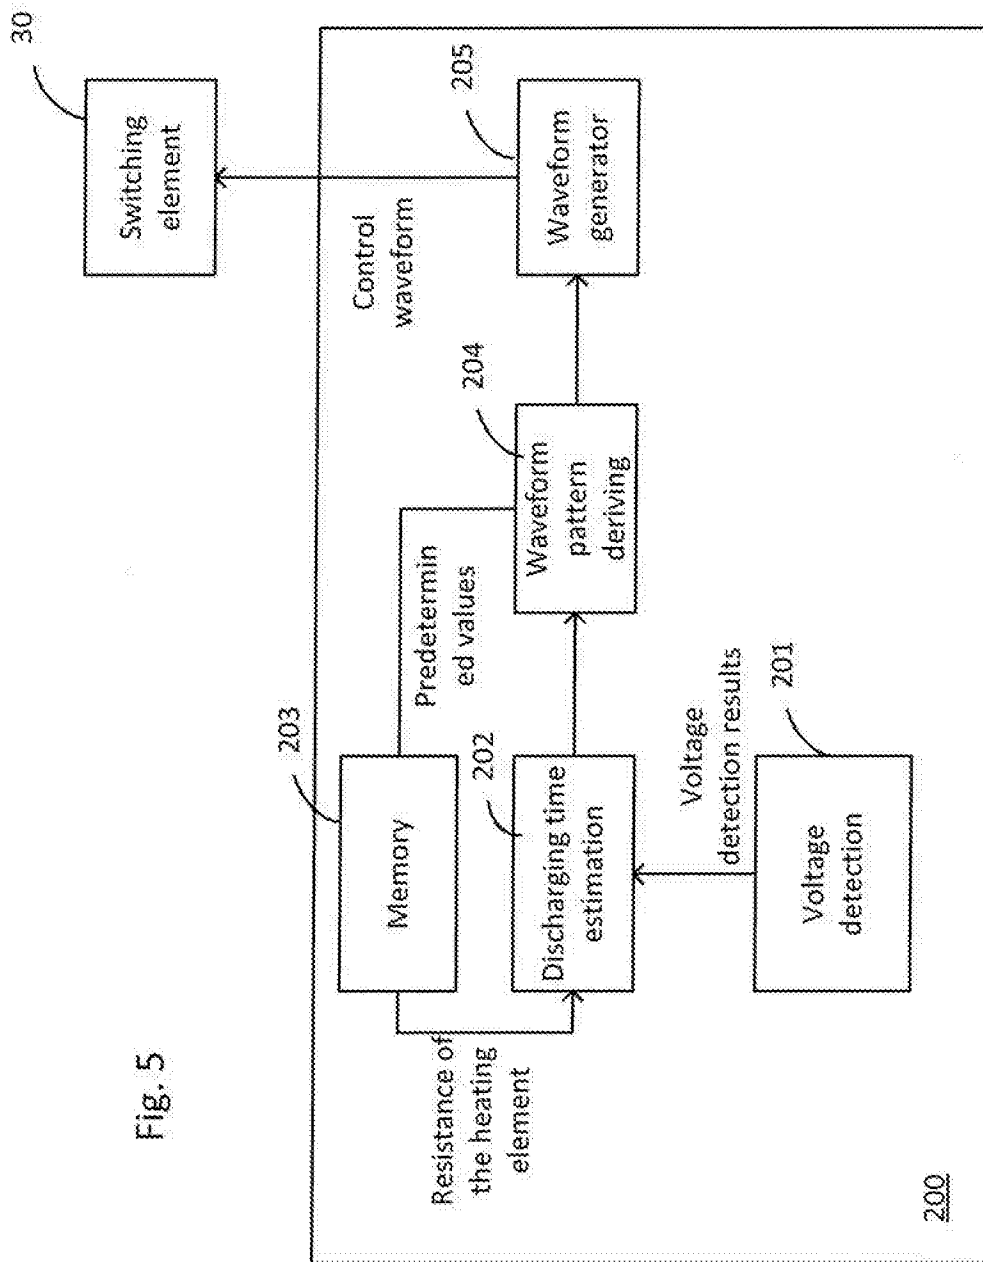
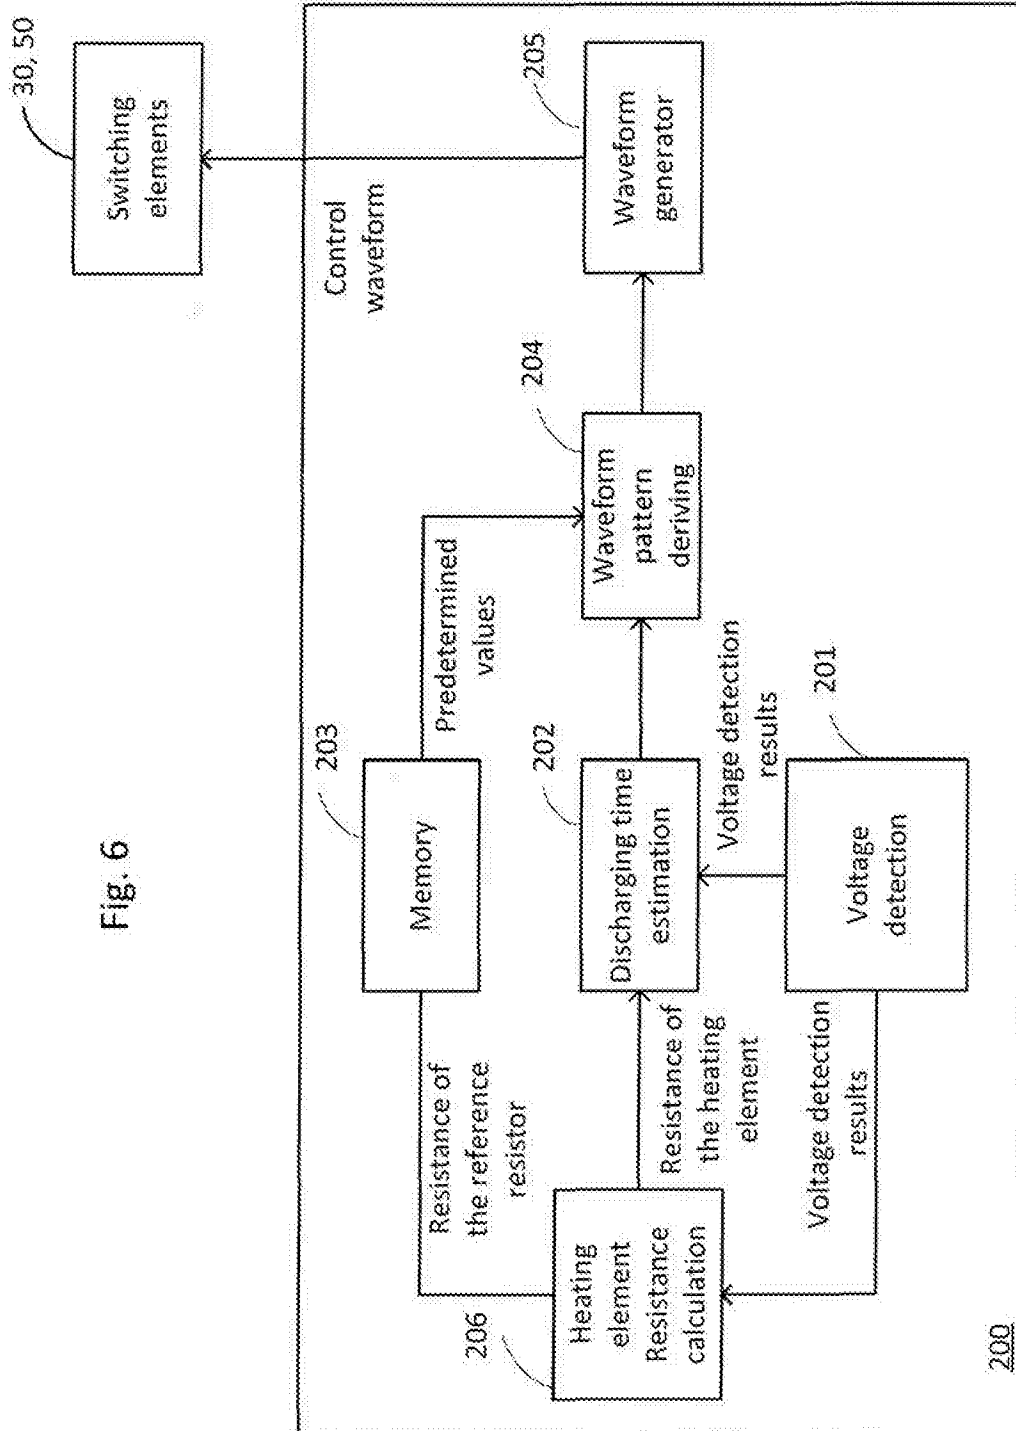


Fig.4





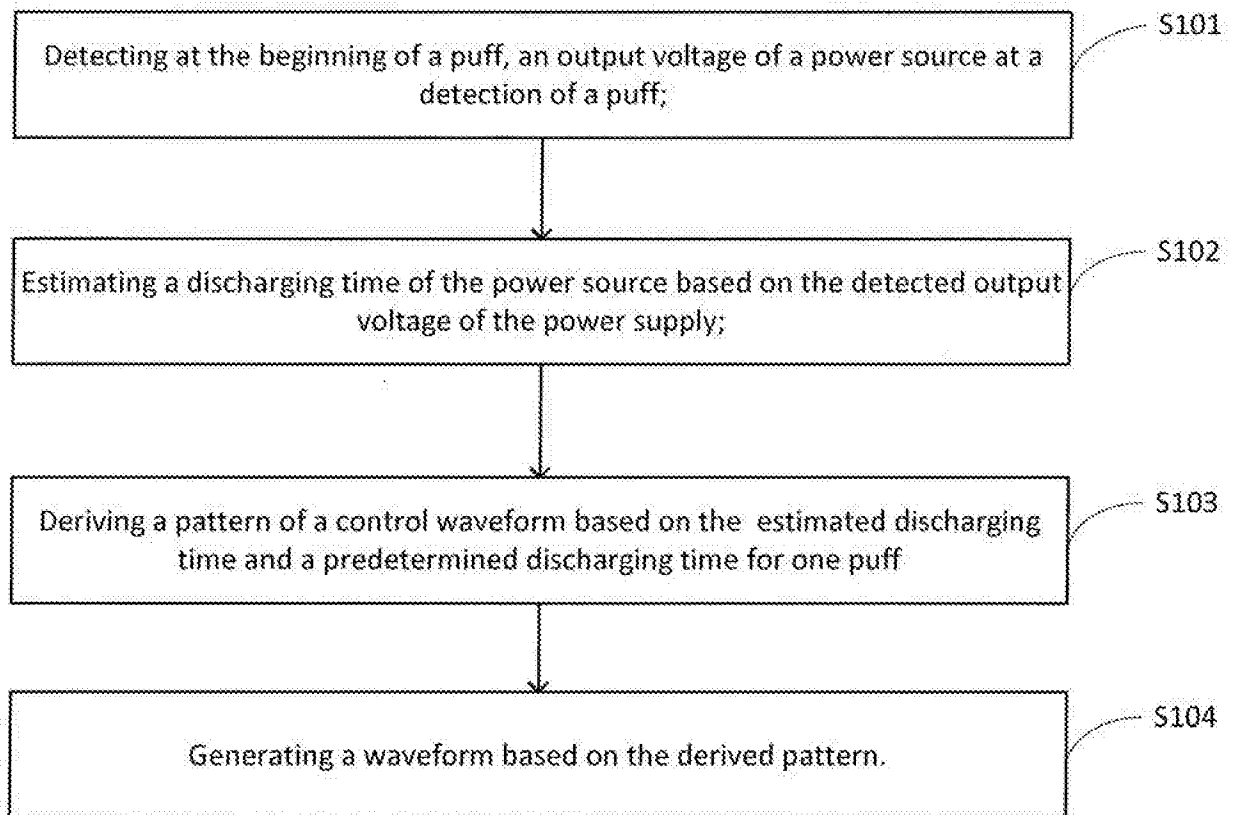


Fig. 7A

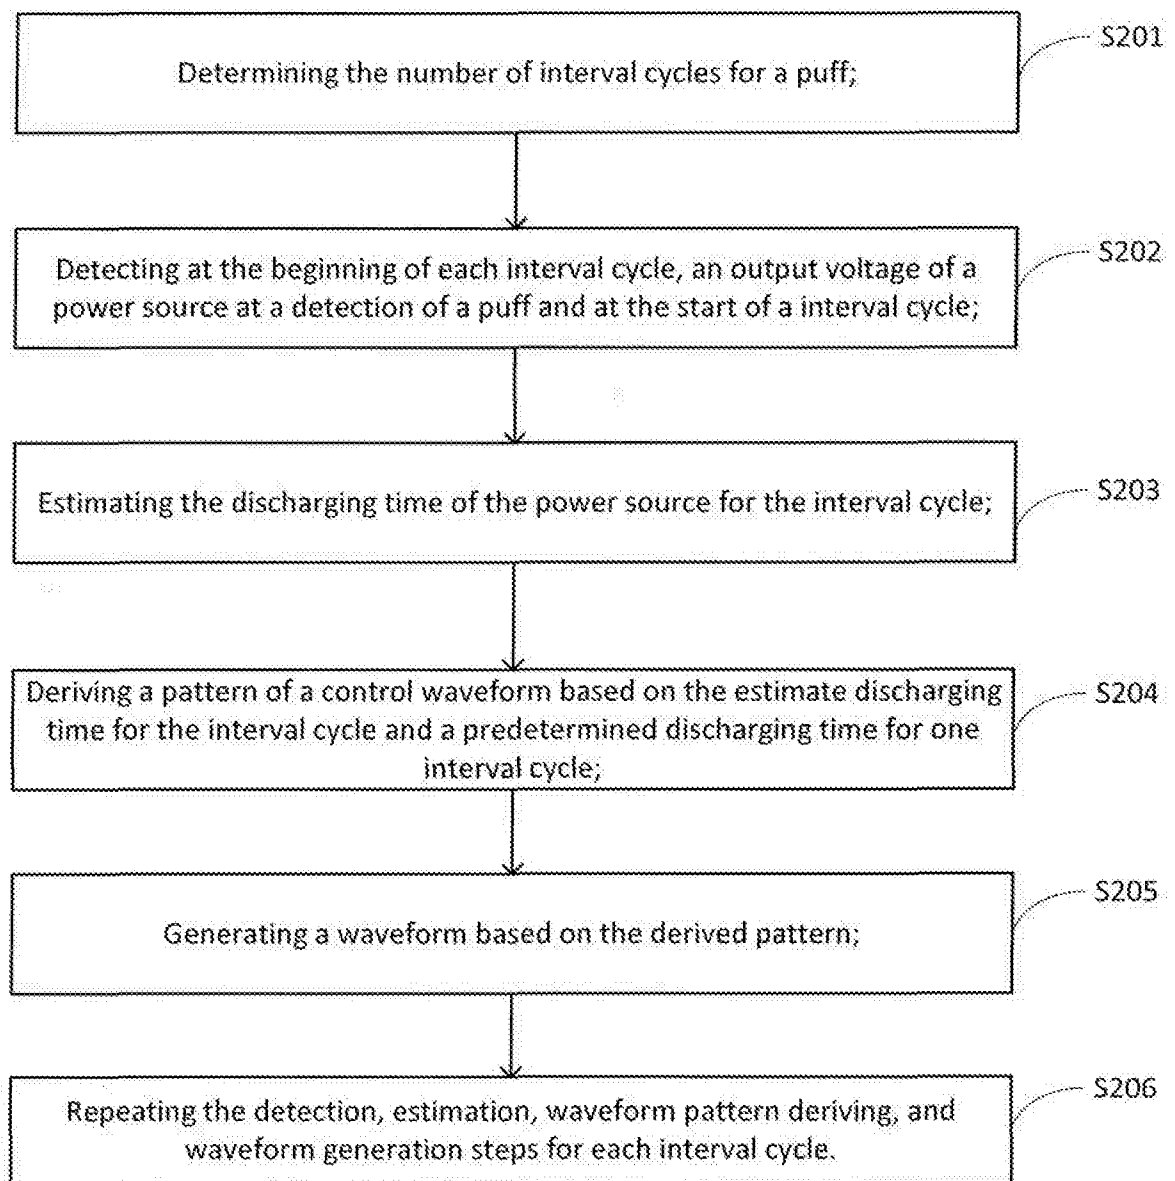


Fig. 7B

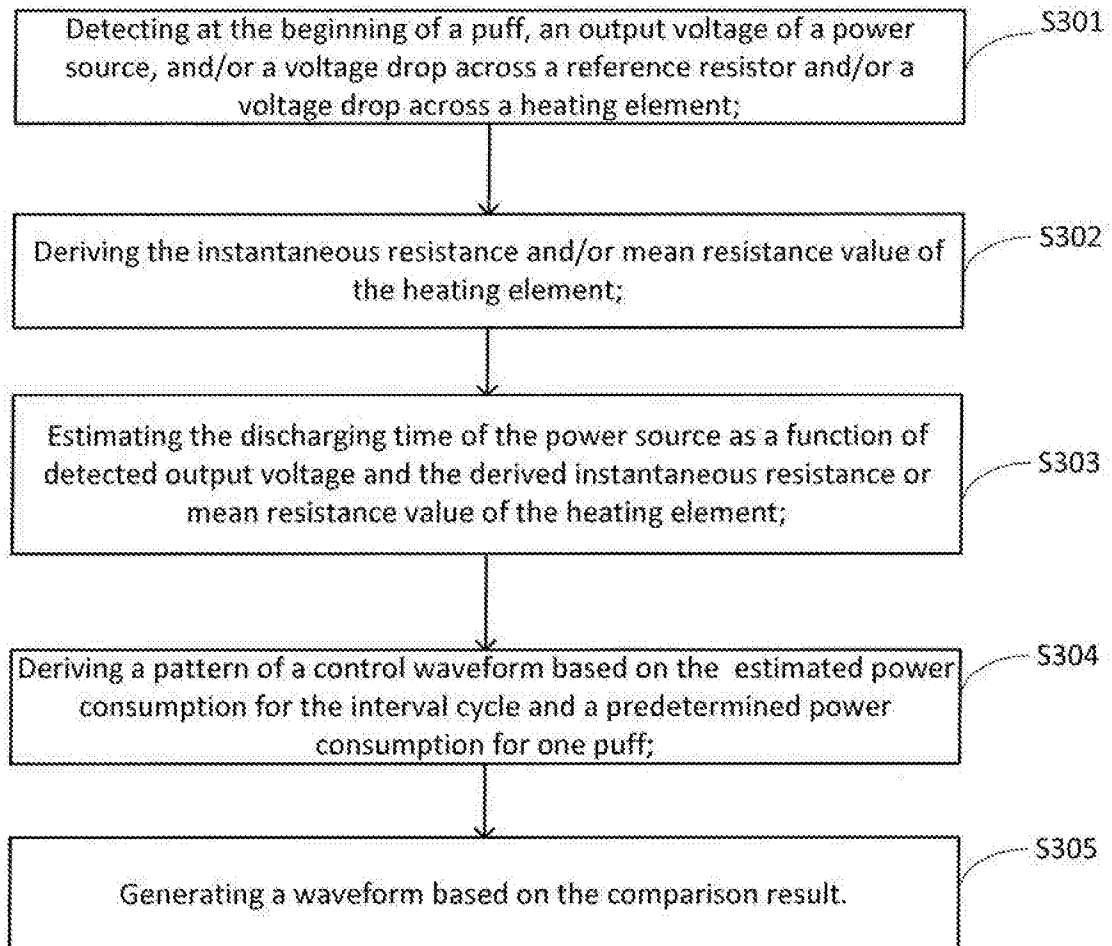


Fig. 8A


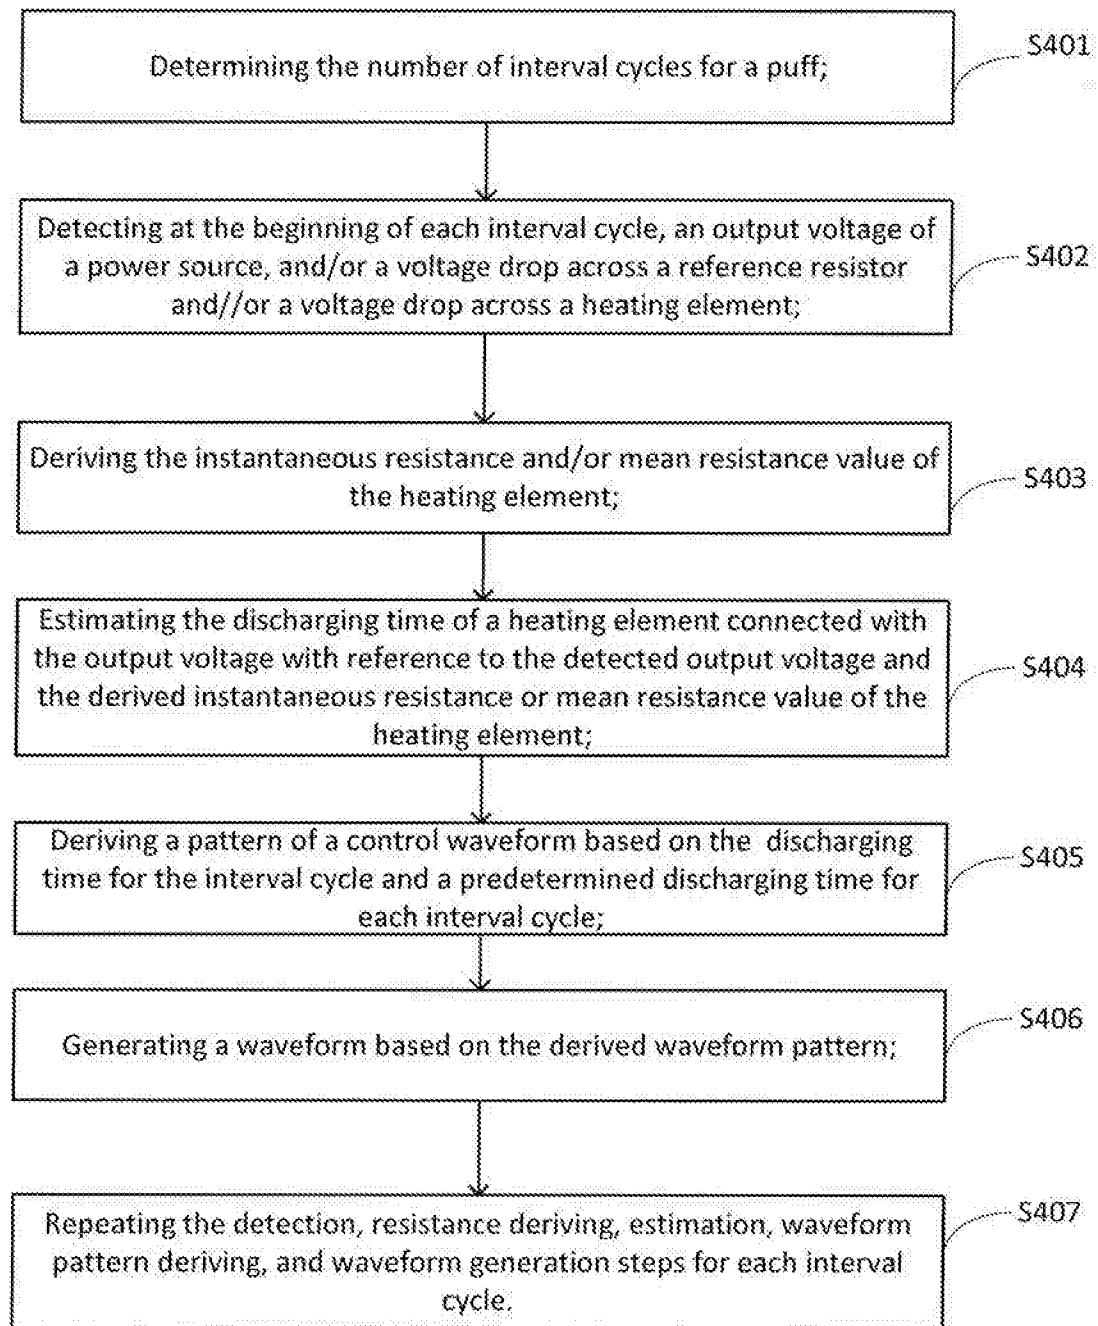


Fig. 8B

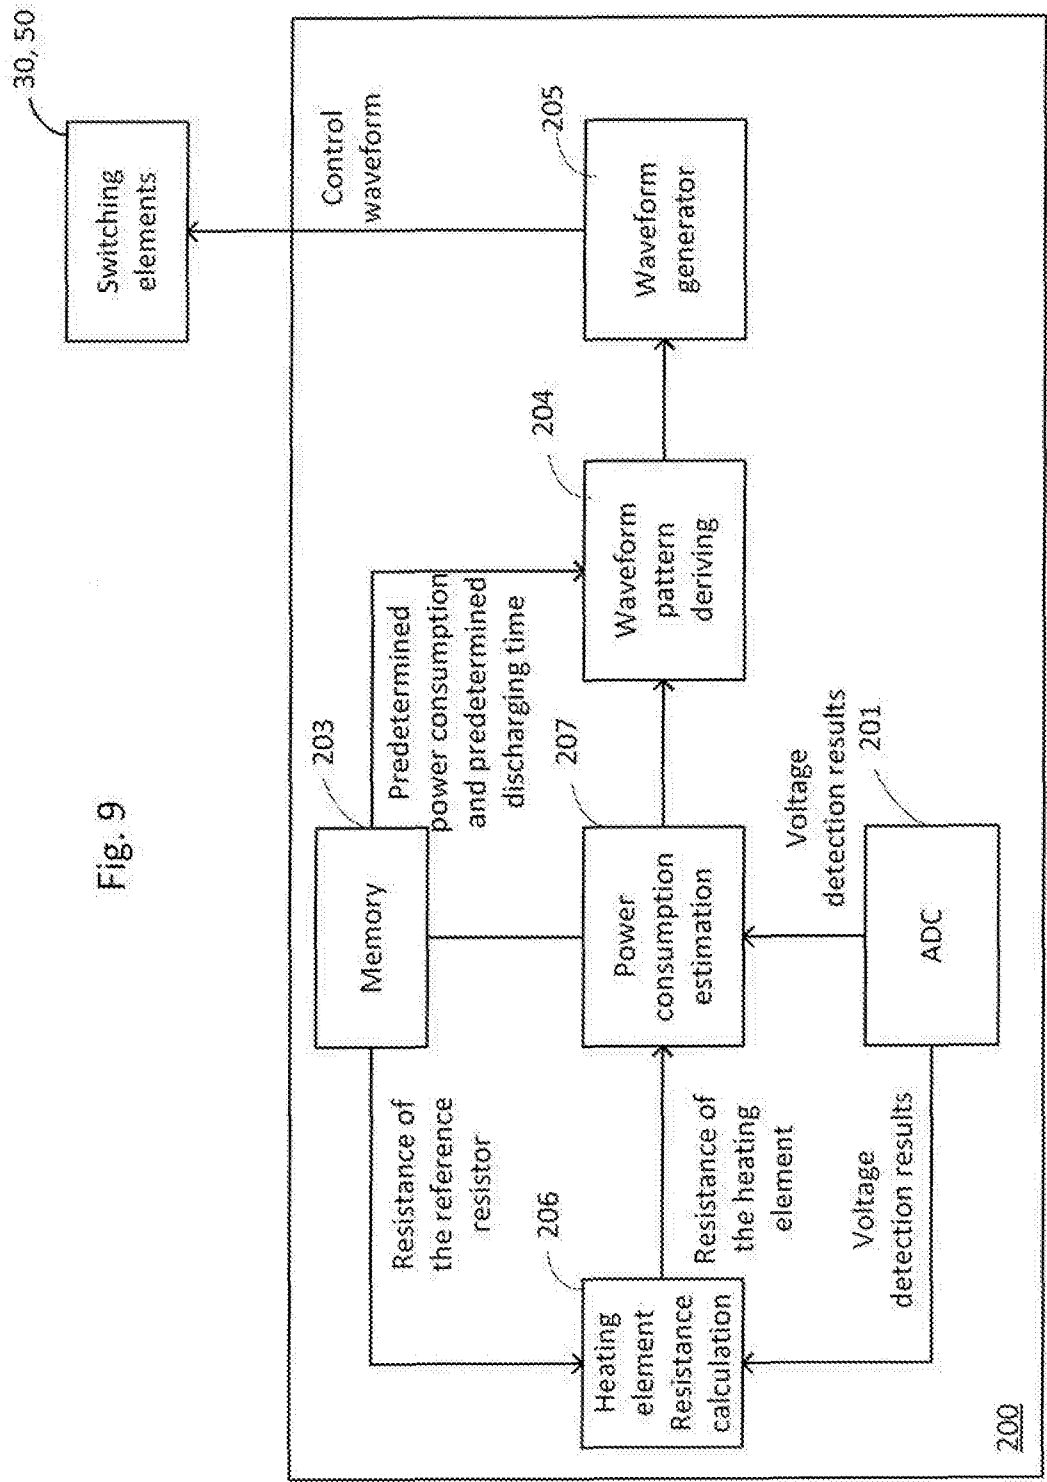

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2014/094906

A. CLASSIFICATION OF SUBJECT MATTER		
A24F 47/00(2006.01)i		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
A24F47; A61M15		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
CNABS;VEN: hon, electronic, electrical, simulate, imitate, substitute, atomizer, cigar, cigarette, tobacco, capacitor, circuit, second, resistance, output, power, voltage		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014334804 A1 (ENBRIGHT CO LTD) 13 November 2014 (2014-11-13) claims 1-9,description, paragraphs [0073]-[0080] and figures 1-8	1-3,14-16
A	CN 102088875 A (PHILIP MORRIS PROD) 08 June 2011 (2011-06-08) see the whole document	1-16
A	CN 201379072 Y (LI HAN) 13 January 2010 (2010-01-13) see the whole document	1-16
A	EP 2143346 A1 (PHILIP MORRIS PROD) 13 January 2010 (2010-01-13) see the whole document	1-16
A	CN 102940313 A (JOY CHANGZHOU ELECTRONIC TECHNOLOGY CO LTD) 27 February 2013 (2013-02-27) see the whole document	1-16
A	CN 104116138 A (SHENZHEN SMOORE TECHNOLOGY LTD) 29 October 2014 (2014-10-29) see the whole document	1-16
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
19 September 2015		08 October 2015
Name and mailing address of the ISA/CN		Authorized officer
STATE INTELLECTUAL PROPERTY OFFICE OF THE P.R.CHINA 6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing 100088, China		WANG,Xiaoyuan
Facsimile No. (86-10)62019451		Telephone No. (86-10)62085241

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2014/094906**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2013104916 A1 (EVOLV LLC) 02 May 2013 (2013-05-02) see the whole document	1-16
A	CN 202749479 U (JOY CHANGZHOU ELECTRONIC TECHNOLOGY CO LTD) 20 February 2013 (2013-02-20) see the whole document	1-16

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2014/094906

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2014334804	A1	13 November 2014	WO	2013147492	A1	03 October 2013
				CN	104114049	A	22 October 2014
CN	102088875	A	08 June 2011	TW	201007628	A	16 February 2010
				EG	25966	A	13 November 2012
				JP	2011527415	A	27 October 2011
				RU	2011104185	A	20 August 2012
				CA	2729305	A1	14 January 2010
				IL	209971	D0	28 February 2011
				CO	6341532	A2	21 November 2011
				AU	2009267544	B2	04 June 2015
				AR	074040	A1	22 December 2010
				UA	100068	C2	12 November 2012
				EP	2143346	A1	13 January 2010
				MX	2011000318	A	01 March 2011
				NZ	589885	A	25 October 2013
				RU	2496393	C2	27 October 2013
				WO	2010003480	A1	14 January 2010
				CN	102088875	B	15 August 2012
				JP	5404779	B2	05 February 2014
				KR	20110025186	A	09 March 2011
				AU	2009267544	A1	14 January 2010
				TW	1479458	B	01 April 2015
				EP	2299855	A1	30 March 2011
CN	201379072	Y	13 January 2010	SG	174233	A1	28 October 2011
				KR	20120012961	A	13 February 2012
				EA	201171031	A1	30 January 2012
				EG	26588	A	17 March 2014
				JP	2012517229	A	02 August 2012
				NZ	595117	A	20 December 2013
				AU	2010213270	B2	08 May 2014
				IL	214538	D0	27 September 2011
				CA	2884987	A1	19 August 2010
				US	8689805	B2	08 April 2014
				EP	2404515	A4	13 November 2013
				CA	2752255	A1	19 August 2010
				US	2014305453	A1	16 October 2014
				AU	2010213270	A1	06 October 2011
				MX	2011008503	A	30 January 2012
				CN	102387719	A	21 March 2012
				EP	2772149	A2	03 September 2014
				EP	2404515	A1	11 January 2012
				WO	2010091593	A1	19 August 2010
				US	2012279512	A1	08 November 2012
				EP	2772149	A3	18 March 2015
				US	2012111347	A1	10 May 2012
				CA	2752255	C	12 May 2015
EP	2143346	A1	13 January 2010	TW	201007628	A	16 February 2010
				EG	25966	A	13 November 2012
				JP	2011527415	A	27 October 2011
				RU	2011104185	A	20 August 2012

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2014/094906

Patent document cited in search report				Publication date (day/month/year)		Patent family member(s)		Publication date (day/month/year)	
				CA	2729305	A1	14 January 2010		
				IL	209971	D0	28 February 2011		
				CO	6341532	A2	21 November 2011		
				AU	2009267544	B2	04 June 2015		
				AR	074040	A1	22 December 2010		
				UA	100068	C2	12 November 2012		
				MX	2011000318	A	01 March 2011		
				NZ	589885	A	25 October 2013		
				RU	2496393	C2	27 October 2013		
				WO	2010003480	A1	14 January 2010		
				CN	102088875	B	15 August 2012		
				JP	5404779	B2	05 February 2014		
				CN	102088875	A	08 June 2011		
				KR	20110025186	A	09 March 2011		
				AU	2009267544	A1	14 January 2010		
				TW	I479458	B	01 April 2015		
				EP	2299855	A1	30 March 2011		
CN	102940313	A	27 February 2013	CN	102940313	B	01 April 2015		
				WO	2014075369	A1	22 May 2014		
				US	2015173124	A1	18 June 2015		
CN	104116138	A	29 October 2014	None					
US	2013104916	A1	02 May 2013	US	8820330	B2	02 September 2014		
				US	2014332016	A1	13 November 2014		
CN	202749479	U	20 February 2013	None					