



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2018/03/26
(87) Date publication PCT/PCT Publication Date: 2018/11/08
(85) Entrée phase nationale/National Entry: 2019/09/09
(86) N° demande PCT/PCT Application No.: EP 2018/057637
(87) N° publication PCT/PCT Publication No.: 2018/202358
(30) Priorité/Priority: 2017/05/04 (EP17169366.6)

(51) Cl.Int./Int.Cl. *B04B 1/20* (2006.01)
(71) Demandeur/Applicant:
ANDRITZ S.A.S., FR
(72) Inventeurs/Inventors:
HUYGHE, JEAN-MARC, FR;
LAMY, DENIS, FR;
PASOL, LAURENTIU, FR
(74) Agent: MARKS & CLERK

(54) Titre : CENTRIFUGEUSE DECANTEUSE
(54) Title: DECANTER CENTRIFUGE

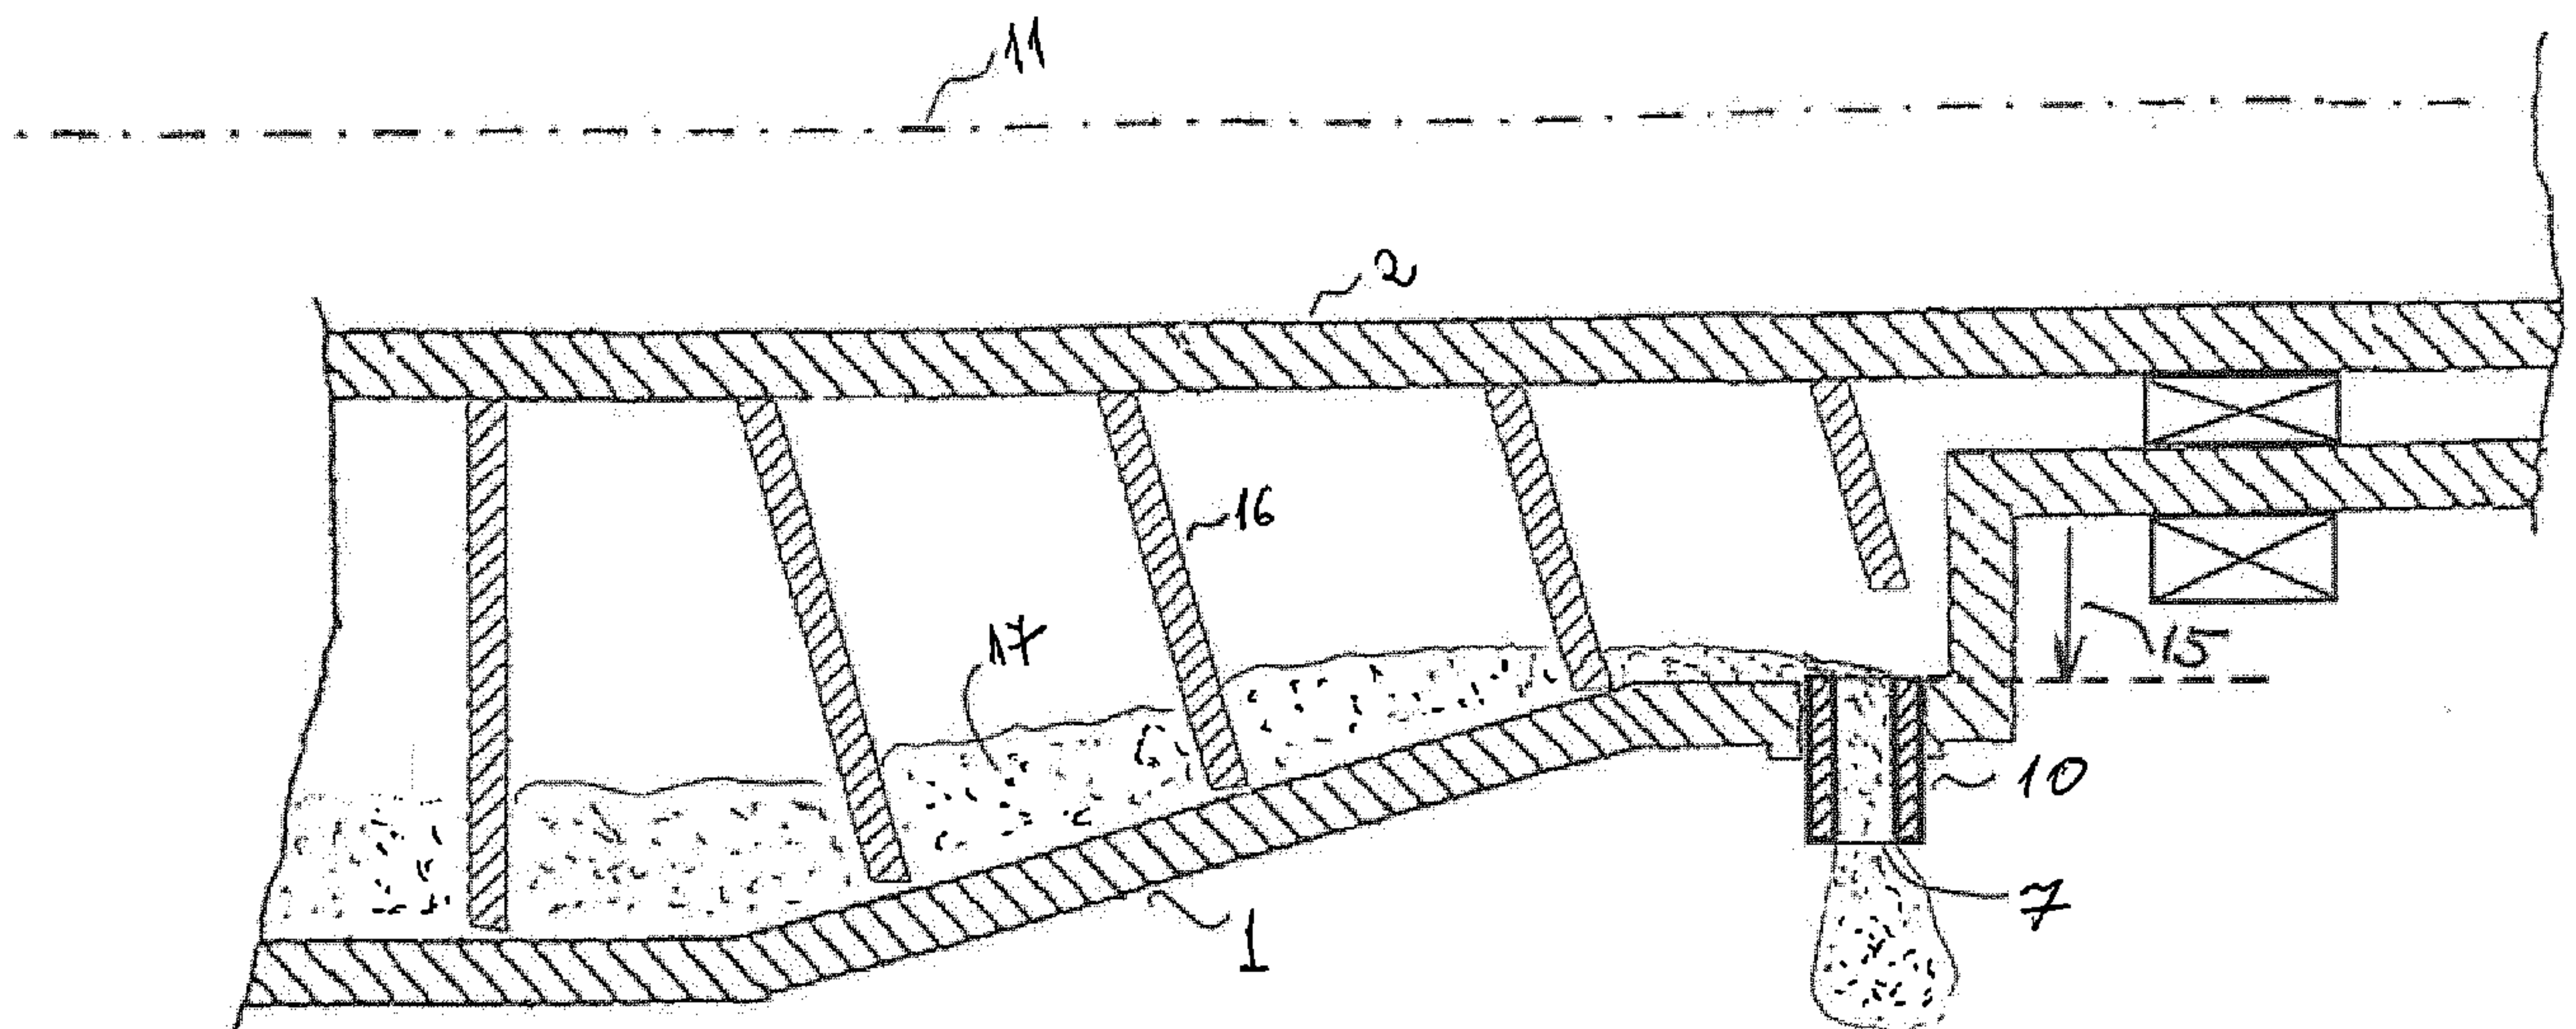


Fig. 3

(57) **Abrégé/Abstract:**

The invention relates to a decanter centrifuge comprising: a centrifugal bowl (1) rotatable around a preferably horizontal axis of rotation (11) including at least one liquid phase discharge outlet (6) at one end and at least one solids discharge opening (7) at the other end, a scroll conveyor (2) mounted substantially concentrically inside the bowl (1) for rotation about said axis of rotation of said centrifugal bowl (1) at a slightly different speed relative to the bowl for transporting the solid phase (17) towards said solids discharge opening (7), whereby said liquid phase discharge (6) is enabled through port members. It is characterized in that a set of bushings (10) for solid discharge is provided to adjust the solid discharge diameter (15) inside the bowl (1). With these bushings (10) optimal cake discharge may be achieved.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
08 November 2018 (08.11.2018)



(10) International Publication Number
WO 2018/202358 A1

(51) International Patent Classification:
B04B 1/20 (2006.01)

Blois, 36000 Chateauroux (FR). **PASOL, Laurentiu**; 9 Rue de Coulmiers, 78800 Houilles (FR).

(21) International Application Number:
PCT/EP2018/057637

(74) Agent: **SCHWEINZER, Friedrich**; Stattegger Straße 18, 8045 Graz (AT).

(22) International Filing Date:
26 March 2018 (26.03.2018)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
17169366.6 04 May 2017 (04.05.2017) EP

(71) Applicant: **ANDRITZ S.A.S.** [FR/FR]; ANDRITZ S.A.S., 3 allée de la Garenne ZI Le Buxerieux, 36000 Chateauroux (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(72) Inventors: **HUYGHE, Jean-Marc**; 47 Allee Paul Rue, 36330 Le Poinconnet (FR). **LAMY, Denis**; 97 avenue de

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: DECANter CENTRIFUGE

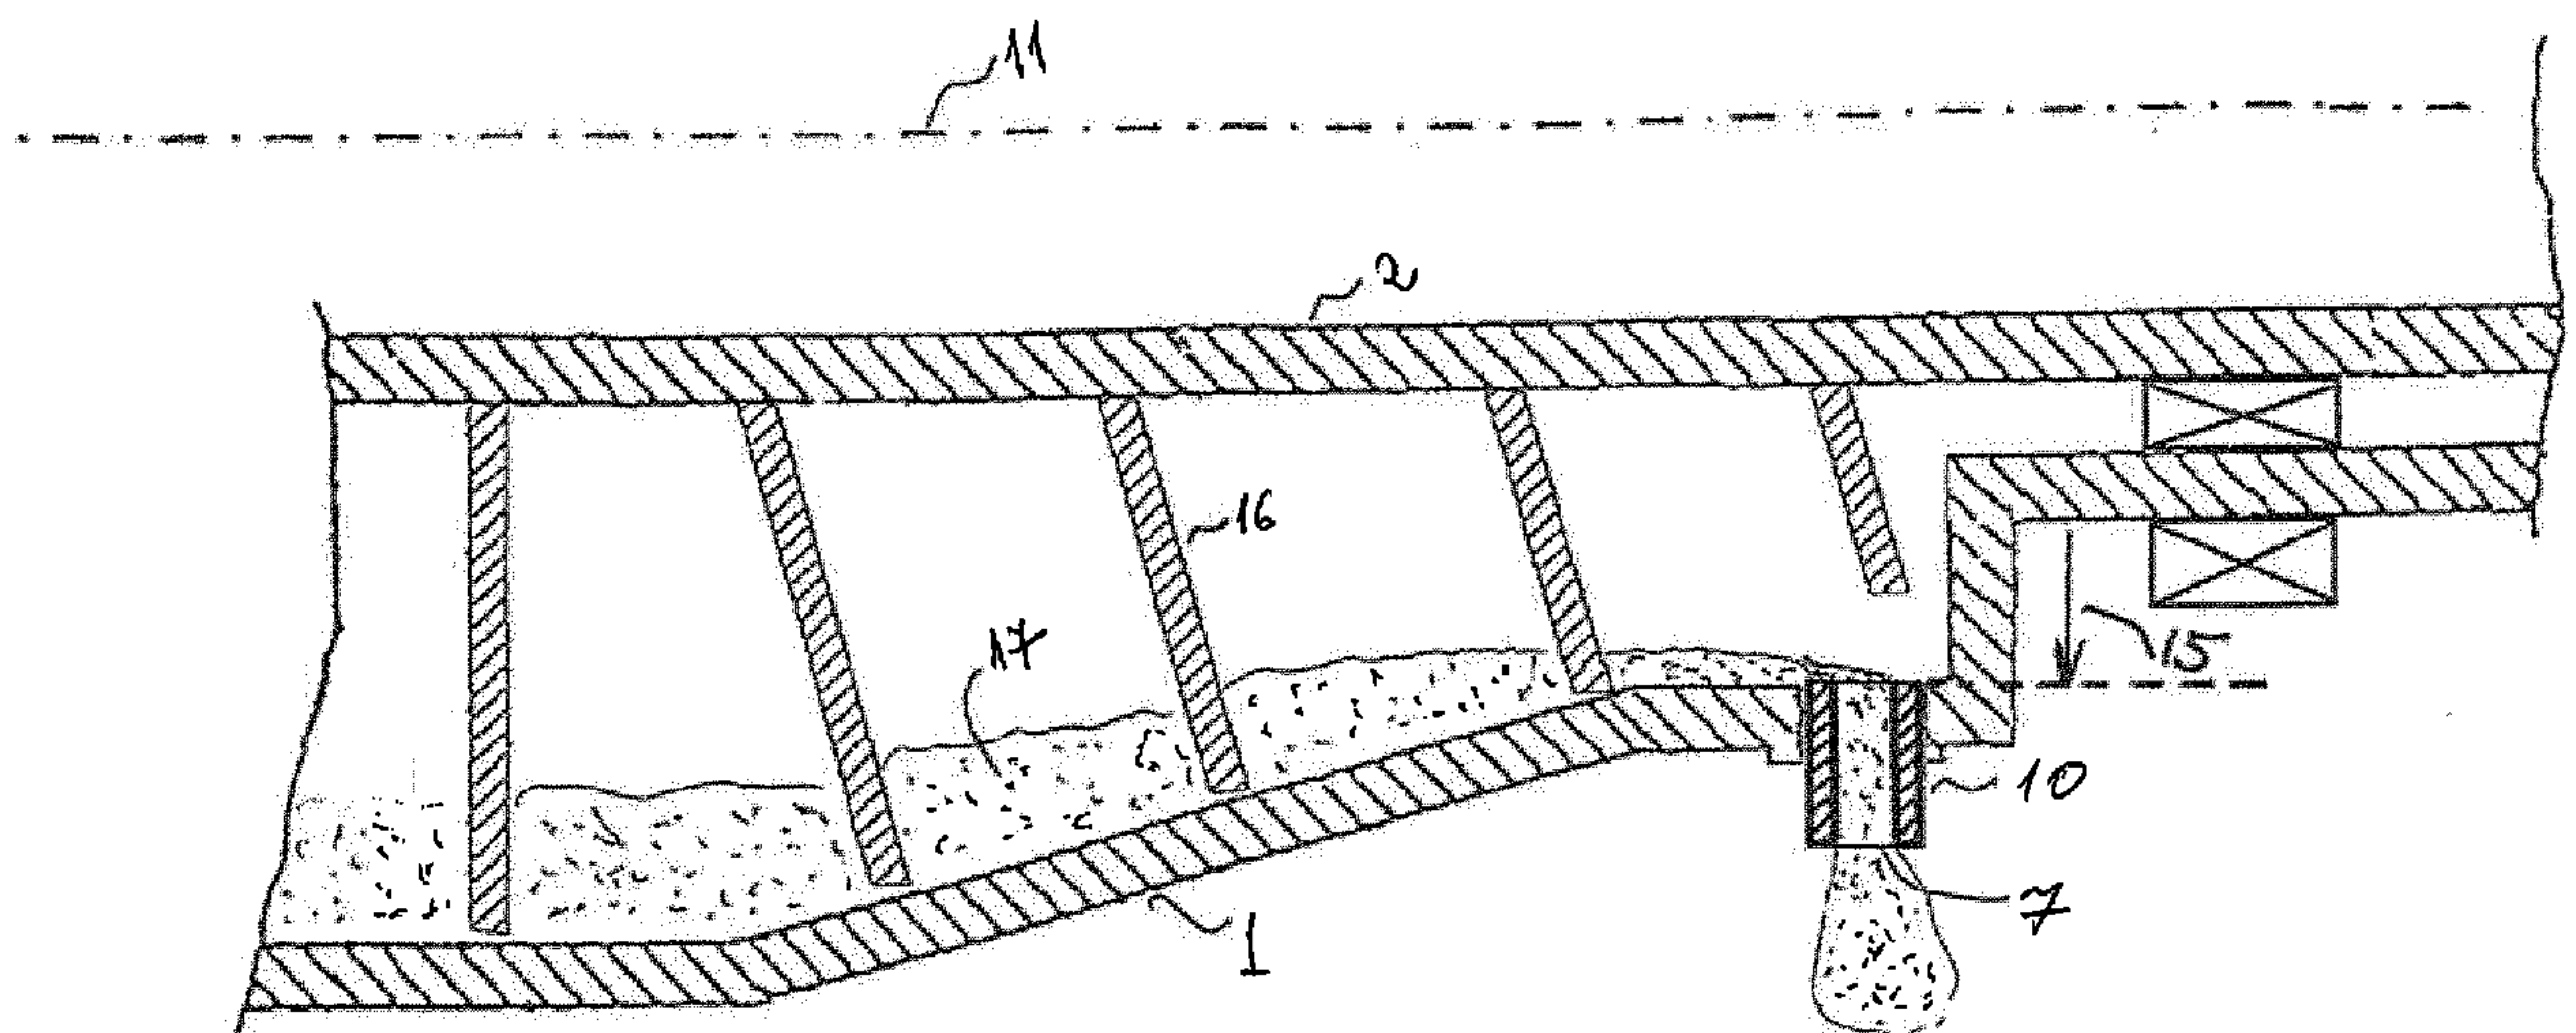


Fig. 3

(57) Abstract: The invention relates to a decanter centrifuge comprising: a centrifugal bowl (1) rotatable around a preferably horizontal axis of rotation (11) including at least one liquid phase discharge outlet (6) at one end and at least one solids discharge opening (7) at the other end, a scroll conveyor (2) mounted substantially concentrically inside the bowl (1) for rotation about said axis of rotation of said centrifugal bowl (1) at a slightly different speed relative to the bowl for transporting the solid phase (17) towards said solids discharge opening (7), whereby said liquid phase discharge (6) is enabled through port members. It is characterized in that a set of bushings (10) for solid discharge is provided to adjust the solid discharge diameter (15) inside the bowl (1). With these bushings (10) optimal cake discharge may be achieved.

[Continued on next page]

WO 2018/202358 A1

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

DECANTER CENTRIFUGE

The present invention relates to a decanter centrifuge comprising a centrifugal bowl rotating around a preferably horizontal axis of rotation including at least one liquid discharge outlet at one end and at least one solids discharge opening at the other
5 end, and a scroll conveyor mounted substantially concentrically inside the bowl for rotation of said centrifugal bowl at a slightly different speed relative to the bowl for transporting the solid phase towards said solids discharge openings.

Among the factors affecting cake moisture are long residence time and compacting pressure on the cake. One part of the compacting pressure can be generated by the
10 hydraulic pressure of liquid column difference between solid and liquid discharges which is used to compact the cake at the baffle / cone and to support scroll transportation towards the conical section. Besides the rotational speed, differential speed between bowl and scroll and torque control of the scroll conveyor, the relative pond depth (difference between liquid and solids discharge diameters) represents an
15 important parameter to operate a decanter. At the end of the feed tube slurry enters the decanter centrifuge through the feed ports of the feed chamber. Said slurry is separated in at least one clarified liquid moving through liquid outlets and a separated solid (cake) which is transported by the scroll towards and through solids discharge openings.

20 Different concepts have been proposed to change the relative pond depth. The most common way to vary the hydraulic pressure generated by the relative pond depth is the weir plate or port member installed at the liquid discharge where it can be adjusted radially in order to change the diameter of the liquid discharge at the same time as keeping the solids discharge diameter fixed. This way to change the relative
25 pond level, however, has some limits for deep pond decanters where there is too little space to adjust the pond depth radially at the liquid discharge side. In addition this adjustment on a small radius has lower effect on the hydraulic pressure than adjustment at the solids discharge openings.

The present invention relates to radially adjustable bushings at the solids discharge
30 openings by which the internal cake level can be adjusted to achieve optimal cake moisture or it can be used as an additional parameter to control the decanter. The

bushings can be adjusted in such a way as to reduce the total power consumption of the decanter, using hydraulic pressure difference as a scroll transport support.

In the present invention the relative pond depth is generated by varying the solids discharge diameter and by keeping the liquid discharge diameter fixed. This variation is enabled by using exchangeable or adjustable bushings moving the bushing entrance in radial direction together with a special shape of the scroll flight or the bowl at the end of the conical section. The bushings can be screwed or fixed with any system allowing radial movement or by exchangeable bushings with different lengths.

In EP 0 747 127 A2 is proposed an adjustable gate mounted on the hub of the scroll conveyor with a locking mechanism which can control the cake compaction at the solids discharge openings. This system is used to improve cake moisture or it is an additional method for operating a decanter centrifuge.

In EP 0 798 045 A1 is presented a system to control the flow of solid discharge by varying the cross-sectional area of the solids discharge openings with a sleeve which can help to improve moisture content in the cake and it can be used as an additional method for operating a decanter centrifuge.

Another system to control flow of solids discharge openings is shown in US 7 311 654 B2 where the adjusting of cross-section is made by a disk adjustable in the axial direction.

The patent application WO 2012/003407 A2 presents a cone-less decanter with a baffle where the solid lifts from the bowl wall in a radially inward manner along a plough and is pumped into a heavy phase discharge flow where it is re-suspended and exits the machine with that flow. There is no level difference on the two sides of the baffle. In order to adjust the solid phase flow across the baffle, air injection is used to change the density at one side of the baffle and thus generating a flow through the baffle gap.

In US 9 393 574 B1 are presented exchangeable wear inserts for the solids discharge openings of a decanter centrifuge with a holder fixed with screws from the outside. The discharge diameter is not varied in this case.

None of these patents are presenting solutions incorporating exchangeable or adjustable bushings in a radial manner without changing the outlet cross-section in

order to change the solid discharge diameter, thereby reducing the solid flow capacity.

The invention will now be described in further details based on exemplary, but not limiting, embodiments with reference to the drawings. In the drawings,

5 Fig. 1 shows a schematic cross-sectional view of a decanter centrifuge, according to prior art,

Fig. 2a shows a standard method of changing relative pond level of a decanter centrifuge with sliding weir plates at the liquid phase discharge, according to prior art,

Fig. 2b shows the method of changing relative pond level according to the invention,

10 Fig. 3 shows a schematic cross-sectional view in a plane parallel to the rotational axis of a decanter centrifuge at the solids discharge openings side with radially adjustable bushings mounted at the maximum discharge diameter of solid overflow according to one embodiment of the invention,

15 Fig. 4 shows a schematic cross-sectional view in a plane parallel to rotational axis of a decanter at the solids discharge openings with radially adjustable bushings according to the embodiment of Fig. 3 set at the minimum discharge diameter,

Fig. 5a shows a schematic cross-sectional view in a plane perpendicular to the rotational axis at the middle of solids discharge openings with exchangeable bushings according to another embodiment of the invention allowing the change of
20 solids discharge diameter,

Fig. 5b shows a schematic cross-sectional view in a plane perpendicular to the rotational axis at the middle of solids discharge openings with exchangeable bushings according to another embodiment of the invention,

Fig. 5c shows a schematic cross-sectional view in a plane perpendicular to the
25 rotational axis at the middle of solids discharge openings with bushings according to a further embodiment of the invention,

Fig. 5d shows a schematic cross-sectional view in a plane perpendicular to the rotational axis at the middle of solids discharge openings with exchangeable bushings according to another embodiment of the invention,

Fig. 5e shows a schematic cross-sectional view in a plane perpendicular to the rotational axis at the middle of solids discharge openings with exchangeable bushings according to a further embodiment of the invention,

Fig. 5f shows a schematic solids discharge opening arrangement according to a
5 another embodiment of the invention,

Fig. 6a shows a 3D example of a radially adjustable bushing with a locking mechanism system according to one embodiment of this invention,

Fig. 6b shows a cross-sectional view at solids discharge openings of an adjustable bushing screwed into the bowl according to one embodiment of this invention.

10 Fig. 1 shows a decanter centrifuge according to the state of the art with a rotating bowl 1 and a scroll conveyor 2 which is pivoted coaxially with the rotating axis of the bowl 1, an axial feed 3, a feed chamber 4, slurry outlet 5, a liquid phase discharge outlet 6 for clear liquid phase and a solids discharge opening 7 for the recovery of the solid phase.

15 Fig. 2a shows a schematic sketch of a decanter centrifuge according to the state of the art. Here the pond depth 14 is defined by the overflow weir 13 at the liquid phase discharge outlet 6 and results in the liquid discharge diameter. In standard decanters the relative pond depth 12 is generated by varying the liquid discharge diameter 14 with sliding or exchangeable weir plates 13 or discharge port members while the
20 solids discharge diameter 15 at solids discharge opening 7 is fixed. In this way the relative pond depth 12 can be varied.

Fig. 2 b presents an embodiment of the invention where the solids overflow
discharge diameter 15 can be changed in a simple and cheap manner by exchanging or adjusting the bushing 10 at solids discharge opening 7. Here the relative pond
25 depth 12 is adjusted by varying the solids discharge diameter 15 by means of radially adjustable bushings or exchangeable bushings 10 with different lengths while the liquid discharge diameter 14 is fixed.

In another embodiment of the invention the relative pond depth 12 is established by changing both discharge diameters at the same time: adjustable or exchangeable
30 weir plates 13 or discharge port members for the liquid discharge and radially adjustable or exchangeable bushings 10 for the solids discharge openings. This

invention can also be implemented in a 3-phase decanter and serves to improve the decanter performance.

Fig. 3 and Fig. 4 show a variant of the invention at the end of the solids discharge
5 openings. The solids 17 are transported by the scroll flights to the solids discharge
openings 7. The scroll flight 16 is reduced relative to the bowl inner diameter at the
position of the solids discharge opening 7 in order to not touch the bushing 10 when
it is moved radially inward. This scroll modification will not influence the cake
transportation inside the decanter, because at the end of the conical section (close to
10 the flat section) the cake level is low and as conveyed by the scroll, it collapses and it
is pushed by the flowing cake to the level of the bushings' edges. When the
bushings 10 are set at maximum discharge diameter (close to the bowl inner
diameter at the solid discharge openings) as shown schematically in Fig. 3, a
cresting is generated at bushings' edges in a similar manner as for liquid discharge.
15 The size of the cresting is depending of cake dryness, product rheology, bowl speed,
scroll pitch and speed, outlet surface and shape. In the case of the maximum inward
position of bushing 10 presented in Fig. 4 a stagnation cake flow is created mainly in
front of the inside part of the bushing 10 generating an additional cone of cake which
helps to transport the product at the smaller solids discharge diameter 15.
20 More embodiments of this invention are presented in Fig. 5a-5f where the
exchangeable bushings 10 with different lengths are inserted in a holder with a
different kind of fixation mechanism. The variation of the solid discharge diameter
can be done without changing the bushing 10 by adding different spacers 21 with
different thickness between the bowl 1 and the bushing 10 (Fig. 5 c). The bushing
25 holder allows changing the orientation of the solids discharge opening relative to the
bowl rotation and to a plane perpendicular to the rotational axis. Discharging the cake
in opposite direction of the bowl rotation is state of the art known in the patent
EP 0 798 045 A1 where the changing of flow direction is achieved by manufacturing
the opening of the bowl wall in the form of inclined channels angled backwards with
30 respect to the direction of bowl rotation. In the present embodiment of the invention
the bowl openings are manufactured in standard radial direction and the changing of
the cake flow is done in the bushing holder as shown in Fig. 5b. The modification of

cake flow direction relative to bowl speed direction improves the total power consumption and reduces the wear on the hopper. Another embodiment to improve the power consumption is presented on Fig. 5c where the holder bushing is provided with a shoulder to discharge the solids on a smaller diameter relative to the bushing thickness. The wear on the hopper can also be reduced by modifying the cake flow direction at the outlet of the decanter relative to a plane perpendicular to the rotational axis as presented in Fig. 5d. The exchangeable bushing 10 may be oriented in the opposite direction of bowl rotation with an angle α in the range of 1° - 85° , more preferably in view of an easier manufacture. It is also possible to have an angle α of 90° with a specific bushing 10 as shown in Fig. 5e. With such orientation against the direction of bowl rotation the maximum power recovery can be achieved. A further embodiment of the invention is shown in Fig. 5f where the discharge is achieved at an angle β in the range of -45° to 45° , more preferably between -15° and 15° . This helps to avoid product impact in the same plane from all bushings 10, thereby reducing the wear on the hopper.

In the Fig. 6a is presented a 3D example of a radially adjustable bushing 10 according to one embodiment of this invention. It is provided with a locking mechanism 18 to avoid that the bushing loosens during the rotation of the decanter. Fig. 6b shows a cross-sectional view of an adjustable bushing mounted on the bowl 1. The bushing holder 19 is screwed into the bowl thread and it is retaining the wear resistant insert 20. The drawing is showing a round shape of the insert cross-section but it can be manufactured with any other shape and mounted in the holder 19.

The example in Fig. 6 is showing but not limiting the fixation mechanism of radially adjustable or exchangeable bushings 10 used to adjust the solid discharge overflow diameter 15.

The invention is not limited to the examples shown in the drawings. It may be used for any kind of decanter where the discharge of liquid and solids and thus the separation shall be adjusted.

Claims

1. A decanter centrifuge comprising:

- a centrifugal bowl (1) rotatable around a preferably horizontal axis of rotation (11) including at least one liquid phase discharge outlet (6) at one end and at least one solids discharge opening (7) at the other end;
- a scroll conveyor (2) mounted substantially concentrically inside the bowl (1) for rotation about said axis of rotation of said centrifugal bowl (1) at a slightly different speed relative to the bowl (1) for transporting the solid phase towards said solids discharge opening (7);
- said liquid phase discharge (6) enabled through port members characterized in that
 - a set of bushings (10) for solid discharge is provided to adjust the solid discharge diameter (15) inside the bowl (1).

2. The decanter centrifuge according to claim 1, wherein said bushings (10) are exchangeable.

3. The decanter centrifuge according to claim 1, wherein said bushings (10) are radially adjustable.

4. The decanter centrifuge according to any of claims 1 to 3, wherein said bushings (10) are screwed, fixed or provided with a spacer (21).

5. The decanter centrifuge according to any of claims 1 to 3, wherein said bushings (10) are mounted with any system allowing the change of solid discharge diameter (15) inside the bowl (1).


6. The decanter centrifuge according to any of claims 1 to 5, wherein said bushings (10) are manufactured from wear resistant material.


7. The decanter centrifuge according to any of claims 1 to 6, wherein said bushings (10) are orientated in the opposite direction of the bowl rotation.


8. The decanter centrifuge according to any of claims 1 to 7, wherein said bushings (10) are provided with a shoulder.

9. The decanter centrifuge according to any of claims 1 to 8, wherein said bushings (10) are oriented variably relative to the plane perpendicular to the rotational axis (11) with an angle (α) in the range of 1° to 90°, preferably 30° to 60°.

- 10.** The decanter according to any of claims 1 to 8, wherein said bushings (10) are varied at the middle of openings with an angle (β) in the range of -45° to 45° , preferably -15° to 15° , provided in the solids discharge opening (7).
- 11.** The decanter according to claim 1, wherein said liquid discharge outlet (6) is provided with weir plates (13)
- 12.** The decanter according to claim 1, wherein said liquid phase discharge is enabled with pressure enabling devices.

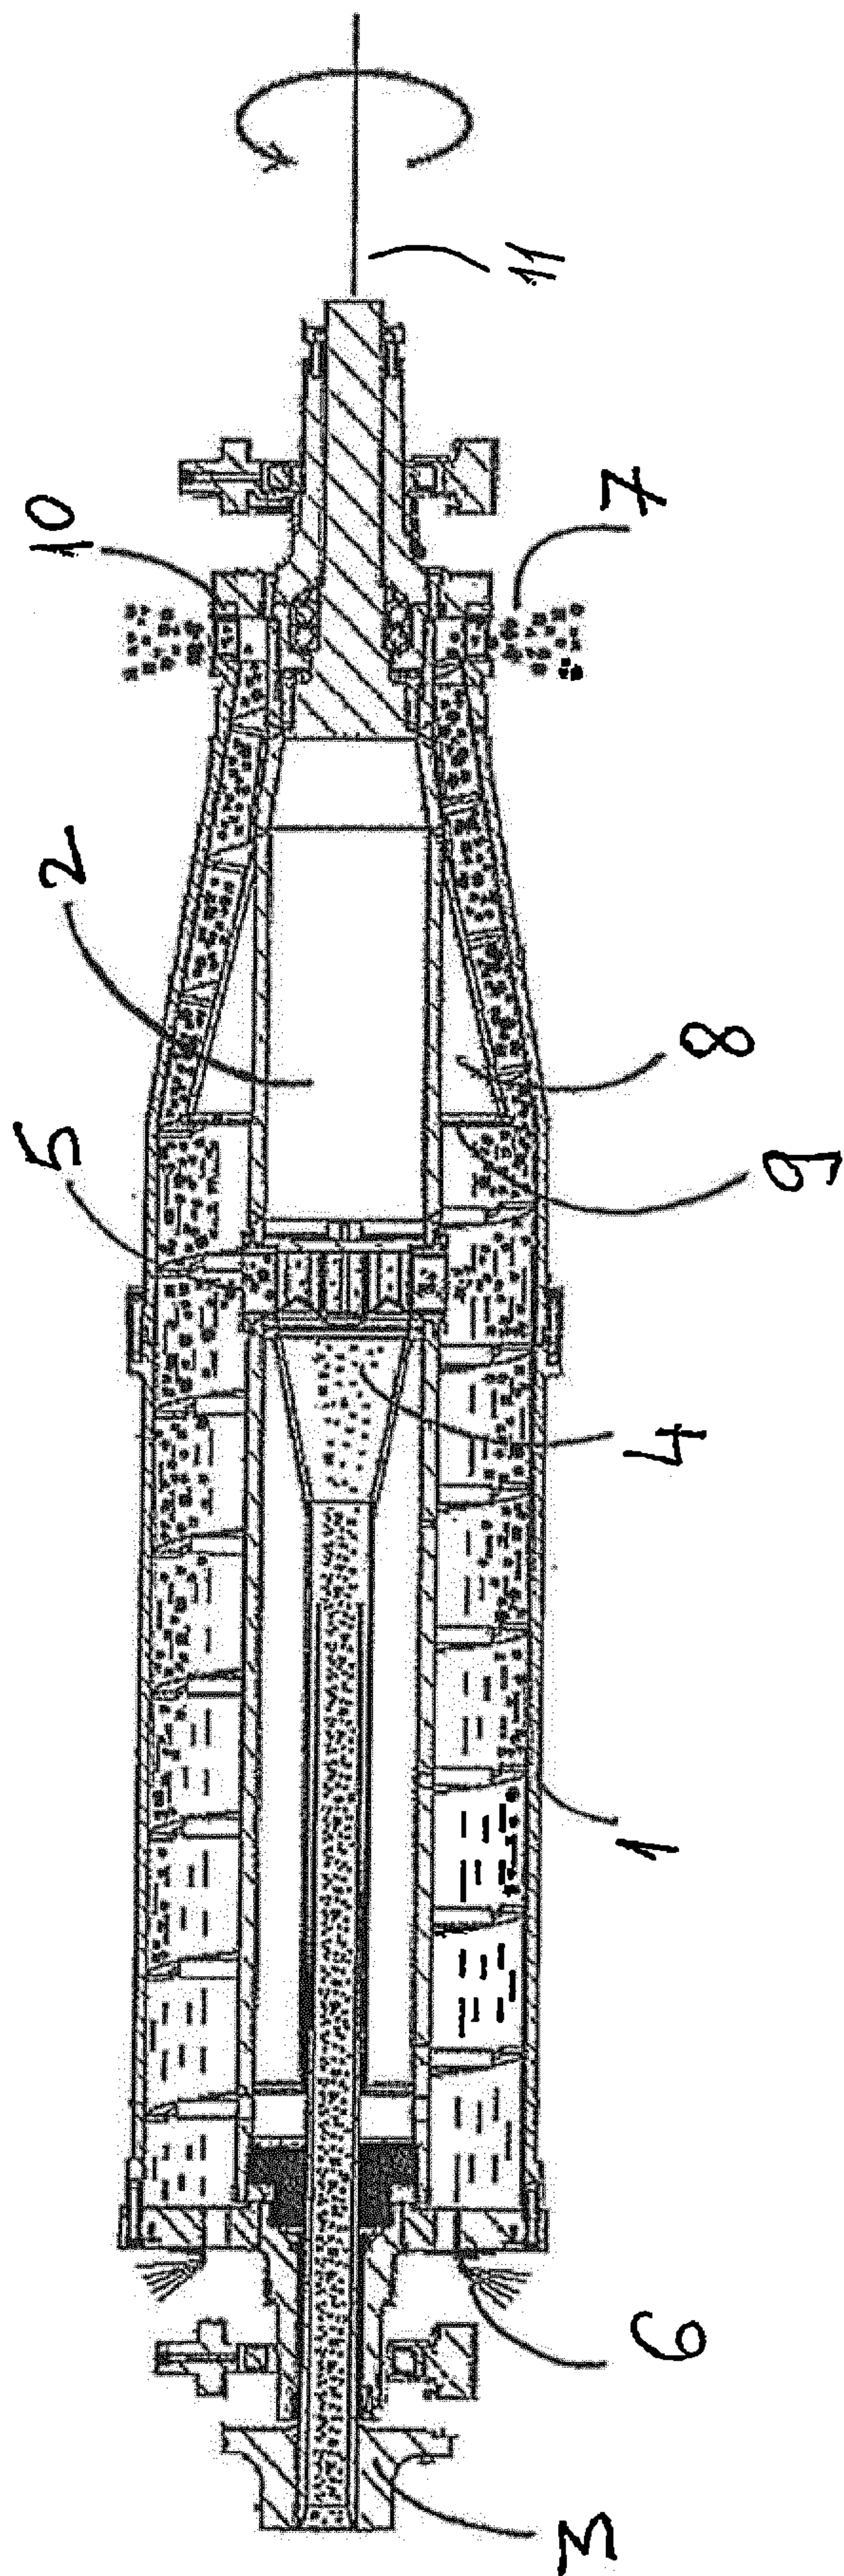

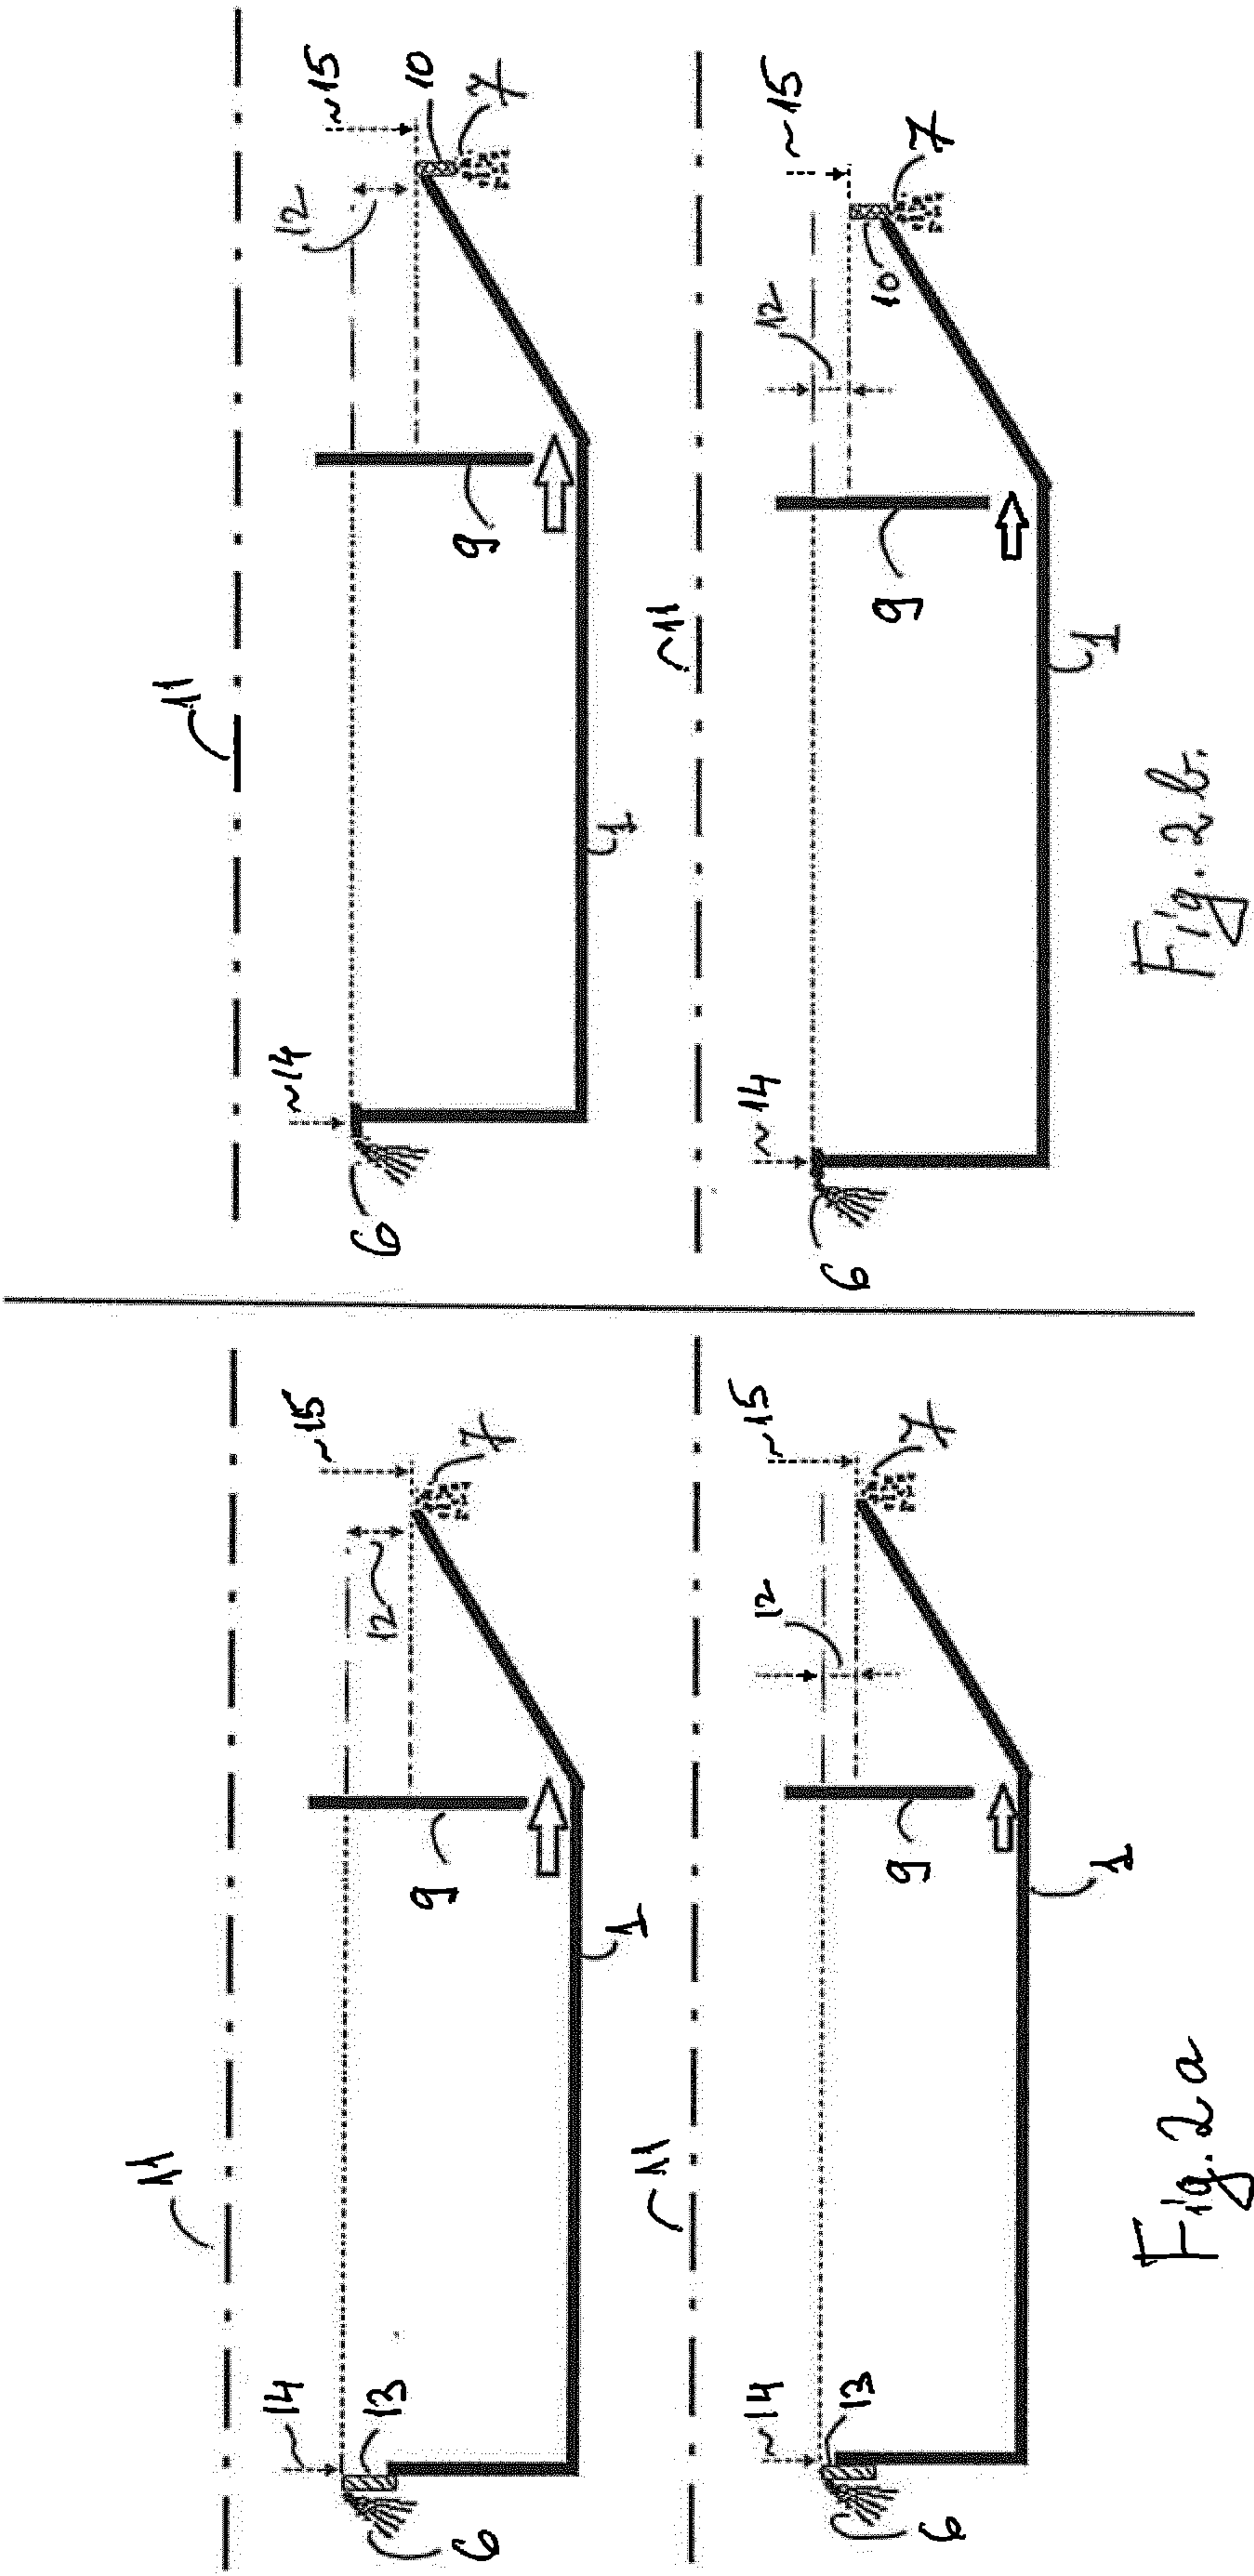

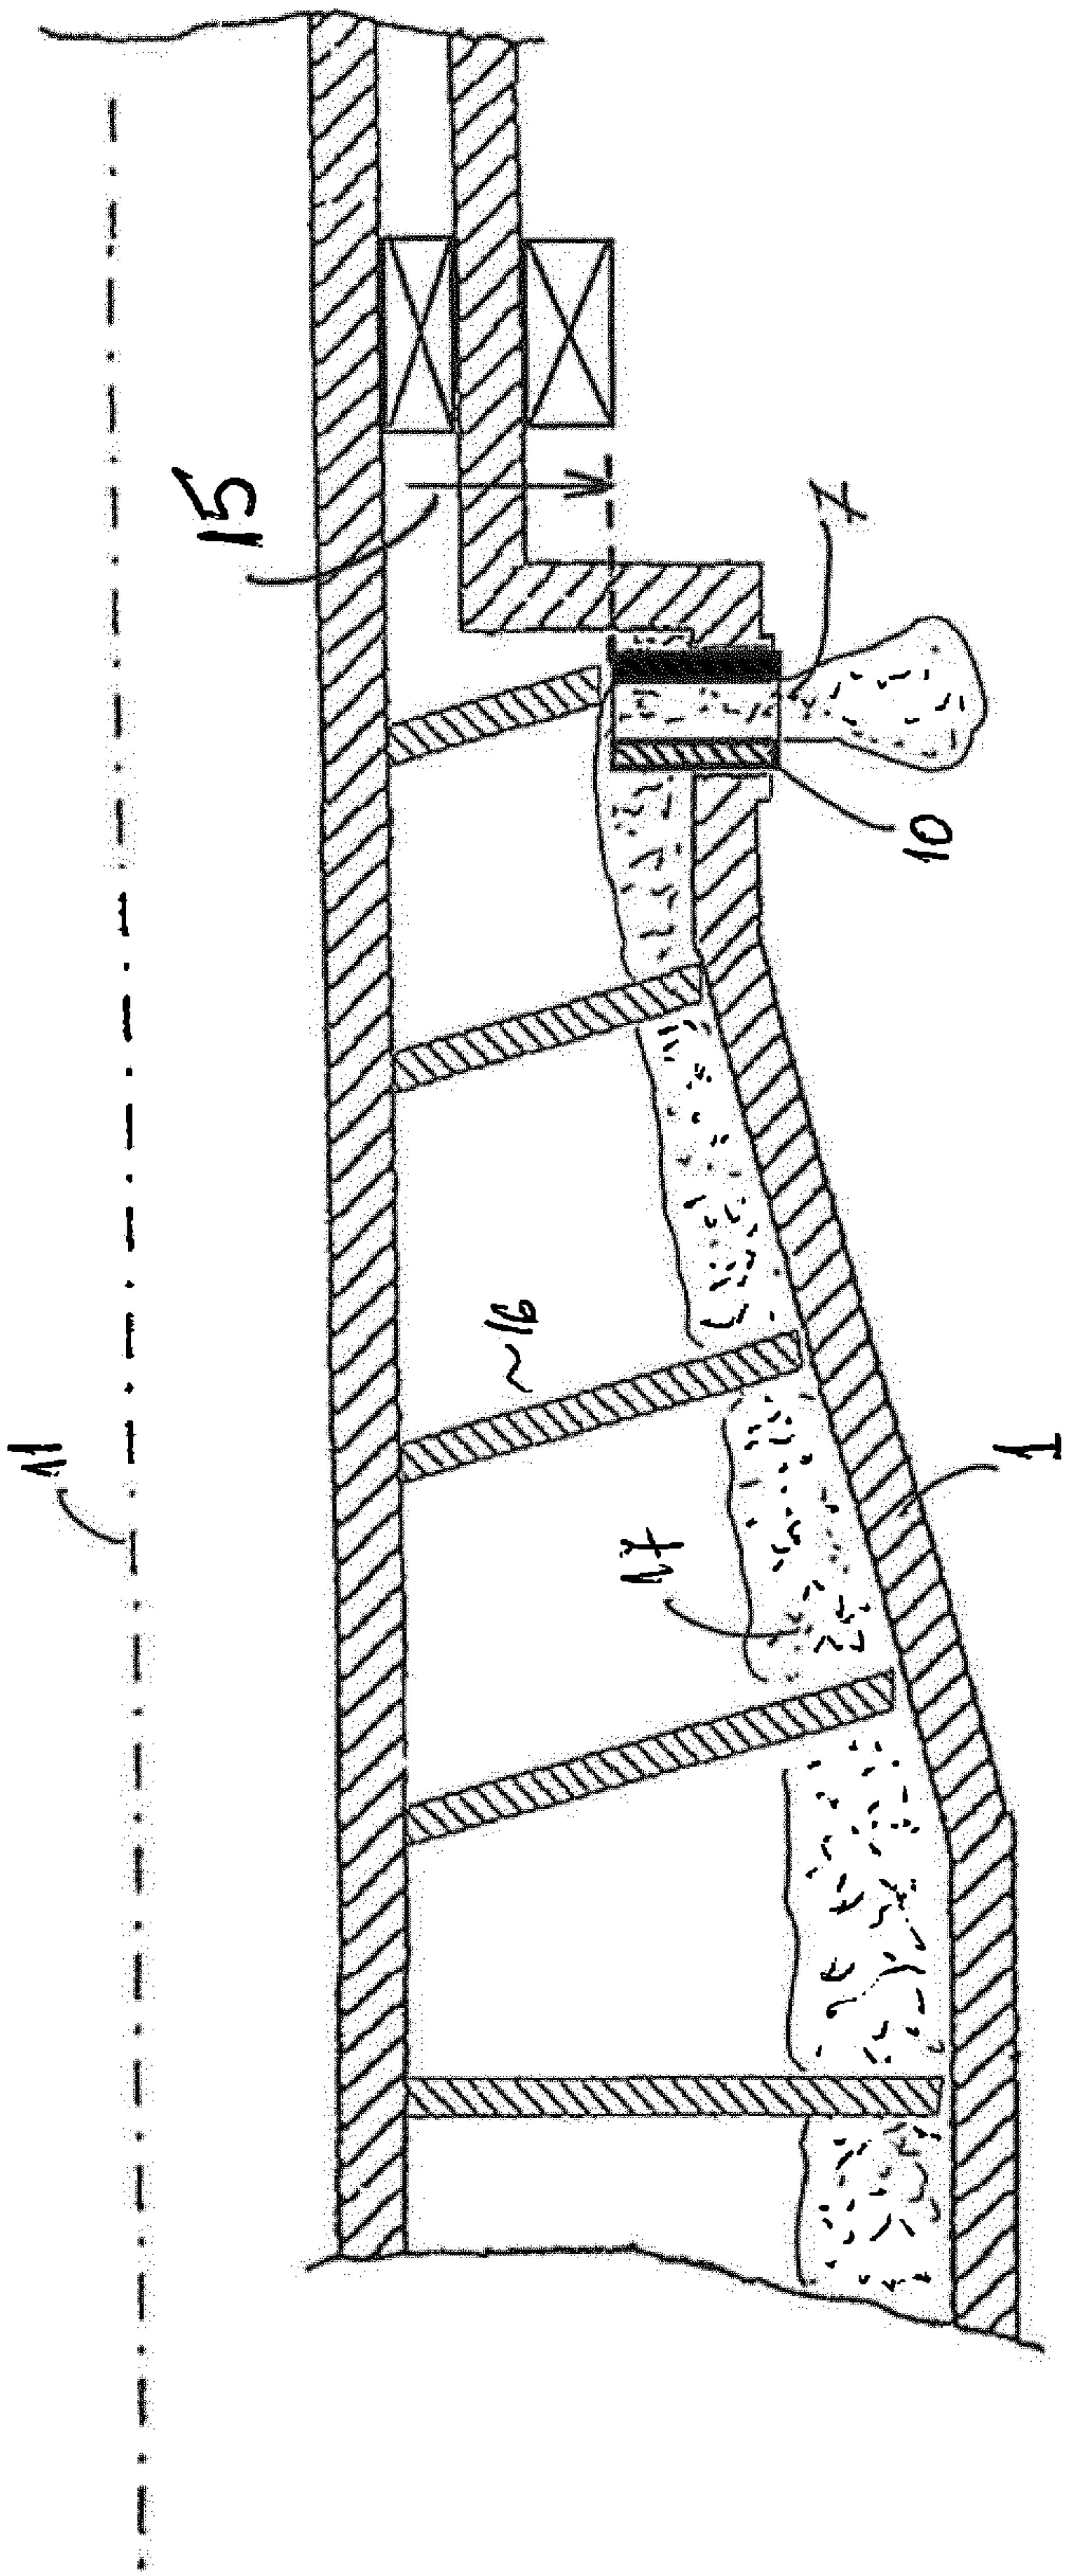

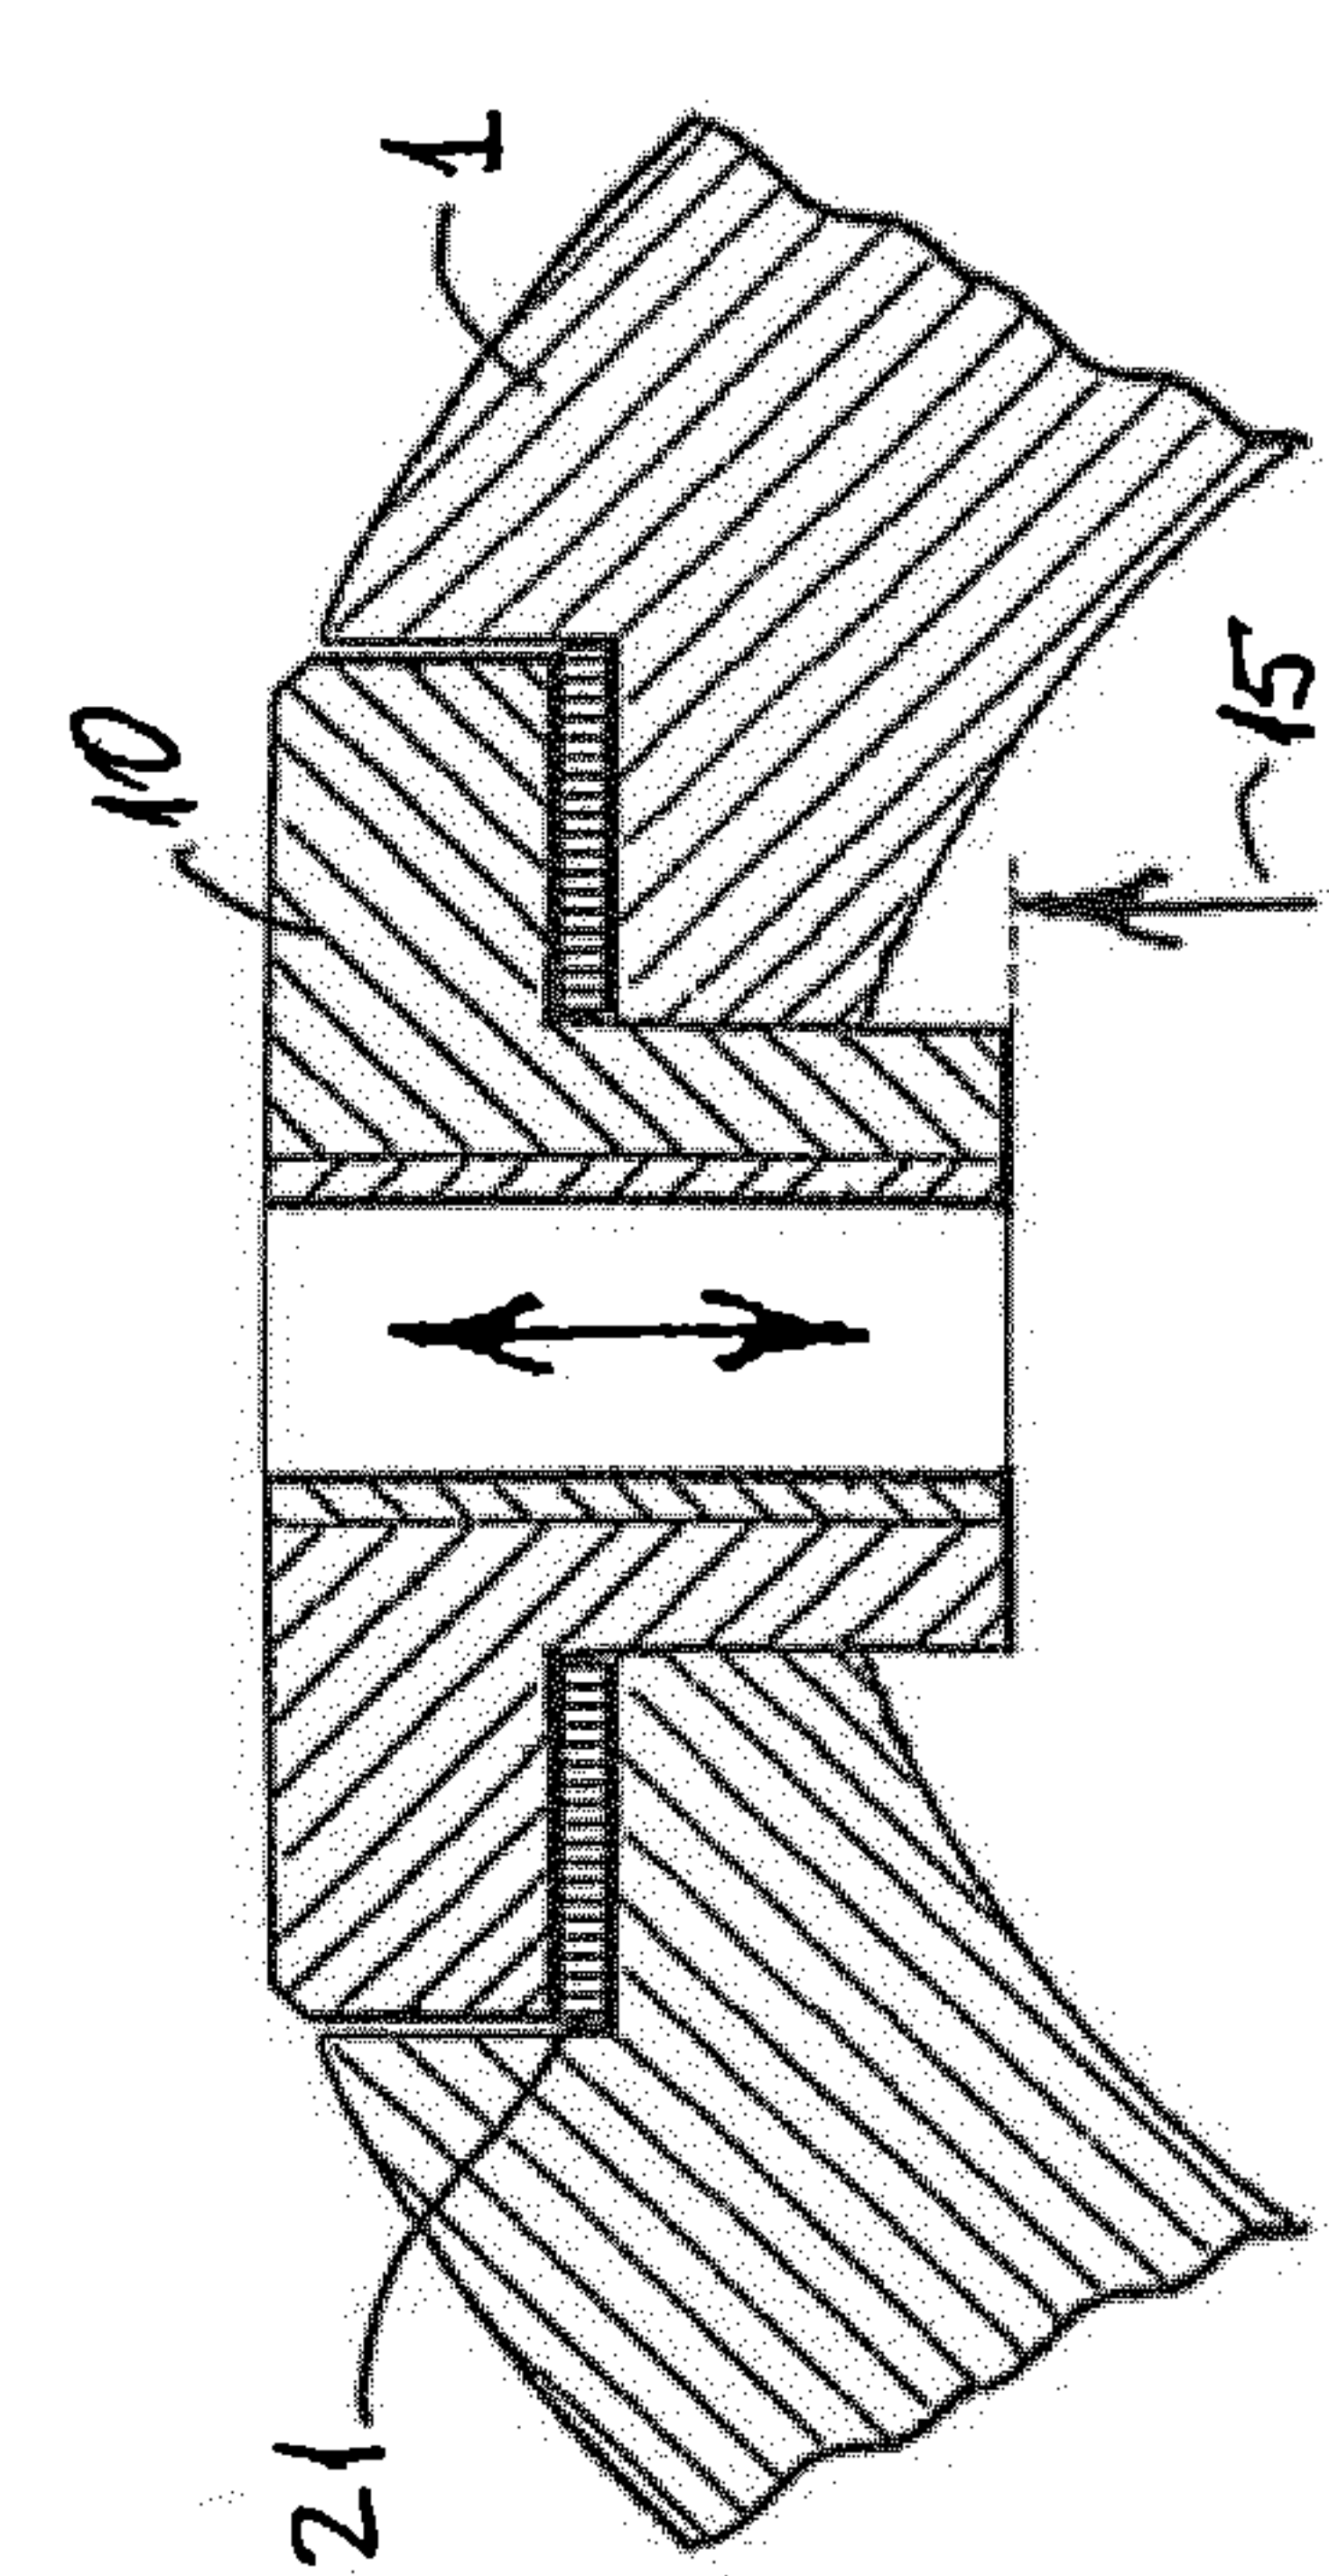


Fig. 5a

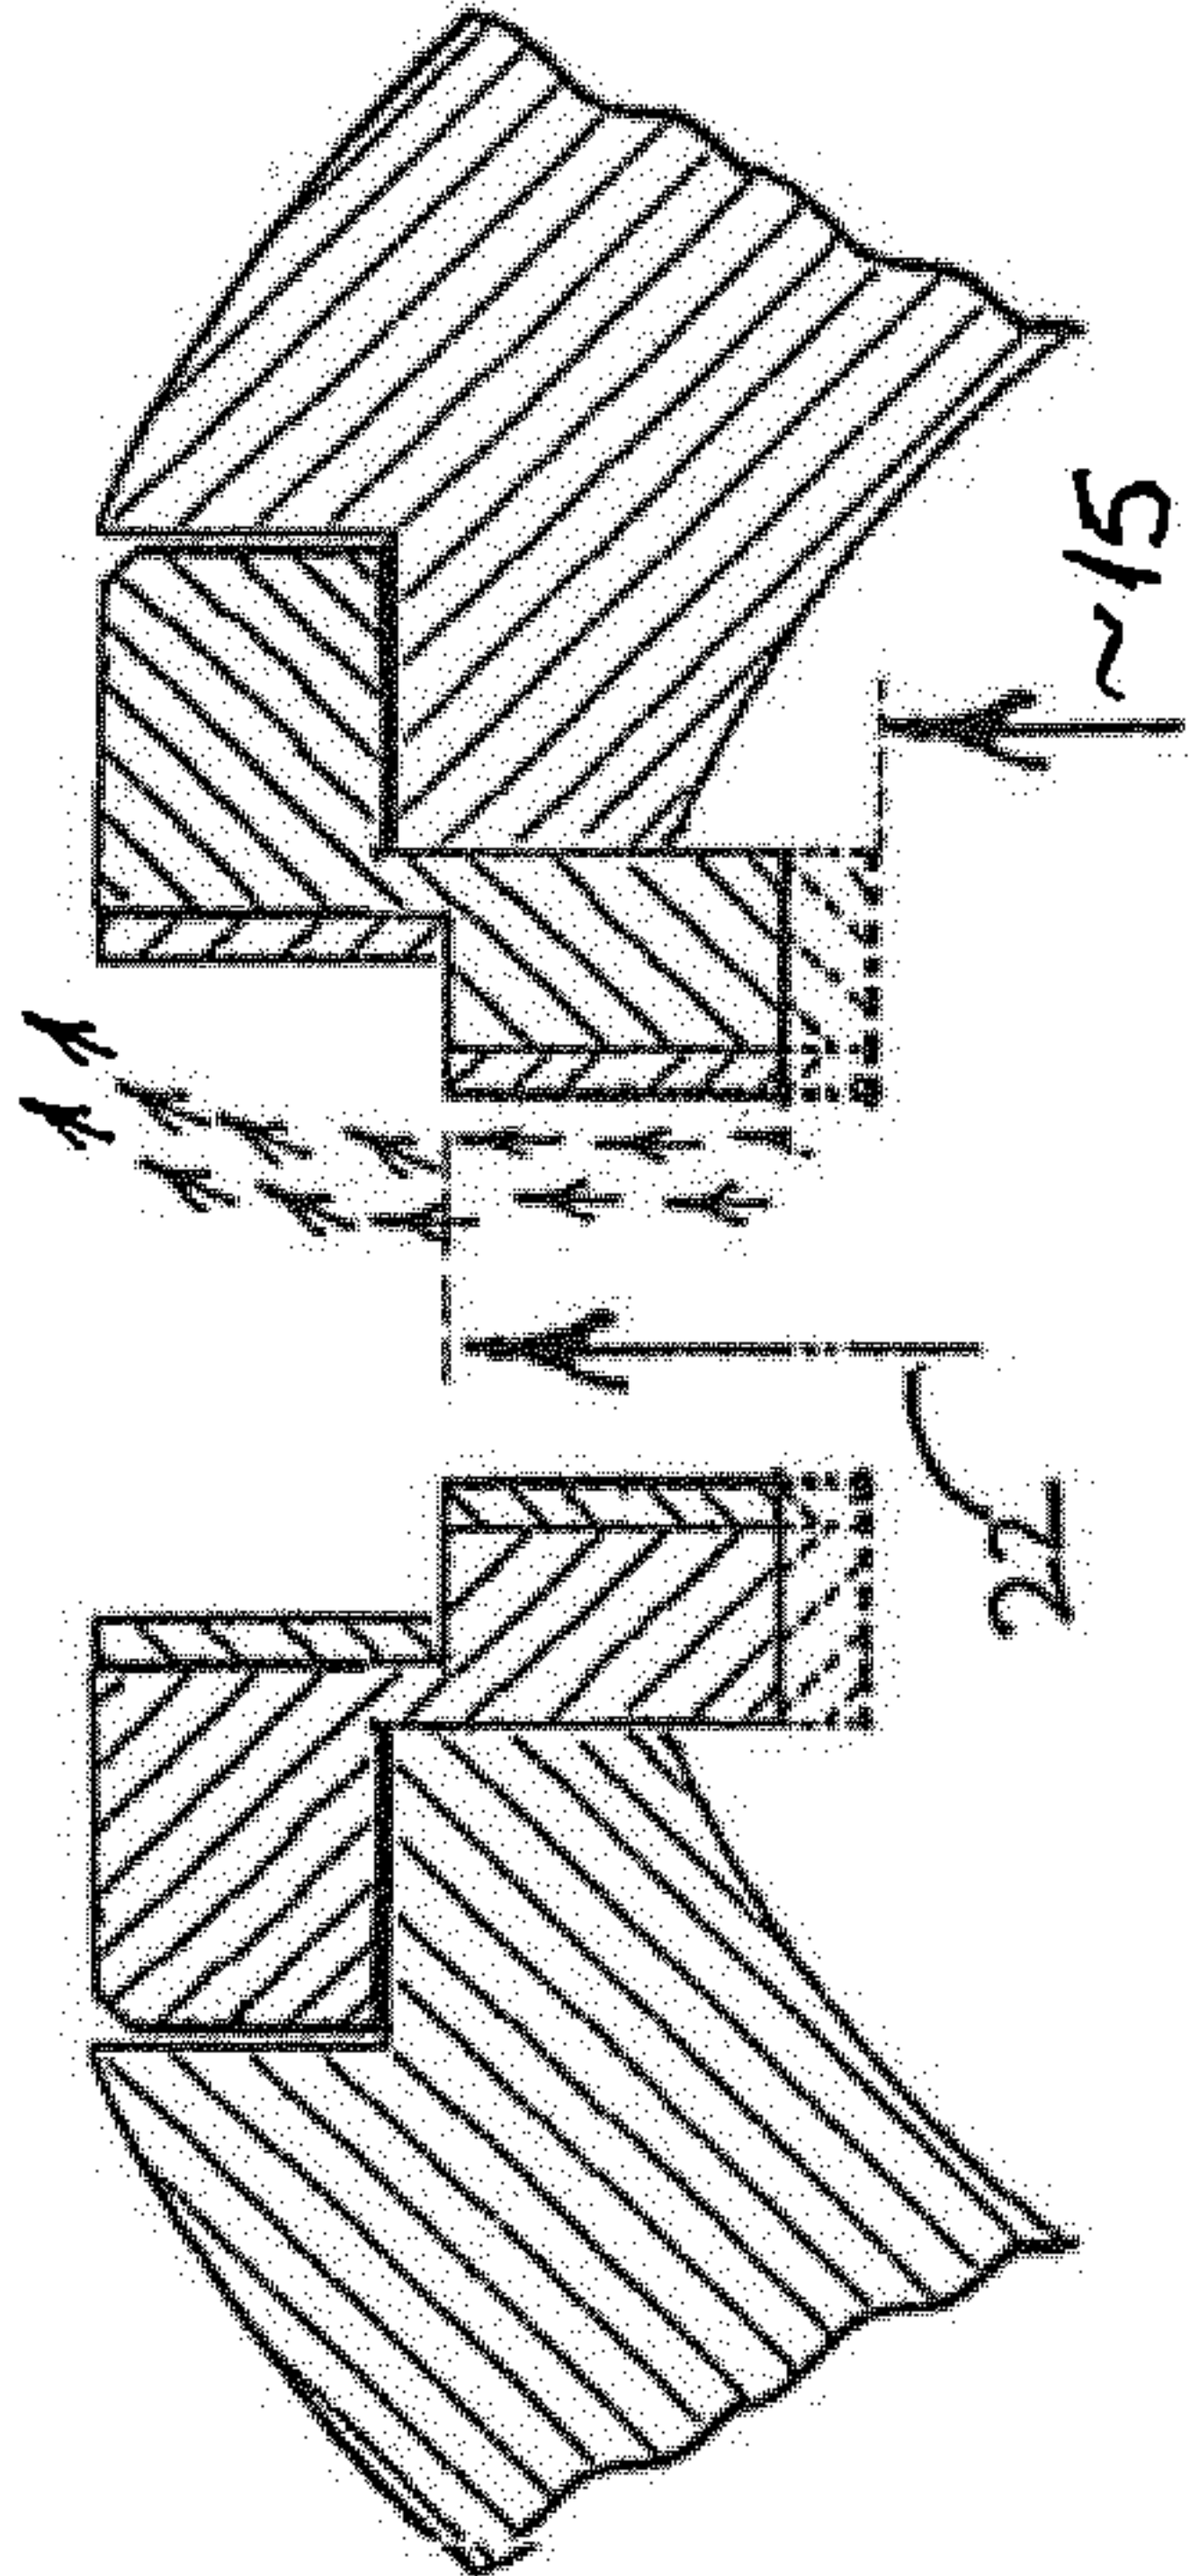
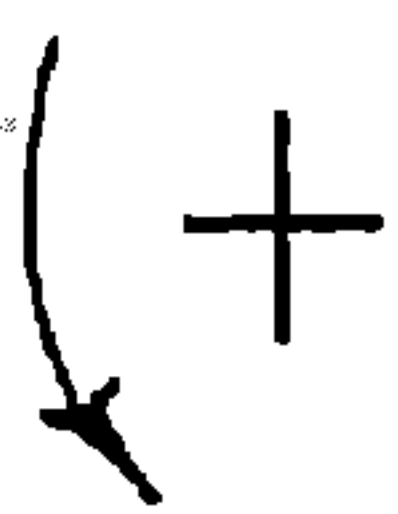


Fig. 5b

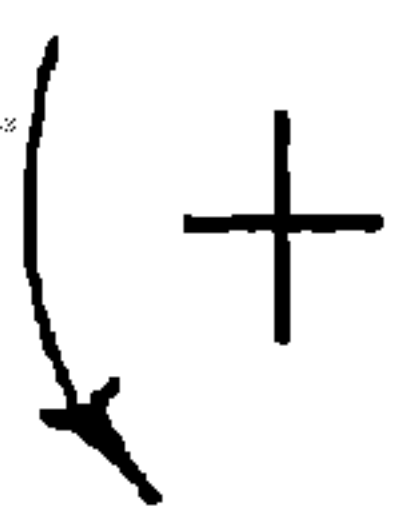
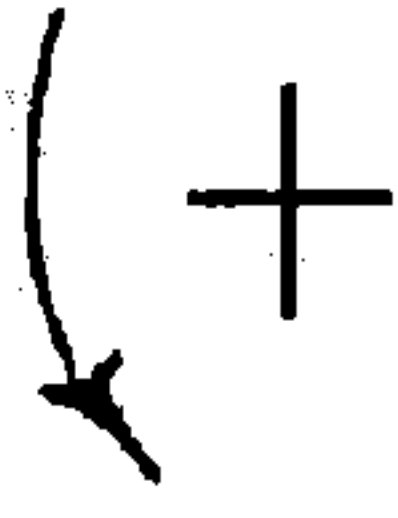


Fig. 5c

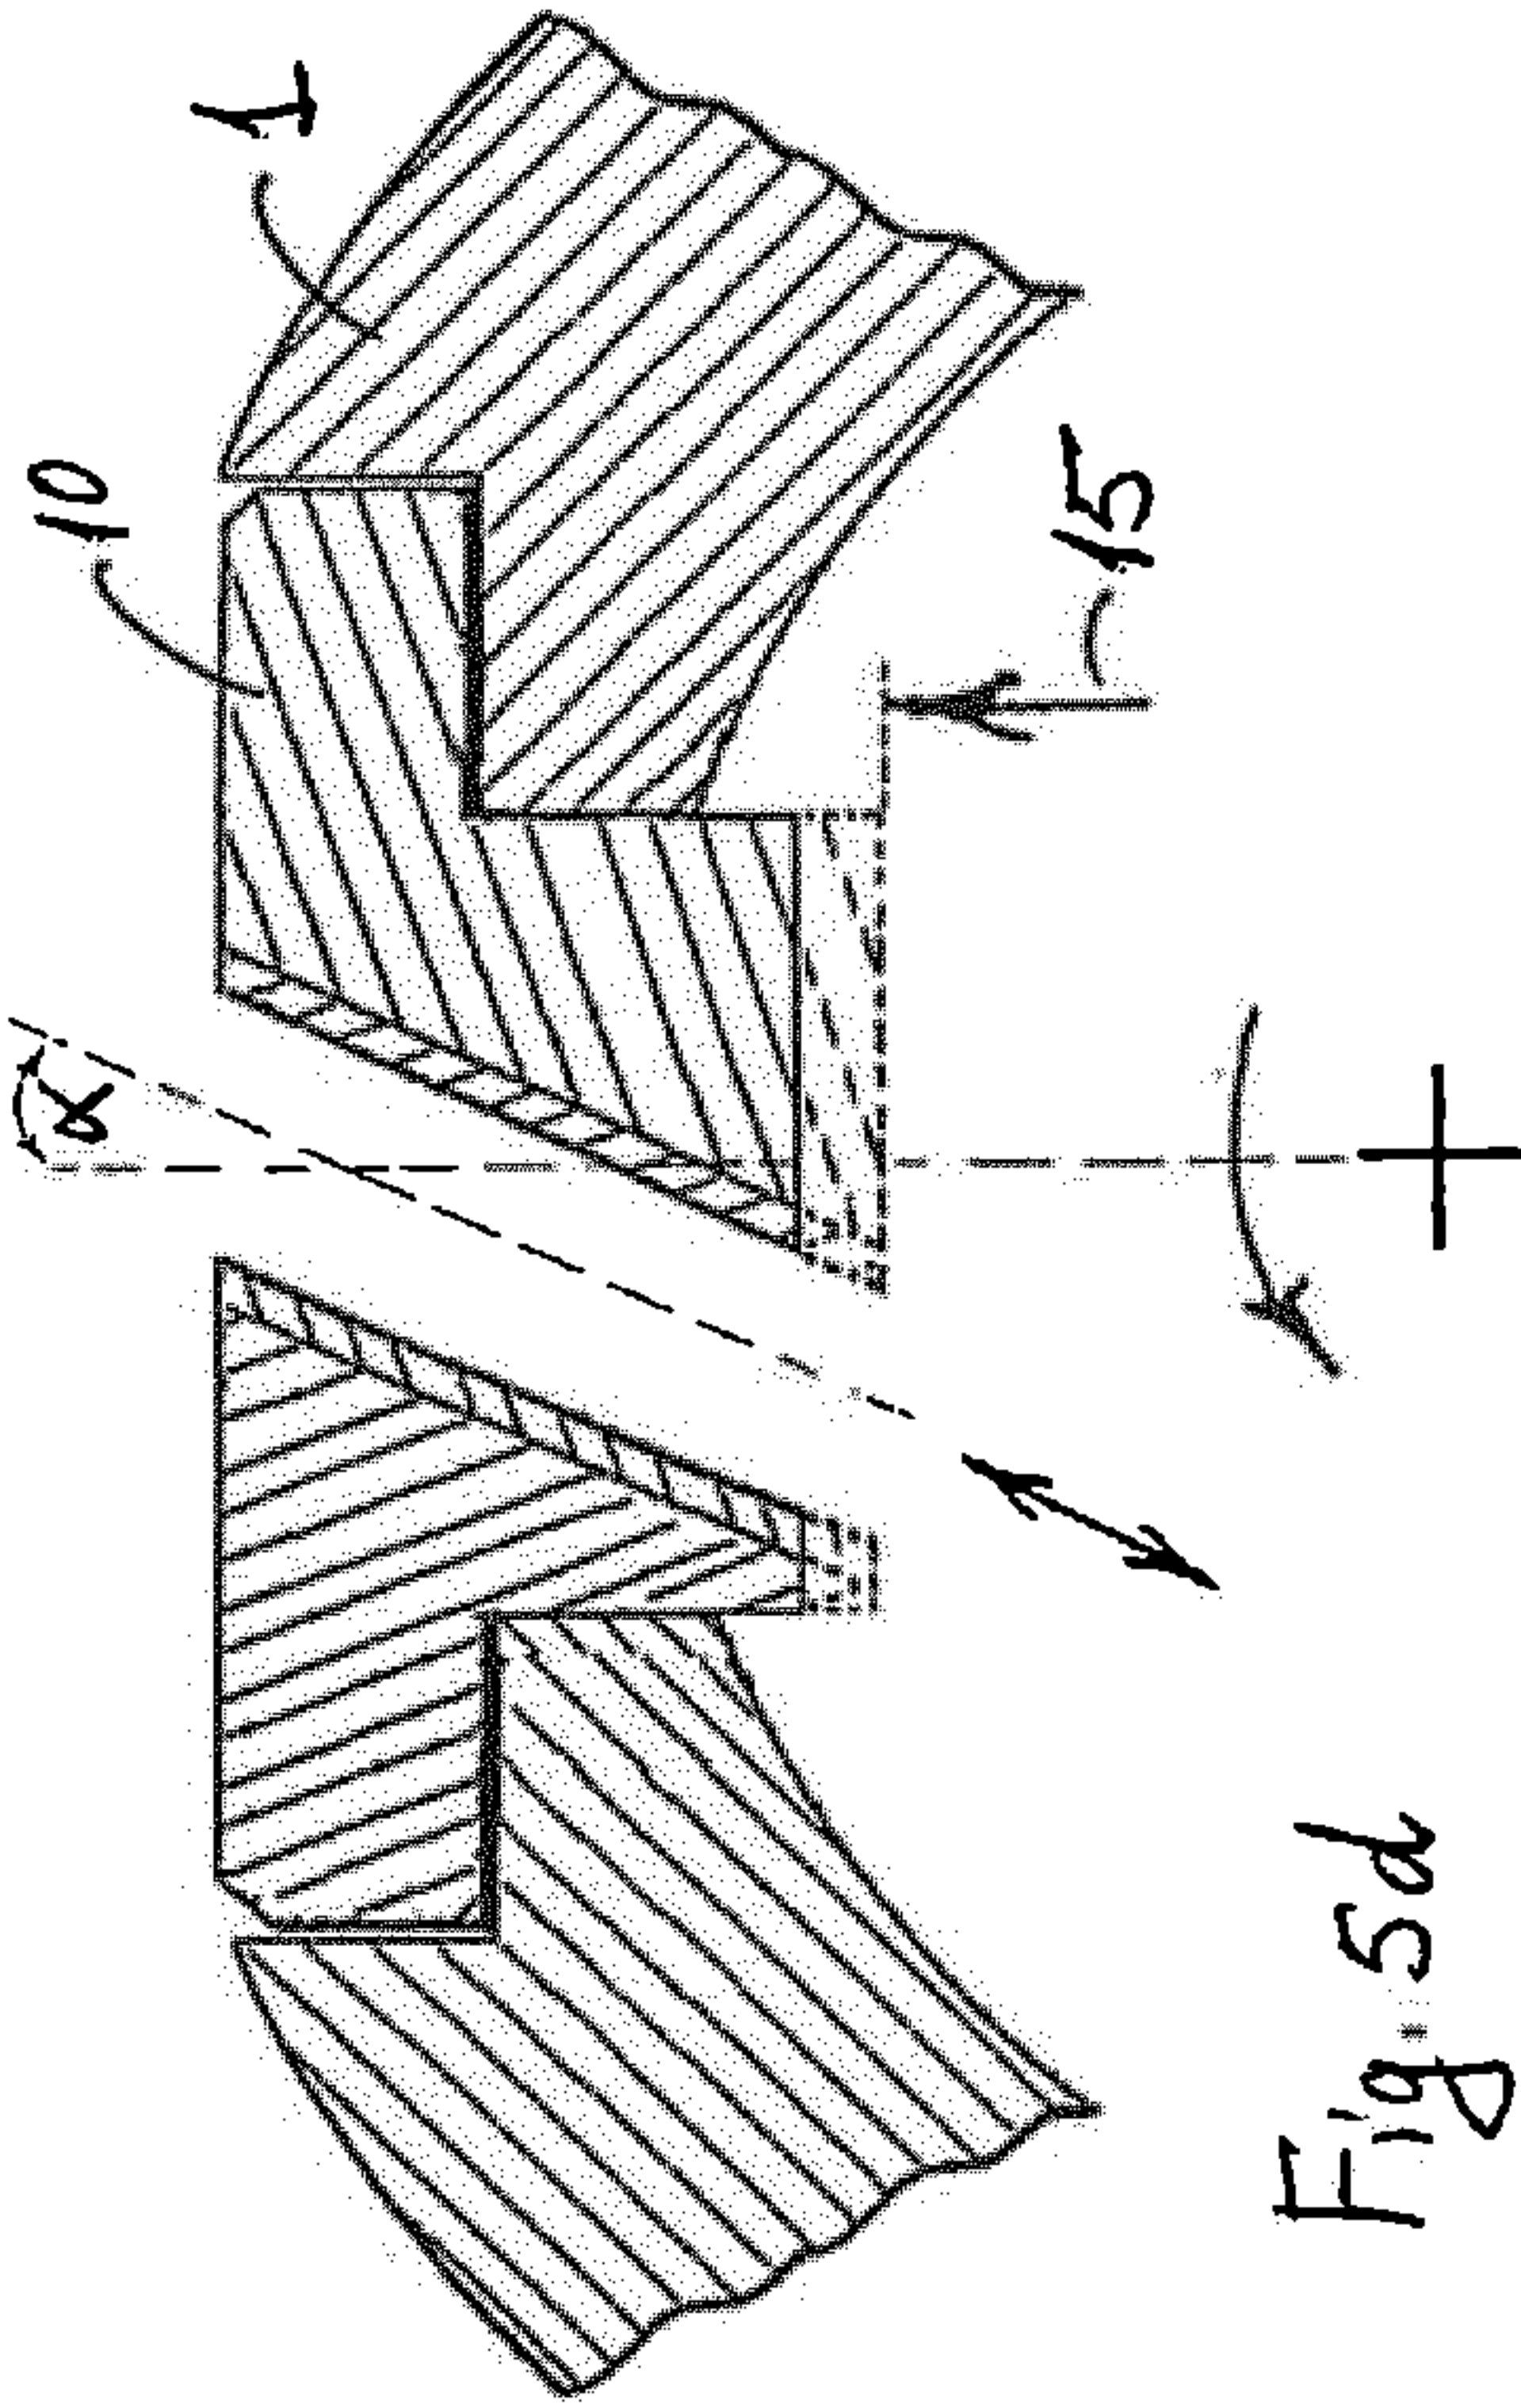


Fig. 5d

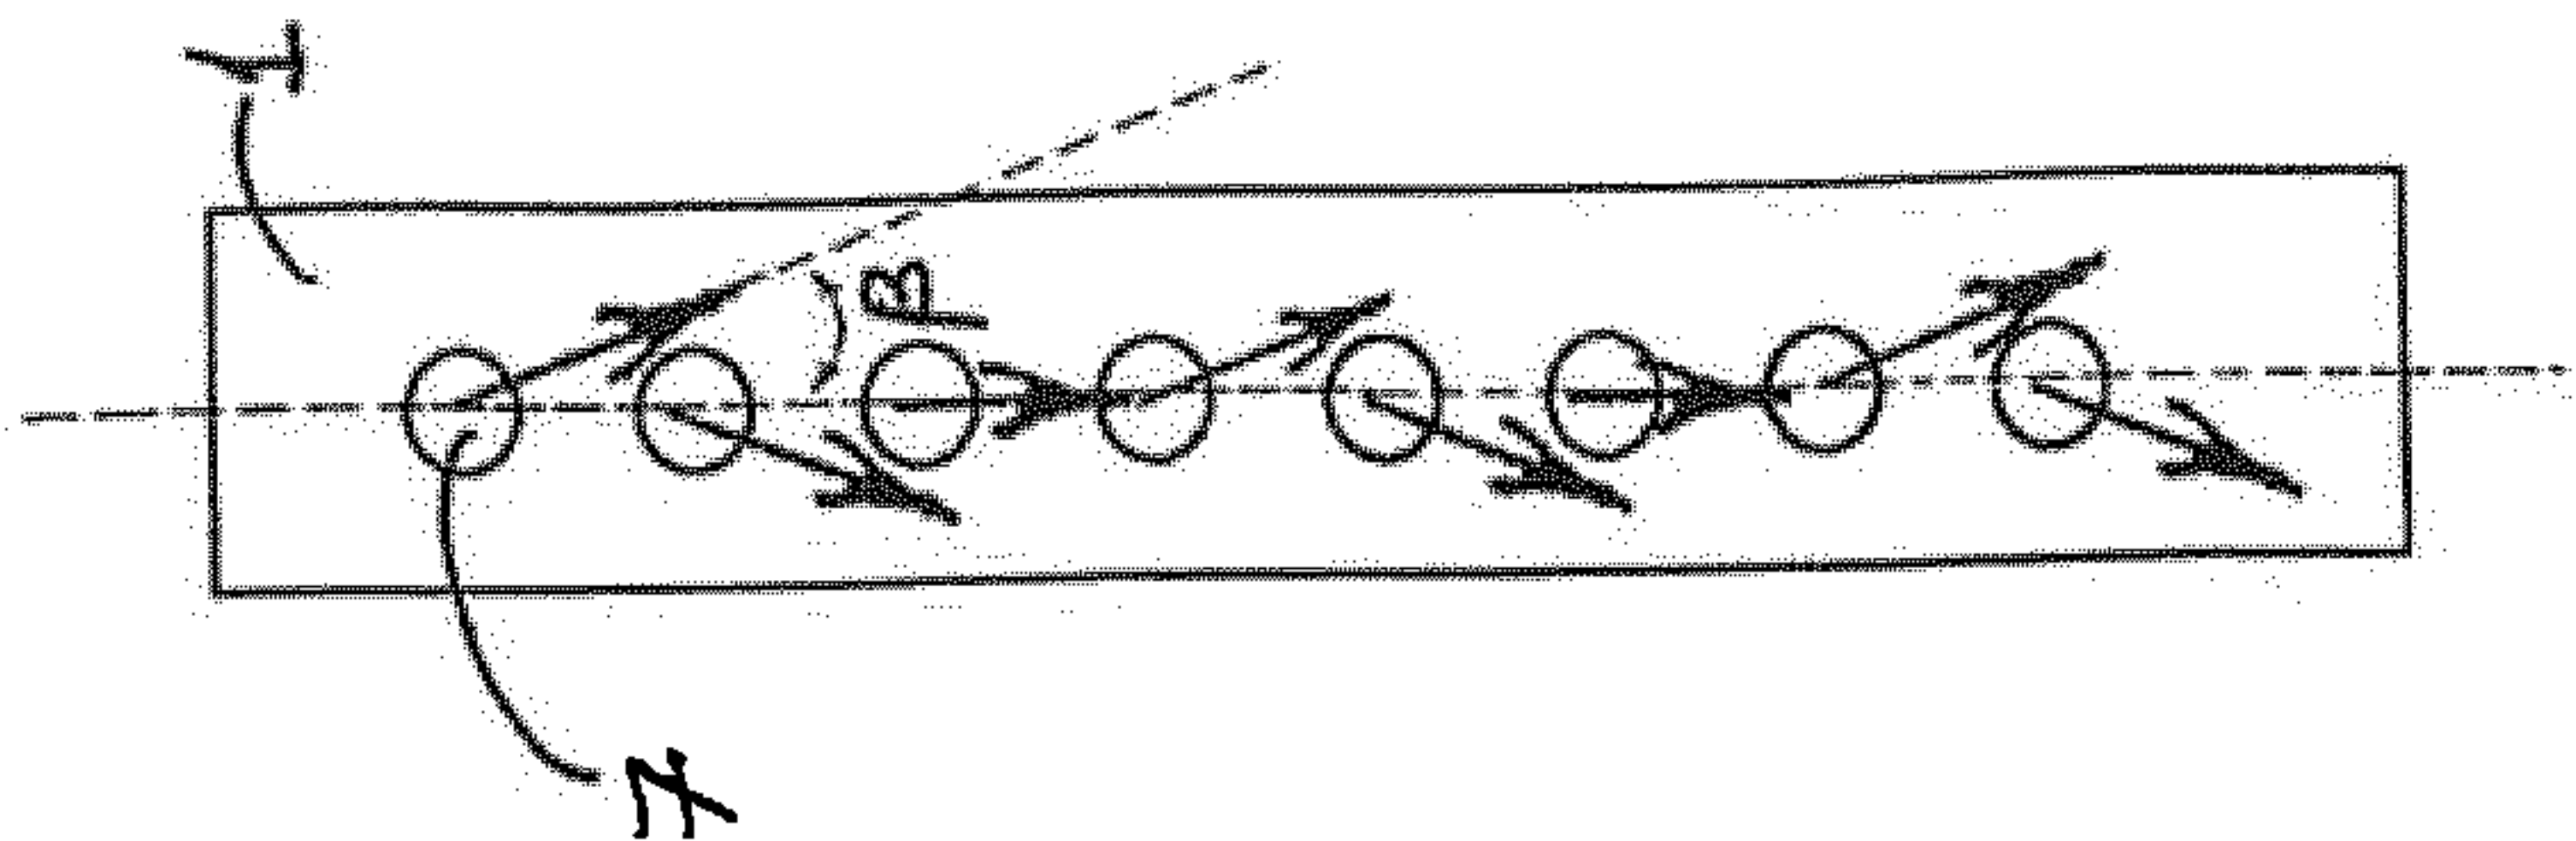


Fig. 5f

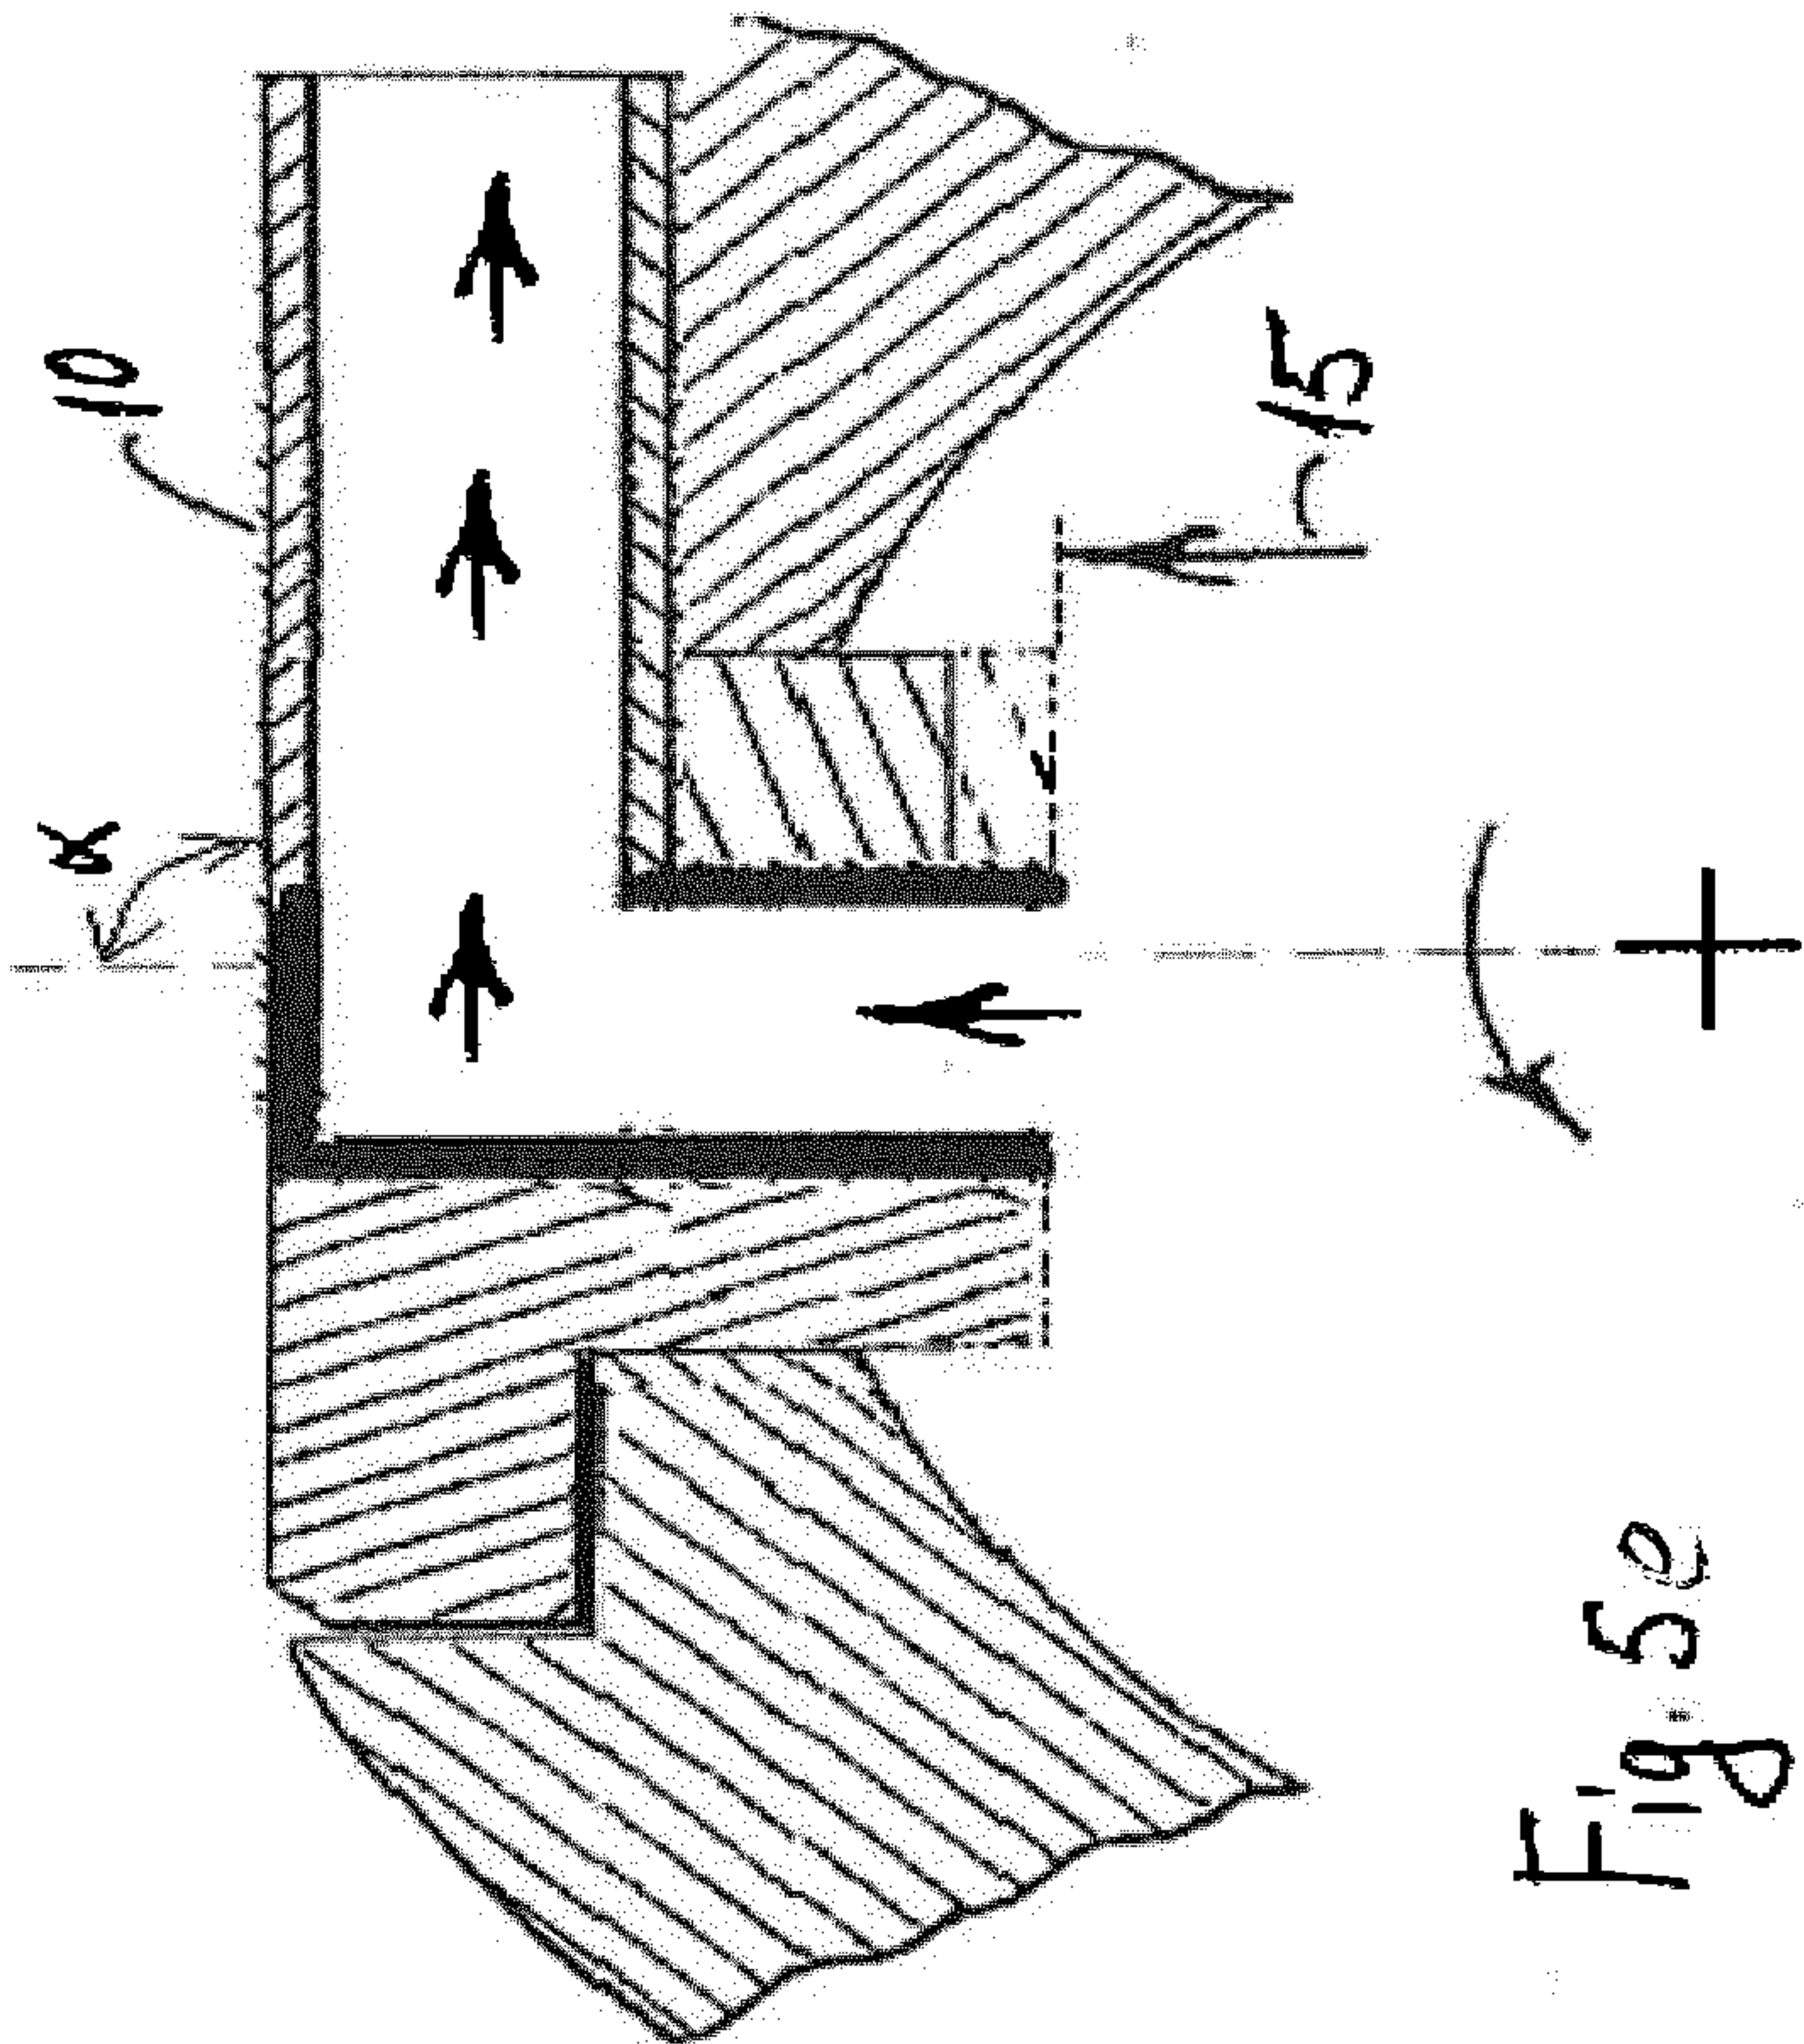


Fig. 5e

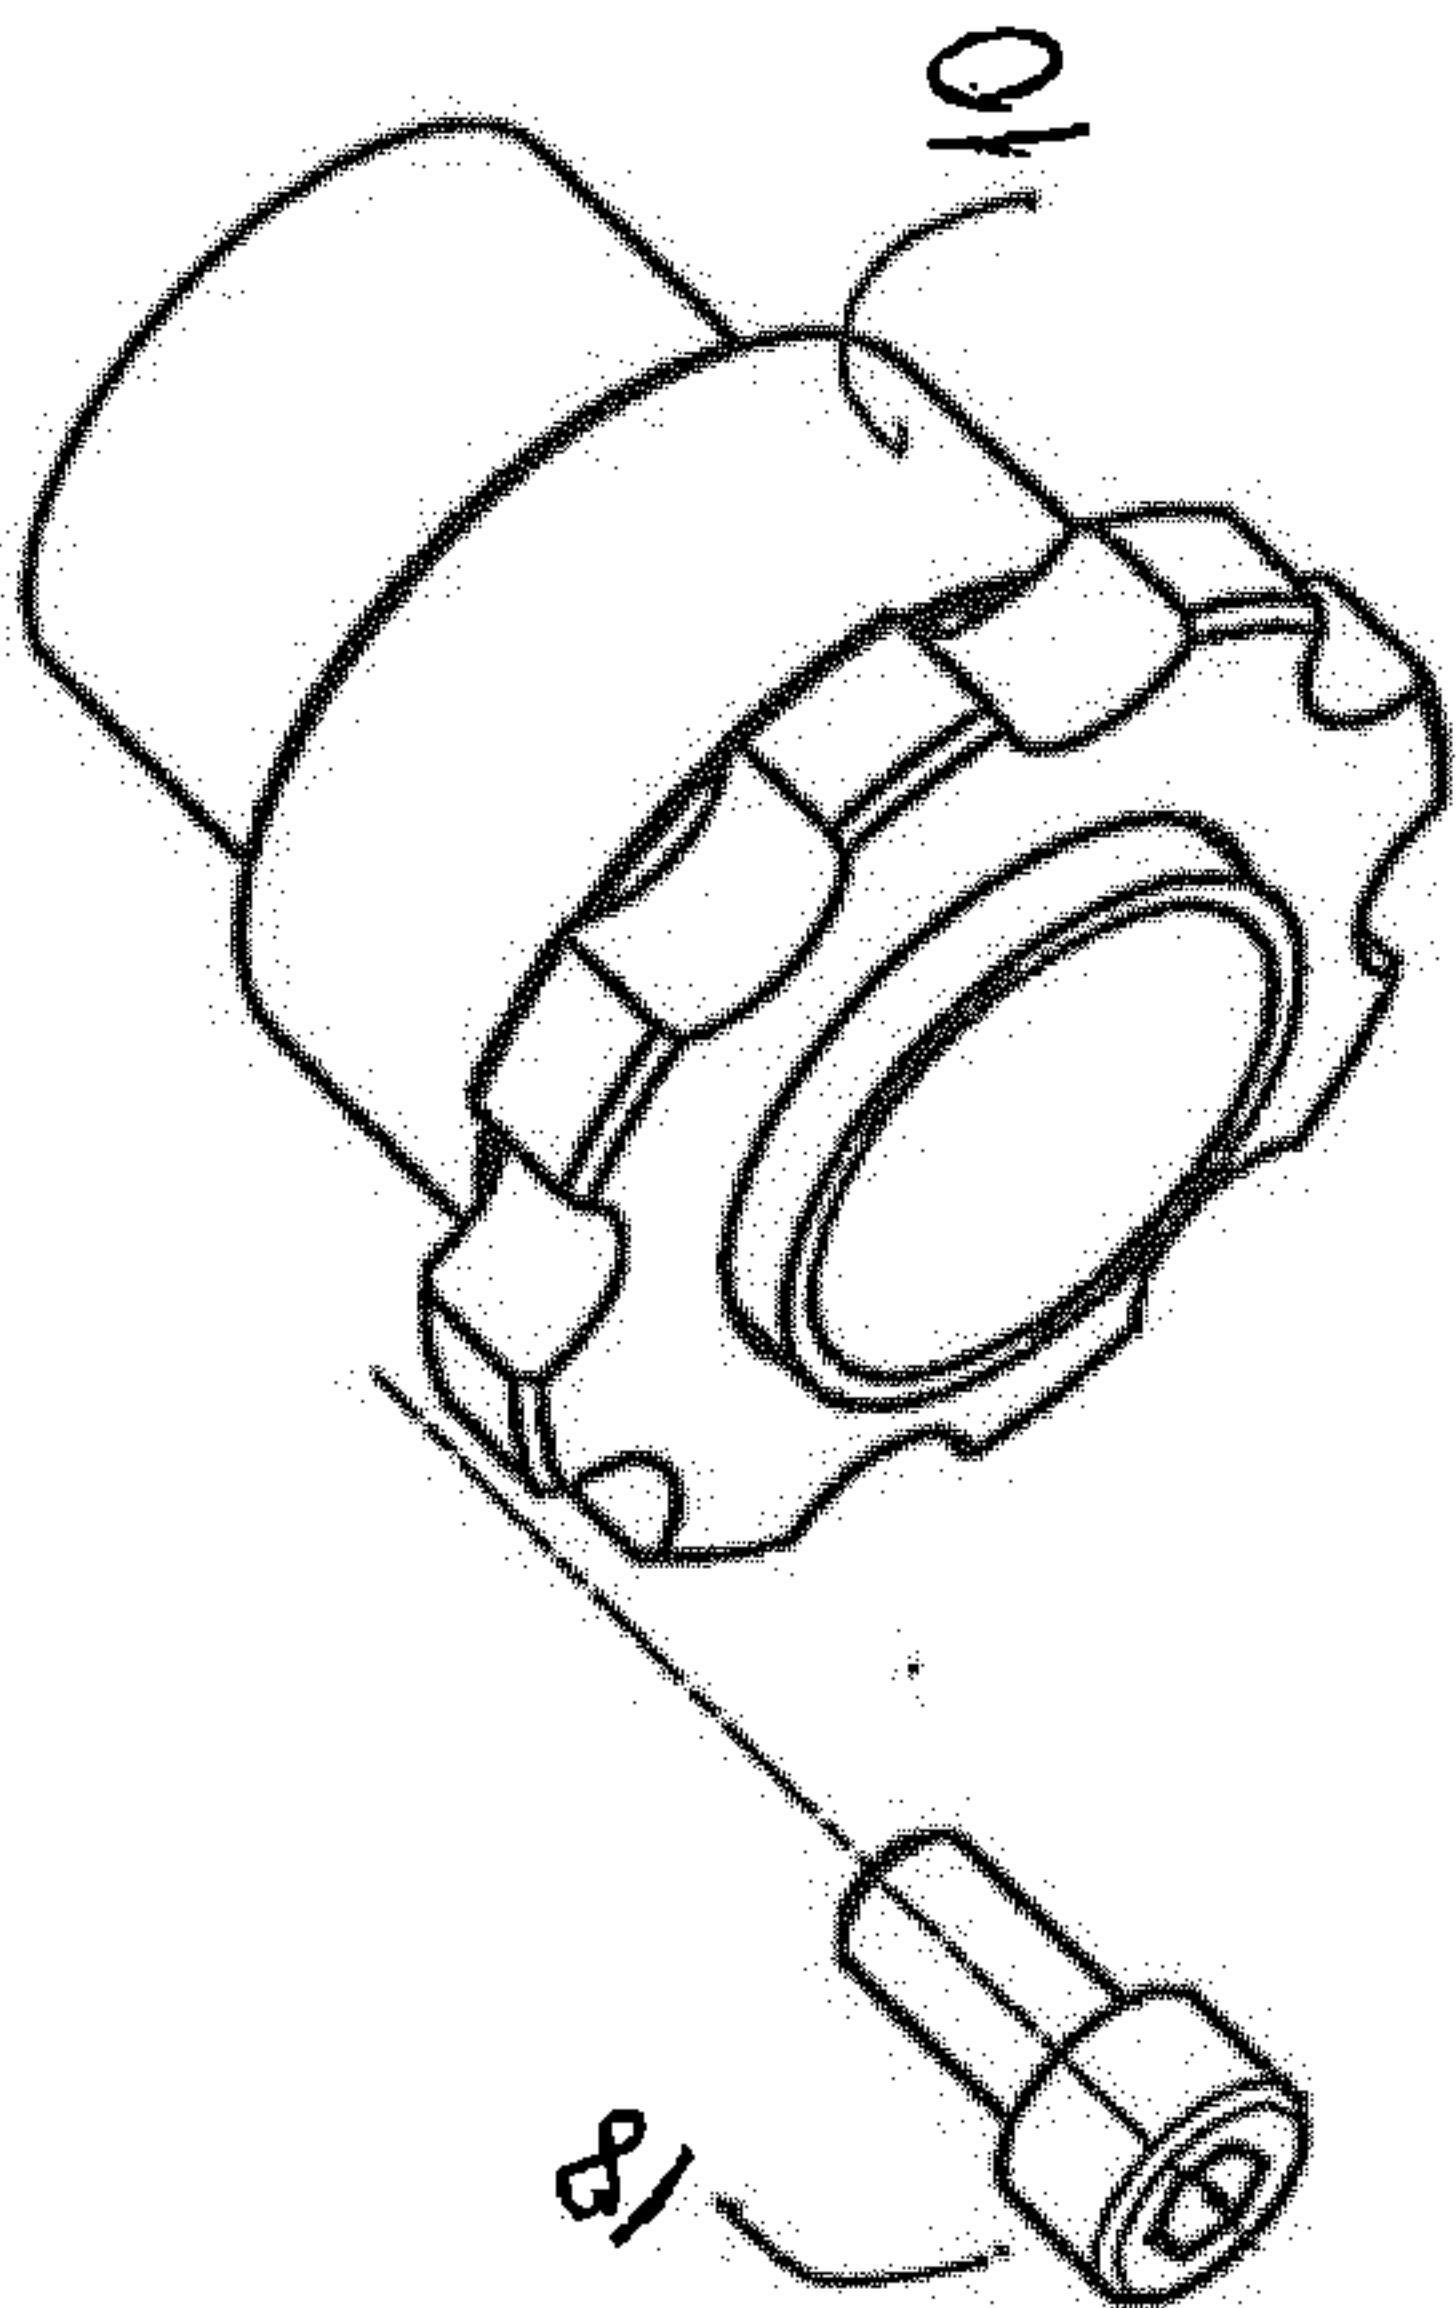
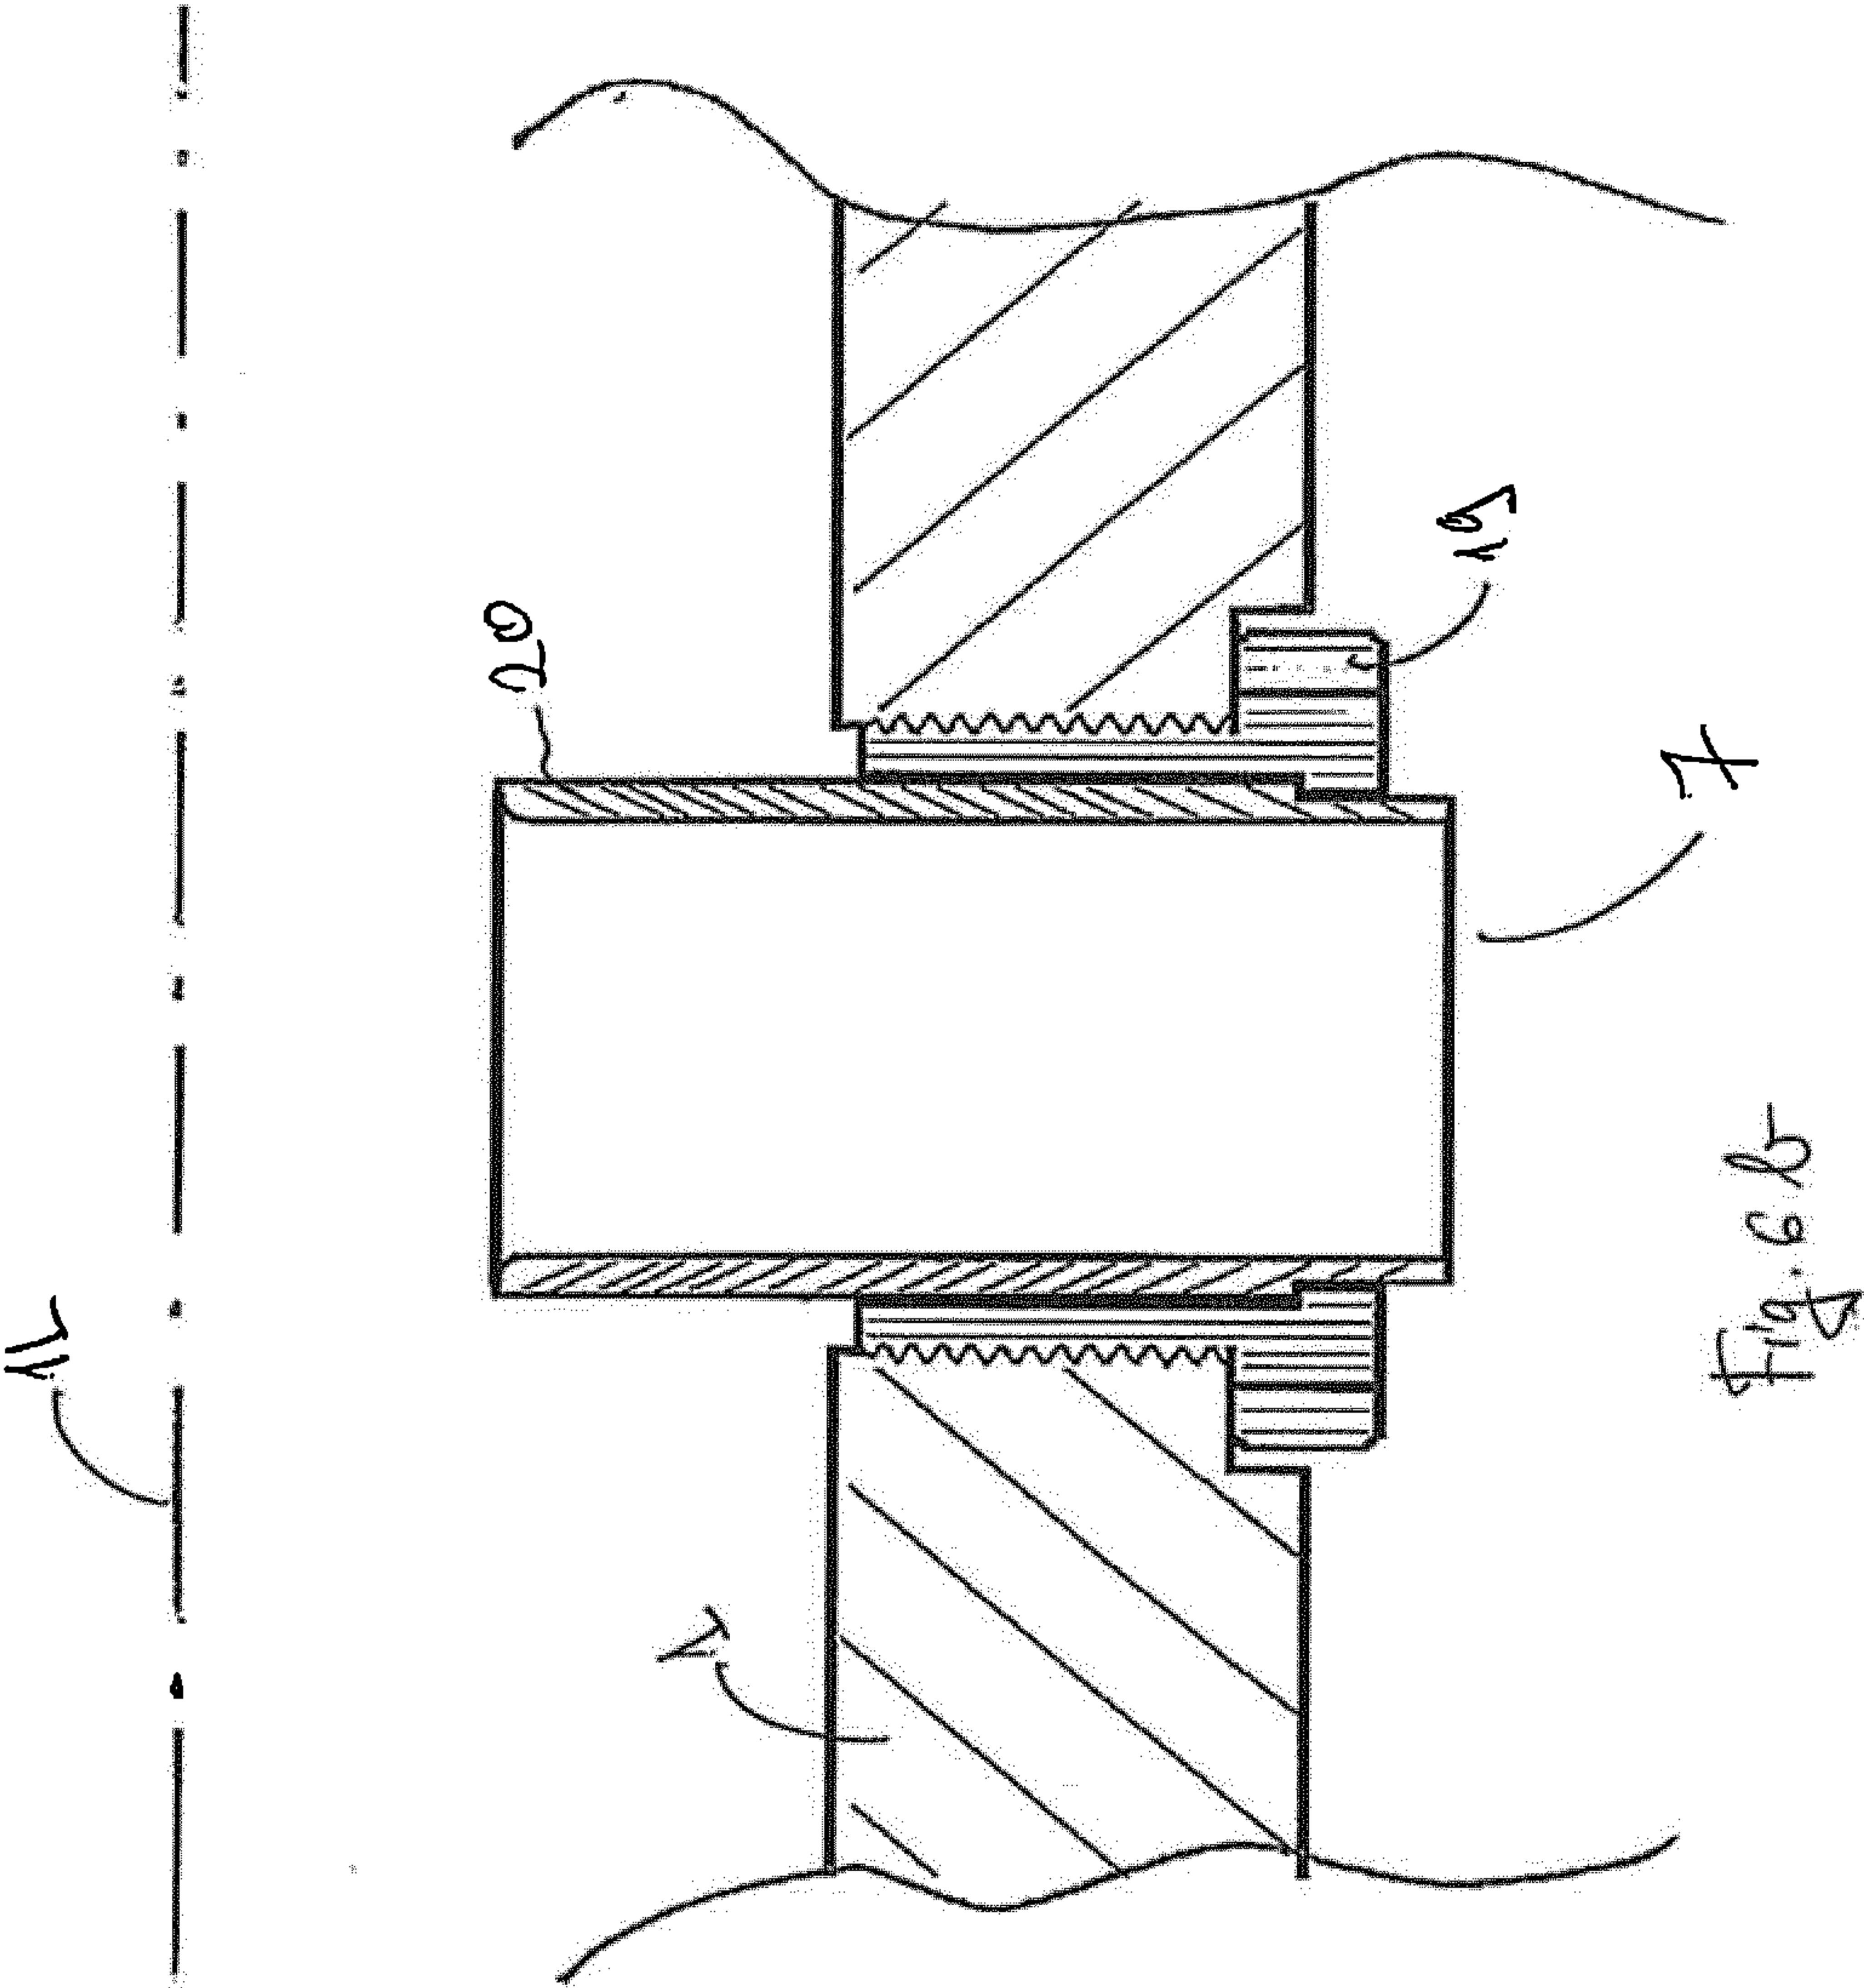


Fig. 6a

Fig. 6b

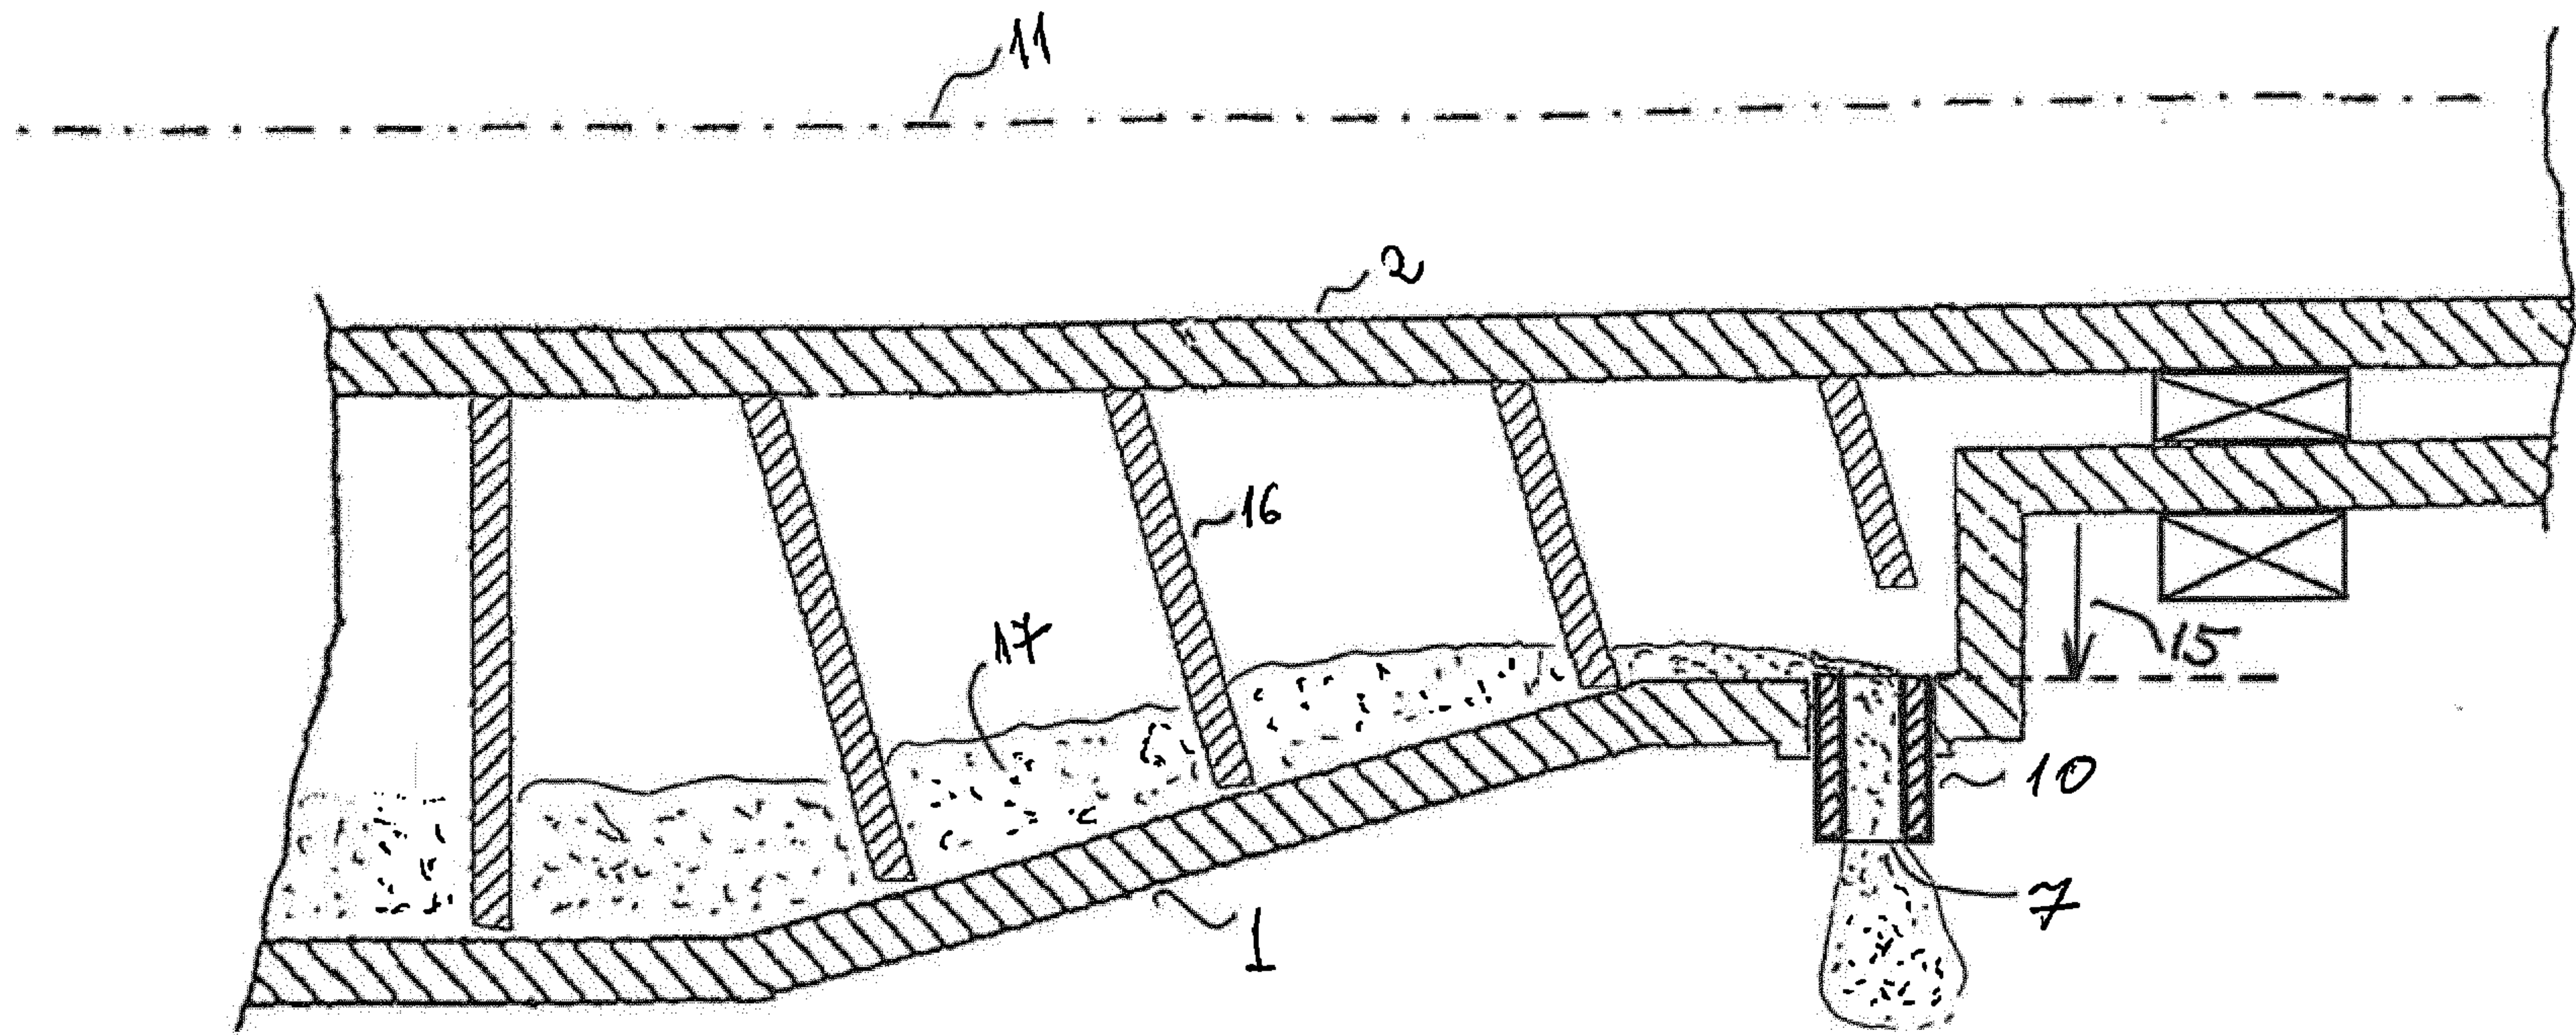


Fig. 3