

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 December 2005 (08.12.2005)

PCT

(10) International Publication Number
WO 2005/117378 A1

(51) International Patent Classification⁷: **H04L 25/02**

(21) International Application Number:
PCT/US2005/016931

(22) International Filing Date: 13 May 2005 (13.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/572,951 21 May 2004 (21.05.2004) US
10/938,373 10 September 2004 (10.09.2004) US

(71) Applicant (for all designated States except US): **RAMBUS INC.** [US/US]; 4440 El Camino Real, Los Altos, CA 94022 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FARJAD-RAD, Ramin** [IR/US]; 405 Mountain Laurel Court, Mountain View, CA 94043 (US).

(74) Agent: **BEHIEL, Arthur, J.**; Silicon Edge Law Group LLP, 6601 Koll Center Parkway, Suite 245, Pleasanton, CA 94566 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

[Continued on next page]

(54) Title: ADAPTATIVE RECEIVE-SIDE EQUALIZATION

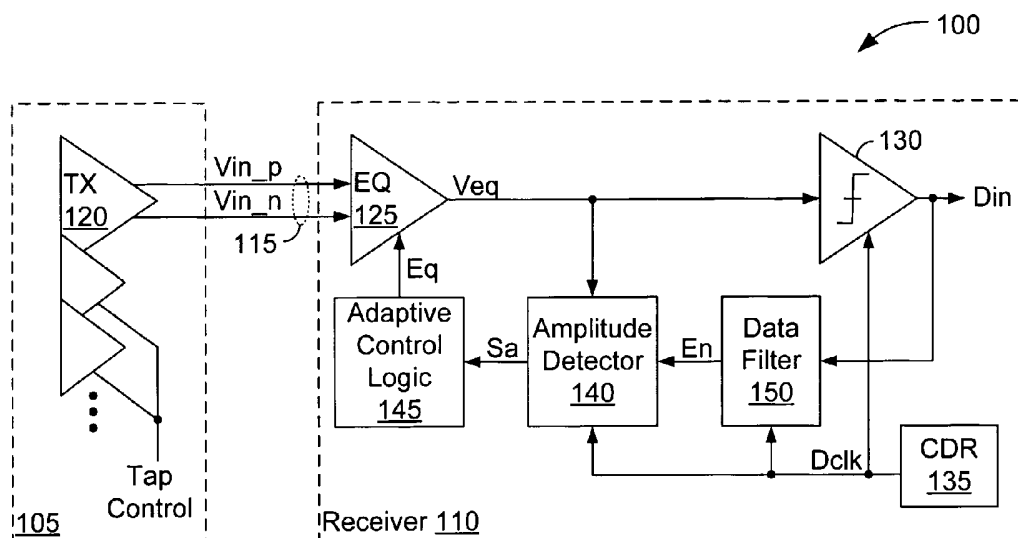

(57) Abstract: An adaptive receiver equalizes incoming data expressed as a series of symbols, the degree of equalization being adjusted by some adaptive control logic. An amplitude detector samples the amplitude of the eye openings of incoming symbols and conveys the resulting measures of eye amplitude to the adaptive control logic. The control logic experiments with different equalization settings while monitoring the resulting eye amplitude to find the equalization setting that provides incoming data eyes of the highest amplitude. A data filter may be included to enable the amplitude detector only in response to particular incoming data patterns.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

ADAPTIVE RECEIVE-SIDE EQUALIZATION

Ramin Farjad-rad

FIELD OF THE INVENTION

[0001] The present invention relates generally to the field of communications, and more particularly to high speed electronic signaling within and between integrated circuit devices.

BACKGROUND

[0002] Serial communication links that employ channels that exhibit low pass filter effects often use transmit pre-emphasis, receiver equalization, or a combination of the two to overcome the loss of high-frequency signal components. Adaptive transmit pre-emphasis or receive equalization may be used for marginal links or links whose transfer characteristic change over time. In either case, the received signal quality may be measured at the receiver. Adaptive transmit pre-emphasis schemes may therefore use some form of back-channel communication to relay indicia of signal quality back to the transmitter. Unfortunately, the need for a backchannel renders the design and implementation of adaptive pre-emphasis challenging and complex. Also important, some integrated circuits that receive data via a serial link may not include a compatible backchannel receiver with which to communicate. The transmit and receive circuitry may be parts of integrated circuits from different vendors, for example, in which case the two vendors would have to agree in advance upon a backchannel communication scheme and design their circuitry accordingly. Such collaboration may be impractical.

[0003] Adaptive receive equalization does not require backchannel communication, and thus avoids many of the problems inherent in adaptive transmit pre-emphasis. Optimum pre-emphasis and equalization settings are data specific, however, because different data patterns have different spectral content, and thus are affected differently by low-pass characteristics of

the channel. As a first-order approximation, the higher the frequency, the greater the attenuation. Transmitters “know” the transmitted data pattern in advance, and thus can tailor the transmit pre-emphasis to the data; in contrast, receivers do not know the received data pattern in advance, so adaptive equalization that addresses changes to the incoming data is much more difficult.

[0004] Some adaptive receive equalization schemes measure the power density of received signals at two frequencies and adjust the receive equalizer to maintain some desired ratio of the two power densities. Unfortunately, such schemes may not provide appropriate levels of equalization for frequencies other than those monitored. Furthermore, noise at a monitored frequency contributes to the measured power density, and consequently results in erroneous equalizer settings. There is therefore a need for receive equalization systems and methods that are more responsive to received data patterns and less sensitive to noise.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] The present invention is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like reference numerals refer to similar elements and in which:

[0006] Figure 1 depicts a communication system 100 in accordance with one embodiment.

[0007] Figure 2 depicts a receiver in accordance with an embodiment.

[0008] Figure 3 depicts a flowchart illustrating a convergence algorithm 300 that may be used by adaptive control logic 145 and amplitude detector 140 of Figures 1 or 2 to select an equalization setting for equalizer 125, in accordance with some embodiments.

[0009] Figure 4 is a flowchart illustrating a tracking algorithm 400, which may be used by adaptive control logic 145 of Figures 1 or 2 in accordance with some embodiments.

- [0010] Figure 5 schematically depicts an equalizer that may be used to implement equalizer 125 in accordance with one embodiment.
- [0011] Figure 6 schematically depicts a bias-voltage generator for use with equalizer 125 of Figure 5.
- [0012] Figure 7 schematically depicts a DAC and sampler that may be used to implement DAC 220 and sampler 215 of Figure 2 in accordance with one embodiment.
- [0013] Figure 8 details an embodiment of clock reduction circuitry that may be used to implement the clock reduction circuitry 200 of Figure 2, which reduces the frequency of data clock Dclk by a factor of e.g. four and creates sample clock Sclk edge aligned with data clock Dclk.
- [0014] Figure 9 depicts data filter that may be used to implement the data filter 150 of Figure 1 in accordance with one embodiment.

DETAILED DESCRIPTION

- [0015] Figure 1 depicts a communication system 100 in accordance with one embodiment. System 100 includes a transmitter 105 that transmits a differential data signal Vin (Vin_p/Vin_n) to a receiver 110 via a differential channel 115. A conventional transmitter may be employed as transmitter 105, so a detailed treatment is omitted here for brevity. Transmitter 105 optionally includes transmit pre-emphasis circuitry to dynamically adjust the data signal Vin to reduce signal distortion caused by the effects of channel 115. Such transmit pre-emphasis circuitry may include, for example, a multi-tap transmit amplifier 120 adapted to cause the voltage amplitudes of the data symbols of signal Vin to be selectively increased or decreased based of the data values of pre and/or post cursor data symbols.
- [0016] Communication system 100 also includes a receiver 110 that receives data signal Vin. Receiver 110 includes an equalizer 125 that equalizes data signal Vin to produce an

equalized signal V_{eq} . Equalizer 125 adjusts the magnitude (e.g., voltage and/or current) of at least some data symbols in data signal V_{in} . In some embodiments, equalizer 125 selectively adjusts the voltage amplitude of at least some of the data symbols in data signal V_{in} . In some embodiments, equalizer 125 selectively adjusts the current used to express at least some of the data symbols in data signal V_{in} . In one embodiment, equalizer 125 receives signal V_{in} , via a differential input port, and amplifies signal V_{in} using a range of amplification factors, with higher frequencies components of V_{in} being treated to higher amplification factors. If channel 115 exhibits a low pass filter effect, then such an equalizer may be used to, for example, compensate for the low-pass nature of channel 115. In that case, the degree to which equalizer 125 amplifies higher frequency signals relative to lower frequency signals can be adjusted via an equalizer input port E_q . A conventional sampler 130 samples the equalized signal V_{eq} in synchronization with a data clock D_{clk} to produce a first sampled data signal D_{in} . Data clock D_{clk} is, in this example, recovered from the input data using a conventional clock-and-data recovery circuit (CDR) 135. A sampler suitable for use as sampler 130 is described in "0.622-8.0Gbps 150mW Serial IO Macrocell with Fully Flexible Preemphasis and Equalization," by Ramin Farjad-Rad, et al. (2003 Symposium on VLSI Circuits Digest of Technical Papers), which is incorporated herein by reference. Other suitable receive samplers might also be used.

[0017] An amplitude detector 140 periodically samples, in synchronization with clock signal D_{clk} , the symbol amplitude S_a of equalized input signal V_{eq} . Some adaptive control logic 145 then calculates the appropriate equalization setting based upon measured symbol amplitudes and adjusts equalizer 125 accordingly. An equalization setting may thus be selected to maximize the amplitude of sampled data at the appropriate sample instant. Receiver 110 additionally includes a data filter 150 that selectively enables amplitude detector 140. Data filter 150 causes amplitude detector 140 to measure and record the

amplitude of a subset of possible data patterns, such as those associated with higher frequencies.

[0018] Figure 2 depicts portions of receiver 110 of Figure 1, in accordance with one embodiment, like-labeled elements being the same or similar. Figure 2 additionally depicts clock reduction circuitry 200 that reduces the frequency of data clock Dclk by e.g. a factor of four to ease the implementation of the adaptive control circuits and logic. For example, in an embodiment in which the frequency of data clock Dclk is 3.125GHz, clock reduction circuitry 200 divides data clock Dclk by four to produce a 781MHz sample clock Sclk. Using this lower sample clock frequency, the circuitry of amplitude detector 140 and adaptive control logic 145 can be synthesized using a standard cell library for significantly reduced design time and improved efficiency. Clock reduction circuitry 200 includes a clock divider 205 that divides the frequency of the data clock by a factor K (where in the embodiment depicted in Figure 2, $K=4$) to produce an intermediate clock signal Pclk and an edge aligner 210 that aligns intermediate clock Pclk with data clock Dclk to produce a sample clock Sclk.

[0019] Amplitude detector 140 includes, in this embodiment, a sampler 215, a digital-to-analog converter (DAC) 220, and a ratio circuit 225. To measure the amplitude of equalized signal Veq from equalizer 125, sampler 215 samples signal Veq with respect to a threshold voltage Vth, asserting a second sampled data signal $V_{eq} > V_{th}$ if the amplitude of signal Veq is greater than threshold voltage Vth at the sample instant defined by sample clock Sclk. The amplitude of signal Veq can thus be measured by comparing the amplitude of signal Veq with a range of threshold voltages Vth. In this example, signal Veq is compared with a range of threshold voltages Vth to determine the highest threshold voltage Vth for which signal Veq exceeds voltage Vth (e.g., the highest value of threshold voltage Vth for which sampled data signal $V_{eq} > V_{th}$ is a logic one).

[0020] Ratio circuit 225 filters signal $V_{eq} > V_{th}$ by accumulating the number of times signal $V_{eq} > V_{th}$ is asserted for a desired number of samples. In this embodiment, a marker counter 235 establishes the selected number of samples, while a sample counter 230 accumulates the number of times signal $V_{eq} > V_{th}$ is asserted. Sample counter 230 increments each time the sampled signal V_{eq} is greater than the selected threshold voltage V_{th} , while marker counter 230 increments each time signal V_{eq} is sampled. Marker counter 235 issues a carry signal Carry upon reaching the desired number of samples, at which time the contents of counter 230 is indicative of the number of samples for which signal V_{eq} exceeded the selected threshold voltage V_{th} over the number of samples. The contents of counter 230 divided by the count at which marker counter 235 issues carry signal Carry is a measure of the probability that equalized signal V_{eq} exceeded threshold voltage V_{th} at the sample instants. In one embodiment, equalized signal V_{eq} is considered to exceed threshold voltage V_{th} when the contents of counter 230 exceeds about 90% of the count at which marker counter 235 issues the carry signal.

[0021] An AND gate 237 gates signal $V_{eq} > V_{th}$ using the enable signal from data filter 150. Enable signal En is asserted to enable counters 230 and 235 so that ratio circuit 225 only accumulates data in response to specified data patterns, as determined by data filter 150. When high frequency components of V_{in} are attenuated relative to its low frequency components, which could be expected to occur, for example, as V_{in} traveled from transmitter 105 to receiver 110 over channel 115, data filter 150 may be configured to enable ratio circuit 225 in response to input data patterns expressing relatively high frequencies (e.g., a series of alternating ones and zeroes, as opposed to a series of consecutive ones or a series of consecutive zeroes). Data filter 150 can be adjusted, in some embodiments, to enable ratio circuit 225, and thus amplitude detector 140, in response to different patterns, to measure the

equalized signal at different frequencies or to optimize the receiver for different frequencies, for example.

[0022] In one embodiment, control logic 145 examines signals Carry and Sam for each of a range of threshold voltages V_{th} to measure the amplitude of signal V_{eq} for a given equalizer setting $Eq[5:0]$. Control logic 145 then repeatedly measures the amplitude of signal V_{eq} at different equalizer settings to find the equalizer setting that produces the highest amplitude of signal V_{eq} . To accomplish this end, adaptive control logic 145 includes a first register 240 that stores a digital threshold value $V_{th}[3:0]$, a second register 245 that stores the value $V_{max}[3:0]$ currently associated with the highest value of signal V_{eq} , a third register 250 that stores the current equalizer setting $Eq[5:0]$, and a fourth register 255 that stores the equalizer setting $E_{max}[5:0]$ thus far producing the highest equalized signal amplitude. Though omitted for brevity, adaptive control logic 145 may additionally convey control signals to ratio circuit 225 that enable control logic to reset counters 230 and 235. In some embodiments, counters 230 and 235 can be programmed to sample different numbers of bits, 256, 128, 64, or 32 in one example.

[0023] Figure 3 depicts a flow chart illustrating a convergence algorithm 300 that may be used by adaptive control logic 145 and amplitude detector 140, in one embodiment, to select an equalization setting for equalizer 125. Figure 3 describes one method of operation of a receiver that may be used as receiver 110 of Figures 1 and 2.

[0024] Convergence is initiated when an input signal is detected, at chip start-up, for example (step 305), at which time registers 240, 245, 250, and 255 are each set to zero. Next, an amplitude-detect subroutine 307 indirectly measures the amplitude of signal V_{eq} by finding the highest threshold voltage V_{th} for which the equalized input signal V_{eq} is greater than the threshold voltage V_{th} for e.g. about 90% of the sampled symbols. To accomplish this in one embodiment, adaptive control logic 145 first sets threshold count $V_{th}[3:0]$ to 1111, a

value corresponding to the highest threshold voltage V_{eq} (step 310). Amplitude detector 140 then compares signal V_{eq} with threshold voltage V_{th} over 256 samples (step 315), incrementing sample counter 230 each time signal V_{eq} is found to exceed voltage V_{th} . If signal V_{eq} does not exceed voltage V_{th} over 224 times out of the 256 samples (decision 320), then count $V_{th}[3:0]$ is decremented to reduce voltage V_{th} (step 325) and the comparison of step 315 is repeated. This process is repeated until signal V_{eq} exceeds voltage V_{th} at least 224 times out of 256 samples (11100000 out of 11111111), in which case threshold count $V_{th}[3:0]$ is held in register 240 (step 330) to complete subroutine 307.

[0025] In the example of Figure 2, marker counter 235 indicates a maximum count of 256 by asserting a carry signal $Carry$ to adaptive control logic 145. The calculation of the sample ratio may be based upon other numbers of samples, and the ratio use to identify the signal amplitude of V_{eq} may be different. In some embodiments, the number of samples, the ratio, or both are programmable. In one embodiment in which counters 230 and 235 are each eight bits, the signal Sam from counter 230 is the AND of the highest three bits, in which case Sam is a logic one when the value in sampler counter 230 is at least 224 (binary 11100000). Thus, if both Sam and $Carry$ are logic one ($Sa=1,1$), then sampler counter 230 counted to at least 224 by the time marker counter 235 reached a maximum count and thus generated a carry.

[0026] In the next decision 335, the current threshold count $V_{th}[3:0]$ is compared with count $V_{max}[3:0]$. If $V_{th}[3:0]$ is greater than $V_{max}[3:0]$, then the current equalizer setting is producing a higher equalized signal amplitude (e.g., a wider eye) than the equalizer setting $E_{max}[5:0]$, the equalizer setting previously associated with the highest equalized signal amplitude. In that case, $V_{max}[3:0]$ is updated with the value $V_{th}[d:0]$ and $E_{max}[5:0]$ is updated with $E_q[5:0]$ (step 340). If $V_{th}[3:0]$ is not greater than $V_{max}[3:0]$, then the current equalizer setting is not producing a higher signal amplitude than whatever equalizer setting is currently associated with the highest signal amplitude. In that case, $V_{max}[3:0]$ is held

constant while the equalizer setting Eq[5:0] is increased (step 345). Equalizer setting Eq[5:0] is increased by two in this example, to more quickly span the range of equalizer settings employed during the convergence process. Other embodiments change the equalizer settings in different steps, different orders, etc.

[0027] The next decision 350 determines whether the equalizer setting Eq[5:0] is zero, indicating the count Eq[5:0] has traversed the available range of equalizer settings and rolled over to zero; if not, the process returns to subroutine 307. This sequence of steps repeats over the range of equalizer settings with step 340 accumulating counts Vmax[3:0] and Emax[5:0], which respectively represent the highest value Vth[3:0] for which signal Veq exceeds threshold voltage Vth for about 90% of sampled data and the equalization setting responsible for that maximum threshold setting. These final values of Vmax[3:0] and Emax[5:0] are held (step 355), completing the convergence process.

[0028] Convergence algorithm 300 finds the optimal or a near-optimal equalization setting for a given communication channel, and may be repeated as needed to reacquire equalization settings. In some embodiments, for example, receivers adapted in accordance with some embodiments reacquire equalization settings each time power is applied. These and other embodiments may additionally benefit from adaptive equalization schemes that continuously or periodically update equalization settings to account for changes in the system operating environment, such as in response to changes in temperature, supply-voltage, or other factors that impact receiver performance.

[0029] Figure 4 is a flowchart illustrating a tracking algorithm 400 that may be implemented by adaptive control logic 145 of Figures 1 and 2 in accordance with one embodiment. Some embodiments periodically or continuously execute a tracking algorithm after executing a convergence algorithm, such as, for example, the convergence algorithm 300 of Figure 3, to adjust for changes, such as noise, for example, in the signaling

environment. Briefly, algorithm 400 measures the symbol amplitude of signal V_{eq} for equalizer settings one count above and one count below the current equalizer setting. If one of those settings produces a higher signal amplitude, the equalizer setting is adjusted to that improved setting. Other embodiments repeat the convergence algorithm to adapt to environmental changes or omit the convergence algorithm altogether, relying instead upon a tracking algorithm.

[0030] After tracking is initiated (step 405), control logic 145 begins by setting register 250 to the value stored in register 255 (step 410). The equalization setting for equalizer 125 is thus set to the value earlier determined to lead to the highest amplitude for signal V_{eq} . If the contents of register 250 is greater than zero (decision 415), then register 250 is decremented to reduce $Eq[5:0]$ by one (step 420). Amplitude detect subroutine 307, described above in connection with Figure 3, is then called to measure the amplitude of signal V_{eq} with the new equalizer setting. Per decision 425, if the new equalizer setting produces a higher signal amplitude for V_{eq} , as evinced by a threshold value $V_{th}[3:0]$ greater than $V_{max}[3:0]$, then the contents of registers 245 and 255 are updated with the respective contents of registers 240 and 250 (step 430). The content of register 250 is then incremented (step 435), returning $Eq[5:0]$ to the value preceding the last instance of step 420.

[0031] If, at this time, the content of register 250 is less than the maximum count (decision 440), then the content of register 250 is incremented once again (step 445). Amplitude detect subroutine 307 is once again called to measure the amplitude of signal V_{eq} , this time to determine whether a slightly higher equalizer setting provides a higher amplitude signal V_{eq} than the prior equalizer setting (decision 455). If so, then the contents of registers 245 and 255 are updated with the respective contents of registers 240 and 250 (step 460). The tracking algorithm then returns to step 410. Tracking algorithm 400 can be turned off periodically to save power.

[0032] Figure 5 schematically depicts equalizer 125 of Figures 1 and 2 in accordance with one embodiment. Equalizer 125 includes two nearly identical stages 500 and 505, the second of which is depicted as a black box for ease of illustration. Other embodiments include more or fewer stages. Equalizer stage 500 includes a pair of differential input transistors 515 and 520 with respective loads 525 and 530. Source degeneration is provided by a resistor 535, a transistor 540, and a pair of capacitor-coupled transistors 545 and 550. The capacitance provided by transistors 545 and 550 is in parallel with resistor 535 and transistor 540, so the net impedance between the sources of transistors 515 and 520 decreases with frequency. As a consequence, the gain of equalizer stage 500 increases with frequency. The resistance through transistor 540 can be adjusted to change the source-degeneration resistance, and thus to alter the extent to which the gain of equalizer stage 500 increases with frequency.

[0033] In an alternative embodiment, source degeneration is provided by one or more floating metal-insulator-metal (MIM) capacitors connected in parallel with resistor 535. One such embodiment is detailed in the above-referenced paper to Farjad-Rad et al. The MIM capacitors can be used instead of or in addition to capacitors 545 and 550.

[0034] A DAC 555 converts the digital equalization setting $Eq[5:0]$ from, in this embodiment, adaptive control logic 145 to a gate voltage for transistor 540. The value of the equalization setting thus determines the resistance between the drains of transistors 515 and 520, and consequently the shape of the gain curve of equalizer stage 500. In general, the higher the resistance between the sources of transistors 515 and 520, the more extreme the gain curve of stage 500 over the frequency range of interest. In one embodiment, the output voltage from DAC 555 decreases as setting $Eq[5:0]$ increases from 000000 to 100000, remaining constant for higher counts. These maximum counts represent highest resistance between the sources of transistors 515 and 520, and consequently maximum equalization for

stage 500. The output voltage from a similar DAC (not shown) in stage 505 remains high for counts up to 100000, decreasing count-by-count for higher values. Thus, the lowest equalization setting ($Eq[5:0] = 000000$) represents the lowest source-degeneration resistance for both stages 500 and 505, while the highest equalization setting ($Eq[5:0] = 111111$) represents the highest resistance.

[0035] Figure 6 schematically depicts a bias-voltage generator 600 for use with equalizer 125 of Figure 5. A resistor 605 and transistors 610 and 615 form a half-circuit replica of equalizer stage 500, with the input common-mode voltage V_{in_com} applied to the gate of transistor 610. A feedback loop including an amplifier 620 and a pair of transistors 625 and 630 sets the voltage on the inverting (-) terminal of amplifier 620 equal to the voltage applied to the non-inverting (+) terminal. In an embodiment in which supply voltage V_{dd} is 1.2 volts, a resistor divider provides one-volt to the non-inverting terminal of amplifier 620. The resulting bias voltage V_{bias} to stages 500 and 505 establishes a one-volt common-mode voltage for those stages. In some embodiments, lower common-mode voltages are avoided to ensure that transistors 515 and 520 of Figure 5 are always in saturation. The half circuit of Figure 6 can be scaled down, by a factor of eight in one example, to save power.

[0036] Figure 7 schematically depicts DAC 220 and sampler 215 of Figure 2 in accordance with one embodiment. DAC 220 includes a sixteen-input multiplexer (MUX) 700 with four select terminals that receive a digital representation of the voltage threshold $V_{th}[3:0]$ from adaptive control logic 145. The input terminals of MUX 700 connect to nodes of a voltage divider network. A capacitor at each of the reference voltage steps reduces the AC impedance of each node without using low resistances in the ladder, which would result in high DC current consumption. A low AC impedance causes the selected reference voltage to appear quickly on node V_{th} for the next sampling period. The effective AC impedances of the input and reference lines are similar, as mismatches may affect the comparison decision.

In one embodiment, threshold voltage V_{th} can be adjusted over a range of from 0.8 volts to 1.2 volts. Threshold voltage V_{th} is single ended in the embodiment of Figure 7 to reduce the amount of reference circuitry, though threshold voltage V_{th} may be differential in other embodiments.

[0037] In one embodiment, sampler 215 includes a pair of samplers 705 and 710, the outputs of which are combined by an OR gate 715 to produce output signal $V_{eq} > V_{th}$. Both samplers 705 and 710 compare equalized signal V_{eq} from equalizer 125 with the voltage difference between supply voltage V_{dd} and threshold voltage V_{th} from DAC 220. These two reference terminals are reversed between samplers 705 and 710 so that signal $V_{eq} > V_{th}$ is a logic one if the absolute value of V_{eq} is greater than the difference between voltages V_{dd} and V_{th} . Both samplers 705 and 710 are timed to clock signal Sc_{lk} , which is in turn timed to the incoming data, so the comparison between the amplitude of voltage V_{eq} and the difference between voltages V_{dd} and V_{th} provides a measure of the eye opening of the received data. Equalization settings are thus based upon measurements of the desired signal characteristic, in contrast to analog methods that fail to distinguish noise from the valid signal.

[0038] Figure 8 details an embodiment of clock reduction circuitry 200 of Figure 2, which reduces the frequency of data clock D_{clk} by a factor of e.g. four and creates sample clock Sc_{lk} edge aligned with data clock D_{clk} . Reducing the clock frequency simplifies the design of the amplitude detector 140 and adaptive control logic 145, in some cases allowing them to be synthesized using a standard cell library. Edge aligner 210 aligns edges of sample clock Sc_{lk} with data clock D_{clk} so that amplitude measurements made by amplitude detector 140 are indicative of the amplitude detected by sampler 130 (Figure 1).

[0039] An edge detector 800 compares the rising edges of data clock D_{clk} and sample clock Sc_{lk} , asserting a late signal $Late$ if an edge of signal Sc_{lk} occurs after a corresponding edge of signal D_{clk} and de-asserting late signal $Late$ if an edge of signal Sc_{lk} occurs before

an edge of signal Dclk. A four-bit Up/Down counter 805 and a pair of AND gates 810 and 815 collectively act as a digital low-pass filter. This filter generates a down signal DN to a second Up/Down counter 820 when the late signal Late is asserted for eight more clock cycles than de-asserted, and generates an up signal UP when signal Late is de-asserted eight more clock cycles than asserted. Counter 805 resets to a $b[0:3]=1000$ state once it overflows ($b[0:3]=1111$) or underflows ($b[0:3]=0000$).

[0040] The content of counter 820 controls the delay imposed by a phase picker 825 to control the timing of sample clock Selk relative to data clock Dclk. Phase picker 825 includes a delay line 830 (e.g., a series of buffers) providing eight phases of clock signal Pclk to respective input terminals of a multiplexer 835. Counter 820 is a saturating counter, so when reaching 111 (or 000) does not roll over to 000 (or 111), when getting another up (or down) pulse. A multiplexer 835 selects one of the eight phases from tapped delay line 830, whose range spans at least half a bit time (0.5 times one unit interval, or 0.5UI, of data clock Dclk) across all corners of operation. In one embodiment, the granularity of delay line 830 does not increase more than 0.2UI, leading to a quantization error of less than 0.1UI. Trim bits to delay line 830 can be included to cover a large range of the operating speeds. In one embodiment, for example, the trim bits allow edge aligner 210 to cover three regions of operation speeds: 4.25-6.25Gbps, 2.125-3.125Gbps, and 1.062-1.56Gbps.

[0041] Figure 9 depicts data filter 150 of Figure 1 in accordance with one embodiment. Signal Veq is measured around signal transitions to best measure the effects of equalization on signal-eye amplitude. Data filter 150 enables amplitude detector 140 around transitions so that the output of amplitude detector 140 accurately represents eye amplitude in the presence of transitions. This configuration allows for optimization of eye openings, or equalized-symbol amplitude, for minimum post-cursor (or post-symbol) and pre-cursor inter-symbol interference (ISI).

[0042] Data filter 150 includes a pair of flip-flops 900 and 905 times to data clock Dclk to retain prior samples of a pair of incoming data bits d0 and d1. Pattern detection circuitry 910 monitors the two prior data samples from flip-flops 900 and 905 and the two most recent data samples d0 and d1, producing a logic-one output signal in response to signal transitions. A pair of flip-flops 915 and 920 provide a two-cycle pipeline delay to account for two previous bits and one bit after the monitored bit. A final flip-flop 925 captures the output of flip-flop 920 on falling edges of sample clock Sclk and passes the resulting enable signal En to ratio circuit 225 (Figure 2). Data filter 150 can be adapted to detect different patterns, and may be programmable in other embodiments.

[0043] In the foregoing description and in the accompanying drawings, specific terminology and drawing symbols are set forth to provide a thorough understanding of the present invention. In some instances, the terminology and symbols may imply specific details that are not required to practice the invention. For example, the interconnection between circuit elements or circuit blocks may be shown or described as multi-conductor or single conductor signal lines. Each of the multi-conductor signal lines may alternatively be single-conductor signal lines, and each of the single-conductor signal lines may alternatively be multi-conductor signal lines. Signals and signaling paths shown or described as being single-ended may also be differential, and vice-versa. Similarly, signals described or depicted as having active-high or active-low logic levels may have opposite logic levels in alternative embodiments. As another example, circuits described or depicted as including metal oxide semiconductor (MOS) transistors may alternatively be implemented using bipolar technology or any other technology in which a signal-controlled current flow may be achieved. With respect to terminology, a signal is said to be “asserted” when the signal is driven to a low or high logic state (or charged to a high logic state or discharged to a low logic state) to indicate a particular condition. Conversely, a signal is said to be “de-asserted”

to indicate that the signal is driven (or charged or discharged) to a state other than the asserted state (including a high or low logic state, or the floating state that may occur when the signal driving circuit is transitioned to a high impedance condition, such as an open drain or open collector condition). A signal driving circuit is said to “output” a signal to a signal receiving circuit when the signal driving circuit asserts (or de-asserts, if explicitly stated or indicated by context) the signal on a signal line coupled between the signal driving and signal receiving circuits. A signal line is said to be “activated” when a signal is asserted on the signal line, and “deactivated” when the signal is de-asserted. Whether a given signal is an active low or an active high will be evident to those of skill in the art.

[0044] The output of the design process for an integrated circuit may include a computer-readable medium, such as, for example, a magnetic tape, encoded with data structures defining the circuitry can be physically instantiated as in integrated circuit. These data structures are commonly written in Caltech Intermediate Format (CIF) or GDSII, a proprietary binary format. Those of skill in the art of mask preparation can develop such data structures from schematic diagrams of the type detailed above.

[0045] While the present invention has been described in connection with specific embodiments, variations of these embodiments will be obvious to those of ordinary skill in the art. For example,

1. the amplitude of equalized signal V_{eq} can be measured indirectly by monitoring the output of a second equalizer with input terminals coupled to terminals V_{in_p} and V_{in_n} and sharing selected equalizer settings;
2. a single sampler could be used to recover data and measure the amplitude of the equalized symbols (e.g., in a system that supported operational and calibration modes);

3. embodiments of the invention may be adapted for use with multi-pulse-amplitude-modulated (multi-PAM) signals; and
4. signals can be equalized to compensate for distortion other than that caused by the low-pass nature of some channels (e.g., signals can be equalized to compensate for high-pass effect, band-pass effects, or other types of distortion).
5. embodiments of the invention may measure the magnitude of data symbols by detecting a current amplitude, voltage amplitude, or both.

Moreover, some components are shown directly connected to one another while others are shown connected via intermediate components. In each instance the method of interconnection, or "coupling," establishes some desired electrical communication between two or more circuit nodes, or terminals. Such coupling may often be accomplished using a number of circuit configurations, as will be understood by those of skill in the art. Therefore, the spirit and scope of the appended claims should not be limited to the foregoing description. Only those claims specifically reciting "means for" or "step for" should be construed in the manner required under the sixth paragraph of 35 U.S.C. Section 112.

CLAIMS

What is claimed is:

- 1 1. A receiver comprising:
 - 2 a. an input port that receives an input signal comprising a sequence of data symbols;
 - 3 b. an equalizer that is coupled to the input port and adjusts a magnitude of at least
4 some of the data symbols of the input signal to produce an equalized signal;
 - 5 c. a sampler that is coupled to the equalizer and samples the equalized signal to
6 produce a first sampled data signal;
 - 7 d. an amplitude detector that is coupled to the equalizer and samples the equalized
8 signal to produce a second sampled data signal, wherein the second sampled data
9 signal is indicative of an amplitude of the equalized signal; and
 - 10 e. control logic that is coupled to the amplitude detector and generates an
11 equalization signal in response to the second sampled data signal, and conveys the
12 equalization signal to the equalizer.
- 1 2. The receiver of claim 1, wherein the equalizer adjusts a voltage amplitude of the at least
2 some of the data symbols in response to the equalization signal.
- 1 3. The receiver of claim 1, further comprising a clock node that receives a clock signal,
2 wherein the amplitude detector samples the equalized signal under the timing control of
3 the clock signal.
- 1 4. The receiver of claim 3, wherein the amplitude detector samples the equalized signal
2 less often than the sampler samples the equalized signal.
- 1 5. The receiver of claim 1, further comprising a data filter coupled between the sampler

2 and the amplitude detector.

1 6. The receiver of claim 5, wherein the data filter enables the amplitude detector in
2 response to select patterns of symbols in the first sampled data signal.

1 7. The receiver of claim 1, wherein the amplitude detector includes a second sampler that
2 is coupled to the equalizer and samples the equalized signal.

1 8. The receiver of claim 7, wherein the second sampler periodically compares the
2 equalized signal to a threshold voltage.

1 9. The receiver of claim 8, wherein the amplitude detector includes a counter that is
2 coupled to the second sampler and counts how often the second sampled data signal
3 exceeds the threshold voltage.

1 10. The receiver of claim 9, wherein the control logic adjusts the threshold voltage in
2 response to the count in the counter.

1 11. A receiver comprising:

- 2 a. an input port that receives an input signal comprising a sequence of data symbols;
- 3 b. an equalizer that is coupled to the input port and adjusts the input signal to
4 produce an equalized signal;
- 5 c. a sampler that is coupled to the equalizer and samples the equalized signal to
6 produce a first sampled data signal;
- 7 d. an amplitude detector that is coupled to the equalizer and samples the equalized
8 signal to produce a second sampled data signal, wherein the second sampled data
9 signal is indicative of an amplitude of the equalized signal; and

10 e. a data filter coupled to at least one of the sampler and the amplitude detector,
11 wherein the data filter filters specific patterns exhibited by the sequence of data
12 symbols.

1 12. The receiver of claim 11, wherein the data filter enables the amplitude detector in
2 response to the specific patterns.

1 13. The receiver of claim 11, further comprising control logic that is coupled to the
2 amplitude detector and generates an equalization signal in response to the second
3 sampled data signal, and conveys the equalization signal to the equalizer.

1 14. The receiver of claim 11, further comprising a clock node that receives a clock signal,
2 wherein the sampler and the amplitude detector sample the equalized signal
3 synchronous with the clock signal.

1 15. A method of receiving an input data stream expressed as a sequence of data symbols,
2 the method comprising:

3 a. adjusting the input data stream at a first equalization setting to produce an
4 equalized data stream expressed as a sequence of adjusted data symbols, each of
5 the adjusted data symbols having a corresponding symbol amplitude;

6 b. providing a clock signal;

7 c. sampling, in synchronization with the clock signal, the adjusted data stream to
8 recover the data symbols as a sequence of recovered data symbols;

9 d. measuring, in synchronization with the clock signal, the symbol amplitude of at
10 least a subset of the adjusted data symbols; and

11 e. adjusting the input data stream at a second equalization setting different from the
12 first equalization setting in response to the measured symbol amplitudes.

- 1 16. The method of claim 15, further comprising deriving the clock signal from the input
2 data stream.
- 1 17. The method of claim 15, wherein measuring the symbol amplitude includes sampling,
2 in synchronization with the clock signal, the amplified data with reference to a range of
3 threshold voltages.
- 1 18. The method of claim 15, further comprising dividing the first-mentioned clock signal to
2 produce a second clock signal used in measuring the symbol amplitude.
- 1 19. The method of claim 15, wherein measuring the symbol amplitude of at least a subset of
2 the equalized data symbols includes monitoring the recovered data samples and
3 measuring the symbol amplitude in response to particular patterns of the recovered data
4 samples.
- 1 20. The method of claim 15, wherein adjusting the input data stream adjusts voltage
2 amplitudes of the input data stream.
- 1 21. A computer-readable medium having stored thereon a data structure defining a receiver
2 adapted to receive an input signal expressed as a sequence of data symbols, the data
3 structure comprising:
- 4 a. first data representing an equalizer having an input port defined to receive the
5 input signal, an equalization selection port defined to receive an equalization
6 signal, and an equalizer output port defined to produce an equalized signal from
7 the input signal,
- 8 b. second data representing a sampler coupled to the equalizer and defined to sample

- 9 the equalized signal to produce a first sampled data signal;
- 10 c. third data representing an amplitude detector coupled to the equalizer and defined
- 11 to sample the equalized signal to produce a second sampled data signal, wherein
- 12 the second sampled data signal is indicative of an amplitude of the equalized
- 13 signal; and
- 14 d. fourth data representing a data filter coupled to the sampler and the amplitude
- 15 detector, wherein the data filter is defined to enable the amplitude detector in
- 16 response to specific patterns exhibited by the first sampled data signal.
- 1 22. The medium of claim 21, further comprising fifth data representing control logic
- 2 coupled to the amplitude detector, the fifth data defining the control logic as generating
- 3 an equalization signal in response to the second sampled data signal, and to conveying
- 4 the equalization signal to the equalizer.
- 1 23. The medium of claim 21, further comprising fifth data representing a clock node
- 2 adapted to receive a clock signal, wherein the sampler and the amplitude detector are
- 3 defined to sample the equalized signal synchronous with the clock signal.

1 24. A receiver comprising:
2 a. an input port that receives an input signal expressed as a series of data symbols;
3 b. an equalizer that is coupled to the input port and adjusts the input signal using a
4 range of frequency-dependent amplification factors to produce an equalized
5 signal, wherein the equalized signal expresses the data symbols as a series of
6 equalized symbols
7 c. an amplitude detector that is coupled to the equalizer and measures the amplitude
8 of at least a subset of the equalized symbols; and
9 d. control logic that is coupled to the amplitude detector and the equalizer, wherein
10 the control logic adjusts the equalized signal, via the equalizer, in response to the
11 measured amplitudes.

1 25. The receiver of claim 24, further comprising a clock node that receives a clock signal,
2 wherein the amplitude detector samples the equalized symbols synchronously with the
3 clock signal.

1 26. The receiver of claim 25, further comprising a sampler that samples the equalized
2 symbols, wherein the amplitude detector samples the equalized symbols less often than
3 the sampler samples the equalized symbols.

1 27. The receiver of claim 24, wherein the amplitude detector measures the amplitude of
2 equalized symbols in response to particular patterns of equalized symbols.

1 28. A receiver comprising:
2 a. a clock node that receives a clock signal;
3 b. an equalizer that amplifies an input data stream, expressed as a sequence of data

- 4 symbols, by a first amplification factor to produce an amplified data stream
5 expressed as a sequence of amplified data symbols, each of the amplified data
6 symbols having a corresponding symbol amplitude;
- 7 c. means for sampling, in synchronization with the clock signal, the amplified data
8 stream to recover the data symbols as a sequence of recovered data symbols;
- 9 d. means for measuring, in synchronization with the clock signal, the symbol
10 amplitude of at least a subset of the amplified data symbols; and
- 11 e. means for amplifying the input data stream by a second amplification factor
12 different from the first amplification factor in response to the measured symbol
13 amplitudes.

1/6

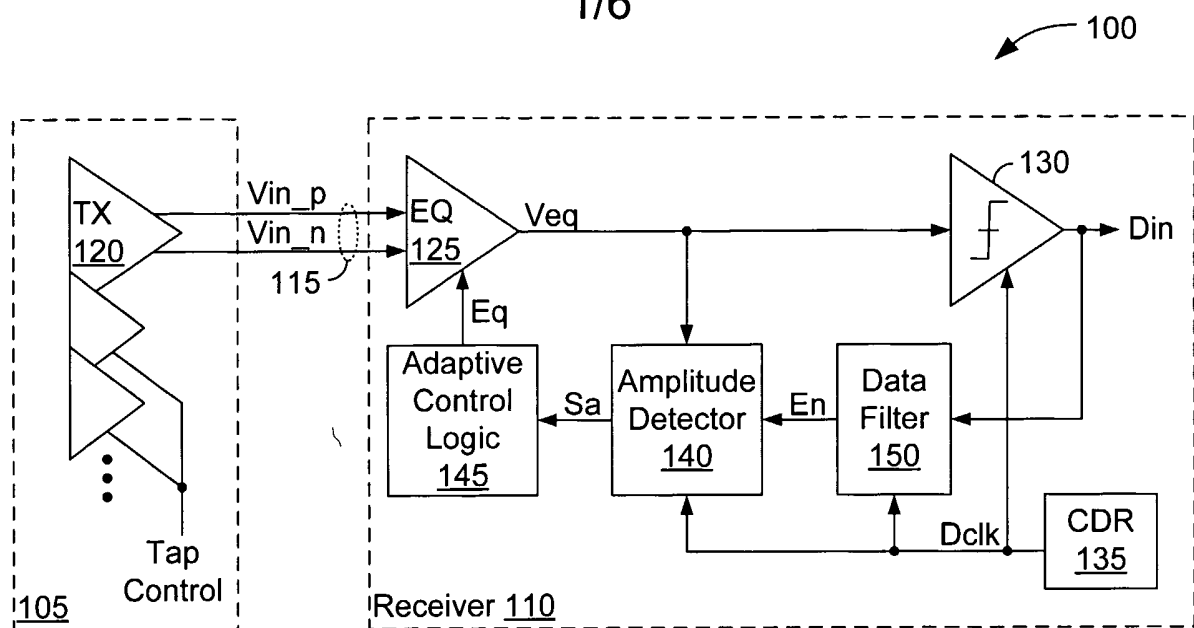


FIG. 1

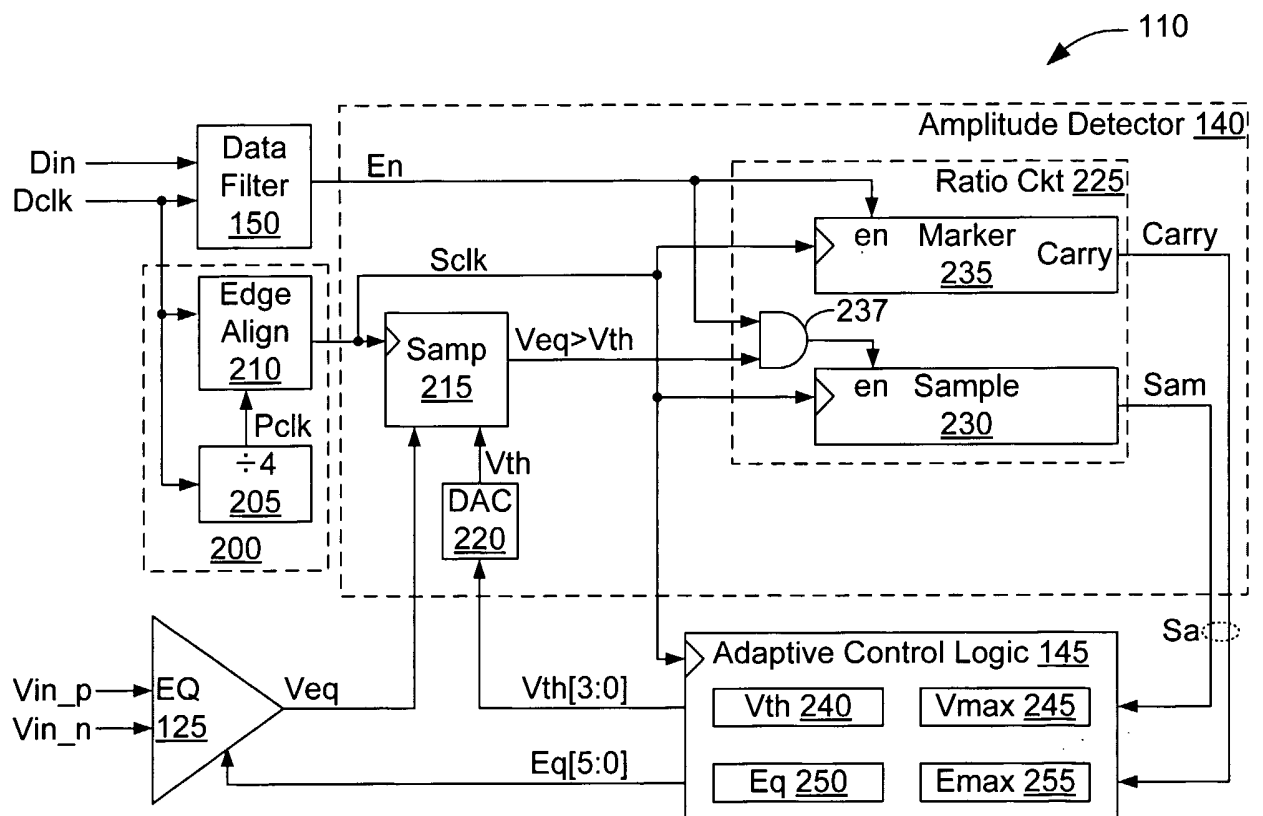


FIG. 2

2/6

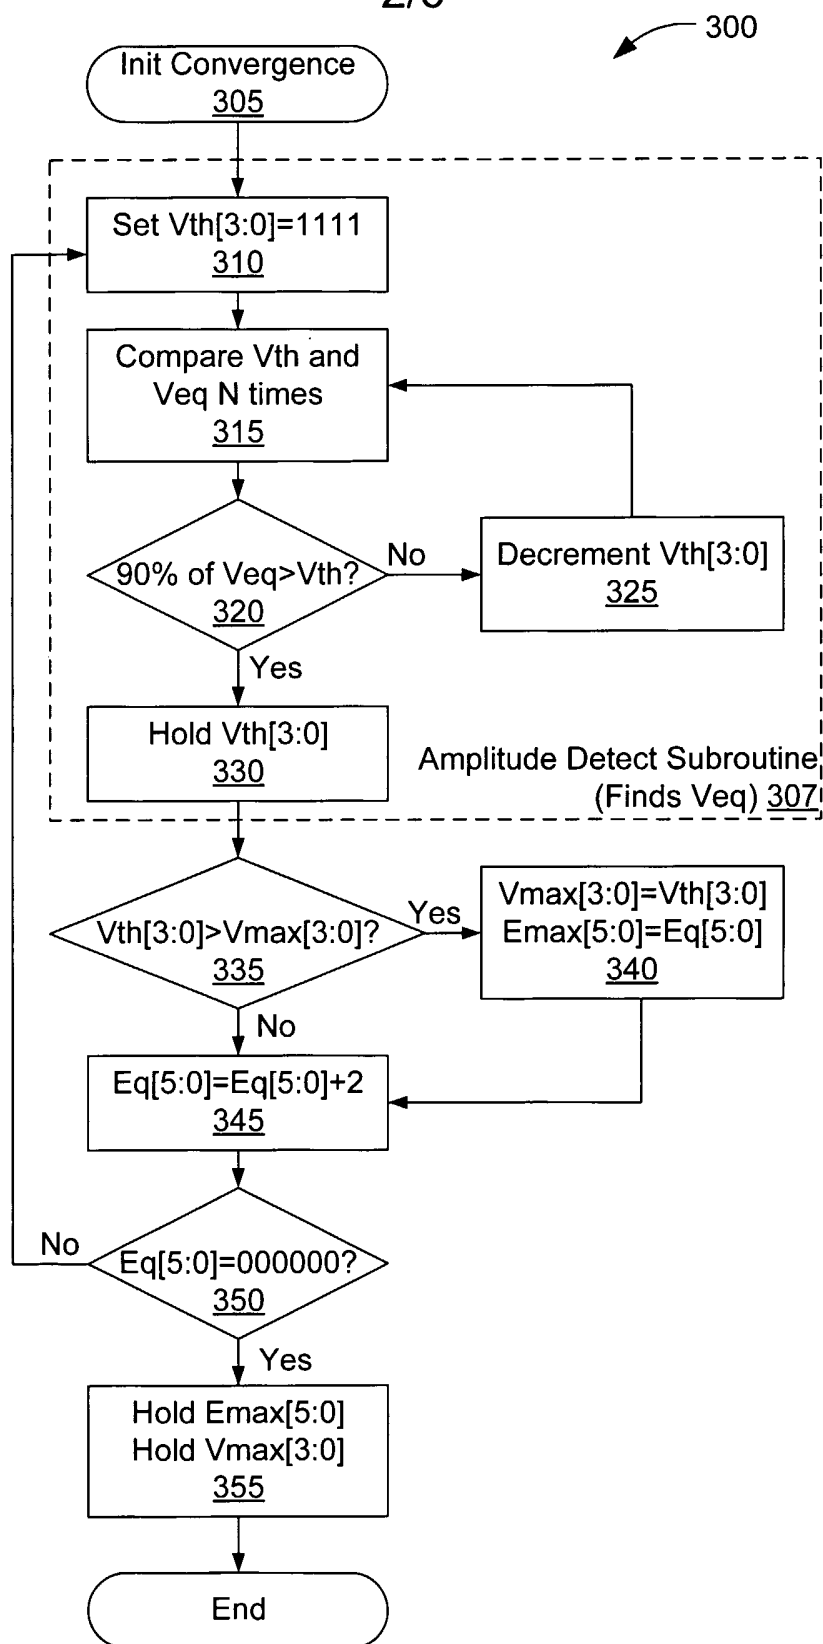


FIG. 3

3/6

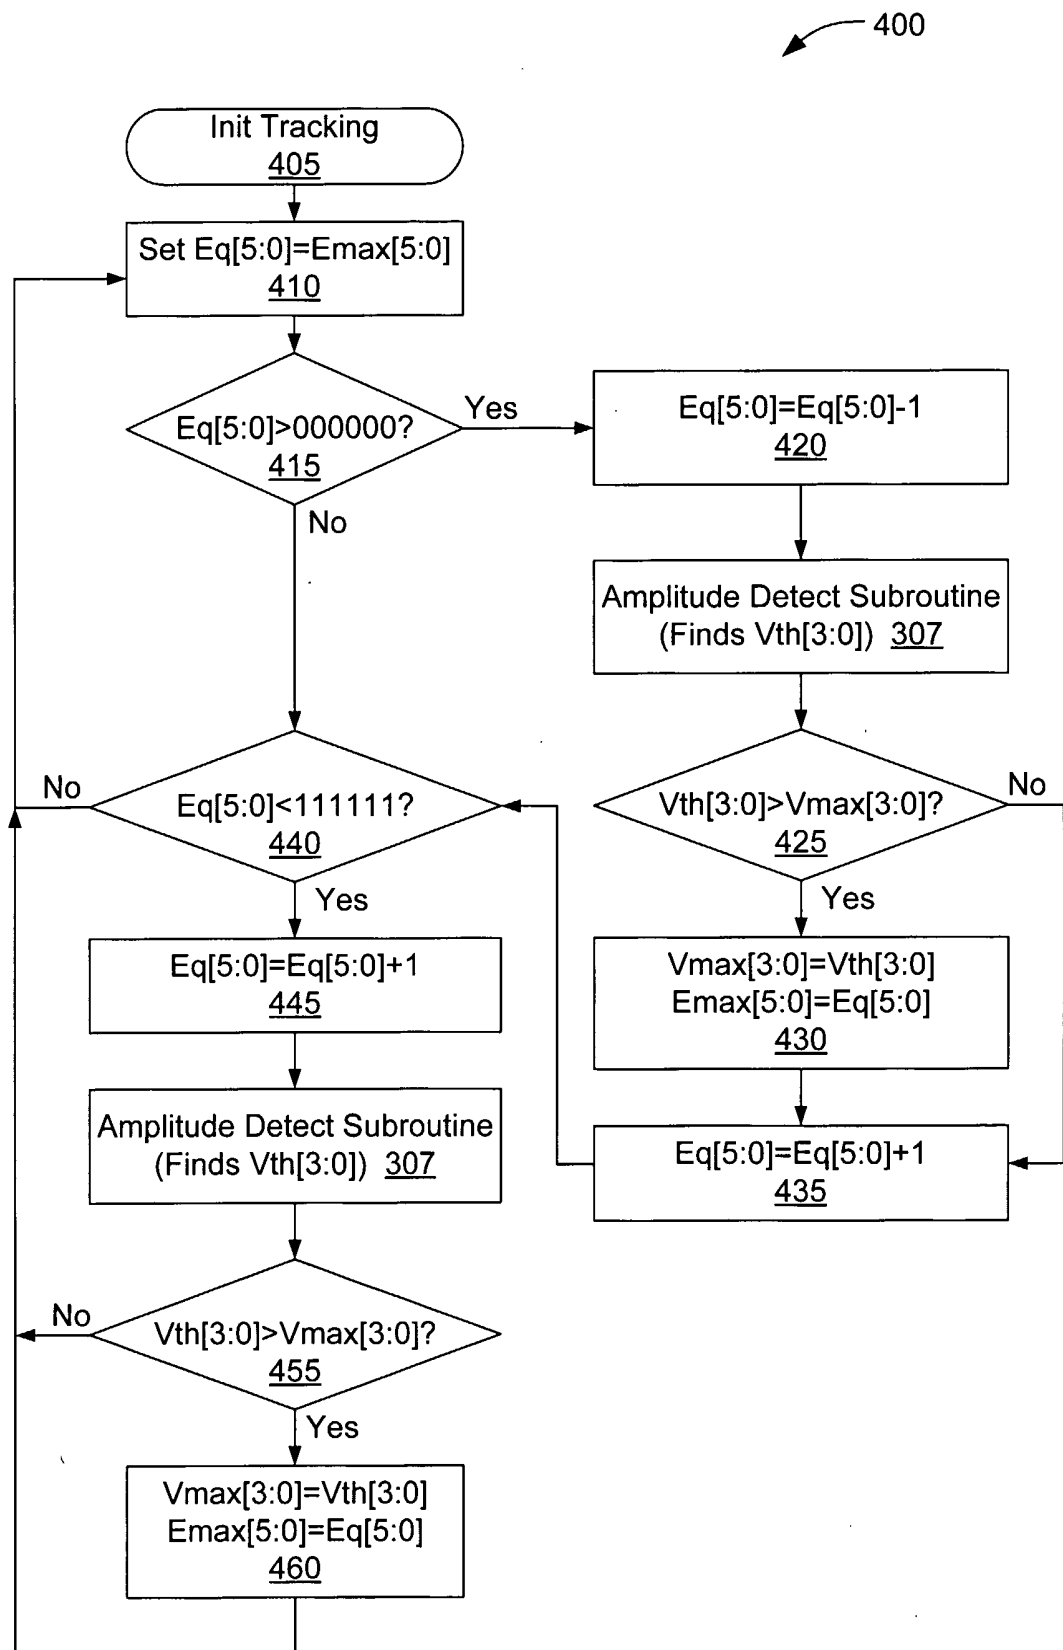


FIG. 4

4/6

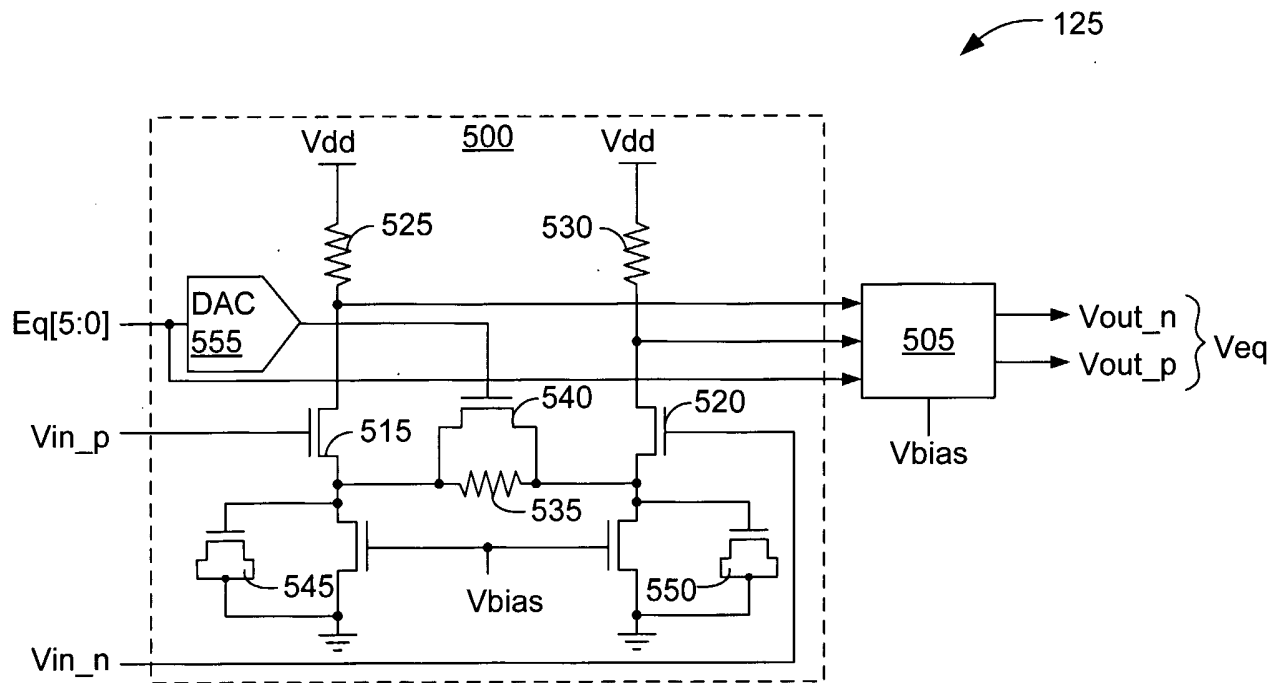


FIG. 5

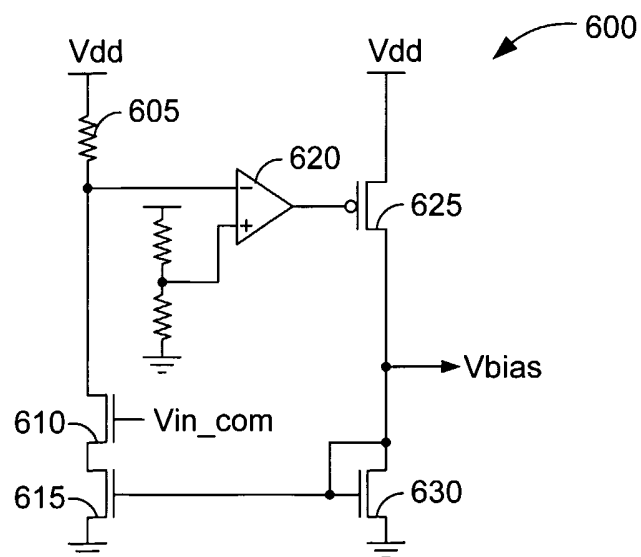


FIG. 6

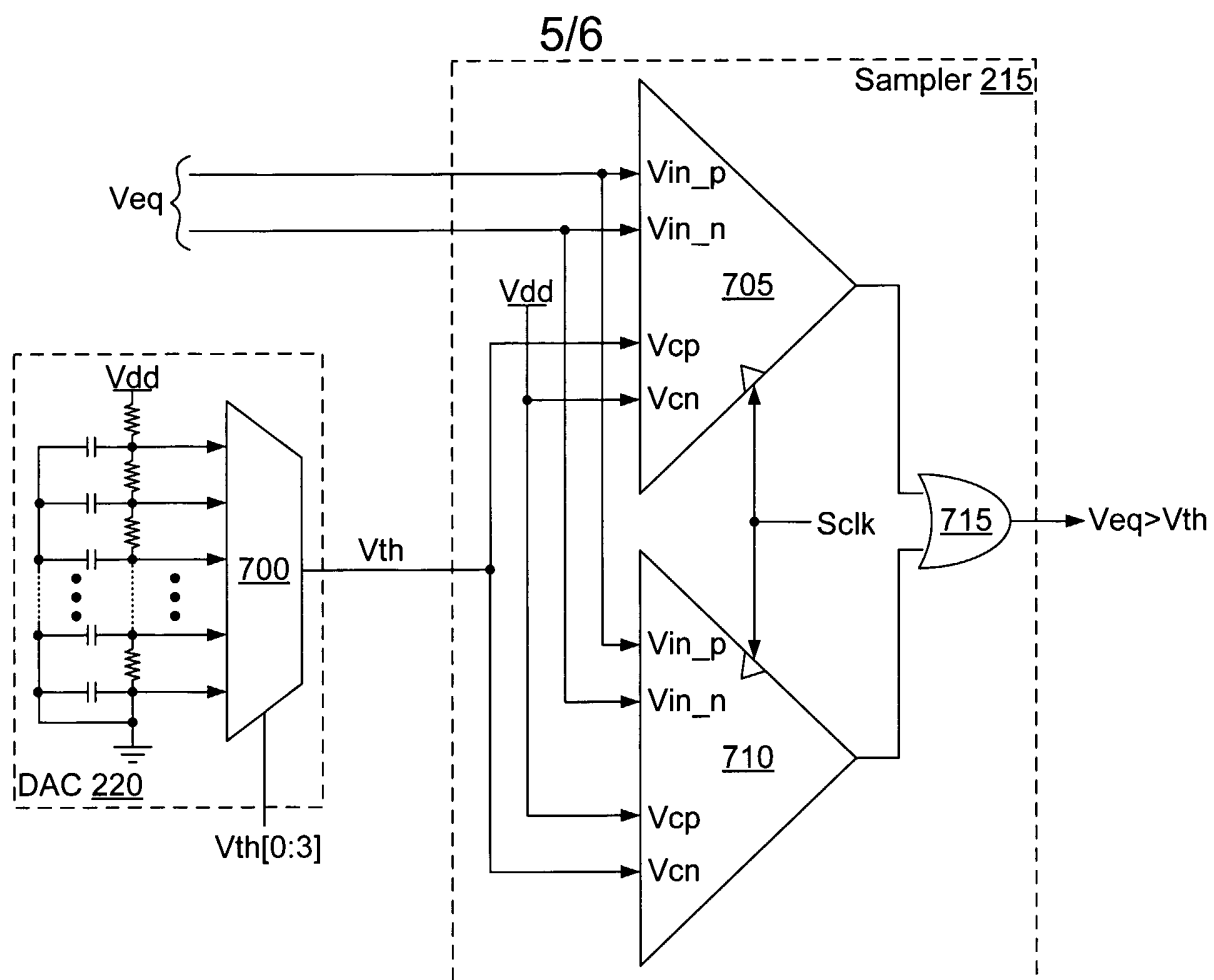


FIG. 7

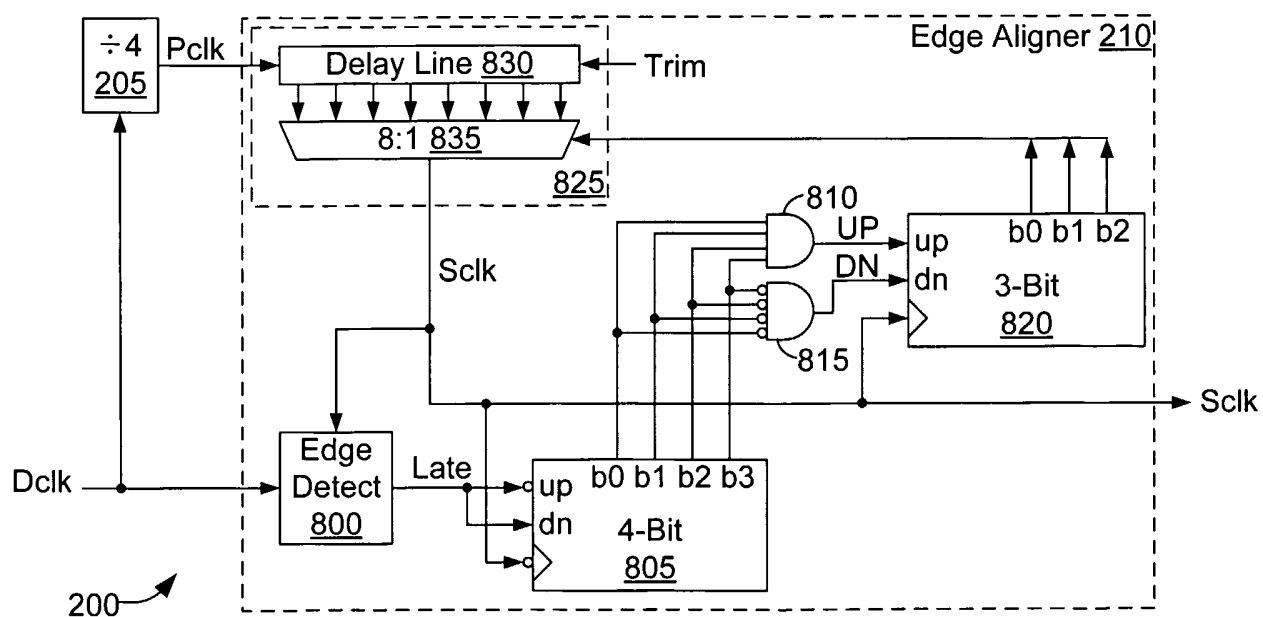


FIG. 8

6/6

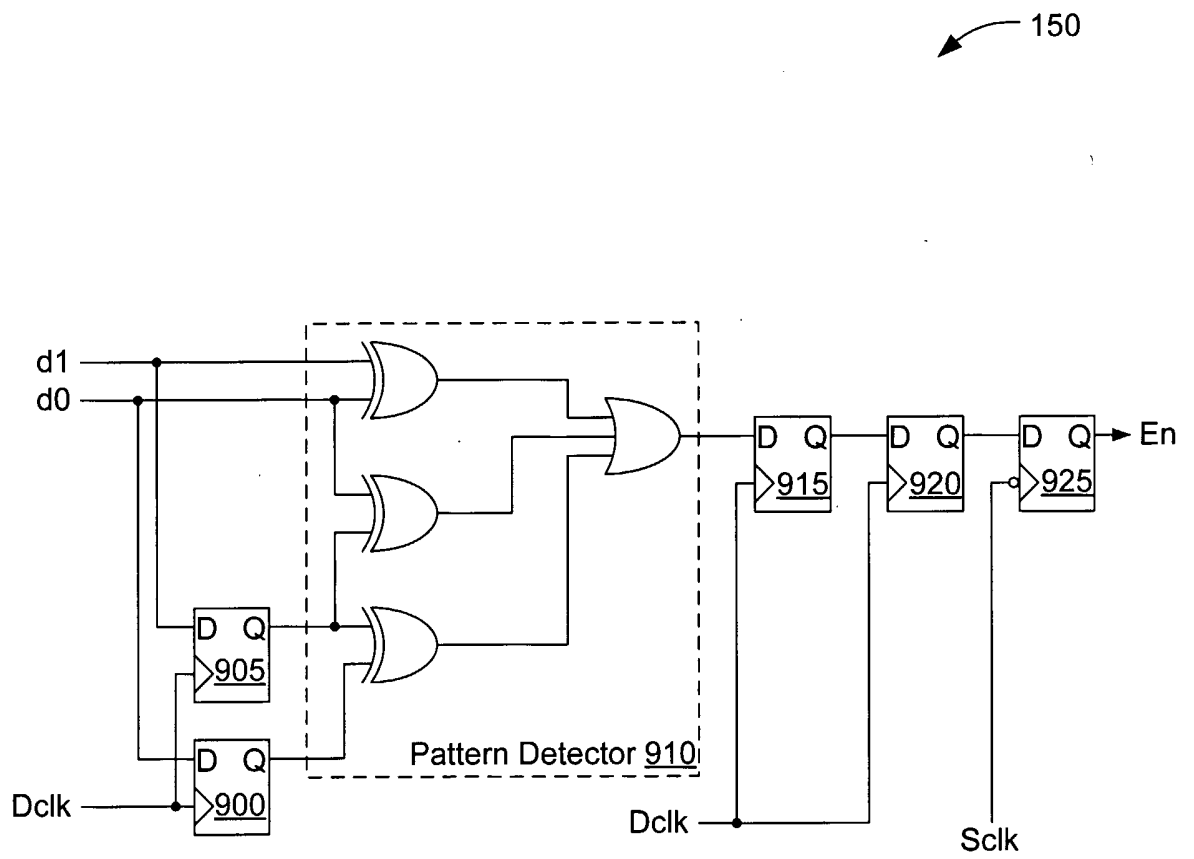


FIG. 9

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/016931

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L25/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 192 071 B1 (HIRTH RYAN E ET AL) 20 February 2001 (2001-02-20) figures 1,2 column 1, line 20 - column 2, line 60 column 5, line 54 - column 7, line 52 column 8, line 60 - column 10, line 12 claims	1-28
X	US 5 764 695 A (NAGARAJ ET AL) 9 June 1998 (1998-06-09) abstract claims ----- -/--	1-4, 7-10, 15-18, 20, 24-26,28

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

15 September 2005

Date of mailing of the international search report

22/09/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Koukourlis, S

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/016931

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/005001 A1 (JONES KEITH R ET AL) 8 January 2004 (2004-01-08) abstract claims -----	1-4, 7-10, 15-18, 20, 24-26,28
P,X	WO 2005/022750 A (GENNUM CORPORATION; GUPTA, ATUL, K; D'HAENE, WESLEY, C) 10 March 2005 (2005-03-10) the whole document -----	1-28

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2005/016931

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6192071	B1	20-02-2001	NONE	
US 5764695	A	09-06-1998	NONE	
US 2004005001	A1	08-01-2004	NONE	
WO 2005022750	A	10-03-2005	NONE	