




(86) Date de dépôt PCT/PCT Filing Date: 1999/10/13
(87) Date publication PCT/PCT Publication Date: 2000/05/11
(45) Date de délivrance/Issue Date: 2008/12/16
(85) Entrée phase nationale/National Entry: 2001/12/10
(86) N° demande PCT/PCT Application No.: US 1999/023945
(87) N° publication PCT/PCT Publication No.: 2000/026682
(30) Priorité/Priority: 1998/10/31 (US09/183,977)

(51) Cl.Int./Int.Cl. *G01R 19/00* (2006.01),
G01R 15/24 (2006.01), *G01R 33/032* (2006.01)
(72) Inventeur/Inventor:
BLAKE, JAMES N., US
(73) Propriétaire/Owner:
THE TEXAS A & M UNIVERSITY SYSTEM, US
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : DETECTEUR DE COURANT A FIBRE OPTIQUE
(54) Title: FIBER OPTIC CURRENT SENSOR

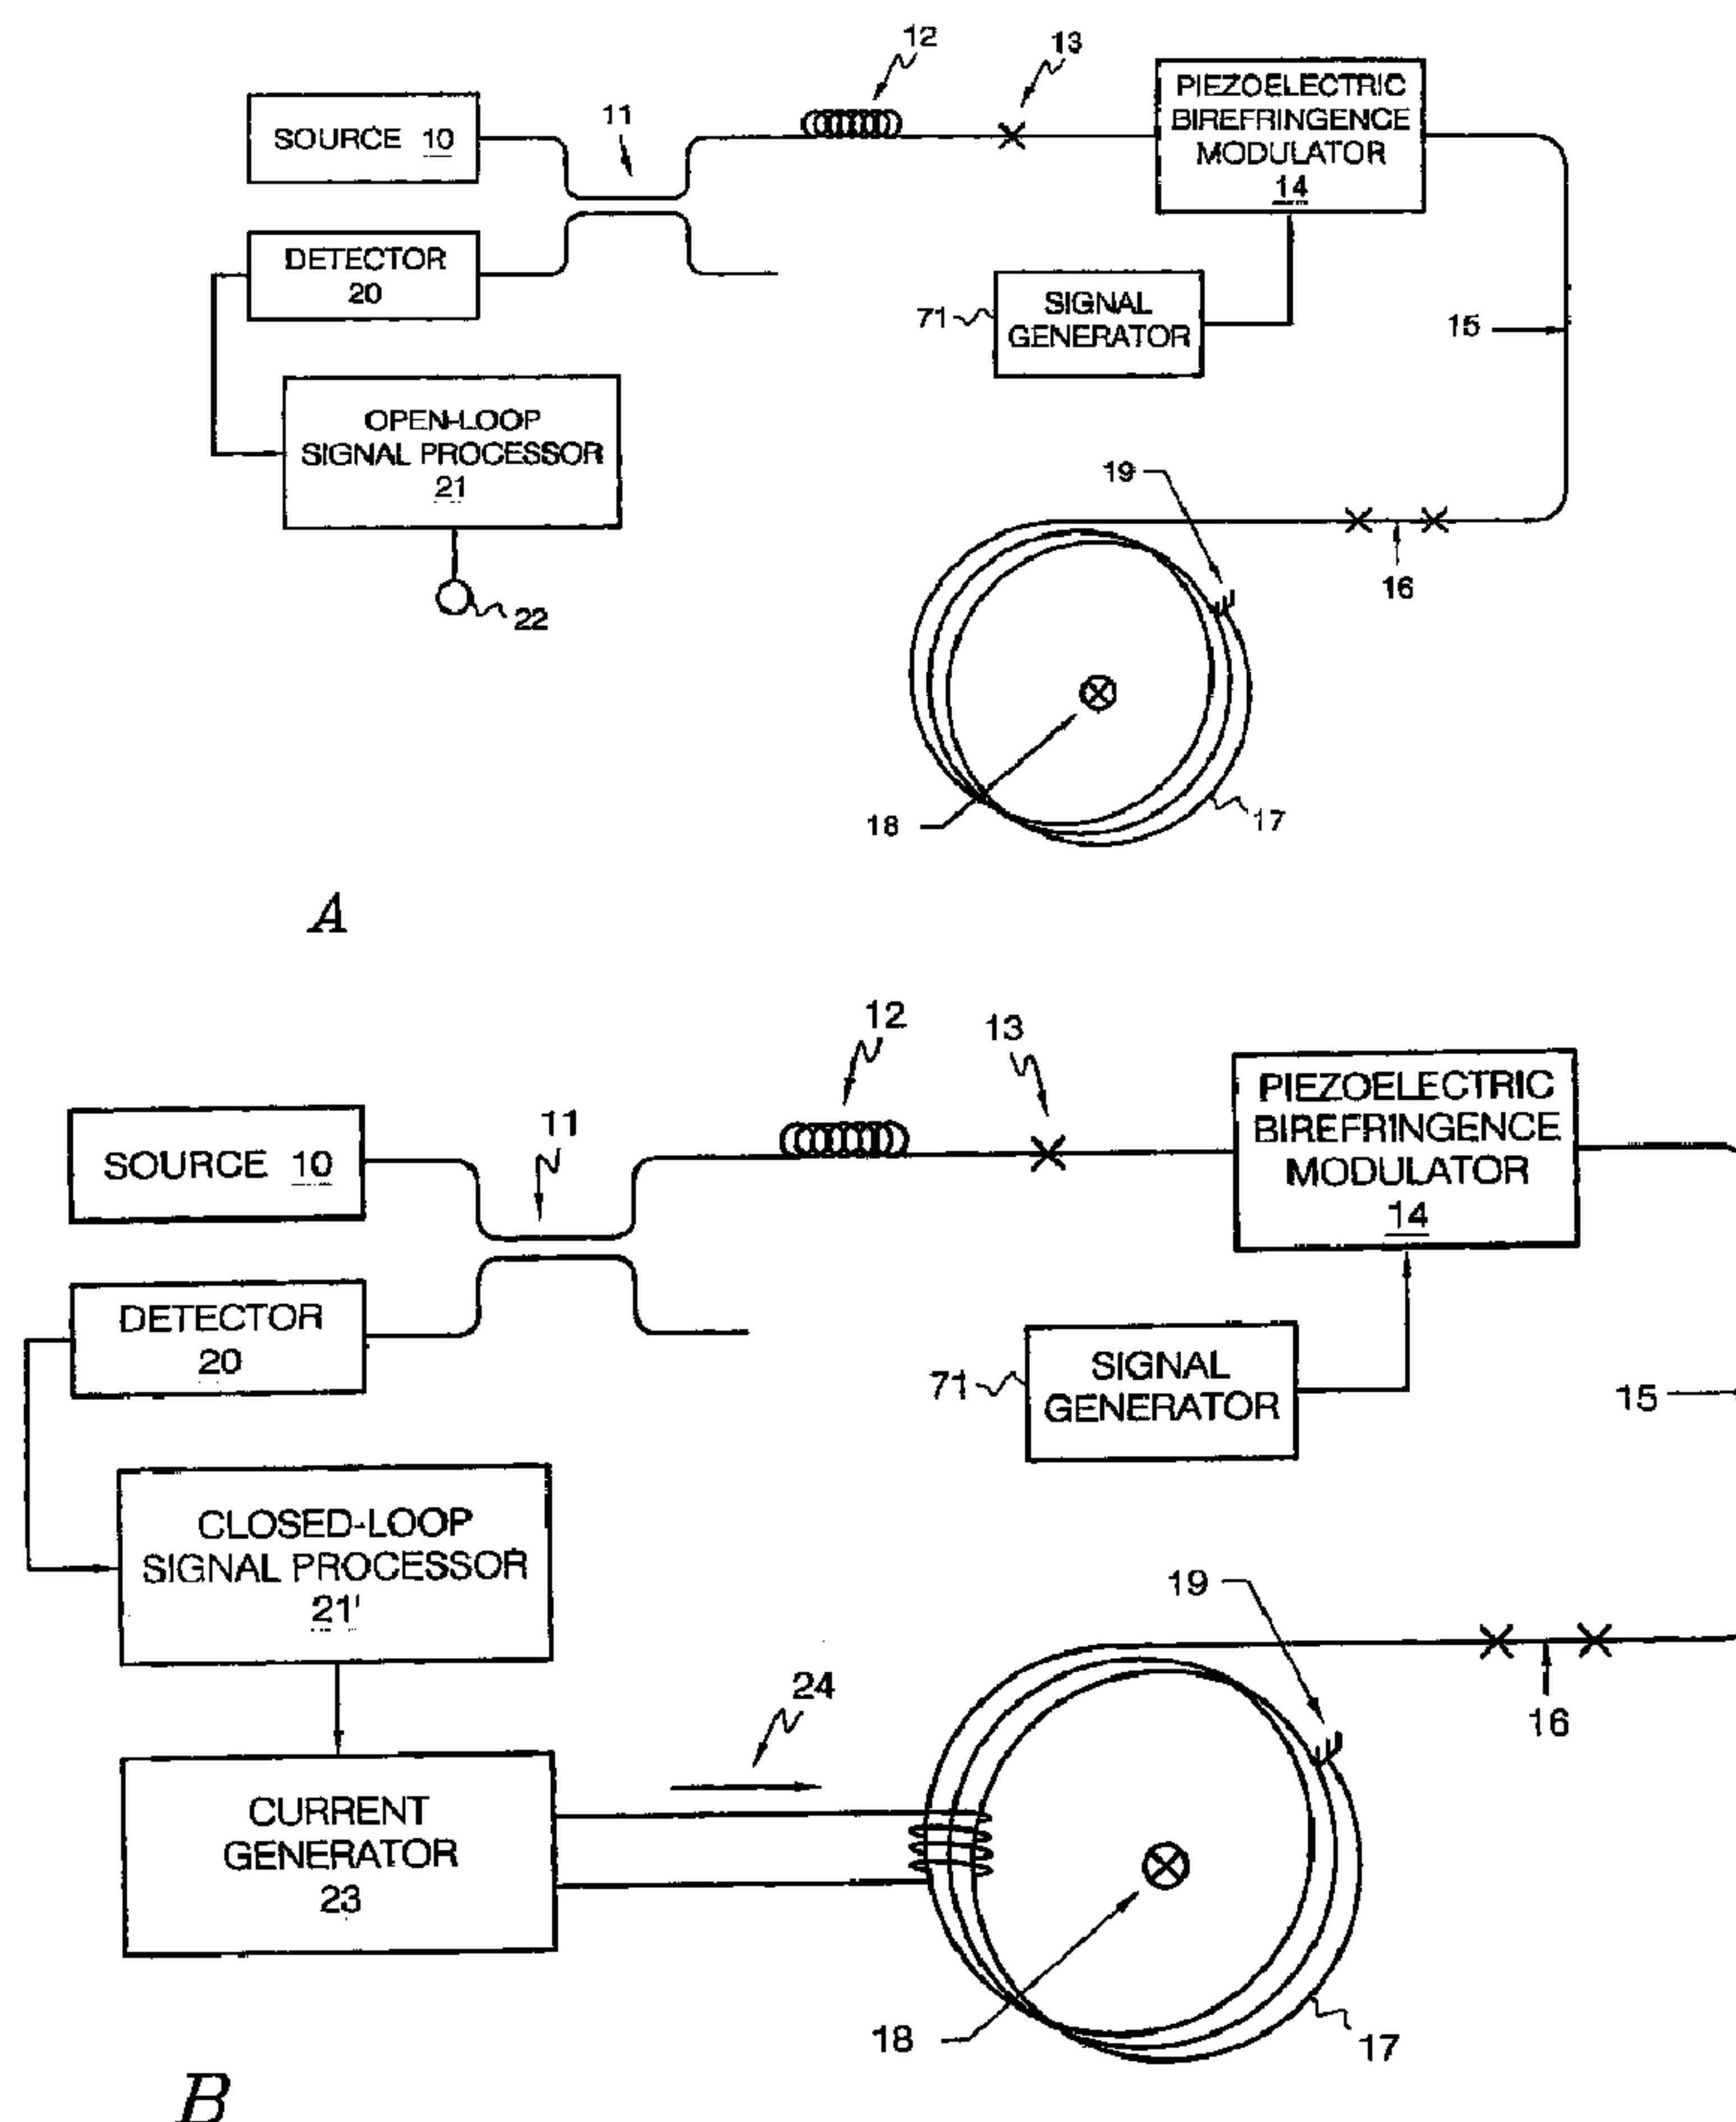

(57) Abrégé/Abstract:

A current sensor having an optimized optical fiber coil (17) for sensing the magnetic field of a current of wire (18) passing by or through the coil. The coil is optimally spun such that a particular ratio of the spin rate to the intrinsic polarization beat length is such



(57) **Abrégé(suite)/Abstract(continued):**

for best maintenance of the circular polarization state of the light in the coil. The coil fiber may also be Terbium doped for greater sensitivity. The phase or birefringence modulation of the light may be piezoelectric or electro-optic. A Faraday rotator may be used in place of those modulators. The system may be open loop or closed loop. The feedback scheme may be via the modulator or the phase nulling current affecting the sensing coil.



**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G01R 33/032, 15/24	A1	(11) International Publication Number: WO 00/26682 (43) International Publication Date: 11 May 2000 (11.05.00)
(21) International Application Number: PCT/US99/23945 (22) International Filing Date: 13 October 1999 (13.10.99) (30) Priority Data: 09/183,977 31 October 1998 (31.10.98) US (71) Applicant: HONEYWELL INC. [US/US]; Honeywell Plaza, Minneapolis, MN 55408 (US). (72) Inventor: BLAKE, James, N.; 5528 Michelle Drive, Scottsdale, AZ 85254 (US). (74) Agent: SHUDY, John, G., Jr.; Honeywell Inc., Honeywell Plaza - MN12-8251, P.O. Box 524, Minneapolis, MN 55440-0524 (US).		(81) Designated States: AE, BR, CA, CN, IL, IN, JP, KR, NO, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>

(54) Title: FIBER OPTIC CURRENT SENSOR**(57) Abstract**

A current sensor having an optimized optical fiber coil (17) for sensing the magnetic field of a current of wire (18) passing by or through the coil. The coil is optimally spun such that a particular ratio of the spin rate to the intrinsic polarization beat length is such for best maintenance of the circular polarization state of the light in the coil. The coil fiber may also be Terbium doped for greater sensitivity. The phase or birefringence modulation of the light may be piezoelectric or electro-optic. A Faraday rotator may be used in place of those modulators. The system may be open loop or closed loop. The feedback scheme may be via the modulator or the phase nulling current affecting the sensing coil.

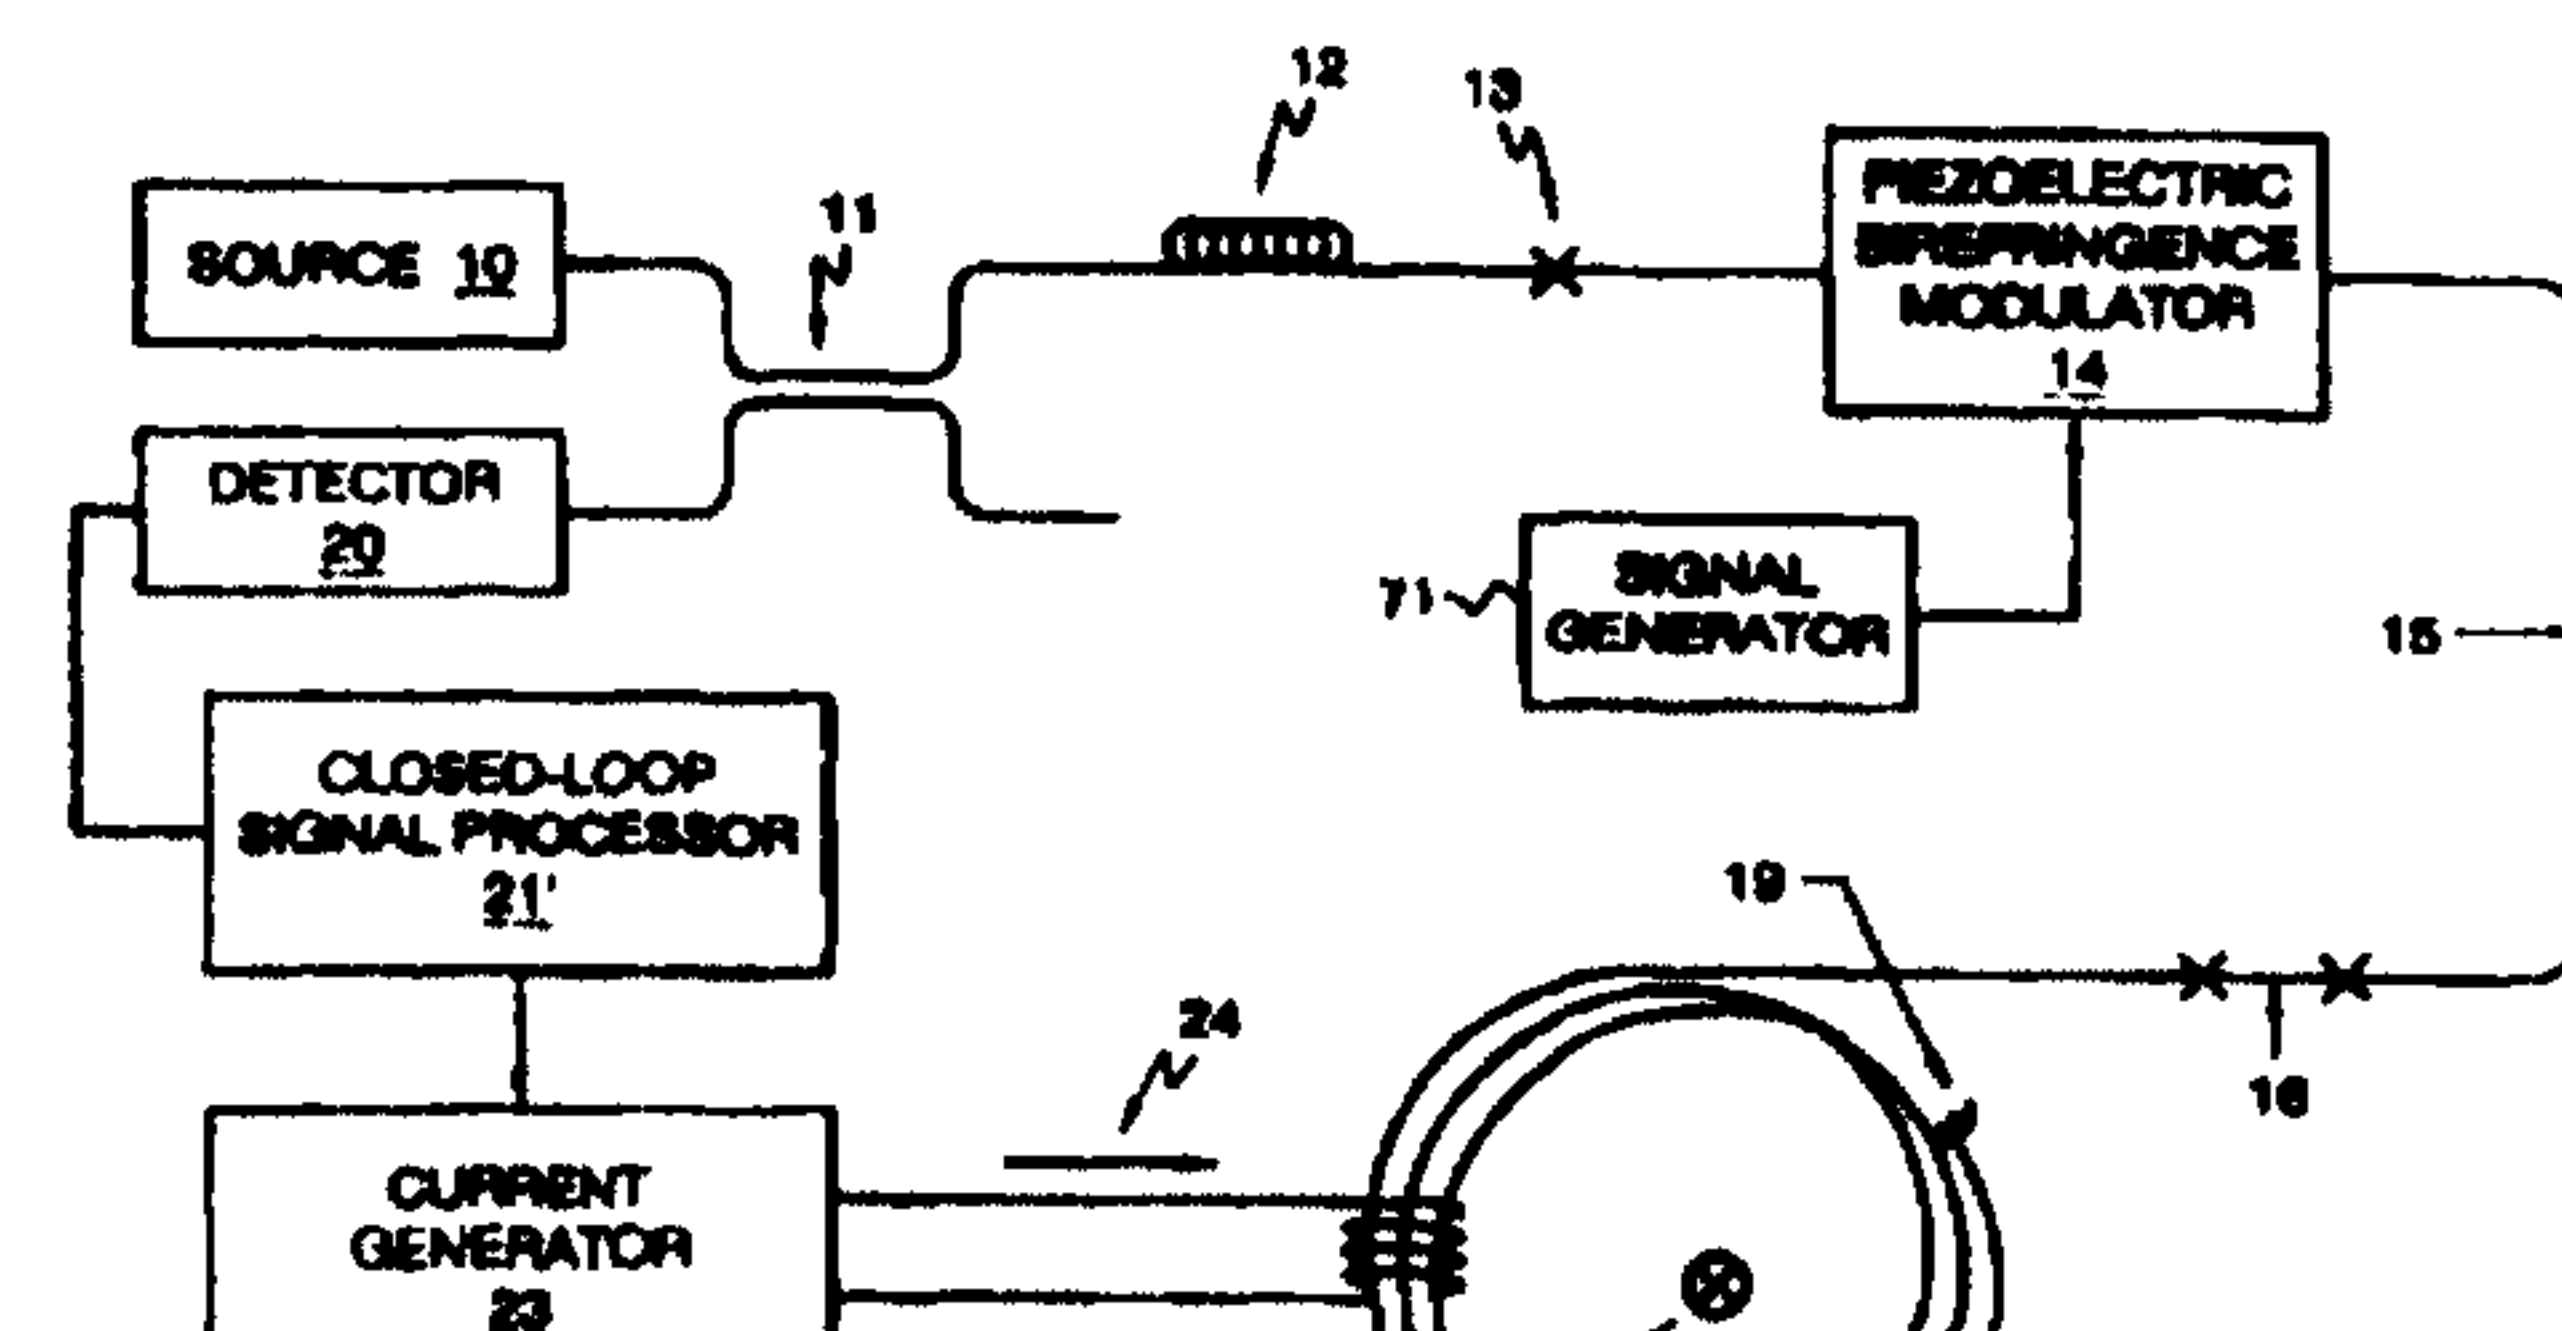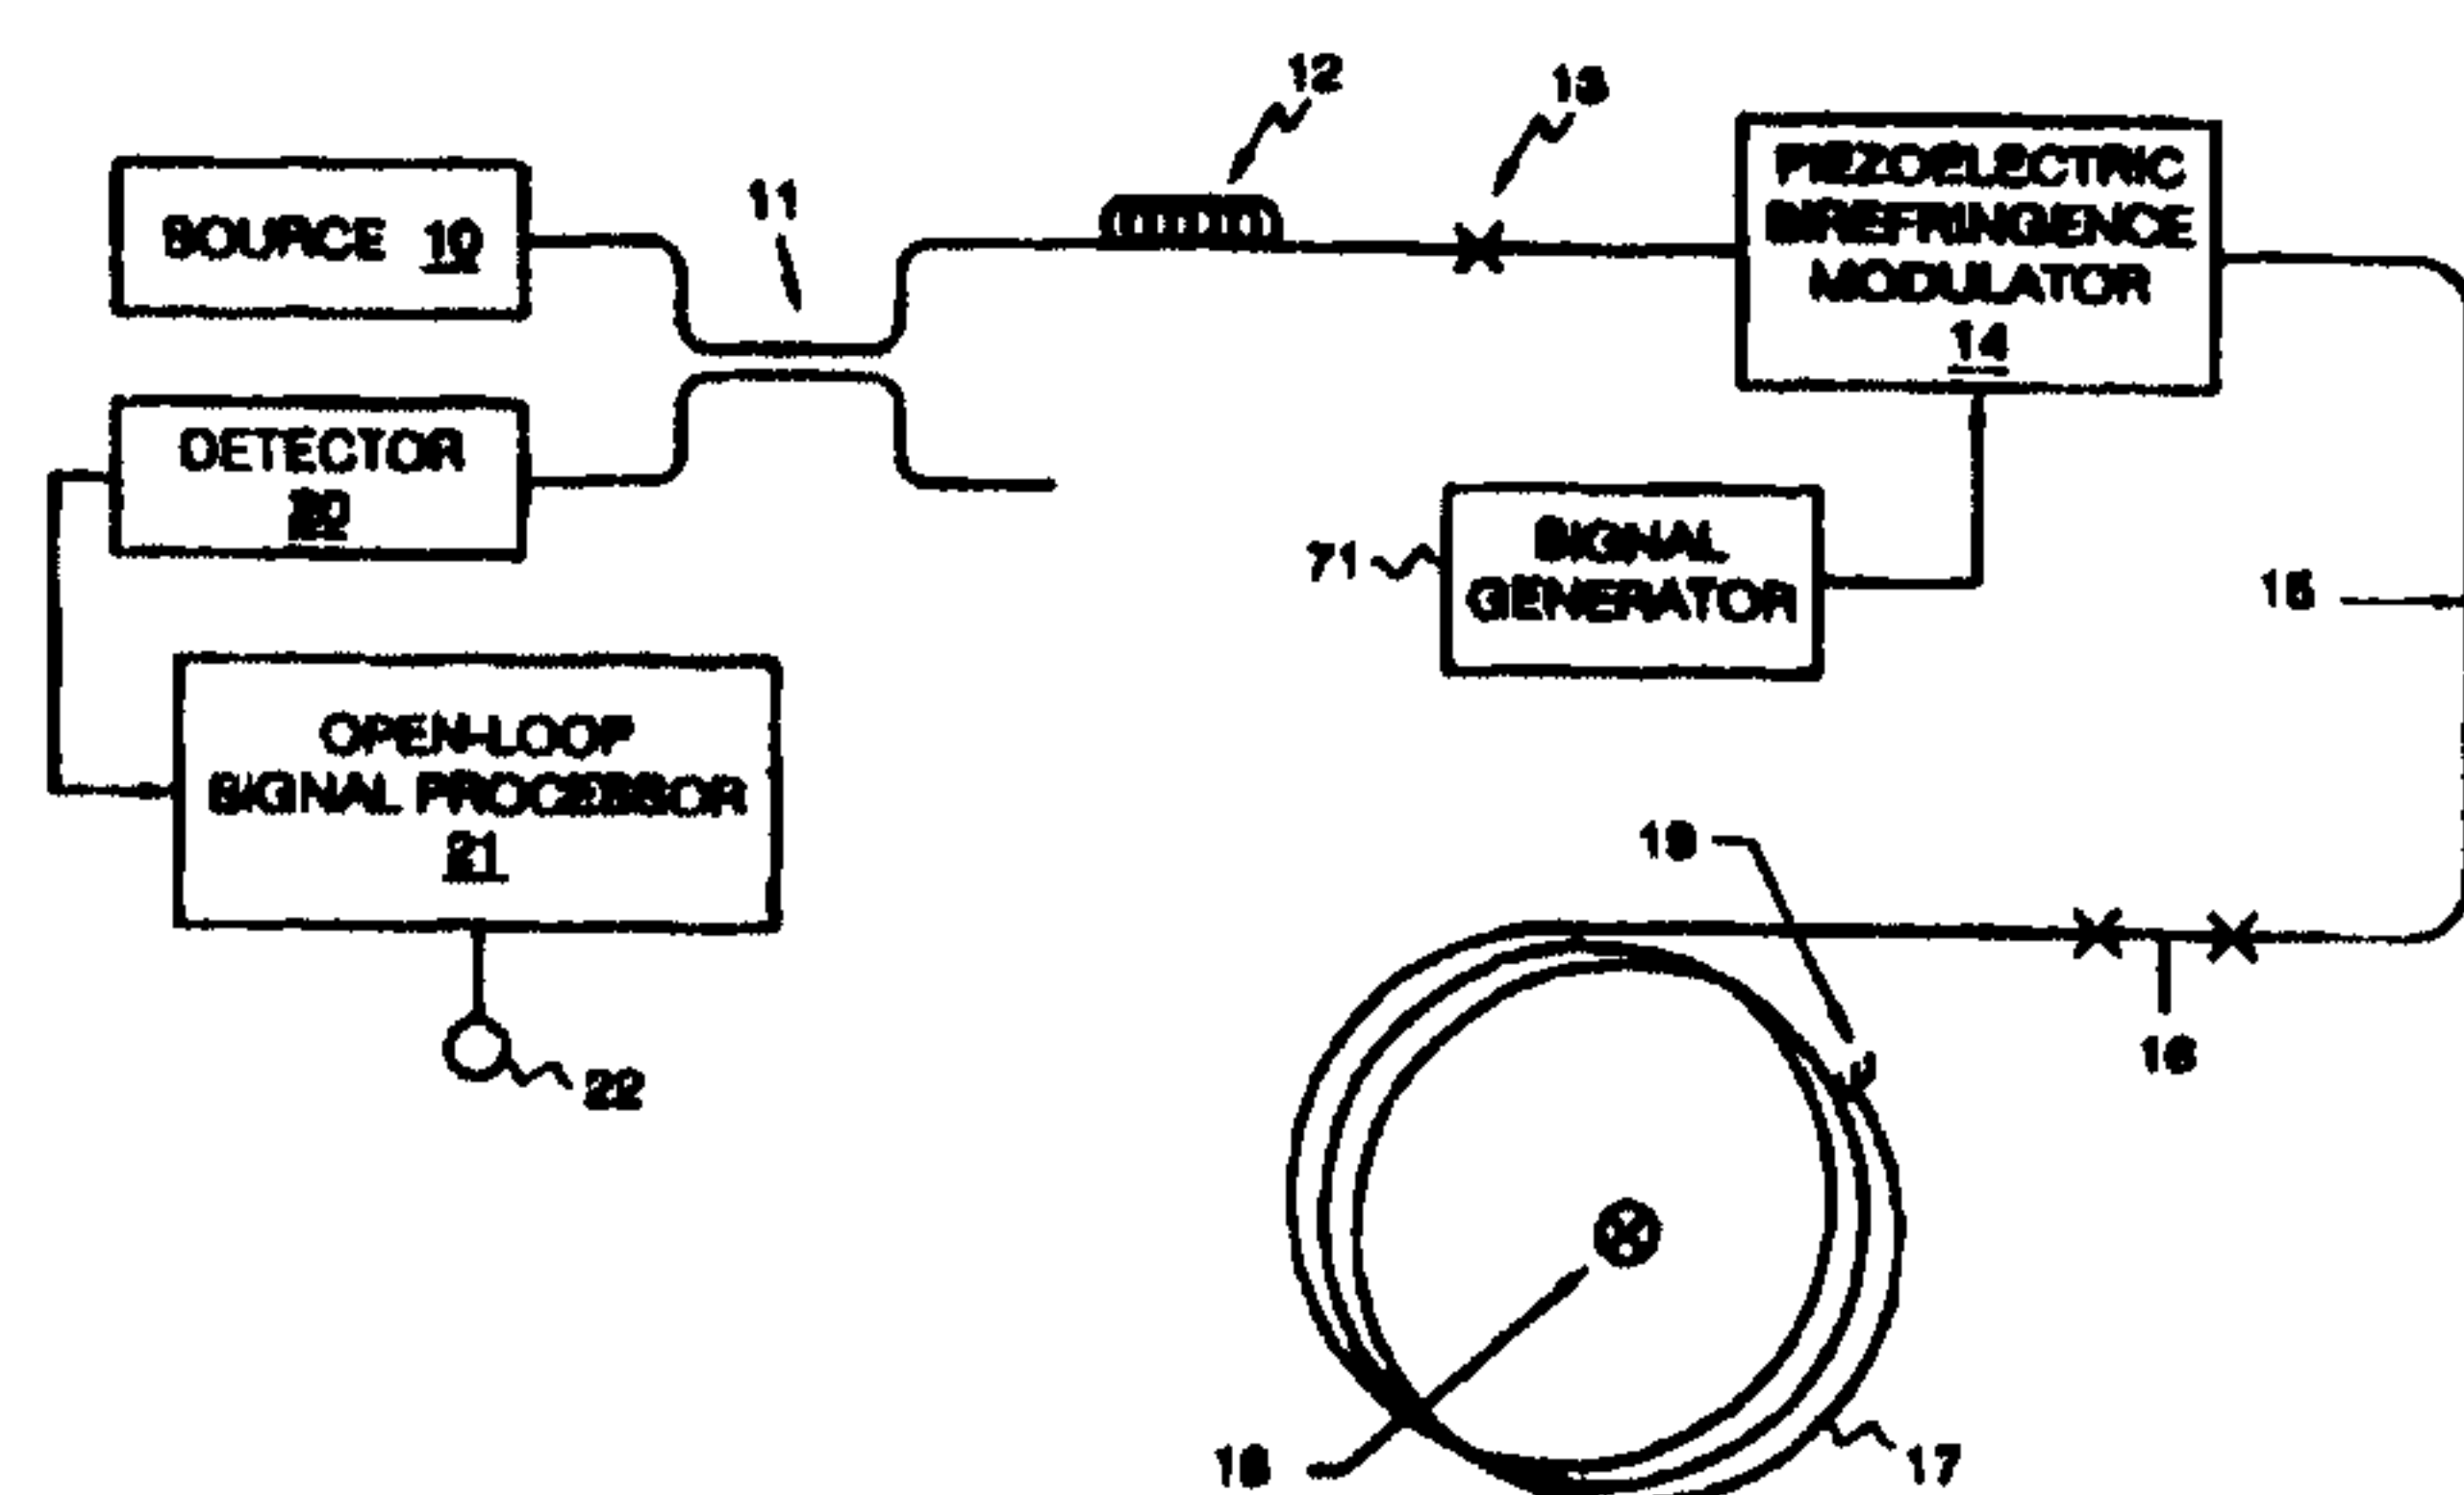

FIBER OPTIC CURRENT SENSOR BACKGROUND

The present invention pertains to fiber optic sensors and, particularly, to
5 fiber optic current sensors.

Fiber optic current sensors work in the principle of the Faraday effect. Current flowing in a wire induces a magnetic field, which, through the Faraday effect rotates the plane of polarization of the light travelling in
10 the optical fiber wound around the current carrying wire. Faraday's law, stated as

$$I = \oint H dL$$

Where I is the electrical current, H is the magnetic field and the integral is taken over a closed path around the current. If the sensing fiber is
15 wound around the current carrying wire with an integral number of turns, and each point in the sensing fiber has a constant sensitivity to the magnetic field, then the rotation of the plane of polarization of the light in the fiber depends on the current being carried in the wire and is insensitive to all externally generated magnetic fields such as those caused
20 by currents carried in nearby wires. The angle, $\Delta\phi$, through which the plane of polarization of light rotates in the presence of a magnetic field is given by

$$\Delta\phi = \int H \cdot dL$$

where V is the Verdet constant of the fiber glass. The sensing optical
25 fiber performs the line integral of the magnetic field along its path, which is proportional to the current in the wire, when that path closes on itself. Thus, one has $\Delta\phi = VNI$ where N is the number of turns of sensing fiber wound around the current carrying wire. The rotation of the state of polarization of the light due to the presence of an electrical current is
30 measured by injecting light with a well-defined linear polarization state

1a

into the sensing region, and then analysing the polarization state of the light after it exits the sensing region. Alternatively, $\Delta\phi$ Represents the excess phase shift encountered by a circularly polarized light wave propagating in the sensing fiber.

5

This technology is related to the in-line optical fiber current sensor as disclosed in U.S. Patent No. 5,644,397 issued July 1, 1997, to inventor James N. Blake and entitled "Fiber Optic Interferometric Circuit and Magnetic Field Sensor". The reader is directed at this point to the
10 teaching of this document which represents the closest prior art. Optical fiber sensors are also disclosed in U.S. Patent No. 5,696,858 issued December 9, 1997, to inventor James N. Blake and entitled, "Fiber

Optics Apparatus and Method for Accurate Current Sensing”.

The in-line and Sagnac type current sensors disclosed in U.S. Patent No. 5,644,397, cited above may be operated in a closed loop fashion using direct digitization of the output of the preamplifier attached to the photodetector. The
5 closed loop waveform may incorporate a number of different techniques, well known in the art of fiber optic gyroscopes, including dual ramp, serrodyne, and digital phase ramp. These closed loop techniques, when applied to the in-line and Sagnac type current sensor improve the sensitivity and accuracy of the sensor over that obtainable using the simpler open loop demodulation techniques.

10 A loop closure scheme typically involves digitization of the output of a preamplifier attached to the photodetector output signal from an analog voltage to a digital one, via an analog-to-digital (A/D) converter in loop closure electronics. An A/D converter “samples” or converts the preamplifier output to a digital signal representative of the preamp signal periodically, typically several times per half
15 modulation cycle of the bias modulation period of the signal from a bias modulation signal generator. The output of the A/D converter is compared between the two half cycles with a signal indicative of current changes. The presence of a current change changes a loop closure waveform signal is applied to a phase modulator via a digital-to-analog (D/A) converter. The loop closure
20 waveform signal used to rebalance the phase (ϕ) between the counterpropagating optical waves in the sensing loop may be a sawtooth-type signal (a so-called serrodyne ramp), a digital phase step waveform or a dual ramp waveform. All of these are applied asymmetrically to the interferometer loop to take advantage of the time delay in coil and allow a phase difference (equal and
25 opposite to that generated by current) between the waves, to be generated. The sawtooth or serrodyne waveform has a gradual phase slope proportional to the electric current magnitude with a rapid flyback or reset of a multiple of 2π phase shift in size. The dual ramp waveform alternates between a positive-going phase ramp and a negative-going one with the difference in the magnitude of the
30 up-slope and the down-slope being proportional to the electric current, all ramp types are capable of reversing to indicate a reversal in the direction of the current in the conductor.

However, a need has arisen for a fiber optic current sensor with much improved sensitivity. Certain applications require that small leakage currents be detected in systems carrying large nominal currents. Examples of such applications include detecting leakage currents in
5 underground distribution cables and in battery charging systems. In charging systems, the detection of leakage currents can be used to provide protection against electrocution of the operator. Also, the current sensor may be part of a ground-fault interrupter.

10

SUMMARY OF THE INVENTION

The present invention discloses several methods of increasing the sensitivity of the in-line and Sagnac loop type current sensors.

15 In a first aspect the invention provides a fiber optic current sensor comprising:

a light source,

a polarizer coupled to said light source;

a first polarization converter coupled to said polarizer;

20 a sensing fiber coil connected to said polarization converter,

a terminating reflector connected to said sensing fiber; and

a detector coupled to said polarizer,

and characterised in that the sensing fiber coil is spun with a spin rate between 3 and 8 complete revolutions per polarization beat length of said
25 sensing fiber to provide a predetermined maintenance of circular polarization.

This allows a circular state of polarization to be well maintained throughout a long length of bent fiber so that the number of turns of sensing fiber around the current carrying wire can be increased to a large
30 number.

In a second aspect the invention provides a fiber optic current sensor comprising:

3a

- a light source;
a polarizer coupled to said light source,
an optical splitter connected to said polarizer,
a fiber loop connected at each end to said optical splitter,
5 a sensing fiber coil situated within said fiber loop and having sensing fiber and
a detector characterised in that the sensing fiber of said sensing fiber coil is spun with a spin rate of between 3 and 8 complete revolutions per polarization beat length of said sensing fiber.
- 10 Optionally, a dopant such as Terbium may be added to the optical fiber of the coil to increase the Verdet constant of the sensing fiber, which in turn increases the magnetic sensitivity of the coil. This is advantageously done in combination with using the optimally spun fiber.
- 15 In another modification, a Faraday rotator may be used to passively bias the sensor, and the system is run closed loop using a phase nulling current passing through the sensing coil (in addition to the current to be measured which also passes through the sensing coil). This is also advantageously
20 done in combination with either one or both of the first and second aspects of this invention.

BRIEF DESCRIPTION OF THE DRAWINGS

- 25 Figure 1a shows an in-line current sensor utilizing a piezoelectric birefringence modulator and open-loop signal processing together with an optimized sensing fiber.

- Figure 1b shows an in-line current sensor utilizing a piezoelectric
30 birefringence modulator and a phase nulling current based closed loop signal processing together with an optimized sensing fiber.

Figure 2 shows the remaining power present in a circular state of polarization as the light propagates along a bent spun birefringent fiber.

Figure 3a shows an in-line current sensor utilizing an electrooptic birefringence modulator and electronic closed loop signal processing together with an optimized
5 sensing fiber.

Figure 3b shows an in-line current sensor utilizing an electrooptic birefringence modulator and a phase nulling current based closed loop signal processing together with an optimized sensing fiber.

Figure 4 shows a Faraday rotator based passive in-line current sensor and a
10 phase nulling current based closed loop signal processing together with an optimized sensing fiber.

Figure 5a shows a Sagnac type current sensor utilizing a piezoelectric phase modulator and open-loop signal processing together with an optimized sensing fiber.

Figure 5b shows a Sagnac type current sensor utilizing a piezoelectric phase
15 modulator and a phase nulling current based closed loop signal processing together with an optimized sensing fiber.

Figure 6a shows a Sagnac type current sensor utilizing an electrooptic phase modulator and electronic closed loop signal processing together with an optimized
20 sensing fiber.

Figure 6b shows a Sagnac type current sensor utilizing an electrooptic phase modulator and a phase nulling current based closed loop signal processing together with an optimized sensing fiber.

Figure 7 shows a Faraday rotator based passive Sagnac type current sensor and a
25 phase nulling current based closed loop signal processing together with an optimized sensing fiber.

DESCRIPTION OF THE EMBODIMENT

Figure 1a shows an embodiment of an in-line current sensor. Light from source
10 propagates through coupler 11 and polarizer 12 to a 45-degree splice 13, where it
30 divides equally into the two polarization states maintained throughout the rest of the optical circuit. Piezoelectric birefringence modulator 14 differentially modulates the phases of the light in the two polarization states. Modulator 14 is driven by a modulator

signal generator 71 that provides an electrical, periodic, alternating signal having either a square or sine wave. The light then propagates through delay line 15, through mode converter 16 which converts the two linear states of polarization into two circular states of polarization, and through optimized sensor coil 17. Optimized sensor coil 17 is wound around current carrying wire 18. The light reflects off reflective termination 19 and retraces its way through the optical circuit, finally arriving at detector 20. Open-loop signal processor 21 converts the detected signal to an output 22 which is indicative of the current flowing in current carrying wire 18.

The sensor achieves its greatest sensitivity when the circular states of polarization are well maintained throughout the sensing coil. It is well known in the art that a spun birefringent fiber can preserve a circular state of polarization to some degree. However, for this invention, the concern is that the circular state of polarization be extraordinarily well maintained so that a very long length (hundreds of meters) of sensing fiber can be used. A straight spun birefringent fiber does hold a circular state of polarization over a long distance, but achieving this property is much more difficult when the fiber is bent, as is done when it is wrapped around a current carrying wire.

Figure 2 illustrates the circular polarization holding capability of a bent spun birefringent fiber. As the light propagates down the fiber, the light oscillates in and out of the pure circular polarization state. For minimizing the power that leaves the desired circular state of polarization, it is important to optimize the ratio of the spin rate to the intrinsic polarization beat length of the fiber. If the spin rate is too fast, the intrinsic birefringence of the fiber is too well averaged and the fiber becomes very sensitive to bend induced birefringence. If the spin rate is too slow, the intrinsic birefringence is not well averaged, and the fiber does not hold a circular state of polarization for this reason. Numerical modeling of the characteristics of a bent spun birefringent fiber yields the result that for practical bend radii (2 to 10 cm) the optimum ratio of the spin rate to the intrinsic beat length is between 4 and 6. Minimum degradation of the circular polarization holding capability is achieved when the ratio is between 3 and 8. By choosing a fiber with a spin rate in this range, the circular polarization state of the fiber can be maintained for a long length of fiber allowing for the sensitivity of the sensor to be greatly increased.

A second method of increasing the sensitivity of the sensor of figures 1, and 3-7 is to dope the fiber with a material that increases the fiber's Verdet constant. Terbium is one element that has this desired effect. Doping the fiber can be done in conjunction with optimally spinning the fiber. The optimized sensor coil 17 of figure 1a is
5 advantageously both optimally spun and doped.

Figure 1b shows a variation of the sensor disclosed in figure 1a. In this configuration, a closed loop signal processor 21' drives a current generator 23 that produces a phase nulling current 24. Phase nulling current 24 passes through the optimized sensor coil 17 producing a substantially equal and opposite effect to that
10 produced by the current in current carrying wire 18. With this method of operation, the non-reciprocal phaseshift induced in the current sensor is kept very small, allowing for a very high sensitivity sensing coil to be employed without encountering non-linearities associated with detecting large phase shifts.

Figures 3a and 3b show in-line current sensors similar to those in figures 1a and
15 1b, the difference being that the piezoelectric birefringence modulators are replaced with electrooptic modulators 14'. Figure 3a shows a configuration where an electronic closed loop signal processor 21'' is used to provide a feedback signal to 14'. Also, the closed-loop processors connected to the modulators in this disclosure provide bias signals like that of generator 71, as note above. Electronic closed loop signal processor
20 21'' may provide a dual-ramp, serrodyne, or digital phase step closed loop signal. Figure 3b show a configuration similar to figure 1b, where current is used to close the loop.

Figure 4 shows a passive version of the current sensor, where Faraday rotator 30 and mode converter 31 provide a passive bias to the sensor. Mode converter 31 is a
25 quarter waveplate. The polarization rotation provided by Faraday rotator 30 is 22.5 degrees. The bias phase shift to the interference pattern is four times the rotation provided by the Faraday rotator. The phase nulling current 24 from current generator 23, which is controlled by closed-loop signal processor 21''', in this configuration can be more accurate for high frequencies that are achievable for the modulated
30 architectures of figures 1 and 3, as the bandwidth of the passive sensor is much greater.

Figure 5a shows a Sagnac loop current sensor. Light from source 50 propagates through coupler 51 and polarizer 52 to loop coupler 53 where it is split and sent in two

directions around the fiber loop. Piezoelectric phase modulator 54 provides a dynamic phase bias. Modulators 54 and 70 of the presently disclosed Sagnac sensors modulate the phase difference of the counter-propagating waves of a polarization state. The signal driving these modulators is a signal like that of generator 71. Mode converters 55 and 55' convert the light to a circular state of polarization for passage through optimized sensor coil 56. The optimization condition for the bent spun fiber is the same for the Sagnac loop current sensor as for the in-line sensor. Minimum deviation of the state of polarization of the light from the circular is achieved when the ratio of the spin rate to the intrinsic polarization beat length is between 3 and 8. When this condition is achieved, a very large number of turns of sensing fiber can be wrapped around current carrying wire 57. The light returns through the optical circuit to detector 58. Open loop signal processor 59 demodulates the signal to give an output 60 that is indicative of the current flowing in current carrying wire 57.

Figure 5b shows a variation of figure 5a, where the signal processing is now accomplished by closed loop signal processor 61 which drives a current generator 62 which in turn produces phase nulling current 63. Phase nulling current 63 substantially cancels the non-reciprocal phase shift produced by the current in current carrying wire 57, allowing for a very high sensitivity sensing coil to be employed.

Figure 6a shows another version of the Sagnac loop current sensor where the polarization, loop splitter, and phase modulation functions have been combined into a single integrated optics multifunction chip 70. Electronic closed loop signal processor 64 provides an electronic closed loop signal to the phase modulator. This signal may be dual ramp, serrrodyne or digital phase step. Figure 6b shows a version of the current sensor where the signal processing is accomplished by closed loop signal processor 64' which drives current generator 62 which in turn provides phase nulling current 63.

Figure 7 shows a Sagnac loop current sensor where the phase bias is provided passively by Faraday rotator 81 surrounded by mode converters 80 and 80'. Mode converters 80 and 80' are advantageously quarter waveplates so that they convert linear polarization to circular polarization. For this passive sensor, the loop closure bandwidth of phase nulling current 63 (from generator 62 that is controlled by processor 64'') can be much greater than in the dynamically biased versions of the sensor. This allows for greater measurement accuracy at higher frequencies.

-8-

There are other variants and embodiments, which encompass the present invention.

CLAIMS

1. A fiber optic current sensor comprising:
a light source (10),
5 a polarizer (12) coupled to said light source (10);
a first polarization converter (13) coupled to said polarizer;
a sensing fiber coil (17) connected to said polarization converter (13),
a terminating reflector (19) connected to said sensing fiber; and
a detector (20) coupled to said polarizer,
10 and characterised in that the sensing fiber coil (17) is spun with a spin
rate between 3 and 8 complete revolutions per polarization beat length of
said sensing fiber to provide a predetermined maintenance of circular
polarization.
- 15 2. The sensor of claim 1, further comprising a Faraday rotator (30)
placed between said polarizer (12) and said first polarization converter
(13).
- 20 3. The sensor of claim 2, further comprising a second polarization
converter placed between said Faraday rotator (30) and said first
polarization converter (13).
4. The sensor of claim 3, wherein the first and second polarization
converters (13) comprise quarter waveplates.
- 25 5. The sensor of claim 2, further comprising a means (21,23) for
generating a secondary current that flows through said sensing fiber coils
(17) nulling the output of said sensor.

6. The sensor of claim 1, further comprising a piezoelectric birefringence modulator (14) placed between said polarizer and said polarization converter.

5 7. The sensor of claim 6, wherein said polarization converter (13) comprises a quarter waveplate.

8. The sensor of claim 6, further comprising a means (21,23) for generating a secondary current that flows through said sensing fiber coil
(10 (17) substantially nulling the output of said sensor.

9. The sensor of claim 1, further comprising an electronic birefringence modulator (14) placed between said polarizer and said polarization converter.

15

10. The sensor of claim 9, wherein said polarization converter (13) comprises a quarter waveplate.

11. The sensor of claim 9, further comprising a means (21,23) for
20 generating a secondary current that flows through said sensing fiber coil substantially nulling the output of said sensor.

12. The sensor of claim 1, wherein the fiber of said sensing fiber coil
(25 (17) has a doping element that increases the Verdet constant of the sensing fiber.

13. The sensor of claim 12, wherein the doping element is Terbium.

14. The sensor of claim 12, further comprising a Faraday rotator (30)
30 placed between said polarizer (12) and said polarization converter (13).

15. The sensor of claim 14, further comprising a second polarization converter placed between said Faraday rotator (30) and said polarization converter (13).

5

16. The sensor of claim 15, wherein the said polarization converters comprise quarter waveplates.

17. The sensor of claim 12, further comprising a means for generating
10 a secondary current (21,23) that flows through said sensing fiber coil substantially nulling the output of said sensor.

18. The sensor of claim 12, further comprising a piezoelectric
15 birefringence modulator (14) placed between said polarizer and said polarization converter.

19. The sensor of claim 18, wherein said polarization converter comprises a quarter waveplate.

20 20. A fiber optic current sensor comprising:
a light source (10);
a polarizer (12) coupled to said light source (10),
an optical splitter (8) connected to said polarizer,
a fiber loop connected at each end to said optical splitter (53),
25 a sensing fiber coil (56) situated within said fiber loop and having sensing fiber and
a detector (58) characterised in that the sensing fiber of said sending fiber coil (56) is spun with a spin rate of between 3 and 8 complete revolutions per polarization beat length of said sensing fiber.

30

12

21. A fiber optic current sensor according to claim 20 in which a Faraday rotator (81) is placed between said optical splitter (53) and an end of said fiber loop (56).
- 5 22. A fiber optic current sensor according to claim 20 or 21 in which the sensing fiber coil (56) has a doping element that increases the Verdet constant of the sensing fiber.
23. A fiber optic current sensor according to claim 22 wherein the
10 doping element is Terbium

1/11

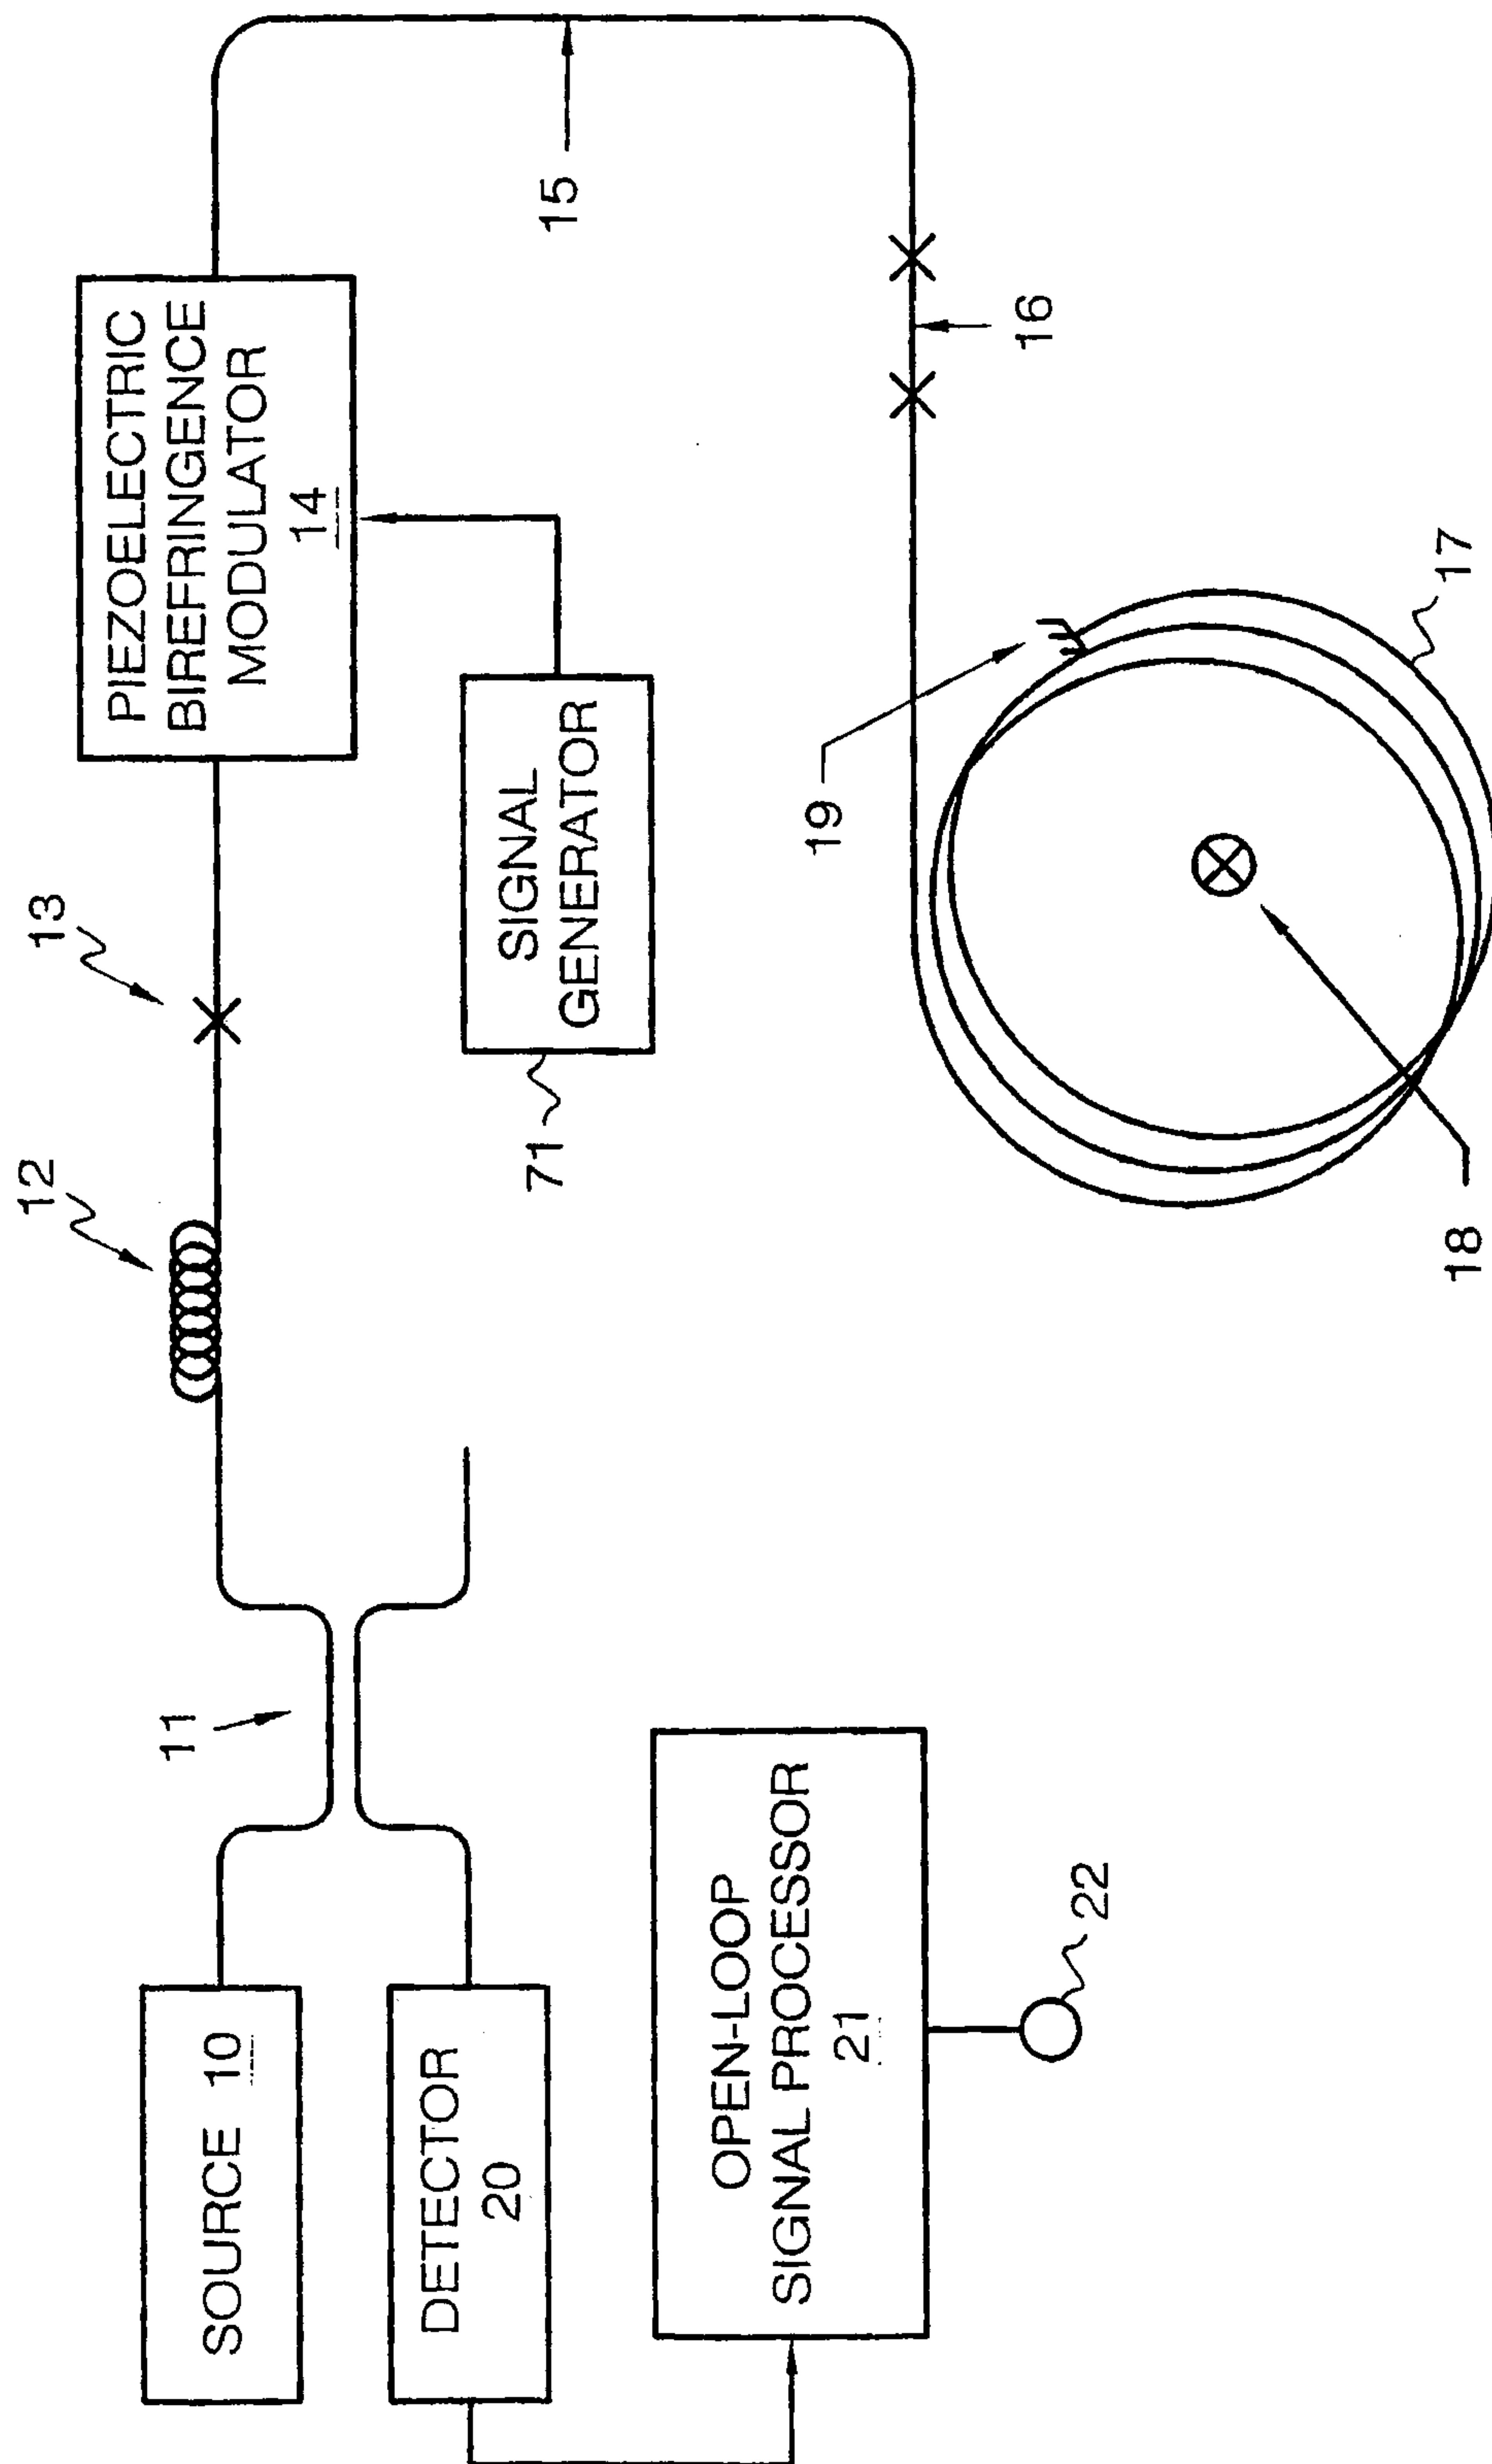


Fig. 1A

2/11

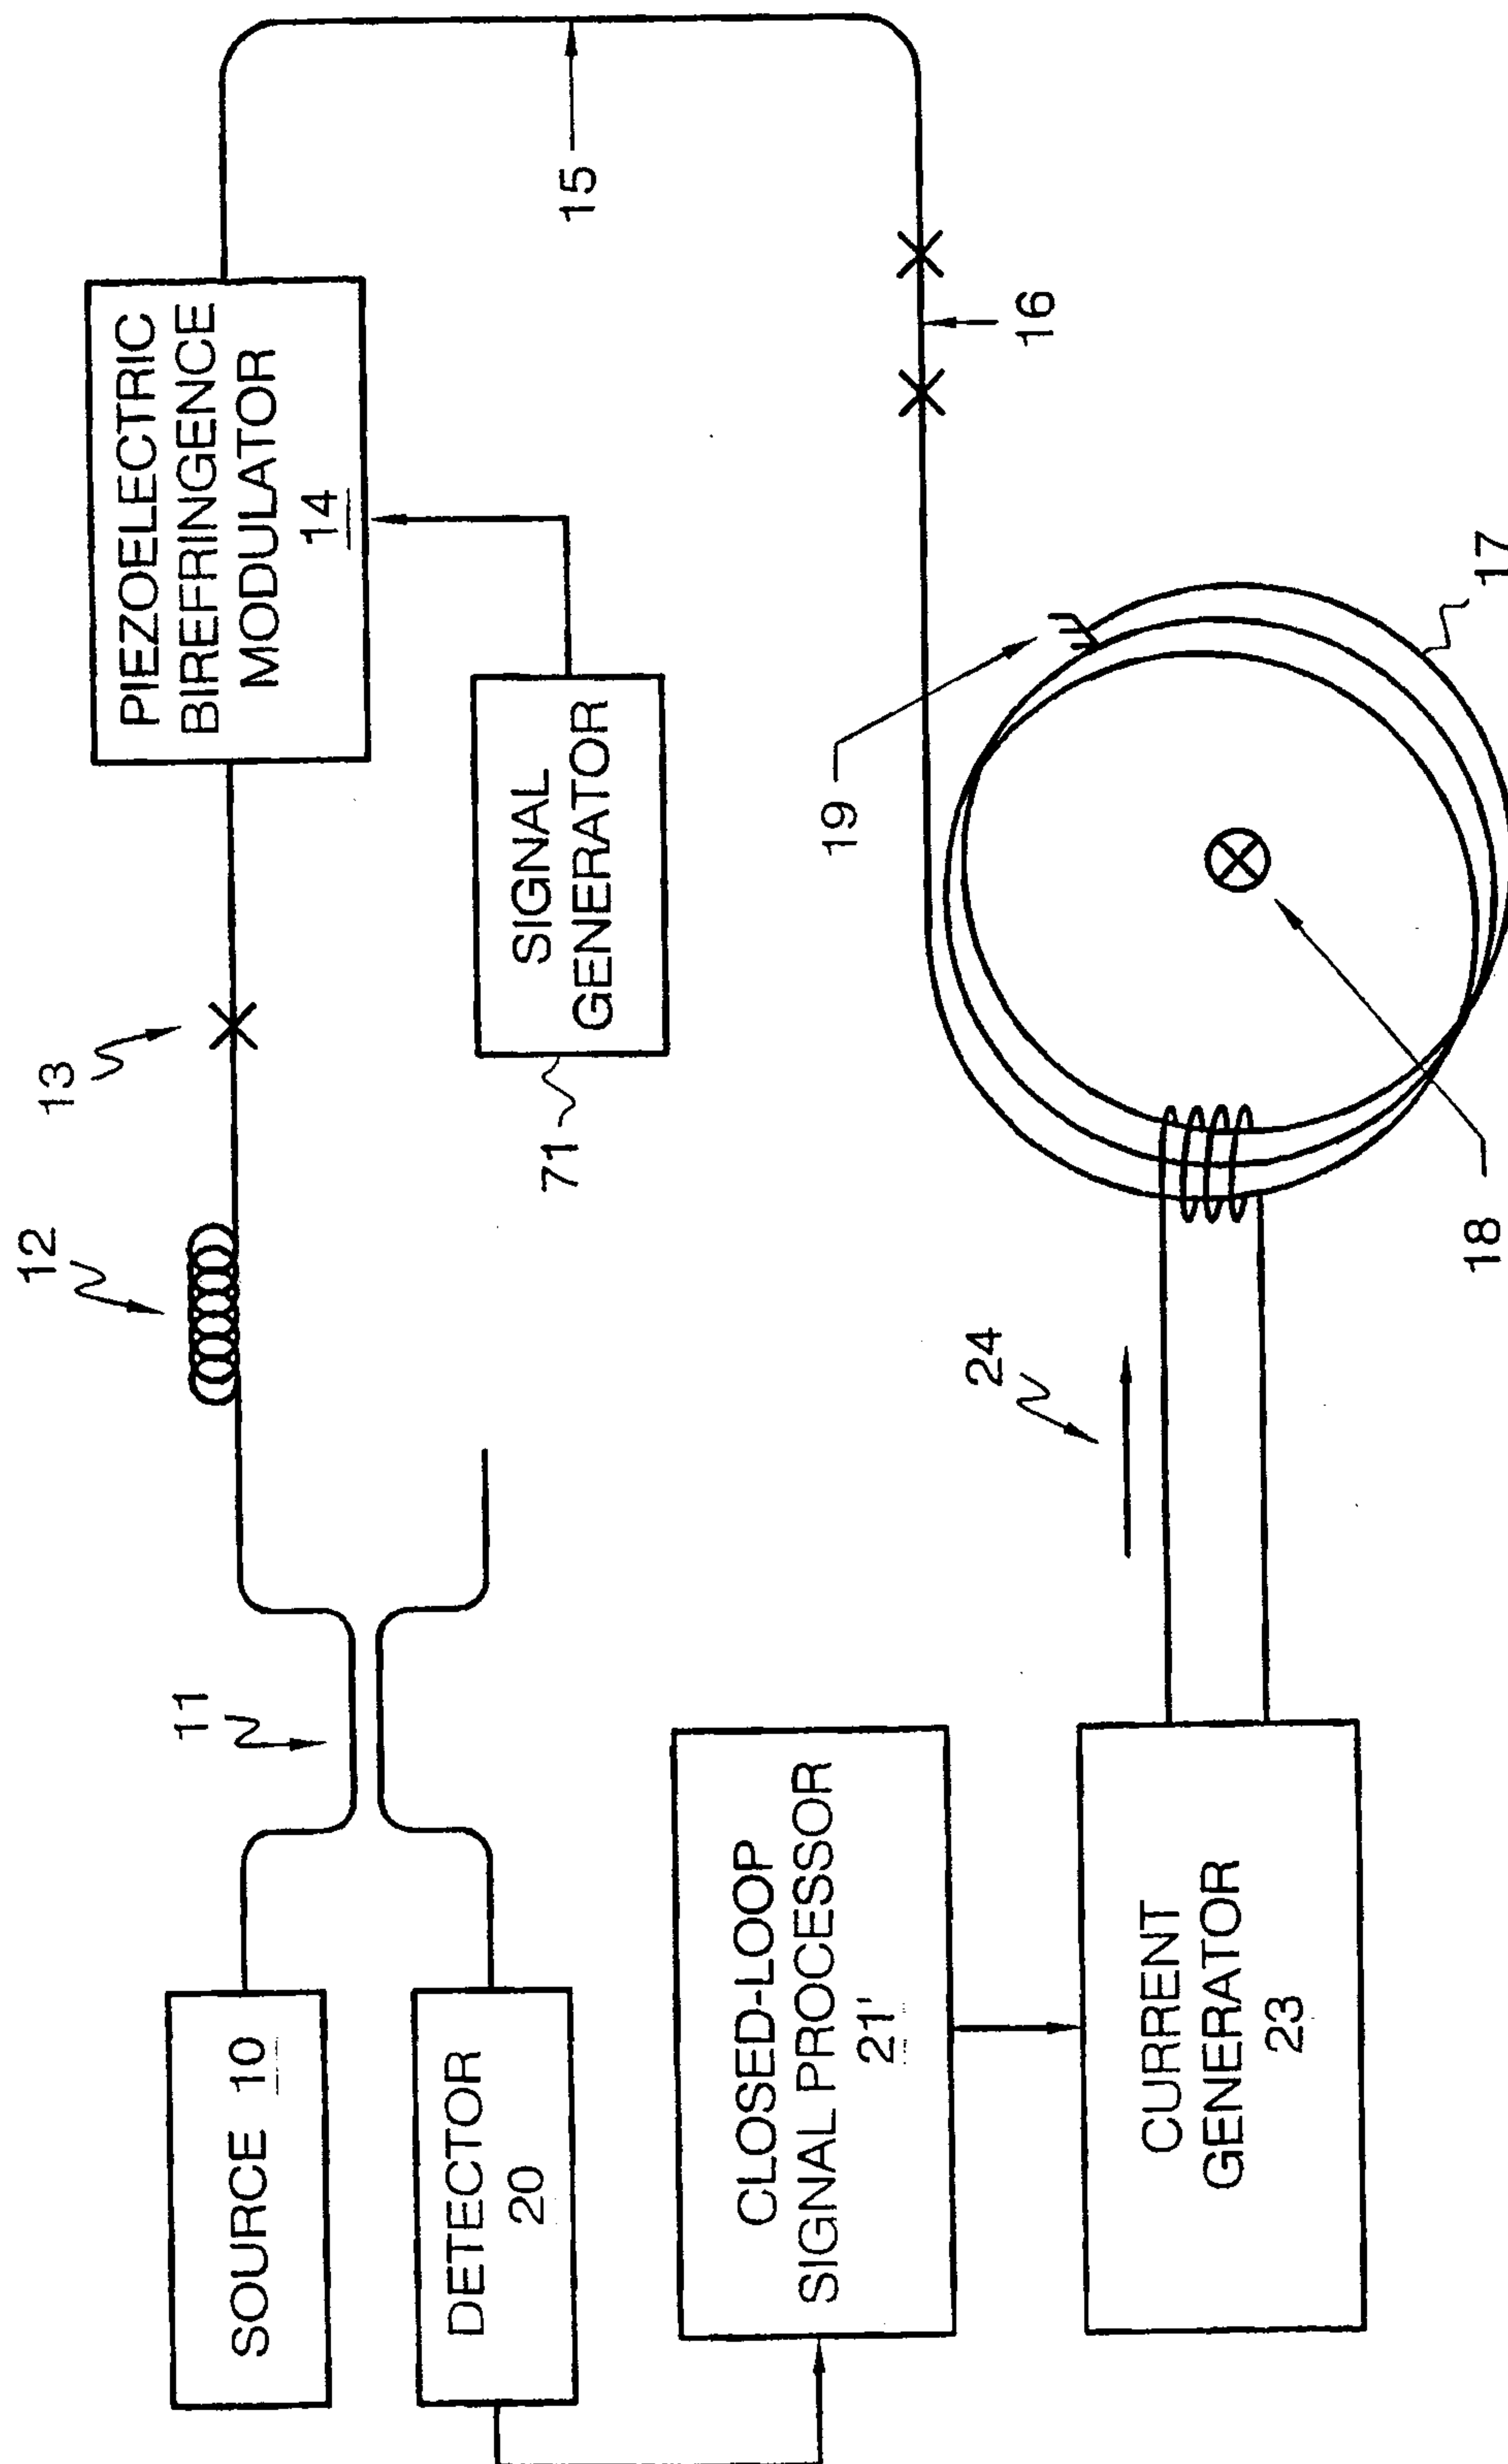
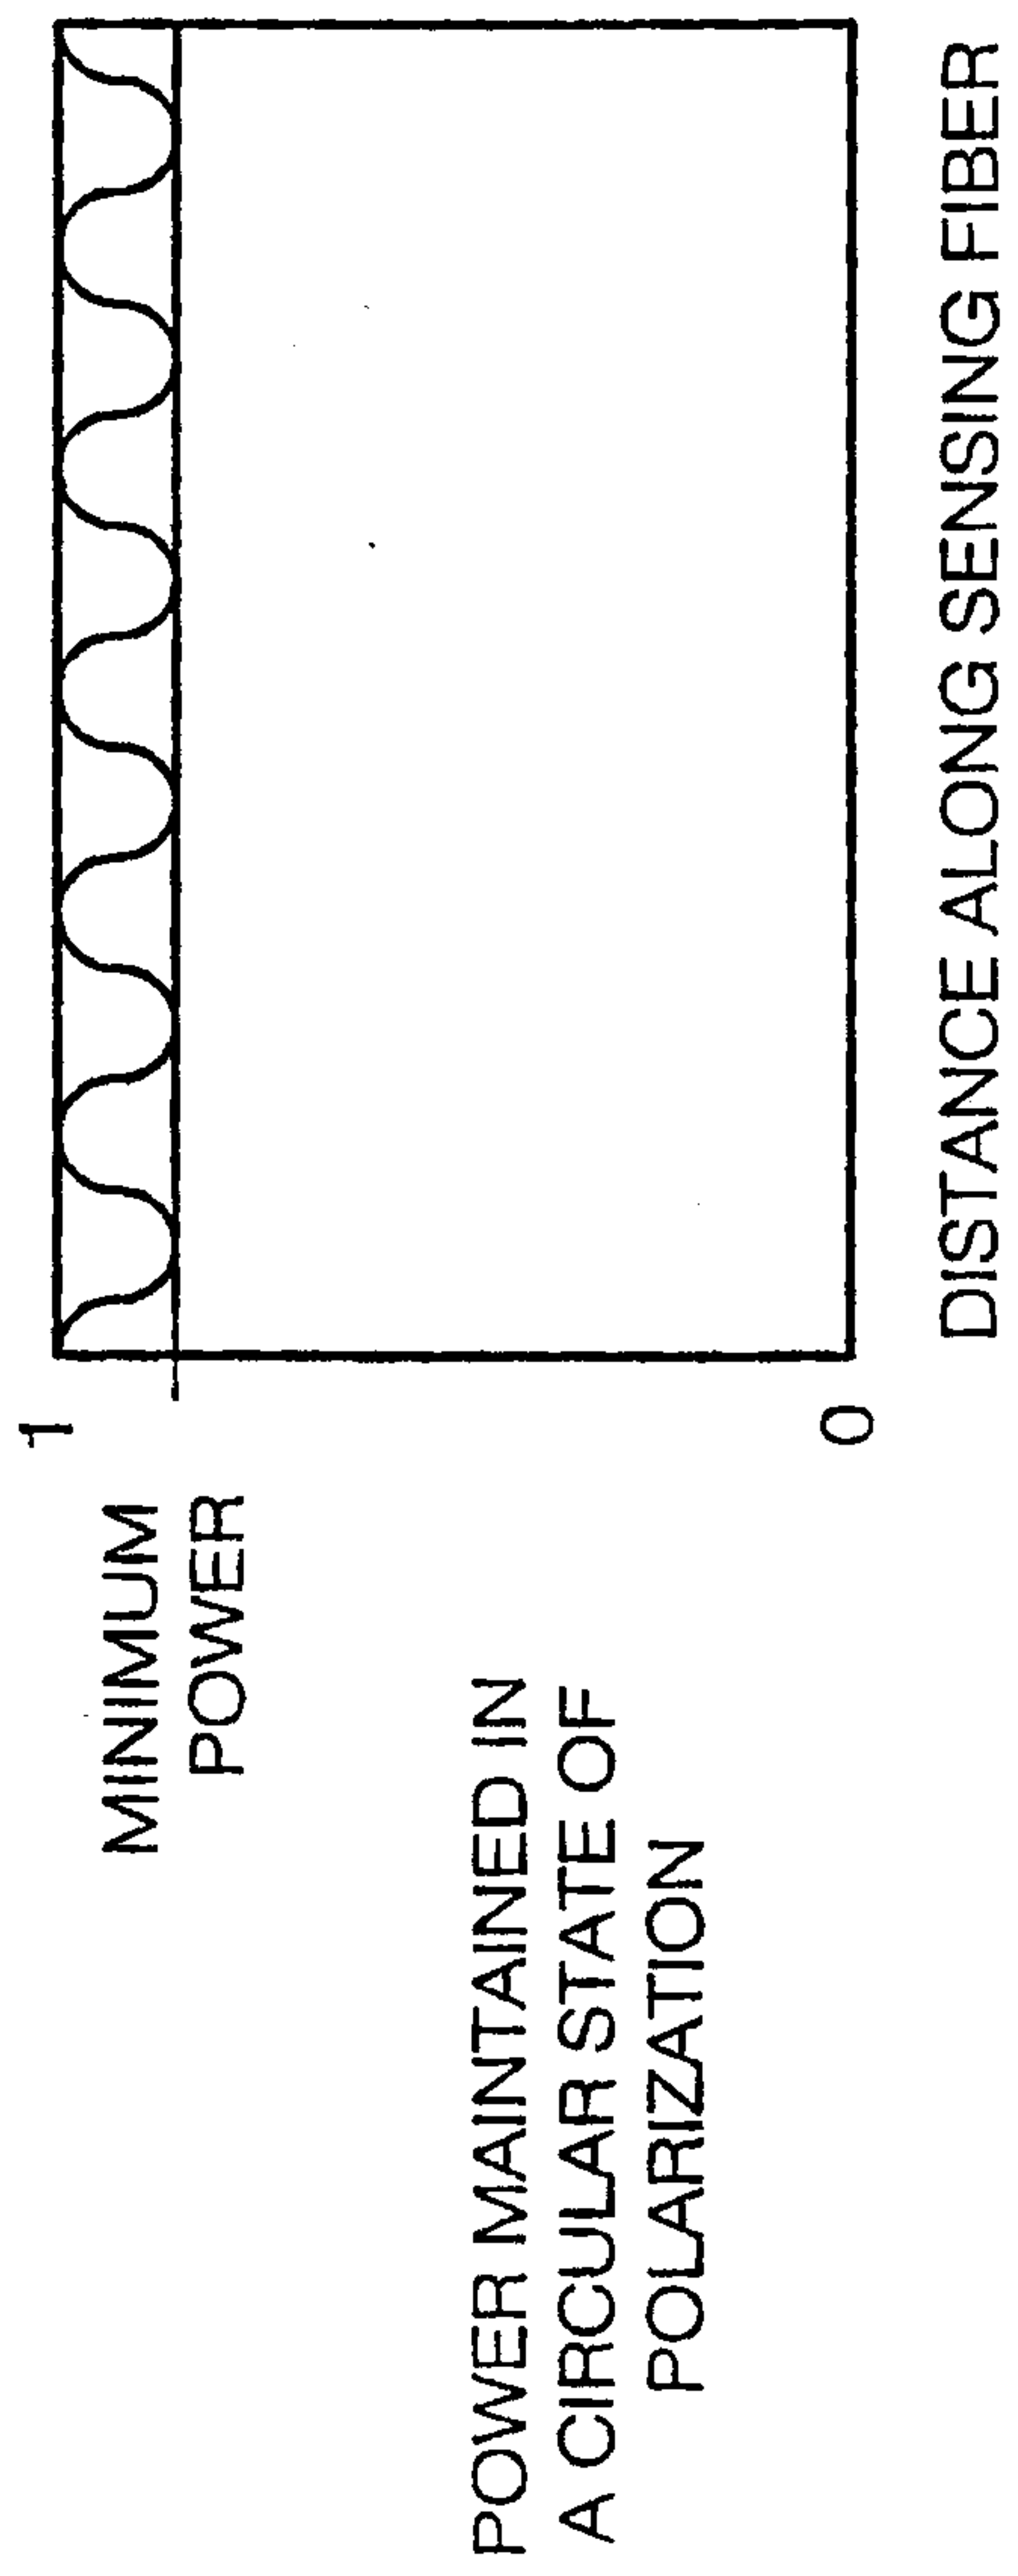


Fig. 1B

WO 00/26682

PCT/US99/23945

3/11

*Fig. 2*

4/11

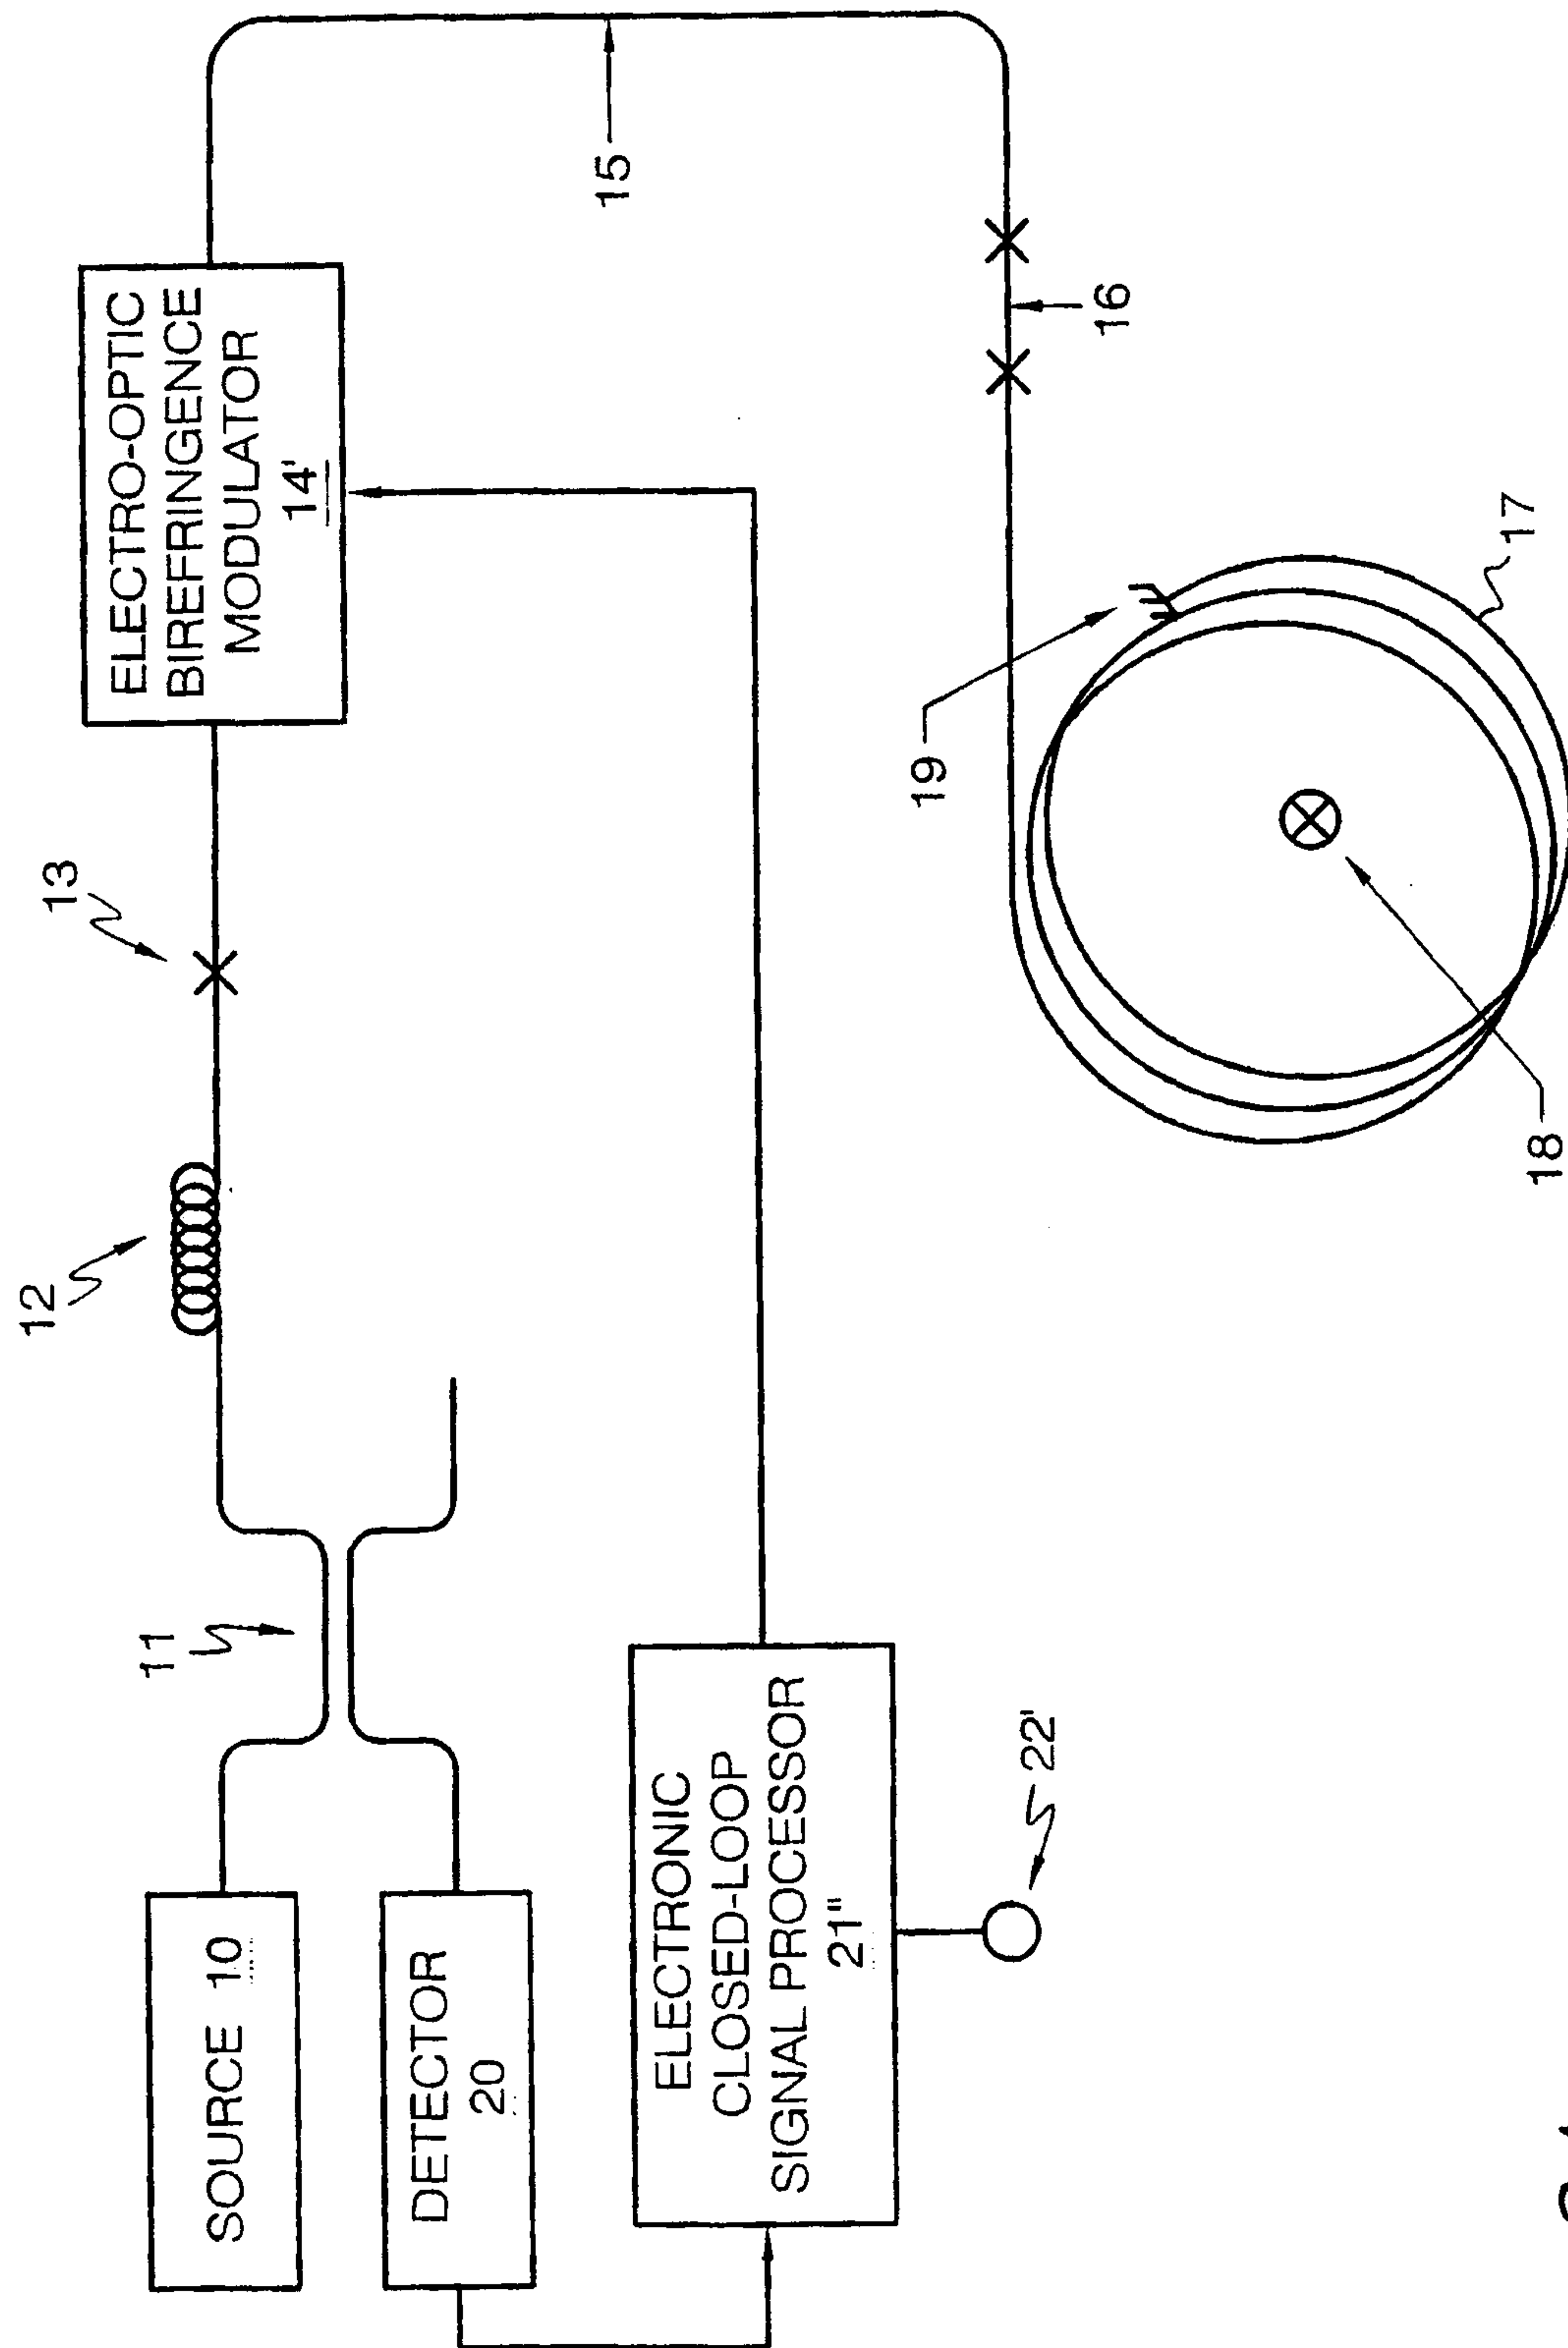


Fig. 3A

5/11

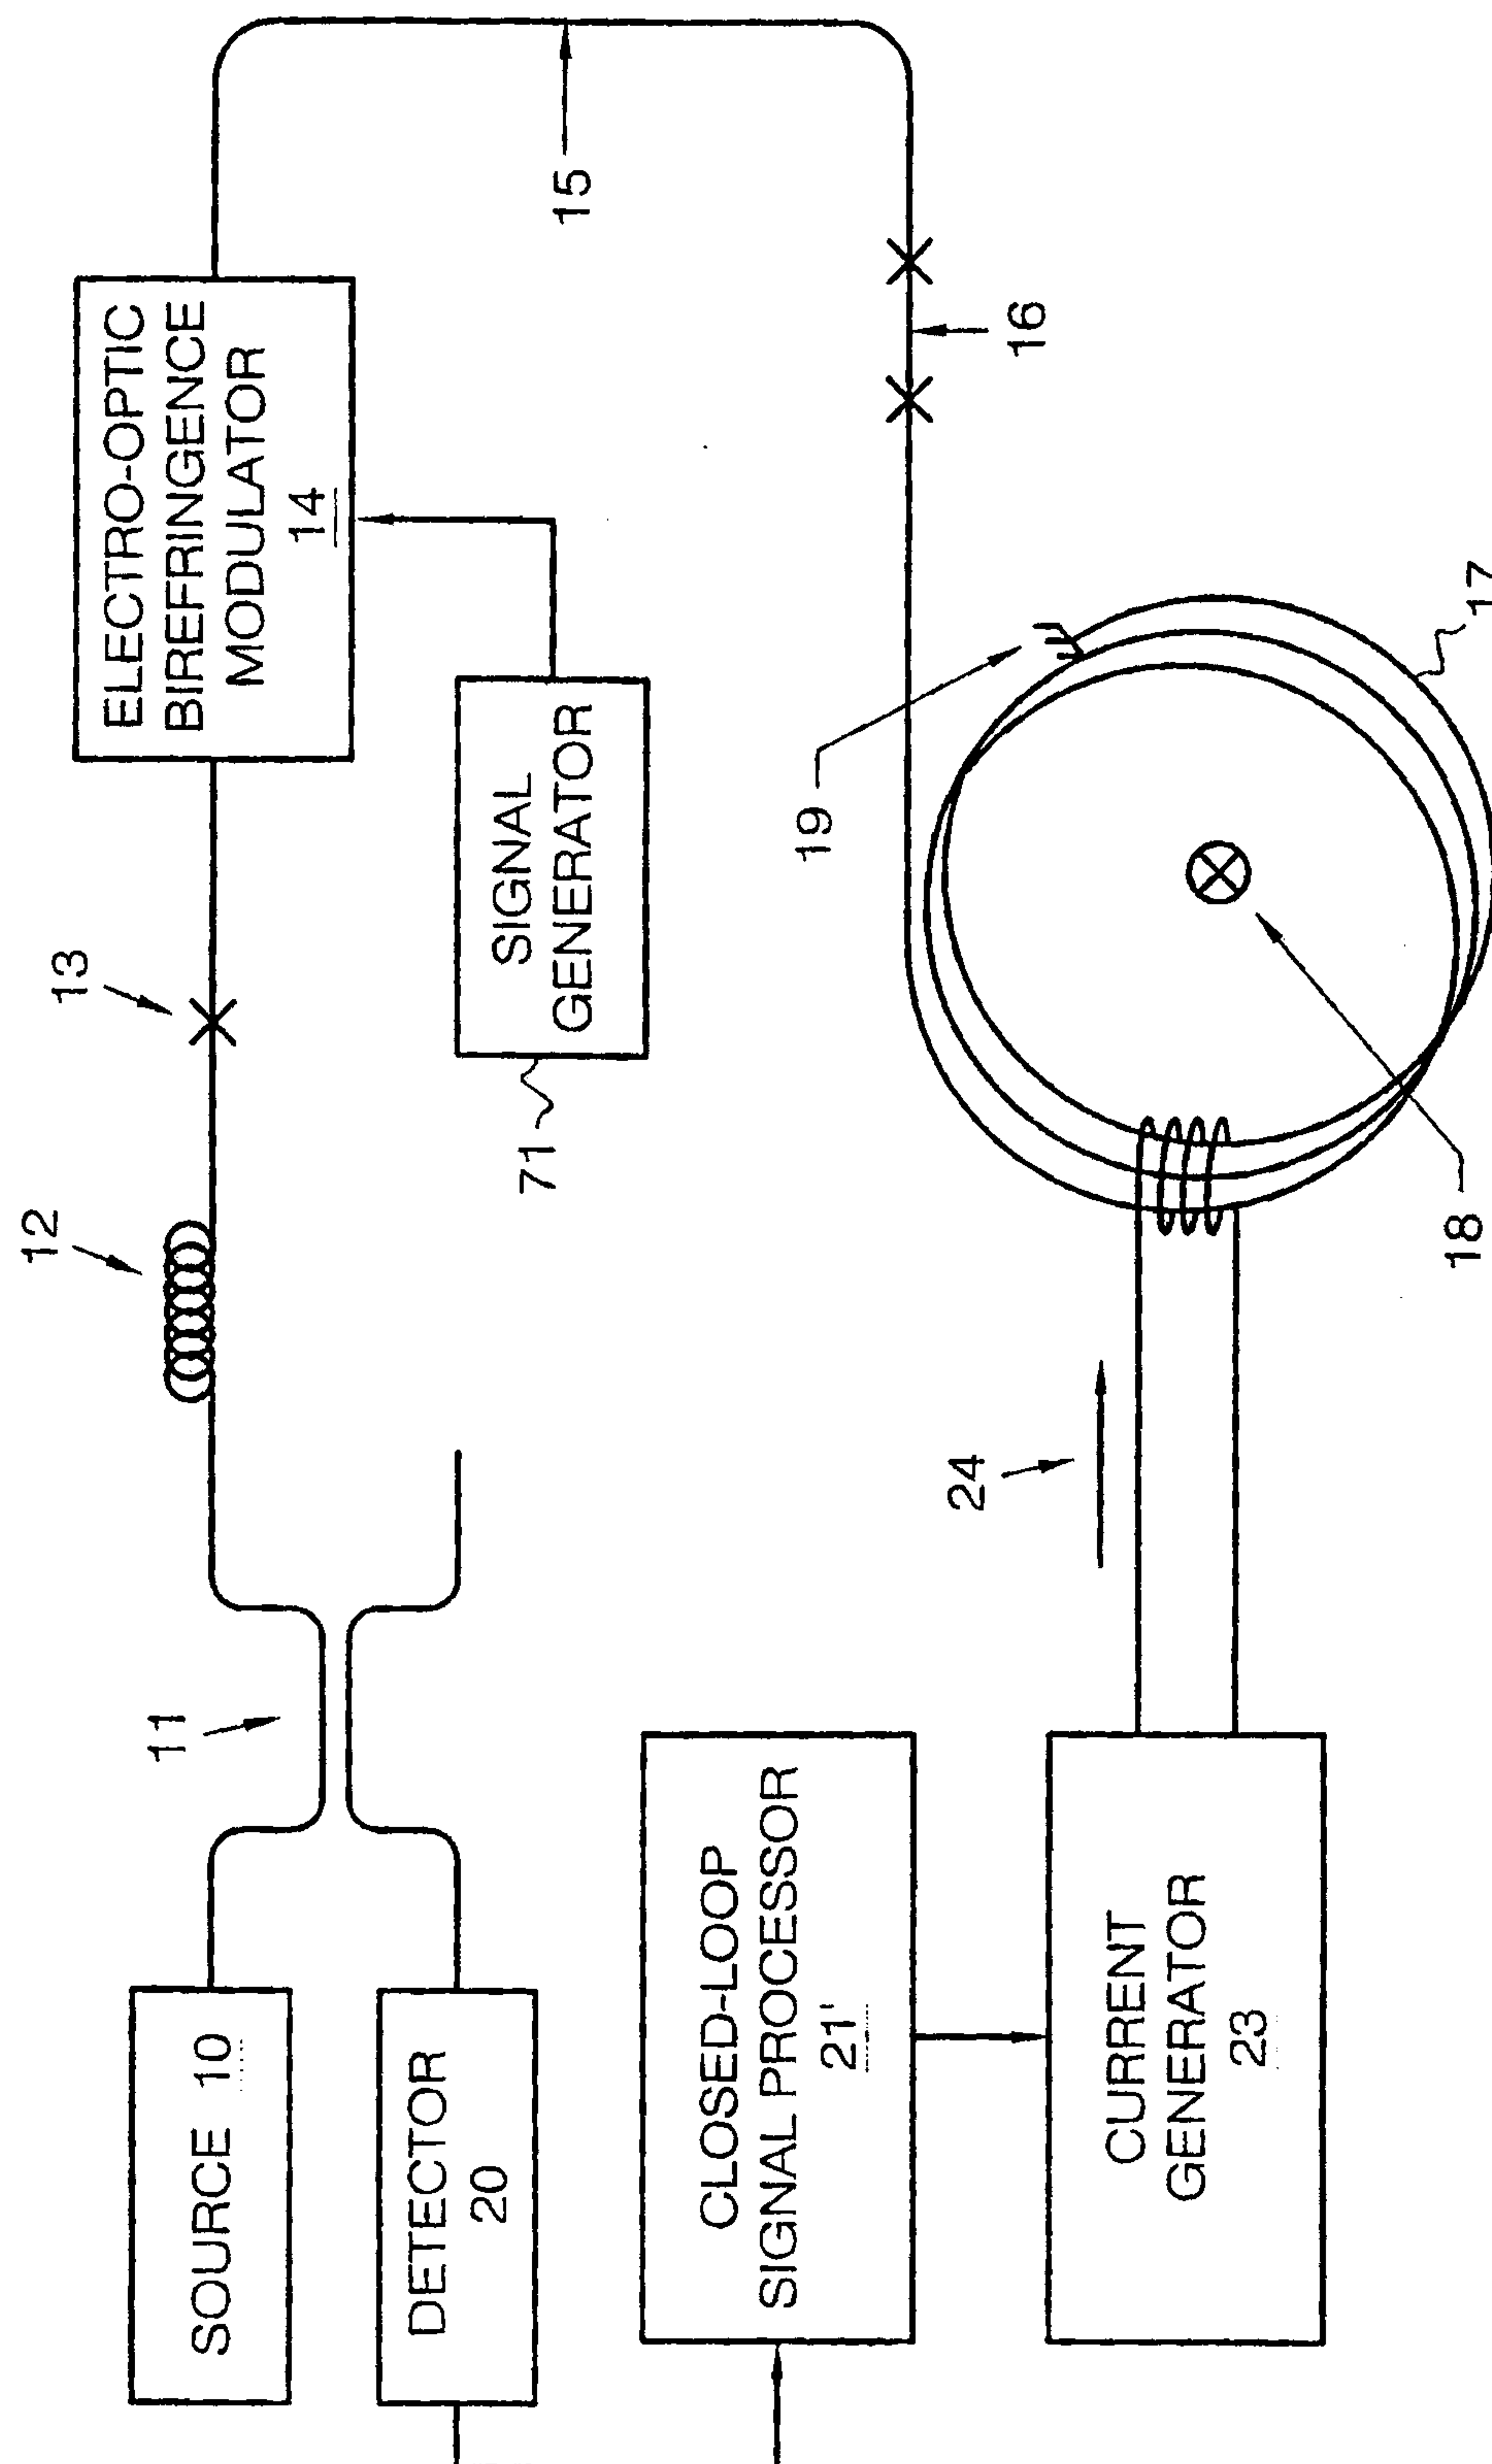


Fig. 3B

6/11

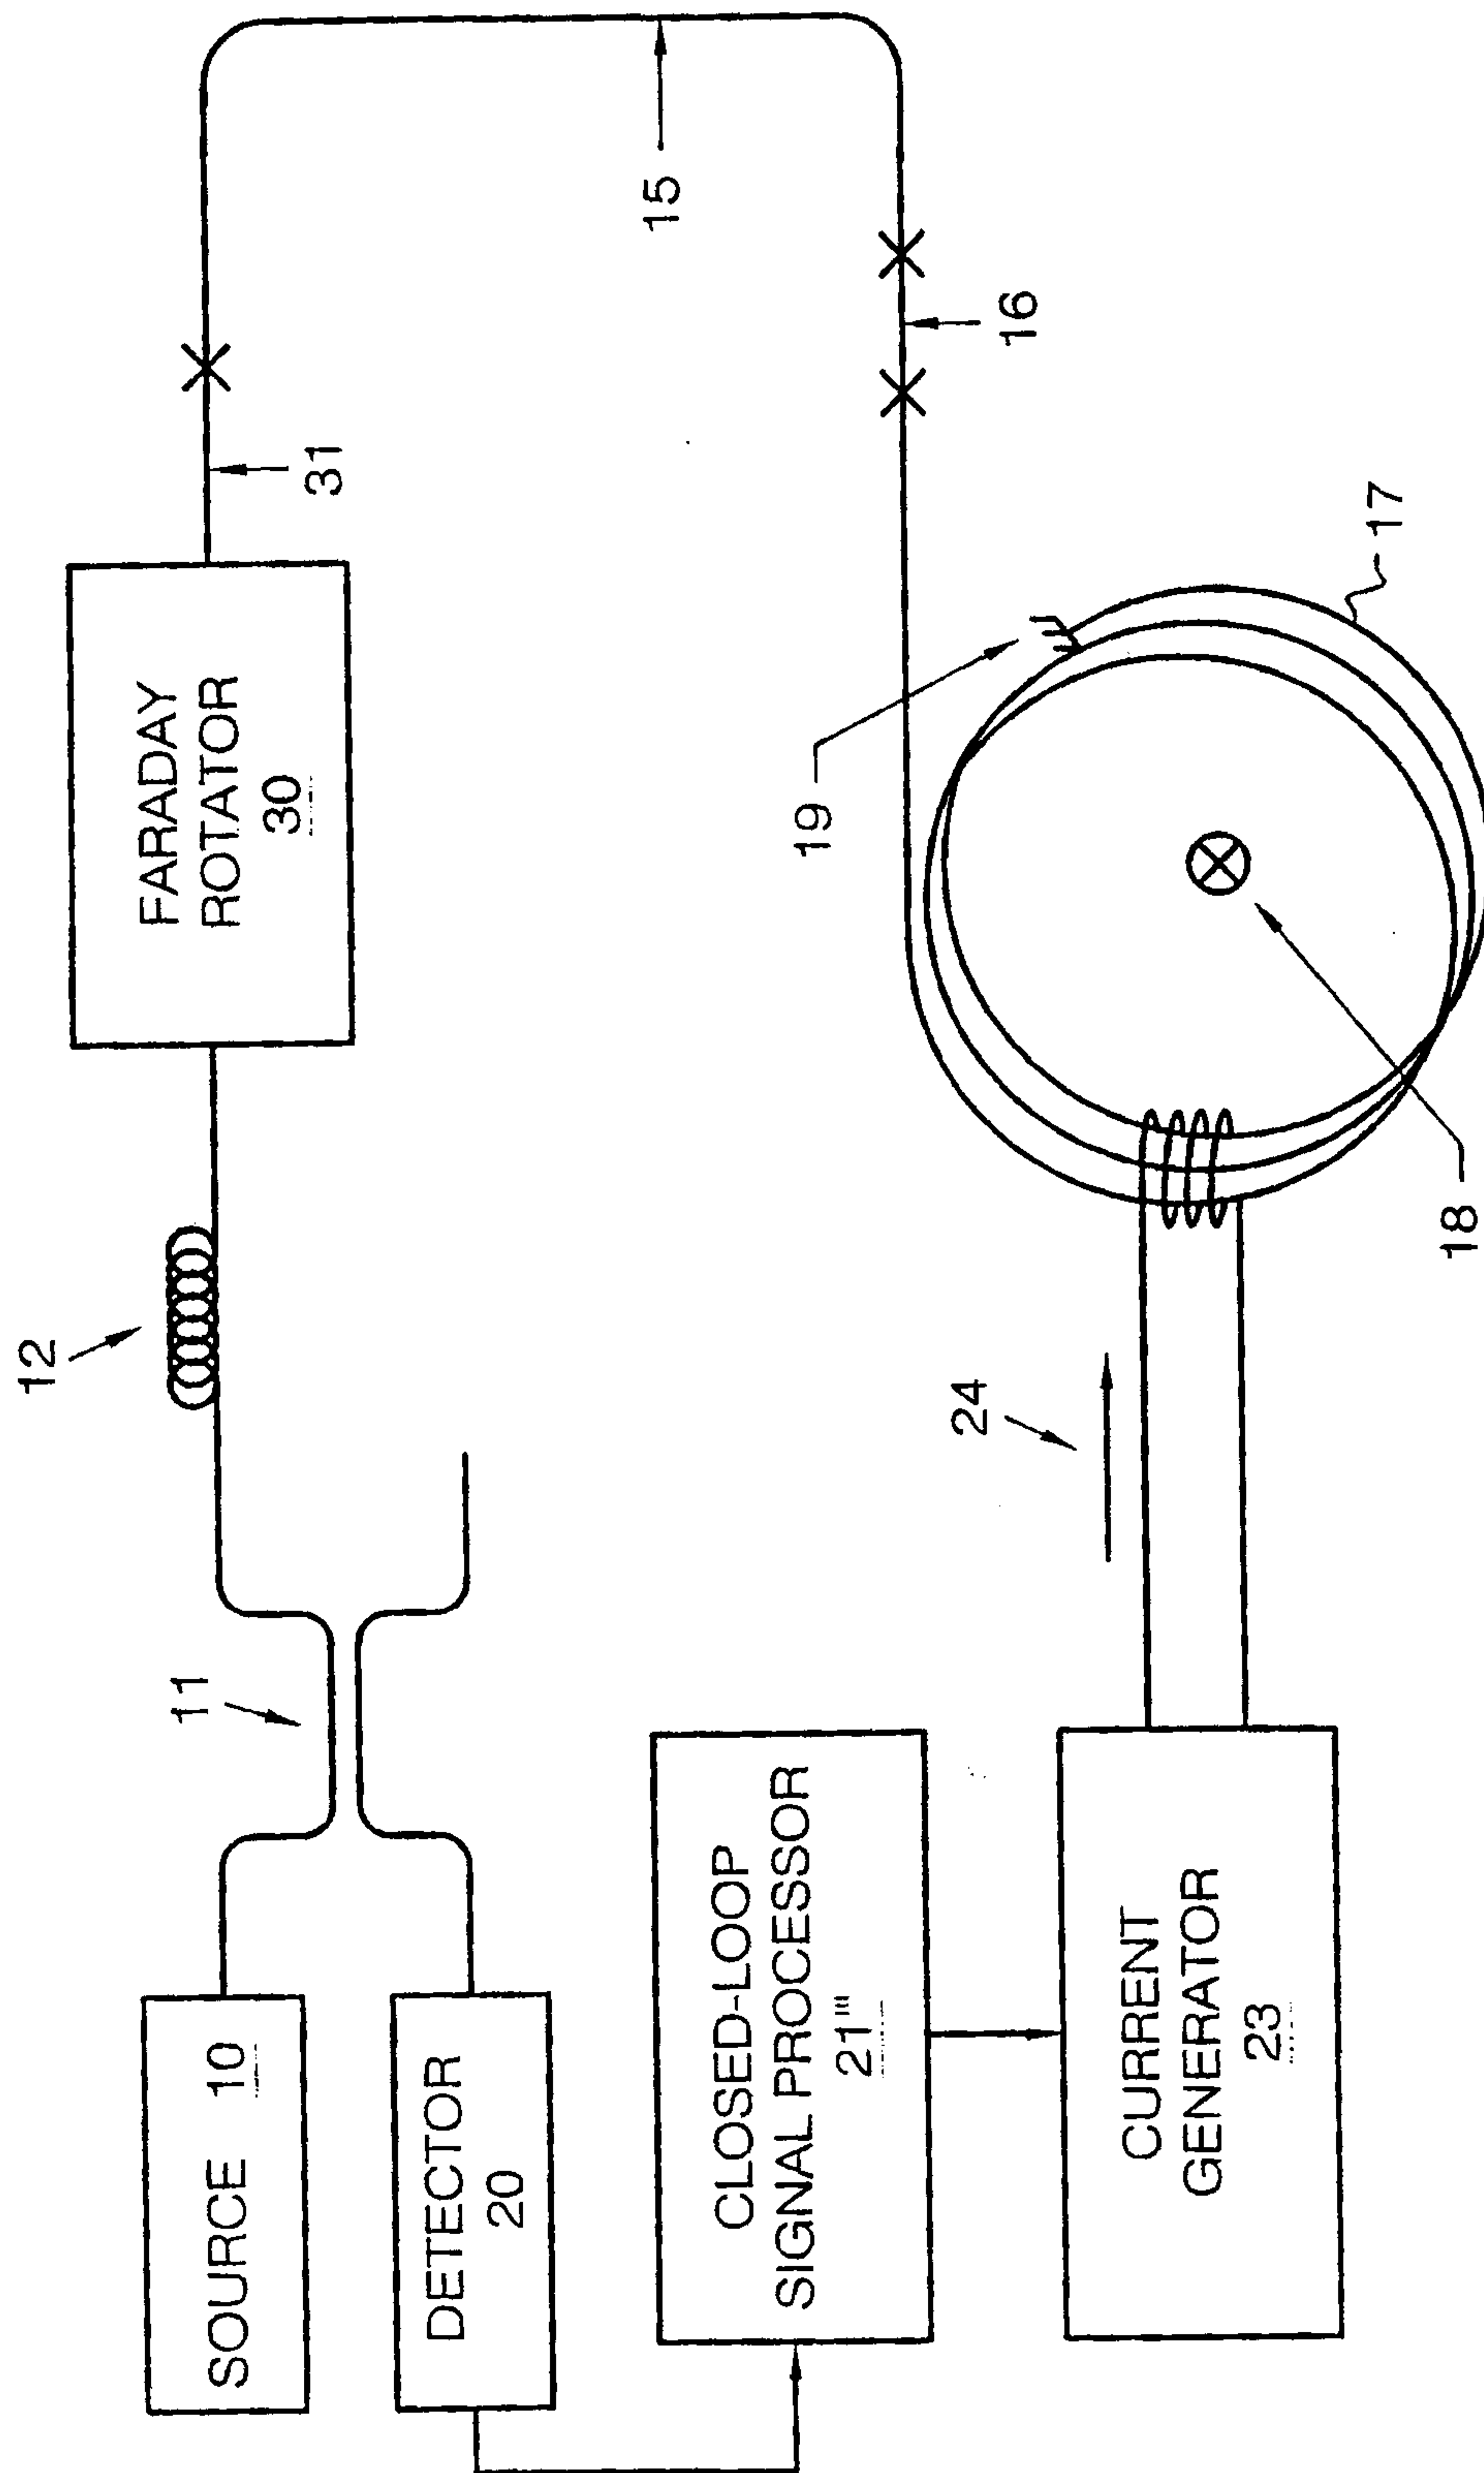


Fig. 4

7/11

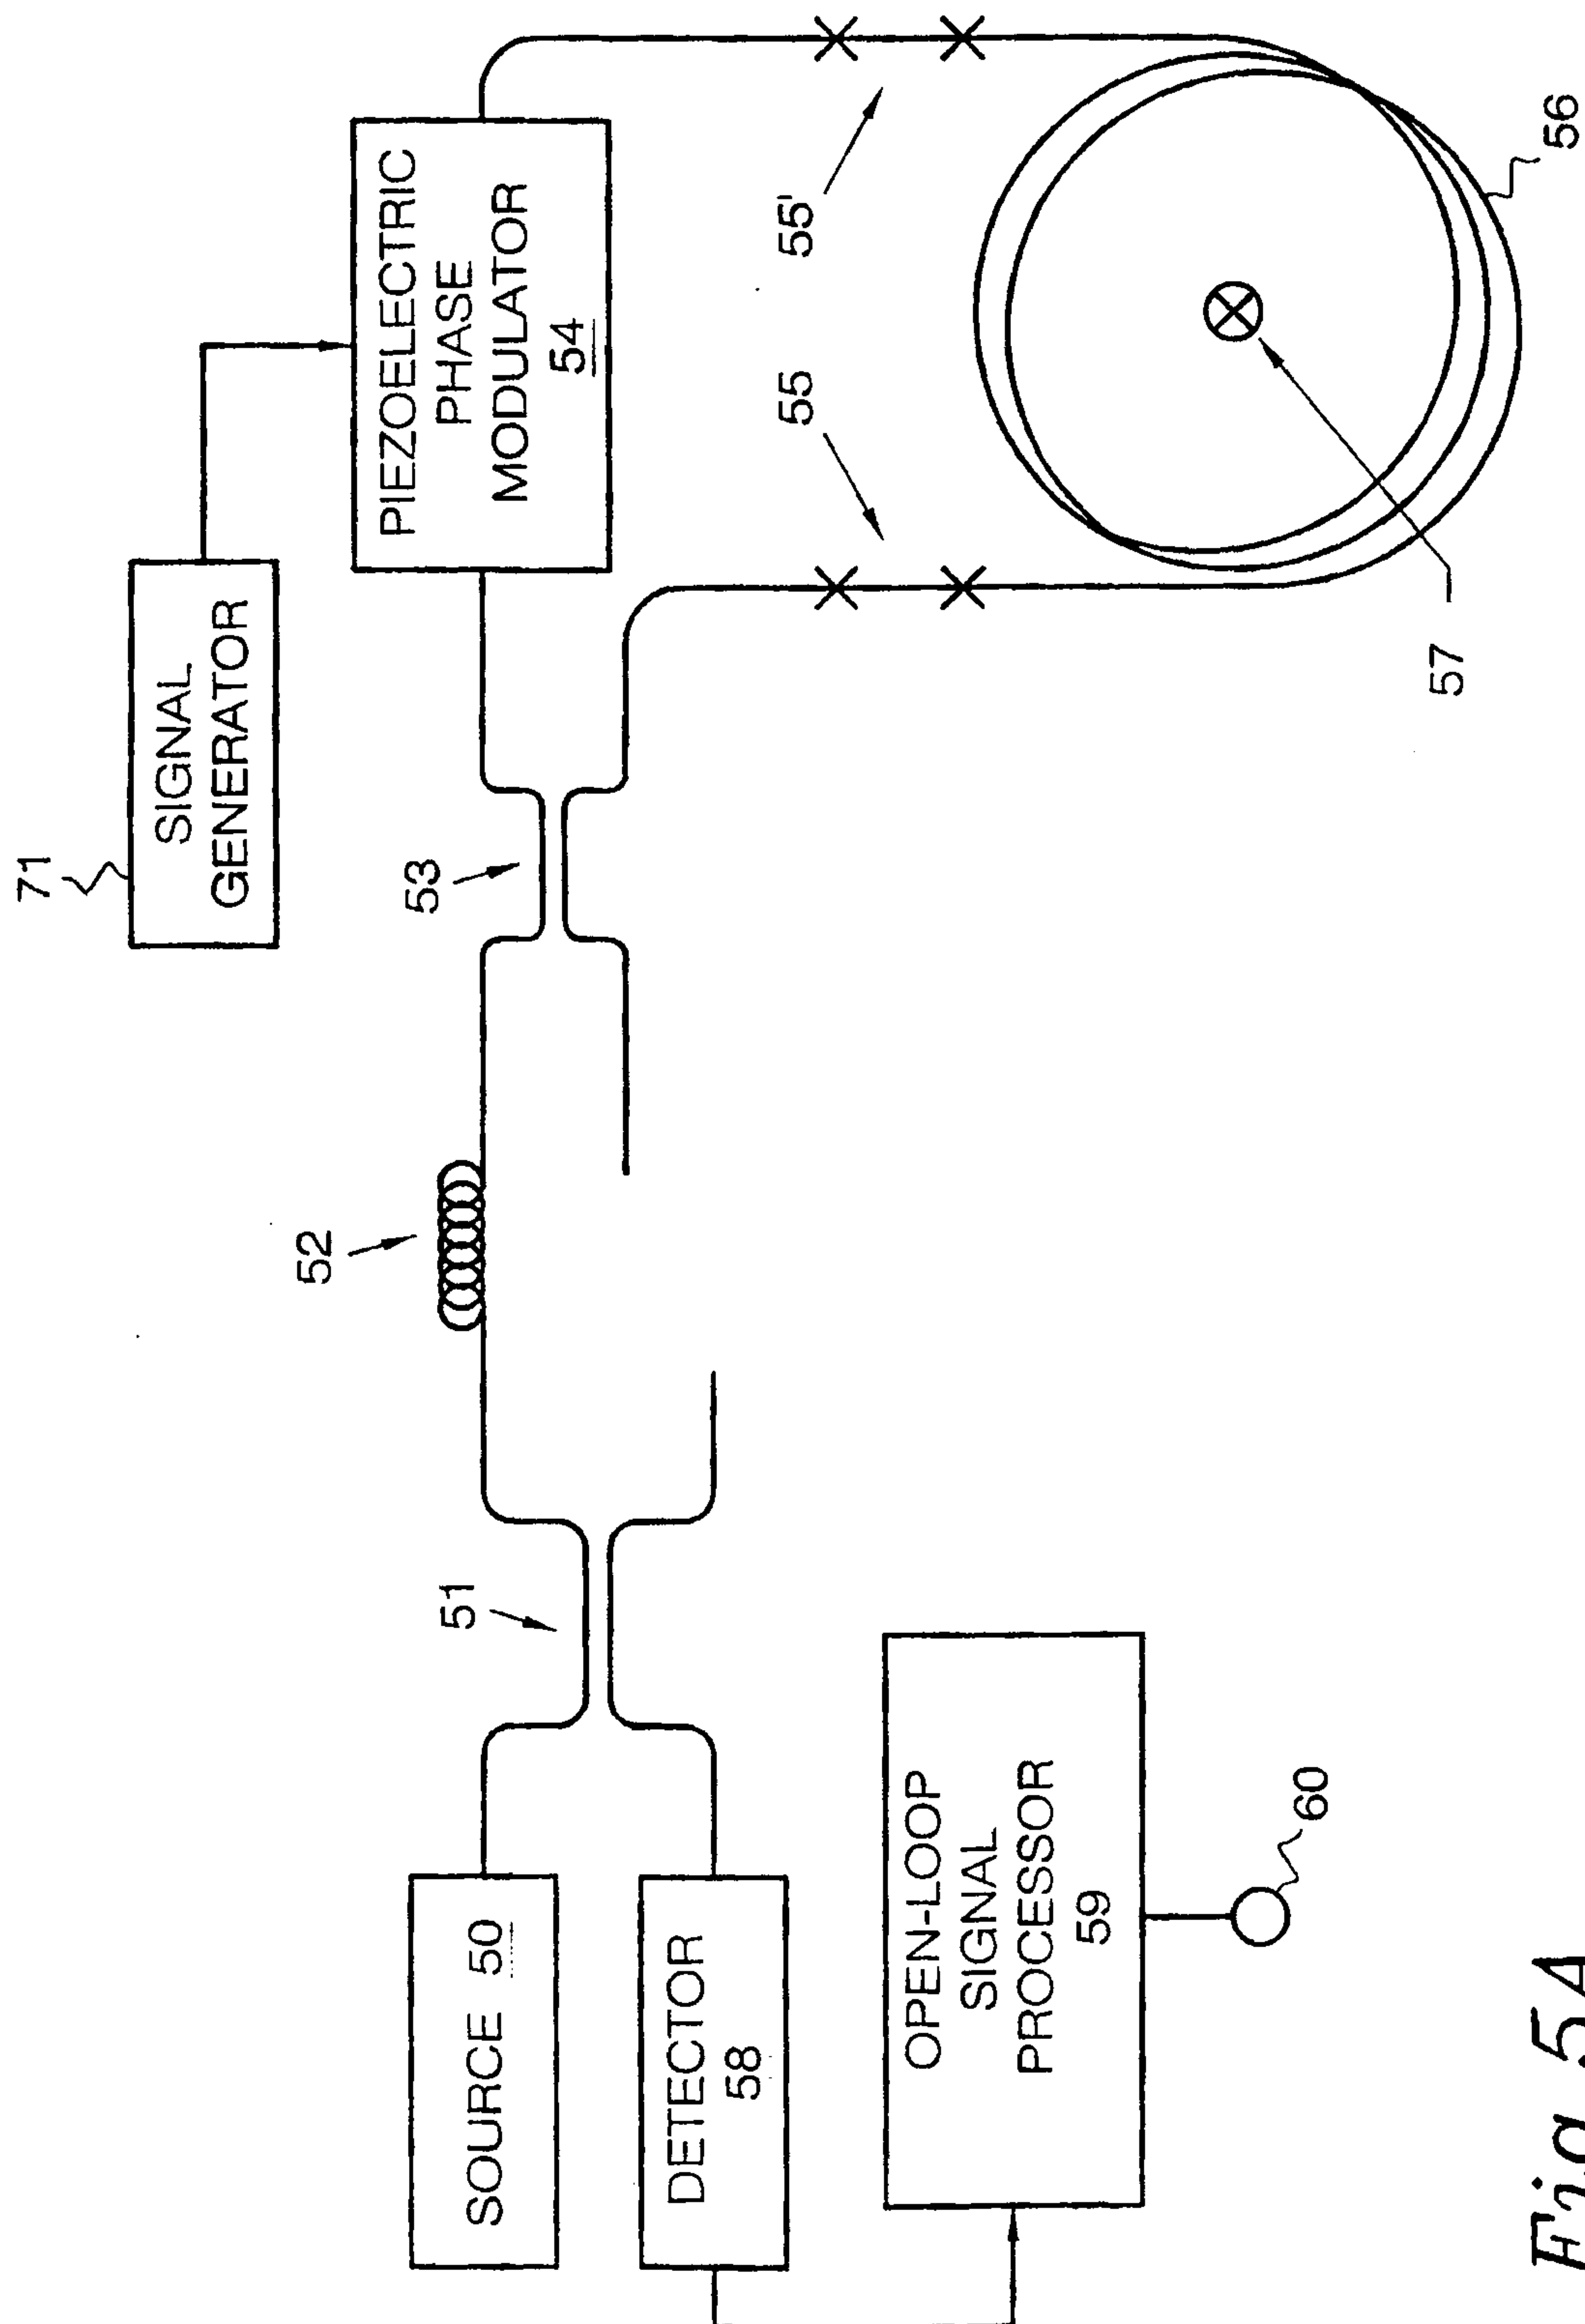


Fig. 5A

8/11

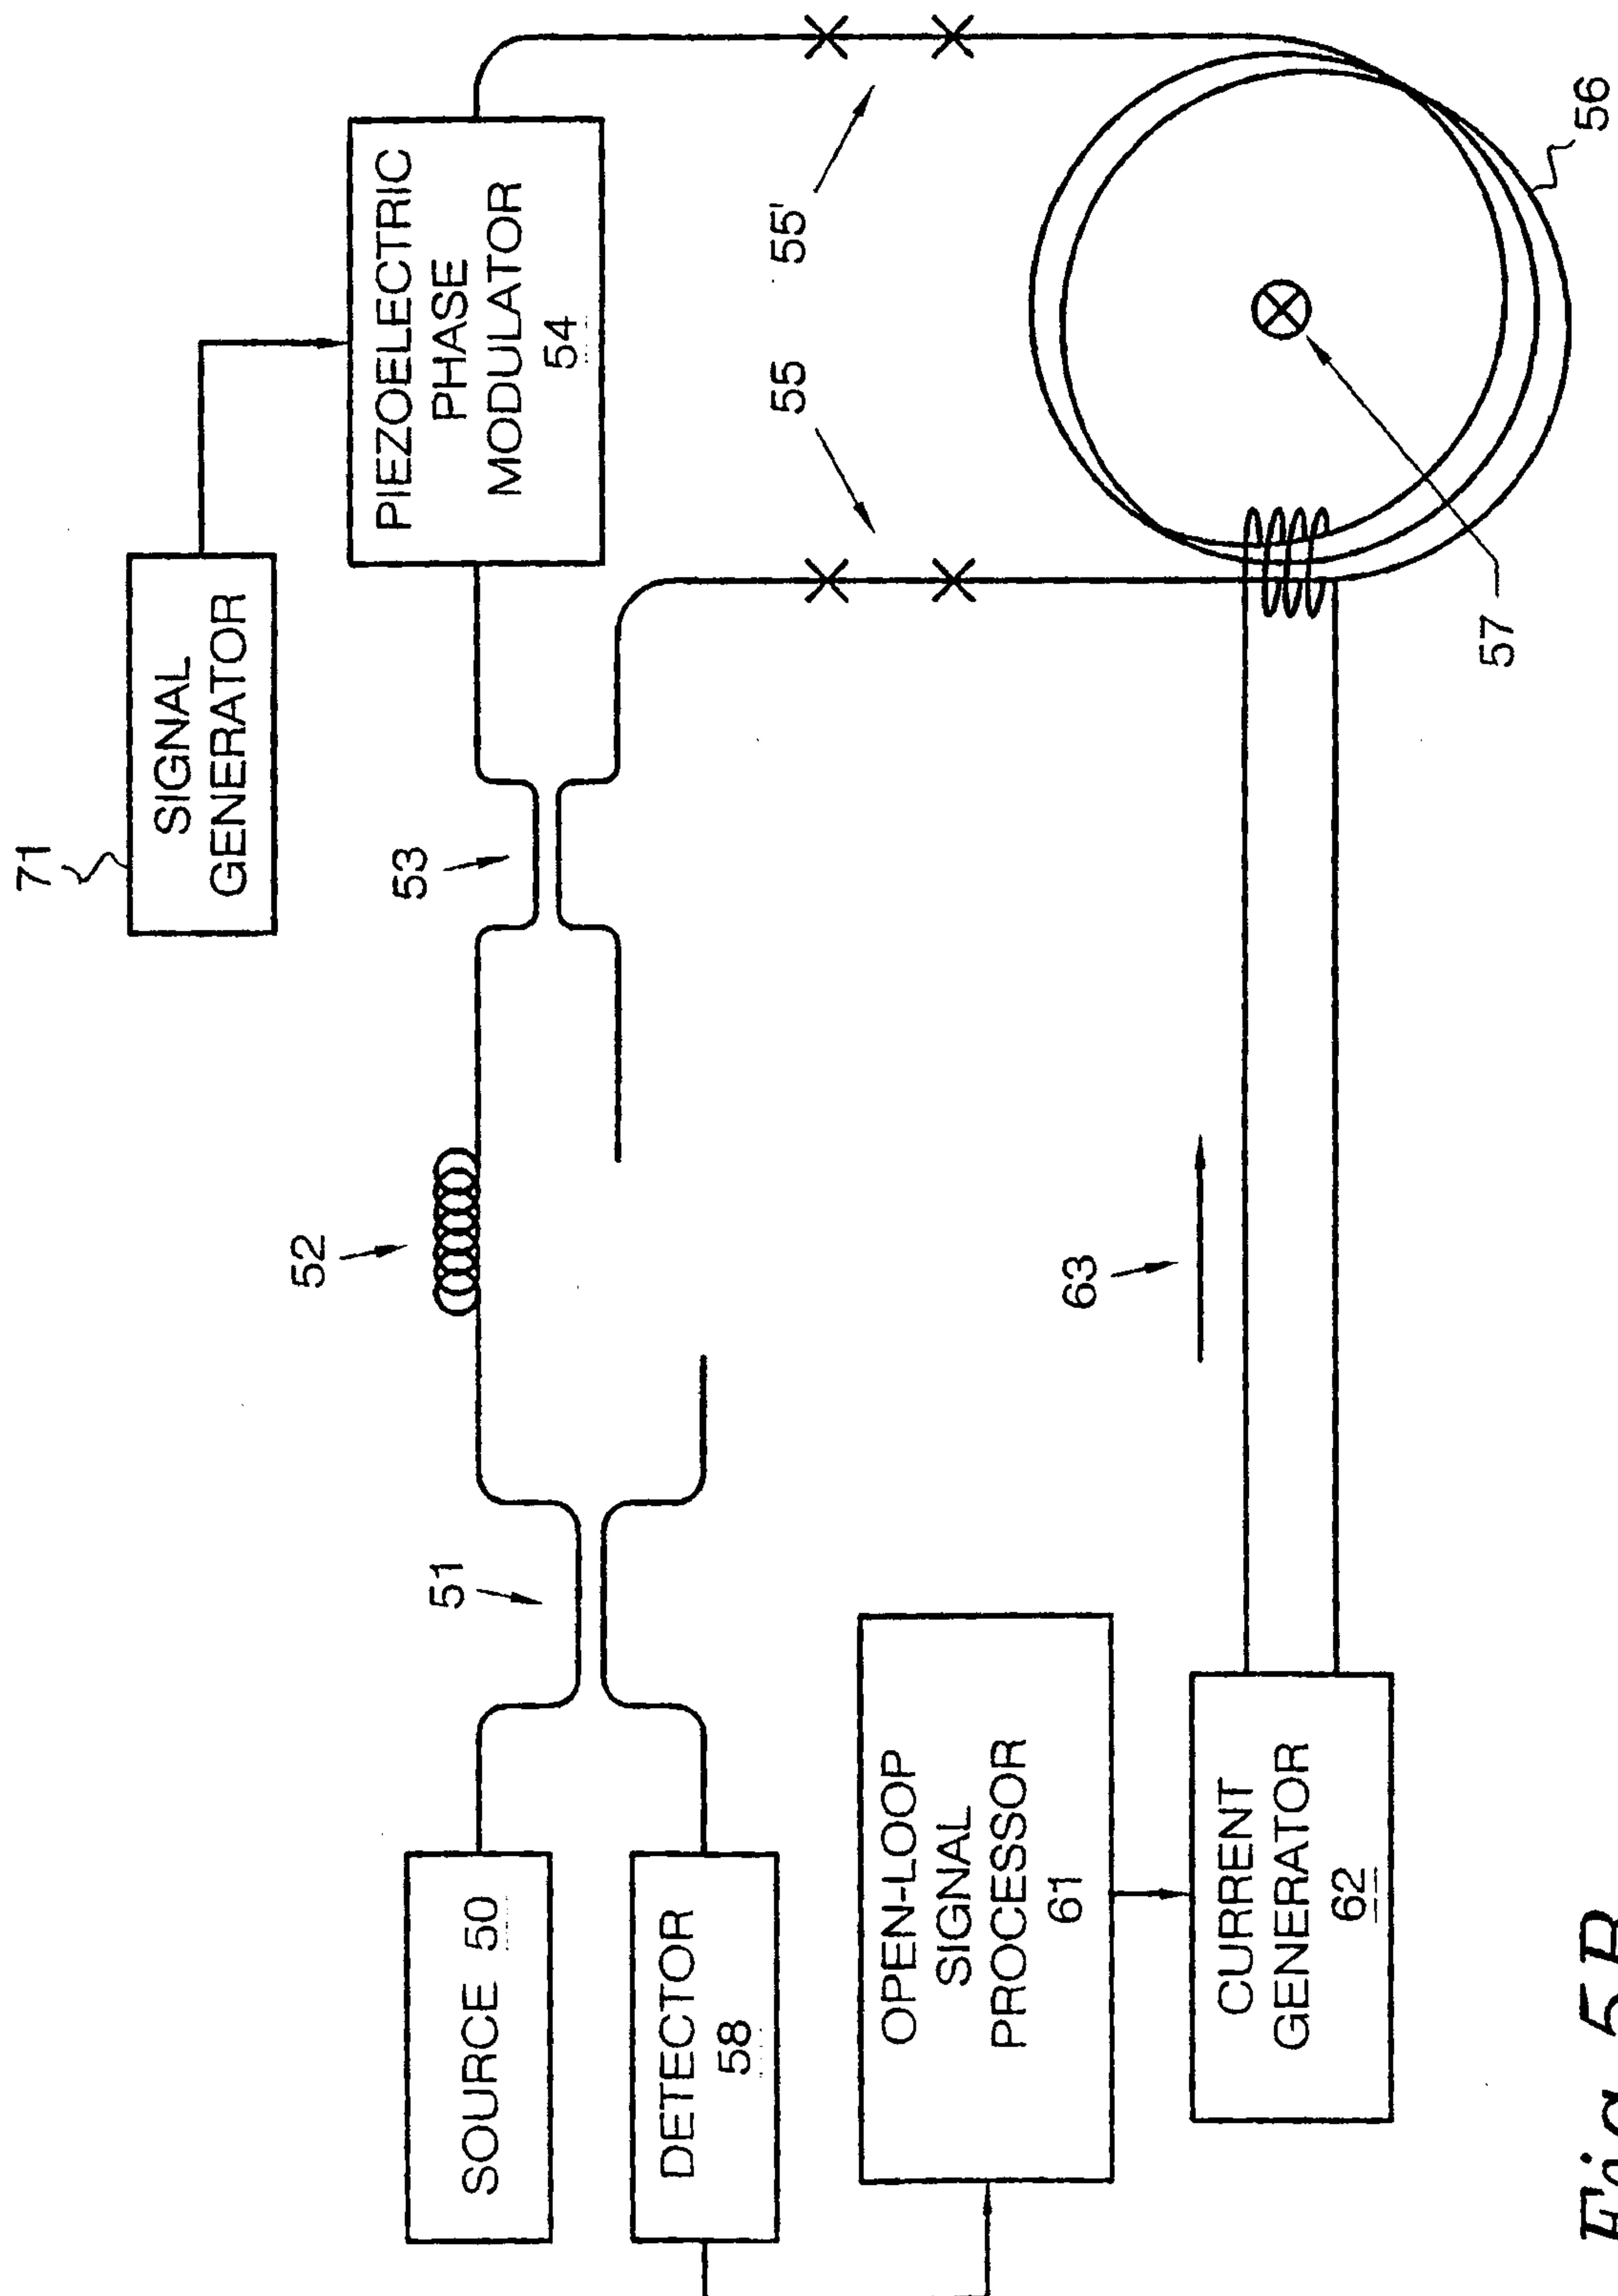


Fig. 5B

9/11

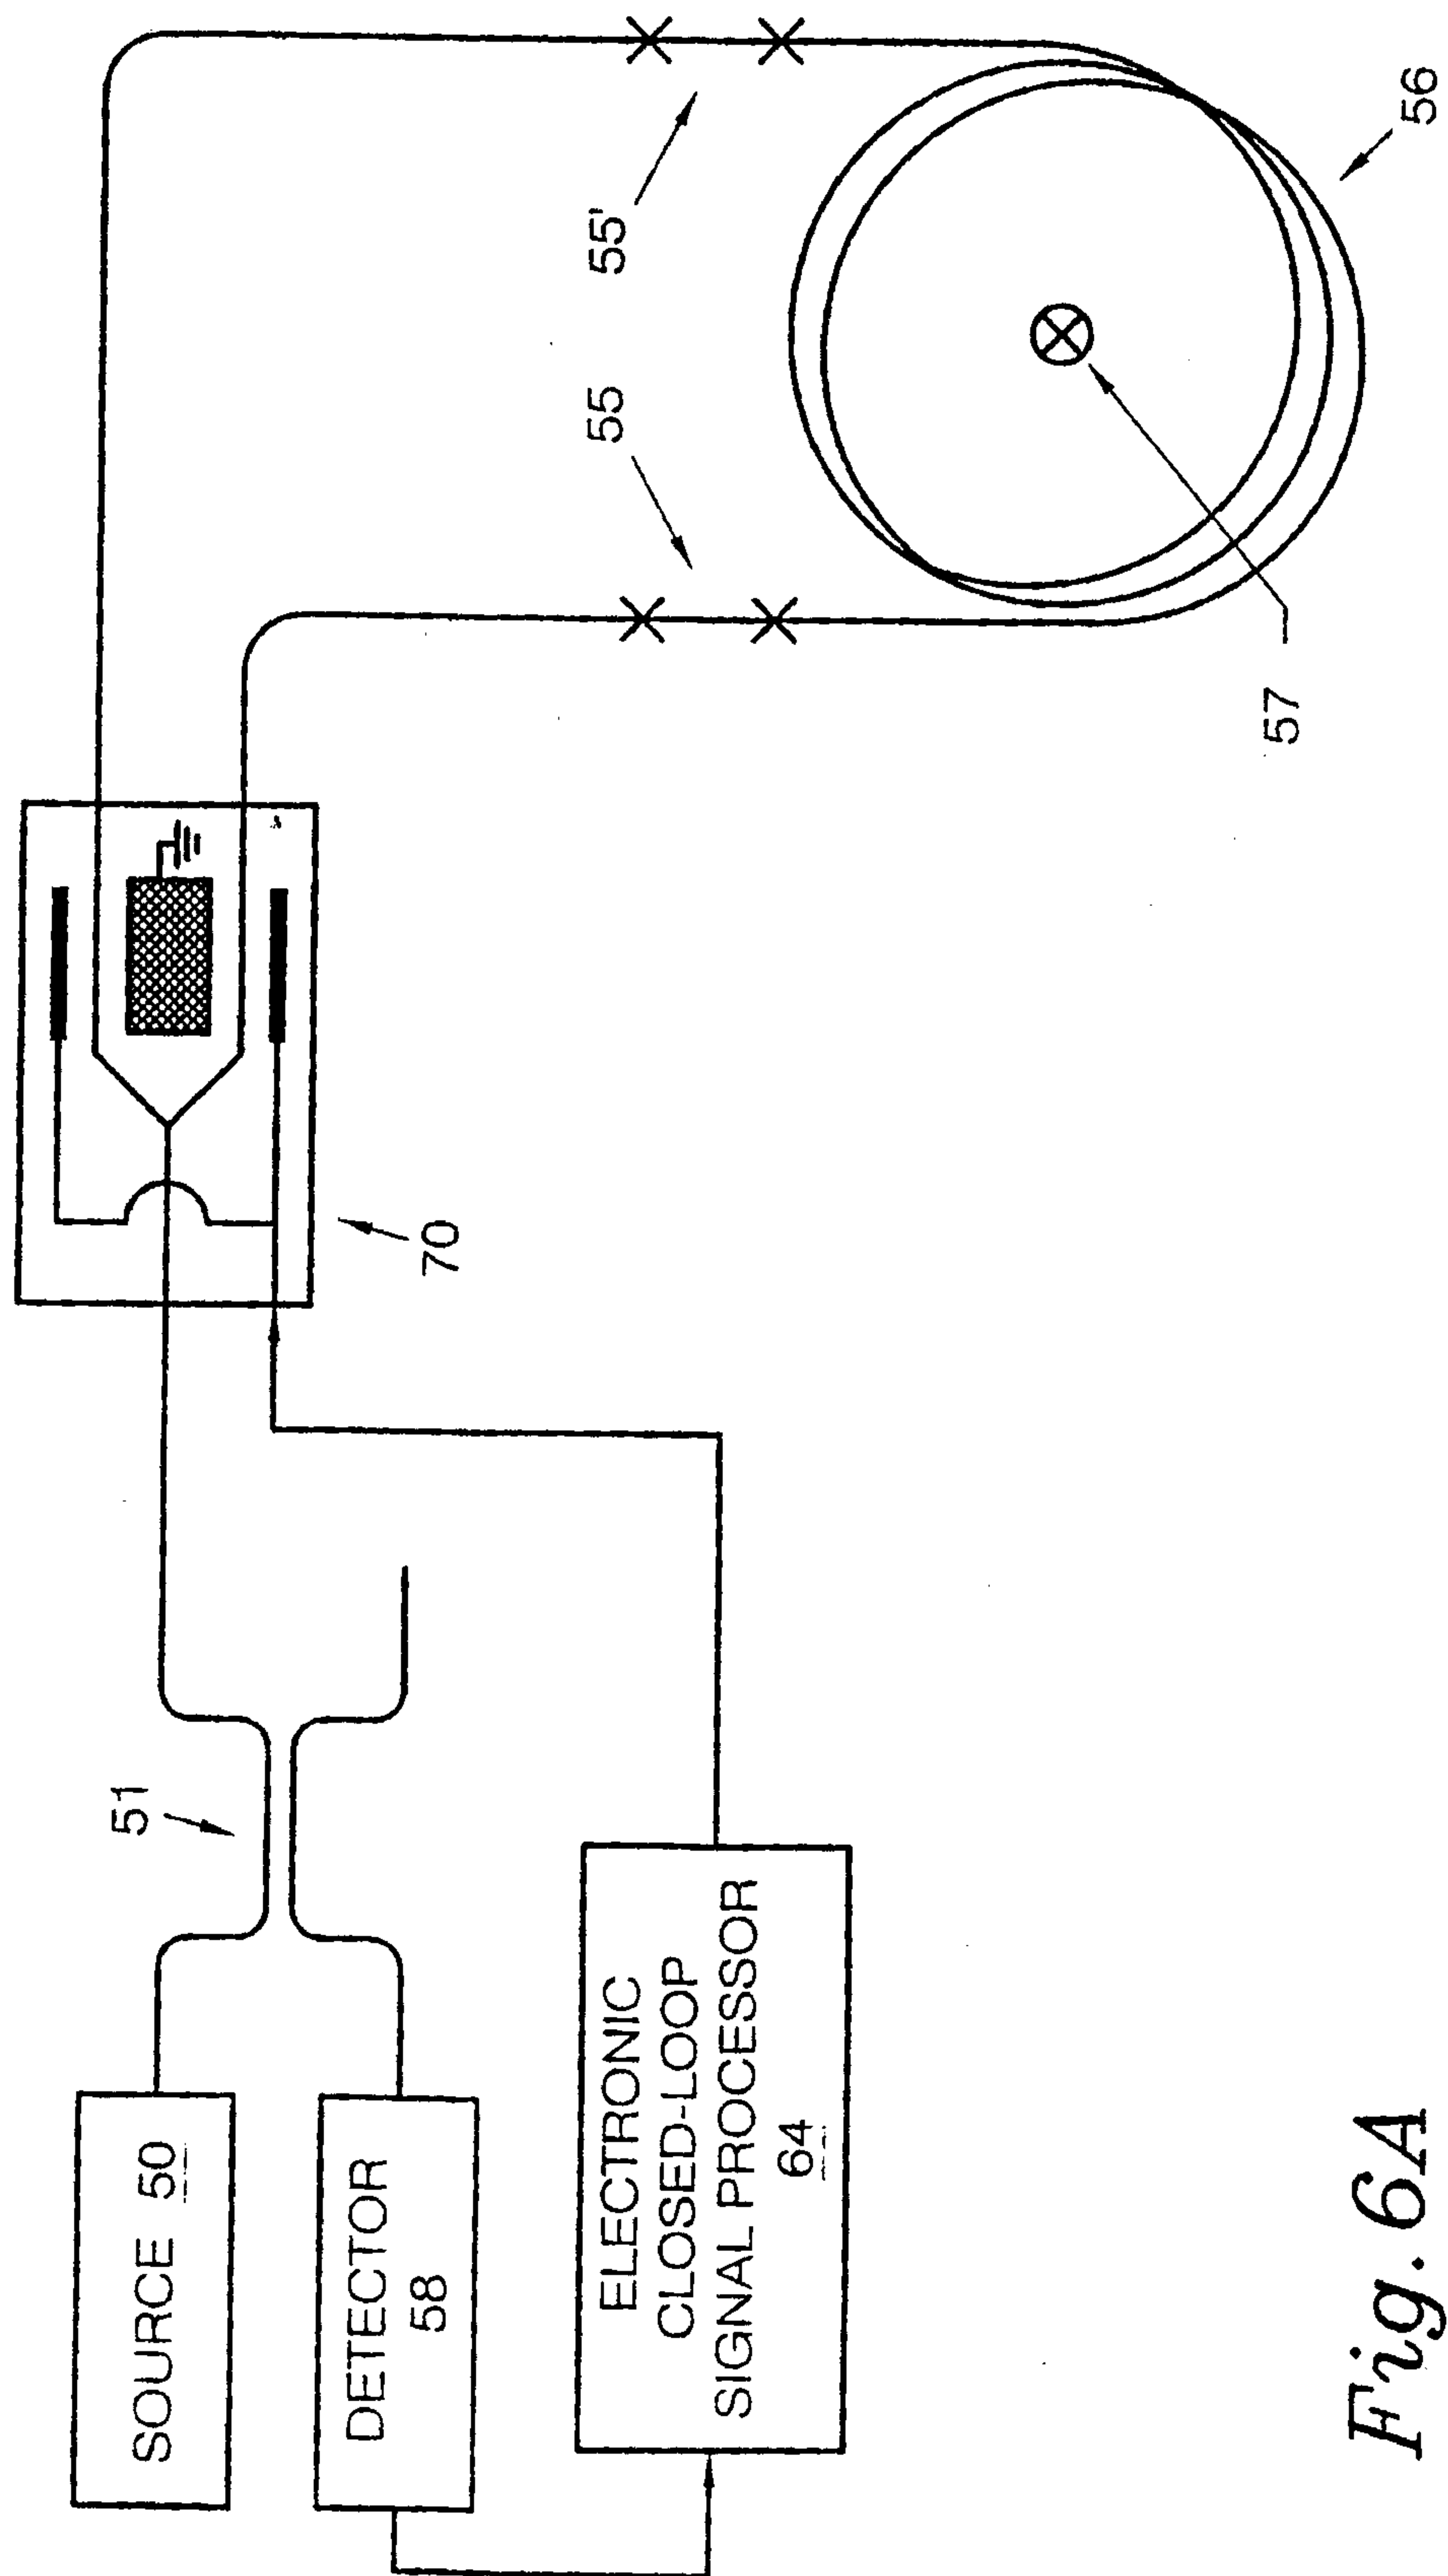
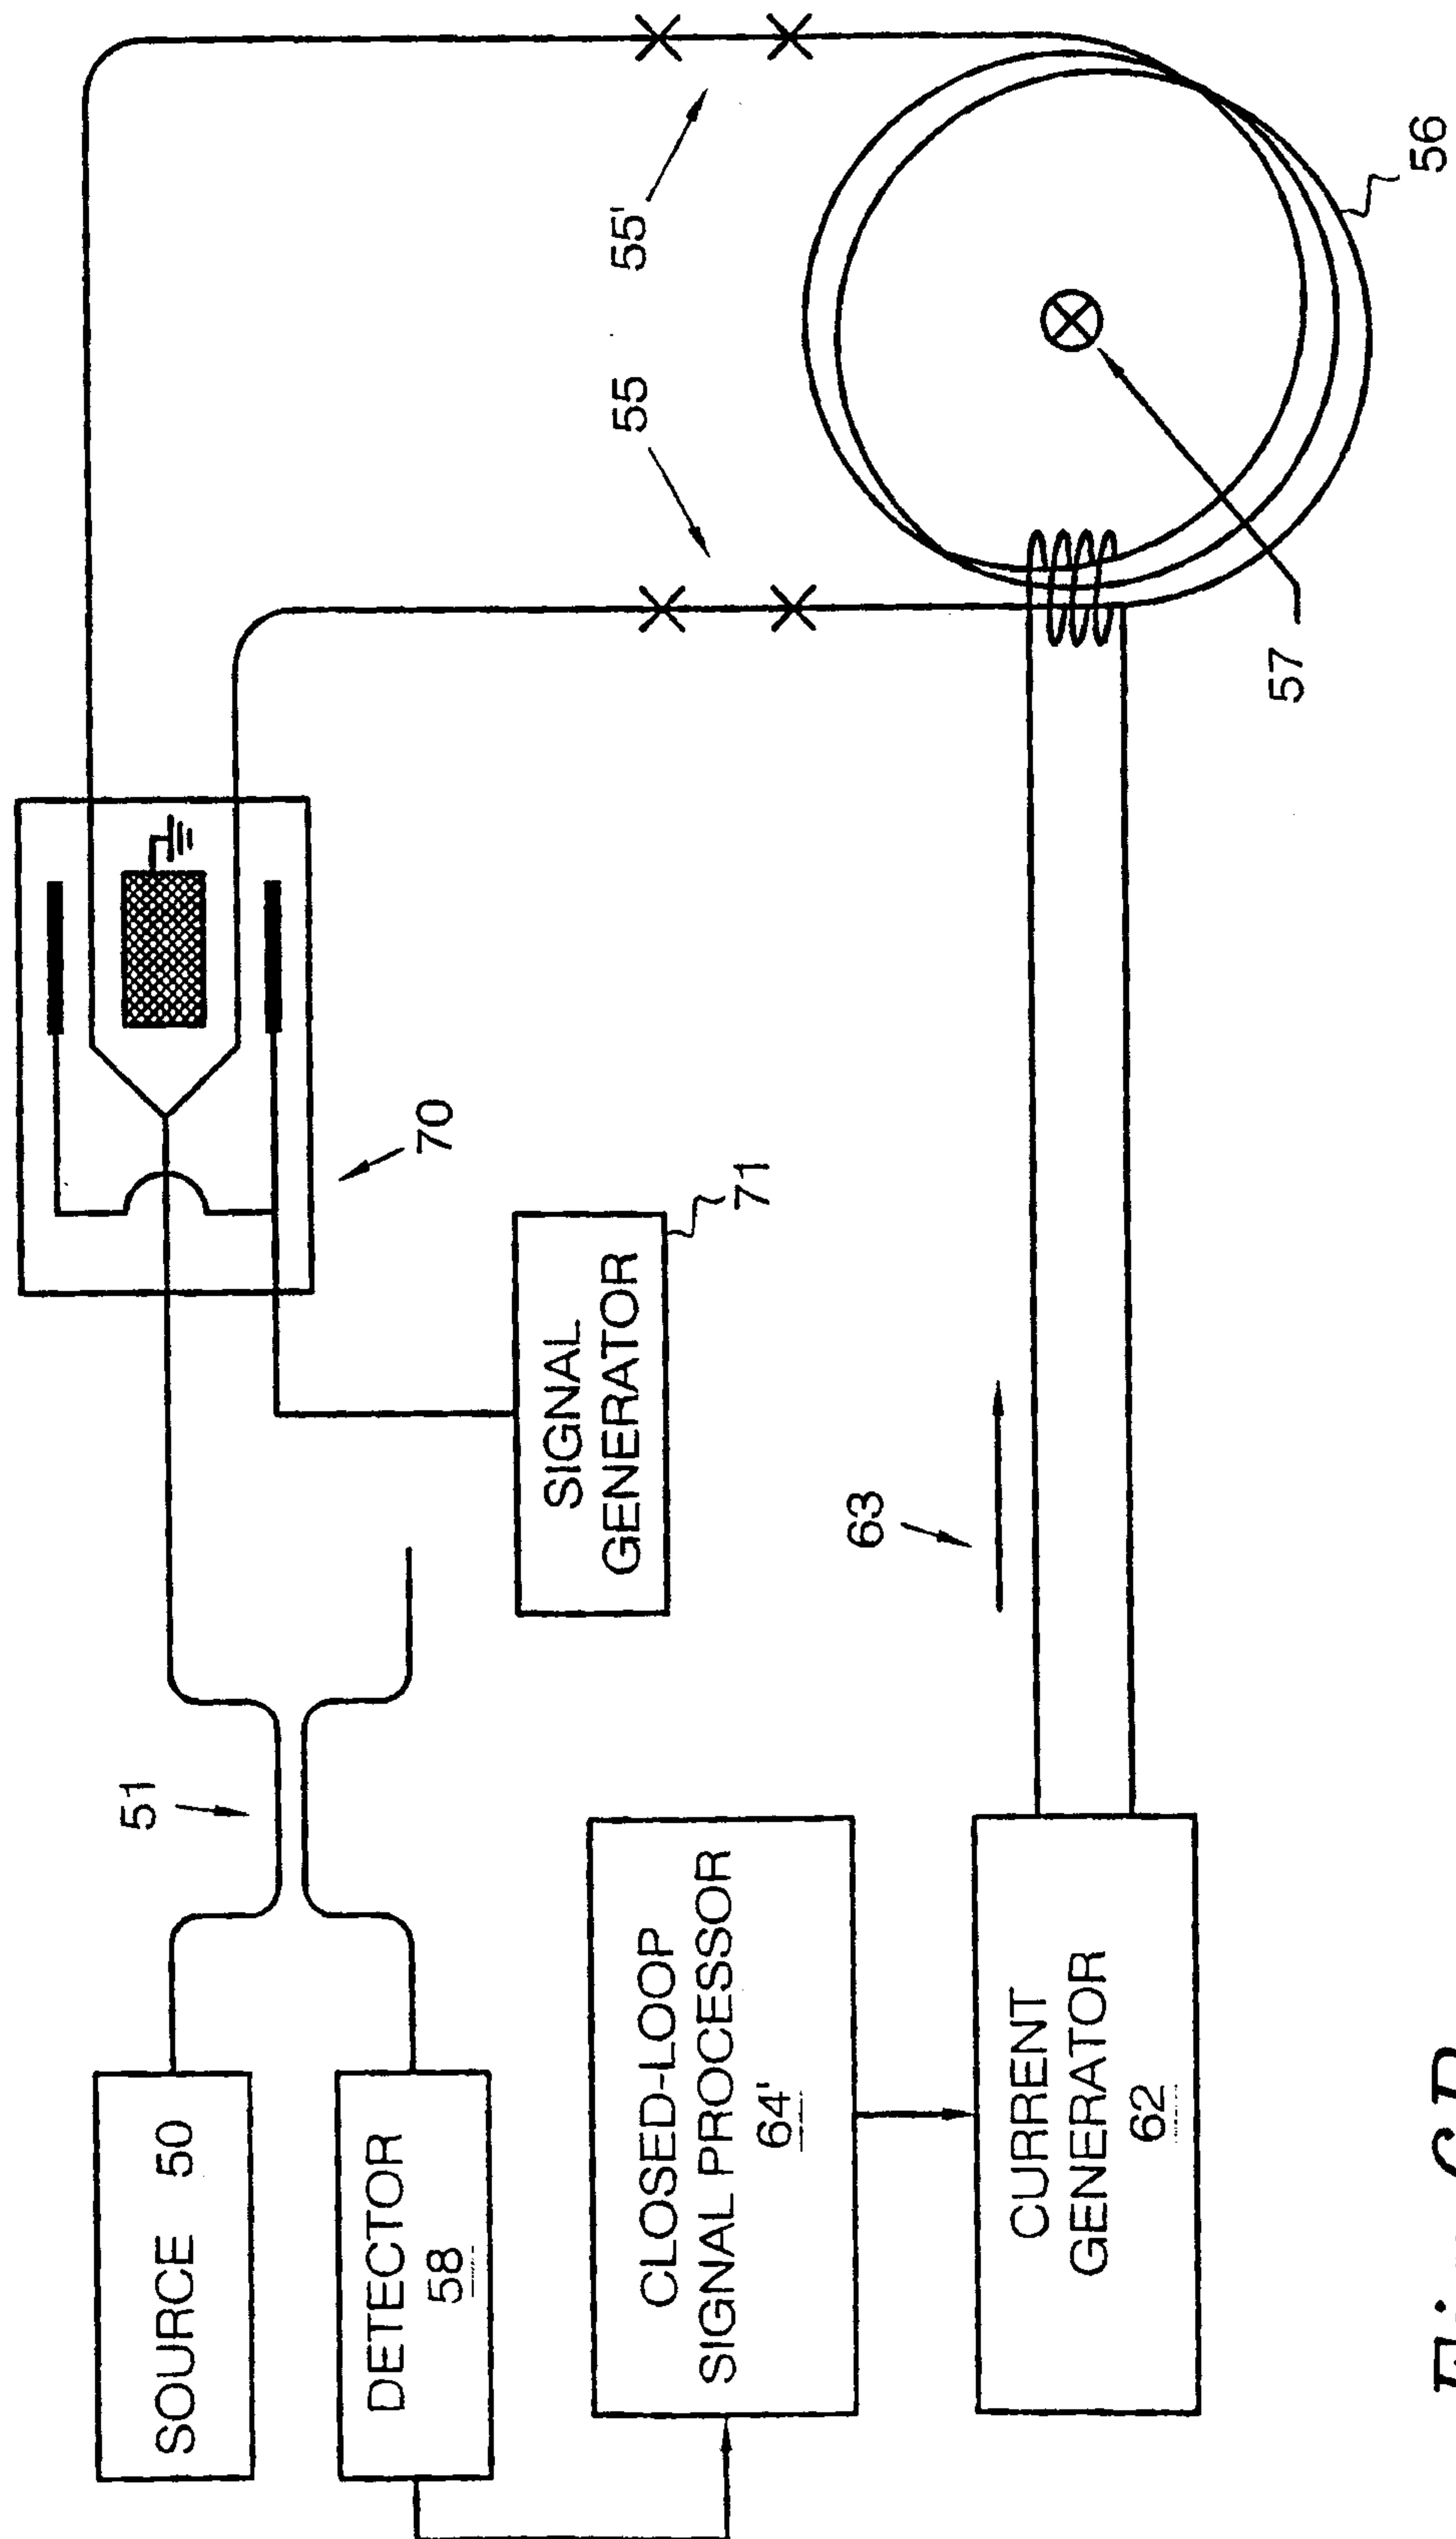


Fig. 6A

10/11

*Fig. 6B*

11/11



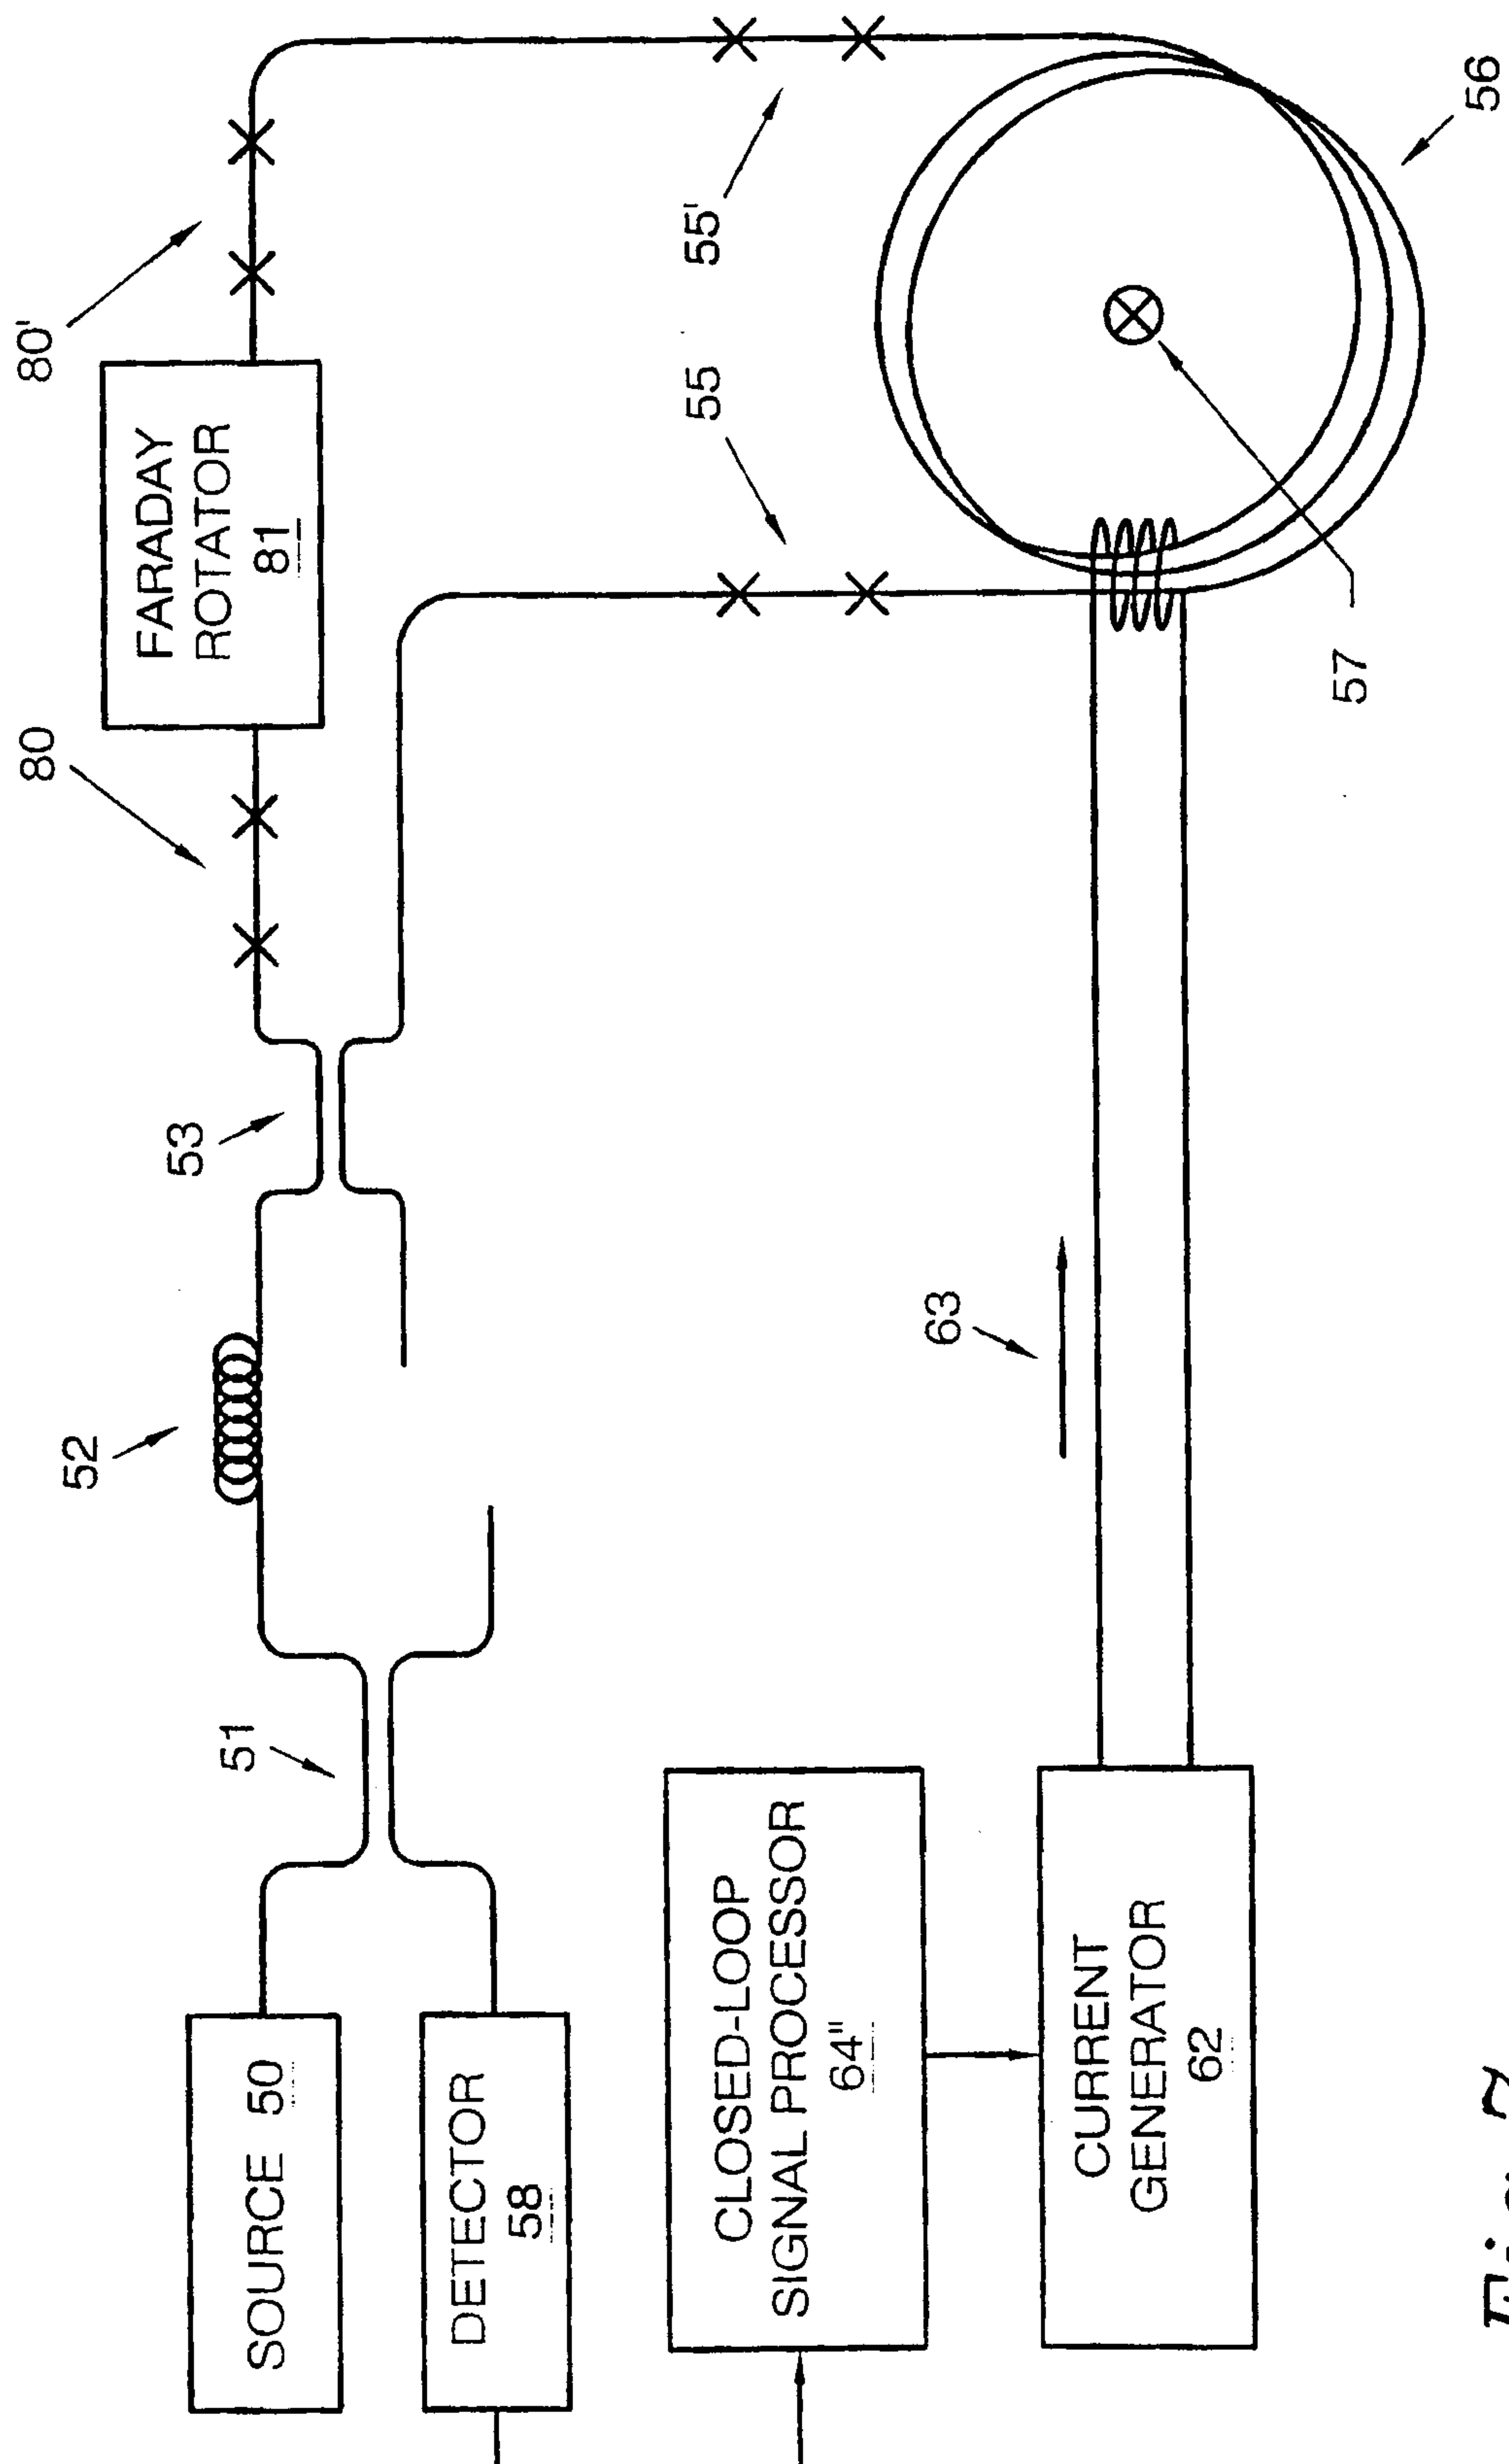


Fig. 7

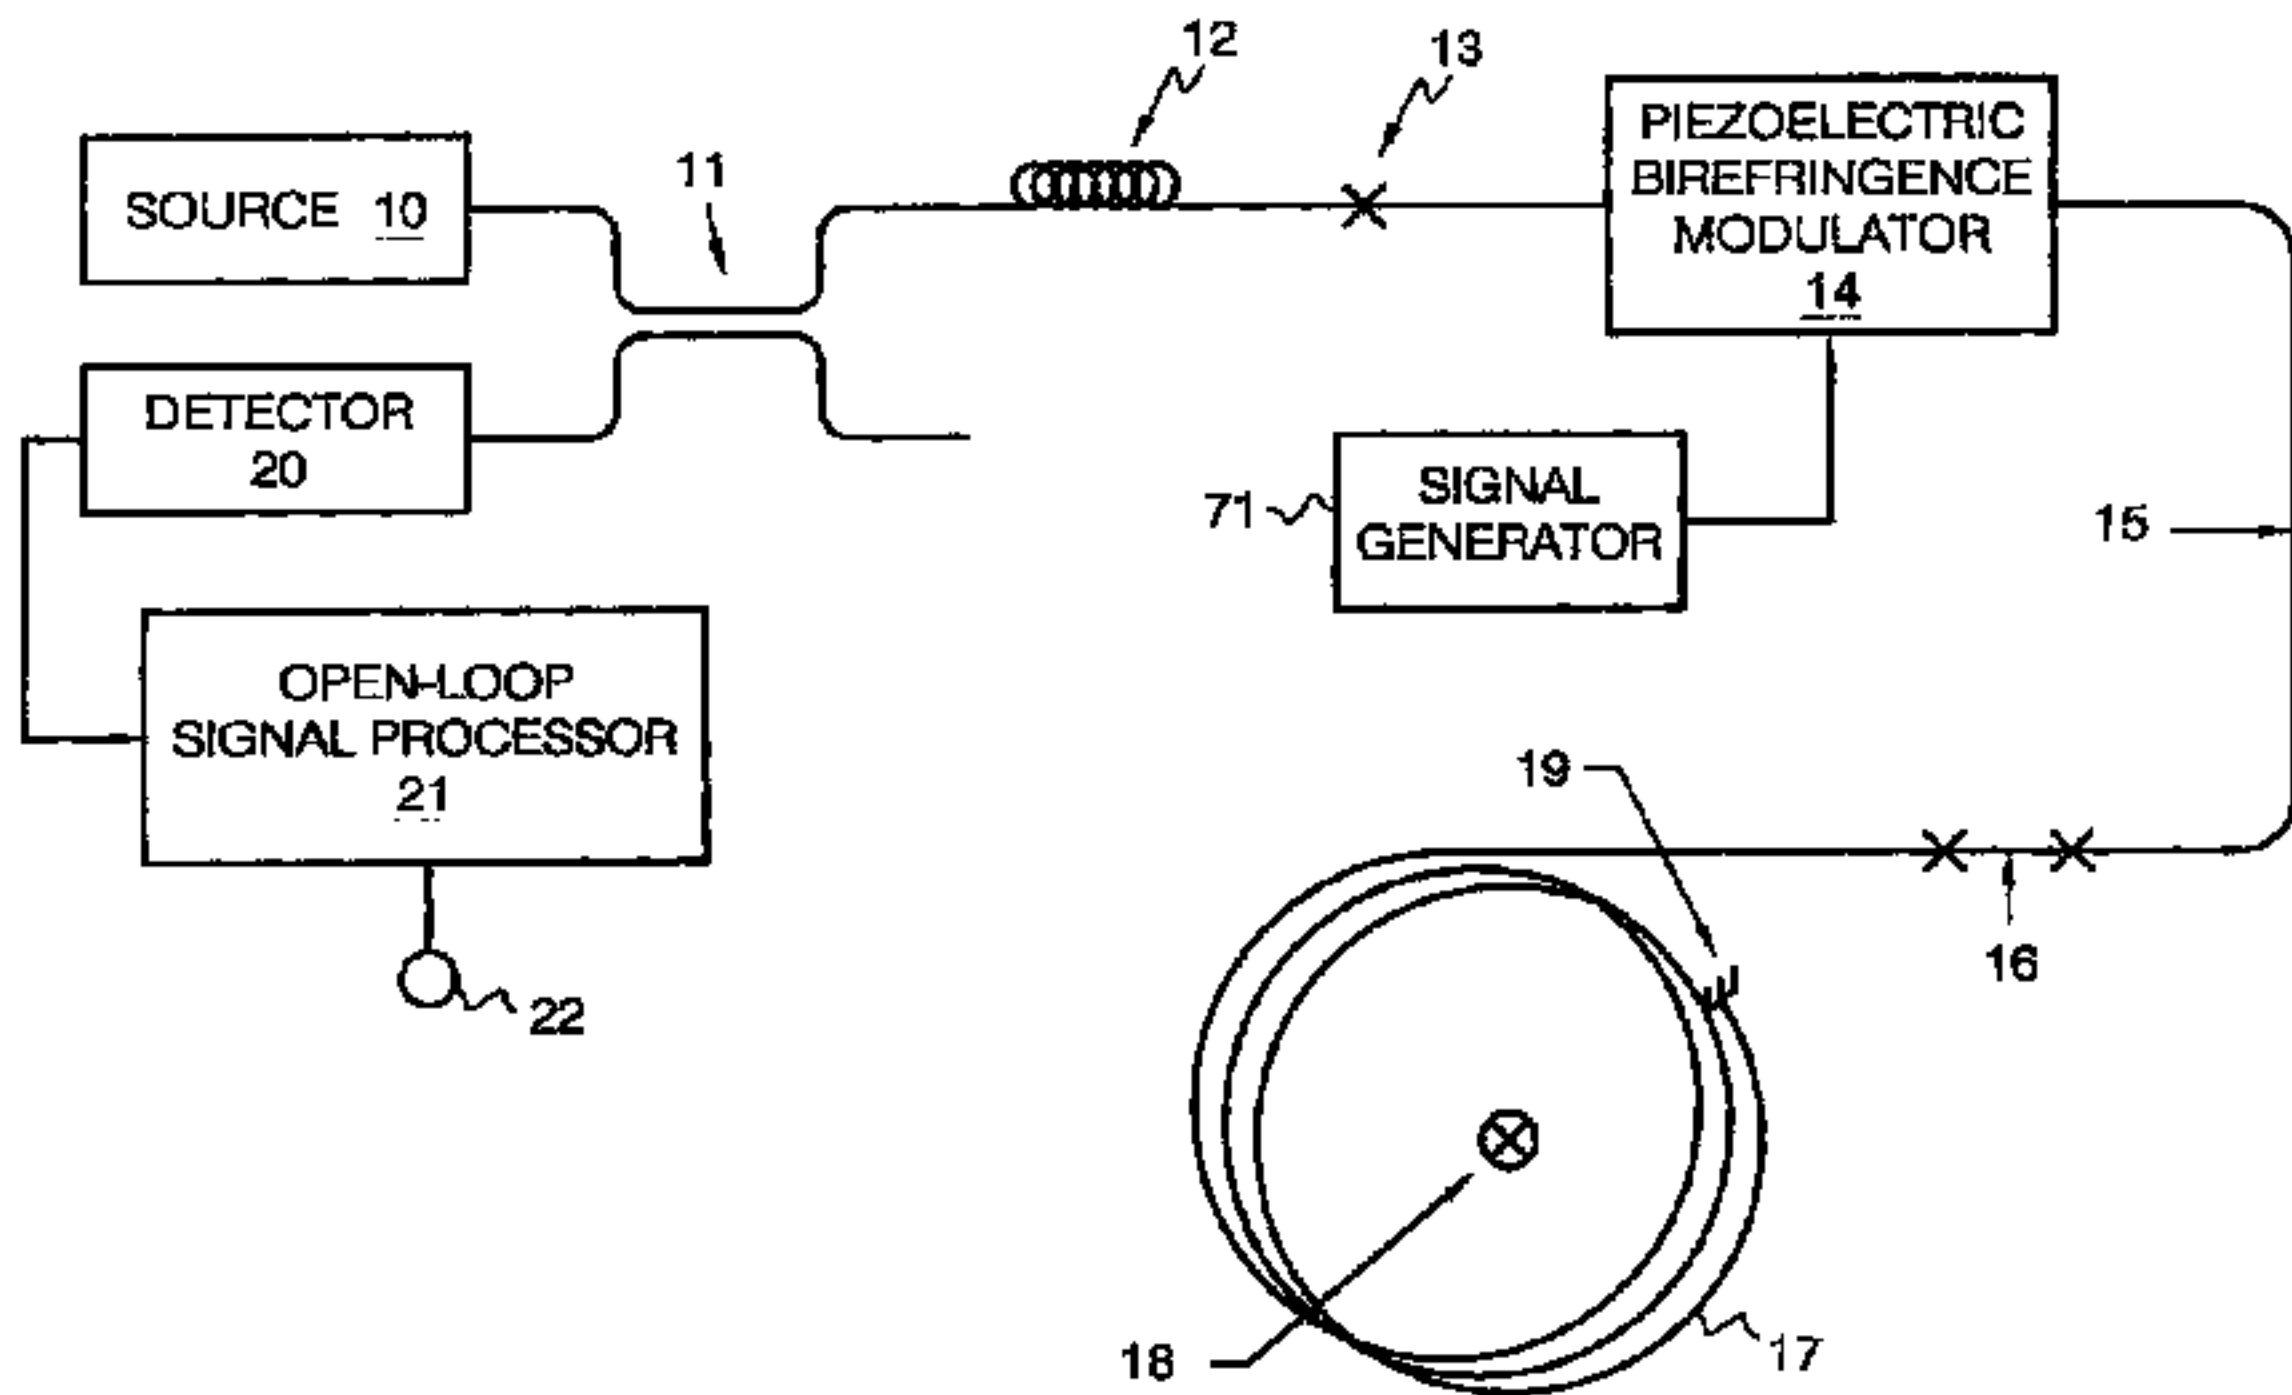

A

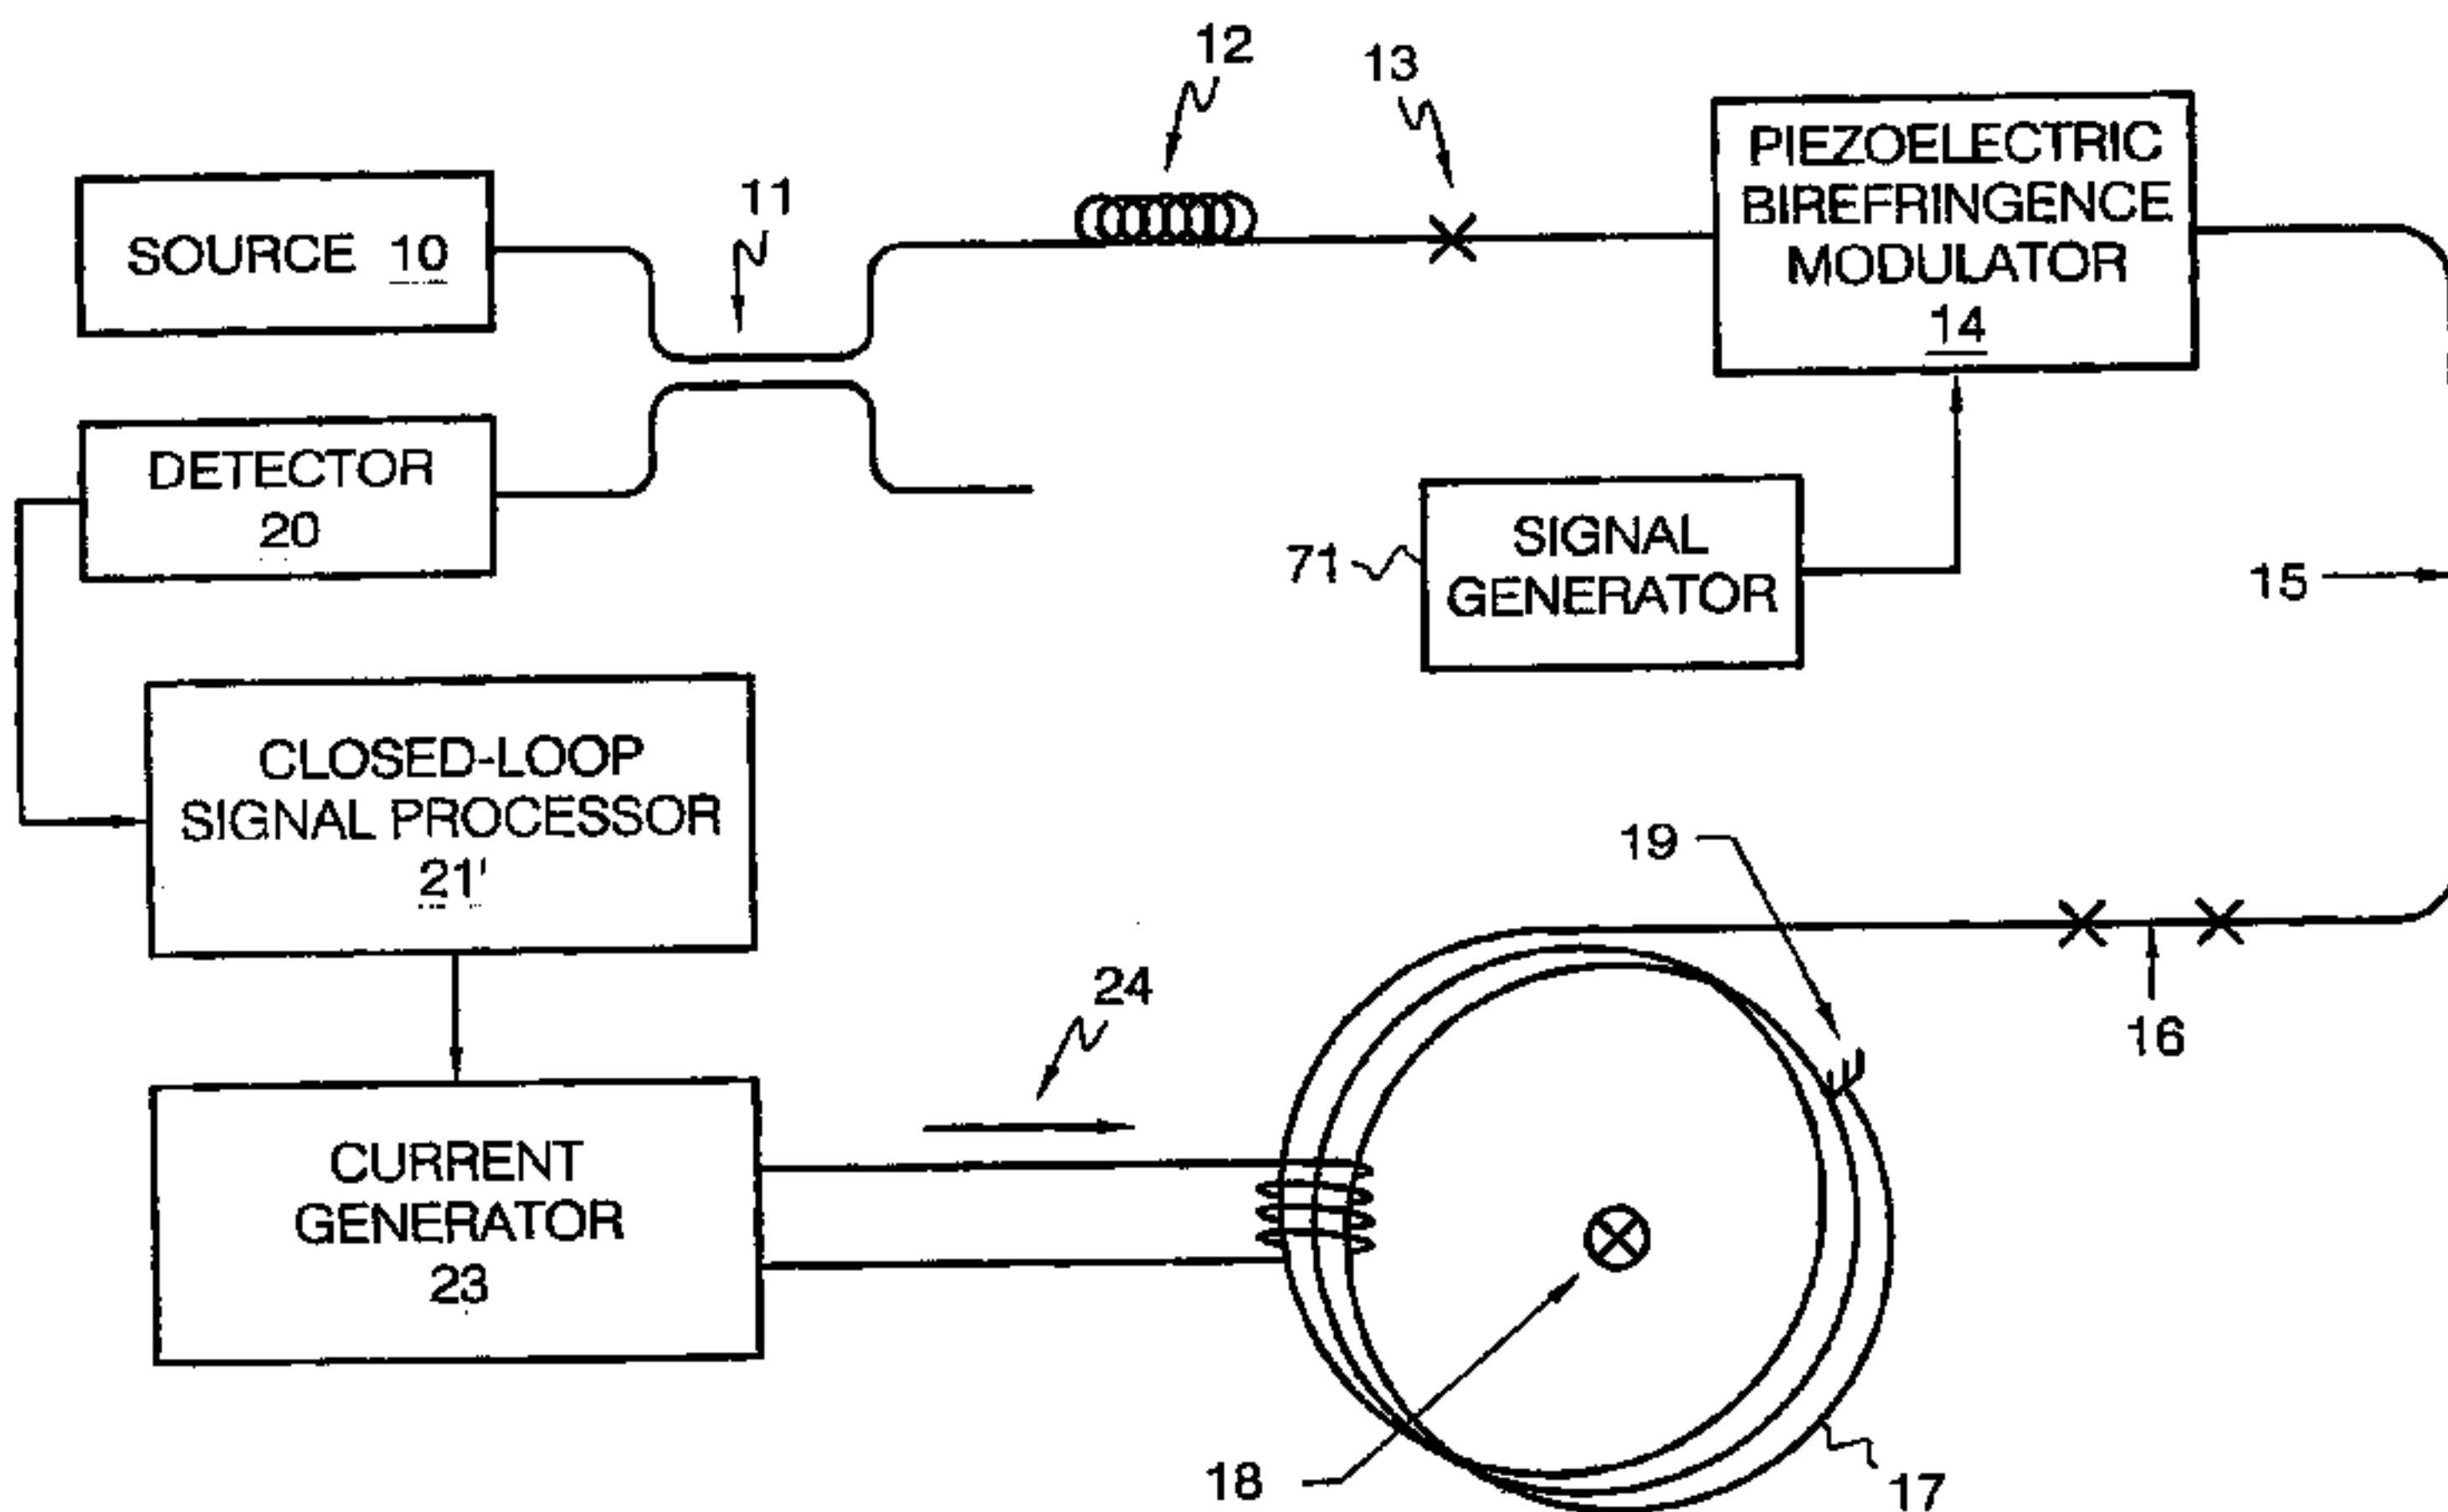

B