




(86) Date de dépôt PCT/PCT Filing Date: 2012/12/11
(87) Date publication PCT/PCT Publication Date: 2013/06/20
(85) Entrée phase nationale/National Entry: 2014/05/16
(86) N° demande PCT/PCT Application No.: US 2012/068915
(87) N° publication PCT/PCT Publication No.: 2013/090246
(30) Priorité/Priority: 2011/12/15 (US13/327,531)

(51) Cl.Int./Int.Cl. *H04J 3/06* (2006.01),
H04B 7/24 (2006.01)
(71) Demandeur/Applicant:
SCHWEITZER ENGINEERING LABORATORIES, INC.,
US
(72) Inventeur/Inventor:
ACHANTA, SHANKAR V., US
(74) Agent: RIDOUT & MAYBEE LLP

(54) Titre : SYSTEMES ET PROCEDES DE SYNCHRONISATION TEMPORELLE D'IED PAR LIAISON RADIO
(54) Title: SYSTEMS AND METHODS FOR TIME SYNCHRONIZATION OF IEDS VIA RADIO LINK

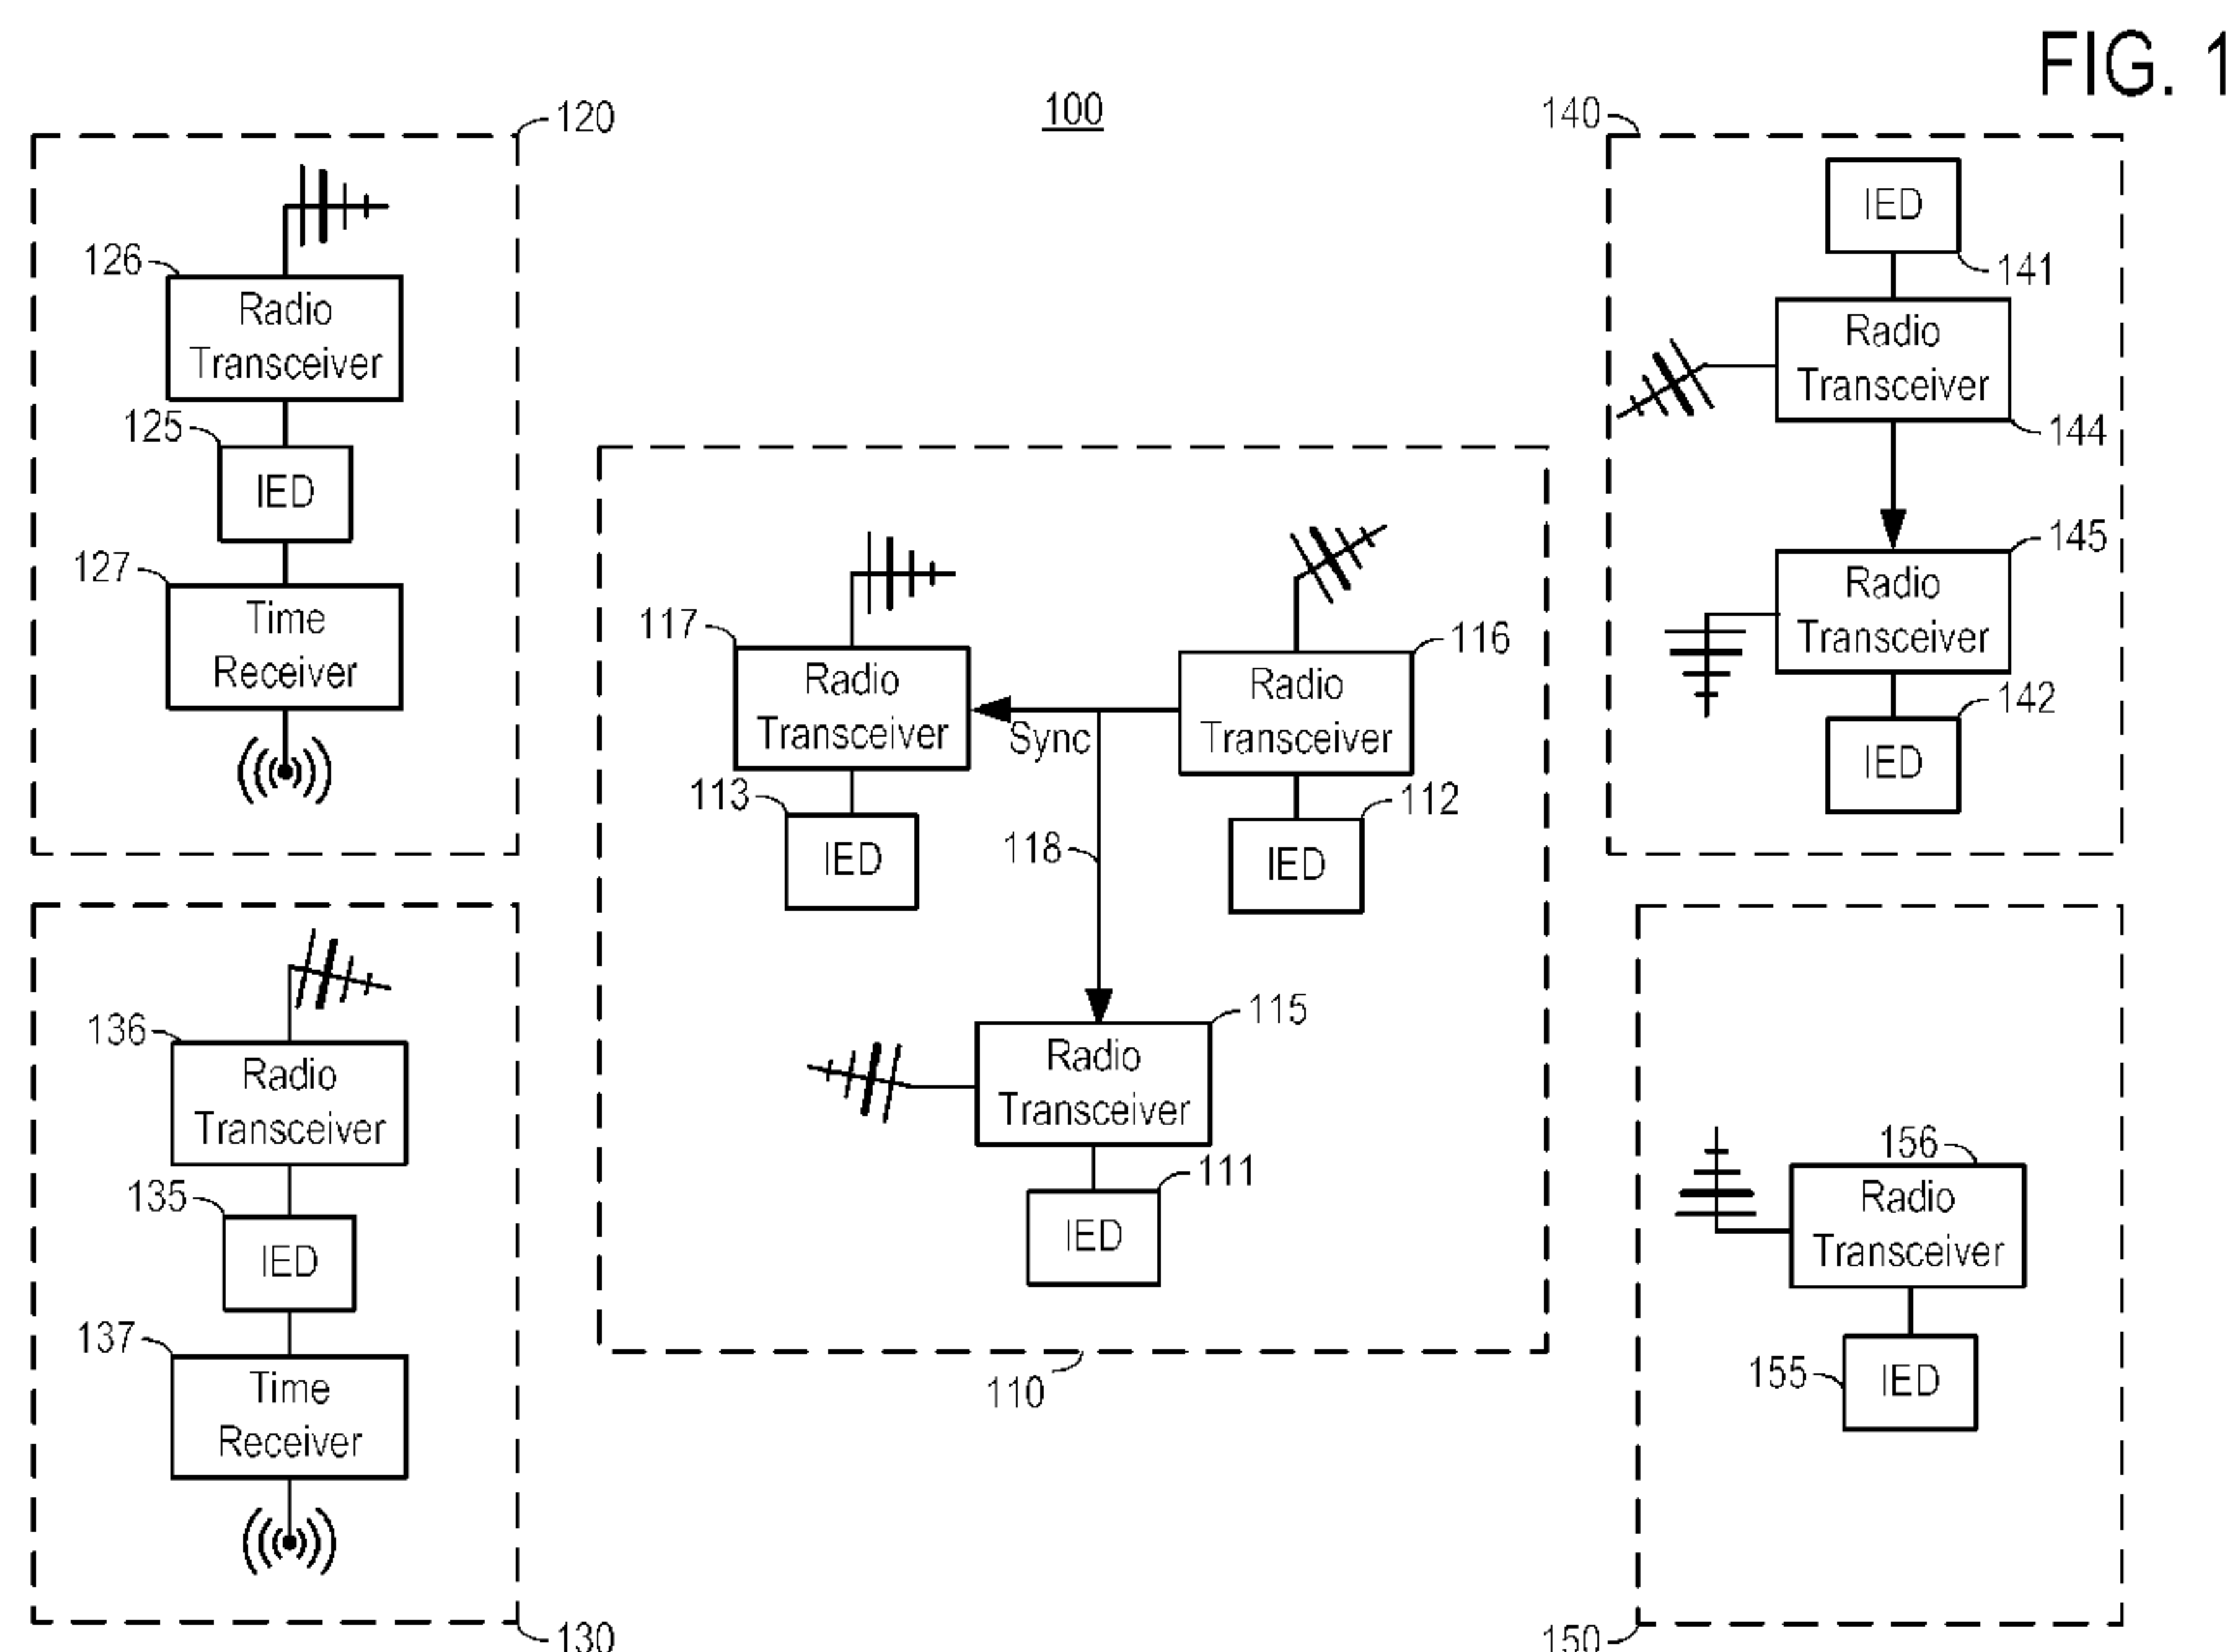

(57) **Abrégé/Abstract:**

The present disclosure provides systems and methods for synchronizing the time signals of master and remote IEDs using a radio link. According to one embodiment, a master IED may transmit an adjusted time signal to a remote IED via a radio signal. The master IED may determine a propagation delay between the master IED and a remote IED. The master IED may then adjust a master time signal by the propagation delay and transmit the adjusted time signal to the remote IED. Alternatively, a remote IED may request and receive a master time signal from a master IED via a radio signal. The remote IED may then determine the propagation delay and adjust the received master time signal accordingly. According to various embodiments, the time signal of a master and remote IED may be synchronized to within at least one millisecond.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date
20 June 2013 (20.06.2013)

(10) International Publication Number

WO 2013/090246 A1

(51) International Patent Classification:

H04B 7/26 (2006.01) H04J 3/06 (2006.01)
H04H 20/67 (2008.01)

(21) International Application Number:

PCT/US2012/068915

(22) International Filing Date:

11 December 2012 (11.12.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/327,531 15 December 2011 (15.12.2011) US

(71) Applicant: SCHWEITZER ENGINEERING LABORATORIES, INC. [US/US]; 2350 NE Hopkins Court, Pullman, WA 99163 (US).

(72) Inventor: ACHANTA, Shankar, V.; 2345 NW Robert Street, Pullman, WA 99163 (US).

(74) Agent: EDGE, Richard, M.; 2350 NE Hopkins Court, Pullman, WA 99163 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEMS AND METHODS FOR TIME SYNCHRONIZATION OF IEDs VIA RADIO LINK

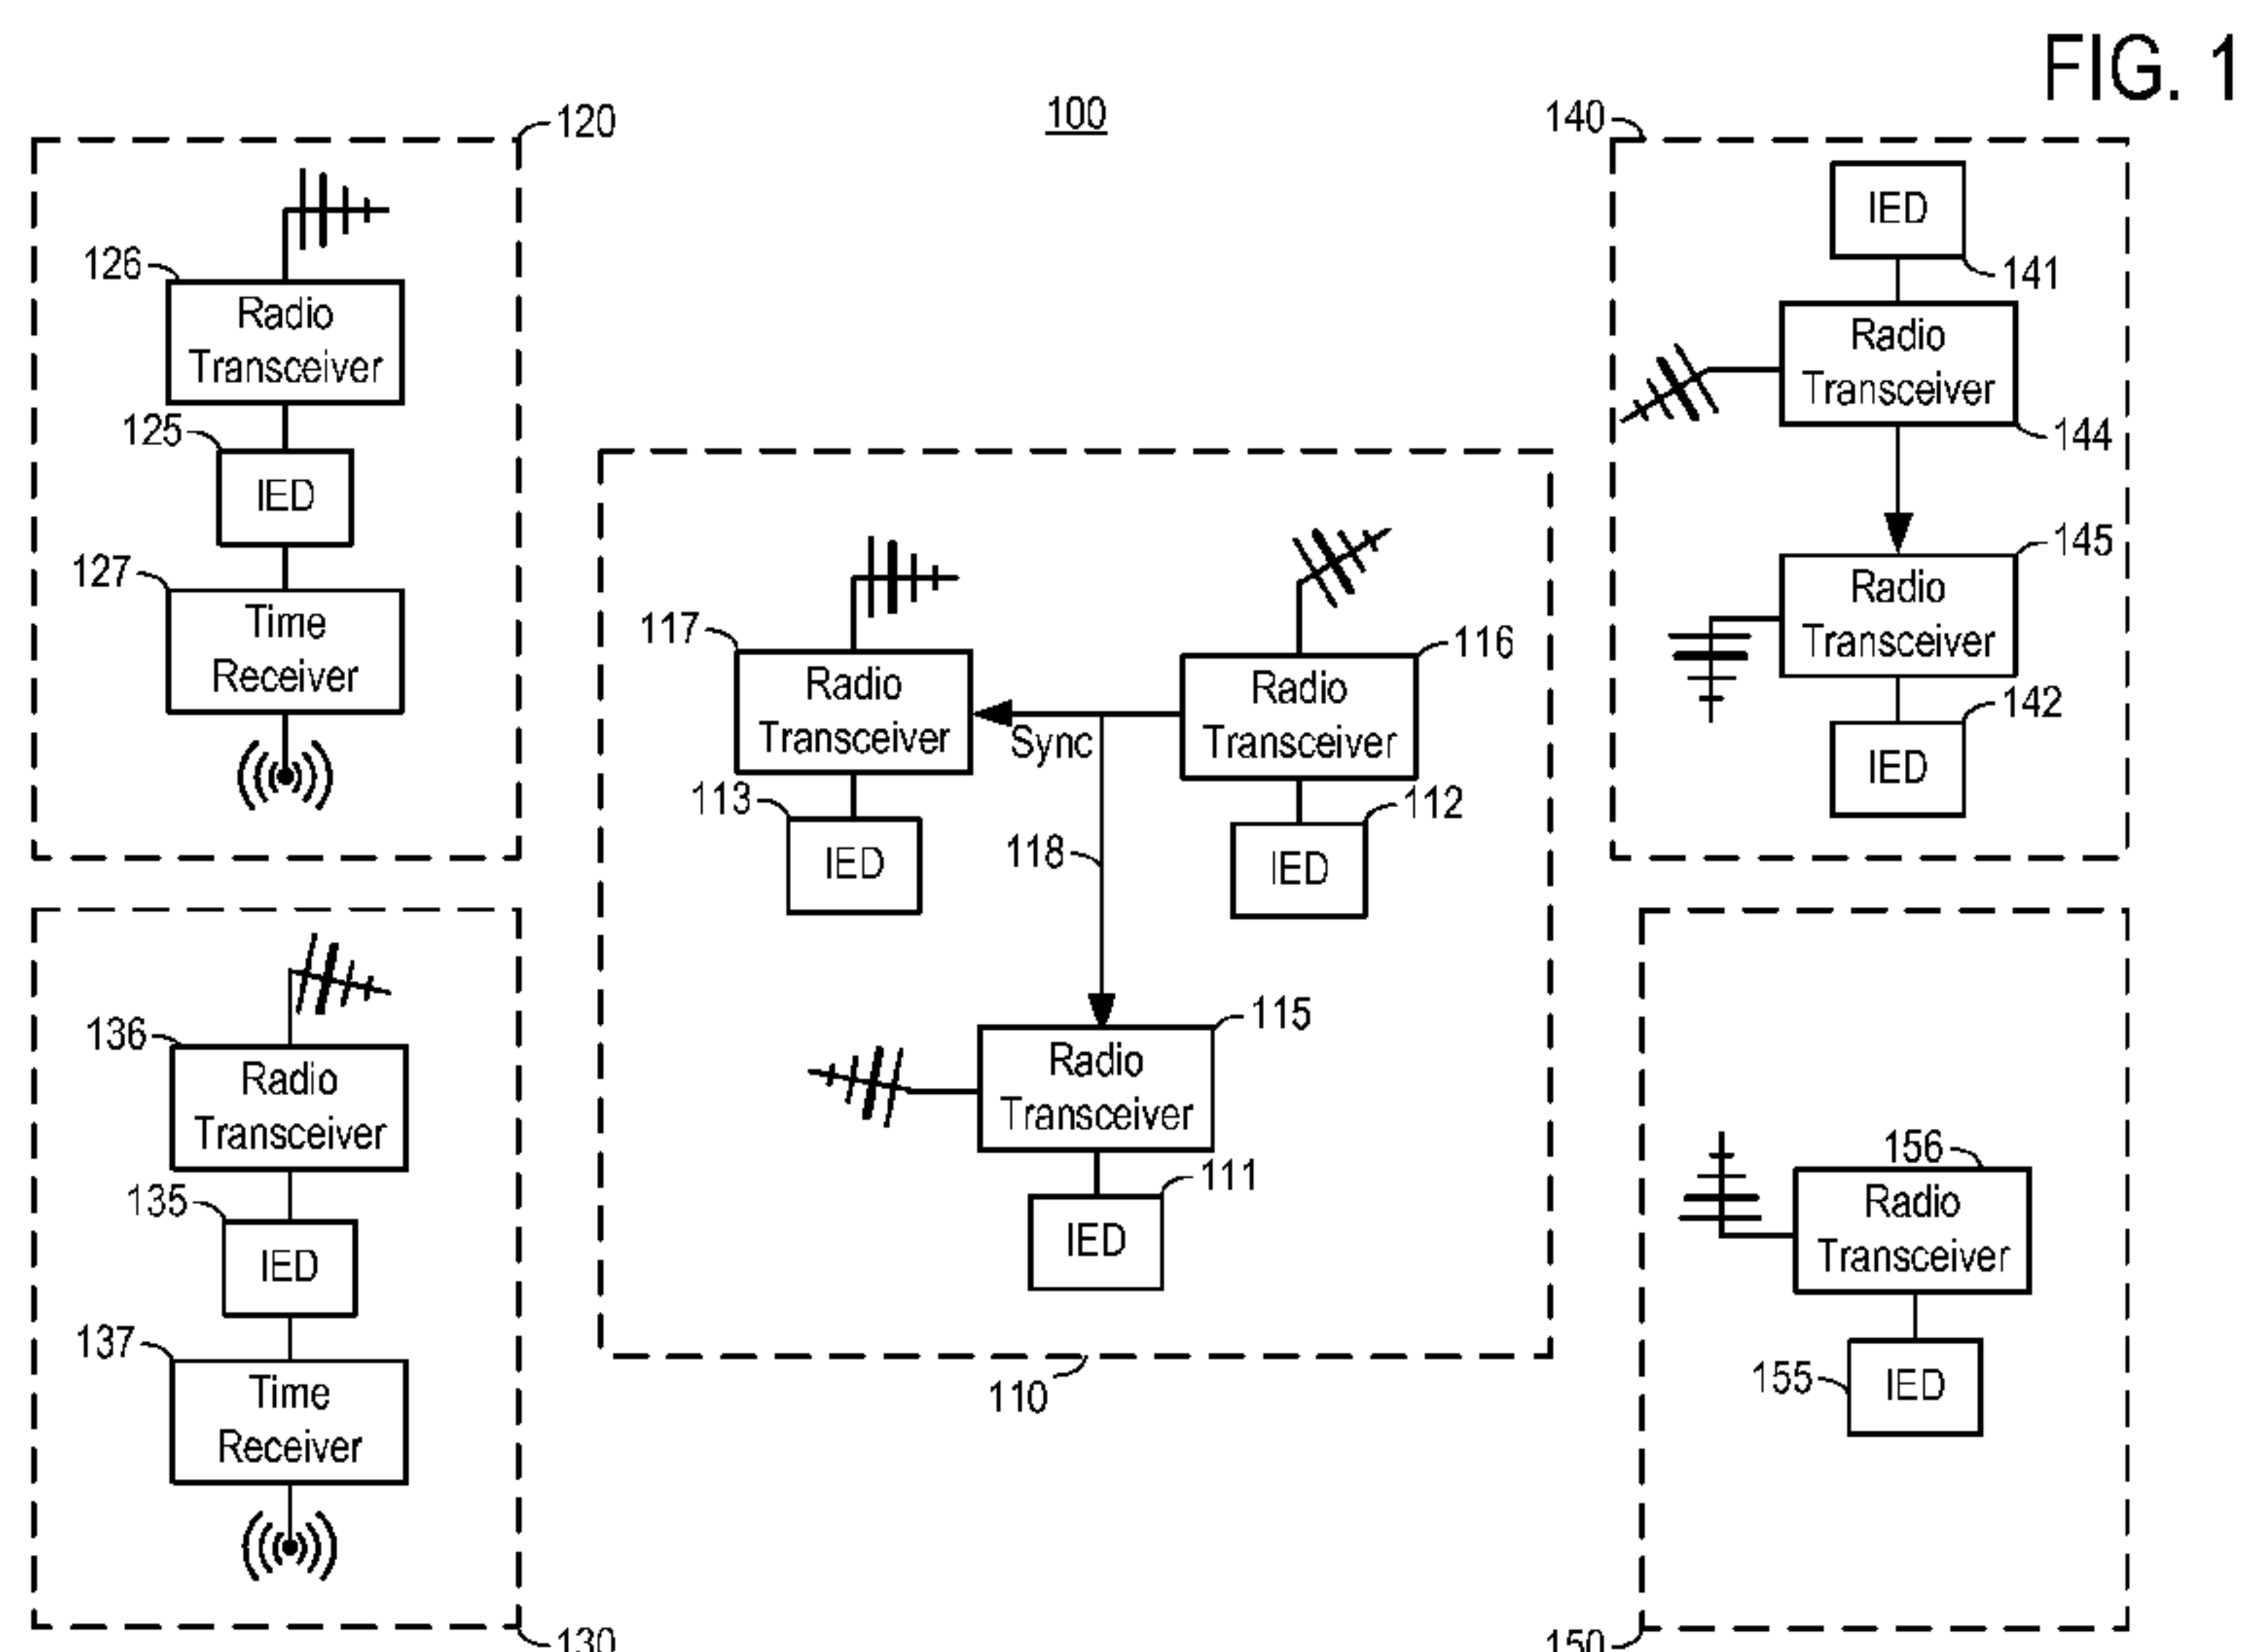

(57) Abstract: The present disclosure provides systems and methods for synchronizing the time signals of master and remote IEDs using a radio link. According to one embodiment, a master IED may transmit an adjusted time signal to a remote IED via a radio signal. The master IED may determine a propagation delay between the master IED and a remote IED. The master IED may then adjust a master time signal by the propagation delay and transmit the adjusted time signal to the remote IED. Alternatively, a remote IED may request and receive a master time signal from a master IED via a radio signal. The remote IED may then determine the propagation delay and adjust the received master time signal accordingly. According to various embodiments, the time signal of a master and remote IED may be synchronized to within at least one millisecond.

Systems and Methods for Time Synchronization of IEDs via Radio Link**TECHNICAL FIELD**

[0001] This disclosure relates to time synchronization of intelligent electronic devices. More particularly, this disclosure relates to time synchronization of intelligent electronic devices via a radio signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0002] Non-limiting and non-exhaustive embodiments of the disclosure are described, including various embodiments of the disclosure with reference to the figures, in which:

[0003] FIG. 1 illustrates an embodiment of a network of intelligent electronic devices (IEDs) in communication with one another via radio links and/or via direct connections.

[0004] FIG. 2 illustrates a diagram of an embodiment of an electric power distribution system including IEDs connected to radio transceivers.

[0005] FIG. 3A illustrates a diagram of an embodiment of the synchronization of a remote IED with a master IED via a radio signal in which the master IED compensates for propagation and/or processing delays.

[0006] FIG. 3B illustrates a diagram of an embodiment of the synchronization of a remote IED with a master IED via a radio signal in which the remote IED compensates for propagation and/or processing delays.

[0007] FIG. 3C illustrates a diagram of an embodiment of the synchronization of a remote IED with a master IED via a radio signal transmitted at a known time such as a pulse-per second (PPS).

[0008] FIG. 4 illustrates a functional block diagram of an embodiment of an IED configured to receive, distribute, and/or determine a time signal.

[0009] FIG. 5 illustrates an embodiment of a function block diagram of an IED configured to distribute and/or receive a time signal via a radio link.

[0010] FIG. 6A illustrates a flow chart of an embodiment of a method for a master IED to transmit an adjusted time signal to a remote IED via a radio signal in order for the remote IED to synchronize its time signal with a time signal of a master IED.

[0011] FIG. 6B illustrates a flow chart of an embodiment of a method for a remote IED to synchronize its time signal with a time signal of a master IED via a radio link.

[0012] FIG. 7 illustrates a flow chart of an embodiment of a method of using a primary independent time source to synchronize a remote IED and using a secondary time source distributed via a radio link as a failsafe.

[0013] In the following description, numerous specific details are provided for a thorough understanding of the various embodiments disclosed herein. The systems and methods disclosed herein can be practiced without one or more of the specific details, or with other methods, components, materials, etc. In addition, in some cases, well-known structures, materials, or operations may not be shown or described in detail in order to avoid obscuring aspects of the disclosure. Furthermore, the described features, structures, or characteristics may be combined in any suitable manner in one or more alternative embodiments.

DETAILED DESCRIPTION

[0014] Intelligent electronic devices (IEDs) may be used for monitoring, protecting and/or controlling industrial and utility equipment, such as in electric power delivery systems. Such systems may utilize accurate time information to perform various monitoring and protection tasks. IEDs within a power system may be configured to perform metering, control, and protection functions that require a certain level of precision between one or more IEDs. For example, IEDs may be configured to calculate and communicate time-synchronized phasors (synchrophasors), which may require that the IEDs be synchronized to within microseconds of one other. Many protection, metering, control, and automation algorithms used in power systems may benefit from or require synchronized time stamps on data transmitted between a plurality of IEDs.

[0015] Various systems may be used to distribute accurate time information between networked IEDs. According to various embodiments, a plurality of IEDs may maintain synchronized time signals using a synchronized optical network (SONET). In such an embodiment, accurate time information may be distributed using a synchronous transport protocol and synchronous transport modules (STMs). According to such embodiments, each synchronized IED must be physically connected to the SONET.

[0016] According to other embodiments, accurate time information may be communicated between networked IEDs using the precision time protocol (PTP), a global positioning system (GPS), and/or, with less accuracy, network time protocol

(NTP). PTP and NTP traditionally utilize wired connections. A GPS synchronization scheme may require that each node have its own GPS receiver and that the GPS signal be accessible. The present disclosure provides various systems and methods for synchronizing the clocks of any number of IEDs using wireless radio links.

5 According to various embodiments, the accuracy of time signal synchronization via a radio link may be in the sub-millisecond range.

[0017] According to various embodiments, an IED may utilize a radio link as a primary time source for maintaining a local clock synchronized with respect to other networked IEDs. Alternatively, an IED may utilize SONET, PTP, NTP, GPS as a
10 primary independent time source for maintaining a local clock synchronized with respect to other networked IEDs. In such embodiments, a radio link may be used as a secondary time source to maintain synchronization in the event the primary independent time source is unavailable or compromised.

[0018] According to various embodiments, a substation or other remote location may
15 not accommodate a wired connection and/or such a connection may be cost prohibitive. Remote IEDs within such a substation may communicate data related to monitoring, protecting, and/or controlling components in an electric power distribution system to master IEDs via a radio link. According to various embodiments, this same radio link may be utilized to maintain a remote IED's time signal synchronized with a time signal
20 of a master IED.

[0019] The bandwidth available on a radio link may be limited and therefore may warrant a relatively low bandwidth method for time signal synchronization. According to one embodiment, a master IED determines the propagation delay between itself and a remote IED via a series of communication exchanges. The master IED may then
25 transmit a master time signal adjusted for the calculated propagation delay to the remote IED. The remote IED may then synchronize its time signal with the master time signal. Alternatively, a remote IED may request a master time signal from a master IED and then determine the propagation delay based on when the response is received. The remote IED may then synchronize its time signal with respect to the master time
30 signal.

[0020] In another embodiment, remote IEDs may synchronize their time signal with a master IED using the transmit and receive phases of the master IED. For example, the master IED may transmit data via a radio link at a pulse per second (PPS) mark generated by a common time source such as a GPS source, WWV, WWVB, WWVH, or

the like. In such an embodiment, the master IED may transmit data to the remote IED via a radio link on a PPS mark. The radio receiver of the remote IED may then generate a time pulse upon receipt of the data transmission, and send such time pulse to its associated IED. The receiving IED may then synchronize other local IEDs using the arrival time. Accordingly, since both remote and master IEDs know that data received via a radio link was originally transmitted on the last PPS mark, remote and master IEDs may be time-aligned as needed.

[0021] According to various embodiments, an IED may include a time signal synchronization module configured to receive and/or transmit radio signals. According to various embodiments, the time signal synchronization module may synchronize its internal time signal after selecting a best available time signal based on a pre-programmed selection order or through the use of an algorithm. The time synchronization module of an IED may utilize an IED-to-IED radio transceiver as a primary time source to synchronize its internal time signal. Alternatively, the IED-to-IED radio transceiver may be used as a failsafe or backup time source in the event a primary independent time source fails or becomes unavailable. For example, a time signal synchronization module may utilize a GPS receiver or an Inter-range Instrumentation Group (IRIG) time source receiver as a primary independent time source and rely on the IED-to-IED radio link only as a failsafe. The IED may then transmit time synchronization data to other IEDs using any number of protocols, including PTP, NTP, IRIG, and via radio link.

[0022] The phrases “connected to” and “in communication with” refer to any form of interaction between two or more components, including mechanical, electrical, magnetic, and electromagnetic interaction. Two components may be connected to each other, even though they are not in direct contact with each other, and even though there may be intermediary devices between the two components.

[0023] As used herein, the term IED may refer to any microprocessor-based device that monitors, controls, automates, and/or protects monitored equipment within a system. Such devices may include, for example, remote terminal units, differential relays, distance relays, directional relays, feeder relays, overcurrent relays, voltage regulator controls, voltage relays, breaker failure relays, generator relays, motor relays, automation controllers, bay controllers, meters, recloser controls, communications processors, computing platforms, programmable logic controllers (PLCs), programmable automation controllers, input and output modules, motor drives, and the

like. IEDs may be connected to a network, and communication on the network may be facilitated by networking devices including, but not limited to, multiplexers, routers, hubs, gateways, firewalls, and switches. Furthermore, networking and communication devices may be incorporated in an IED or be in communication with an IED. The term
5 IED may be used interchangeably to describe an individual IED or a system comprising multiple IEDs.

[0024] Some of the infrastructure that can be used with embodiments disclosed herein is already available, such as: general-purpose computers, computer programming tools and techniques, digital storage media, and communications
10 networks. A computer may include a processor, such as a microprocessor, microcontroller, logic circuitry, or the like. The processor may include a special purpose processing device, such as an ASIC, PAL, PLA, PLD, Field Programmable Gate Array, or other customized or programmable device. The computer may also include a computer-readable storage device, such as non-volatile memory, static RAM, dynamic
15 RAM, ROM, CD-ROM, disk, tape, magnetic, optical, flash memory, or other computer-readable storage medium.

[0025] Suitable networks for configuration and/or use, as described herein, include any of a wide variety of network infrastructures. Specifically, a network may incorporate landlines, wireless communication, optical connections, various modulators,
20 demodulators, small form-factor pluggable (SFP) transceivers, routers, hubs, switches, and/or other networking equipment.

[0026] The network may include communications or networking software, such as software available from Novell, Microsoft, Artisoft, and other vendors, and may operate using TCP/IP, SPX, IPX, SONET, and other protocols over twisted pair, coaxial, or
25 optical fiber cables, telephone lines, satellites, microwave relays, modulated AC power lines, physical media transfer, wireless radio links, and/or other data transmission “wires”. The network may encompass smaller networks and/or be connectable to other networks through a gateway or similar mechanism.

[0027] Aspects of certain embodiments described herein may be implemented as
30 software modules or components. As used herein, a software module or component may include any type of computer instruction or computer executable code located within or on a computer-readable storage medium. A software module may, for instance, comprise one or more physical or logical blocks of computer instructions,

which may be organized as a routine, program, object, component, data structure, etc., that performs one or more tasks or implements particular abstract data types.

[0028] In certain embodiments, a particular software module may comprise disparate instructions stored in different locations of a computer-readable storage

5 medium, which together implement the described functionality of the module. Indeed, a module may comprise a single instruction or many instructions, and may be distributed over several different code segments, among different programs, and across several computer-readable storage media. Some embodiments may be practiced in a distributed computing environment where tasks are performed by a remote processing
10 device linked through a communications network. In a distributed computing environment, software modules may be located in local and/or remote computer-readable storage media. In addition, data being tied or rendered together in a database record may be resident in the same computer-readable storage medium, or across several computer-readable storage media, and may be linked together in fields of a
15 record in a database across a network.

[0029] A time source may be any device that is capable of tracking the passage of time. A variety of types of time sources are contemplated, including a voltage-controlled temperature compensated crystal oscillator (VCTCXO), a phase locked loop oscillator, a time locked loop oscillator, a rubidium oscillator, a cesium oscillator, a
20 microelectromechanical device (MEM), and/or other device capable of tracking the passage of time.

[0030] A time signal is a representation of the time indicated by a time source. A time signal may be embodied as any form of communication for communicating time information. A wide variety of types of time signals are contemplated, including an IRIG
25 protocol, a GPS signal, radio broadcast such as a National Institute of Science and Technology (NIST) broadcast (e.g., radio stations WWV, WWVB, and WWVH), a private radio broadcast and associated protocol, the IEEE 1588 protocol, a network time protocol (NTP) described in RFC 1305, a simple network time protocol (SNTP) described in RFC 2030, and/or another time transmission protocol or system.

30 **[0031]** In some cases, well-known features, structures, or operations are not shown or described in detail. Furthermore, the described features, structures, or operations may be combined in any suitable manner in one or more embodiments. It will also be readily understood that the components of the embodiments, as generally described

and illustrated in the figures herein, could be arranged and designed in a wide variety of different configurations.

[0032] The embodiments of the disclosure will be best understood by reference to the drawings, wherein like parts are designated by like numerals throughout. The

5 components of the disclosed embodiments, as generally described and illustrated in the figures herein, could be arranged and designed in a wide variety of different configurations. Thus, the following detailed description of the embodiments of the systems and methods of the disclosure is not intended to limit the scope of the disclosure, as claimed, but is merely representative of possible embodiments. In other
10 instances, well-known structures, materials, or operations are not shown or described in detail to avoid obscuring aspects of this disclosure. In addition, the steps of a method do not necessarily need to be executed in any specific order, or even sequentially, nor need the steps be executed only once, unless otherwise specified.

[0033] FIG. 1 illustrates an embodiment of a network 100 of intelligent electronic
15 devices (IEDs) in communication with one another via radio links and/or via direct connections. According to the illustrated embodiment, remote substations 120, 130, 140, and 150 may be in communication with a control center 110. Control center 110 may include IEDs 111, 112, and 113 in communication with one another. IEDs 111, 112, and 113 may be configured to monitor, protect, and/or control components in an
20 electric power delivery system. IEDs 111, 112, and 113 may be configured to communicate time-sensitive data with each other, such as synchrophasors. Accordingly, it may be important that the internal time signals of each IED 111, 112, and 113 are synchronized.

[0034] Any of a wide variety of systems and associated protocols may be used to
25 maintain the synchronization of time signals of each of IEDs 111, 112, and 113. For example, IEDs 111, 112, and 113 may utilize SONET, PTP, GPS, and/or NTP as a primary independent time source to maintain the synchronization of each IED.

According to another embodiment, IEDs 111, 112, and 113 may utilize a radio link to synchronize the remaining IEDs. Alternatively, IEDs 111, 112, and 113 may utilize
30 SONET, PTP, NTP, and/or GPS as a primary independent time source and a radio link as a failsafe or backup system for maintaining time signal synchronization.

[0035] According to the illustrated embodiment, a radio transceiver 116 may be configured as a primary radio. Accordingly, primary radio transceiver 116 may transmit a master time signal 118 generated by IED 112. Master time signal 118 may be

transmitted within control center 110 to radio transceiver 117 and radio transceiver 115. Radio transceivers 115 and 117 may utilize master time signal 118 to ensure that that IEDs 111 and 113 are synchronized with respect to IED 112.

[0036] Substation 120 may include an IED 125 in communication with a time receiver 127 (such as a receiver capable of receiving a common time signal such as GPS, WWV, WWVB, WWVH, a time signal common to the network, or the like) and a radio transceiver 126. Substation 120 may be geographically separated from control center 110. According to one embodiment, IED 125 may communicate with an IED in control center 110 via a wired connection (not illustrated), such as Ethernet or SONET. Alternatively, IED 125 may communicate with an IED in control center 110 via radio transceiver 126.

[0037] IED 125 may utilize time receiver 127 to receive an independent time source in order for IED 125 to maintain synchronization with respect to IEDs 111, 112, and 113 within control center 110. According to another embodiment, IED 125 may utilize radio transceiver 126 to receive a master time signal generated by a radio transceiver 115, 116, and/or 117 within control center 110.

[0038] According to some embodiments, highly accurate time signal synchronization is needed, such as for calculating synchrophasors. Accordingly, the radio link between radio transceiver 126 in remote substation 120 and a radio transceiver 115, 116, and/or 117 within control center 110 may utilize a training sequence to determine the propagation delay between IED 125 and an IED 111, 112, or 113 within control center 110. A received master time signal may then be adjusted to compensate for propagation and/or processing delays. Examples of suitable training sequences are described in greater detail below.

[0039] Substation 130 may include an IED 135 in communication with a time receiver 137 (such as a receiver capable of receiving a common time signal such as GPS, WWV, WWVB, WWVH, a time signal common to the network, or the like) and a radio transceiver 136. Substation 130 may be in communication with control center 110 via one or more wired connections and/or via radio transceiver 136. IED 135 may utilize time receiver 137 to receive an independent time signal. According to another embodiment, IED 135 may utilize radio transceiver 136 to receive a master time signal transmitted by a radio transceiver 115, 116, and/or 117 within control center 110. IED 135 may utilize a master time signal received by radio transceiver 136 as a primary

time source or as a failsafe or backup time source for synchronizing its timing signal with those in control center 110.

[0040] Substation 140 may include IED 141 and IED 142 each in communication with a radio transceiver 144 and 145, respectively. IEDs 141 and 142 may maintain their respective time signals synchronized with a master time signal of an IED 111, 112, or 113 within control center 110. As illustrated, radio transceiver 144 may act as a local master radio transceiver within substation 140 by providing a time signal to radio transceiver 145. Using the time signal received by radio transceiver 145, IED 142 may maintain its internal time signal synchronized with respect to IED 141. In order to maintain substation 140 synchronized with respect to control center 110, radio transceiver 144 may receive a master time signal from a radio transceiver located within control center 110, such as one of radio transceivers 115, 116, or 117. Accordingly, radio transceiver 144 may act as a master radio transceiver within substation 140 and as a remote radio transceiver with respect to a radio transceiver 115, 116, or 117 within control center 110.

[0041] Substation 150 may include an IED 155 configured to synchronize its time signal with respect to control center 110 using a master time signal received by radio transceiver 156. Radio transceiver 156 may receive a master time signal from a radio transceiver located within control center 110, such as one of radio transceivers 115, 116, or 117. Alternatively, radio transceiver 156 may receive a master time signal from a radio transceiver located within substation 140, such as one of radio transceivers 144 and 145. In such an embodiment, IED 155 within substation 150 may be synchronized with IEDs 141 and 142 within substation 140, which are in turn synchronized with IEDs 111, 112, and 113 within control center 110. In each of the above embodiments, once IED 155 is synchronized, it may transmit accurate time-stamped data via a wire (not shown) or via radio transceiver 156 to an IED 111, 112, or 113 within control center 110.

[0042] Fig. 2 illustrates a diagram of an electric power distribution system 200. Distribution system 200 includes intelligent electronic devices (IEDs) 292, 294, and 296 utilizing a common time signal to monitor, protect, and/or control system components. Electric power distribution system 200 includes three geographically separated substations 216, 222, and 235. Substations 216 and 235 include generators 212a, 212b, and 212c. The generators 212a, 212b, and 212c generate electric power at a relatively low voltage, such as 12kV. The substations include step-up transformers

214a, 214b, and 214c to step up the voltage to a level appropriate for transmission.

The substations include various breakers 218 and buses 219, 223, and 225 for proper transmission and distribution of the electric power. The electric power may be transmitted over long distances using various transmission lines 220a, 220b, and 220c.

5 Substations 22 and 35 may include step-down transformers 224a, 224b, 224c, and 224d for stepping down the electric power to a level suitable for distribution to loads 230 and 234 using distribution lines 226, 228, and 229.

[0043] IEDs 292, 294, and 296 are configured to protect, control, meter and/or automate certain power system equipment or devices. According to several
10 embodiments numerous IEDs are used in each substation; however, for clarity only a single IED at each substation is illustrated in FIG. 2. IEDs 292, 294, and 296 may be configured to perform various time dependant tasks including, but not limited to, monitoring and/or protecting a transmission line, distribution line, and/or a generator. Other IEDs included in a substation may be configured as bus protection relays,
15 distance relays, communications processors, automation controllers, transformer protection relays, and the like. Each IED or group of IEDs may be configured to communicate on a local area network (LAN) or wide area network (WAN).

[0044] An IED may be configured to calculate and communicate synchrophasors with other IEDs. To accurately compare synchrophasors obtained by geographically
20 separate IEDs, each IED may need to be synchronized with a common time signal with accuracy greater than a millisecond to allow for time-aligned comparisons. According to various embodiments, time synchronization, accurate to the microsecond or nanosecond range, may allow IEDs to perform accurate comparisons of synchrophasors.

25 **[0045]** Each of IEDs 292, 294 and 296 may be in communication with a radio transceiver 293, 295, and 297, respectively. One of radio transceivers 293, 295, and 297 may serve as a master radio transceiver and transmit a master time signal to the other two radio transceivers. IEDs 292, 294, and 296 may utilize the received master time signal to maintain their respective internal time signals synchronized. To maintain
30 highly accurate synchronization, either the transmitting IED or the receiving IEDs may compensate for the propagation delay and/or processing delay of the time signal between the various radio transceivers.

[0046] According to some embodiments, the master time signal transmitted via radio transceivers 293, 295, and 297 may be used as a primary time source. Alternatively,

the master time signal transmitted via radio transceivers 293, 295, and 297 may be a failsafe or backup time source to another system, such as a GPS or SONET system.

[0047] FIG. 3A illustrates a diagram 300 of one embodiment of the synchronization of a remote IED (right side) with a master IED (left side) via a radio signal, in which the master IED compensates for propagation and/or processing delays. A method for determining and then compensating for propagation delays and/or processing times may provide for highly accurate time synchronization over a radio link while minimizing the required bandwidth. Existing protocols, such as PTP and NTP may provide inadequate accuracy, not be readily adaptable to wireless radio transmissions, and/or consume significantly more bandwidth.

[0048] As illustrated, at time t_1 the master IED transmits a query via a radio link to the remote IED. The query may contain a request that the remote IED respond as quickly as possible. Due to the propagation delay of the radio signal, the remote IED receives the query at time t_2 . The difference between t_1 and t_2 may depend on the distance between the master IED and the remote IED. The remote IED may respond at time t_3 with a response. The difference between t_2 and t_3 may represent the processing time it takes the remote IED to receive the request and provide a response. According to various embodiments, for increased accuracy, the response transmitted from the remote IED to the master IED may provide the master IED with the processing delay ($t_3 - t_2$).

[0049] Once the response is received, at t_4 , the master IED may calculate the propagation delay of a radio signal between the master IED and the remote IED. As illustrated, the propagation delay t_{delay} may be calculated using the following equation:

$$t_{\text{delay}} = \frac{(t_4 - t_1) - (t_3 - t_2)}{2} \quad \text{Equation 1}$$

In Equation 1, t_{delay} is the propagation delay of the signal transmitted from the master IED to the remote IED. According to the embodiment illustrated in FIG. 3A, the propagation delay is equal to one half of the difference between when the time the response from the remote IED is received, t_4 , and when the master IED transmitted the original query, t_1 , less the processing delay ($t_3 - t_2$) of the remote IED. Depending

on the accuracy needed, in some embodiments, the processing delay may be omitted and/or approximated.

[0050] Once the propagation delay, t_{delay} , has been determined, the master IED may transmit an adjusted time signal to the remote IED. At time t_5 , the master IED

5 may transmit a command for the remote IED to set its time signal to a time equal to $t_5 + t_{\text{delay}}$. Due to the propagation delay, the remote IED may receive the command to set its network clock to $t_5 + t_{\text{delay}}$ at the correct time to synchronize its time signal with that of the master IED.

[0051] FIG. 3B illustrates a diagram 350 of an embodiment of the synchronization of a remote IED (right side) with a master IED (left side) via a radio signal in which the remote IED compensates for propagation and/or processing delays. As illustrated, a remote IED may transmit a request for a secondary time signal via a radio transceiver at time t_1 . Due to the propagation delay of the radio signal, master IED may receive the request at time t_2 . At time t_3 , the master IED may transmit the secondary time signal to the remote IED. Depending on the desired accuracy and significance of the processing time, the master IED may also transmit the processing time. The processing time may be the difference between when the master IED received the request for the secondary time signal and when it actually transmitted the secondary time signal, i.e. $(t_3 - t_2)$. The remote IED may receive the secondary time signal (which the master IED indicated was t_3) after a propagation delay, t_{delay} . The remote IED may calculate the propagation delay using Equation 1 above.

[0052] At time t_4 , the remote IED may synchronize its time signal with the actual time, t_{actual} , equal to $t_3 + t_{\text{delay}}$. According to various embodiments, the remote IED may periodically communicate via a radio signal with the master IED in order to maintain synchronization. The remote IED may re-determine the propagation delay for each synchronization event, or it may rely on past determinations.

[0053] Figure 3C illustrates a diagram 375 of an embodiment of the synchronization of a remote IED (right side) with a master IED (left side) via a radio signal in which the remote IED does not compensate for propagation and/or processing delays. As illustrated, the master IED is associated with a time receiver that receives a common time signal as described herein. The common time signal may provide a common time

reference such as a pulse-per second (PPS). Alternatively, the master IED may use a time signal from the time receiver to create its own reference such as a PPS. The IED may provide a common time signal including a PPS to the radio transceiver. The radio transceiver may be configured to synchronize its transmit and receive phases with respect to the time signal received from the master IED and/or the time receiver. For example, the radio transceiver may be configured to always begin its transmission at a certain point in the time signal such as a PPS. Accordingly, the transmission will begin at t_1 , the PPS of the common time signal. Upon receiving the transmission at t_2 , the remote radio transceiver may be configured to provide a synchronizing pulse for its associated remote IED. Again at t_3 (upon the next PPS) the radio transceiver associated with the master IED begins its transmission, and upon receiving the transmission at t_3 , the remote radio transceiver may be configured to provide a synchronizing pulse for its associated remote IED.

[0054] In one embodiment, the master and remote IEDs may have calculated a propagation delay from the master IED to the remote IED using, for example, a synchronization technique as illustrated in Figures 3A and/or 3B. The remote IED could then synchronize its internal time to that of the master IED using the PPS originating from the transmit time of the master IED and the known propagation delay. That is, $t_{\text{actual}} = t_2 + t_{\text{delay}}$ (where t_{delay} is calculated as illustrated in Figure 3B).

[0055] FIG. 4 illustrates a functional block diagram of an embodiment of an IED timing module 404. IED timing module 404 may be configured to receive, distribute, and/or determine a common time signal. IED timing module 404 may include more or less functionality than the embodiment shown in FIG. 4. As illustrated, IED timing module 404 may include a local time source 402 that provides a local time signal and a network clock 405 for establishing a common time signal.

[0056] IED timing module 404 may include a pair of line ports 412 and 414 for communications with a WAN or LAN. Time information may be shared over a network and may also be fed into the network clock 405. Further, IED timing module 404 may include a time receiver 410 (such as a receiver capable of receiving a common time signal such as GPS, WWV, WWVB, WWVH, a time signal common to the network, or the like) for receiving a independent time signal from a common time system via an antenna 420 (such as capable of receiving a GPS signal, or other common time signal). The received independent time signal may also be communicated to the network clock

405. An additional external time source 406 may communicate with another time port such as an IRIG input 408. An IED-to-IED radio receiver 455 may be in communication with an antenna 457 configured to receive a time signal from another IED. An IED-to-IED radio transmitter 465 may be in communication with an antenna 467 configured to transmit a time signal to another IED. According to various embodiments, IED-to-IED radio receiver 455, IED-to-IED radio transmitter 465, and/or another component of IED timing module 404 may be configured to calculate a propagation delay of the radio signals transmitted to or received from another IED.

[0057] The various time information from the WAN (from line ports 412 and/or 414), time receiver 410, IRIG input 408, and IED-to-IED radio receiver 455 may be processed by a multiplexor (MUX) 450 before time information is presented to network clock 405. Network clock 405 functions to determine a common time signal for use by the various devices connected to IED timing module 404. Time information is then communicated from the network clock 405 to the various devices 422 using IRIG protocol (via the IRIG-B output 416) or to various devices 425 using another protocol 413 such as IEEE 1588 using Ethernet drop ports 418. The Ethernet drop ports 418 may also include network communications to the various devices connected to IED timing module 404.

[0058] IED timing module 404 may also comprise a time signal drift adjustment subsystem 424, which may be configured to track drift rates associated with various external time sources with respect to local time source 402. Time signal drift adjustment subsystem 424 may also generate a weighting factor for each of the plurality of time signals. Time signal drift adjustment subsystem 424 may also communicate time signals according to a variety of protocols. In various embodiments, time signal drift adjustment subsystem 424 may be implemented using a processor in communication with a computer-readable storage medium containing machine executable instructions. In other embodiments, time signal drift adjustment subsystem 424 may be embodied as hardware, such as an application-specific integrated circuit or a combination of hardware and software.

[0059] FIG. 5 illustrates an embodiment of a function block diagram of an IED 500 configured to distribute and/or receive a common time signal via a radio link. As illustrated, IED 500 may include a processor 530, memory 540 (RAM), a network interface 550, and a radio transceiver 555 in communication with computer-readable storage medium 570 via bus 520. Computer-readable storage medium 570 may include one or more of modules 581-593 configured to allow for accurate time signal

synchronization using a radio signal by accounting for the propagation delay of the radio signal. According to various embodiments, one or more of modules 581-593 may be implemented using firmware and/or hardware. According to various embodiments, the implementation of one or more of modules 581-593 as hardware and/or firmware
5 may allow for increased accuracy. Additionally, one or more of software modules 581-593 may be combined as a single module and/or separated into a plurality of sub-modules.

[0060] According to various embodiments, a time signal module 581 may be configured to maintain a local time signal for IED 500. Accordingly, for a master IED,
10 time signal module 581 may maintain a master time signal utilized by one or more remote IEDs to synchronize the remote IEDs' time signals. For a remote IED, time signal module 581 may be configured to maintain a local time signal used only by the remote IED and possibly synchronized with a master time signal of a master IED.

[0061] According to various embodiments, an independent time source receiver
15 module 589 may be configured to receive an independent time signal trusted as providing an accurate global time signal. Remote IEDs and master IEDs may synchronize the time signal maintained by their respective time signal modules 581 with an independent time signal received by independent time receiver module 589. For example, independent time source receiver module 589 may be configured to receive a
20 time signal from a global positioning system or other accurate time source. According to some embodiments, independent time source receiver module 589 may receive a time signal from a time source, such as a VCTCXO, a phase locked loop oscillator, a time locked loop oscillator, a rubidium oscillator, a cesium oscillator, a microelectromechanical device (MEM), and/or other device capable of tracking the
25 passage of time.

[0062] Time signal synchronization module 583 may be configured to allow a master IED to transmit a radio signal requesting a response from a remote IED and receive a response after a time delay corresponding to the propagation delay between the two IEDs. Propagation delay calculation module 585 may then determine the propagation
30 delay between the master IED and the remote IED. Time signal adjustment module 587 may then adjust the master time signal maintained by time signal module 581 and transmit the adjusted time signal to the remote IED. According to some embodiments, a processing delay calculation module 591 may be configured to account for the processing delay of the remote IED. The adjusted time signal may be further adjusted

to account for the processing delay prior to transmission. According to some embodiments, processing delay calculation module 591 may utilize processing delay information provided to the master IED by the remote IED via a radio signal, pre-programmed processing delay information, and/or estimated processing delay information.

[0063] Alternatively, time signal synchronization module 583 may be configured to allow a remote IED to transmit a radio signal requesting a master time signal from a master IED. Time signal synchronization module 583 may then receive a master time signal from a master IED. Propagation delay calculation module 585 may then determine the propagation delay between the master IED and the remote IED. Time signal adjustment module 587 may be configured to adjust the received master time signal by the propagation delay and synchronize the local time signal with the adjusted time signal. According to some embodiments, a processing delay calculation module 591 may be configured to account for the processing delay of the master IED. The adjusted time signal may be further adjusted to account for the processing delay. According to some embodiments, processing delay calculation module 591 may utilize processing delay information provided to the remote IED by the master IED via a radio signal, pre-programmed processing delay information, and/or estimated processing delay information.

[0064] According to various embodiments, the radio transceivers used by master and remote IEDs may also be utilized to communicate data relating to an electric power distribution system. For example, data communications module 593 may be utilized to transfer data between two or more IEDs for metering, controlling, and/or protecting one or more components in an electric power distribution system.

[0065] FIG. 6A illustrates a flow chart of an embodiment of a method 600 for a master IED to transmit an adjusted time signal to a remote IED via a radio signal in order for the remote IED to synchronize its time signal with a time signal of the master IED. As illustrated, a master IED may transmit a request for a response to a remote IED via a radio link at a time t_1 , at 605. Due to a propagation delay, the remote IED may receive the request at a time t_2 , at 610. The remote IED may respond to the request at a time t_3 via the radio link and provides the processing time $(t_3 - t_2)$, at 615. Due to the propagation delay, the master IED may receive the response at a time t_4 , at 620

[0066] The master IED may then determine the propagation delay between the master IED and the remote IED using equation 1 above, at 625. The master IED may then transmit a time signal adjusted by the propagation delay time to the remote IED via the radio link, at 630. The remote IED may then synchronize its time signal with the time
 5 signal of the master IED using the adjusted time signal, at 635.

[0067] FIG. 6B illustrates a flow chart of an embodiment of an alternative method 650 for a remote IED to synchronize its time signal with a time signal of a master IED via a radio link. As illustrated, a remote IED may transmit a request for a time signal to a master IED via radio link at a time t_1 , at 655. The master IED may then receive the
 10 request at a time t_2 , at 660. At time t_3 , the master IED may transmit the time signal and a processing delay ($t_3 - t_2$) via the radio link to the remote IED, at 665. The remote IED may receive the response, including the time signal and the processing delay, at a time t_4 via the radio link, at 670. The remote IED may then determine the propagation delay between the master IED and the remote IED, at 675. The remote IED may then
 15 synchronize its time signal with the time signal of the master IED using the determined propagation delay, at 680.

[0068] FIG. 7 illustrates a flow chart of an embodiment of a method 700 of using a primary independent time source to synchronize a remote IED and relying on a secondary time signal distributed via a radio link as a failsafe. A remote IED may
 20 receive an accurate independent time source signal, at 710. According to various embodiments, the remote IED may include an independent time source signal receiver configured to receive an independent time source signal from any of a wide variety of time sources, including a VCTCXO, a phase locked loop oscillator, a time locked loop oscillator, a rubidium oscillator, a cesium oscillator, a microelectromechanical device
 25 (MEM), and/or other device capable of tracking the passage of time. The remote IED may synchronize its time signal to the independent time source, at 720. The remote IED may periodically or continually check to see if it has lost communication with the independent time source, at 730. If the IED has not lost communication with the independent time source, at 730, then it may continue to synchronize its time signal
 30 with that of the independent time source.

[0069] If the remote IED loses communication with the independent time source, at 730, it may receive a time signal from a master IED via a radio link, at 740. The time signal received from the master IED may have already been adjusted to account for

propagation delays and/or processing delays. Alternatively, the remote IED may adjust the received time signal to account for propagation and/or processing delays. Using the adjusted time signal, the remote IED may then synchronize its time signal with the time signal of the master IED, at 750.

- 5 **[0070]** The above description provides numerous specific details for a thorough understanding of the embodiments described herein. However, those of skill in the art will recognize that one or more of the specific details may be omitted, modified, and/or replaced by a similar process or system.

What is claimed:

1. An intelligent electronic device (IED) configured to transmit a time signal adjusted by a calculated propagation delay via a radio link, the IED comprising:
5 a radio transmitter configured to transmit radio signals;
a radio receiver configured to receive radio signals;
a time signal module configured to maintain a master time signal;
a time signal synchronization module in communication with the radio transmitter and the radio receiver, the time signal synchronization module configured to:
10 transmit a radio signal via the radio transmitter requesting a response;
and
receive the response via the radio receiver after a first time delay;
a propagation delay calculation module configured to determine a propagation delay associated with the response; and
15 a time signal adjustment module configured to generate an adjusted time signal based upon the master time signal and the propagation delay, and
wherein the adjusted time signal is transmitted via the radio transmitter.

2. The IED of claim 1, further comprising a processor and a computer-
20 readable storage medium in communication with the processor; and
wherein the propagation delay calculation module and the time signal adjustment module comprise software modules within the computer-readable storage medium.

3. The IED of claim 1, further comprising an independent time source signal
25 receiver module configured to receive an independent time signal and provide the independent time signal to the time signal module; and
wherein the time signal module is configured to synchronize the master time signal with the independent time signal.

30 4. The IED of claim 3, wherein the independent time source signal receiver module is configured to receive an independent time signal from a global positioning system.

5. The IED of claim 1, wherein the time signal module comprises a time source configured to generate the master time signal.

6. The IED of claim 1, wherein the response received by the time signal synchronization module comprises a processing delay corresponding to the difference between when a second IED received the request for a response and when the second IED transmitted the response; and

wherein determining a propagation delay associated with the response comprises subtracting the processing delay from the first time delay and dividing the difference in half.

7. The IED of claim 1, further comprising a data communications module configured to transmit data via the radio transmitter, the data relating to the monitoring of at least one component in an electric power delivery system.

8. The IED of claim 1, wherein the time signal adjustment module is configured to generate the adjusted time signal with sufficient accuracy to allow for time signal synchronization to within at least 1 millisecond.

9. An intelligent electronic device (IED) configured to adjust a time signal received via a radio signal from a second IED by a calculated propagation delay, comprising:

a radio transmitter configured to transmit radio signals;

a radio receiver configured to receive radio signals;

a time signal module configured to maintain a local time signal;

a time signal synchronization module configured to:

transmit a request via the radio transmitter for a master time signal; and

receive the master time signal via the radio receiver after a first time delay; and

a propagation delay calculation module configured to determine a propagation delay associated with the received master time signal; and

a time signal adjustment module configured to adjust the received master time signal by the propagation delay and use the adjusted time signal to synchronize the local time signal with the master time signal.

10. The IED of claim 9, further comprising a processor and a computer-readable storage medium in communication with the processor; and

wherein the propagation delay calculation module and the time signal adjustment
5 module comprise software modules within the computer-readable storage medium.

11. The IED of claim 9, further comprising an independent time source signal receiver module configured to receive an independent time signal and provide the independent time signal to the time signal module;

10 wherein the time signal module is configured to synchronize the local time signal with the independent time signal; and

wherein the time signal adjustment module is configured to use the adjusted time signal to synchronize the local time signal with the master time signal only when the independent time source signal receiver module loses reception of the independent
15 time signal.

12. The IED of claim 11, wherein the independent time source signal receiver module is configured to receive an independent time source signal from a global positioning system.

20

13. The IED of claim 9, wherein the time signal module comprises a time source configured to generate the local time signal.

14. The IED of claim 9, wherein the time signal synchronization module is
25 further configured to receive a processing delay, the processing delay corresponding to the difference between when a second IED received the request for the master time signal and when the second IED transmitted the master time signal; and

wherein determining a propagation delay associated with the received master time signal comprises subtracting the processing delay from the first time delay and
30 dividing the difference in half.

15. The IED of claim 9, further comprising a data communications module configured to transmit data via the radio transmitter, the data relating to the monitoring of at least one component in an electric power delivery system.

16. The IED of claim 9, wherein the time signal adjustment module is configured to synchronize the local time signal with the master time signal to within at least 1 millisecond.

5

17. A method for synchronizing a first intelligent electronic device (IED) and a second IED, comprising the first IED:

transmitting a radio signal to the second IED requesting a response from the second IED;

10 receiving a response via a radio signal from the second IED after a first time delay;

determining a propagation delay between the first IED and the second IED by dividing the first time delay in half; and

15 transmitting a time signal of the first IED adjusted by the propagation delay to the second IED via a radio signal in order for the second IED to synchronize a time signal of the second IED with the time signal of the first IED.

18. The method of claim 17, wherein receiving a response from the second IED after a first time delay further comprises:

20 receiving a response including a processing delay corresponding to the difference between when the second IED received the request from the first IED and when the second IED transmitted the response to the first IED; and

wherein determining a propagation delay between the first IED and the second IED by dividing the first time delay in half further comprises:

25 subtracting the processing delay from the first time delay prior to dividing the first time delay in half.

19. The method of claim 17, further comprising detecting the loss of communication between the first IED and a primary independent time source; and

30 wherein transmitting the time signal of the first IED adjusted by the propagation delay to the second IED occurs subsequent to the detection of the loss of communication between the first IED and the primary independent time source.

20. The method of claim 19, wherein the primary independent time source comprises a global positioning system.

21. The method of claim 17, further comprising the first IED transmitting data
5 to the second IED via a radio signal, the data relating to the monitoring of at least one component in an electric power delivery system.

22. The method of claim 17, wherein the time signal of the first IED adjusted
by the propagation delay transmitted to the second IED is configured to allow the
10 second IED to synchronize the time signal of the second IED to the time signal of the first IED to within at least 1 millisecond.

23. A method for synchronizing a first intelligent electronic device (IED) and a second IED, comprising the first IED:

15 transmitting a radio signal to the second IED requesting a time signal of the second IED;

receiving a radio signal response from the second IED after a first time delay, the response including the time signal of the second IED;

determining a propagation delay between the first IED and the second IED by
20 dividing the first time delay in half; and

synchronizing a time signal of the first IED with the time signal of the second IED using the determined propagation delay.

24. The method of claim 23, wherein receiving a response from the second
25 IED after a first time delay further comprises:

receiving a response including a processing delay corresponding to the difference between when the second IED received the request from the first IED and when the second IED actually transmitted the response to the first IED; and

wherein determining a propagation delay between the first IED and the second
30 IED by dividing the first time delay in half further comprises:

subtracting the processing delay from the first time delay prior to dividing the first time delay in half.

25. The method of claim 23, further comprising detecting the loss of communication between the first IED and a primary independent time source; and wherein synchronizing the time signal of the first IED with the received time signal of the second IED adjusted by the propagation delay occurs subsequent to the detection of the loss of communication between the first IED and the primary independent time source.

26. The method of claim 25, wherein the primary independent time source comprises a global positioning system.

27. The method of claim 23, further comprising the first IED transmitting data to the second IED via a radio signal, the data relating to the monitoring of at least one component in an electric power delivery system.

28. The method of claim 23, wherein synchronizing a time signal of the first IED with the received time signal of the second IED using the determined propagation delay is accurate to within at least 1 millisecond.

29. An intelligent electronic device (IED) configured to adjust a time signal received via a radio signal from a second IED by a calculated propagation delay, comprising:

a radio transmitter configured to transmit radio signals;

a radio receiver configured to receive radio signals;

a time signal module configured to maintain a local time signal;

a time signal synchronization module configured to receive a master time signal from the second IED transmitted at a known interval via the radio receiver after a propagation time delay; and

a time signal adjustment module configured to adjust the received master time signal by the propagation delay and use the adjusted time signal to synchronize the local time signal with the master time signal.

30. The IED of figure 29, wherein the known interval comprises a pulse-per-second (PPS)

FIG. 1



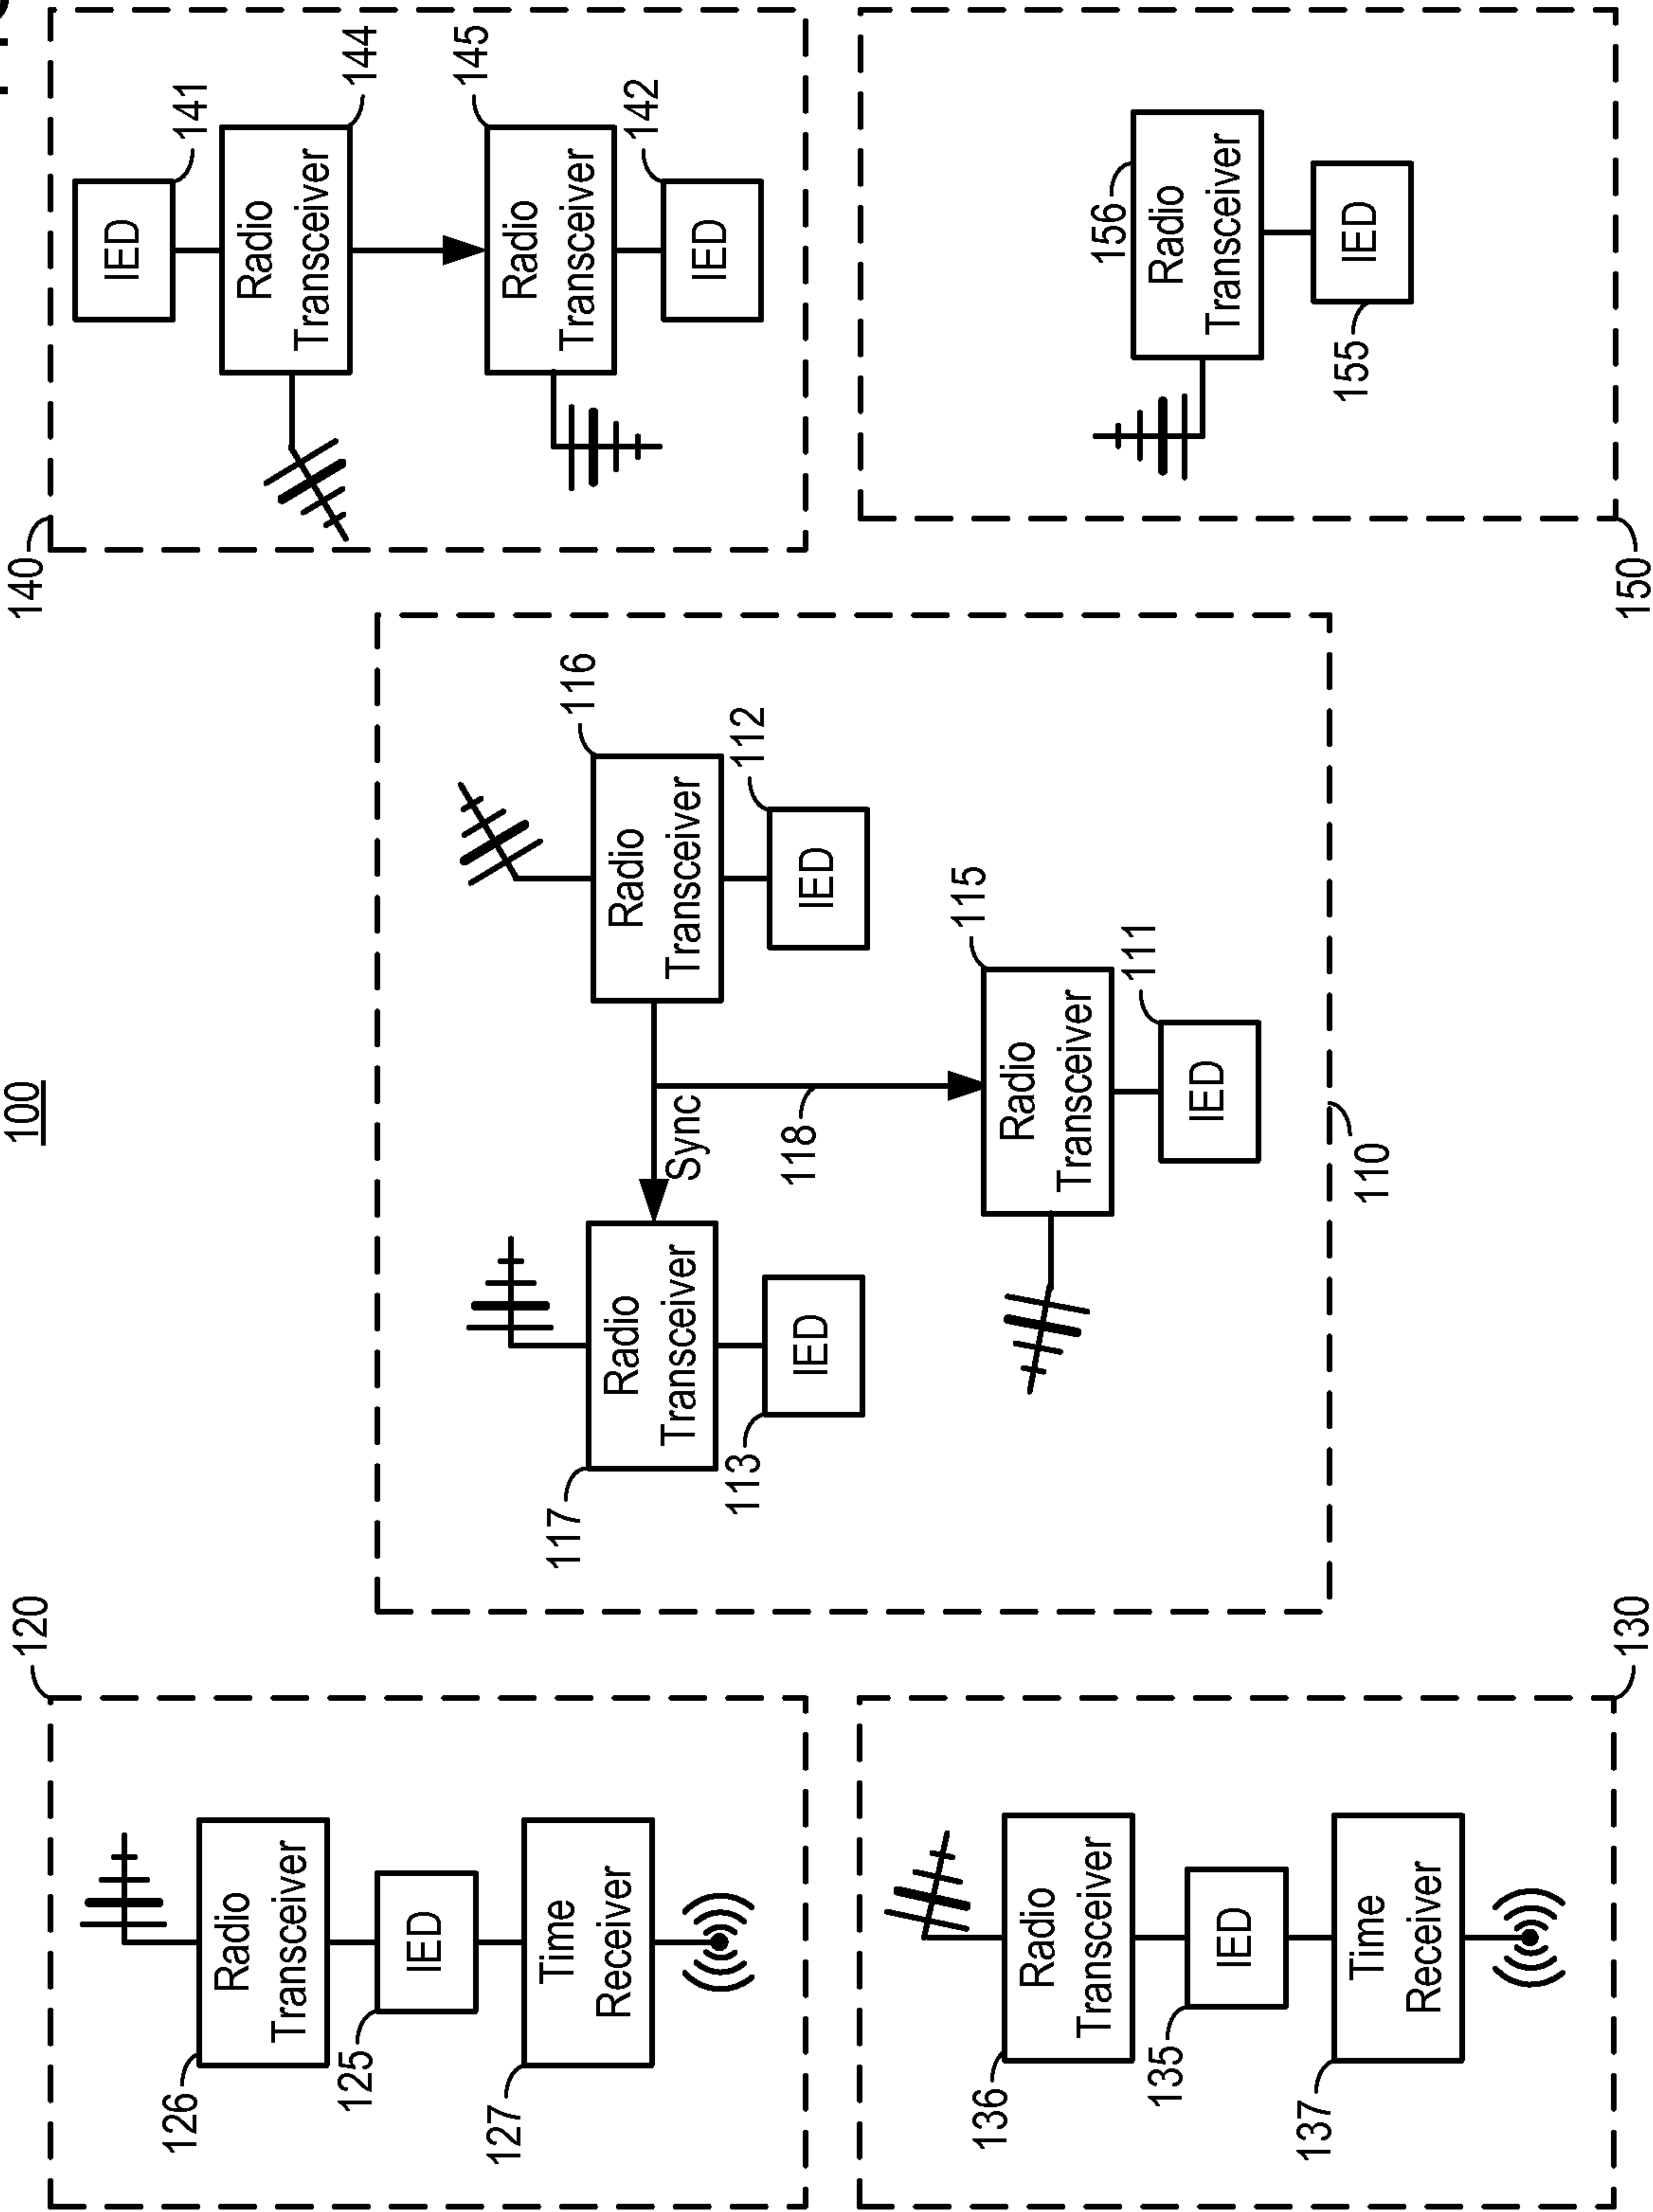


FIG. 2

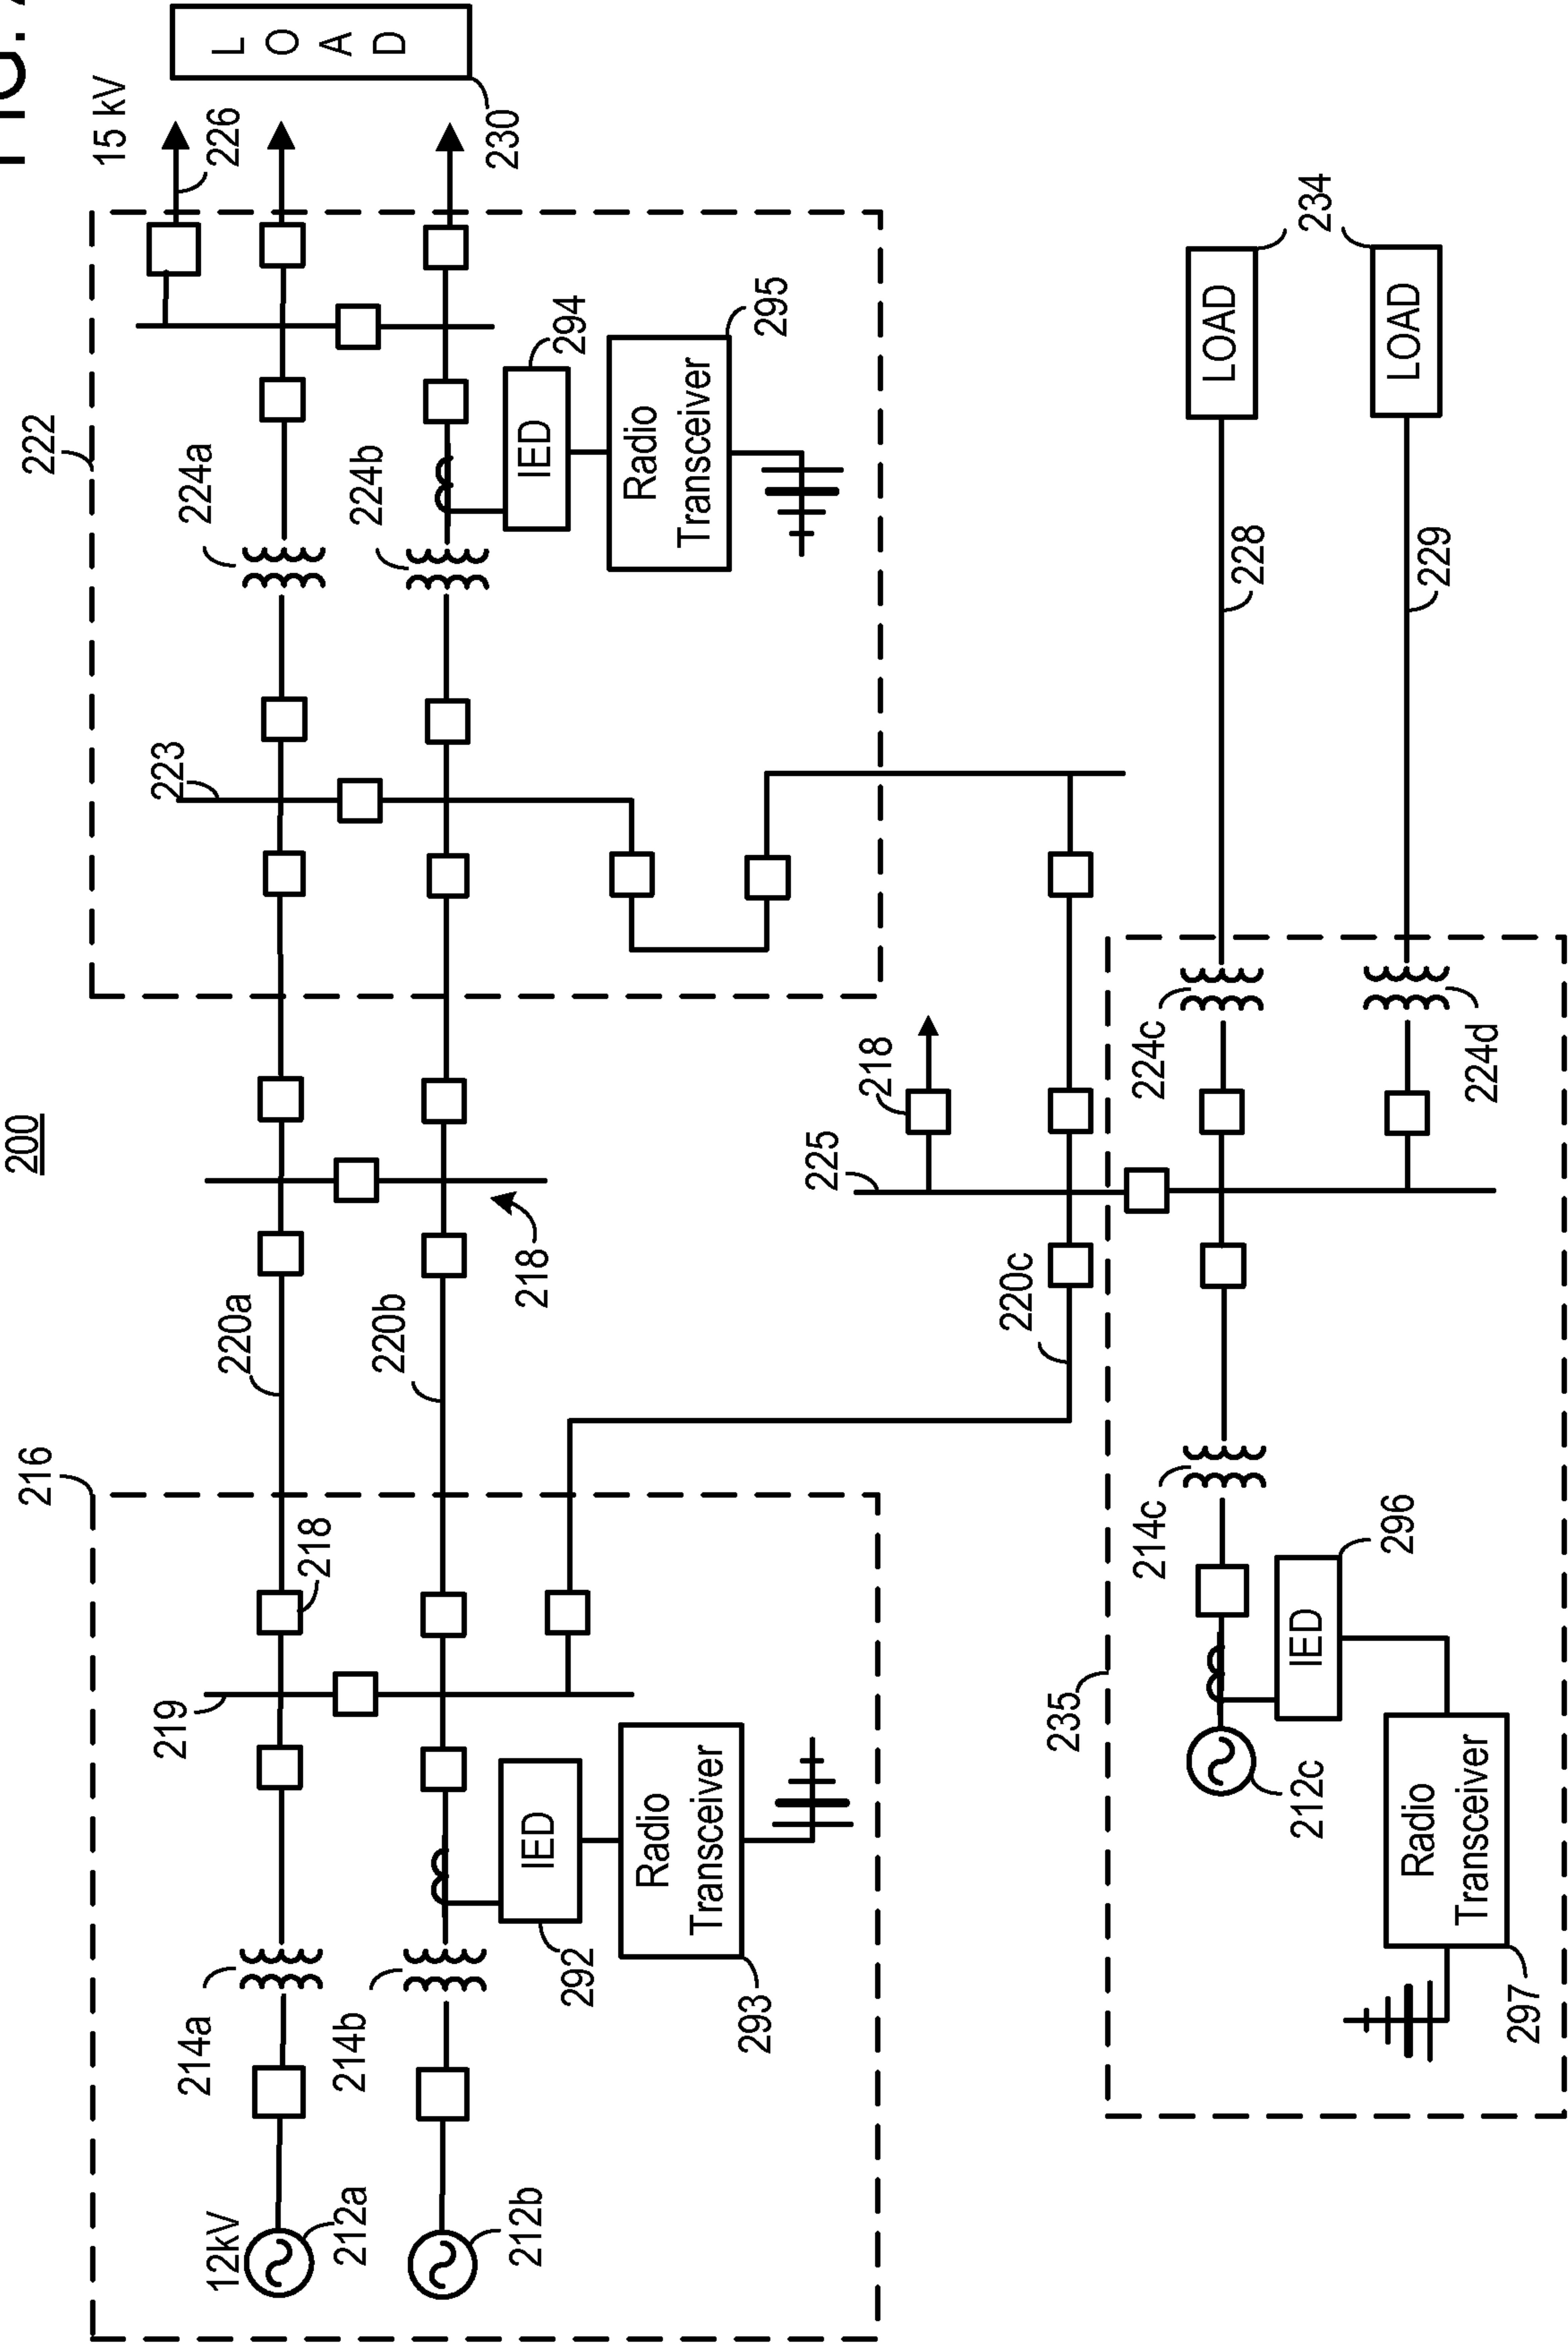

3/10

FIG. 3A

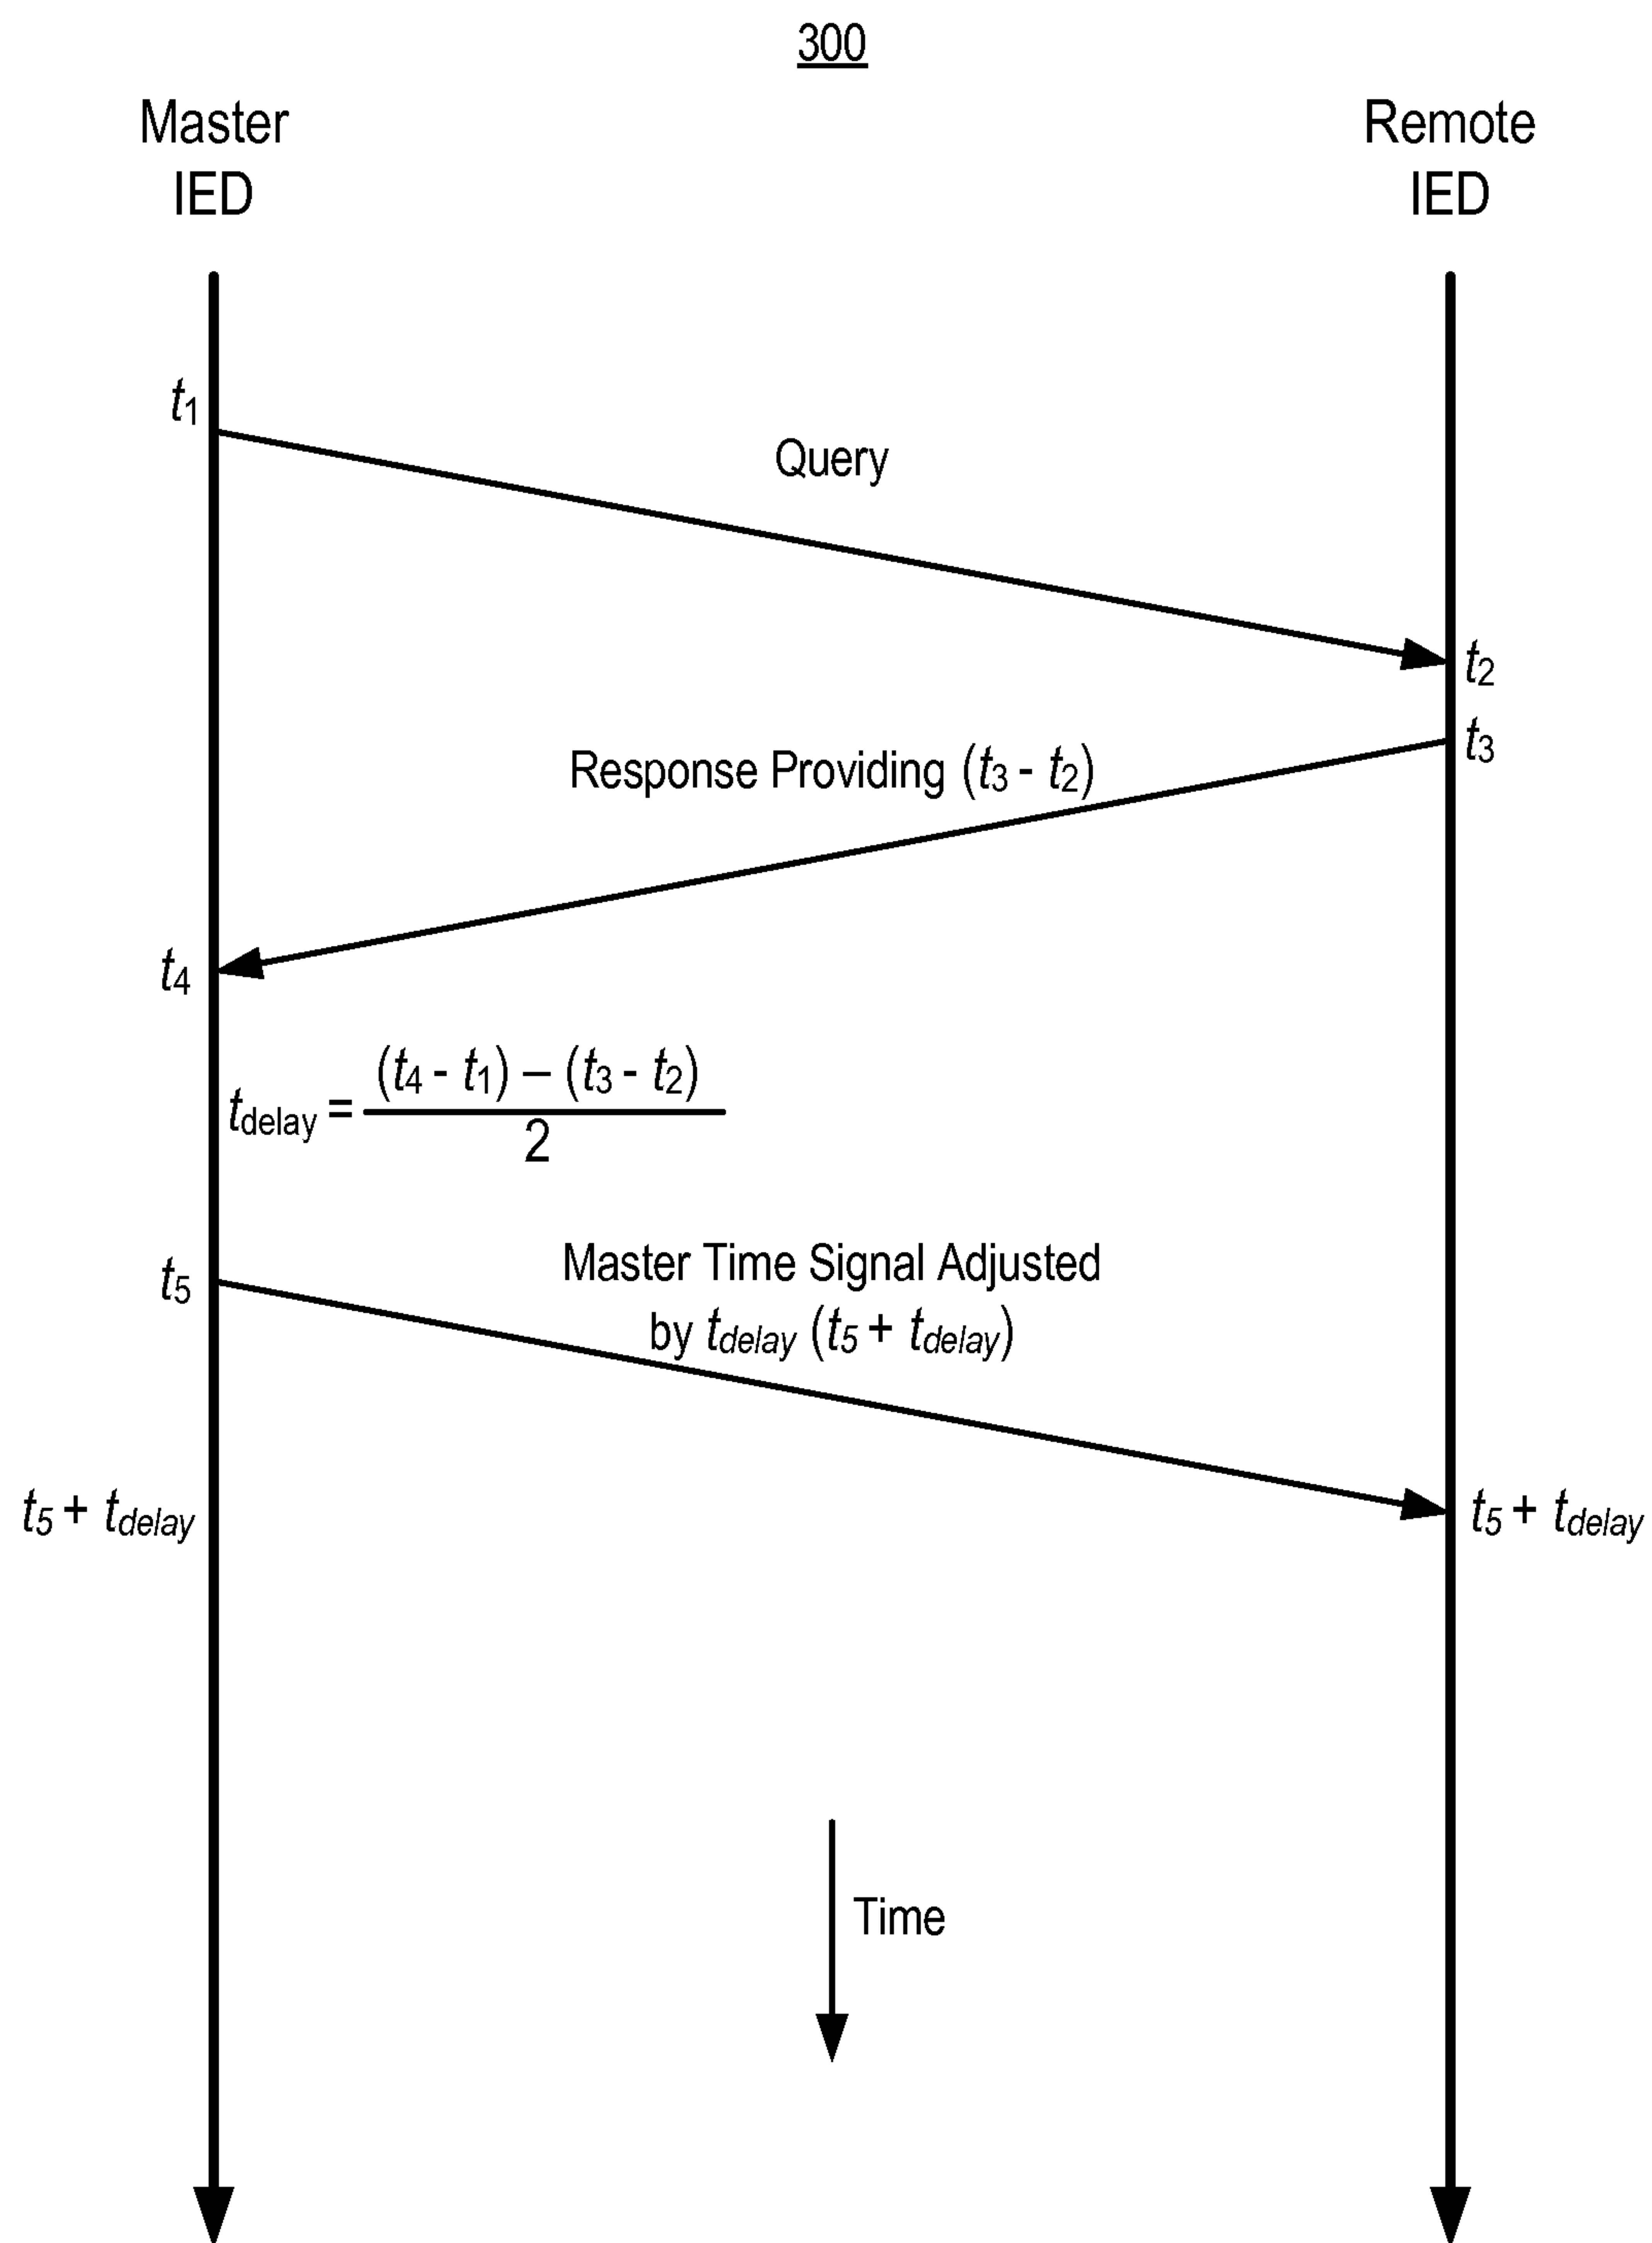

4/10

FIG. 3B

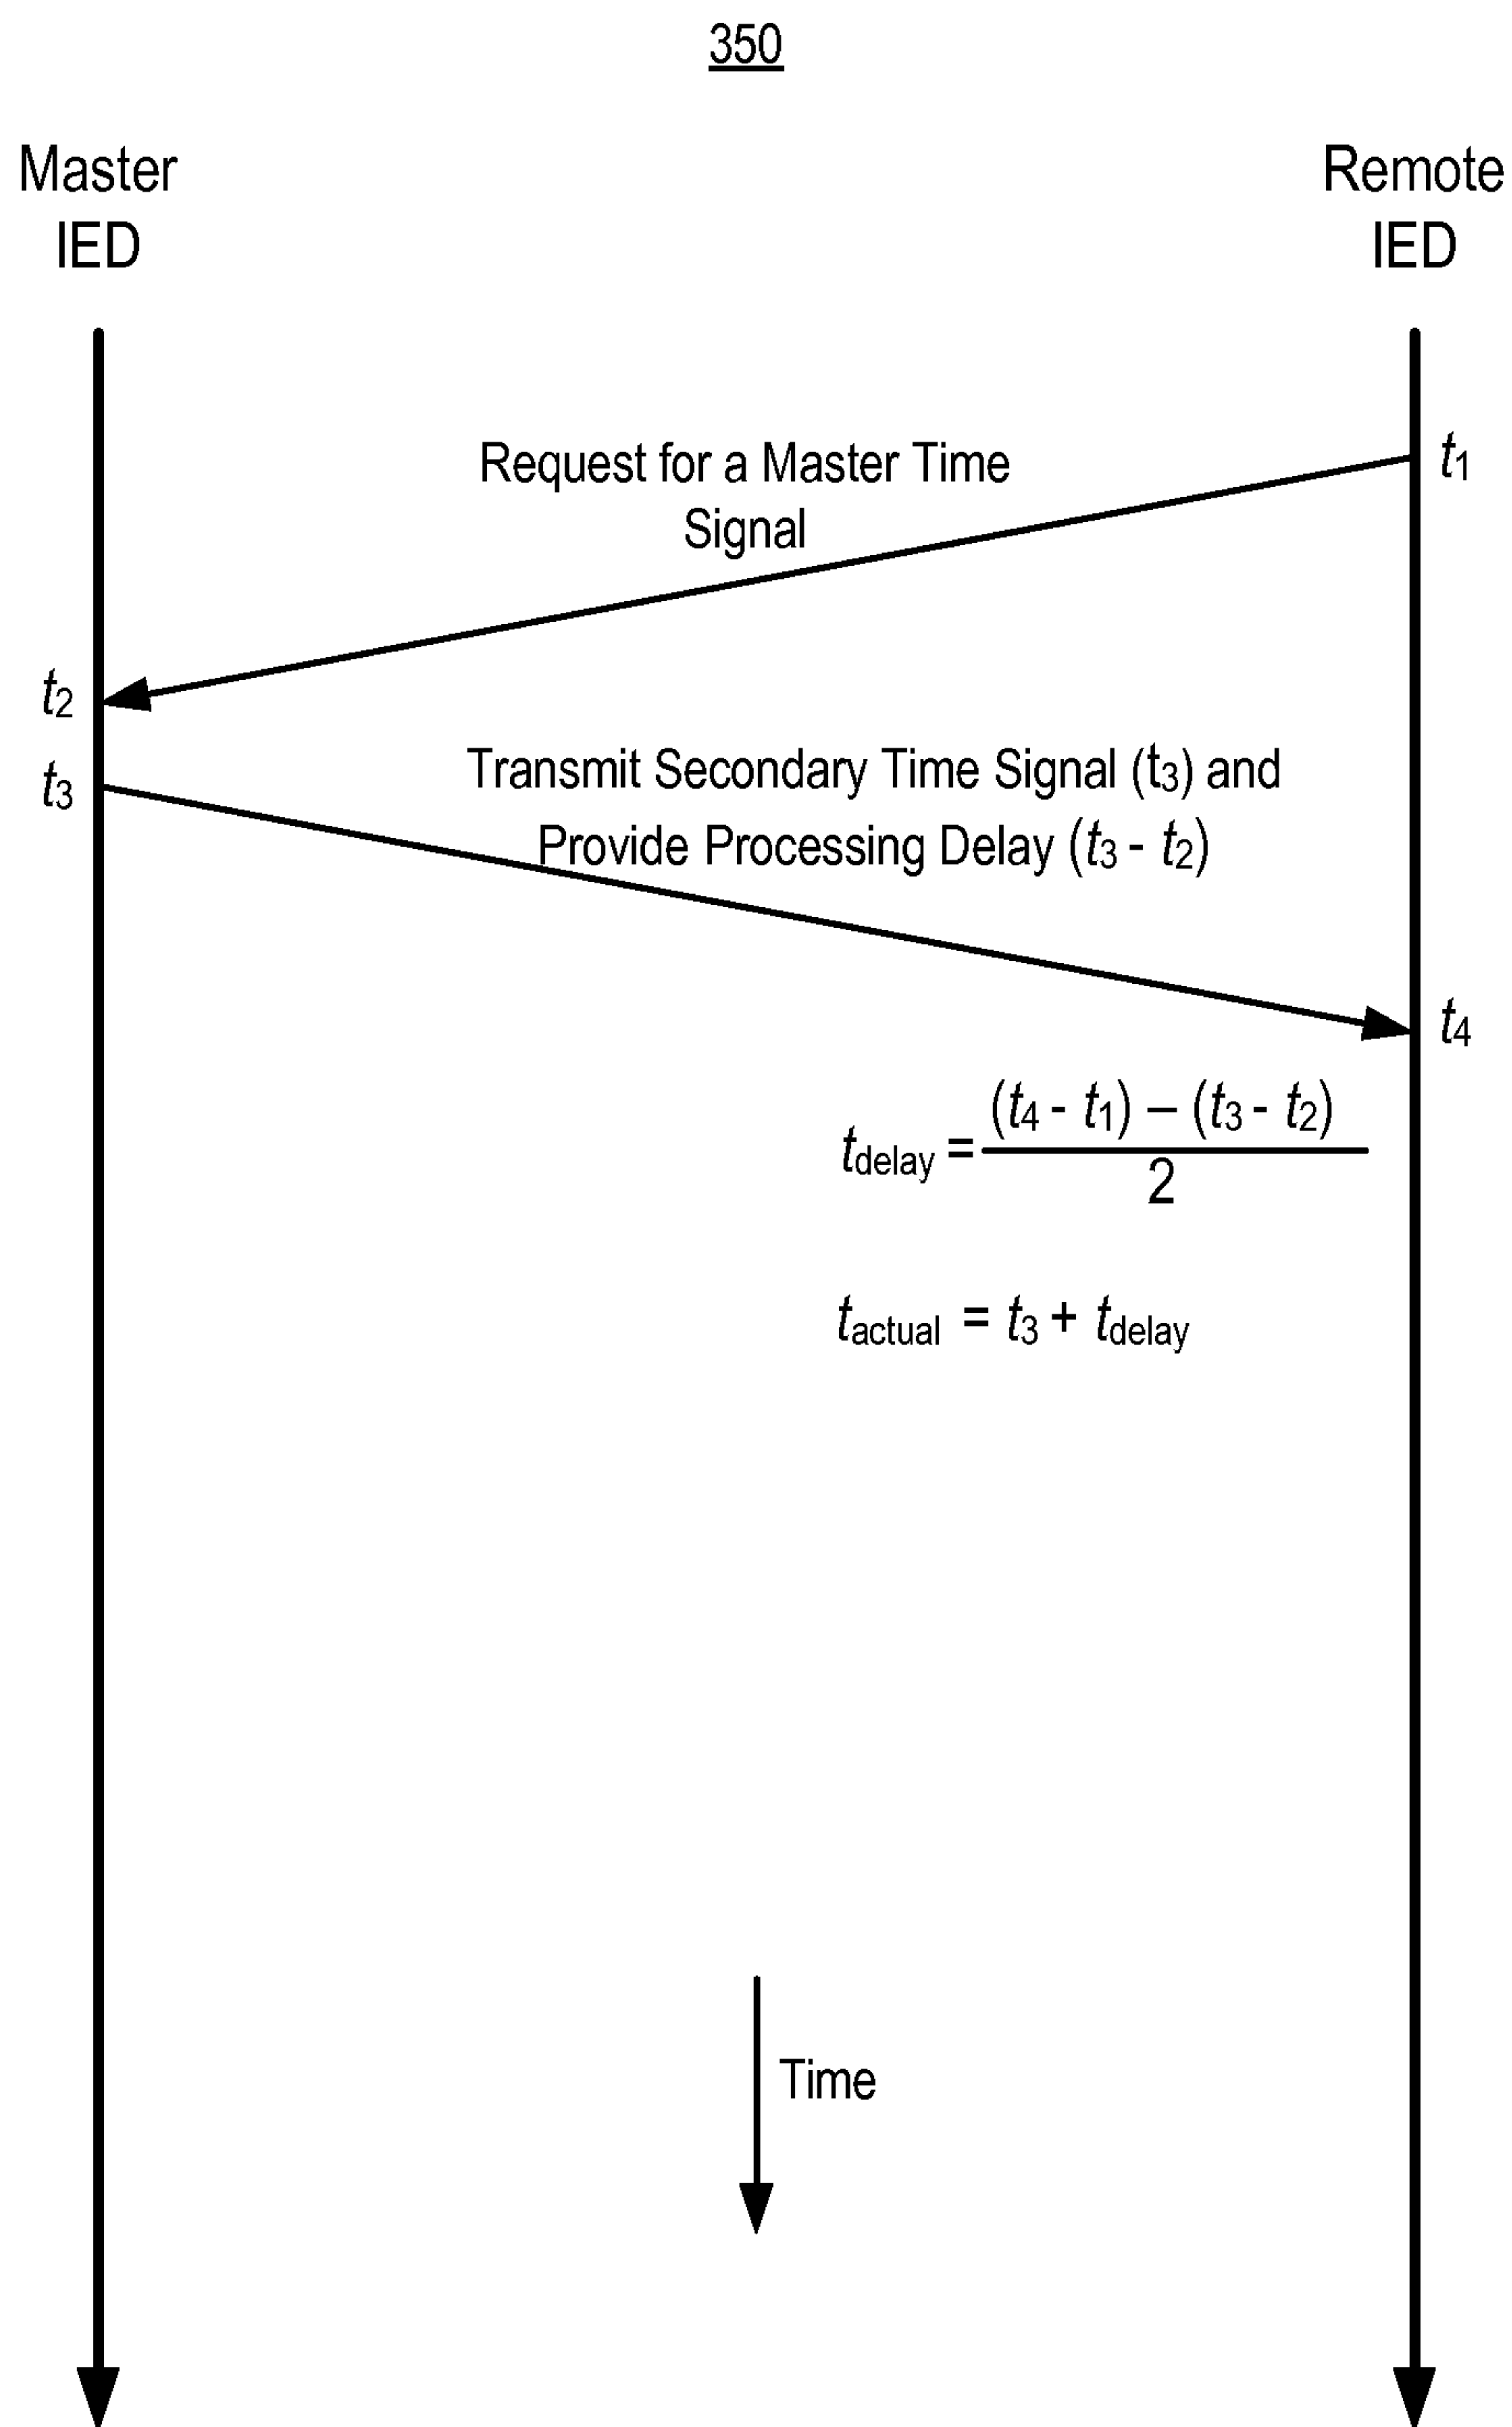
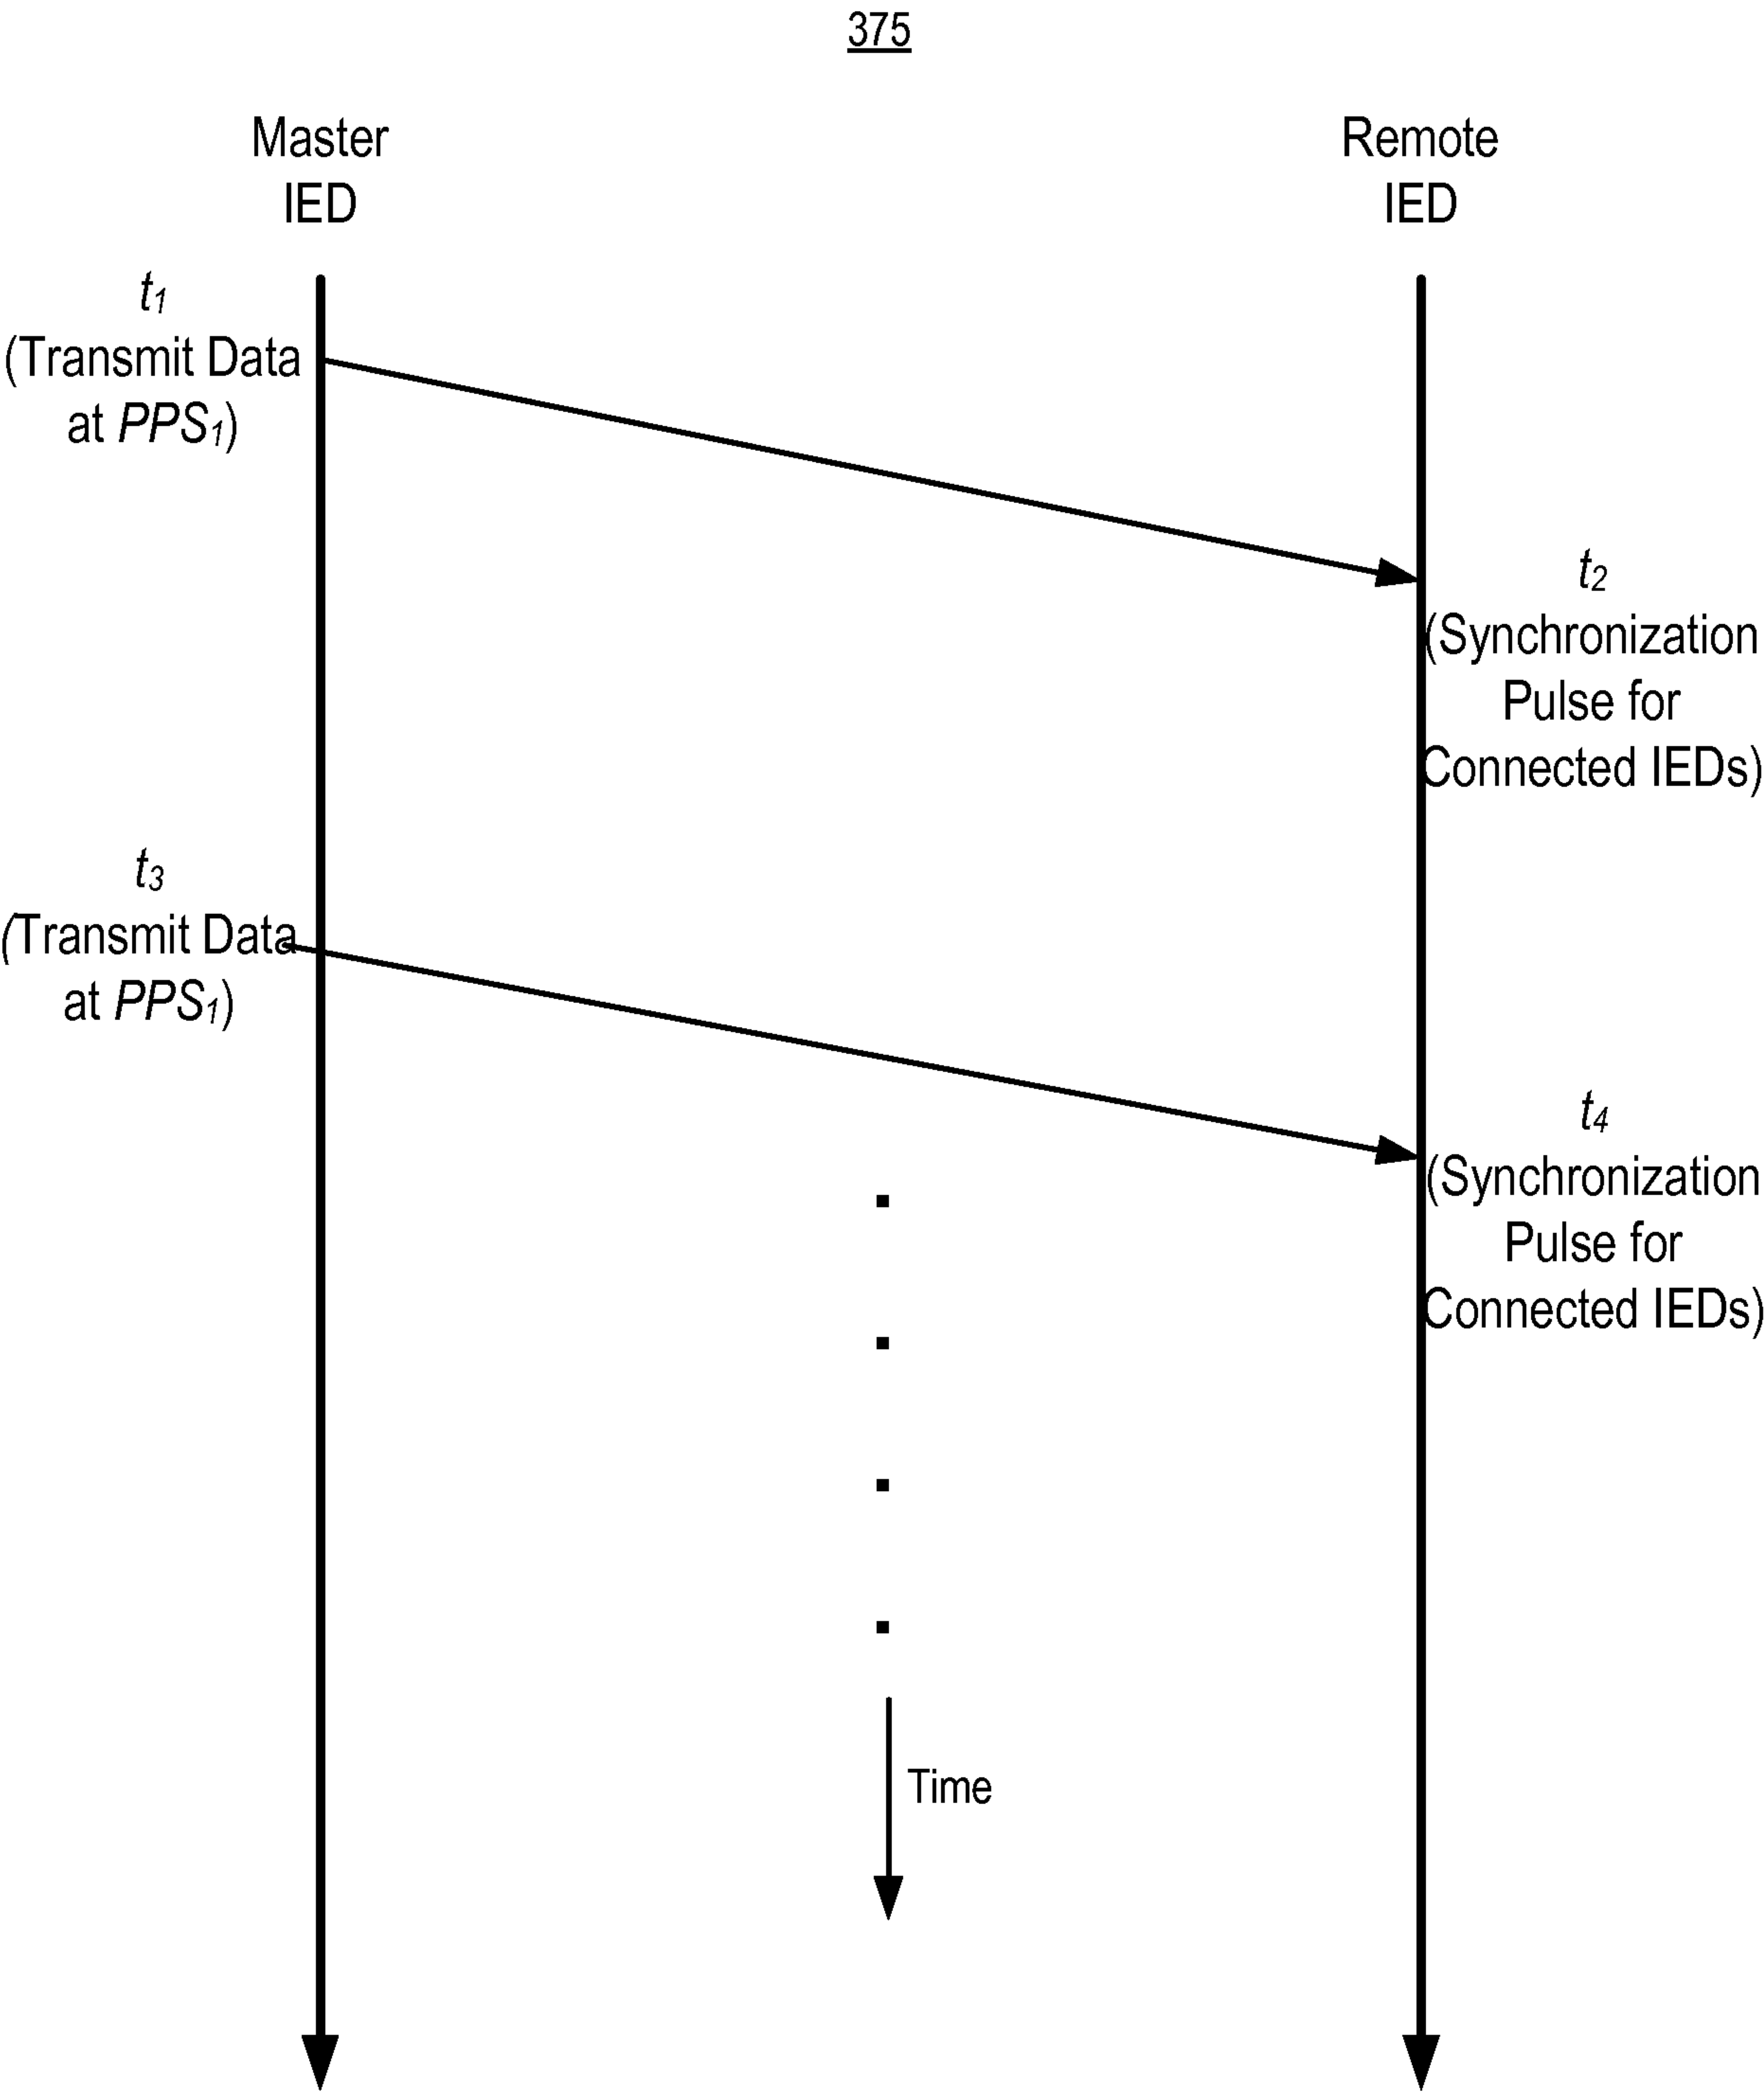


FIG. 3C





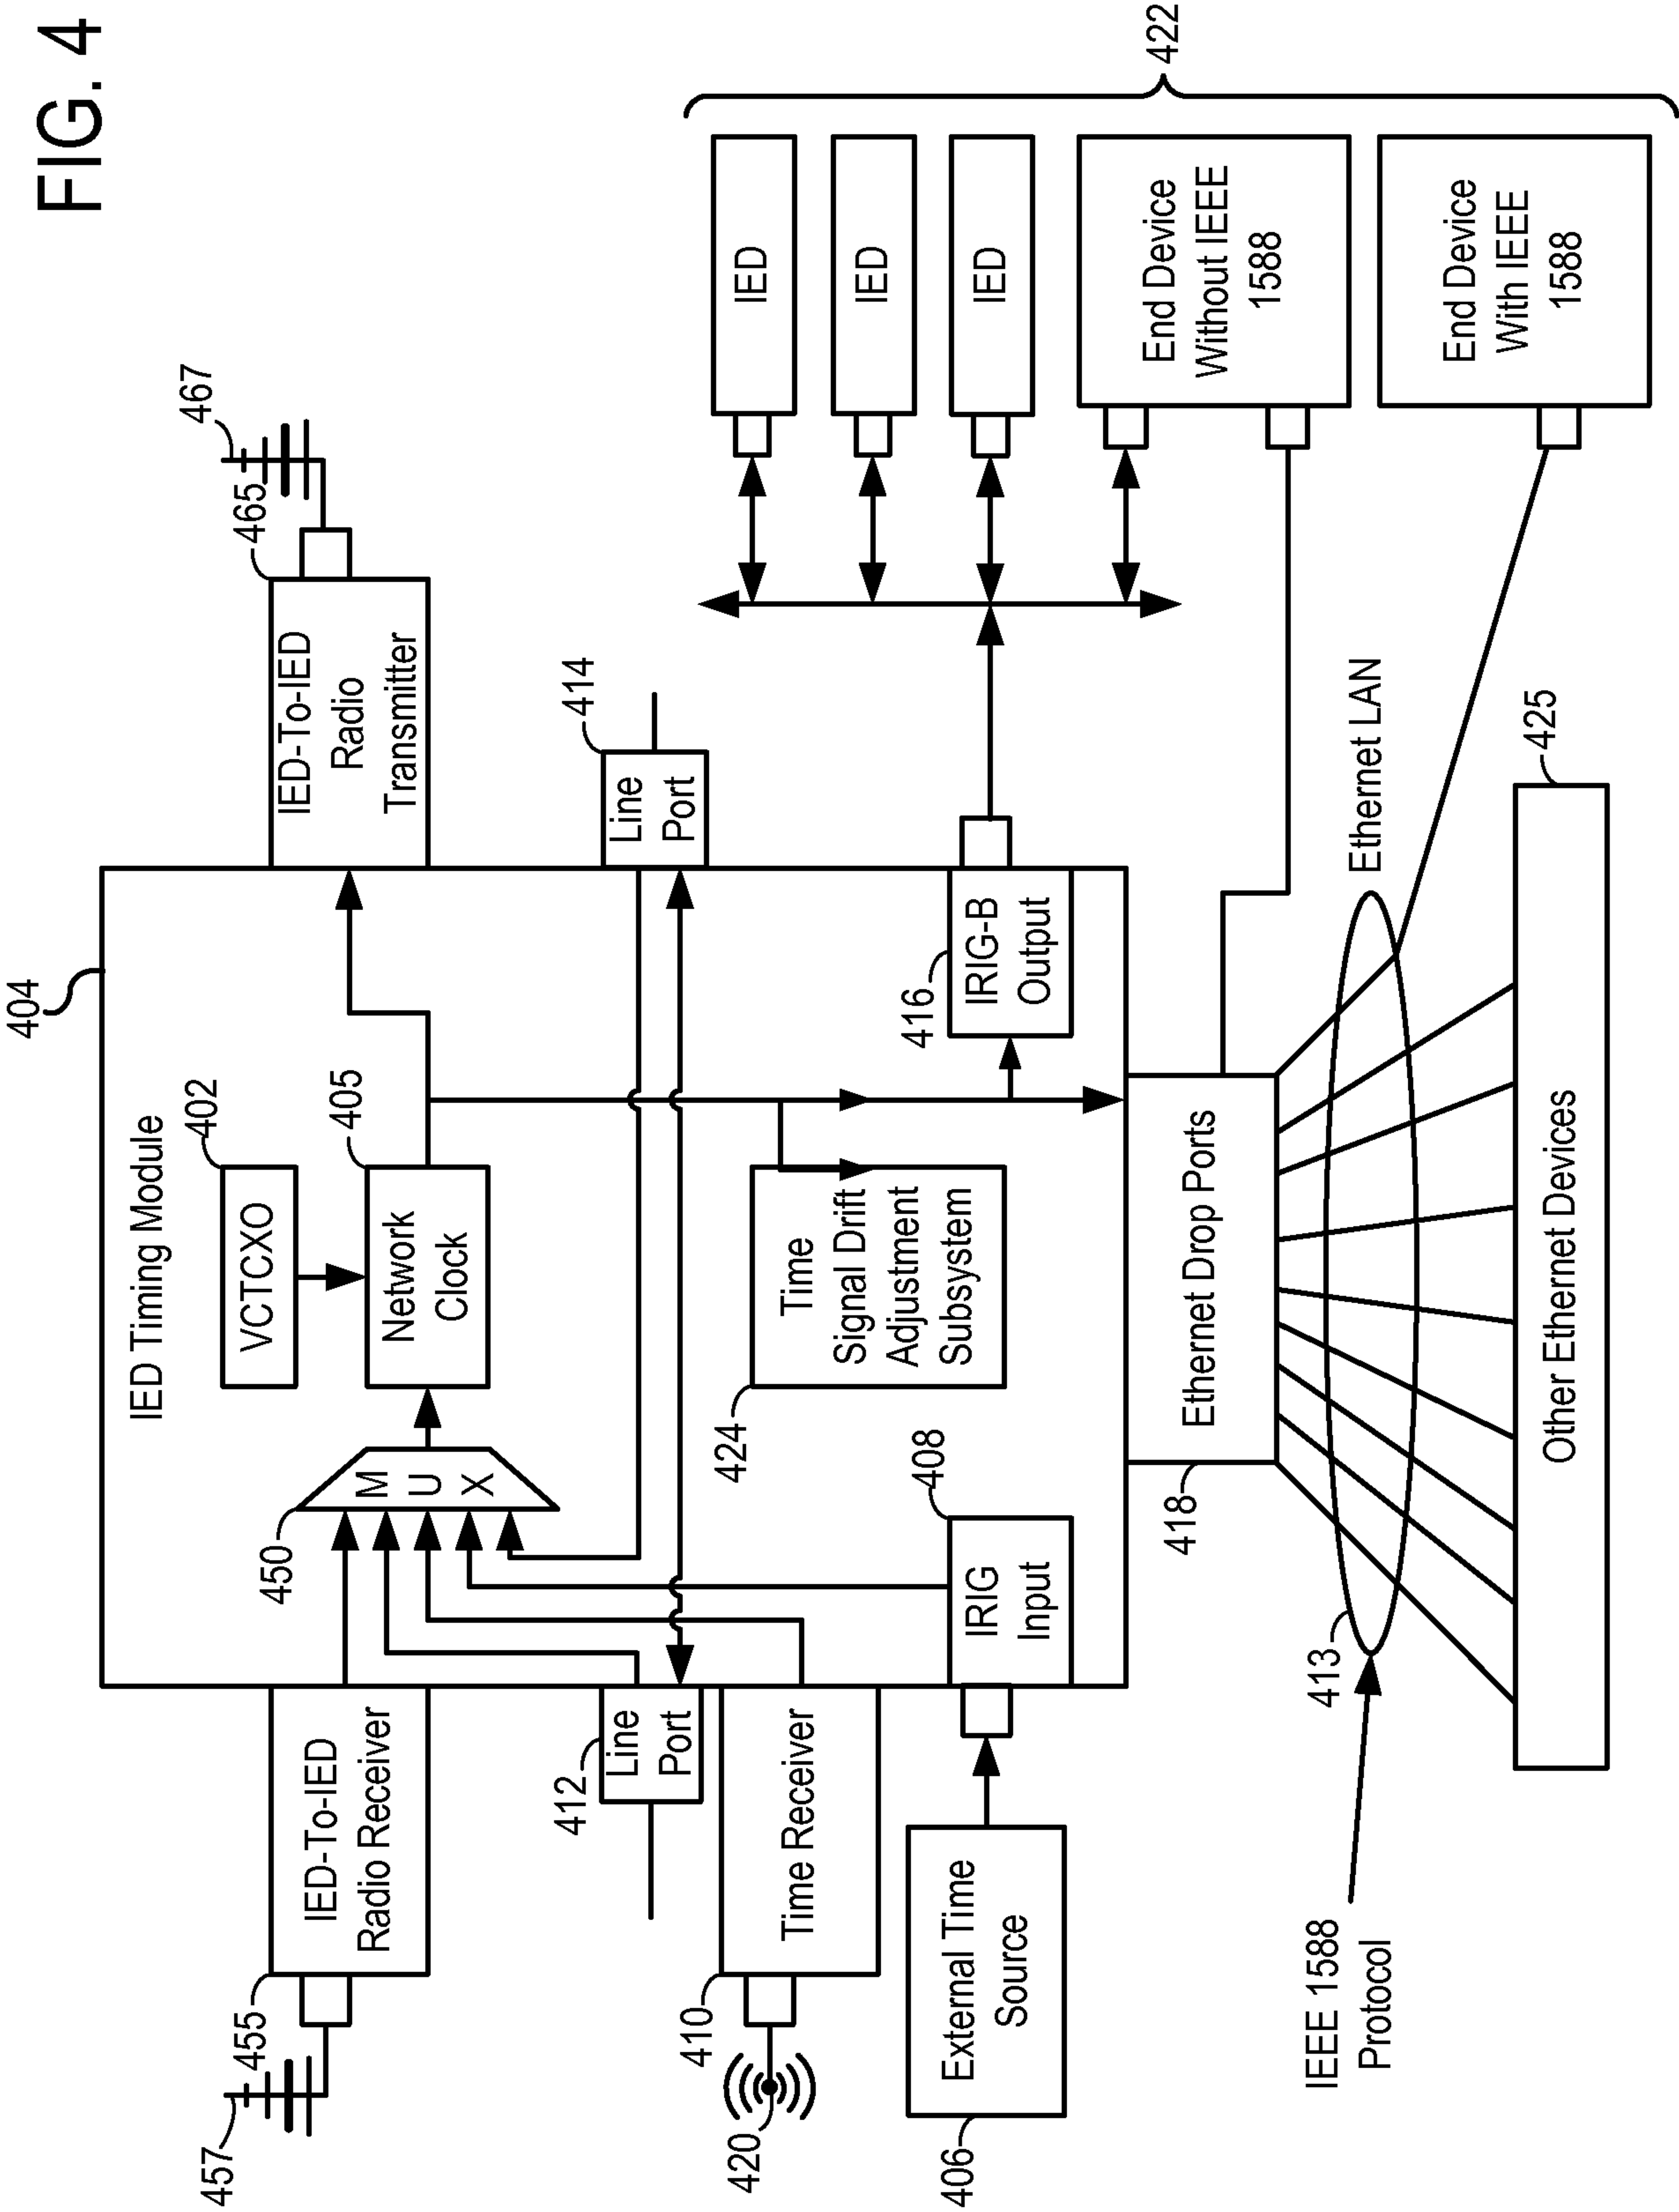


FIG. 5

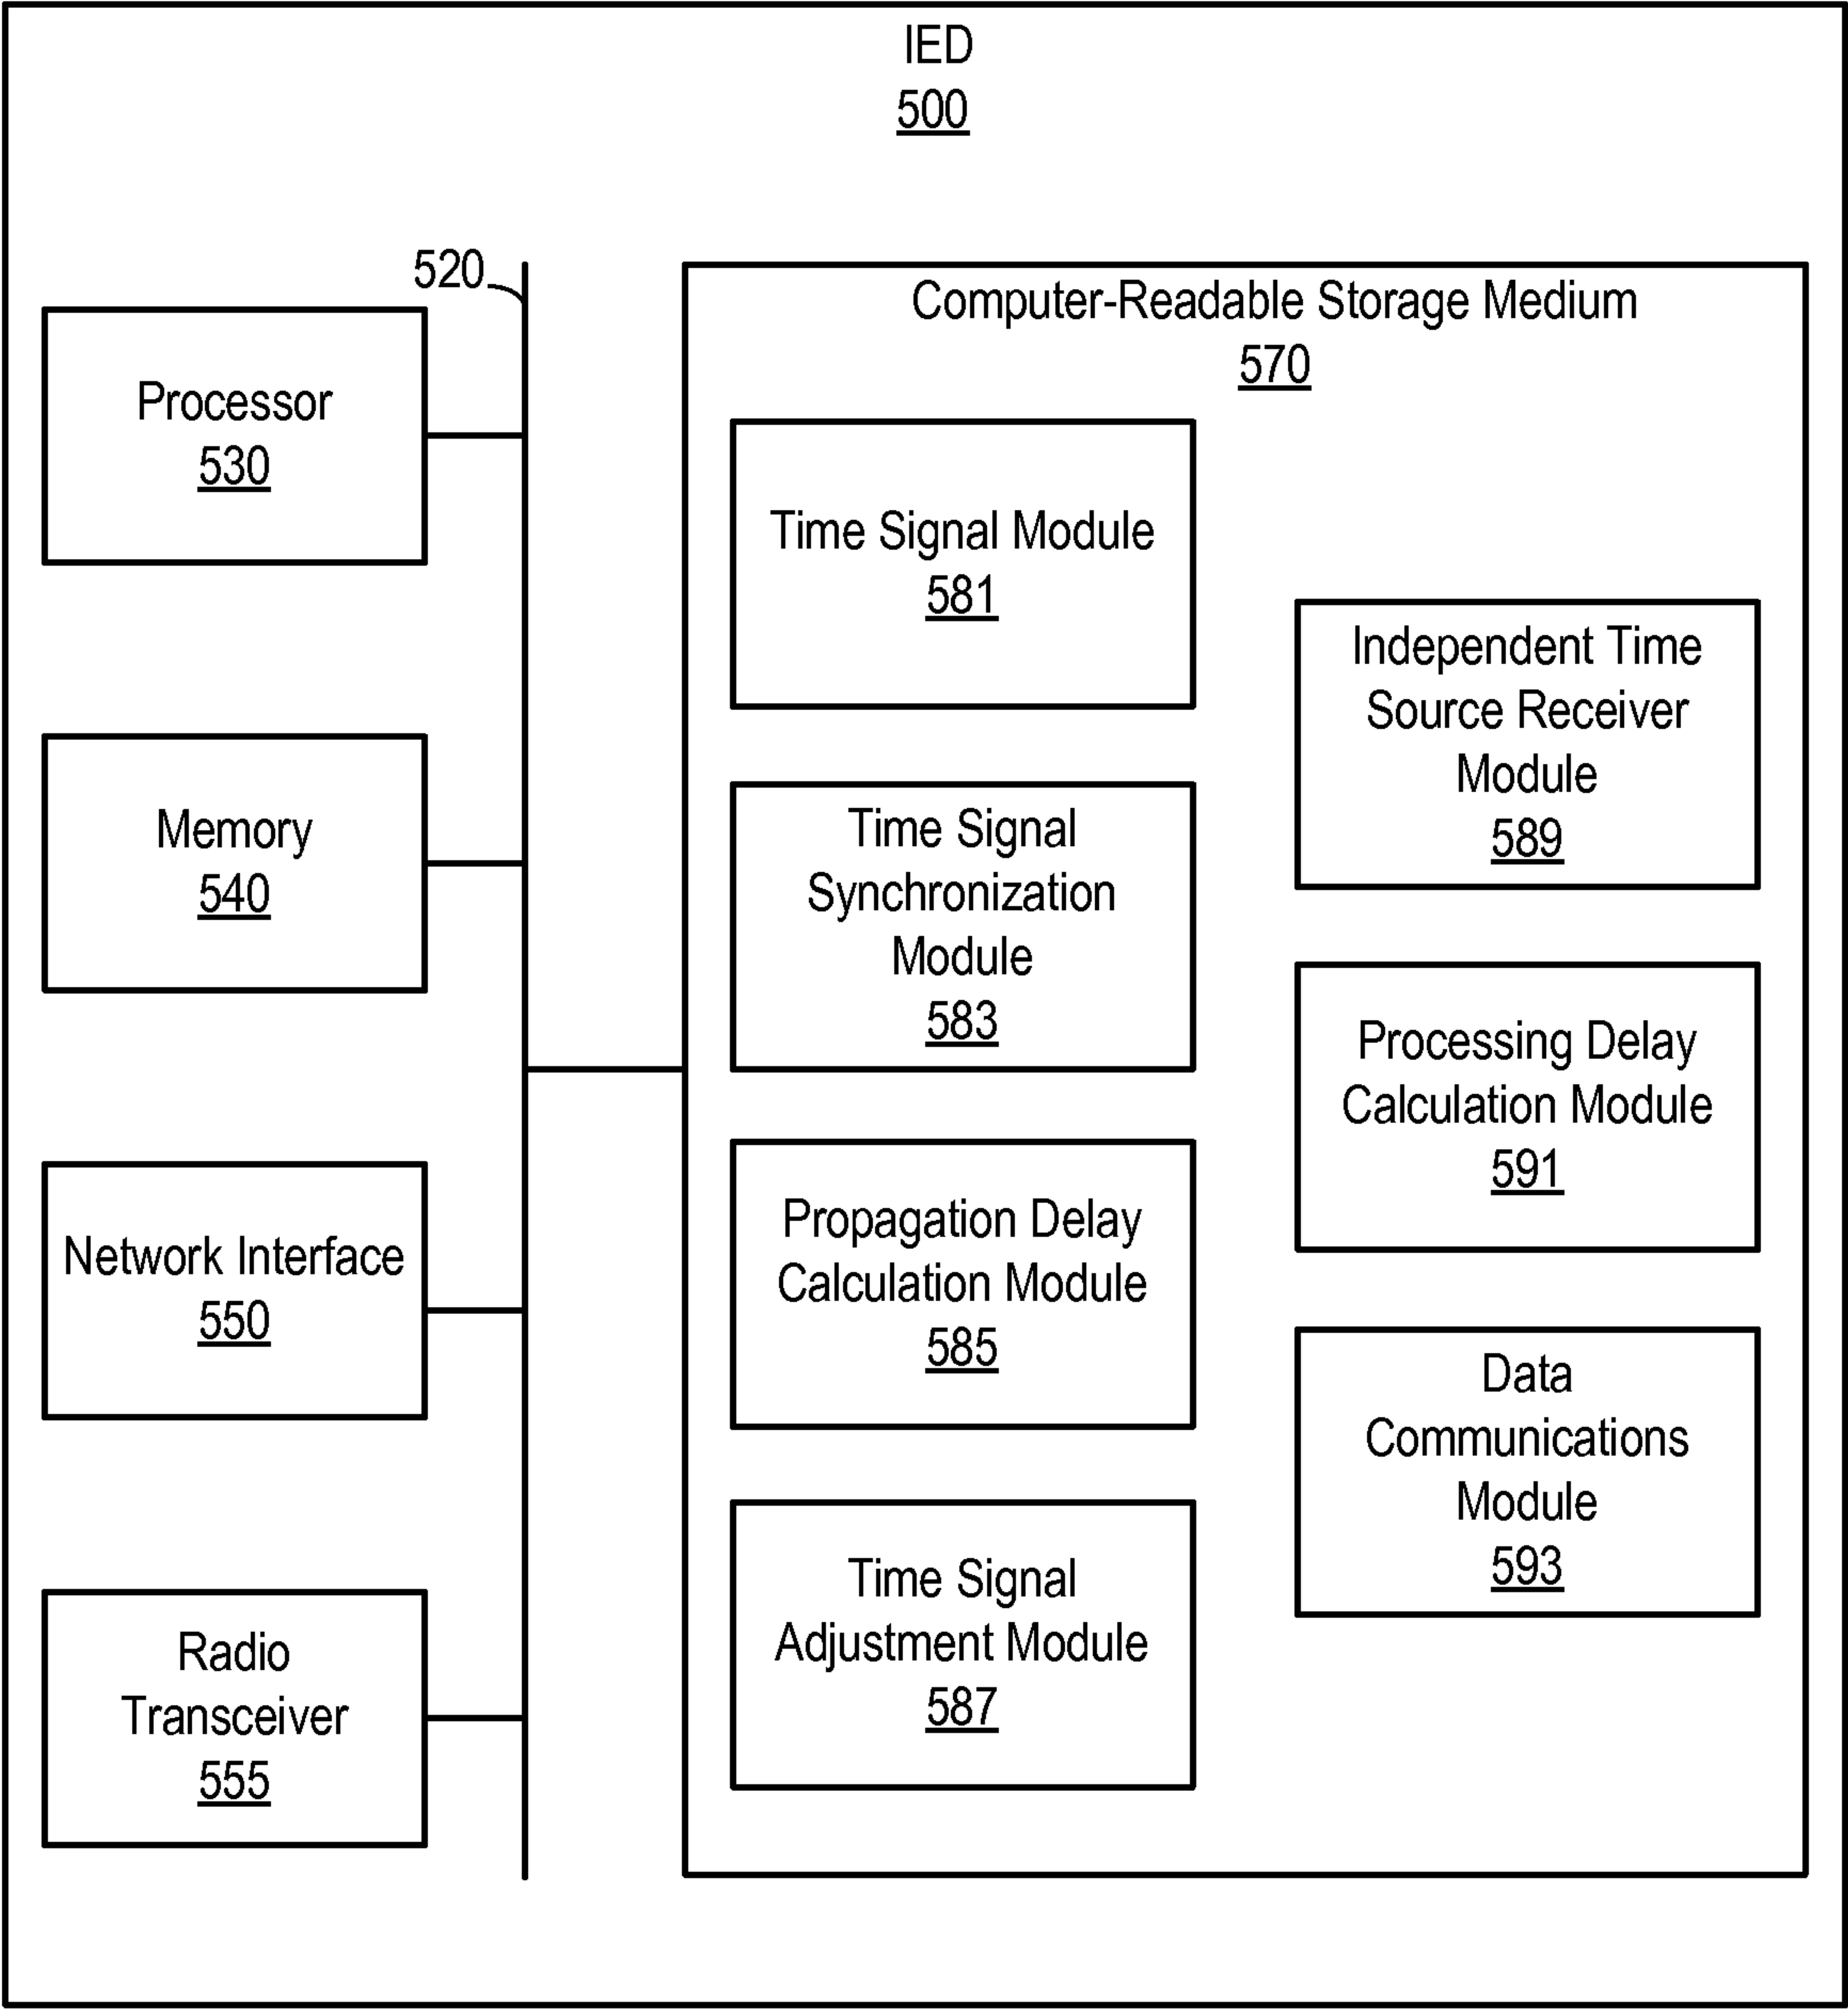


8/10

FIG. 6A

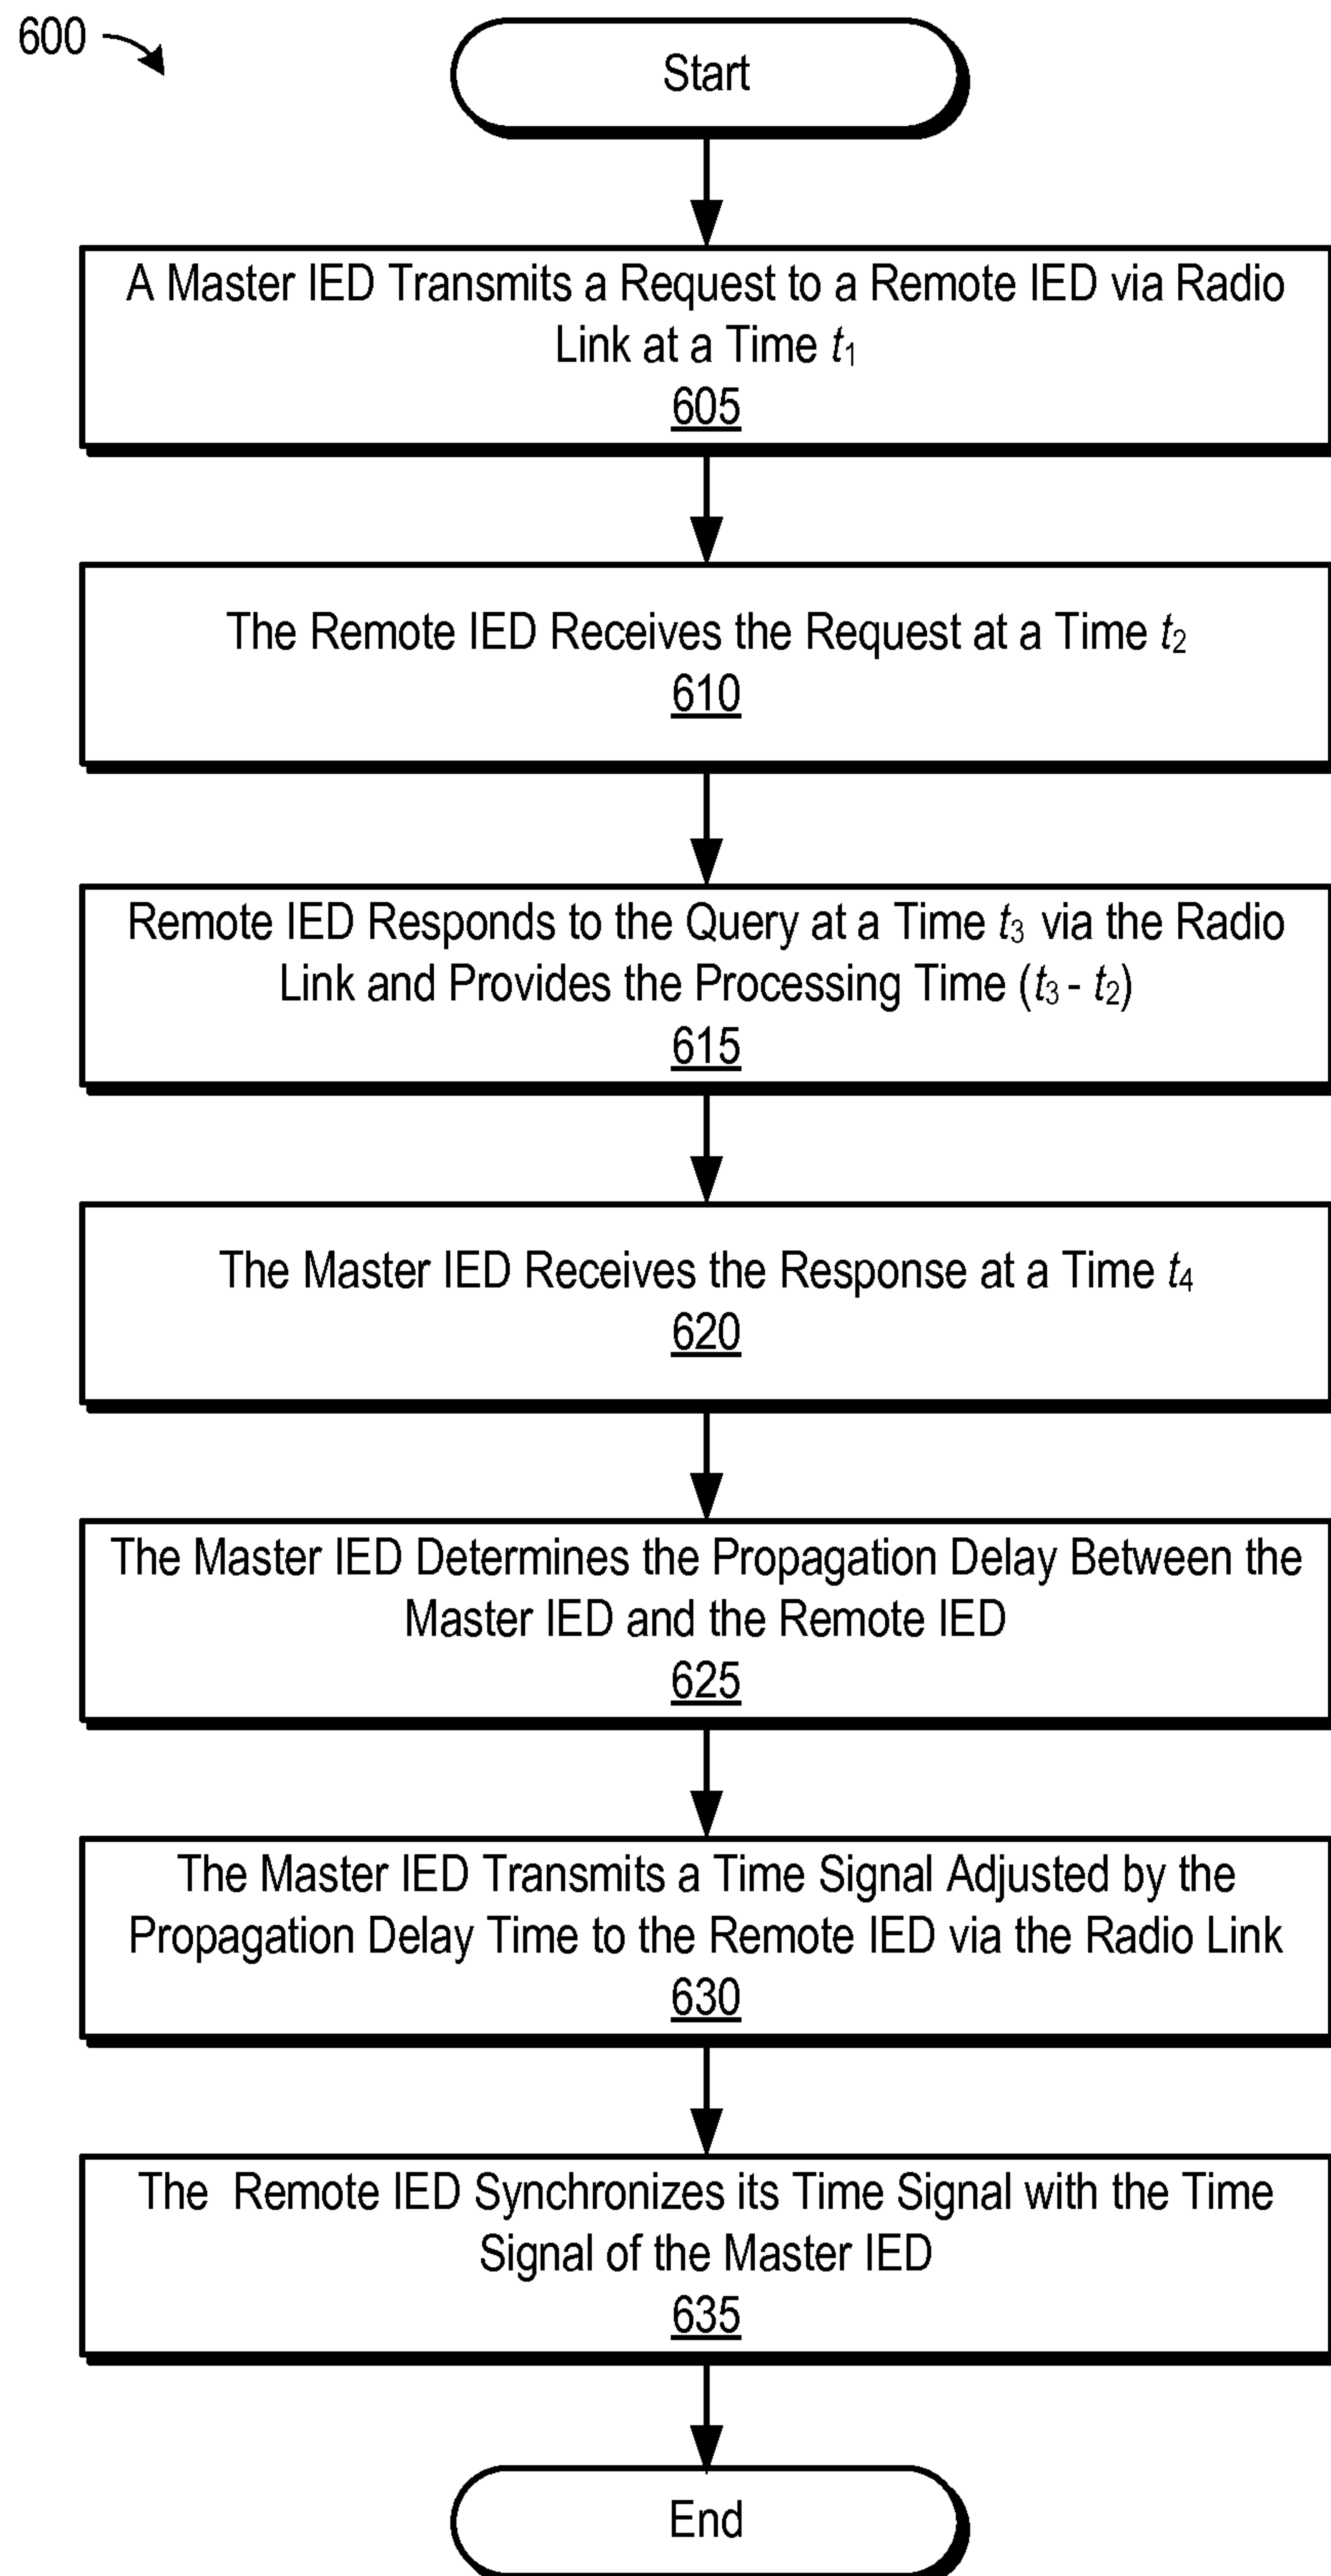

9/10

FIG. 6B

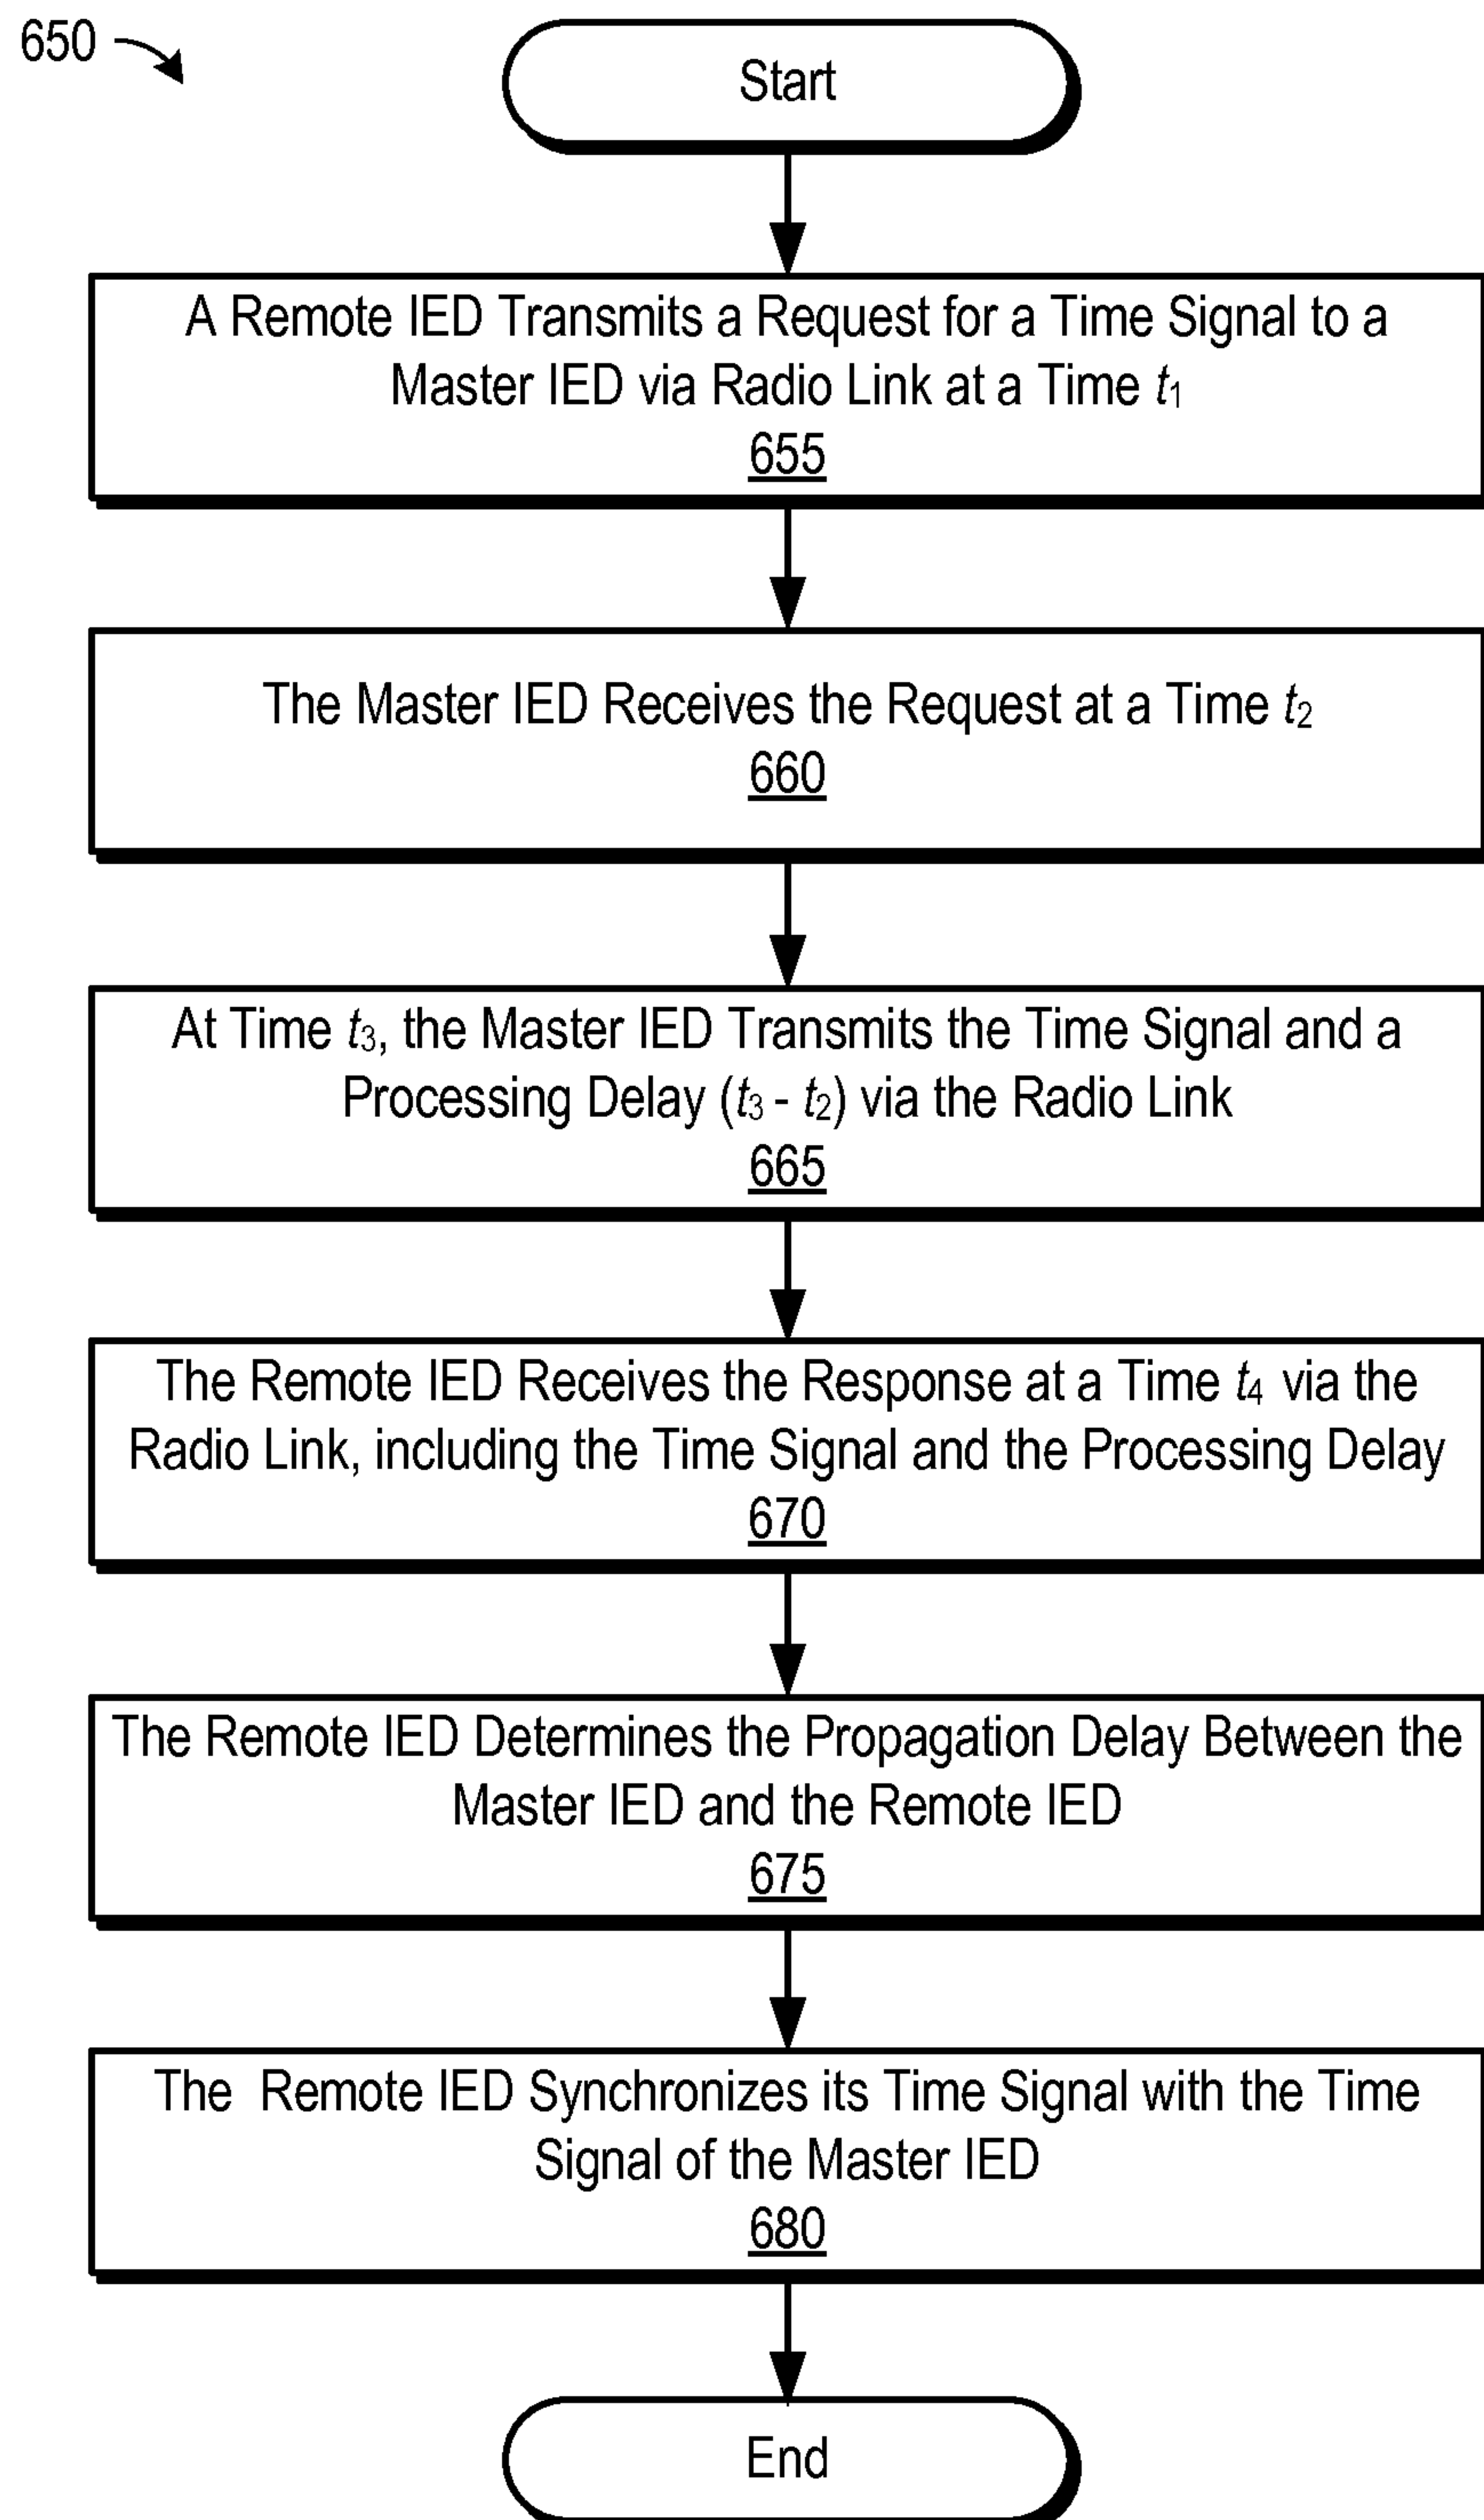

10/10

FIG. 7

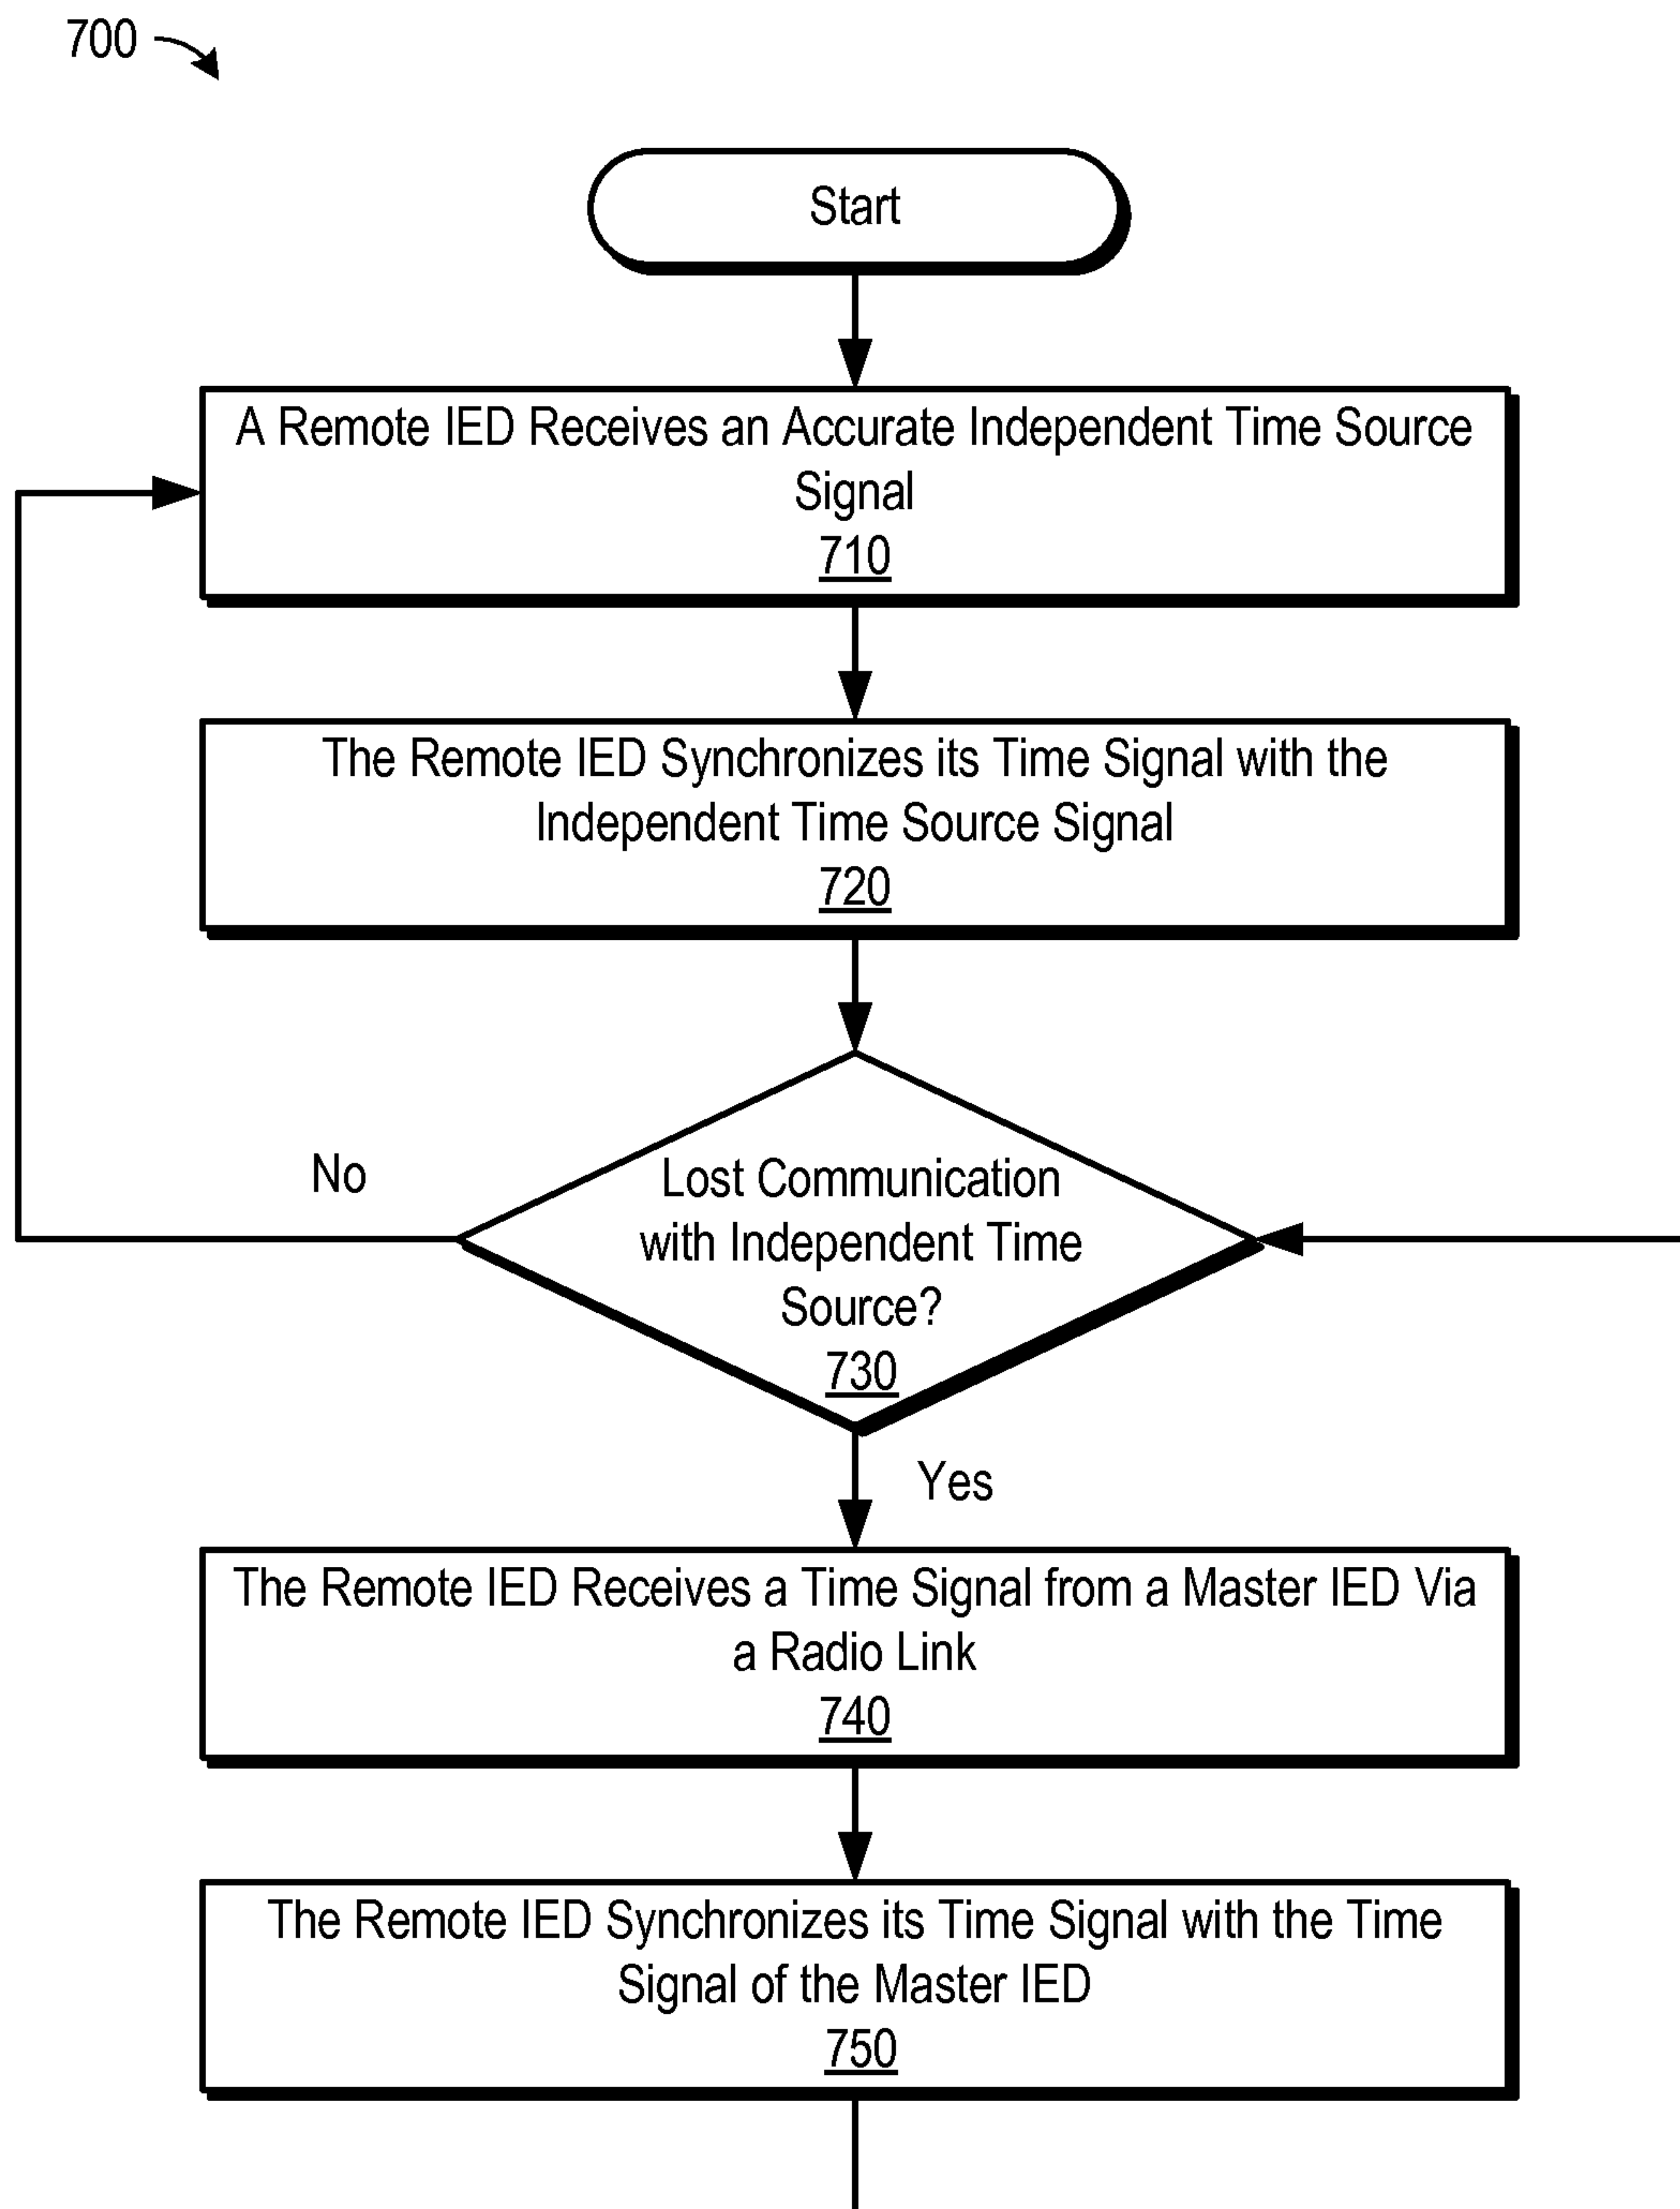


FIG. 1

