



(51) International Patent Classification:

E21B 33/129 (2006.01) *E21B 33/12* (2006.01)
E21B 33/124 (2006.01)

(21) International Application Number:

PCT/US2012/036102

(22) International Filing Date:

2 May 2012 (02.05.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/099,451 3 May 2011 (03.05.2011) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; P.o. Box 4740, Houston, TX 77210-4740 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DOANE, James, C.** [US/US]; 1905 Stillwater Drive, Friendswood, TX 77546 (US). **ANDERSON, Gary, L.** [US/US]; 12004 Whitman Mission Lane, Humble, TX 77346 (US).(74) Agents: **PORTER, Andre, J.** et al.; Baker Hughes Incorporated, P.o. Box 4740, Houston, TX 77210-4740 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: LOCKING ASSEMBLY FOR MECHANICALLY SET PACKER

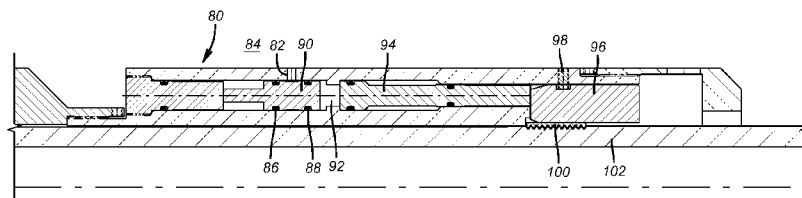


FIG. 6

(57) **Abstract:** A lock assembly for a mechanically set packer for deep deployments is described. The lock housing wall has at least one bore for a rod piston that is selectively actuated when wellbore hydrostatic is allowed to reach on side of the piston. Movement of the piston, after breaking a shear pin, allows a c-ring to spring outwardly and out of a locking groove in the mandrel so that the mandrel can be string manipulated with respect to the housing to set the packer. Once unlocked the lock assembly remains defeated. The piston can be optionally exposed to hydrostatic and will unlock at a given depth without manipulation of the wellbore annulus pressure. Other mechanisms to admit wellbore hydrostatic to move the piston or to move the piston in general by other techniques are described.



LOCKING ASSEMBLY FOR MECHANICALLY SET PACKER

Inventors: James C. Doane and Gary L. Anderson

FIELD OF THE INVENTION

[0001] The field of the invention is locks that keep mechanically set packers from setting prematurely and more particularly techniques for providing housings in very deep applications that have sufficient pressure rating while functioning as a releasable lock assembly.

BACKGROUND OF THE INVENTION

[0002] Mechanically set packers typically involve a set of drag block so that one component of two that are relatively moveable with respect to the other can be held stationary while a mandrel is moved generally axially for setting the packer. Typically a j-slot assembly connects the stationary and the movable components so that reciprocation of the string in combination with the j-slot mechanism induces a rotational movement as a pin follows a slot so that the packer is not only set but the set condition is locked. Reversal of the movement will have the pin follow the slot in reverse to release the mechanically set packer as the slips have the cones pulled out from under them that in turn allows the compressed sealing element to reduce in diameter and increase in length so that the assembly can be removed from the wellbore using the string that supports the packer mandrel.

[0003] Getting the packer to the desired location especially in a deviated borehole involves string manipulation in the axial and rotational directions where the packer body can scrape the casing or tubing. If the setting mechanism was not locked during run in it is possible that the packer manipulations to get it to the desired location could inadvertently set it. This would be disadvantageous especially if the packer was not of a retrievable design. In those cases it would require a release from the packer and another trip into the wellbore to mill it out with a mill. Even if the packer is resettable, it can be damaged by being forced to the desired location if it is in the deployed position.

[0004] The lock to prevent packer setting has to be a compact design so that it will not increase the drift dimension of the packer assembly during run in. The design also has to operate reliably and to be cost effective. One way to

keep the cost down for such a lock assembly is to have it release in response to annulus pressure above a predetermined value. One such design that has been developed is shown in USP 5,320,183 where access to annulus pressure is made available upon a pressure buildup to a predetermined value in the annulus that opens a barrier to let that pressure into a chamber 30c3a that in turn pushes on an annular piston 30b3a shown in FIG. 2 so that the sleeve 30c2, 30c1 moves down and the dogs 30a move out of groove 10a. The mandrel 10 can then be manipulated. An alternative embodiment removes support for a dog extending into the mandrel to fixate it and in the process pulls a sleeve into the groove that the dog has vacated as a result of initial mandrel movement. The actuation of the sleeve to remove support for the dogs does not remove the dogs from their groove until after sleeve movement and mandrel manipulation. The subsequent covering of the groove formerly occupied by the dogs is taken to insure that the dogs cannot get back into the groove and prevent relative movement with respect to the packer that is now in the process of being set.

[0005] As packer setting locations get deeper the pressure rating of housings to withstand the higher hydrostatic forces from such depths has to be much higher than previously needed. The use of an annular piston as described above forces a reduction in wall thickness for the housing as there has to be a large annular volume to accommodate the piston and its travel distance. This forces a thinner housing wall in a location with a given drift diameter. Below certain depths such a design is not serviceable as the pressure rating on the housing cannot meet system requirements.

[0006] The present invention addresses the need for a higher housing pressure rating with a thicker wall made possible by drilling a piston bore into the housing wall in which is located a rod shaped piston. At a predetermined pressure the annulus pressure is allowed to communicate to one side of the piston that had preferably been at atmospheric pressure. The opposite side of the piston is preferably at atmospheric pressure so that the resulting piston movement liberates a c-ring that had previously extended into a mandrel groove to prevent relative movement between the housing and the mandrel. The c-ring is manufactured so that it springs away from the groove when the

piston is stroked so that the c-ring will not re-engage the groove once the lock assembly is unlocked. These details and others about the present invention will be more readily apparent to those skilled in the art from a review of the details of the preferred embodiment and other embodiments described below while realizing that the full scope of the invention is to be determined by the appended claims.

SUMMARY OF THE INVENTION

[0007] A lock assembly for a mechanically set packer for deep deployments is described. The lock housing wall has at least one bore for a rod piston that is selectively actuated when wellbore hydrostatic is allowed to reach one side of the piston. Movement of the piston, after breaking a shear pin, allows a c-ring to spring outwardly and out of a locking groove in the mandrel so that the mandrel can be string manipulated with respect to the housing to set the packer. Once unlocked the lock assembly remains defeated. The piston can be optionally exposed to hydrostatic and will unlock at a given depth without manipulation of the wellbore annulus pressure. Other mechanisms to admit wellbore hydrostatic to move the piston or to move the piston in general by other techniques are described.

BRIEF DESCRIPTION OF THE DRAWINGS

- [0008]** FIG. 1 is a section view of the lock assembly in the run in position;
[0009] FIG. 2 is a close-up view of FIG. 1 focusing on the c-ring design;
[0010] FIG. 3 is a view along section lines 3-3 of FIG. 1;
[0011] FIG. 4 is a view along line 4-4 of FIG. 1;
[0012] FIG. 5 is a released view of the lock assembly shown in FIG. 1;
[0013] FIG. 6 shows the use of a solenoid valve to admit annulus pressure to defeat the lock with the solenoid in the closed position and the lock in the locked position;
[0014] FIG. 7 is the view of FIG. 6 with the lock defeated by operation of the solenoid;
[0015] FIG. 8 is a view of the lock in the locked position using a plug to initially isolate annulus pressure; and
[0016] FIG. 9 is the view of FIG. 8 with the plug out of the way allowing the piston to release the lock.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0017] The mechanically set packer is very well known to those skilled in the art so it is not shown in detail in the drawings. It suffices to state that the packer can be selectively set by manipulation of the mandrel **10** with respect to the packer body, a portion of which **12** is shown in FIG. 1. Generally drag blocks that are not shown are used to hold the packer body in position as the mandrel **10** is manipulated with respect to the body **12** generally using a j-slot or equivalent to get the sealing element compressed and the cones under slips to lock in the set position of the sealing element. As stated before, the packer cannot set until there is relative movement between the mandrel **10** and the packer body **12**.

[0018] What prevents such relative movement is the lock housing **14** that has a body **16** and a bottom sub **18** connected at thread **20** with a fluid displacement port **22** in the bottom sub **18**. A retainer **24** that is also shown in the section view of FIG. 4 is generally rounded in shape and preferably has a flat **28** that faces the c-ring **30** preferably at 180 degrees from the split **32**. Shear pin **26** initially fixates the retainer **24** in such a manner as to have the c-ring **30** supported in groove **34** and as shown in FIG. 2 the groove **34** is made up of a series of spaced grooves that match a profile **36** on the face of the c-ring **30** that faces the mandrel **10**. End **38** abuts housing **16** that is part of the mandrel body **12** to prevent uphole movement in the direction of arrow **42** until after the c-ring **30** is released by movement of the retainer **24**. Bore **44** in FIG. 2 accepts the shear pin or pins **26**.

[0019] Going back to FIG. 1 the housing **16** has at least one bore **40** in which piston **46** resides for slidable movement. Seals **48** are a smaller diameter than seals **50** which reside in a larger diameter portion **52** of the bore **40**. In between seals **48** and **50** is a chamber **54** that is preferably at atmospheric pressure but can be higher. Above the piston **46** is another chamber **56** also seen in FIG. 3. This chamber is defined by a rupture disc retainer **58** held by a lock nut **60** threaded in bore **62**. Bore **62** is preferably at 90 degrees to the piston bore **40** and communicates to the annular space **64** surrounding the housing assembly **14**.

[0020] When the mechanically set packer is at the desired location and it is time to set it, the pressure in the annulus **64** is raised or reaches a predetermined level and the rupture disc **59** breaks to communicate pressure in the annulus **64** into chamber **56** to start driving the piston **46**. Initially the shear pin **26** breaks after which further piston **46** movement pushes the retainer **24** to a location offset from the c-ring **30** which allows the stored potential energy in c-ring **30** to be released as the c-ring **30** springs to a larger diameter taking the profile **36** out of the facing groove **34** that has a similar profile. The c-ring **30** is then no longer in the profile **34** of the mandrel **10** and the mandrel **10** may now be manipulated axially and/or rotationally to set the packer using relative movement of the mandrel **10** to the packer housing **12** that is in most cases supported in the wellbore with drag blocks (not shown).

[0021] The advantage of the present design can be readily seen from the drawings and the above description. The housing **16** can have a massive wall thickness as shown in FIG. 3 that is interrupted by the bore **40** for each respective piston **46**. In well depths of 20,000 feet or more the hydrostatic pressures can be so high that a very thick wall for housing **16** is necessary to get the required pressure rating which can range in the order of 20,000 PSI or more depending on the depth and fluid density in the annular space. Using a smaller bore for a piston **46** allows the ability to withstand such high differential pressures with minimal or no bore distortion. As shown in FIG. 5, once the c-ring **30** is sprung, its built in potential energy keeps it in the FIG. 5 position and out of the profile **34** so that once there is an unlocking of the mandrel **10** to move with respect to the packer body portion **12** there is no risk of a re-latching that could otherwise prevent the packer from fully setting.

[0022] There are options that can be employed. For example, the c-ring **30** that is shown in FIG. 2 as retained against movement in the direction of arrow **42** can also be retained against axial movement in opposed directions. The use of the rupture disc **59** is optional and it can be omitted. This would let hydrostatic pressure in the annulus **64** act on the piston **46** as the packer body **12** is lowered. At some predetermined depth that results in the breakage of the shear pin **26** the packer will be unlocked to set and prevented from relocking as previously described.

[0023] Rather than using a rupture disc to communicate pressure in annulus **64** to the piston **46** some other type of device can be used. The valve can be a smart valve with an associated operator and a power supply and processor to receive signals from the surface to trigger the valve to open when desired. For some examples the sensor associated with the valve can be responsive to a predetermined movement in opposed directions of the packer body, an acoustic signal through the supporting tubular string or the annulus fluid or an applied magnetic field such as with the delivery of a sonde through the supporting string.

[0024] FIGS. 6 and 7 illustrate an example of this in the form of a solenoid valve **80** that initially blocks a port **82** to the annulus **84** using seals **86** and **88** on a valve member **90**. When a signal makes the valve member **90** move uphole, the seal **88** is pulled past the port **82** allowing annulus pressure into chamber **92** to push the piston **94** against the retainer **96** to break the shear pin **98** so that the lock ring **100** is no longer supported and can spring away from the mandrel **102** to which it was previously locked. FIG. 7 shows the serrations on ring **100** having parted from the mating serrations on mandrel **102** so that relative movement is now possible for setting the packer using the drag blocks and string manipulation in the manner previously described.

[0025] FIG. 8 shows a port **200** that is blocked by a plug **202** that is a shape memory plug. On exposure to a predetermined temperature for a predetermined time the plug **202** reverts to its original smaller shape and moves away from the port **200** to allow pressure in the annulus **204** to reach the piston **206** through chamber **208**. The piston moves the retainer **210** away from over the lock ring **212** and the lock ring **212** springs out and away from the mandrel **214**. The packer can now be set using the drag blocks and string manipulation as previously described. FIG. 9 shows the released position with the shear pin **216** having been broken by the initial movement of the retainer **210**.

[0026] Other options involve a preload force on the piston that is retained against stroking by a locking member that is defeated by well fluids such as by dissolving or other chemical attack from well fluid exposure. Another option is a piston that is made of a shape memory material that responds to the

temperature of well fluids to revert to an original shape that results in liberating the c-ring to release the mandrel for movement. Instead of a c-ring, ring segments can be used that simply fall away from a profile in the mandrel when the piston shifts to remove support for the segments. More than a single piston can be used such as a symmetrical or asymmetrical array of pistons in a circumferential orientation that collectively push on a release for the mandrel lock to free the mandrel for movement such as when the rupture disc **59** breaks annulus **64** pressure can act on multiple pistons in tandem or in sequence. One or more pistons can have a plurality of axially spaced piston areas so that breaking of the rupture disc for example feeds hydrostatic pressure to the multiple piston areas to enhance the force acting on the piston. A sleeve can be used that is pushed by one or multiple pistons using wellbore annulus pressure such that the sleeve shifts enough to let the c-ring spring out or to otherwise release a locking member from a mandrel groove.

[0027] The lock can be defeated with application and removal of pressure in the annulus or in the tubing although a design without wall penetrations in the tubing is preferable tipping the balance in favor of actuation through the annulus. The annulus can be pressured against the formation for unlocking the lock to then allow setting the packer.

[0028] If the packer is releasable with string manipulation, the lock can be configured to re-latch after release to again hold the packer in the released position for removal from the wellbore. The retainer could be manipulated back toward the sprung c-ring to compress it as it is pushed back into alignment with the groove in the mandrel and the retainer can then jump over the c-ring to relock it in as the assembly is then pulled out of the hole locked in the retracted position of the packer.

[0029] The above description is illustrative of the preferred embodiment and many modifications may be made by those skilled in the art without departing from the invention whose scope is to be determined from the literal and equivalent scope of the claims below.

We claim:

1. A lock assembly for a subterranean tool that sets with mandrel movement relative to the body of the tool, comprising:
 - a housing supported by the tool body and having a mandrel extending into a passage in said housing;
 - a locking member retained in a profile on an exterior mandrel surface by a selectively movable retainer, said retainer movable to release said locking member in response to at least one rod mounted in at least one bore in a wall of said housing that moves said retainer with respect to said locking member.
2. The assembly of claim **1**, wherein:
 - said locking member storing potential energy when held to said mandrel by said retainer.
3. The assembly of claim **2**, wherein:
 - said locking member releasing said potential energy after said retainer moves and moving away from said profile to a relaxed position that keeps said locking member at a larger dimension than said profile.
4. The assembly of claim **3**, wherein:
 - said locking member comprises a c-ring.
5. The assembly of claim **4**, wherein:
 - said profile comprises a plurality of ridges and valleys and said c-ring having a complementary shape for entering said profile.
6. The assembly of claim **1**, wherein:
 - said rod comprises a piston selectively actuated by subterranean pressure admitted from outside of said housing.
7. The assembly of claim **6**, wherein:
 - said piston is constantly exposed to subterranean pressure during delivery into the wellbore.
8. The assembly of claim **6**, wherein:
 - said piston is selectively exposed to subterranean pressure upon opening of a valve.
9. The assembly of claim **8**, wherein:
 - said valve opens automatically upon the subterranean pressure acting on it reaching a predetermined value.

10. The assembly of claim **8**, wherein:
said valve stays open after opening and cannot close.
11. The assembly of claim **8**, wherein:
said valve is operated with a signal that comprises at least one of:
acoustic, magnetic, heat, properties of subterranean fluid and a predetermined
pattern of physical movement.
12. The assembly of claim **1**, wherein:
said rod is operated with a signal that comprises at least one of:
acoustic, magnetic, heat, properties of subterranean fluid and a predetermined
pattern of physical movement.
13. The assembly of claim **12**, wherein:
said rod comprises a shape memory material that changes length on
exposure to heat to move said retainer with respect to said locking member.
14. The assembly of claim **1**, wherein:
said at least one rod comprises a plurality of rods;
said retainer comprises a cylinder selectively moved by a plurality of
said rods.
15. The assembly of claim **1**, wherein:
said locking member is biased away from said mandrel.
16. The assembly of claim **1**, wherein:
said retainer moves said locking member from a position outside said
profile back into a position where said locking member is retained by said
retainer in said profile.
17. The assembly of claim **6**, wherein:
said piston defines an atmospheric chamber in said bore against which
said piston moves when the subterranean pressure is admitted from outside
said housing.
18. The assembly of claim **6**, wherein:
said piston has a plurality of spaced apart piston areas in said bore with
a plurality of housing passages to direct the subterranean pressure admitted
from outside said housing.

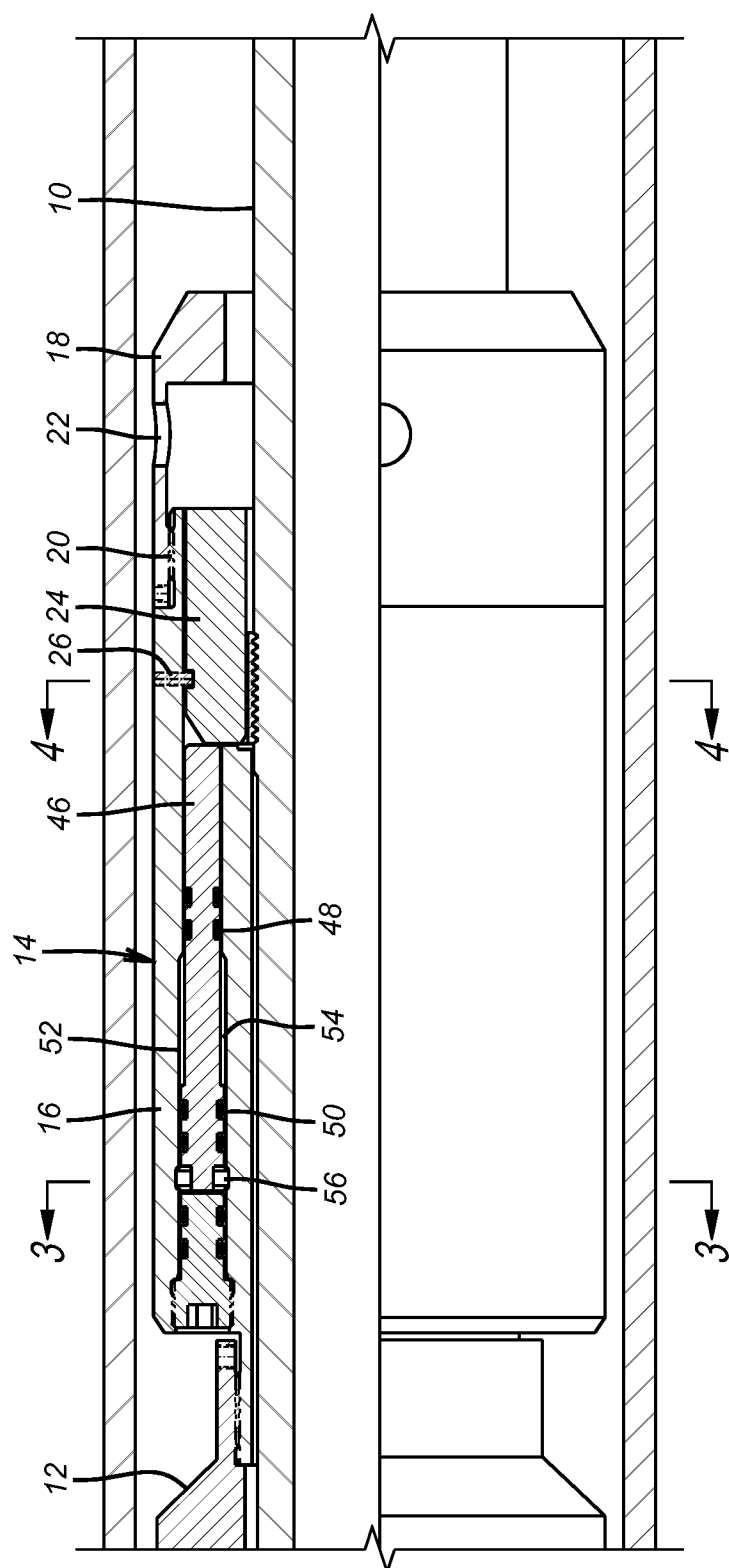


FIG. 1

3/9

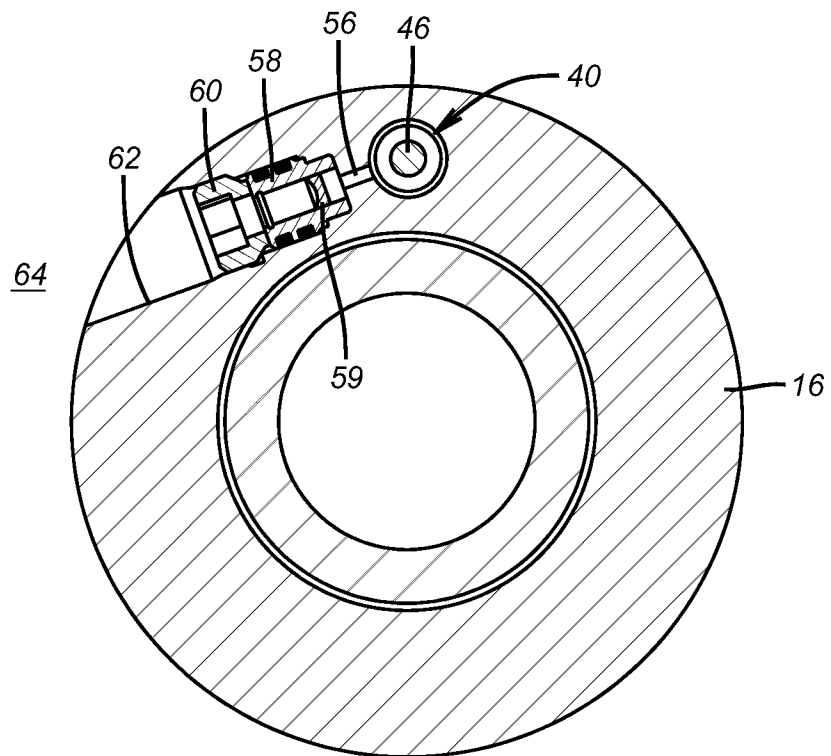


FIG. 3

+

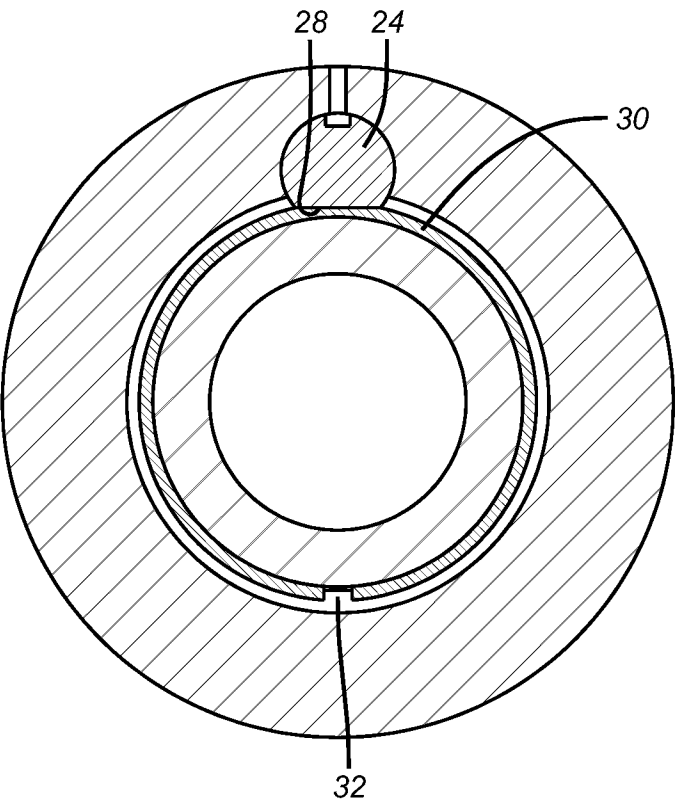


FIG. 4

+

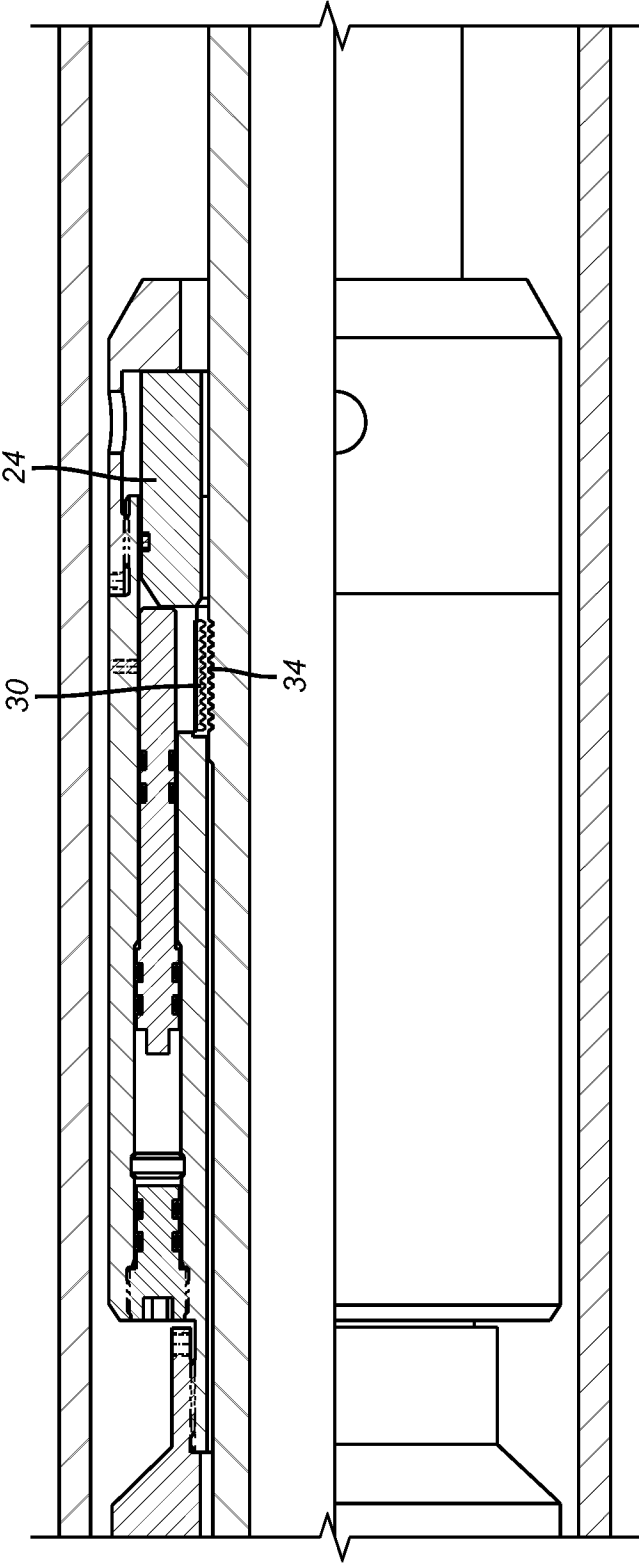


FIG. 5

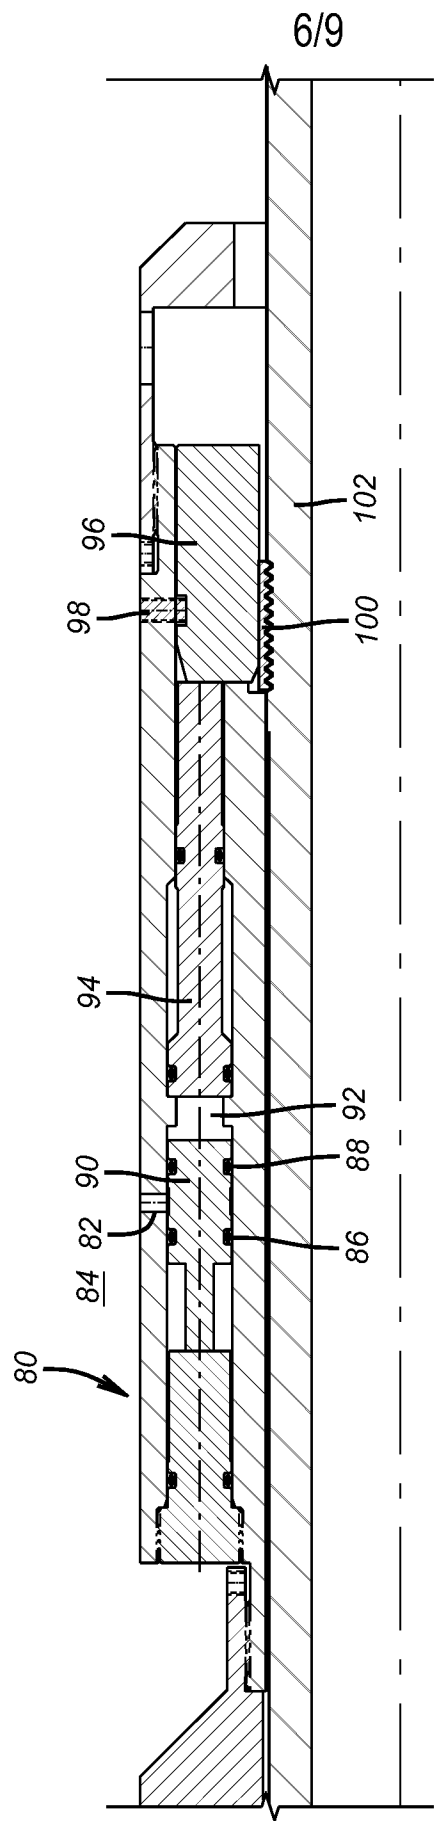


FIG. 6

+

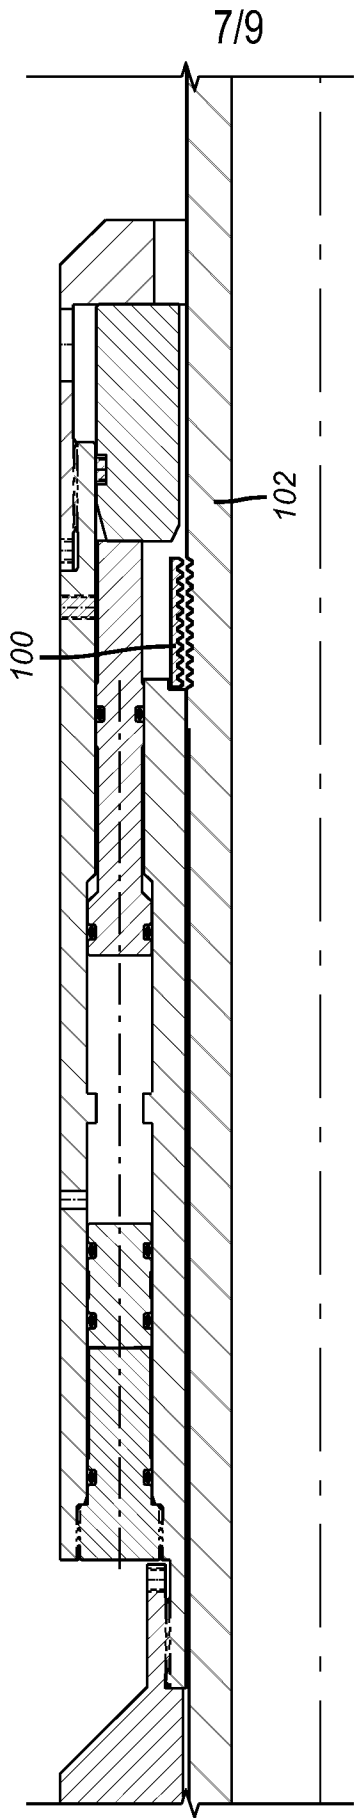


FIG. 7

+

+

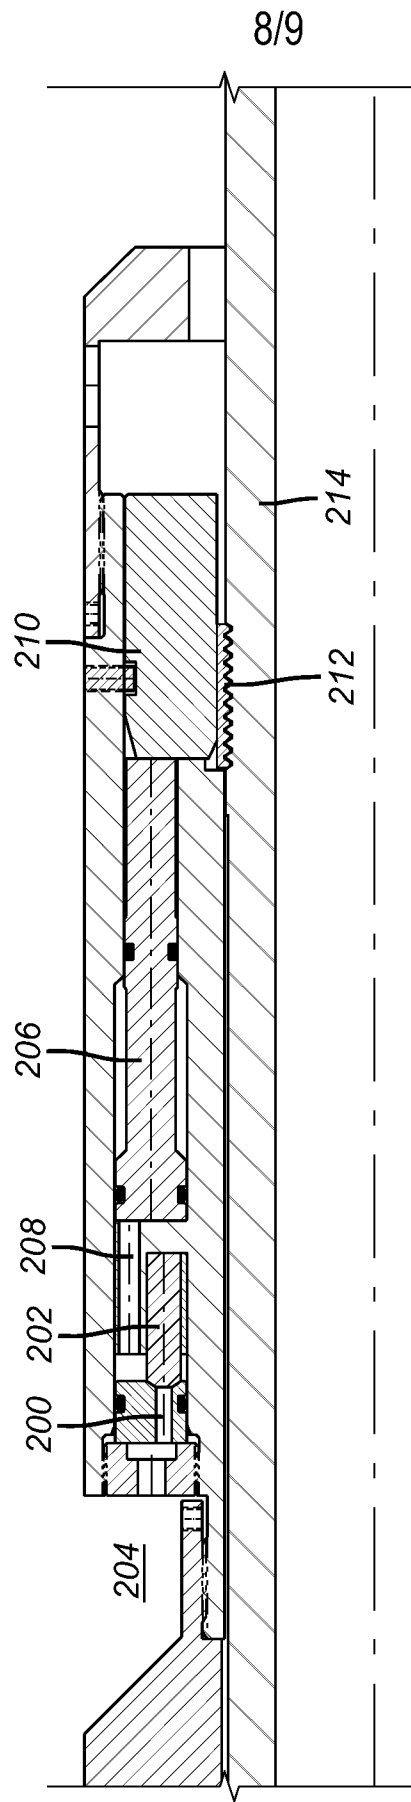


FIG. 8

+

+

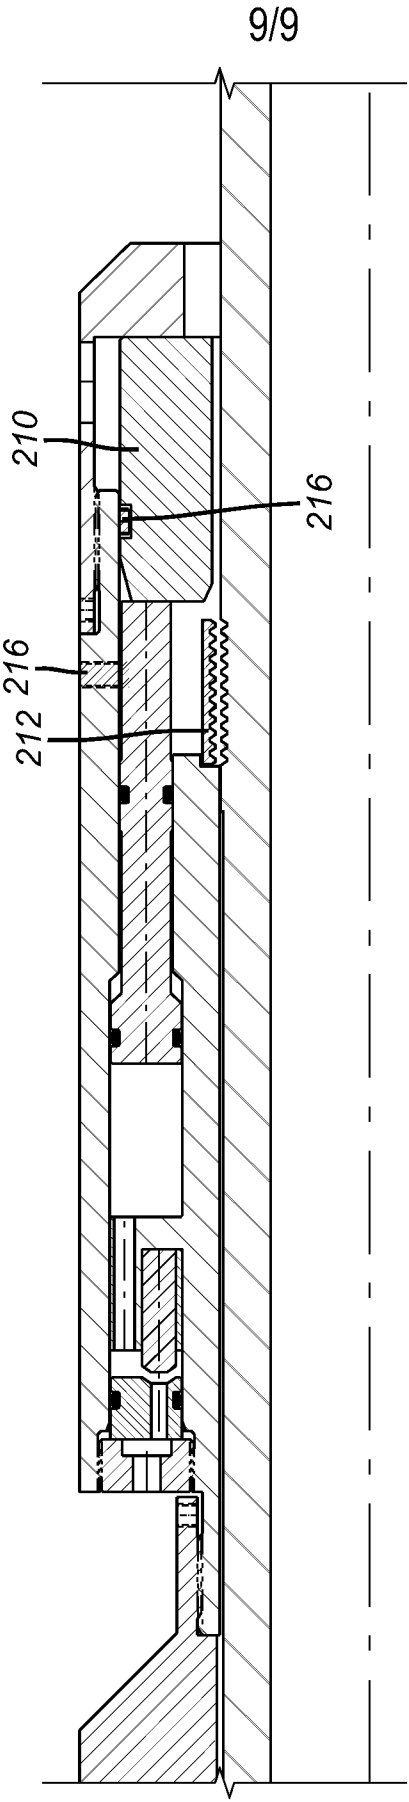


FIG. 9

+