



(86) Date de dépôt PCT/PCT Filing Date: 2009/01/06
(87) Date publication PCT/PCT Publication Date: 2009/07/16
(45) Date de délivrance/Issue Date: 2013/08/13
(85) Entrée phase nationale/National Entry: 2010/06/30
(86) N° demande PCT/PCT Application No.: KR 2009/000043
(87) N° publication PCT/PCT Publication No.: 2009/088202
(30) Priorités/Priorities: 2008/01/07 (US61/019,589);
2008/01/30 (US61/024,886); 2008/02/04 (US61/026,113);
2008/02/12 (US61/028,186); 2008/02/13 (US61/028,511);
2008/03/03 (US61/033,358); 2008/03/17 (US61/037,302);
2008/03/24 (US61/038,778);
2008/12/22 (KR10-2008-0131114)

(51) Cl.Int./Int.Cl. *H04W 16/00* (2009.01)

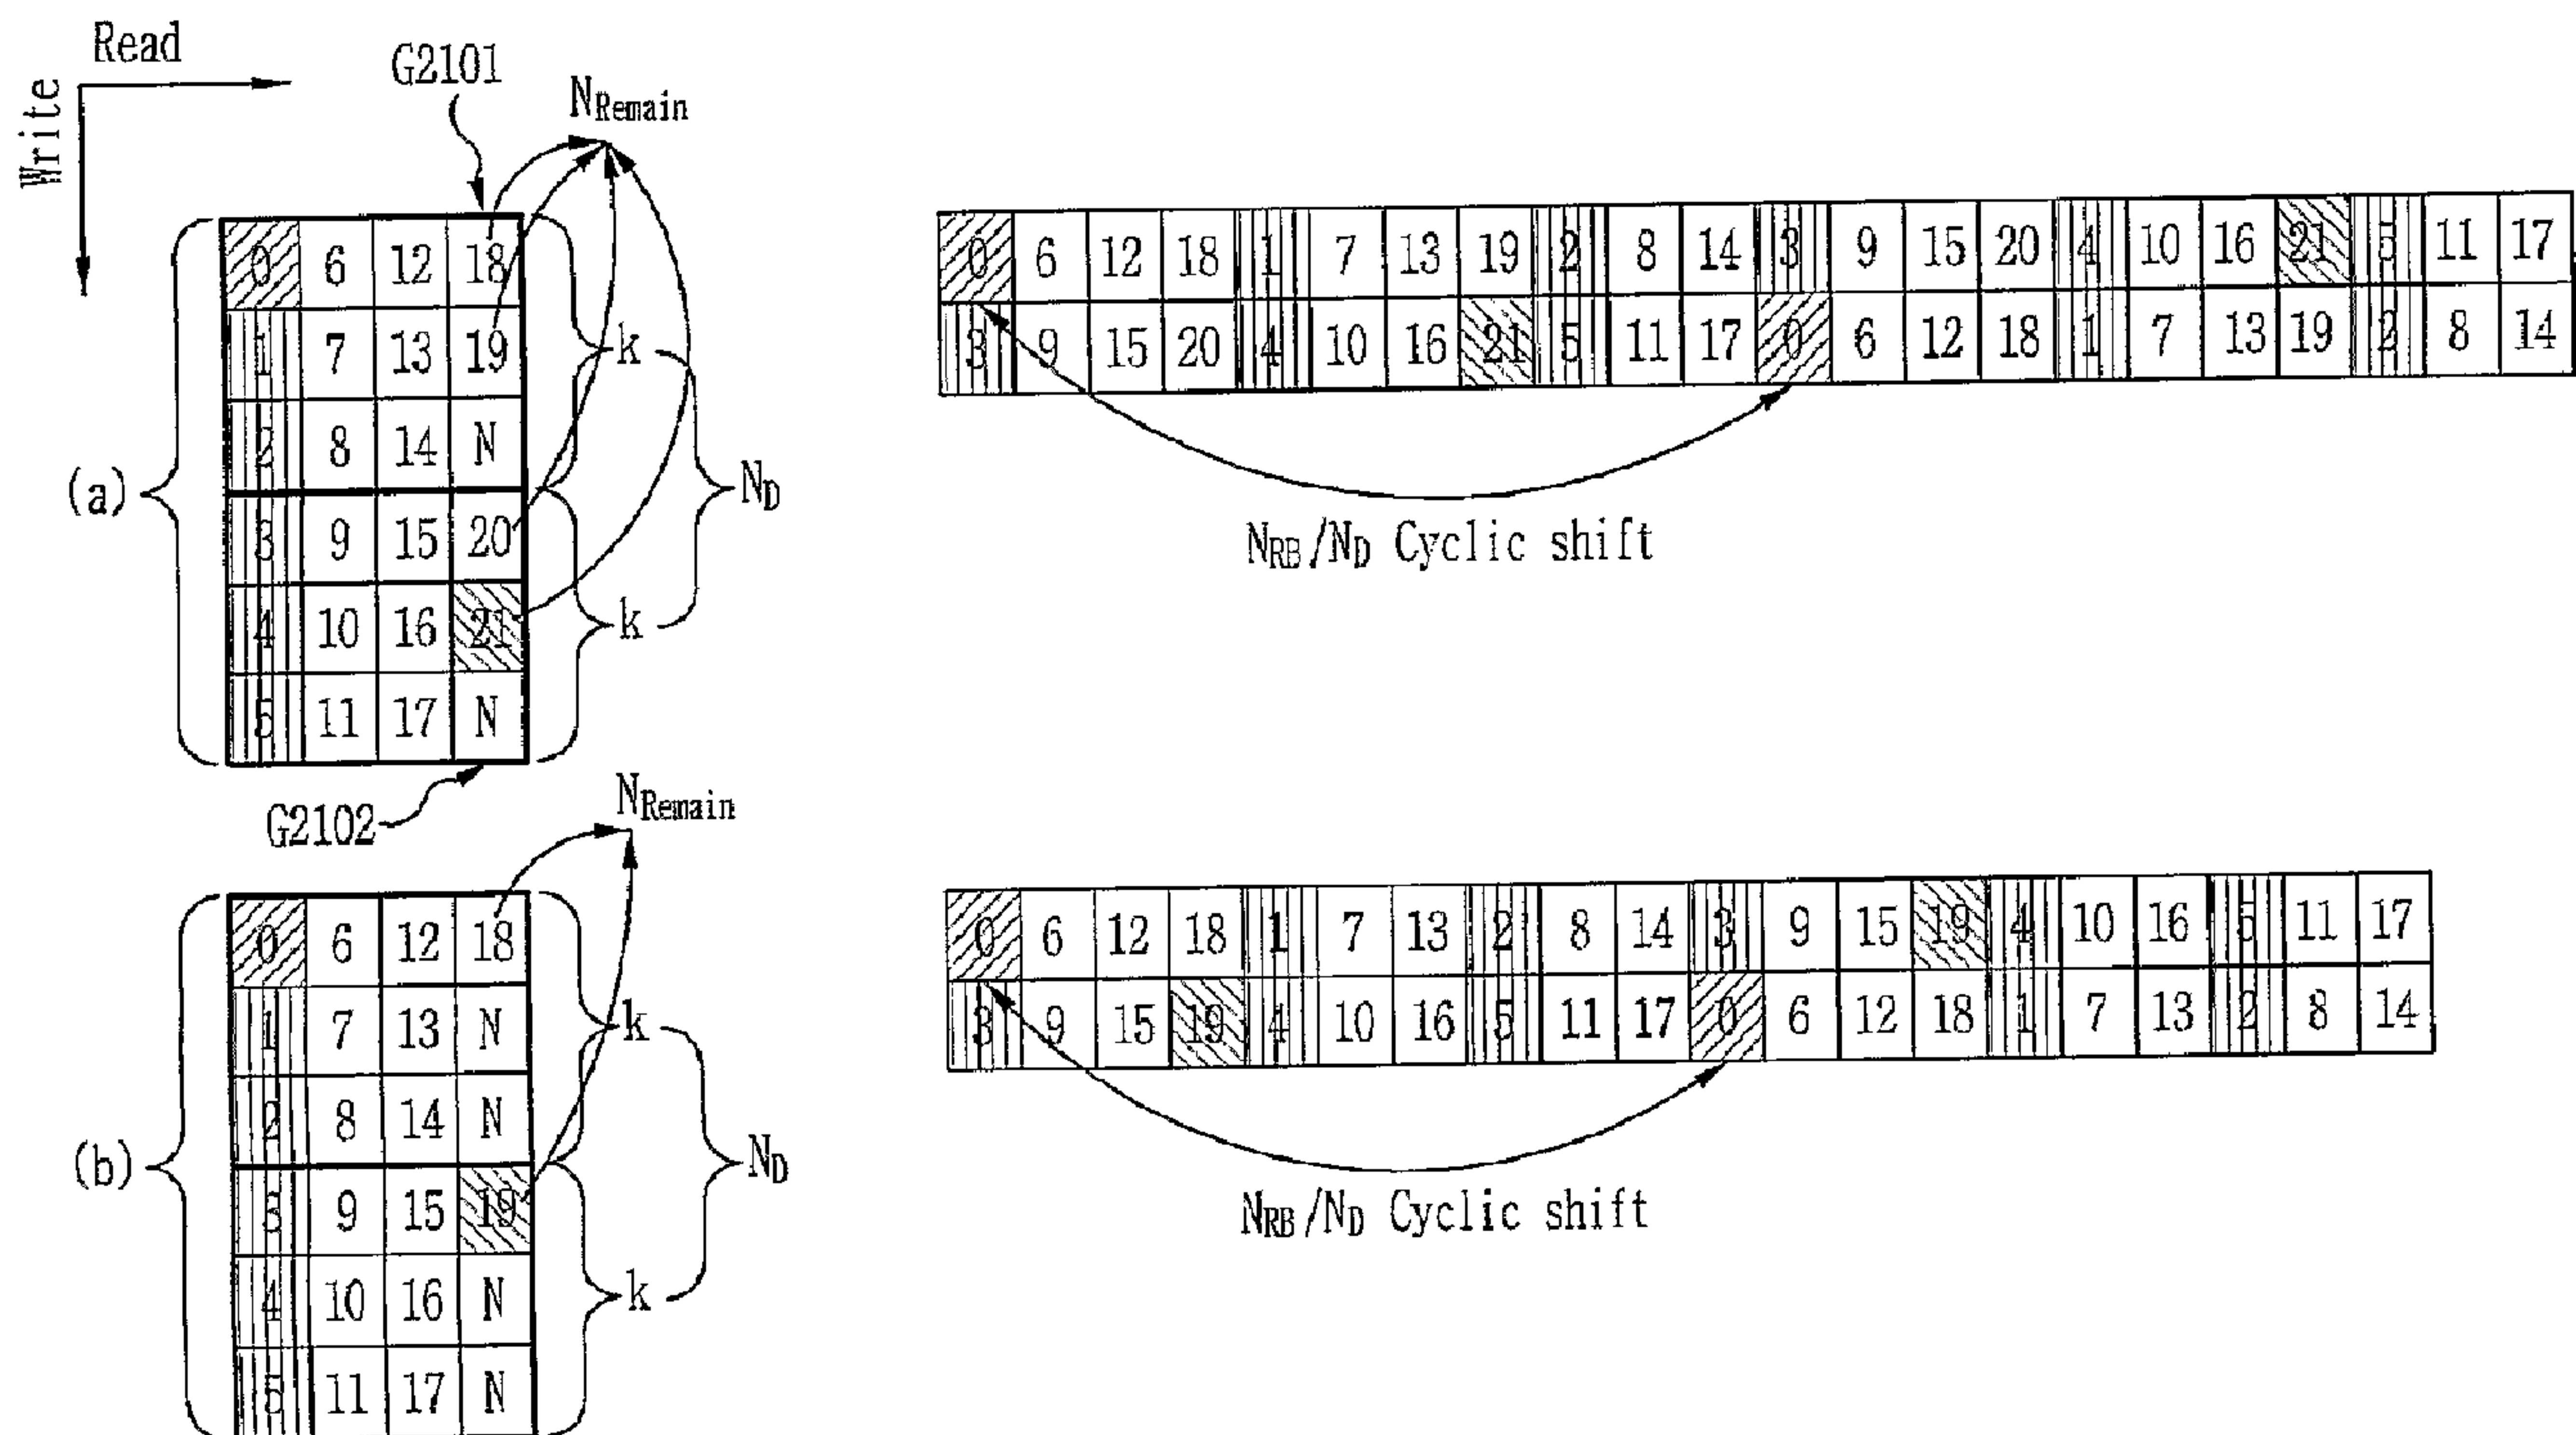
(72) Inventeurs/Inventors:
SEO, DONG YOUN, KR;
NOH, YU JIN, KR;
KIM, BONG HOE, KR;
AHN, JOON KUI, KR;
LEE, JUNG HOON, KR

(73) Propriétaire/Owner:
LG ELECTRONICS INC., KR

(74) Agent: SMART & BIGGAR

(54) Titre : PROCEDE DE PROGRAMMATION DE BLOCS DE RESSOURCES VIRTUELLES DISTRIBUES

(54) Title: METHOD FOR SCHEDULING DISTRIBUTED VIRTUAL RESOURCE BLOCKS



(57) Abrégé/Abstract:

A method for efficiently scheduling virtual resource blocks to physical resource blocks is disclosed. In a wireless mobile communication system, for distributed mapping of consecutively allocated virtual resource blocks to physical resource blocks, when nulls are inserted into a block interleaver used for the mapping, they are uniformly distributed to N_D divided groups of the block interleaver, which are equal in number to the number (N_D) of physical resource blocks to which one virtual resource block is mapped.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
16 July 2009 (16.07.2009)

PCT

(10) International Publication Number
WO 2009/088202 A3(51) International Patent Classification:
H04W 16/00 (2009.01)(21) International Application Number:
PCT/KR2009/000043(22) International Filing Date:
6 January 2009 (06.01.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

61/019,589	7 January 2008 (07.01.2008)	US
61/024,886	30 January 2008 (30.01.2008)	US
61/026,113	4 February 2008 (04.02.2008)	US
61/028,186	12 February 2008 (12.02.2008)	US
61/028,511	13 February 2008 (13.02.2008)	US
61/033,358	3 March 2008 (03.03.2008)	US
61/037,302	17 March 2008 (17.03.2008)	US
61/038,778	24 March 2008 (24.03.2008)	US
10-2008-0131114	22 December 2008 (22.12.2008)	KR

Anyang-si, Gyeonggi-do 431-080 (KR). **KIM, Bong Hoe** [KR/KR]; LG Institute, Hogue 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR). **AHN, Joon Kui** [KR/KR]; LG Institute, Hogue 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR). **LEE, Jung Hoon** [KR/KR]; LG Institute, Hogue 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR).

(74) Agents: **KIM, Yong In** et al.; KBK & Associates, 7th Floor, Hyundai Building, 175-9, Jamsil-dong, Songpa-ku, Seoul, 138-861 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yeouido-dong, Yeongdeungpo-gu, Seoul 150-721 (KR).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **SEO, Dong Youn** [KR/KR]; LG Institute, Hogue 1(il)-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-080 (KR). **NOH, Yu Jin** [KR/KR]; LG Institute, Hogue 1(il)-dong, Dongan-gu,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),

[Continued on next page]

(54) Title: METHOD FOR SCHEDULING DISTRIBUTED VIRTUAL RESOURCE BLOCKS

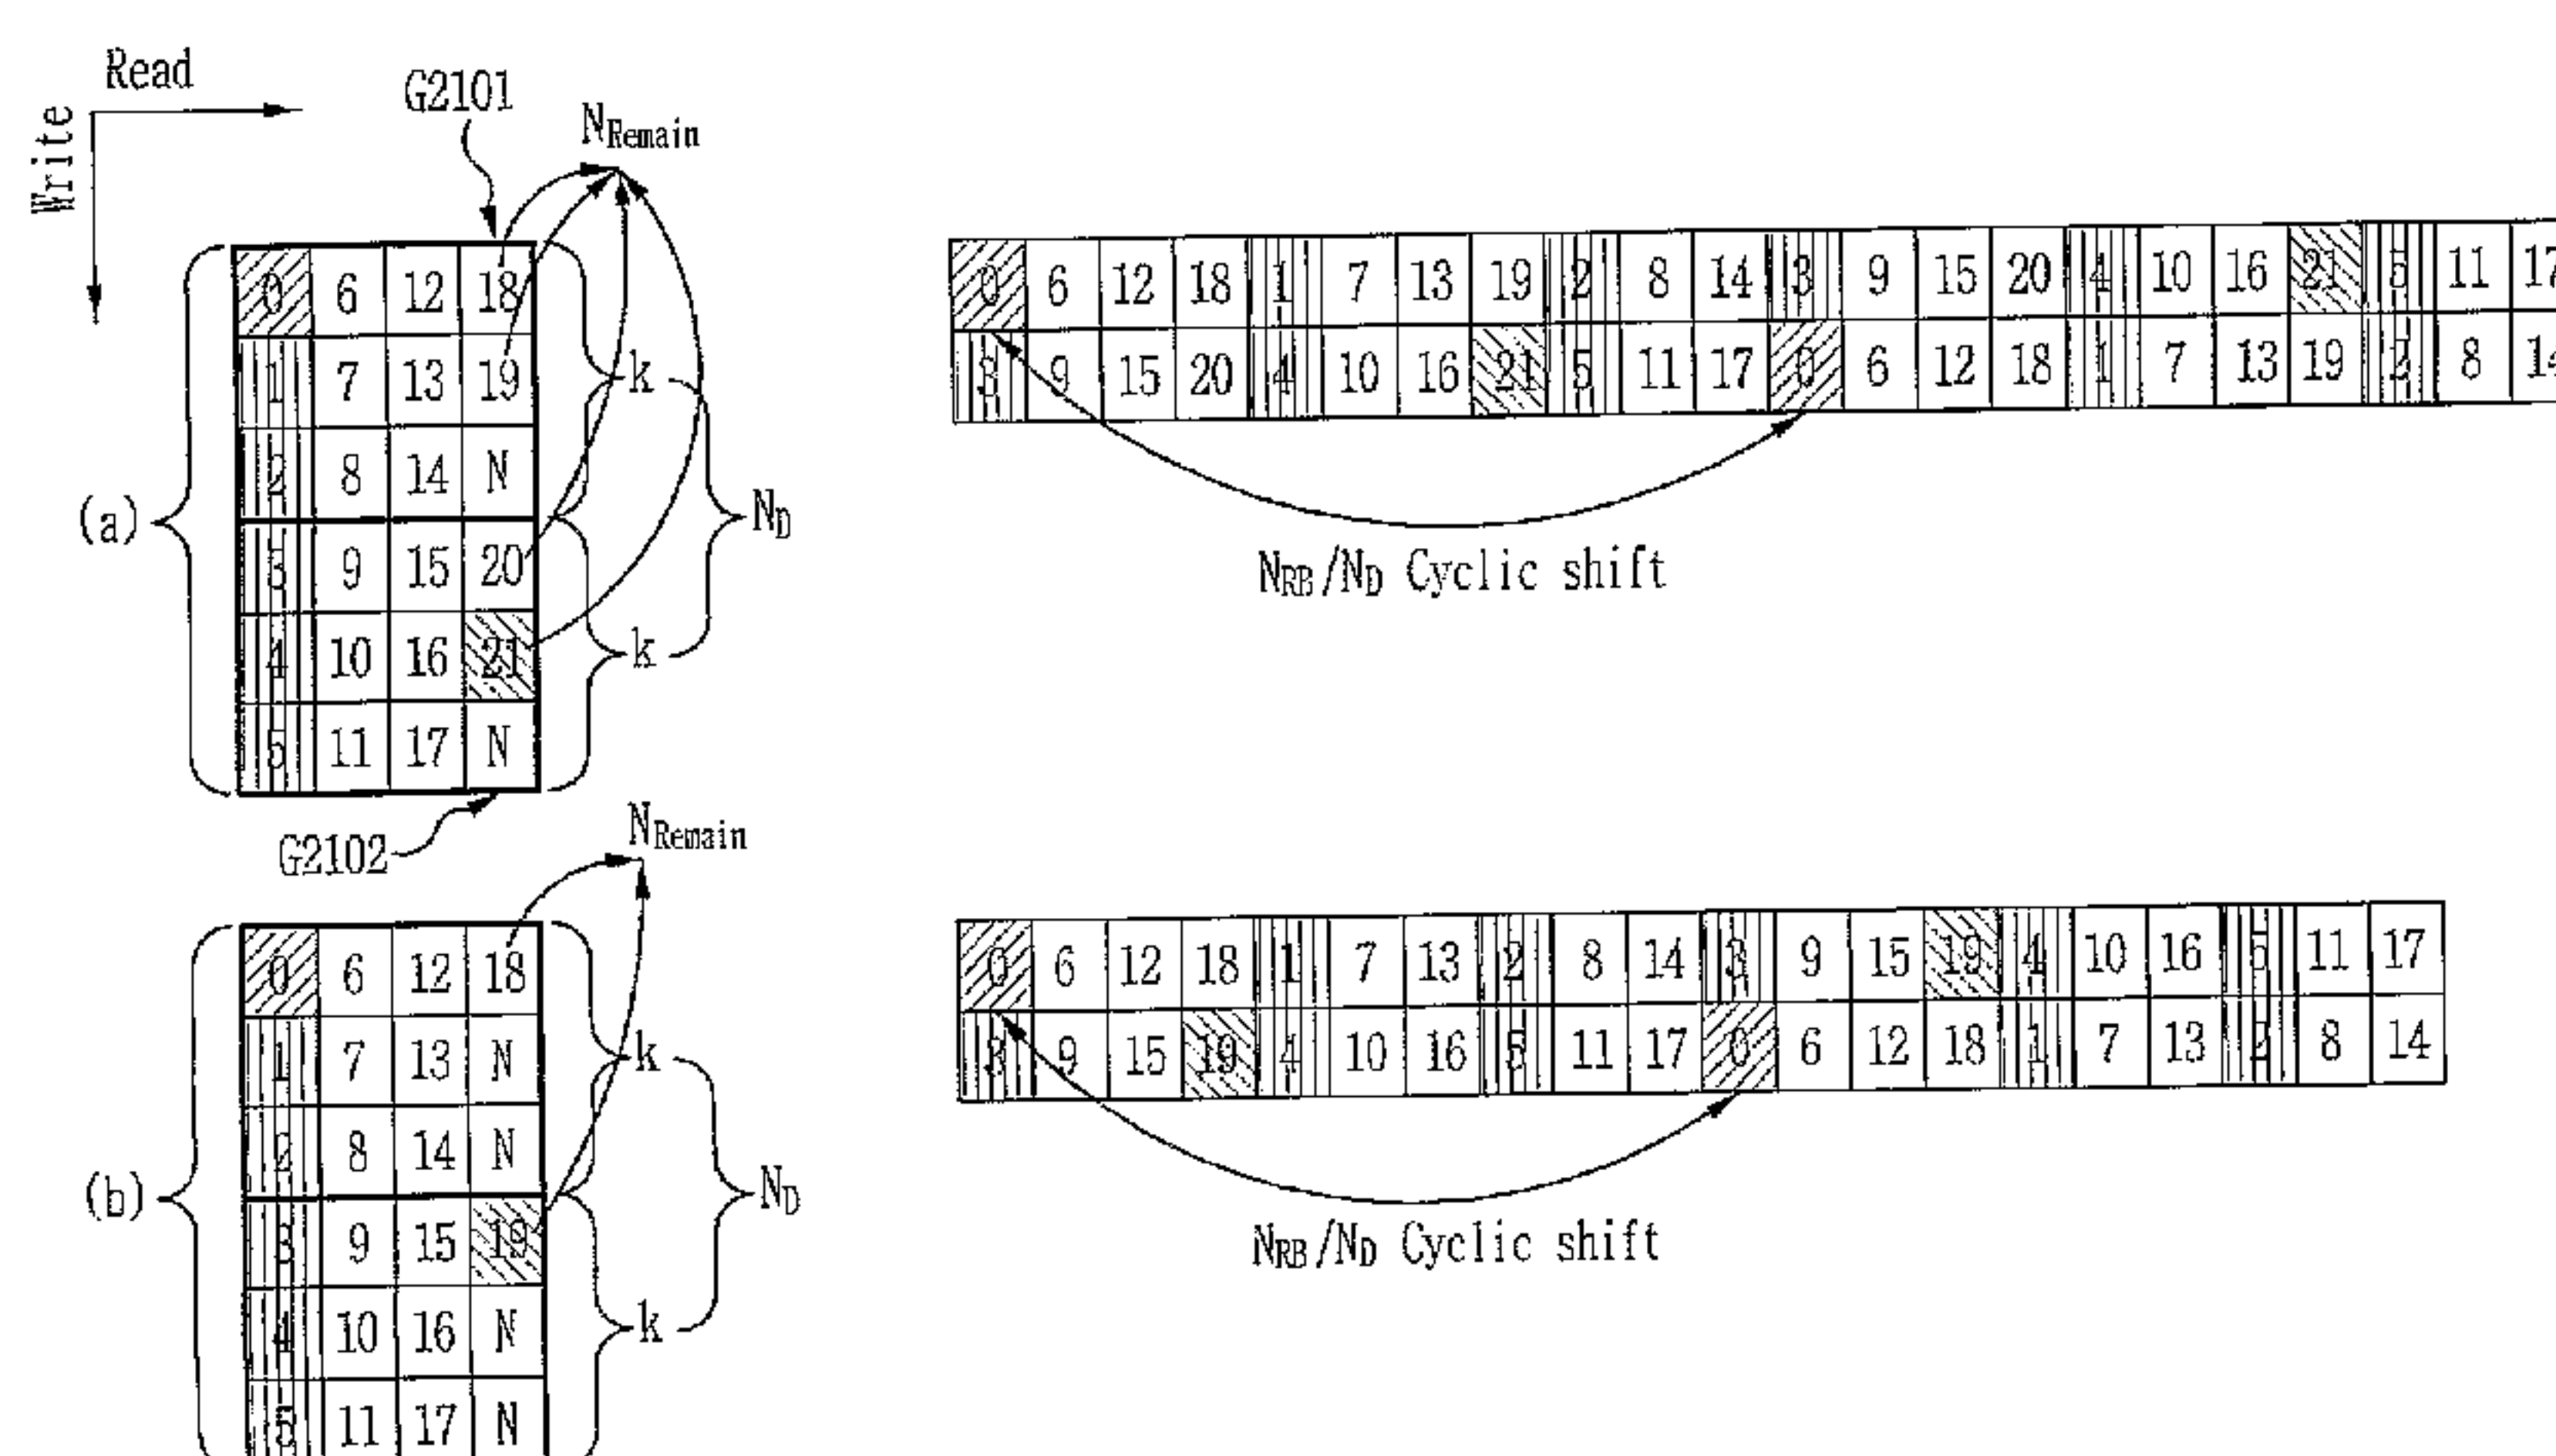FIG. 21



(57) Abstract: A method for efficiently scheduling virtual resource blocks to physical resource blocks is disclosed. In a wireless mobile communication system, for distributed mapping of consecutively allocated virtual resource blocks to physical resource blocks, when nulls are inserted into a block interleaver used for the mapping, they are uniformly distributed to ND divided groups of the block interleaver, which are equal in number to the number (ND) of physical resource blocks to which one virtual resource block is mapped.

WO 2009/088202 A3



OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,
MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

(88) Date of publication of the international search report:
22 October 2009

【DESCRIPTION】**【Invention Title】****METHOD FOR SCHEDULING DISTRIBUTED VIRTUAL RESOURCE
BLOCKS**5 **【Technical Field】**

The present invention relates to a broadband wireless mobile communication system, and more particularly, to radio resource scheduling for uplink/downlink packet data transmission in a cellular OFDM wireless packet communication system.

【Background Art】

10 In a cellular orthogonal frequency division multiplex (OFDM) wireless packet communication system, uplink/downlink data packet transmission is made on a subframe basis and one subframe is defined by a certain time interval including a plurality of OFDM symbols.

The Third Generation Partnership Project (3GPP) supports a type 1 radio frame
15 structure applicable to frequency division duplex (FDD), and a type 2 radio frame structure applicable to time division duplex (TDD). The structure of a type 1 radio frame is shown in FIG. 1. The type 1 radio frame includes ten subframes, each of which consists of two slots. The structure of a type 2 radio frame is shown in FIG. 2. The type 2 radio frame includes two half-frames, each of which is made up of five
20 subframes, a downlink piloting time slot (DwPTS), a gap period (GP), and an uplink piloting time slot (UpPTS), in which one subframe consists of two slots. That is, one

subframe is composed of two slots irrespective of the radio frame type.

A signal transmitted in each slot can be described by a resource grid including $N_{RB}^{DL} N_{SC}^{RB}$ subcarriers and N_{symb}^{DL} OFDM symbols. Here, N_{RB}^{DL} represents the number of resource blocks (RBs) in a downlink, N_{SC}^{RB} represents the number of subcarriers constituting one RB, and N_{symb}^{DL} represents the number of OFDM symbols in one downlink slot. The structure of this resource grid is shown in FIG. 3.

RBs are used to describe a mapping relationship between certain physical channels and resource elements. The RBs can be classified into physical resource blocks (PRBs) and virtual resource blocks (VRBs), which means that a RB may be either one of a PRB or a VRB. A mapping relationship between the VRBs and the PRBs can be described on a subframe basis. In more detail, it can be described in units of each of slots constituting one subframe. Also, the mapping relationship between the VRBs and the PRBs can be described using a mapping relationship between indexes of the VRBs and indexes of PRBs. A detailed description of this will be further given in embodiments of the present invention.

A PRB is defined by N_{symb}^{DL} consecutive OFDM symbols in a time domain and N_{SC}^{RB} consecutive subcarriers in a frequency domain. One PRB is therefore composed of $N_{symb}^{DL} N_{SC}^{RB}$ resource elements. The PRBs are assigned numbers from 0 to $N_{RB}^{DL} - 1$ in the frequency domain.

A VRB can have the same size as that of the PRB. There are two types of VRBs defined, the first one being a localized type and the second one being a distributed type.

For each VRB type, a pair of VRBs have a single VRB index in common (may hereinafter be referred to as a 'VRB number') and are allocated over two slots of one subframe. In other words, N_{RB}^{DL} VRBs belonging to a first one of two slots constituting one subframe are each assigned any one index of 0 to $N_{RB}^{DL}-1$, and N_{RB}^{DL} VRBs belonging to a second one of the two slots are likewise each assigned any one index of 0 to $N_{RB}^{DL}-1$.

The index of a VRB corresponding to a specific virtual frequency band of the first slot has the same value as that of the index of a VRB corresponding to the specific virtual frequency band of the second slot. That is, assuming that a VRB corresponding to an i th virtual frequency band of the first slot is denoted by VRB1(i), a VRB corresponding to a j th virtual frequency band of the second slot is denoted by VRB2(j) and index numbers of the VRB1(i) and VRB2(j) are denoted by index(VRB1(i)) and index(VRB2(j)), respectively, a relationship of index(VRB1(k)) = index(VRB2(k)) is established (see FIG. 4a).

Likewise, the index of a PRB corresponding to a specific frequency band of the first slot has the same value as that of the index of a PRB corresponding to the specific frequency band of the second slot. That is, assuming that a PRB corresponding to an i th frequency band of the first slot is denoted by PRB1(i), a PRB corresponding to a j th frequency band of the second slot is denoted by PRB2(j) and index numbers of the PRB1(i) and PRB2(j) are denoted by index(PRB1(i)) and index(PRB2(j)), respectively, a relationship of index(PRB1(k)) = index(PRB2(k)) is established (see FIG. 4b).

Some of the plurality of aforementioned VRBs are allocated as the localized type and the others are allocated as the distributed type. Hereinafter, the VRBs allocated as

the localized type will be referred to as 'localized virtual resource blocks (LVRBs)' and the VRBs allocated as the distributed type will be referred to as 'distributed virtual resource blocks (DVRBs)'.

The localized VRBs (LVRBs) are directly mapped to PRBs and the indexes of the LVRBs correspond to the indexes of the PRBs. Also, LVRBs of index i correspond to PRBs of index i . That is, an LVRB1 having the index i corresponds to a PRB1 having the index i , and an LVRB2 having the index i corresponds to a PRB2 having the index i (see FIG. 5). In this case, it is assumed that the VRBs of FIG. 5 are all allocated as LVRBs.

The distributed VRBs (DVRBs) may not be directly mapped to PRBs. That is, the indexes of the DVRBs can be mapped to the PRBs after being subjected to a series of processes.

First, the order of a sequence of consecutive indexes of the DVRBs can be interleaved by a block interleaver. Here, the sequence of consecutive indexes means that the index number is sequentially incremented by one beginning with 0. A sequence of indexes outputted from the interleaver is sequentially mapped to a sequence of consecutive indexes of PRB1s (see FIG. 6). It is assumed that the VRBs of FIG. 6 are all allocated as DVRBs. On the other hand, the sequence of indexes outputted from the interleaver is cyclically shifted by a predetermined number and the cyclically shifted index sequence is sequentially mapped to a sequence of consecutive indexes of PRB2s (see FIG. 7). It is assumed that the VRBs of FIG. 7 are all allocated as DVRBs. In this manner, PRB indexes and DVRB indexes can be mapped over two slots.

On the other hand, in the above processes, a sequence of consecutive indexes of the DVRBs may be sequentially mapped to the sequence of consecutive indexes of the

PRB1s without passing through the interleaver. Also, the sequence of consecutive indexes of the DVRBs may be cyclically shifted by the predetermined number without passing through the interleaver and the cyclically shifted index sequence may be sequentially mapped to the sequence of consecutive indexes of the PRB2s.

5 According to the above-mentioned processes of mapping DVRBs to PRBs, a PRB1(i) and a PRB2(i) having the same index i can be mapped to a DVRB1(m) and a DVRB2(n) having different indexes m and n. For example, referring to FIGs. 6 and 7, a PRB1(1) and a PRB2(1) are mapped to a DVRB1(6) and a DVRB2(9) having different indexes. A frequency diversity effect can be obtained based on the DVRB
10 mapping scheme.

In the case where VRB(1)s, among the VRBs, are allocated as DVRBs as in FIG. 8, if the methods of FIGs. 6 and 7 are used, LVRBs cannot be assigned to a PRB2(6) and a PRB1(9) although VRBs have not been assigned yet to the PRB2(6) and PRB1(9). The reason is as follows: according to the aforementioned LVRB mapping scheme, that
15 LVRBs are mapped to the PRB2(6) and PRB1(9) means that LVRBs are also mapped to a PRB1(6) and a PRB2(9); however, the PRB1(6) and PRB2(9) have already been mapped by the aforementioned VRB1(1) and VRB2(1). In this regard, it will be understood that the LVRB mapping may be restricted by the DVRB mapping results. Therefore, there is a need to determine DVRB mapping rules in consideration of the
20 LVRB mapping.

In a broadband wireless mobile communication system using a multi-carrier, radio resources can be allocated to each terminal with a LVRB and/or DVRB scheme. The information indicating which scheme is used can be transmitted with a bitmap format. At this time, the allocation of radio resources to each terminal can be carried out in units

74420-444

6

of one RB. In this case, resources can be allocated with a granularity of '1' RB, but a large amount of bit overhead is required to transmit the allocation information with the bitmap format. Alternatively, an RB group (RBG) consisting of PRBs of k consecutive indexes (e.g., $k=3$) may be defined and resources may be allocated with a
5 granularity of '1' RBG. In this case, the RB allocation is not sophisticatedly performed, but there is an advantage that bit overhead is reduced.

In this case, LVRBs can be mapped to PRBs on an RBG basis. For example, PRBs having three consecutive indexes, a PRB1(i), PRB1($i+1$), PRB1($i+2$), PRB2(i), PRB2($i+1$) and PRB2($i+2$), may constitute one RBG, and LVRBs may be mapped to
10 this RBG in units of an RBG. However, in the case where one or more of the PRB1(i), PRB1($i+1$), PRB1($i+2$), PRB2(i), PRB2($i+1$) and PRB2($i+2$) were previously mapped by DVRBs, this RBG cannot be mapped by LVRBs on an RBG basis. That is, the DVRB mapping rules may restrict the RBG-unit LVRB mapping.

As mentioned above, because the DVRB mapping rules may affect the LVRB
15 mapping, there is a need to determine the DVRB mapping rules in consideration of the LVRB mapping.

【Disclosure】

74420-444

7

According to an aspect of the present invention, there is provided a method for transmitting downlink data using resource blocks at a base station in a wireless mobile communication system, the method comprising: transmitting downlink data mapped to physical resource blocks (PRBs) to a user equipment, wherein indexes of virtual resource blocks (VRBs) are mapped to indexes of the PRBs for each of N slots of a subframe, and indexes of the PRBs for “ N ”-th slot are shifted with respect to indexes of the PRBs for “ $N-1$ ”-th slot based on a predetermined gap, wherein the indexes of the VRBs are interleaved by a block interleaver, wherein the block interleaver includes N regions, the indexes of the VRBs are written row by row in the block interleaver and read out column by column, and a number of columns of the block interleaver is equal to $K \cdot N$, wherein, when nulls are inserted into the block interleaver, the nulls are inserted into K -th column in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

According to another aspect of the present invention, there is provided a method for transmitting downlink data using resource blocks at a base station in a wireless mobile communication system, the method comprising: transmitting downlink data mapped to physical resource blocks (PRBs) to a user equipment, wherein indexes of virtual resource blocks (VRBs) are mapped to indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the “ N ”-th slot are shifted with respect to the indexes of the PRBs for the “ $N-1$ ”-th slot based on a predetermined gap, wherein the indexes of the VRBs are interleaved by a block interleaver, wherein the block interleaver includes N regions, the indexes of the VRBs are written column by column in the block interleaver and read out row by row, and a number of the rows of the block interleaver is equal to $K \cdot N$, wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K -th row in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

According to another aspect of the present invention, there is provided a base station transmitting downlink data using resource blocks in a wireless mobile communication

74420-444

7a

system, the base station comprising: a processor for controlling an operation of the base station; and a memory unit driven by the processor, wherein the processor is configured to transmit downlink data mapped to physical resource blocks (PRBs) to a user equipment, wherein indexes of virtual resource blocks (VRBs) are mapped to indexes of the PRBs for
5 each of N slots of a subframe, and the indexes of the PRBs for the “N”-th slot are shifted with respect to the indexes of the PRBs for the “N – 1”-th slot based on a predetermined gap, wherein the indexes of the VRBs are interleaved by a block interleaver, wherein the block interleaver includes N regions, the indexes of the VRBs are written row by row in the block interleaver and read out column by column, and a number of the columns of the block
10 interleaver is equal to $K \cdot N$, wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K-th column in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

According to another aspect of the present invention, there is provided a base station transmitting downlink data using resource blocks in a wireless mobile communication
15 system, the base station comprising: a processor for controlling an operation of the base station; and a memory unit driven by the processor, wherein the processor is configured to transmit downlink data mapped to physical resource blocks (PRBs) to a user equipment, wherein indexes of virtual resource blocks (VRBs) are mapped to indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the “N”-th slot are shifted with
20 respect to the indexes of the PRBs for the “N – 1”-th slot based on a predetermined gap, wherein the indexes of the VRBs are interleaved by a block interleaver, wherein the block interleaver includes N regions, the indexes of the VRBs are written column by column in the block interleaver and read out row by row, and a number of the rows of the block interleaver is equal to $K \cdot N$, wherein, when nulls are inserted into the block interleaver, the nulls are
25 inserted into the K-th row in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

According to another aspect of the present invention, there is provided a method for receiving downlink data using resource blocks at a user equipment in a wireless mobile communication system, the method comprising: receiving downlink control

74420-444

7b

information including resource allocation information for the downlink data from a base station; and receiving the downlink data mapped to physical resource blocks (PRBs) based on the downlink control information, wherein the resource allocation information indicates virtual resource block (VRB) allocations for the user equipment, wherein indexes of the PRBs to which the downlink data are mapped are determined based on mapping relationship between virtual resource blocks (VRBs) and the PRBs, wherein the mapping relationship is defined as indexes of the VRBs which are mapped to the indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the “N”-th slot are shifted with respect to the indexes of the PRBs for the “N – 1”-th slot based on a predetermined gap, wherein the indexes of the VRBs are interleaved by a block interleaver, wherein the block interleaver includes N regions, the indexes of the VRBs are written row by row in the block interleaver and read out column by column, and a number of the columns of the block interleaver is equal to $K \cdot N$, wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K-th column in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

According to another aspect of the present invention, there is provided a method for receiving downlink data using resource blocks at a user equipment in a wireless mobile communication system, the method comprising: receiving downlink control information including resource allocation information for the downlink data from a base station; and receiving the downlink data mapped to physical resource blocks (PRBs) based on the downlink control information, wherein the resource allocation information indicates virtual resource block (VRB) allocations for the user equipment, wherein indexes of the PRBs to which the downlink data are mapped are determined based on mapping relationship between virtual resource blocks (VRBs) and the PRBs, wherein the mapping relationship is defined as indexes of the VRBs which are mapped to the indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the “N”-th slot are shifted with respect to the indexes of the PRBs for the “N – 1”-th slot based on a predetermined gap, wherein the indexes of the VRBs are interleaved by a block interleaver, wherein the block interleaver includes N regions, the indexes of the VRBs are written column by column in the block interleaver and read out row by row, and a number of the rows of the block interleaver is

74420-444

7c

equal to $K \cdot N$, wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K -th row in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

According to another aspect of the present invention, there is provided a user
 5 equipment for receiving downlink data using resource blocks in a wireless mobile communication system, the user equipment comprising: a processor for controlling an operation of the user equipment; and a memory unit driven by the processor, wherein the processor is configured to receive downlink control information including resource allocation information for the downlink data from a base station and to receive the downlink data
 10 mapped to physical resource blocks (PRBs) based on the downlink control information, wherein the resource allocation information indicates virtual resource block (VRB) allocations for the user equipment, wherein indexes of the PRBs to which the downlink data are mapped are determined based on mapping relationship between virtual resource blocks (VRBs) and the PRBs, wherein the mapping relationship is defined as indexes of the VRBs which are
 15 mapped to the indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the " N "-th slot are shifted with respect to the indexes of the PRBs for the " $N - 1$ "-th slot based on a predetermined gap, wherein the indexes of the VRBs are interleaved by a block interleaver, wherein the block interleaver includes N regions, the indexes of the VRBs are written row by row in the block interleaver and read out column by column, and a number
 20 of the columns of the block interleaver is equal to $K \cdot N$, wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K -th column in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

According to another aspect of the present invention, there is provided a user
 25 equipment for receiving downlink data using resource blocks in a wireless mobile communication system, the user equipment comprising: a processor for controlling an operation of the user equipment; and a memory unit driven by the processor, wherein the processor is configured to receive downlink control information including resource allocation information for the downlink data from a base station and to receive the downlink data

74420-444

7d

mapped to physical resource blocks (PRBs) based on the downlink control information, wherein the resource allocation information indicates virtual resource block (VRB) allocations for the user equipment, wherein indexes of the PRBs to which the downlink data are mapped are determined based on mapping relationship between virtual resource blocks (VRBs) and the PRBs, wherein the mapping relationship is defined as indexes of the VRBs which are mapped to the indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the " N "-th slot are shifted with respect to the indexes of the PRBs for the " $N - 1$ "-th slot based on a predetermined gap, wherein the indexes of the VRBs are interleaved by a block interleaver, wherein the block interleaver includes N regions, the indexes of the VRBs are written column by column in the block interleaver and read out row by row, and a number of the rows of the block interleaver is equal to $K \cdot N$, wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K -th row in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

Another aspect provides, in a wireless mobile communication system that supports a resource allocation scheme in which one resource block group (RBG) including consecutive physical resource blocks is indicated by one bit, a resource block mapping method for distributively mapping consecutively allocated virtual resource blocks to the physical resource blocks, the method including: interleaving, using a block interleaver, indexes of the virtual resource blocks determined from a resource indication value (RIV) indicating a start index number of the virtual resource blocks and a length of the virtual resource blocks; and sequentially mapping the interleaved indexes to indexes of the physical resource blocks on a first slot of one subframe, the subframe including the first slot and a second slot, and sequentially mapping indexes obtained by cyclically shifting the interleaved indexes by a gap for the distribution to the indexes of the physical resource blocks on the second slot, wherein the gap is a multiple of a square of the number (M_{RBG}) of the consecutive physical resource blocks constituting the RBG.

When a degree of the block interleaver is defined as the number ($C = 4$) of columns of the block interleaver, the number (R) of rows of the block

74420-444

7e

interleaver may be given as in expression (1) and the number (N_{null}) of nulls filled in the block interleaver may be given as in expression (2).

[Expression (1)]

$$R = N_{\text{interleaver}} / C = \lceil N_{\text{DVRB}} / (C \cdot M_{\text{RBG}}) \rceil \cdot M_{\text{RBG}}$$

5

$$N_{\text{interleaver}} = \lceil N_{\text{DVRB}} / (C \cdot M_{\text{RBG}}) \rceil \cdot C \cdot M_{\text{RBG}}$$

where M_{RBG} is the number of the consecutive physical resource blocks constituting the RBG, and N_{DVRB} is the number of the distributively allocated virtual resource blocks.

5 [Expression (2)]

$$N_{null} = N_{interleaver} - N_{DVRB} = \lceil N_{DVRB} / (C \cdot M_{RBG}) \rceil \cdot C \cdot M_{RBG} - N_{DVRB}$$

$$N_{interleaver} = \lceil N_{DVRB} / (C \cdot M_{RBG}) \rceil \cdot C \cdot M_{RBG}$$

where M_{RBG} is the number of the consecutive physical resource blocks constituting the RBG, and N_{DVRB} is the number of the distributively allocated virtual
10 resource blocks.

A degree of the block interleaver may be equal to a diversity order ($N_{DivOrder}$) determined by the distribution.

When an index d of one of the distributively allocated virtual resource blocks is
15 given, an index $P_{1,d}$ of corresponding one of the physical resource blocks on the first slot mapped to the index d may be given as in expression (3) and an index $P_{2,d}$ of corresponding one of the physical resource blocks on the second slot mapped to the index d may be given as in expression (4). Here, R is the number of rows of the block interleaver, C is the number of columns of the block interleaver, N_{DVRB} is the number of
20 resource blocks used for the distributively allocated virtual resource blocks, N_{null} is the number of nulls filled in the block interleaver, and mod means a modulo operation.

[Expression (3)]

$$p_{1,d} = \begin{cases} p'_{1,d} & , \text{when } N_{null} = 0 \text{ or } (d < N_{DVRB} - N_{null} \text{ and } \text{mod}(d, C) < 2) \\ p'_{1,d} - N_{null} / 2 & , \text{when } N_{null} \neq 0 \text{ and } (d < N_{DVRB} - N_{null} \text{ and } \text{mod}(d, C) \geq 2) \end{cases}$$

$$\text{where } p'_{1,d} = \text{mod}(d, C) \cdot R + \lfloor d / C \rfloor$$

$$p_{1,d} = \begin{cases} p'_{1,d} - R + N_{null} / 2 & , \text{when } N_{null} \neq 0 \text{ and } (d \geq N_{DVRB} - N_{null} \text{ and } \text{mod}(d, C/2) = 0) \\ p'_{1,d} - R & , \text{when } N_{null} \neq 0 \text{ and } (d \geq N_{DVRB} - N_{null} \text{ and } \text{mod}(d, C/2) = 1) \end{cases}$$

5

$$\text{where } p'_{1,d} = \text{mod}(d, C/2) \cdot 2R + \lfloor 2d / C \rfloor$$

[Expression (4)]

$$p_{2,d} = \text{mod}(p_{1,d} + N_{DVRB} / 2, N_{DVRB})$$

10

Here, C may be equal to the degree of the block interleaver.

The index $P_{1,d}$ may be $p_{1,d} + N_{PRB} - N_{DVRB}$ when it is larger than $N_{DVRB}/2$, and the index $P_{2,d}$ may be $p_{2,d} + N_{PRB} - N_{DVRB}$ when it is larger than $N_{DVRB}/2$. Here, N_{PRB} is the number of physical resource blocks in the system.

15

When the number (N_{DVRB}) of the virtual resource blocks is not a multiple of the degree of the block interleaver, the step of interleaving may include dividing the interleaver into groups of the number (N_D) of physical resource blocks to which one virtual resource block is mapped and uniformly distributing nulls to the divided groups.

20

The groups may correspond to rows of the block interleaver, respectively, when a degree of the block interleaver is the number of the rows of the block interleaver, and to columns of the block interleaver, respectively, when the degree of the block

74420-444

10

interleaver is the number of the columns of the block interleaver.

Some embodiments of the present disclosure relate to a resource scheduling method for efficiently combining scheduling of an FSS scheme and scheduling of an FDS scheme.

- 5 In another aspect, provided herein is, in a wireless mobile communication system that supports a resource allocation scheme in which one resource block group (RBG) including consecutive physical resource blocks is indicated by one bit, a resource block mapping method for distributively mapping consecutively allocated virtual resource blocks to the physical resource blocks, the method including: interleaving, using a block interleaver,
 10 indexes of the virtual resource blocks determined from a resource indication value (RIV) indicating a start index number of the virtual resource blocks and a length of the virtual resource blocks; and sequentially mapping the interleaved indexes to indexes of the physical resource blocks on a first slot of one subframe, the subframe including the first slot and a second slot, and sequentially mapping indexes obtained by cyclically shifting the interleaved
 15 indexes by a gap for the distribution to the indexes of the physical resource blocks on the second slot, wherein the gap (N_{gap}) for the distribution is given as in expression (5).

[Expression (5)]

$$N_{gap} = \text{round}(N_{PRB}/(2 \cdot M_{RBG}^2)) \cdot M_{RBG}^2$$

- where M_{RBG} is the number of the consecutive physical resource blocks
 20 constituting the RBG, and N_{PRB} is the number of physical resource blocks in the system.

When nulls are allowed to be inputted to the block interleaver, the number (N_{DVRB}) of the distributively allocated virtual resource blocks may be given as in expression (6).

74420-444

11

[Expression (6)]

$$N_{DVRB} = \min(N_{PRB} - N_{gap}, N_{gap}) \cdot 2$$

5 When an index d of one of the distributively allocated virtual resource blocks is given, an index $P_{1,d}$ of corresponding one of the physical resource blocks on the first slot mapped to the index d may be $p_{1,d} + N_{PRB} - N_{DVRB}$ when it is larger than $N_{DVRB}/2$, and an index $P_{2,d}$ of corresponding one of the physical resource blocks on the second slot mapped to the index d may be $p_{2,d} + N_{PRB} - N_{DVRB}$ when it is larger than $N_{DVRB}/2$,
 10 wherein N_{DVRB} is the number of resource blocks used for the distributively allocated virtual resource blocks.

 In another aspect provided herein is, in a wireless mobile communication system that supports a resource allocation scheme in which one resource block group (RBG) including consecutive physical resource blocks is indicated
 15 by one bit, a resource block mapping method for distributively mapping consecutively allocated virtual resource blocks to the physical resource blocks, the method including: detecting a resource indication value (RIV) indicating a start index number of the virtual resource blocks and a length of the virtual resource blocks and determining indexes of the virtual resource blocks from the detected resource indication value; and interleaving
 20 the determined indexes of the virtual resource blocks using a block interleaver and distributively mapping the virtual resource blocks to the physical resource blocks, wherein a degree of the block interleaver is equal to a diversity order ($N_{DivOrder}$) determined by the distribution.

74420-444

12

In another aspect, provided herein is, in a wireless mobile communication system that supports a resource allocation scheme in which one resource block group (RBG) including consecutive physical resource blocks is indicated by one bit, a resource block mapping method for distributively mapping consecutively
 5 allocated virtual resource blocks to the physical resource blocks, the method including:
 determining indexes of the virtual resource blocks from a resource indication value (RIV) indicating a start index number of the virtual resource blocks and a length of the virtual resource blocks; and interleaving the determined indexes of the virtual resource blocks using a block interleaver and distributively mapping the virtual resource blocks
 10 to the physical resource blocks, wherein, when the number (N_{DVRB}) of the virtual resource blocks is not a multiple of a degree of the block interleaver, the step of mapping includes dividing the interleaver into groups of the number (N_D) of physical resource blocks to which one virtual resource block is mapped and uniformly distributing nulls to the divided groups.

15 The groups may correspond to rows of the block interleaver, respectively, when a degree of the block interleaver is the number of the rows of the block interleaver, and to columns of the block interleaver, respectively, when the degree of the block interleaver is the number of the columns of the block interleaver.

The control information may be a DCI transmitted over a PDCCH.

20 The gap may be a function of a system bandwidth.

When an index p of one of the physical resource blocks is given, an interleaved index d_{p1} mapped to the index p may be given as in expression (7) or expression (8), and a cyclically shifted index d_{p2} mapped to the index p may be given as in expression (9) or expression (10). Here, R is the number of rows of the block interleaver, C is the

number of columns of the block interleaver, N_{DVRB} is the number of resource blocks used for the distributively allocated virtual resource blocks, and mod means a modulo operation.

5 [Expression (7)]

$$d_{p_1} = \text{mod}(p', R) \cdot C + \lfloor p' / R \rfloor$$

$$\text{where } p' = \begin{cases} p+1 & , \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p \geq 2R-1 \text{ and } p \neq 3R-2 \\ 2R-1 & , \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p = 3R-2 \\ p & , \text{when } \text{mod}(N_{DVRB}, C) = 0 \text{ or } p < 2R-1 \end{cases}$$

[Expression (8)]

10 $d_{p_1} = \text{mod}(p', R) \cdot C + \lfloor p' / R \rfloor$

$$\text{where } p' = \begin{cases} p+1 & , \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p \geq 2R-1 \text{ and } p \neq 3R-2 \\ 2R-1 & , \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p = 3R-2 \\ p & , \text{when } \text{mod}(N_{DVRB}, C) = 0 \text{ or } p < 2R-1 \end{cases}$$

[Expression (9)]

$$d_{p_2} = \text{mod}(p'', R) \cdot C + \lfloor p'' / R \rfloor$$

15 $\text{where } p'' = \begin{cases} p''' + 1 & , \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p''' \geq 2R-1 \text{ and } p''' \neq 3R-2 \\ 2R-1 & , \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p''' = 3R-2 \\ p''' & , \text{when } \text{mod}(N_{DVRB}, C) = 0 \text{ or } p''' < 2R-1 \end{cases}$

$$\text{where } p''' = \text{mod}(p + N_{DVRB} / 2, N_{DVRB})$$

[Expression (10)]

$$d_{p_2} = \begin{cases} d_{p_1} - 2 & , \text{when } \text{mod}(d_{p_1}, C) \geq 2 \\ d_{p_1} + 2 & , \text{when } \text{mod}(d_{p_1}, C) < 2 \text{ and } d_{p_1} \neq N_{DVRB} - 2 \text{ and } d_{p_1} \neq N_{DVRB} - 1 \\ N_{DVRB} - 1 & , \text{when } \text{mod}(d_{p_1}, C) < 2 \text{ and } d_{p_1} = N_{DVRB} - 2 \\ N_{DVRB} - 2 & , \text{when } \text{mod}(d_{p_1}, C) < 2 \text{ and } d_{p_1} = N_{DVRB} - 1 \end{cases}$$

The diversity order (N_{DivOrder}) may be a multiple of the number (N_D) of physical resource blocks to which one virtual resource block is mapped.

- 5 The gap may be 0 when the number of the virtual resource blocks is larger than or equal to a predetermined threshold value (M_{th}).

The resource block mapping method may further include receiving information about the gap, the gap being determined by the received gap information.

In another aspect, provided herein is, in a wireless mobile

- 10 communication system that supports an RBG resource allocation scheme and a subset resource allocation scheme, a resource block mapping method for distributively mapping consecutively allocated virtual resource blocks to physical resource blocks, the method including: receiving control information including resource block allocation information indicating distributed allocation of the virtual resource blocks, and indexes
15 of the virtual resource blocks; and interleaving the indexes of the virtual resource blocks using a block interleaver, wherein the step of interleaving includes, until the indexes of the virtual resource blocks are mapped to all indexes of physical resource blocks belonging to any one of a plurality of RBG subsets, preventing the indexes of the virtual resource blocks from being mapped to indexes of physical resource blocks belonging to
20 a different one of the RBG subsets.

The resource block mapping method may further include sequentially mapping the interleaved indexes to indexes of the physical resource blocks on a first slot of one

subframe, the subframe including the first slot and a second slot, and sequentially mapping indexes obtained by cyclically shifting the interleaved indexes by a gap for the distribution to the indexes of the physical resource blocks on the second slot, wherein the gap for the distribution is determined such that the virtual resource blocks mapped on the first slot and the virtual resource blocks mapped on the second slot are included in the same subset.

The number (N_{DVRB}) of the virtual resource blocks may be a multiple of a diversity order ($N_{DivOrder}$) determined by the distribution.

The number (N_{DVRB}) of the virtual resource blocks may be a multiple of the number M_{RBG} of the consecutive physical resource blocks constituting the RBG.

The number (N_{DVRB}) of the virtual resource blocks may be a multiple of a value obtained by multiplying the number M_{RBG} of the consecutive physical resource blocks constituting the RBG by the number (N_D) of physical resource blocks to which one virtual resource block is mapped.

The number (N_{DVRB}) of the virtual resource blocks may be a multiple of a value obtained by multiplying the square (M_{RBG}^2) of the number of the consecutive physical resource blocks constituting the RBG by the number (N_D) of physical resource blocks to which one virtual resource block is mapped.

The number N_{DVRB} of the virtual resource blocks may be a common multiple of a value obtained by multiplying the number (M_{RBG}) of the consecutive physical resource blocks constituting the RBG by the number (N_D) of physical resource blocks to which one virtual resource block is mapped and a degree (D) of the block interleaver.

The degree (D) of the block interleaver may be a multiple of the number (N_D) of physical resource blocks to which one virtual resource block is mapped.

74420-444

16

The number N_{DVRB} of the virtual resource blocks may be a common multiple of a value obtained by multiplying a square (M_{RBG}^2) of the number of the consecutive physical resource blocks constituting the RBG by the number (N_D) of physical resource blocks to which one virtual resource block is mapped and a degree (D) of the block interleaver.

The degree (D) of the block interleaver may be a multiple of the number (N_D) of physical resource blocks to which one virtual resource block is mapped.

The number N_{DVRB} of the virtual resource blocks may be a common multiple of a value obtained by multiplying a degree (D) of the block interleaver by a square (M_{RBG}^2) of the number of the consecutive physical resource blocks constituting the RBG and a value obtained by multiplying the number (N_D) of physical resource blocks to which one virtual resource block is mapped by the square (M_{RBG}^2) of the number of the consecutive physical resource blocks constituting the RBG.

The degree (D) of the block interleaver may be a multiple of the number (N_D) of physical resource blocks to which one virtual resource block is mapped.

The aforementioned various aspects are all applicable to a base station and/or mobile station. In the case where the aforementioned aspects are applied to the mobile station, the resource block mapping method may further include receiving the resource indication value (RIV) from the mobile station of the wireless mobile communication system, prior to the step of interleaving or the step of determining the indexes of the virtual resource blocks.

74420-444

17

According to some embodiments, it is possible to efficiently combine scheduling of an FSS scheme and scheduling of an FDS scheme and simply implement a scheduling information transfer method.

【Description of Drawings】

5 The accompanying drawings, which are included to provide a further understanding of the invention, illustrate embodiments of the invention and together with the description serve to explain the principle of the invention.

In the drawings:

FIG. 1 is a view showing an example of a radio frame structure applicable to FDD.

10 FIG. 2 is a view showing an example of a radio frame structure applicable to TDD.

FIG. 3 is a view showing an example of a resource grid structure constituting a 3GPP transmission slot.

FIG. 4a is a view showing an example of the structure of VRBs in one subframe.

FIG. 4b is a view showing an example of the structure of PRBs in one subframe.

15 FIG. 5 is a view illustrating an example of a method for mapping LVRBs to PRBs.

FIG. 6 is a view illustrating an example of a method for mapping DVRBs in a first slot to PRBs.

FIG. 7 is a view illustrating an example of a method for mapping DVRBs in a second slot to PRBs.

20 FIG. 8 is a view illustrating an example of a method for mapping DVRBs to PRBs.

FIG. 9 is a view illustrating an example of a method for mapping DVRBs and LVRBs to PRBs.

FIG. 10 is a view illustrating an example of a method for allocating resource blocks by a compact scheme.

FIG. 11 is a view illustrating an example of a method for mapping two DVRBs having consecutive indexes to a plurality of contiguous PRBs.

5 FIG. 12 is a view illustrating an example of a method for mapping two DVRBs having consecutive indexes to a plurality of spaced PRBs.

FIG. 13 is a view illustrating an example of a method for mapping four DVRBs having consecutive indexes to a plurality of spaced PRBs.

10 FIG. 14 is a view illustrating an example of a resource block mapping method in the case where $\text{Gap} = 0$, according to one embodiment of the present invention.

FIG. 15 is a view illustrating a bitmap configuration.

FIG. 16 is a view illustrating an example of a method for mapping based on a combination of a bitmap scheme and a compact scheme.

15 FIGs. 17 and 18 are views illustrating a DVRB mapping method according to one embodiment of the present invention.

FIG. 19 is a view illustrating an example of a method for interleaving DVRB indexes.

20 FIGs. 20a and 20b are views illustrating an operation of a general interleaver when the number of resource blocks used in an interleaving operation is not a multiple of a diversity order.

FIGs. 21a and 21b are views illustrating a method for inserting nulls when the number of resource blocks used in an interleaving operation is not a multiple of a diversity order, in accordance with one embodiment of the present invention.

FIG. 22 is a view illustrating a method for mapping interleaved DVRB indexes

with $\text{Gap} = 0$ in accordance with one embodiment of the present invention.

FIG. 23 is a view illustrating an example of a method for mapping DVRB indexes, using different gaps for different terminals.

FIG. 24 is a view for explaining the relation between DVRB and PRB indexes.

5 FIG. 25a is a view for explaining the relation between DVRB and PRB indexes.

FIG. 25b is a view illustrating a general method for inserting nulls in an interleaver.

FIGs. 25c and 25d are views illustrating examples of a method for inserting nulls in an interleaver in one embodiment of the present invention, respectively.

10 FIGs. 26 and 27 are views illustrating examples of a method using a combination of the bitmap scheme using the RBG scheme and subset scheme and the compact scheme, respectively.

FIG. 28 is a view illustrating the case in which the number of DVRBs is set to a multiple of the number of physical resource blocks (PRBs), to which one virtual resource block (VRB) is mapped, N_D , and the number of consecutive physical resource
15 blocks constituting an RBG, M_{RBG} , in accordance with one embodiment of the present invention.

FIG. 29 is a view illustrating the case in which DVRB indexes are interleaved in accordance with the method of FIG. 28.

20 FIG. 30 is a view illustrating an example wherein mapping is performed under the condition in which the degree of a block interleaver is set to the number of columns of the block interleaver, namely, C , and C is set to a diversity order, in accordance with one embodiment of the present invention.

FIG. 31 is a view illustrating an example of a mapping method according to one embodiment of the present invention when the number of PRBs and the number of

74420-444

20

DVRBs are different from each other.

FIGs. 32 and 33 are views illustrating examples of a mapping method capable of increasing the number of DVRBs, using a given gap, in accordance with one embodiment of the present invention.

DESCRIPTION OF EMBODIMENTS

5

Reference will now be made in detail to the preferred embodiments of the present invention with reference to the accompanying drawings. The detailed description, which will be given below with reference to the accompanying drawings, is intended to explain exemplary embodiments of the present invention, rather than to show the only
10 embodiments that can be implemented according to the invention. The following detailed description includes specific details in order to provide a thorough understanding of the present invention. However, it will be apparent to those skilled in the art that the present invention may be practiced without such specific details. For example, the following description will be given centering around specific terms, but
15 the present invention is not limited thereto and any other terms may be used to represent the same meanings. Also, wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

In the case where a subframe consists of a first slot and a second slot, $\text{index}(\text{PRB1}(i))$ represents an index of a PRB of an i th frequency band of the first slot,
20 $\text{index}(\text{PRB2}(j))$ represents an index of a PRB of a j th frequency band of the second slot, and a relationship of $\text{index}(\text{PRB1}(k)) = \text{index}(\text{PRB2}(k))$ is established, as stated previously. Also, $\text{index}(\text{VRB1}(i))$ represents an index of a VRB of an i th virtual

frequency band of the first slot, $\text{index}(\text{VRB2}(j))$ represents an index of a VRB of a j th virtual frequency band of the second slot, and a relationship of $\text{index}(\text{VRB1}(k)) = \text{index}(\text{VRB2}(k))$ is established. At this time, VRB1s are mapped to PRB1s, and VRB2s are mapped to PRB2s. Also, VRBs are classified into DVRBs and LVRBs.

5 The rules for mapping LVRB1s to PRB1s and the rules for mapping LVRB2s to PRB2s are the same. However, the rules for mapping DVRB1s to PRB1s and the rules for mapping DVRB2s to PRB2s are different. That is, DVRBs are 'divided' and mapped to PRBs.

10 In the 3GPP, one RB is defined in units of one slot. However, in the detailed description of the invention, one RB is defined in units of one subframe, and this RB is divided into N_D sub-RBs on a time axis, so that the DVRB mapping rules are generalized and described. For example, in the case where $N_D = 2$, a PRB defined in units of one subframe is divided into a first sub-PRB and a second sub-PRB, and a VRB defined in units of one subframe is divided into a first sub-VRB and a second sub-VRB.

15 In this case, the first sub-PRB corresponds to the aforementioned PRB1, and the second sub-PRB corresponds to the aforementioned PRB2. Also, the first sub-VRB corresponds to the aforementioned VRB1, and the second sub-VRB corresponds to the aforementioned VRB2. Also, in both the detailed description of the invention and the 3GPP, the DVRB mapping rules for obtaining a frequency effect is described on the basis of one subframe. Therefore, it will be understood that all embodiments of the detailed description of the invention are concepts including an RB mapping method in the 3GPP.

20 Hereinafter, terms used in the detailed description of this application are defined as follows.

A 'resource element (RE)' represents a smallest frequency-time unit in which data or a modulated symbol of a control channel is mapped. Provided that a signal is transmitted in one OFDM symbol over M subcarriers and N OFDM symbols are transmitted in one subframe, MxN REs are present in one subframe.

5 A 'physical resource block (PRB)' represents a unit frequency-time resource for data transmission. In general, one PRB consists of a plurality of consecutive REs in a frequency-time domain, and a plurality of PRBs are defined in one subframe.

A 'virtual resource block (VRB)' represents a virtual unit resource for data transmission. In general, the number of REs included in one VRB is equal to that of
10 REs included in one PRB, and, when data is transmitted, one VRB can be mapped to one PRB or some areas of a plurality of PRBs.

A 'localized virtual resource block (LVRB)' is one type of the VRB. One LVRB is mapped to one PRB. A PRB mapped to one LVRB is different from a PRB mapped to another LVRB.

15 A 'distributed virtual resource block (DVRB)' is another type of the VRB. One DVRB is mapped to a plurality of PRBs in a distributed manner.

' N_D ' = ' N_d ' represents the number of PRBs to which one DVRB is mapped. FIG. 9 illustrates an example of a method for mapping DVRBs and LVRBs to PRBs. In FIG. 9, $N_D = 3$. An arbitrary DVRB can be divided into three parts and the divided parts
20 can be mapped to different PRBs, respectively. At this time, the remaining part of each PRB, not mapped by the arbitrary DVRB, is mapped by a divided part of a different DVRB.

' N_{PRB} ' represents the number of PRBs in a system. In the case where the band of the system is divided, N_{PRB} may be the number of PRBs in the divided part.

' N_{LVRB} ' represents the number of LVRBs available in the system.

' N_{DVRB} ' represents the number of DVRBs available in the system.

' N_{LVRB_UE} ' represents the maximum number of LVRBs allocable to one user equipment (UE).

5 ' N_{DVRB_UE} ' represents the maximum number of DVRBs allocable to one UE.

' N_{subset} ' represents the number of subsets.

' $N_{DivOrder}$ ' represents a diversity order required in the system. Here, the diversity order is defined by the number of RBs which are not adjacent to each other.

Here, the "number of RBs" means the number of RBs divided on a frequency axis.

10 That is, even in the case where RBs can be divided by time slots constituting a subframe, the "number of RBs" means the number of RBs divided on the frequency axis of the same slot.

FIG. 9 shows an example of definitions of LVRBs and DVRBs.

As can be seen from FIG. 9, each RE of one LVRB is one-to-one mapped to each
15 RE of one PRB. For example, one LVRB is mapped to a PRB0 (901). In contrast, one DVRB is divided into three parts and the divided parts are mapped to different PRBs, respectively. For example, a DVRB0 is divided into three parts and the divided parts are mapped to a PRB1, PRB4 and PRB6, respectively. Likewise, a DVRB1 and a DVRB2 are each divided into three parts and the divided parts are mapped to the
20 remaining resources of the PRB1, PRB4 and PRB6. Although each DVRB is divided into three parts in this example, the present invention is not limited thereto. For example, each DVRB may be divided into two parts.

Downlink data transmission from a base station to a specific terminal or uplink data transmission from the specific terminal to the base station is made through one or

more VRBs in one subframe. When the base station transmits data to the specific terminal, it has to notify the terminal of which one of the VRBs is used for data transmission. Also, in order to enable the specific terminal to transmit data, the base station has to notify the terminal of which one of the VRBs is allowed to use for data
5 transmission.

Data transmission schemes can be broadly classified into a frequency diversity scheduling (FDS) scheme and a frequency selective scheduling (FSS) scheme. The FDS scheme is a scheme that obtains a reception performance gain through frequency diversity, and the FSS scheme is a scheme that obtains a reception performance gain
10 through frequency selective scheduling.

In the FDS scheme, a transmission stage transmits one data packet over subcarriers widely distributed in a system frequency domain so that symbols in the data packet can experience various radio channel fadings. Therefore, an improvement in reception performance is obtained by preventing the entire data packet from being subject to
15 unfavorable fading. In contrast, in the FSS scheme, an improvement in reception performance is obtained by transmitting the data packet over one or more consecutive frequency areas in the system frequency domain which are in a favorable fading state. In a cellular OFDM wireless packet communication system, a plurality of terminals are present in one cell. At this time, because the radio channel conditions of the respective
20 terminals have different characteristics, it is necessary to perform data transmission of the FDS scheme with respect to a certain terminal and data transmission of the FSS scheme with respect to a different terminal even within one subframe. As a result, a detailed FDS transmission scheme and a detailed FSS transmission scheme must be designed such that the two schemes can be efficiently multiplexed within one subframe.

On the other hand, in the FSS scheme, a gain can be obtained by selectively using a band favorable to a UE among all available bands. In contrast, in the FDS scheme, an evaluation is not made as to whether a specific band is good or bad, and, as long as a frequency separation capable of adequately obtaining a diversity is maintained, there is
5 no need to select and transmit a specific frequency band. Accordingly, it is advantageous to an improvement in entire system performance to perform the frequency selective scheduling of the FSS scheme preferentially when scheduling.

In the FSS scheme, because data is transmitted using subcarriers consecutively contiguous in the frequency domain, it is preferable that the data is transmitted using
10 LVRBs. At this time, provided that N_{PRB} PRBs are present in one subframe and a maximum of N_{LVRB} LVRBs are available within the system, the base station can transmit bitmap information of N_{LVRB} bits to each terminal to notify the terminal of which one of the LVRBs through which downlink data will be transmitted or which one of the LVRBs through which uplink data can be transmitted. That is, each bit of the
15 N_{LVRB} -bit bitmap information, which is transmitted to each terminal as scheduling information, indicates whether data will or can be transmitted through an LVRB corresponding to this bit, among the N_{LVRB} LVRBs. This scheme is disadvantageous in that, when the number N_{LVRB} becomes larger, the number of bits to be transmitted to each terminal becomes larger in proportion thereto.

20 On the other hand, provided that a terminal can be allocated only one set of contiguous RBs, information of the allocated RBs can be expressed by a start point of the RBs and the number thereof. This scheme is referred to as a 'compact scheme' in this document.

FIG. 10 illustrates an example of a method for allocating resource blocks by the

compact scheme.

In this case, as shown in FIG. 10, the length of available RBs is different depending on respective start points, and the number of combinations of RB allocation is $N_{LVRB}(N_{LVRB}+1)/2$ in the end. Accordingly, the number of bits required for the combinations is $\text{ceiling}(\log_2(N_{LVRB}(N_{LVRB}+1)/2))$. Here, $\text{ceiling}(x)$ means rounding “x” up to a nearest integer. This method is advantageous over the bitmap scheme in that the number of bits does not so significantly increase with the increase in the number N_{LVRB} .

On the other hand, for a method for notifying a user equipment (UE) of DVRB allocation, it is necessary to previously promise the positions of respective divided parts of DVRBs distributively transmitted for a diversity gain. Alternatively, additional information may be required to directly notify the positions. Preferably, provided that the number of bits for signaling for the DVRBs is set to be equal to the number of bits in LVRB transmission of the above-stated compact scheme, it is possible to simplify a signaling bit format in a downlink. As a result, there are advantages that the same channel coding can be used, etc.

Here, in the case where one UE is allocated a plurality of DVRBs, this UE is notified of a DVRB index of a start point of the DVRBs, a length (= the number of the allocated DVRBs), and a relative position difference between divided parts of each DVRB (e.g., a gap between the divided parts).

FIG. 11 illustrates an example of a method for mapping two DVRBs having consecutive indexes to a plurality of contiguous PRBs.

As shown in FIG. 11, in the case where a plurality of DVRBs having consecutive indexes are mapped to a plurality of contiguous PRBs, first divided parts 1101 and 1102

and second divided parts 1103 and 1104 are spaced part from each other by a gap 1105, while divided parts belonging to each of the upper divided parts and lower divided parts are contiguous to each other, so that the diversity order becomes 2.

FIG. 12 illustrates an example of a method for mapping two DVRBs having
5 consecutive indexes to a plurality of spaced PRBs. In this application, 'spaced PRBs' means that the PRBs are not adjacent to each other.

In the method of FIG. 12, when allowing DVRBs to correspond to PRBs, consecutive DVRB indexes can be allowed to be distributed, not correspond to contiguous PRBs. For example, a DVRB index '0' and a DVRB index '1' are not
10 arranged contiguous to each other. In other words, in FIG. 12, DVRB indexes are arranged in the order of 0, 8, 16, 4, 12, 20, ..., and this arrangement can be obtained by inputting the consecutive indexes shown in FIG. 11 to, for example, a block interleaver. In this case, it is possible to obtain distribution within each of divided parts 1201 and 1202, as well as distribution by a gap 1203. Therefore, when a UE is allocated two
15 DVRBs as shown in FIG. 12, the diversity order increases to 4, resulting in an advantage that the diversity gain can be obtained still more.

At this time, the value of the gap indicative of the relative position difference between the divided parts can be expressed in two ways. Firstly, the gap value can be expressed by a difference between DVRB indexes. Secondly, the gap value can be
20 expressed by a difference between indexes of PRBs to which a DVRB is mapped. In the case of FIG. 12, Gap = 1 in the first way, while Gap = 3 in the second way. FIG. 12 shows the latter case 1203. Meanwhile, if the total number of RBs of the system is changed, the DVRB index arrangement may be changed accordingly. In this case, the use of the second way has the advantage of grasping a physical distance between the

divided parts.

FIG. 13 illustrates the case where one UE is allocated four DVRBs under the same rules as those of FIG. 12.

As can be seen from FIG. 13, the diversity order increases to 7. However, as the
5 diversity order increases, the diversity gain converges. The results of existing studies represent that the increase in the diversity gain is insignificant when the diversity order is about 4 or more. The un-mapped parts of PRBs 1301, 1302, 1303, 1304, and 1305 can be allocated and mapped for other UE which uses DVRBs, however, the un-mapped parts cannot be allocated and mapped for another UE which uses LVRBs. Therefore,
10 when there are no other UEs using DVRBs, there is a disadvantage that the un-mapped parts of the PRBs 1301, 1302, 1303, 1304 and 1305 cannot help being left empty, not used. In addition, the distributed arrangement of DVRBs breaks consecutiveness of available PRBs, resulting in a restriction in allocating consecutive LVRBs.

As a result, there is a need for a method to limit the diversity order to a proper level
15 to carry out the distributed allocation.

A first embodiment and second embodiment of the present invention are directed to methods for setting a relative distance between divided parts of a DVRB mapped to PRBs to 0. In these embodiments, in a scheme for mapping consecutive DVRB indexes to spaced PRBs, when a plurality of DVRBs are allocated to one UE, respective
20 divided parts of each of the DVRBs can be distributively allocated to different PRBs, thereby raising the diversity order. Alternatively, under the same conditions, the respective divided parts of each DVRB may be allocated to the same PRB, not distributively allocated to different PRBs. In this case, it is possible to reduce the number of PRBs to which DVRBs are distributively allocated, thus limiting the

diversity order.

<Embodiment 1>

This embodiment is directed to a method for switching divided parts to a distributed/non-distributed mode by setting a reference value for the number of DVRBs allocated to one UE. Here, the 'distributed mode' refers to a mode where the gap between divided DVRB parts is not 0, and the 'non-distributed mode' refers to a mode where the gap between divided DVRB parts is 0.

Assume that the number of DVRBs allocated to one UE is M . When M is smaller than a specific reference value ($= M_{th}$), divided parts of each DVRB are distributively allocated, thereby raising the diversity order.

Conversely, when M is larger than or equal to the reference value ($= M_{th}$), the divided parts are allocated to the same PRB, not distributively allocated. This allocation of the divided parts to the same PRB can reduce the number of PRBs to which DVRBs are distributively mapped, thus limiting the diversity order.

That is, in the case where M is larger than or equal to the reference value M_{th} , a gap, which is a relative distance between divided parts of each DVRB mapped to PRBs, is set to 0.

For example, if the number of DVRBs is 2 under the condition that $M_{th} = 3$, divided parts of each DVRB can be distributively mapped as shown in FIG. 12. In contrast, if the number of DVRBs is 4 under the condition that $M_{th} = 3$, a gap is set to 0 so that divided parts of each DVRB can be mapped to the same PRB.

FIG. 14 illustrates an example of a resource block mapping method in the case where $\text{Gap} = 0$, according to the embodiment 1.

<Embodiment 2>

This embodiment is directed to a method for switching divided parts to a distributed/non-distributed mode using a control signal. Here, the 'distributed mode' refers to a mode where the gap between divided DVRB parts is not 0, and the 'non-distributed mode' refers to a mode where the gap between divided DVRB parts is 0.

The embodiment 2 is a modified version of the embodiment 1. In the embodiment 2, M_{th} is not set, and, as needed, a control signal is transmitted and received to switch divided parts to the distributed/non-distributed mode. In response to the transmitted and received control signal, divided DVRB parts can be distributed to raise the diversity order or be mapped to the same PRB to lower the diversity order.

For example, the control signal may be defined to indicate the value of a gap, which is a relative distance between divided parts of each DVRB mapped to PRBs. That is, the control signal may be defined to indicate the gap value itself.

For example, in the case where the control signal indicates that $Gap = 3$, divided DVRB parts are distributively mapped as shown in FIG. 12 or 13. Also, in the case where the control signal indicates that $Gap = 0$, divided DVRB parts are mapped to the same PRB as shown in FIG. 14.

As stated previously, in order to freely schedule the number N_{PRB} of PRBs in the system on a PRB basis, it is necessary to transmit an N_{PRB} -bit bitmap to each UE to be scheduled. When the number N_{PRB} of PRBs in the system is large, overhead of control information is increased for transmission of the N_{PRB} -bit bitmap. Therefore, consideration can be given to a method for scaling down a scheduling unit or dividing the entire band and then performing transmission in different scheduling units in only

some bands.

In the 3GPP LTE, a bitmap configuration scheme has been proposed in consideration of overhead when the bitmap is transmitted as stated above.

FIG. 15 illustrates a bitmap configuration.

5 A signal for resource allocation consists of a header 1501 and a bitmap 1502. The header 1501 indicates the structure of the bitmap 1502 being transmitted, namely, a bitmap scheme, by indicating a signaling scheme.

The bitmap scheme is classified into two types, an RBG scheme and a subset scheme.

10 In the RBG scheme, RBs are grouped into a plurality of groups. RBs are mapped in units of one group. That is, a plurality of RBs constituting one group have association of mapping. When the group size is larger, it is difficult to minutely perform resource allocation, but it is possible to reduce the number of bits of a bitmap. Referring to FIG. 15, because $N_{PRB} = 32$, a bitmap of a total of 32 bits is required for
15 one RB-unit resource allocation. However, provided that three RBs are grouped ($P = 3$) and resources are allocated on an RB group (RBG) basis, all RBs can be divided into a total of eleven groups. As a result, only a bitmap of 11 bits is required, thereby significantly reducing the amount of control information. In contrast, in the case where resources are allocated on this RBG basis, they cannot be allocated in units of
20 one RB, so that they cannot be minutely allocated.

In order to make up for it, the subset scheme is used. In this scheme, a plurality of RBGs are set as one subset, and resources are allocated on an RB basis within each subset. In order to use the 11-bit bitmap in the above-stated RBG scheme of FIG. 15, it is possible to configure '3' subsets (subset 1, subset 2 and subset 3). Here, '3' is the

number of RBs constituting each RBG stated above. As a result, $N_{RB}/P = \text{ceiling}(32/3) = 11$, so that RBs in each subset can be allocated on the RB basis with 11 bits. Here, the header information 1501 is required to indicate which one of the RBG scheme and subset scheme is used for the bitmap and which subset is used if the subset scheme is used.

Provided that the header information 1501 just indicates which one of the RBG scheme and subset scheme is used and some bits of the bitmap used for the RBGs are used to indicate the subset type, all the RBs in all the subsets may not be utilized. For example, referring to FIG. 15, because a total of three subsets are set, a 2-bit subset indicator 1503 is required to identify the subsets. At this time, a total of 12 RBs are assigned to the subset 1 1504 or 1505, and only 9 bits are left in the bitmap of a total of 11 bits if 2 bits of the subset indicator 1503 are excepted from the bitmap. It is not possible to individually indicate all of the twelve RBs with 9 bits. In order to solve this, one bit of the RBG bitmap can be assigned as a shift indicator 1506 so that it can be used to shift the position of an RB indicated by the subset bitmap. For example, in the case where the subset indicator 1503 indicates the subset 1 and the shift indicator 1506 indicates 'shift 0', the remaining 8 bits of the bitmap are used to indicate RB0, RB1, RB2, RB9, RB10, RB11, RB18 and RB19 (see 1504). On the other hand, in the case where the subset indicator 1503 indicates the subset 1 and the shift indicator 1506 indicates 'shift 1', the remaining 8 bits of the bitmap are used to indicate RB10, RB11, RB18, RB19, RB20, RB27, RB28 and RB29 (see 1505).

Although the subset indicator 1503 has been described in the above example to indicate the subset 1 1504 or 1505, it may indicate the subset 2 or subset 3. Accordingly, it can be seen that eight RBs can be mapped in units of one RB with

respect to each combination of the subset indicator 1503 and shift indicator 1506. Also, referring to FIG. 15, in the present embodiment, the numbers of RBs assigned to the subset 1, subset 2 and subset 3 are 12, 11 and 9 which are different, respectively. Accordingly, it can be seen that four RBs cannot be used in the case of the subset 1,
5 three RBs cannot be used in the case of the subset 2 and one RB cannot be used in the case of the subset 3 (see shaded areas). FIG. 15 is nothing but an illustration, and the present embodiment is thus not limited thereto.

Consideration can be given to use of a combination of the bitmap scheme using the RBG scheme and subset scheme and the compact scheme.

10 FIG. 16 illustrates an example of a method for mapping based on a combination of the bitmap scheme and compact scheme.

In the case where DVRBs are mapped and transmitted as shown in FIG. 16, some resource elements of an RBG0, RBG1, RBG2 and RBG4 are filled by the DVRBs. The RBG0, among them, is included in a subset 1, the RBG1 and RBG4 are included in
15 a subset 2, and the RBG2 is included in a subset 3. At this time, it is impossible to allocate the RBG0, RBG1, RBG2 and RBG4 to UEs in the RBG scheme. Also, RBs (PRB0, PRB4, PRB8 and PRB12) in the RBGs left after being assigned as DVRBs must be allocated to UEs in the subset scheme. However, because a UE allocated in the subset scheme can be allocated only an RB in one subset, the remaining RBs belonging
20 to other subsets cannot help being allocated to different UEs. As a result, LVRB scheduling is restricted by DVRB scheduling.

Therefore, there is a need for a DVRB arrangement method capable of reducing the restriction in the LVRB scheduling.

Third to fifth embodiments of the present invention are directed to methods for

setting a relative distance between divided parts of a DVRB mapped to PRBs to reduce an effect on LVRBs.

<Embodiment 3>

5 The embodiment 3 is directed to a method for, when mapping divided parts of DVRBs, mapping the divided parts to RBs belonging to one specific subset and then mapping the divided parts to RBs belonging to other subsets after mapping the divided parts to all the RBs of the specific subset.

10 According to this embodiment, when consecutive DVRB indexes are mapped to distributed PRBs, they can be distributively mapped within one subset and then mapped to other subsets when they cannot be mapped within the one subset any longer. Also, interleaving of consecutive DVRBs is performed within a subset.

FIGs. 17 and 18 illustrate a DVRB mapping method according to one embodiment of the present invention.

15 DVRB0 to DVRB11 are distributively mapped within a subset 1 (1703), DVRB12 to DVRB22 are then distributively mapped within a subset 2 (1704), and DVRB23 to DVRB31 are then distributively mapped within a subset 3 (1705). This mapping can be carried out by a method of using a block interleaver for each subset or any other method.

20 This arrangement can be achieved by controlling a block interleaver operation scheme.

<Embodiment 4>

The embodiment 4 is directed to a method for limiting mapping of divided DVRB

parts to PRBs included in the same subset.

In the embodiment 4, gap information can be used to map divided parts of the same DVRB within the same subset. At this time, a parameter for all PRBs, such as the aforementioned 'Gap', may be used. Alternatively, another parameter for one
5 subset, 'Gap_{subset}' may be used. This will hereinafter be described in detail.

It is possible to together use a method for distributively filling consecutive DVRBs within one subset and a method for mapping divided parts of each DVRB within the same subset. In this case, preferably, Gap_{subset}, which means a difference between PRB numbers within the same subset, can be used as information indicative of a relative
10 position difference between divided DVRB parts. The meaning of Gap_{subset} can be understood from FIG. 17. PRBs included in the subset 1 are a PRB0, PRB1, PRB2, PRB9, PRB10, PRB11, PRB18, PRB19, PRB20, PRB27, PRB28 and PRB29. Here, the PRB18 is spaced apart from the PRB0 within the subset 1 by 6 (Gap_{subset} = 6) indexes. On the other hand, with respect to all PRBs, the PRB18 can be indicated to
15 be spaced apart from the PRB0 by 18 (Gap = 18) indexes.

<Embodiment 5>

The embodiment 5 is directed to a method for setting a relative distance between divided DVRB parts to a multiple of the square of the size of an RBG.

20 The limited setting of Gap to a multiple of the size of an RBG as in the present embodiment provides characteristics as follows. That is, when the relative distance between the divided DVRB parts is indicated as a relative position difference within one subset, it is set to a multiple of the size (P) of an RBG. Alternatively, when the relative distance between the divided DVRB parts is indicated as a position difference with

respect to all PRBs, it is limited to a multiple of the square (P^2) of the RBG size.

For example, referring to FIG. 15, it can be seen that $P = 3$ and $P^2 = 9$. Here, it can be seen that the relative distance between a first divided part 1701 and second divided part 1702 of a DVRB is a multiple of $P (=3)$ because $\text{Gap}_{\text{subset}} = 6$, and a
5 multiple of $P^2 (=9)$ because $\text{Gap} = 18$.

In the case where a scheme based on this embodiment is used, because the probability that RBGs only some resource elements of each of which are used will belong to the same subset is high, it is expected that resource elements or RBs left not used are present in the same subset. Therefore, it is possible to efficiently use
10 allocation of the subset scheme.

Referring to FIG. 17, because the size of an RBG10 is 2, it is different from the sizes ($= 3$) of other RBGs. In this case, for the convenience of DVRB index arrangement, the RBG10 may not be used for DVRBs. Also, referring to FIGs. 17 and 18, a total of four RBGs including an RBG9 belong to the subset 1, a total of three
15 RBGs, if excluding the RBG10, belong to the subset 2, and a total of three RBGs belong to the subset 3. Here, for the convenience of DVRB index arrangement, the RBG9, among the four RBGs belonging to the subset 1, may not be used for DVRBs. Thus, a total of three RBGs per subset may be used for DVRBs.

In this case, DVRB indexes can be sequentially mapped to one subset (for example, subset 1) used for DVRBs, among the subsets, as shown in FIG. 18. If the DVRB
20 indexes cannot be mapped to the one subset any longer, they can be mapped to a next subset (for example, subset 2).

On the other hand, it can be seen that DVRB indexes are consecutively arranged in FIG. 11, but non-consecutively arranged in FIGs. 12, 13, 14, 16, 17 and 18. In this

manner, DVRB indexes can be changed in arrangement before being mapped to PRB indexes, and this change can be performed by a block interleaver. Hereinafter, the structure of a block interleaver according to the present invention will be described.

5 <Embodiment 6>

Hereinafter, a description will be given of a method for configuring an interleaver having a desired degree equal to a diversity order, according to one embodiment of the present invention.

10 In detail, in a method for mapping consecutive DVRB indexes to non-contiguous, distributed PRBs, a method is proposed which uses a block interleaver and configures the interleaver such that it has a degree equal to a target diversity order N_{DivOrder} . The degree of the interleaver can be defined as follows.

15 That is, in a block interleaver having m rows and n columns, when data is written, the data is written while the index thereof is sequentially incremented. At this time, the writing is performed in such a manner that, after one column is completely filled, a column index is incremented by one and a next column is filled. In each column, the writing is performed while a row index is incremented. For reading from the interleaver, the reading is performed in such a manner that, after one row is completely read, a row index is incremented by one and a next row is read. In this case, the
20 interleaver can be referred to as an m -degree interleaver.

Conversely, in a block interleaver having m rows and n columns, data writing may be performed in such a manner that, after one row is filled, the process proceeds to a next row, and data reading may be performed in such a manner that, after one column is read, the process proceeds to a next column. In this case, the interleaver can be

referred to as an n-degree interleaver.

In detail, N_{DivOrder} is limited to a multiple of N_D . That is, $N_{\text{DivOrder}} = K \cdot N_D$. Here, K is a positive integer. Also, a block interleaver of a degree N_{DivOrder} is used.

FIG. 19 is an illustration when the number of RBs used in interleaving is $N_{\text{DVRB}} =$
 5 24 and $N_D = 2$ and $N_{\text{DivOrder}} = 2 \times 3 = 6$.

Referring to FIG. 19, for writing into an interleaver, data is written while the index thereof is sequentially incremented. At this time, the writing is performed in such a manner that, after one column is completely filled, a column index is incremented by one and a next column is filled. In one column, the writing is performed while a row
 10 index is incremented. For reading from the interleaver, the reading is performed in such a manner that, after one row is completely read, a row index is incremented by one and a next row is read. In one row, the reading is performed while a column index is incremented. In the case where the reading/writing is performed in this manner, the degree of the interleaver is the number of rows, which is set to a target diversity order, 6.

15 In the case where the interleaver is configured in this manner, a DVRB index order of a data sequence outputted from the interleaver can be used as an index order of first divided parts of DVRBs, and a DVRB index order of a data sequence obtained by cyclically shifting the outputted data sequence by N_{DVRB}/N_D can be used as an index order of the remaining divided parts. As a result, N_D divided parts generated from
 20 DVRBs are mapped to only N_D PRBs in pairs, and the difference between paired DVRB indexes is K .

For example, in FIG. 19, $N_{\text{DVRB}}/N_D = N_{\text{DVRB}} (= 24)/N_D (= 2) = 24/2 = 12$, and $K =$
 3. It can also be seen from FIG. 19 that a DVRB index order 1901 of a data sequence

outputted from the interleaver is given as “0 → 6 → 12 → 18 → 1 → 7 → 13 → 19 →
 2 → 8 → 14 → 20 → 3 → 9 → 15 → 21 → 4 → 10 → 16 → 22 → 5 → 11 → 17 →
 23”, and a DVRB index order 1902 of a data sequence obtained by cyclically shifting
 the outputted data sequence by $N_{\text{DVRB}}/N_D = 12$ is given as “3 → 9 → 15 → 21 → 4 →
 5 10 → 16 → 22 → 5 → 11 → 17 → 23 → 0 → 6 → 12 → 18 → 1 → 7 → 13 → 19 → 2
 → 8 → 14 → 20”. Also, DVRBs are paired. Referring to 1903 of FIG. 19, for
 example, it can be seen that a DVRB0 and a DVRB3 are paired. It can also be seen
 that respective combinations of divided parts generated from the DVRB0 and DVRB3
 are mapped to a PRB0 and a PRB12, respectively. This is similarly applied to other
 10 DVRBs having other indexes.

According to this embodiment, it is possible to effectively manage the relationship
 between DVRBs and PRBs to which the DVRBs are mapped.

<Embodiment 7>

15 Hereinafter, a method for filling nulls in a rectangular interleaver in accordance
 with one embodiment of the present invention will be described.

In the following description, the number of nulls filled in the interleaver may be
 represented by “ N_{null} ”.

In accordance with the embodiment 6, it is possible to completely fill data in the
 20 interleaver because N_{DVRB} is a multiple of N_{DivOrder} . However, when N_{DVRB} is not a
 multiple of N_{DivOrder} , it is necessary to take a null filling method into consideration
 because it is impossible to completely fill data in the interleaver.

For a cyclic shift by N_{DVRB}/N_D , N_{DVRB} should be a multiple of N_D . In order to
 completely fill data in a rectangular interleaver, N_{DVRB} should be a multiple of N_{DivOrder} .

However, when $K > 1$, N_{DVRB} may not be a multiple of $N_{DivOrder}$, even though it is a multiple of N_D . In this case, generally, data is sequentially filled in the block interleaver, and nulls are then filled in remaining spaces of the block interleaver. Thereafter, reading is performed. If the data is filled column by column, then the data
 5 is read row by row, or if the data is filled row by row, then the data is read column by column. In this case, no reading is performed for nulls.

FIGs. 20a and 20b illustrate a general block interleaver operation when the number of RBs used in an interleaving operation is 22, namely, $N_{DVRB} = 22$, $N_D = 2$, and $N_{DivOrder} = 2 \times 3 = 6$, that is, when N_{DVRB} is not a multiple of $N_{DivOrder}$.

10 Referring to FIG. 20a, the index difference between paired DVRBs has a random value. For example, DVRB pairs (0, 20), (6, 3), and (12, 9) (indicated by “2001”, “2002”, and “2003”) have index differences of 20 ($20 - 0 = 20$), 3 ($6 - 3 = 3$), and 3 ($12 - 9 = 3$), respectively. Accordingly, it can be seen that the index difference between paired DVRBs is not fixed to a certain value. For this reason, the scheduling of
 15 DVRBs gets complicated, as compared to the case in which the index difference between paired DVRBs has a fixed value.

Meanwhile, when it is assumed that N_{Remain} represents a remainder when N_{DVRB} is divided by $N_{DivOrder}$, nulls are filled in elements of a last column, except for elements corresponding to N_{Remain} values, as shown in FIG. 20a or 20b. For example, referring
 20 to FIG. 20a, nulls may be filled in two elements of the last column, except for four elements corresponding to four values, because the remainder when N_{DVRB} ($= 22$) is divided by $N_{DivOrder}$ ($= 6$) is 4 ($N_{Remain} = 4$). Although nulls are rearwardly filled in the above example, they may be positioned before a first index value. For example, the N_{Remain} values are filled in elements, starting from a first element. Also, nulls may be

arranged at predetermined positions, respectively.

FIGs. 21a and 21b illustrates a null arranging method according to one embodiment of the present invention. Referring to FIG. 21a and 21b, it can be seen that nulls are uniformly distributed, as compared to the case of FIGs. 20a and 20b.

5 In this embodiment, when nulls are to be filled in a rectangular block interleaver, $N_{DivOrder}$ corresponding to the degree of the interleaver is divided into N_D groups each having a size of K , and nulls are uniformly distributed in all the groups. For example, as shown in FIG. 21a, the interleaver may be divided into $N_D (= 2)$ groups G2101 and G2102. In this case, $K = 3$. One null is written in the first group G2101. Similarly,
10 one null is written in the second group G2102. Thus, nulls are distributively written.

For example, where writing is performed in such a manner that values are sequentially filled, N_{Remain} values remain finally. When indexes corresponding to the remaining values are arranged in N_D groups such that they are uniformly distributed, it is possible to uniformly arrange nulls. For example, in the case of FIG. 21a, $N_{Remain}(=$
15 4) data spaces remain. When indexes 18, 19, 20, and 21 corresponding to the data spaces are arranged in $N_D (= 2)$ groups such that they are uniformly distributed, it is possible to arrange one null in each group.

As a result, the difference between paired DVRB indexes can be maintained to be K or less (for example, $K = 3$). Accordingly, there is an advantage in that a more
20 efficient DVRB allocation can be achieved.

<Embodiment 8>

Hereinafter, a method for setting a relative distance between divided parts of each DVRB mapped to PRBs to 0 in accordance with one embodiment of the present

invention will be described.

FIG. 22 illustrates a method for mapping interleaved DVRB indexes while Gap = 0 in accordance with one embodiment of the present invention.

Meanwhile, where M DVRBs are allocated to one UE in a scheme for mapping
 5 consecutive DVRB indexes to non-contiguous, distributed PRBs, a reference value M_{th} for M may be set. Based on the reference value M_{th} , the divided parts of each DVRB may be distributively assigned to different PRBs, respectively, to raise the diversity order. Alternatively, the divided parts of each DVRB may be assigned to the same PRB without being distributed to different PRBs. In this case, it is possible to reduce
 10 the number of PRBs, to which DVRBs are distributively mapped, and thus to limit the diversity order.

That is, this method is a scheme in which the divided parts of each DVRB are distributed to raise the diversity order, when M is less than a specific reference value ($= M_{th}$), whereas, when M is not less than the specific reference value ($= M_{th}$), the divided
 15 parts of each DVRB are assigned to the same PRB without being distributed, to reduce the number of PRBs, to which DVRBs are distributively mapped, and thus to limit the diversity order.

That is, in this scheme, DVRB indexes of a data sequence outputted from the interleaver are applied, in common, to all divided parts of each DVRB such that they are
 20 mapped to PRBs, as shown in FIG. 22. For example, referring to FIG. 9, DVRB indexes of a data sequence outputted from the interleaver have an order of “0 → 6 → 12 → 18 → 1 → 7 → 13 → 19 → 2 → 8 → 14 → 20 → 3 → 9 → 15 → 21 → 4 → 10 → 16 → 22 → 5 → 11 → 17 → 23”. In this case, each data sequence DVRB index is applied, in common, to first and second divided parts 2201 and 2202 of each DVRB.

<Embodiment 9>

Hereinafter, a method, in which both the above-described embodiments 6 and 8 are used, will be described in accordance with one embodiment of the present invention.

5 FIG. 23 illustrates the case in which a UE1, which is subjected to a scheduling in a scheme of mapping respective divided parts of each DVRB to different PRBs, as shown in FIG. 19, and a UE2, which is subjected to a scheduling in a scheme of mapping the divided parts of each DVRB to the same PRB, as shown in FIG. 22, are simultaneously multiplexed. That is, FIG. 23 illustrates the case in which the UE1 and UE2 are
10 simultaneously scheduled in accordance with the methods of the embodiments 6 and 8, respectively.

For example, referring to FIG. 23, the UE1 is allocated a DVRB0, DVRB1, DVRB2, DVRB3, and DVRB4 (2301), whereas the UE2 is allocated a DVRB6, DVRB7, DVRB8, DVRB9, DVRB10, and DVRB11 (2302). However, the UE1 is
15 scheduled in such a manner that the divided parts of each DVRB are mapped to different PRBs, respectively, whereas the UE2 is scheduled in such a manner that the divided parts of each DVRB are mapped to the same PRB. Accordingly, the PRBs used for the UE1 and UE2 include a PRB0, PRB1, PRB4, PRB5, PRB8, PRB9, PRB12, PRB13, PRB16, PRB17, PRB20, and PRB21, as shown by "2303" in FIG. 23. In this
20 case, however, the PRB8 and PRB20 are partially used.

Where the divided parts of each DVRB are mapped to distributed PRBs, respectively, the difference between the paired DVRB indexes is limited to a value of K or less. Accordingly, this scheme has no influence on DVRBs spaced apart from each other by a gap of more than K. Accordingly, it is possible to easily distinguish indexes

usable in the “case in which the divided parts of each DVRB are mapped to the same PRB” from unusable indexes.

<Embodiment 10>

5 Hereinafter, a method for limiting an N_{DVRB} , to prevent generation of a null, will be described in accordance with one embodiment of the present invention.

Again referring to FIG. 20, it can be seen that the difference between the DVRB indexes paired for PRBs may not be fixed to a specific value. In order to reduce the DVRB index difference to a specific value or less, the method of FIG. 21 may be used
10 as described above.

When the method of FIG. 21 is used to distribute nulls, the complexity of the interleaver increases due to the processing of nulls. In order to prevent such a phenomenon, a method for limiting N_{DVRB} such that no null is generated may be taken into consideration.

15 In the illustrated interleaver, the number of RBs used for DVRBs, namely, N_{DVRB} , is limited to a multiple of the diversity order, namely, N_{DivOrder} , so that no null is filled in a rectangular matrix of the interleaver.

In a block interleaver of degree D , no null is filled in the rectangular matrix of the interleaver when the number of RBs used for DVRBs, namely, N_{DVRB} , is limited to a
20 multiple of D .

Hereinafter, several embodiments using the interleaver according to the present invention when $K = 2$, and $N_D = 2$ will be described. The relation between DVRB and PRB indexes may be expressed by a mathematic expression.

FIG. 24 is a view for explaining the relation between DVRB and PRB indexes.

Referring to the following description and FIG. 24, parameters used in mathematic expressions can be understood.

p : PRB index ($0 \leq p \leq N_{DVRB} - 1$)

d : DVRB index ($0 \leq d \leq N_{DVRB} - 1$)

5 $p_{1,d}$: Index of a first slot of a PRB to which a given DVRB index d is mapped

$p_{2,d}$: Index of a second slot of a PRB to which a given DVRB index d is mapped

d_{p_1} : DVRB index included in a first slot of a given PRB index p

d_{p_2} : DVRB index included in a second slot of a given PRB index p

10

Constants used in Expressions 1 to 11 expressing the relation between DVRB and PRB indexes are defined as follows.

C : Number of columns of the block interleaver

R : Number of rows of the block interleaver

15 N_{DVRB} : Number of RBs used for DVRBs

$$R = \lceil N_{DVRB} / C \rceil$$

N_{PRB} : Number of PRBs in the system bandwidth.

FIG. 25a is a view for explaining the above-described constants.

20 When $K = 2$, $N_D = 2$, and N_{DVRB} is a multiple of C , the relation between PRB and DVRB indexes may be derived using Expressions 1 to 3. First, if a PRB index p is given, a DVRB index can be derived using Expression 1 or 2. In the following

description, “mod(x,y)” means “x mod y”, and “mod” means a modulo operation. Also, “ $\lfloor \cdot \rfloor$ ” means a descending operation, and represents a largest one of integers equal to or smaller than a numeral indicated in “ $\lfloor \cdot \rfloor$ ”. On the other hand, “ $\lceil \cdot \rceil$ ” means an ascending operation, and represents a smallest one of integers equal to or larger than a numeral indicated in “ $\lceil \cdot \rceil$ ”. Also, “round(·)” represents an integer nearest to a numeral indicated in “(·)”. “min(x,y)” represents the value which is not larger among x and y, whereas “max(x,y)” represents the value which is not smaller among x and y.

[Expression 1]

$$d_{p_1} = \text{mod}(p, R) \cdot C + \lfloor p / R \rfloor$$

$$d_{p_2} = \text{mod}(p', R) \cdot C + \lfloor p' / R \rfloor$$

where $p' = \text{mod}(p + N_{DVRB} / 2, N_{DVRB})$

[Expression 2]

$$d_{p_1} = \text{mod}(p, R) \cdot C + \lfloor p / R \rfloor$$

$$d_{p_2} = \begin{cases} d_{p_1} - 2, & \text{when } \text{mod}(d_{p_1}, C) \geq 2 \\ d_{p_1} + 2, & \text{when } \text{mod}(d_{p_1}, C) < 2 \end{cases}$$

On the other hand, when N_{DVRB} is a multiple of C , and a DVRB index d is given, a PRB index can be derived using Expression 3.

[Expression 3]

$$p_{1,d} = \text{mod}(d, C) \cdot R + \lfloor d / C \rfloor$$

$$p_{2,d} = \text{mod}(p_{1,d} + N_{DVRB} / 2, N_{DVRB})$$

FIG. 25b illustrates a general method for filling nulls in an interleaver. This method is applied to the case in which $K = 2$, $N_D = 2$, and N_{DVRB} is a multiple of N_d . The method of FIG. 25b is similar to the method of FIGs. 20a and 20b. In accordance with the method of FIG. 25b, if a PRB index p is given, a DVRB index can be derived using Expression 4.

10 [Expression 4]

$$d_{p_1} = \text{mod}(p', R) \cdot C + \lfloor p' / R \rfloor$$

$$\text{where } p' = \begin{cases} p+1, & \text{when } \text{mod}(N'_{RB}, C) \neq 0 \text{ and } p \geq 3R-1 \\ p, & \text{when } \text{mod}(N'_{RB}, C) = 0 \text{ or } p < 3R-1 \end{cases}$$

$$d_{p_2} = \text{mod}(p'', R) \cdot C + \lfloor p'' / R \rfloor$$

$$\text{where } p'' = \begin{cases} p''' + 1, & \text{when } \text{mod}(N'_{RB}, C) \neq 0 \text{ and } p''' \geq 3R-1 \\ p''', & \text{when } \text{mod}(N'_{RB}, C) = 0 \text{ or } p''' < 3R-1 \end{cases}$$

15 where $p''' = \text{mod}(p + N_{DVRB} / 2, N_{DVRB})$

On the other hand, if a DVRB index d is given, a PRB index can be derived using Expression 5.

20 [Expression 5]

$$p_{1,d} = \begin{cases} p'_{1,d} - 1, & \text{when } \text{mod}(N'_{RB}, C) \neq 0 \text{ and } \text{mod}(d, C) = 3 \\ p'_{1,d}, & \text{when } \text{mod}(N'_{RB}, C) = 0 \text{ or } \text{mod}(d, C) \neq 3 \end{cases}$$

$$\text{where } p'_{1,d} = \text{mod}(d, C) \cdot R + \lfloor d / C \rfloor$$

$$p_{2,d} = \text{mod}(p_{1,d} + N_{DVRB} / 2, N_{DVRB})$$

5 <Embodiment 11>

FIG. 25c illustrates a method for filling nulls in an interleaver in accordance with one embodiment of the present invention. This method is applied to the case in which $K = 2$, $N_D = 2$, and N_{DVRB} is a multiple of N_d .

FIG. 25c illustrates a method corresponding to the method of the embodiment 7 and FIGs. 21a and 21b. The method of FIG. 25c may be explained using Expressions 6 to 8. In accordance with the method of FIG. 25c, if a PRB index p is given, a DVRB index can be derived using Expression 6 or 7.

[Expression 6]

$$15 \quad d_{p_1} = \text{mod}(p', R) \cdot C + \lfloor p' / R \rfloor$$

$$\text{where } p' = \begin{cases} p+1, & \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p \geq 2R-1 \text{ and } p \neq 3R-2 \\ 2R-1, & \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p = 3R-2 \\ p, & \text{when } \text{mod}(N_{DVRB}, C) = 0 \text{ or } p < 2R-1 \end{cases}$$

$$d_{p_2} = \text{mod}(p'', R) \cdot C + \lfloor p'' / R \rfloor$$

where

$$p'' = \begin{cases} p''' + 1, & \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p''' \geq 2R-1 \text{ and } p''' \neq 3R-2 \\ 2R-1, & \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p''' = 3R-2 \\ p''', & \text{when } \text{mod}(N_{DVRB}, C) = 0 \text{ or } p''' < 2R-1 \end{cases}$$

where $p''' = \text{mod}(p + N_{DVRB} / 2, N_{DVRB})$

[Expression 7]

$$d_{p_1} = \text{mod}(p', R) \cdot C + \lfloor p' / R \rfloor$$

$$5 \quad \text{where } p' = \begin{cases} p+1, & \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p \geq 2R-1 \text{ and } p \neq 3R-2 \\ 2R-1, & \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } p = 3R-2 \\ p, & \text{when } \text{mod}(N_{DVRB}, C) = 0 \text{ or } p < 2R-1 \end{cases}$$

$$d_{p_2} = \begin{cases} d_{p_1} - 2, & \text{when } \text{mod}(d_{p_1}, C) \geq 2 \\ d_{p_1} + 2, & \text{when } \text{mod}(d_{p_1}, C) < 2 \text{ and } d_{p_1} \neq N_{DVRB} - 2 \text{ and } d_{p_1} \neq N_{DVRB} - 1 \\ N_{DVRB} - 1, & \text{when } \text{mod}(d_{p_1}, C) < 2 \text{ and } d_{p_1} = N_{DVRB} - 2 \\ N_{DVRB} - 2, & \text{when } \text{mod}(d_{p_1}, C) < 2 \text{ and } d_{p_1} = N_{DVRB} - 1 \end{cases}$$

On the other hand, in the method of FIG. 25c, if a DVRB index d is given, a PRB index can be derived using Expression 8.

10 [Expression 8]

$$p_{1,d} = \begin{cases} p'_{1,d} - 1, & \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } \text{mod}(d, C) \geq 2 \\ 3R - 2, & \text{when } \text{mod}(N_{DVRB}, C) \neq 0 \text{ and } d = N_{DVRB} - 1 \\ p'_{1,d}, & \text{when } \text{mod}(N_{DVRB}, C) = 0 \text{ or } (\text{mod}(d, C) < 2 \text{ and } d \neq N_{DVRB} - 1) \end{cases}$$

where $p'_{1,d} = \text{mod}(d, C) \cdot R + \lfloor d / C \rfloor$

$$p_{2,d} = \text{mod}(p_{1,d} + N_{DVRB} / 2, N_{DVRB})$$

15 <Embodiment 12>

FIG. 25d illustrates a method implemented using the method of the embodiment 7 and FIGs. 21a and 21b when $K = 2$, $N_D = 2$, and the size of the interleaver ($=C \times R$) is set such that $C \cdot R = N_{DVRB} + N_{null}$. Here, “ N_{null} ” represents the number of nulls to be

included in the interleaver. This value N_{null} may be a predetermined value. In accordance with this method, if a DVRB index p is given, a DVRB index can be derived using Expression 9 or 10.

5 [Expression 9]

$$d_{p_1} = \text{mod}(p', R) \cdot C + \lfloor p' / R \rfloor$$

where

$$p' = \begin{cases} p & , \text{when } N_{null} = 0 \text{ or } p < R - N_{null} / 2 \text{ or } R \leq p < 2R - N_{null} / 2 \\ p + N_{null} / 2 & , \text{when } N_{null} \neq 0 \text{ and } (2R - N_{null} / 2 \leq p < 3R - N_{null} \text{ or } p \geq 3R - N_{null} / 2) \end{cases}$$

10
$$d_{p_1} = \text{mod}(p', 2R) \cdot C / 2 + \lfloor p' / 2R \rfloor$$

where

$$p' = \begin{cases} p + R - N_{null} / 2 & , \text{when } N_{null} \neq 0 \text{ and } R - N_{null} / 2 \leq p < R \\ p + R & , \text{when } N_{null} \neq 0 \text{ and } 3R - N_{null} \leq p < 3R - N_{null} / 2 \end{cases}$$

[Expression 10]

15
$$d_{p_2} = \text{mod}(p'', R) \cdot C + \lfloor p'' / R \rfloor$$

where

$$p'' = \begin{cases} p''' & , \text{when } N_{null} = 0 \text{ or } p''' < R - N_{null} / 2 \text{ or } R \leq p''' < 2R - N_{null} / 2 \\ p''' + N_{null} / 2 & , \text{when } N_{null} \neq 0 \text{ and } (2R - N_{null} / 2 \leq p''' < 3R - N_{null} \text{ or } p''' \geq 3R - N_{null} / 2) \end{cases}$$

$$d_{p_2} = \text{mod}(p'', 2R) \cdot C / 2 + \lfloor p'' / 2R \rfloor$$

20 where

$$p'' = \begin{cases} p''' + R - N_{null} / 2 & , \text{when } N_{null} \neq 0 \text{ and } R - N_{null} / 2 \leq p''' < R \\ p''' + R & , \text{when } N_{null} \neq 0 \text{ and } 3R - N_{null} \leq p''' < 3R - N_{null} / 2 \end{cases}$$

where $p''' = \text{mod}(p + N'_{RB} / 2, N'_{RB})$

On the other hand, if a DVRB index d is given, a PRB index can be derived using Expression 11.

5

[Expression 11]

$$p_{1,d} = \begin{cases} p'_{1,d} & , \text{when } N_{null} = 0 \text{ or } (d < N_{DVRB} - N_{null} \text{ and } \text{mod}(d, C) < 2) \\ p'_{1,d} - N_{null} / 2 & , \text{when } N_{null} \neq 0 \text{ and } (d < N_{DVRB} - N_{null} \text{ and } \text{mod}(d, C) \geq 2) \end{cases}$$

10

where, $p'_{1,d} = \text{mod}(d, C) \cdot R + \lfloor d / C \rfloor$

$$p_{1,d} = \begin{cases} p'_{1,d} - R + N_{null} / 2 & , \text{when } N_{null} \neq 0 \text{ and } (d \geq N_{DVRB} - N_{null} \text{ and } \text{mod}(d, C / 2) = 0) \\ p'_{1,d} - R & , \text{when } N_{null} \neq 0 \text{ and } (d \geq N_{DVRB} - N_{null} \text{ and } \text{mod}(d, C / 2) = 1) \end{cases}$$

where $p'_{1,d} = \text{mod}(d, C / 2) \cdot 2R + \lfloor 2d / C \rfloor$

15

$$p_{2,d} = \text{mod}(p_{1,d} + N_{DVRB} / 2, N_{DVRB})$$

Again referring to the description given with reference to FIG. 15, the case, in which a combination of the bitmap scheme using the RBG scheme and subset scheme and the compact scheme are used, may be taken into consideration. Problems possibly occurring in this case will be described with reference to FIGs. 26 and 27.

20

FIGs. 26 and 27 illustrate examples of a method using a combination of the bitmap

scheme using the RBG scheme and subset scheme and the compact scheme, respectively.

As shown in FIG. 26, each DVRB may be divided into two parts, and a second one of the divided parts may be cyclically shifted by a predetermined gap ($\text{Gap} = N_{\text{DVRB}}/N_D = 50/2$). In this case, only a part of the resource elements of an RBG0 consisting of PRBs are mapped by the first DVRB divided part, and only parts of the resource elements of RBG8 and RBG9 each consisting of PRBs are mapped by the second DVRB divided part. For this reason, the RBG0, RBG8, and RBG9 cannot be applied to a scheme using a resource allocation on an RBG basis.

In order to solve this problem, the gap may be set to be a multiple of the number of RBs included in one RBG, namely, M_{RBG} . That is, the gap may satisfy a condition “ $\text{Gap} = M_{\text{RBG}} * k$ ” (k is a natural number). When the gap is set to satisfy this condition, it may have a value of, for example, 27 ($\text{Gap} = M_{\text{RBG}} * k = 3 * 9 = 27$). When $\text{Gap} = 27$, each DVRB may be divided into two parts, and a second one of the divided parts may be cyclically shifted by the gap ($\text{Gap} = 27$). In this case, only a part of the resource elements of the RBG0, which consists of PRBs, are mapped by the first DVRB divided part, and only a part of the resource elements of the RBG9, which consists of PRBs, are mapped by the second DVRB divided part. Accordingly, in the method of FIG. 27, the RBG8 can be applied to a scheme using a resource allocation on an RBG basis, different from the method of FIG. 26.

In the method of FIG. 27, however, DVRB indexes paired in one PRB cannot be paired in another PRB. Again referring to FIG. 26, the DVRB indexes 1 and 26 paired in the PRB1 (2601) are also paired in the PRB26 (2603). In the method of FIG. 27, however, the DVRB indexes 1 and 27 paired in the PRB1 (2701) cannot be paired in the

PRB25 or PRB27 (2703 or 2705).

In the case of FIG. 26 or 27, the DVRB1 and DVRB2 are mapped to the PRB1, PRB2, PRB25 and PRB26. In this case, parts of the resource elements of the PRB1, PRB2, PRB25, and PRB26 are left without being mapped.

5 In the case of FIG. 26, if the DVRB25 and DVRB26 are additionally mapped to PRBs, they completely fill the remaining spaces of the PRB1, PRB2, PRB25, and PRB26.

In the case of FIG. 27, however, if the DVRB25 and DVRB26 are additionally mapped to PRBs, the DVRB25 and DVRB26 are mapped to the PRB0, PRB25, PRB26,
10 and PRB49. As a result, the non-mapped resource element parts of the PRB1 and PRB2 are still left without being filled with DVRBs. That is, the case of FIG. 27 has a drawback in that, usually, there are PRBs left without being mapped.

The problem occurs because the cyclic shift is performed such that a gap value does not equal to N_{DVRB}/N_D . When N_{DVRB}/N_D is a multiple of M_{RBG} , the above-
15 described problem is solved because the cyclic shift corresponds to a multiple of M_{RBG} .

<Embodiment 13>

In order to simultaneously solve the problems of FIGs. 26 and 27, accordingly, the number of RBs used for DVRBs, namely, N_{DVRB} , is limited to a multiple of $N_D \cdot M_{\text{RBG}}$ in
20 accordance with one embodiment of the present invention.

<Embodiment 14>

Meanwhile, it can be seen that, in the above cases, the first and second divided parts of each DVRB belong to different subsets, respectively. In order to make the two

divided parts of each DVRB belong to the same subset, the gap should be set to be a multiple of the square of M_{RBG} (M_{RBG}^2).

Therefore, in another embodiment of the present invention, the number of RBs used for DVRBs, namely, N_{DVRB} , is limited to a multiple of $N_{\text{D}} \cdot M_{\text{RBG}}^2$, in order to make
 5 the two divided parts of each DVRB belong to the same subset, and to make DVRBs be paired.

FIG. 28 illustrates the case in which N_{DVRB} is set to be a multiple of $N_{\text{D}} \cdot M_{\text{RBG}}$.

As shown in FIG. 28, the divided parts of DVRBs can always be paired in PRBs in accordance with a cyclic shift because the gap is a multiple of $M_{\text{RBG}} \cdot N_{\text{D}}$. It is also
 10 possible to reduce the number of RBGs in which there are resource elements having parts not filled with DVRBs.

<Embodiment 15>

FIG. 29 illustrates the case in which DVRB indexes are interleaved in accordance
 15 with the method of FIG. 28.

When DVRB indexes are interleaved as shown in FIG. 29, it may be possible to set N_{DVRB} to a multiple of $N_{\text{D}} \cdot M_{\text{RBG}}$ when the DVRB indexes are mapped to PRBs. In this case, however, there may be an occasion that the rectangular interleaver matrix is incompletely filled with DVRB indexes, as shown in FIGs. 20a and 20b. In this case,
 20 accordingly, it is necessary to fill nulls in non-filled portions of the rectangular interleaver matrix. In order to avoid the occasion requiring filling of nulls in a block interleaver of degree D , it is necessary to limit the number of RBs used for DVRBs to a multiple of D .

Accordingly, in one embodiment of the present invention, the gap is set to be a

multiple of M_{RBG} , and the second divided part of each DVRB is cyclically shifted by N_{RB}/N_D so that the DVRB indexes mapped to one PRB are paired. Also, in order to avoid filling of nulls in the block interleaver, the number of RBs used for DVRBs, namely, N_{DVRB} , is limited to a common multiple of $N_D \cdot M_{RBG}$ and D . If D is equal to

5 the diversity order ($N_{DivOrder} = K \cdot N_D$) used in the interleaver in this case, N_{DVRB} is limited to a common multiple of $N_D \cdot M_{RBG}$ and $K \cdot N_D$.

<Embodiment 16>

In another embodiment of the present invention, the gap is set to be a multiple of

10 the square of M_{RBG} , in order to make the two divided parts of each DVRB be located on the same subset. Also, the second divided part of each DVRB is cyclically shifted by N_{RB}/N_D so that the DVRB indexes mapped to one PRB are paired. In order to avoid filling of nulls in the block interleaver, the number of RBs used for DVRBs, namely, N_{DVRB} , is limited to a common multiple of $N_D \cdot M_{RBG}^2$ and D . If D is set to the diversity

15 order ($N_{DivOrder} = K \cdot N_D$) used in the interleaver in this case, N_{DVRB} is limited to a common multiple of $N_D \cdot M_{RBG}^2$ and $K \cdot N_D$.

<Embodiment 17>

Meanwhile, FIG. 30 illustrates the case in which D is set to the number of columns,

20 namely, C , and C is set to $N_{DivOrder}$ ($N_{DivOrder} = K \cdot N_D$).

Of course, in the case of FIG. 30, writing is performed in such a manner that, after one column is completely filled, a next column is filled, and reading is performed in such a manner that, after one row is completely read, a next row is read.

In the embodiment of FIG. 30, N_{DVRB} is set such that consecutive DVRB indexes

are assigned to the same subset. The illustrated rectangular interleaver is configured such that consecutive indexes are filled in the same subset when the number of rows is a multiple of M_{RBG}^2 . Since the number of rows, R , is N_{DVRB}/D ($R = N_{DVRB}/D$), the number RBs used for DVRBs, namely, N_{DVRB} , is limited to a multiple of $D \cdot M_{RBG}^2$.

5 In order to map the two divided parts of each DVRB to the PRBs in the same subset, the number of RBs used for DVRBs, namely, N_{DVRB} , is limited to a common multiple of $D \cdot M_{RBG}^2$ and $N_D \cdot M_{RBG}^2$. When $D = K \cdot N_D$, N_{DVRB} is limited to $K \cdot N_D \cdot M_{RBG}^2$ because the common multiple of $K \cdot N_D \cdot M_{RBG}^2$ and $N_D \cdot M_{RBG}^2$ is $K \cdot N_D \cdot M_{RBG}^2$.

10 Finally, the number of RBs used for DVRBs may be a maximum number of DVRBs satisfying the above-described limitations within the number of PRBs in the entire system. RBs used for DVRBs may be used in an interleaved manner.

<Embodiment 18>

15 Hereinafter, a mapping method using temporary PRB indexes when N_{PRB} and N_{DVRB} have different lengths in accordance with one embodiment of the present invention will be described.

FIG. 31 illustrates methods in which, when N_{PRB} and N_{DVRB} have different lengths, the result of the mapping to PRBs performed using the DVRB interleaver of
20 FIG. 29 is once again processed to make DVRBs finally correspond to PRBs.

One of the schemes shown by (a), (b), (c), and (d) of FIG 31 may be selected in accordance with the usage of system resources. In this scheme, the value p in the above-described co-relational expressions of DVRB and PRB indexes is defined as a

temporary PRB index. In this case, a value o obtained after adding N_{offset} to p exceeding $N_{threshold}$ is used as a final PRB index.

In this case, four alignment schemes respectively illustrated in FIG. 31 may be expressed by Expression 12.

5

[Expression 12]

$$(a): N_{threshold} = N_{DVRB} / 2, N_{offset} = N_{PRB} - N_{DVRB}$$

$$(b): N_{threshold} = 0, N_{offset} = 0$$

$$(c): N_{threshold} = 0, N_{offset} = N_{PRB} - N_{DVRB}$$

10

$$(d): N_{threshold} = 0, N_{offset} = \lfloor (N_{PRB} - N_{DVRB}) / 2 \rfloor \text{ or}$$

$$N_{offset} = \lceil (N_{PRB} - N_{DVRB}) / 2 \rceil$$

15

Here, (a) represents a justified alignment, (b) represents a left alignment, (c) represents a right alignment, and (d) represents a center alignment. Meanwhile, if a PRB index o is given, a DVRB index d can be derived from Expression 13, using a temporary PRB index p .

[Expression 13]

$$p = \begin{cases} o - N_{offset} & , \text{when } o \geq N_{threshold} + N_{offset} \\ o & , \text{when } o < N_{threshold} \end{cases}$$

20

On the other hand, if the DVRB index d is given, a PRB index o can be

derived from Expression 14, using a temporary PRB index p .

[Expression 14]

$$o_{i,d} = \begin{cases} p_{i,d} + N_{offset} & , \text{when } p_{i,d} \geq N_{threshold} \\ p_{i,d} & , \text{when } p_{i,d} < N_{threshold} \end{cases}$$

5

<Embodiment 19>

Hereinafter, a mapping method capable of increasing N_{DVRB} to a maximum while satisfying the gap limitations in accordance with one embodiment of the present invention will be described.

10 The previous embodiments have proposed interleaver structures for reducing the number of PRBs, in which there are resource elements having parts not filled with DVRBs, where the RBG scheme and/or the subset scheme is introduced for allocation of LVRBs. The previous embodiments have also proposed methods for limiting the number of RBs used for DVRBs, namely, N_{DVRB} .

15 However, as the limitation condition caused by M_{RBG} becomes more strict, the limitation on the number of RBs usable for DVRBs, namely, N_{DVRB} , among the total number of PRBs, namely, N_{PRB} , increases.

FIG. 32 illustrates the case using a rectangular interleaver having conditions of “ $N_{PRB} = 32$ ”, “ $M_{RBG} = 3$ ”, “ $K = 2$ ”, and “ $N_D = 2$ ”.

20 When N_{DVRB} is set to be a multiple of $N_D \cdot M_{RBG}^2 (= 18)$, to enable the two divided parts of each DVRB to be mapped to PRBs belonging to the same subset, while having a maximum value not exceeding N_{PRB} , the set N_{DVRB} is equal to 18 ($N_{DVRB} =$

18).

In order to enable the two divided parts of each DVRB to be mapped to PRBs belonging to the same subset in the case of FIG. 32, N_{DVRB} is set to be 18 ($N_{DVRB} = 18$). In this case, 14 RBs ($32 - 18 = 14$) cannot be used for DVRBs.

5 In this case, it can be seen that N_{gap} is 9 ($N_{gap} = 18/2 = 9$), and the DVRB0 is mapped to respective first RBs of the RBG0 and RBG3 belonging to the same subset.

Accordingly, the present invention proposes a method for satisfying gap limitation conditions when $N_D = 2$ by setting an offset and a threshold value, to which the offset will be applied, as previously proposed, without directly reflecting the gap limitation
10 conditions on N_{DVRB} .

1) First, desired gap limitation conditions are set. For example, the gap may be set to a multiple of M_{RBG} or a multiple of M_{RBG}^2 .

2) Next, a numeral nearest to $N_{PRB}/2$ among numerals satisfying the gap limitation conditions is set as N_{gap} .

15 3) When N_{gap} is smaller than $N_{PRB}/2$, the same mapping as that of FIG. 20 is used.

4) When N_{gap} is equal to or larger than $N_{PRB}/2$, and filling of nulls in the interleaver is allowed, N_{DVRB} is set such that $N_{DVRB} = (N_{PRB} - N_{gap}) \cdot 2$. However, when no filling of nulls in the interleaver is allowed, N_{DVRB} is set such that
20 $N_{DVRB} = \lfloor \min(N_{PRB} - N_{gap}, N_{gap}) \cdot 2 / C \rfloor \cdot C$.

5) An offset is applied to a half or more of N_{DVRB} . That is, a reference value for

the application of the offset, namely, $N_{threshold}$, is set such that $N_{threshold} = N_{DVRB} / 2$.

6) The offset is set such that temporary PRBs, to which the offset is applied, satisfy the gap limitation conditions.

That is, N_{offset} is set such that $N_{offset} = N_{gap} - N_{threshold}$.

5 This may be expressed by Expression 15 as a generalized mathematic expression.

[Expression 15]

1. Setting of N_{gap} according to gap conditions:

Under an M_{RBG}^2 -multiple condition:

$$10 \quad N_{gap} = \text{round}(N_{PRB} / (2 \cdot M_{RBG}^2)) \cdot M_{RBG}^2$$

Under an M_{RBG} -multiple condition:

$$N_{gap} = \text{round}(N_{PRB} / (2 \cdot M_{RBG})) \cdot M_{RBG}$$

2. Setting of N_{DVRB} :

Under a null-allowed condition:

$$15 \quad N_{DVRB} = \min(N_{PRB} - N_{gap}, N_{gap}) \cdot 2$$

Under no null-allowed condition:

$$N_{DVRB} = \lfloor \min(N_{PRB} - N_{gap}, N_{gap}) \cdot 2 / C \rfloor \cdot C$$

3. Setting of $N_{threshold}$: $N_{threshold} = N_{DVRB} / 2$

4. Setting of N_{offset} : $N_{offset} = N_{gap} - N_{threshold}$

FIG. 33 illustrates application of a DVRB mapping rule proposed in the present

invention when $N_{PRB} = 32$, $M_{RBG} = 3$, and a rectangular interleaver of $K = 2$ and $N_D = 2$.

When N_{gap} is set such that it is a multiple of $M_{RBG}^2 (= 9)$ while being nearest to $N_{PRB} / 2$, in order to map the two divided parts of each DVRB to PRBs belonging to the same subset, respectively, the set N_{gap} is equal to 18 ($N_{gap} = 18$). In this case, 28 RBs $((32-18) \times 2 = 28)$ are used for DVRBs. That is, conditions of " $N_{DVRB} = 28$ ", " $N_{threshold} = 28/2 = 14$ ", and " $N_{offset} = 18-14 = 4$ " are established. Accordingly, temporary PRB indexes, to which DVRB indexes interleaved by the rectangular interleaver are mapped, are compared with $N_{threshold}$. When N_{offset} is added to temporary PRB indexes satisfying $N_{threshold}$, a result as shown in FIG. 33 is obtained. Referring to FIG. 33, it can be seen that the two divided parts of the DVRB0 are mapped to respective first RBs of the RBG0 and RBG6 belonging to the same subset. When this method is compared with the method of FIG. 32, it can also be seen that the number of RBs usable for DVRBs is increased from 18 to 28. Since the gap is also increased, the diversity in the DVRB mapping can be further increased.

<Embodiment 20>

Hereinafter, a mapping method capable of increasing N_{DVRB} to a maximum while mapping consecutive indexes to specific positions in accordance with one embodiment of the present invention will be described.

Where one UE is allocated several DVRBs, the allocated DVRBs are consecutive DVRB. In this case, accordingly, it is preferable to set contiguous indexes such that

they are positioned at intervals of a multiple of M_{RBG} or a multiple of M_{RBG}^2 , for scheduling of LVRBs, similarly to the setting of the gap. When it is assumed, in this case, that the degree of the interleaver is equal to the number of columns, namely, C , the number of rows, namely, R , should be a multiple of M_{RBG} or a multiple of M_{RBG}^2 .

5 Accordingly, the size of the interleaver, namely, $N_{interleaver} = C \cdot R$, should be a multiple of $C \cdot M_{RBG}$ or a multiple of $C \cdot M_{RBG}^2$. Thus, if N_{DVRB} is previously given, a minimum interleaver size satisfying the above conditions can be derived as follows.

Under no multiple condition, $N_{interleaver} = \lceil N_{DVRB} / C \rceil \cdot C$.

In this case, accordingly, $R = N_{interleaver} / C = \lceil N_{DVRB} / C \rceil$.

10 Under the $C \cdot M_{RBG}$ -multiple condition, $N_{interleaver} = \lceil N_{DVRB} / (C \cdot M_{RBG}) \rceil \cdot C \cdot M_{RBG}$.

In this case, accordingly, $R = N_{interleaver} / C = \lceil N_{DVRB} / (C \cdot M_{RBG}) \rceil \cdot M_{RBG}$.

Under the $C \cdot M_{RBG}^2$ -multiple condition, $N_{interleaver} = \lceil N_{DVRB} / (C \cdot M_{RBG}^2) \rceil \cdot C \cdot M_{RBG}^2$.

In this case, accordingly, $R = N_{interleaver} / C = \lceil N_{DVRB} / (C \cdot M_{RBG}^2) \rceil \cdot M_{RBG}^2$.

15 The number of nulls included in the interleaver is as follows.

Under no multiple condition,

$$N_{null} = N_{interleaver} - N_{DVRB} = \lceil N_{DVRB} / C \rceil \cdot C - N_{DVRB}.$$

Under the $C \cdot M_{RBG}$ -multiple condition,

$$N_{null} = N_{interleaver} - N_{DVRB} = \lceil N_{DVRB} / (C \cdot M_{RBG}) \rceil \cdot C \cdot M_{RBG} - N_{DVRB}.$$

20 Under the $C \cdot M_{RBG}^2$ -multiple condition,

$$N_{null} = N_{interleaver} - N_{DVRB} = \lceil N_{DVRB} / (C \cdot M_{RBG}^2) \rceil \cdot C \cdot M_{RBG}^2 - N_{DVRB}.$$

The exemplary embodiments described hereinabove are combinations of elements and features of the present invention. The elements or features may be considered selective unless otherwise mentioned. Each element or feature may be practiced without being combined with other elements or features. Further, the embodiments of
5 the present invention may be constructed by combining parts of the elements and/or features. Operation orders described in the embodiments of the present invention may be rearranged. Some constructions of any one embodiment may be included in another embodiment and may be replaced with corresponding constructions of another embodiment. It is apparent that the present invention may be embodied by a
10 combination of claims which do not have an explicit cited relation in the appended claims or may include new claims by amendment after application.

The embodiments of the present invention may be achieved by various means, for example, hardware, firmware, software, or a combination thereof. In a hardware configuration, the embodiments of the present invention may be implemented by one or
15 more application specific integrated circuits (ASICs), digital signal processors (DSPs), digital signal processing devices (DSPDs), programmable logic devices (PLDs), field programmable gate arrays (FPGAs), processors, controllers, microcontrollers, microprocessors, etc.

In a firmware or software configuration, the embodiments of the present invention
20 may be achieved by a module, a procedure, a function, etc. performing the above-described functions or operations. A software code may be stored in a memory unit and driven by a processor. The memory unit is located at the interior or exterior of the processor and may transmit data to and receive data from the processor via various known means.

【Industrial Applicability】

The present invention is applicable to a transmitter and a receiver used in a broadband wireless mobile communication system.

It will be apparent to those skilled in the art that various modifications and
5 variations can be made in the present invention without departing from the spirit or
scope of the invention. Thus, it is intended that the present invention cover the
modifications and variations of this invention provided they come within the scope of
the appended claims and their equivalents.

74420-444

65

CLAIMS:

1. A method for transmitting downlink data using resource blocks at a base station in a wireless mobile communication system, the method comprising:

5 transmitting downlink data mapped to physical resource blocks (PRBs) to a user equipment,

wherein indexes of virtual resource blocks (VRBs) are mapped to indexes of the PRBs for each of N slots of a subframe, and indexes of the PRBs for “N”-th slot are shifted with respect to indexes of the PRBs for “N-1”-th slot based on a predetermined gap,

wherein the indexes of the VRBs are interleaved by a block interleaver,

10 wherein the block interleaver includes N regions, the indexes of the VRBs are written row by row in the block interleaver and read out column by column, and a number of columns of the block interleaver is equal to $K \cdot N$,

15 wherein, when nulls are inserted into the block interleaver, the nulls are inserted into K-th column in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

2. The method according to claim 1, wherein the nulls are inserted in the last N_{null}/N rows of the K-th column in each of the N regions of the block interleaver, where N_{null} is equal to a number of the nulls.

3. The method according to claim 1 or 2, wherein K is 2.

20 4. The method according to any one of claims 1 to 3, wherein N is 2.

5. A method for transmitting downlink data using resource blocks at a base station in a wireless mobile communication system, the method comprising:

transmitting downlink data mapped to physical resource blocks (PRBs) to a user equipment,

74420-444

66

wherein indexes of virtual resource blocks (VRBs) are mapped to indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the “ N ”-th slot are shifted with respect to the indexes of the PRBs for the “ $N-1$ ”-th slot based on a predetermined gap,

5 wherein the indexes of the VRBs are interleaved by a block interleaver,

wherein the block interleaver includes N regions, the indexes of the VRBs are written column by column in the block interleaver and read out row by row, and a number of the rows of the block interleaver is equal to $K \cdot N$,

10 wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K -th row in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

6. The method according to claim 5,

wherein the nulls are inserted in the last N_{null}/N columns of the K -th row in each of the N regions of the block interleaver, where N_{null} is equal to a number of the nulls.

15 7. The method according to claim 5 or 6, wherein K is 2.

8. The method according to any one of claims 5 to 7, wherein N is 2.

9. A base station transmitting downlink data using resource blocks in a wireless mobile communication system, the base station comprising:

a processor for controlling an operation of the base station; and

20 a memory unit driven by the processor,

wherein the processor is configured to transmit downlink data mapped to physical resource blocks (PRBs) to a user equipment,

74420-444

67

wherein indexes of virtual resource blocks (VRBs) are mapped to indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the “ N ”-th slot are shifted with respect to the indexes of the PRBs for the “ $N - 1$ ”-th slot based on a predetermined gap,

5 wherein the indexes of the VRBs are interleaved by a block interleaver,

wherein the block interleaver includes N regions, the indexes of the VRBs are written row by row in the block interleaver and read out column by column, and a number of the columns of the block interleaver is equal to $K \cdot N$,

10 wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K -th column in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

10. A base station transmitting downlink data using resource blocks in a wireless mobile communication system, the base station comprising:

a processor for controlling an operation of the base station; and

15 a memory unit driven by the processor,

wherein the processor is configured to transmit downlink data mapped to physical resource blocks (PRBs) to a user equipment,

20 wherein indexes of virtual resource blocks (VRBs) are mapped to indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the “ N ”-th slot are shifted with respect to the indexes of the PRBs for the “ $N - 1$ ”-th slot based on a predetermined gap,

wherein the indexes of the VRBs are interleaved by a block interleaver,

74420-444

68

wherein the block interleaver includes N regions, the indexes of the VRBs are written column by column in the block interleaver and read out row by row, and a number of the rows of the block interleaver is equal to $K \cdot N$,

5 wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K -th row in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

11. A method for receiving downlink data using resource blocks at a user equipment in a wireless mobile communication system, the method comprising:

10 receiving downlink control information including resource allocation information for the downlink data from a base station; and

receiving the downlink data mapped to physical resource blocks (PRBs) based on the downlink control information,

wherein the resource allocation information indicates virtual resource block (VRB) allocations for the user equipment,

15 wherein indexes of the PRBs to which the downlink data are mapped are determined based on mapping relationship between virtual resource blocks (VRBs) and the PRBs,

20 wherein the mapping relationship is defined as indexes of the VRBs which are mapped to the indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the " N "-th slot are shifted with respect to the indexes of the PRBs for the " $N - 1$ "-th slot based on a predetermined gap,

wherein the indexes of the VRBs are interleaved by a block interleaver,

25 wherein the block interleaver includes N regions, the indexes of the VRBs are written row by row in the block interleaver and read out column by column, and a number of the columns of the block interleaver is equal to $K \cdot N$,

74420-444

69

wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K-th column in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

12. A method for receiving downlink data using resource blocks at a user
5 equipment in a wireless mobile communication system, the method comprising:

receiving downlink control information including resource allocation information for the downlink data from a base station; and

receiving the downlink data mapped to physical resource blocks (PRBs) based on the downlink control information,

10 wherein the resource allocation information indicates virtual resource block (VRB) allocations for the user equipment,

wherein indexes of the PRBs to which the downlink data are mapped are determined based on mapping relationship between virtual resource blocks (VRBs) and the PRBs,

15 wherein the mapping relationship is defined as indexes of the VRBs which are mapped to the indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the "N"-th slot are shifted with respect to the indexes of the PRBs for the "N - 1"-th slot based on a predetermined gap,

wherein the indexes of the VRBs are interleaved by a block interleaver,

20 wherein the block interleaver includes N regions, the indexes of the VRBs are written column by column in the block interleaver and read out row by row, and a number of the rows of the block interleaver is equal to $K \cdot N$,

wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K-th row in each of the N regions of the block interleaver, and when the
25 indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

74420-444

70

13. A user equipment for receiving downlink data using resource blocks in a wireless mobile communication system, the user equipment comprising:

a processor for controlling an operation of the user equipment; and

a memory unit driven by the processor,

5 wherein the processor is configured to receive downlink control information including resource allocation information for the downlink data from a base station and to receive the downlink data mapped to physical resource blocks (PRBs) based on the downlink control information,

10 wherein the resource allocation information indicates virtual resource block (VRB) allocations for the user equipment,

wherein indexes of the PRBs to which the downlink data are mapped are determined based on mapping relationship between virtual resource blocks (VRBs) and the PRBs,

15 wherein the mapping relationship is defined as indexes of the VRBs which are mapped to the indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the “N”-th slot are shifted with respect to the indexes of the PRBs for the “N – 1”-th slot based on a predetermined gap,

wherein the indexes of the VRBs are interleaved by a block interleaver,

20 wherein the block interleaver includes N regions, the indexes of the VRBs are written row by row in the block interleaver and read out column by column, and a number of the columns of the block interleaver is equal to $K \cdot N$,

wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K-th column in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

74420-444

71

14. A user equipment for receiving downlink data using resource blocks in a wireless mobile communication system, the user equipment comprising:

a processor for controlling an operation of the user equipment; and

a memory unit driven by the processor,

5 wherein the processor is configured to receive downlink control information including resource allocation information for the downlink data from a base station and to receive the downlink data mapped to physical resource blocks (PRBs) based on the downlink control information,

10 wherein the resource allocation information indicates virtual resource block (VRB) allocations for the user equipment,

wherein indexes of the PRBs to which the downlink data are mapped are determined based on mapping relationship between virtual resource blocks (VRBs) and the PRBs,

15 wherein the mapping relationship is defined as indexes of the VRBs which are mapped to the indexes of the PRBs for each of N slots of a subframe, and the indexes of the PRBs for the "N"-th slot are shifted with respect to the indexes of the PRBs for the "N - 1"-th slot based on a predetermined gap,

wherein the indexes of the VRBs are interleaved by a block interleaver,

20 wherein the block interleaver includes N regions, the indexes of the VRBs are written column by column in the block interleaver and read out row by row, and a number of the rows of the block interleaver is equal to $K \cdot N$,

wherein, when nulls are inserted into the block interleaver, the nulls are inserted into the K-th row in each of the N regions of the block interleaver, and when the indexes of the VRBs are read out from the block interleaver, the nulls are ignored.

FIG. 1

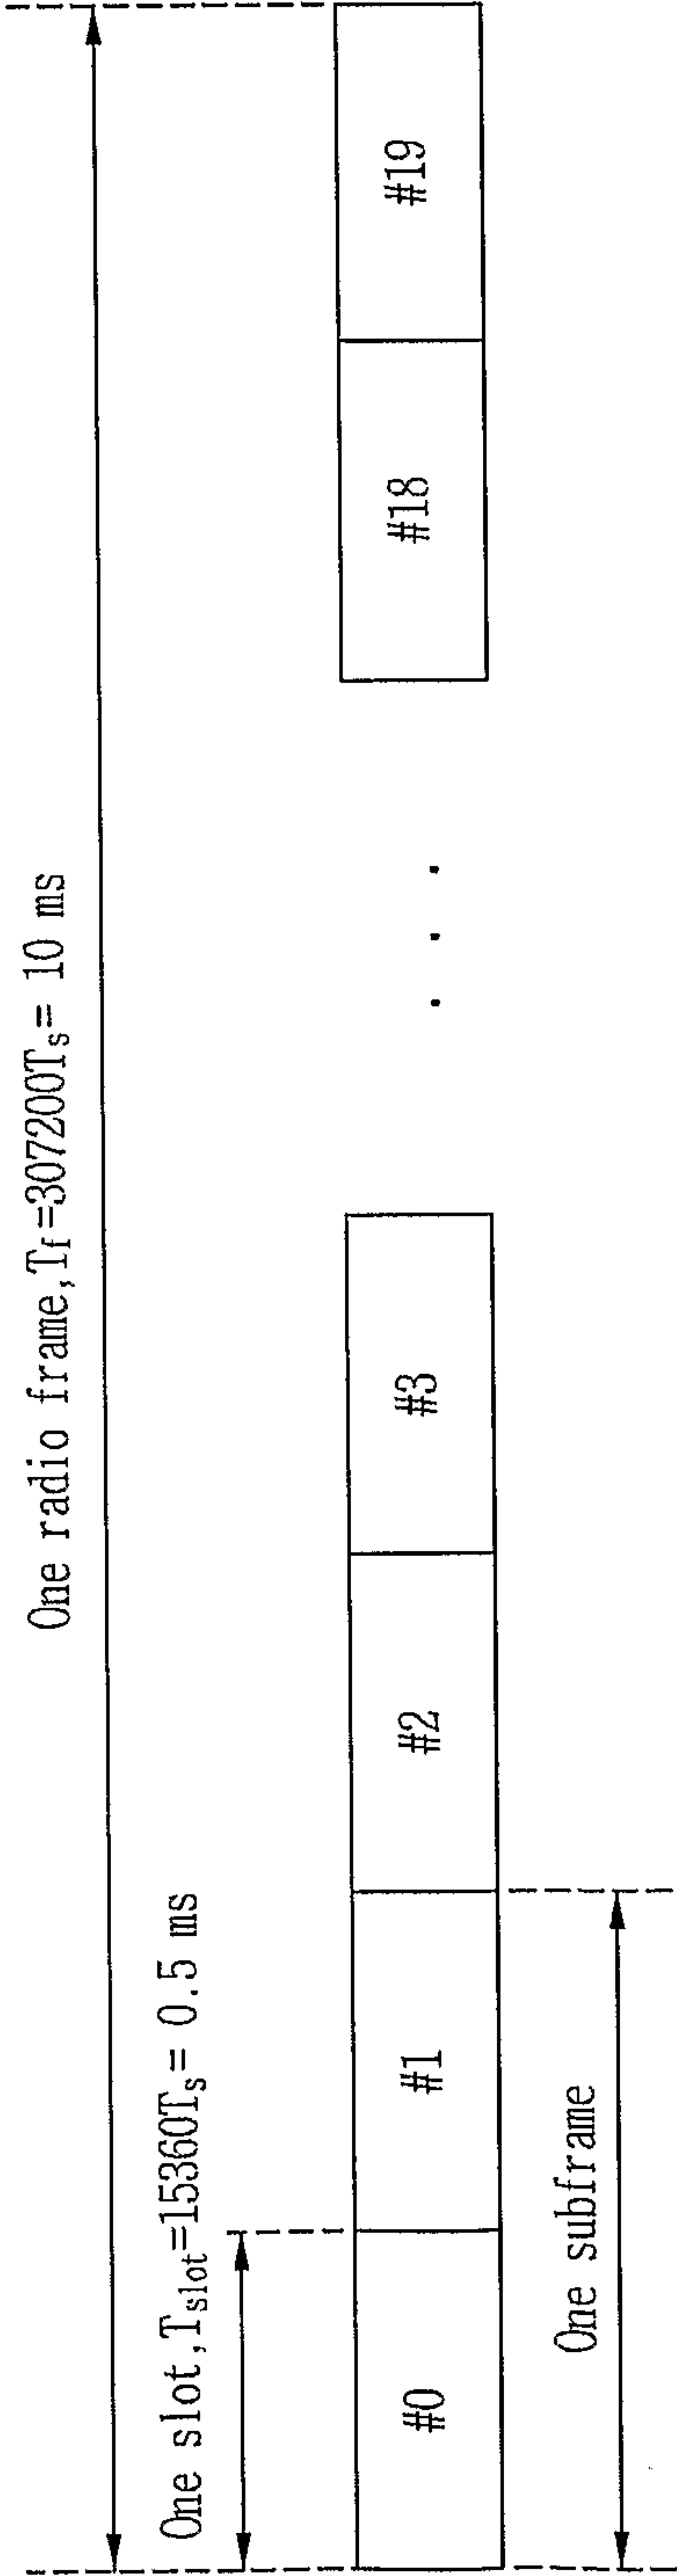


FIG. 3

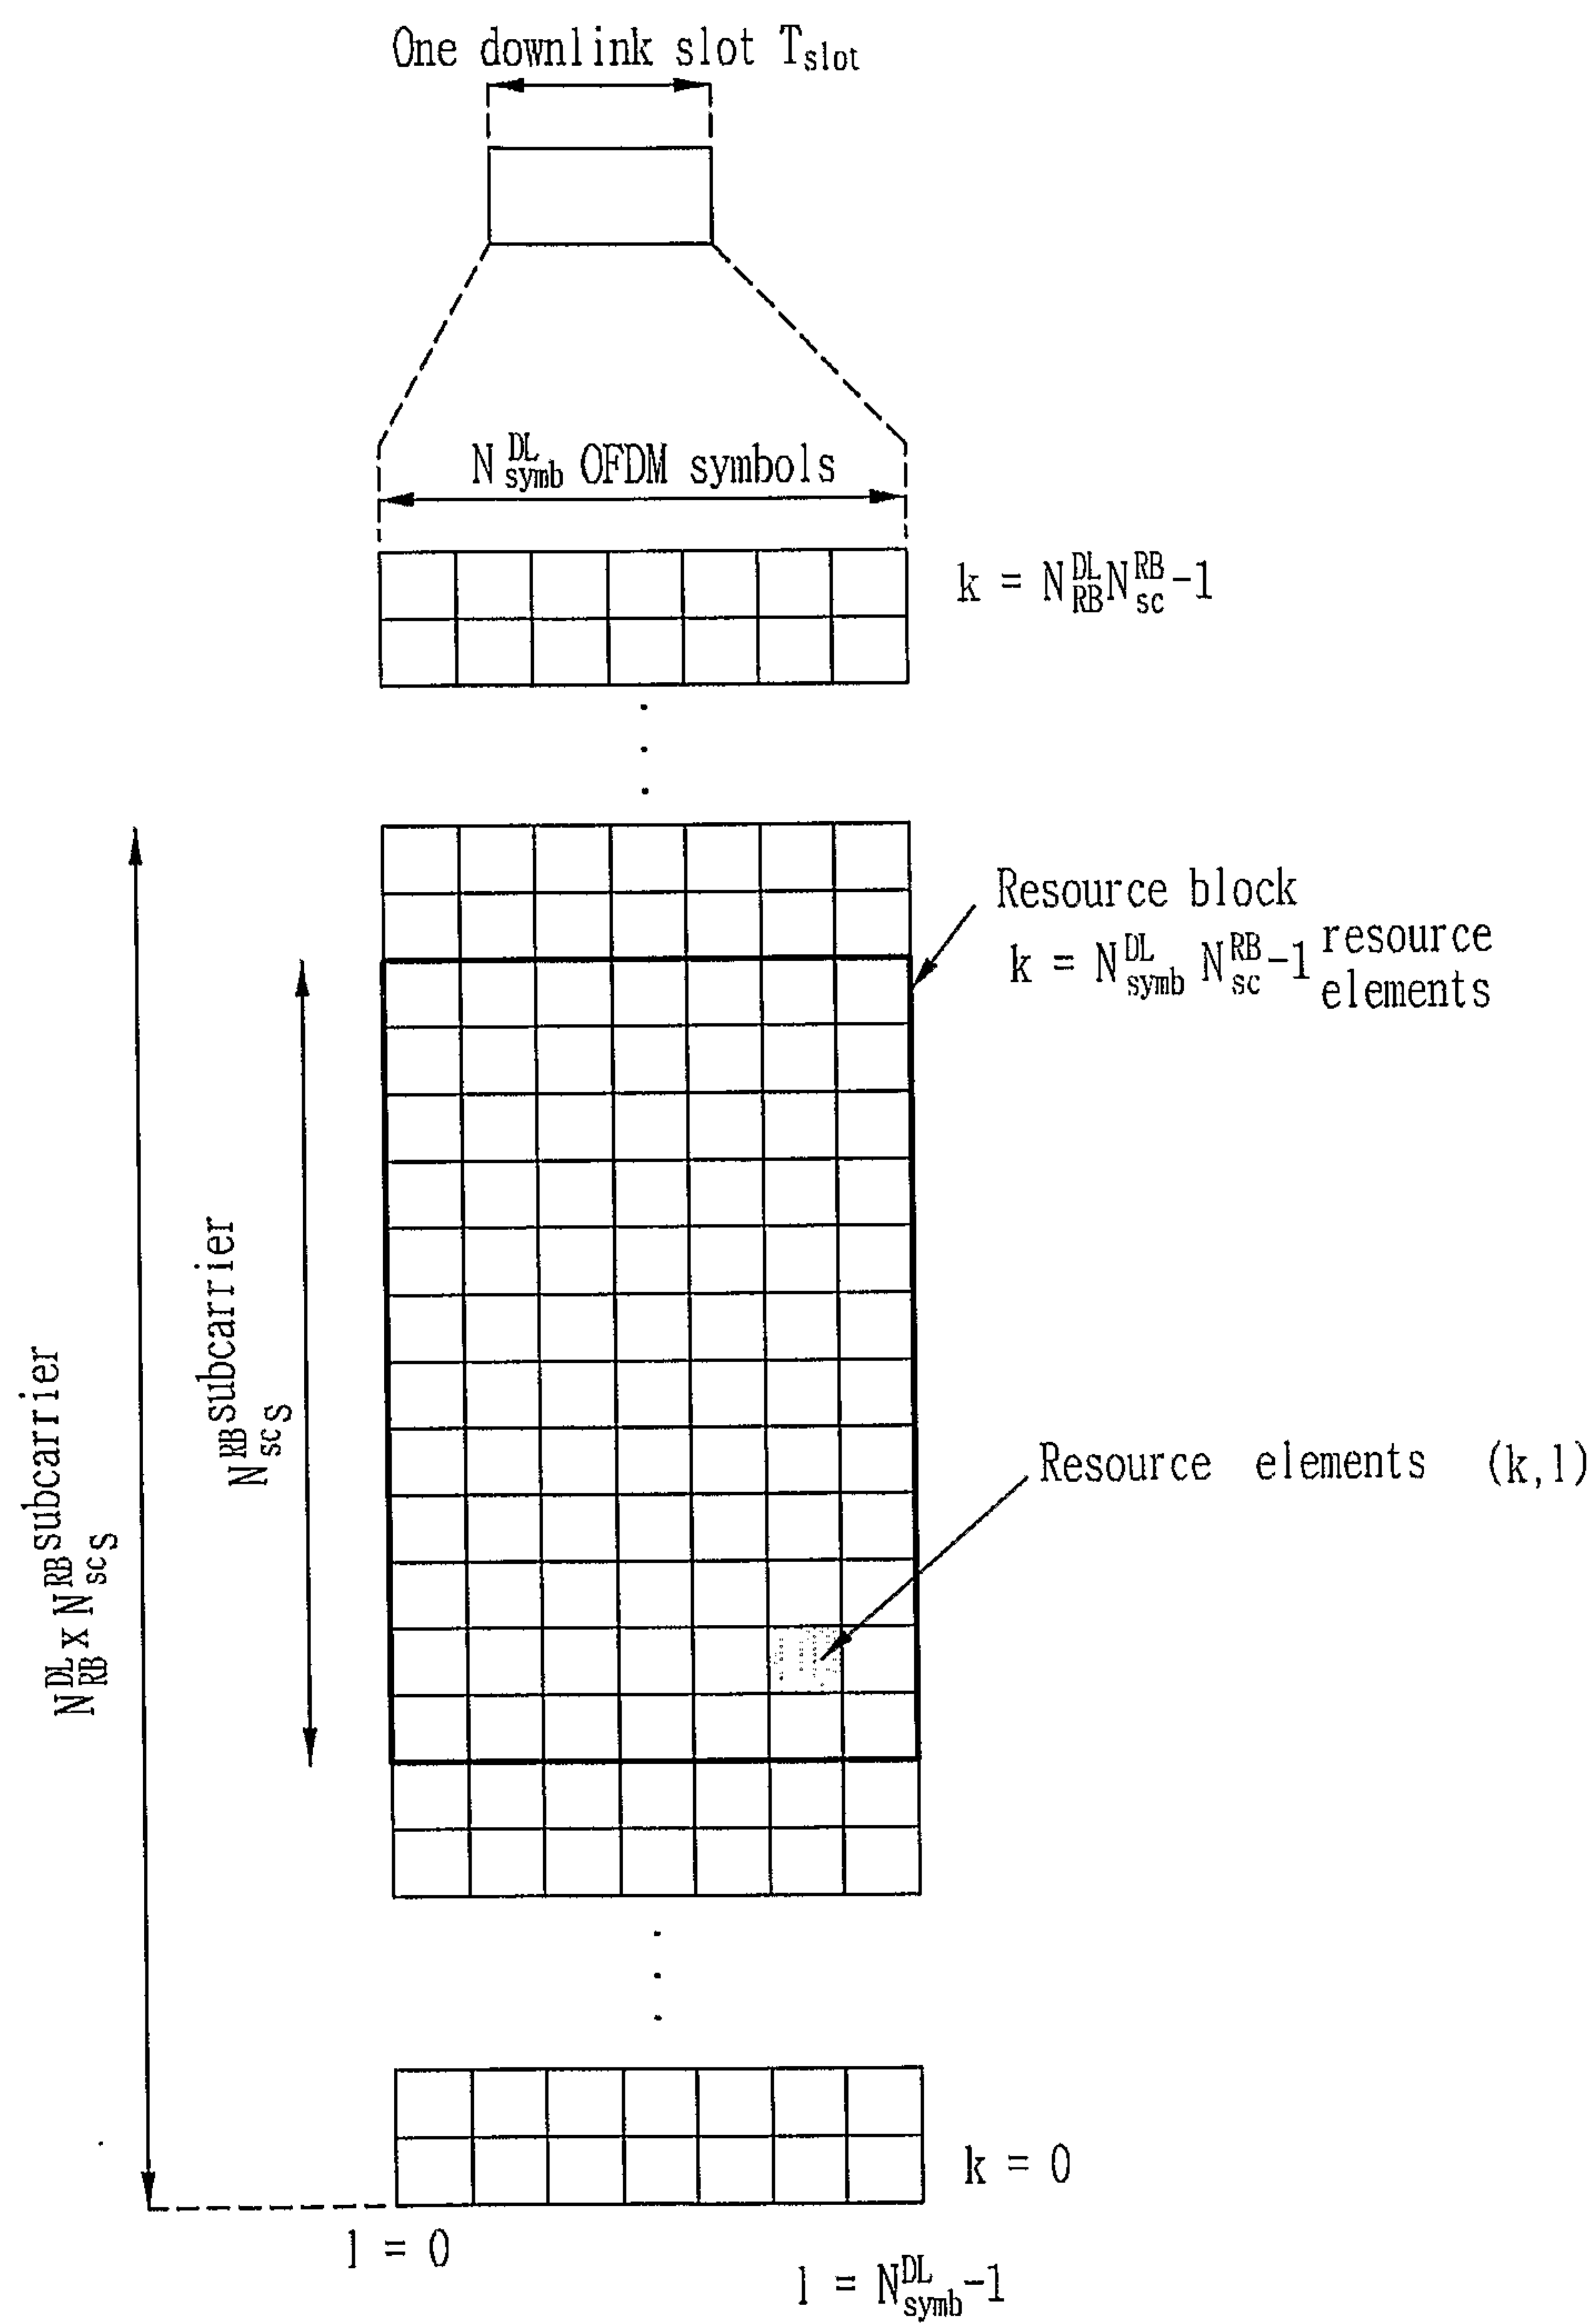


FIG. 4

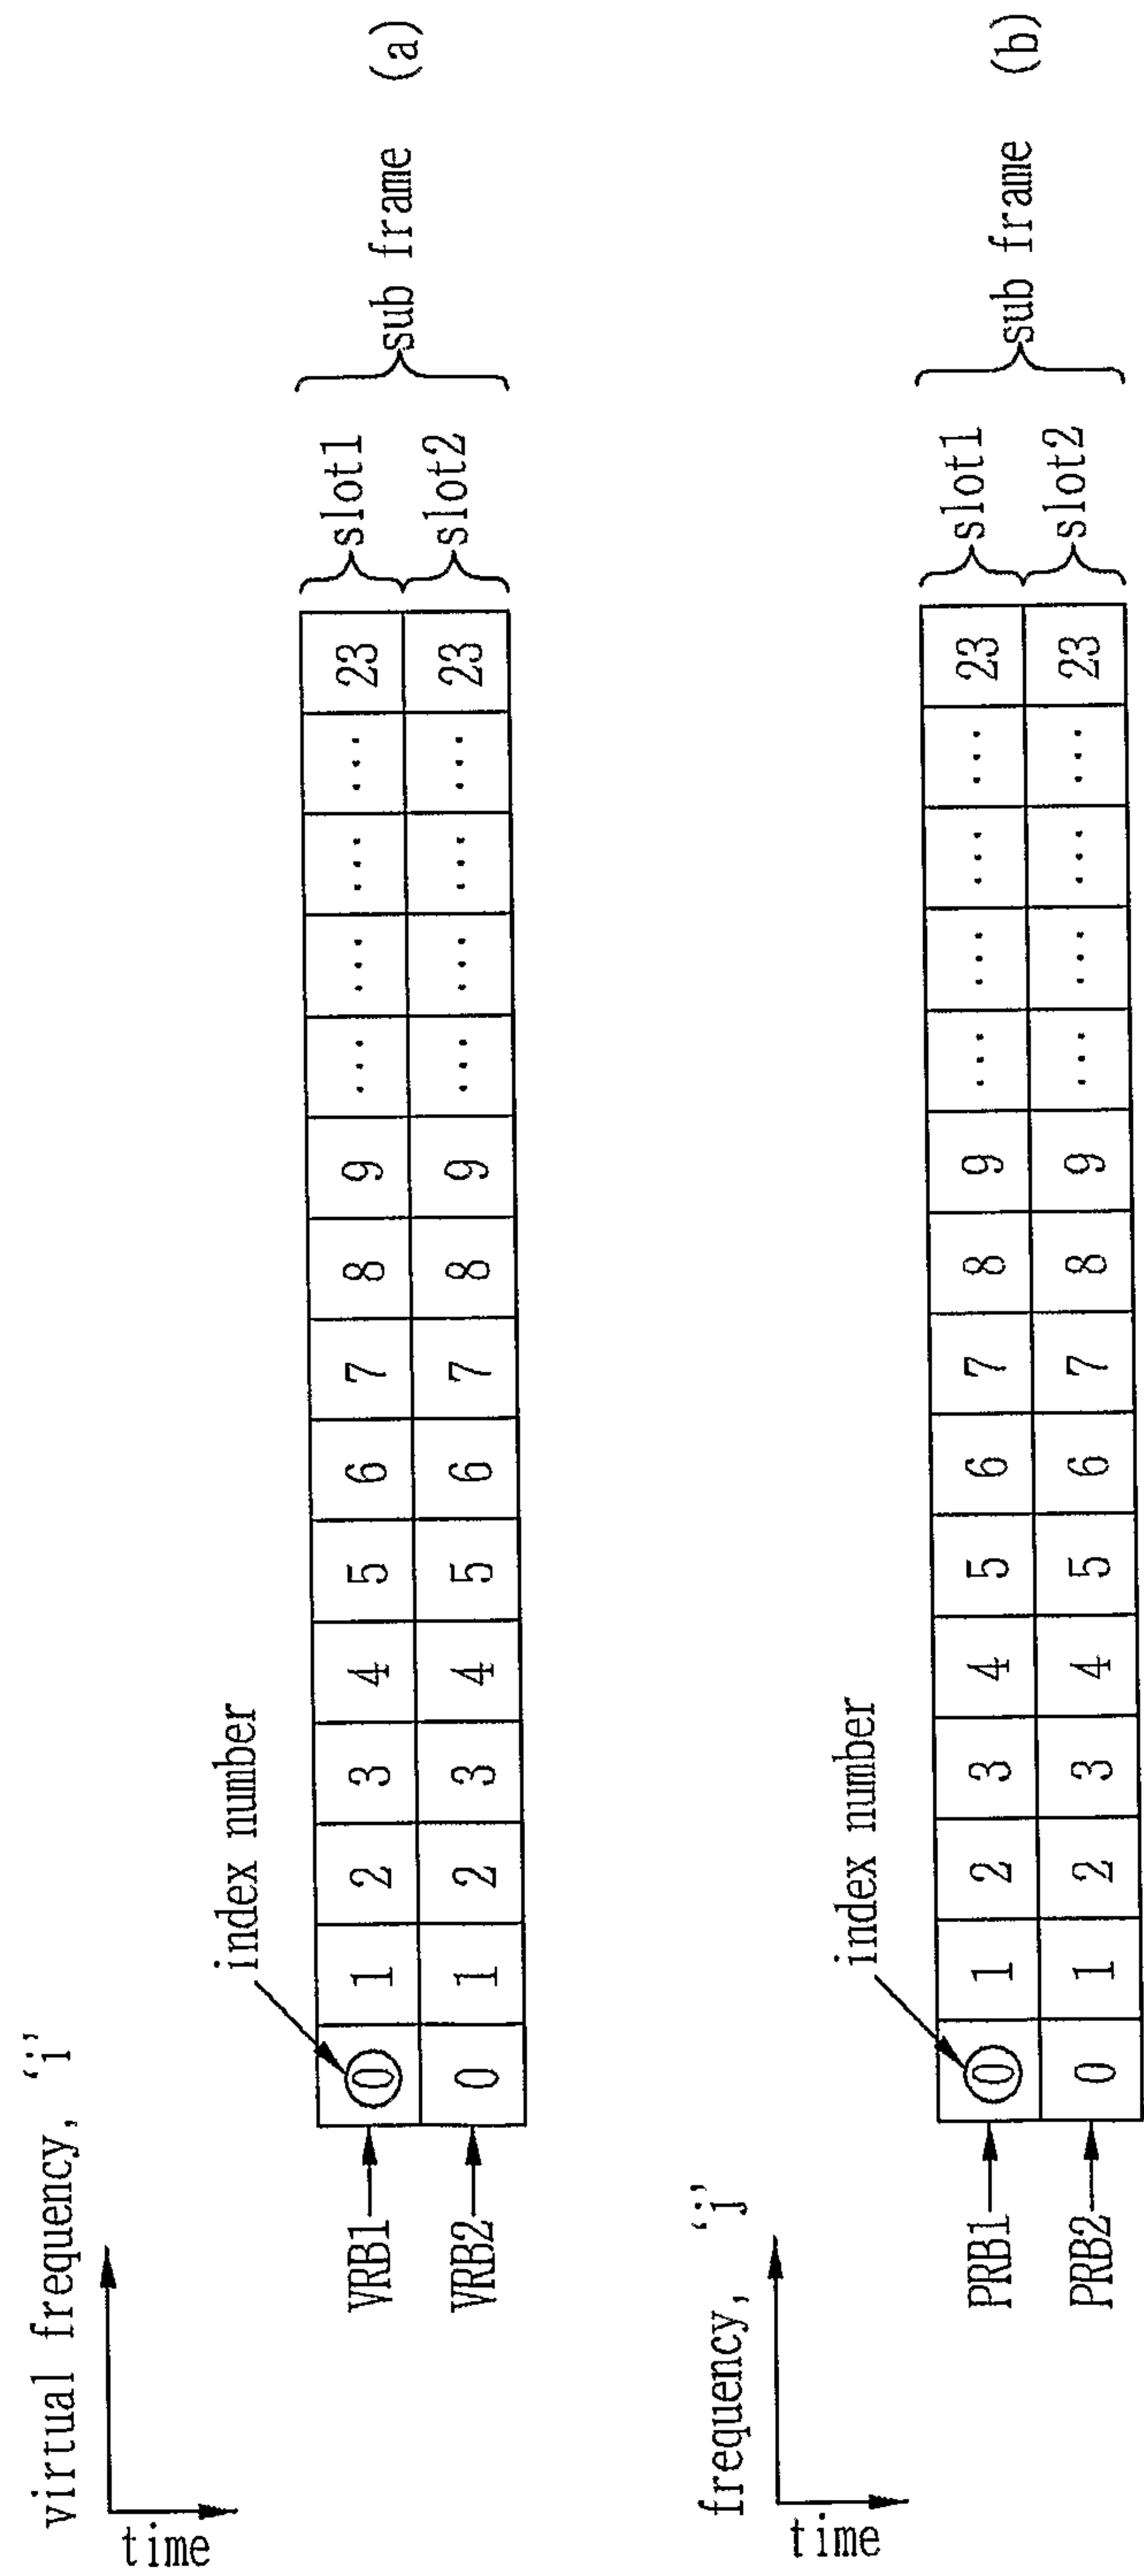


FIG. 5

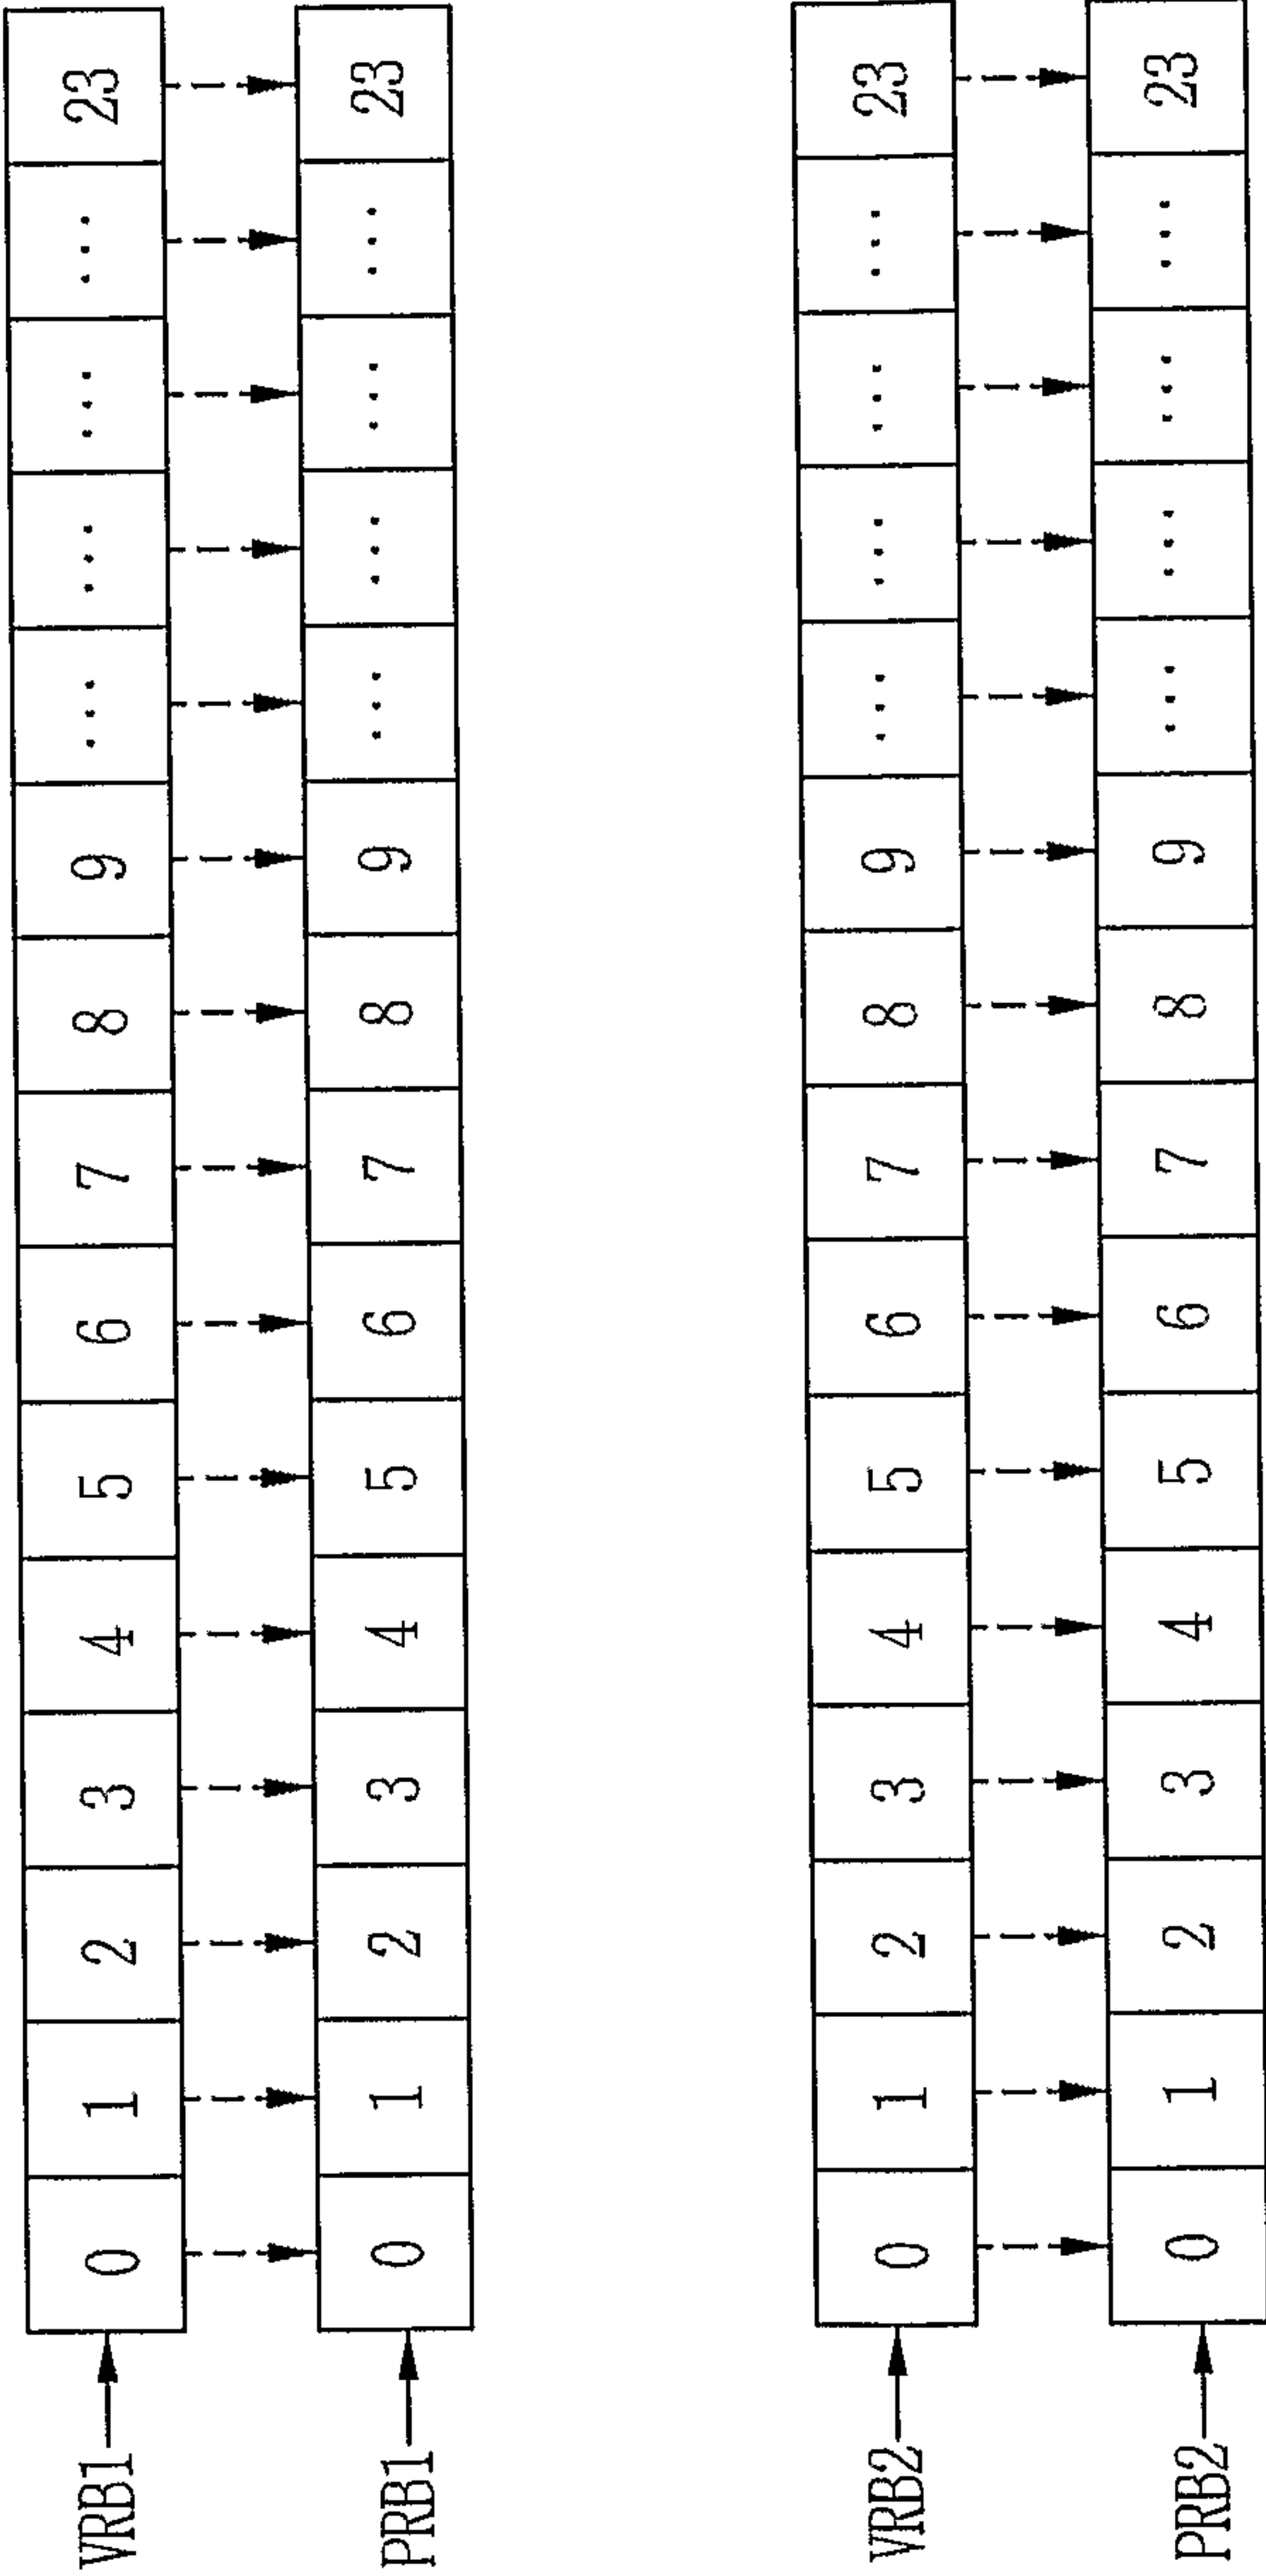


FIG. 6

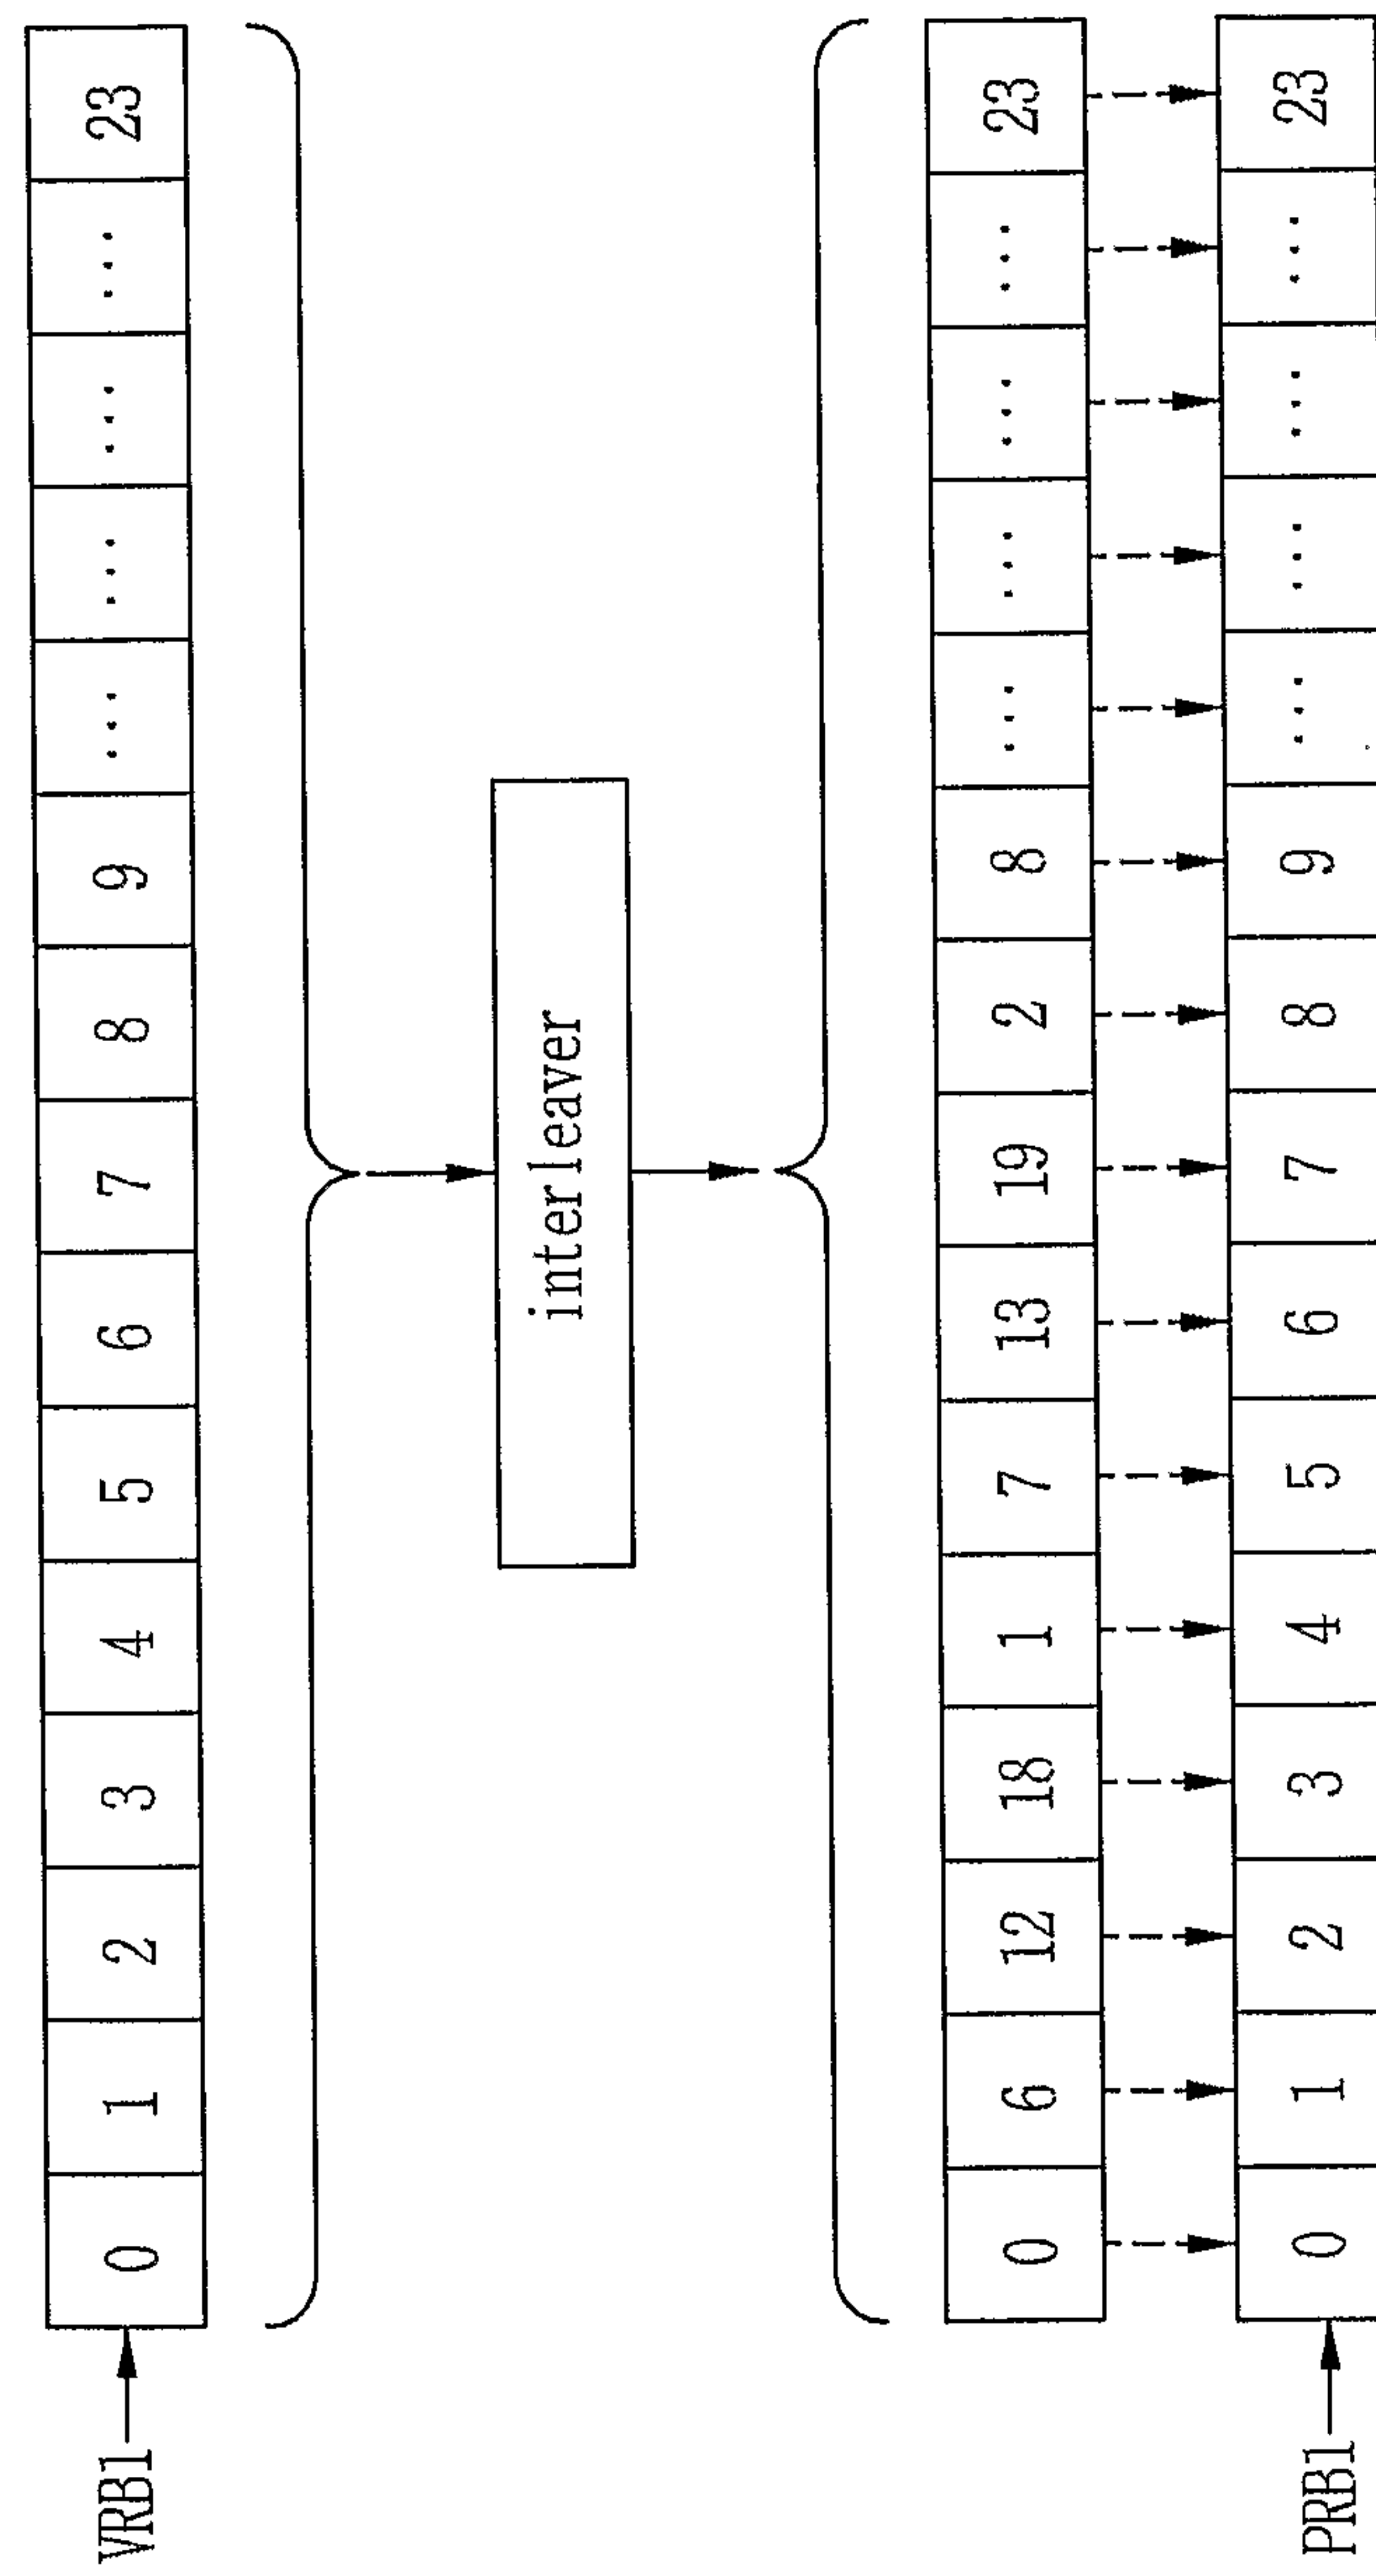


FIG. 7

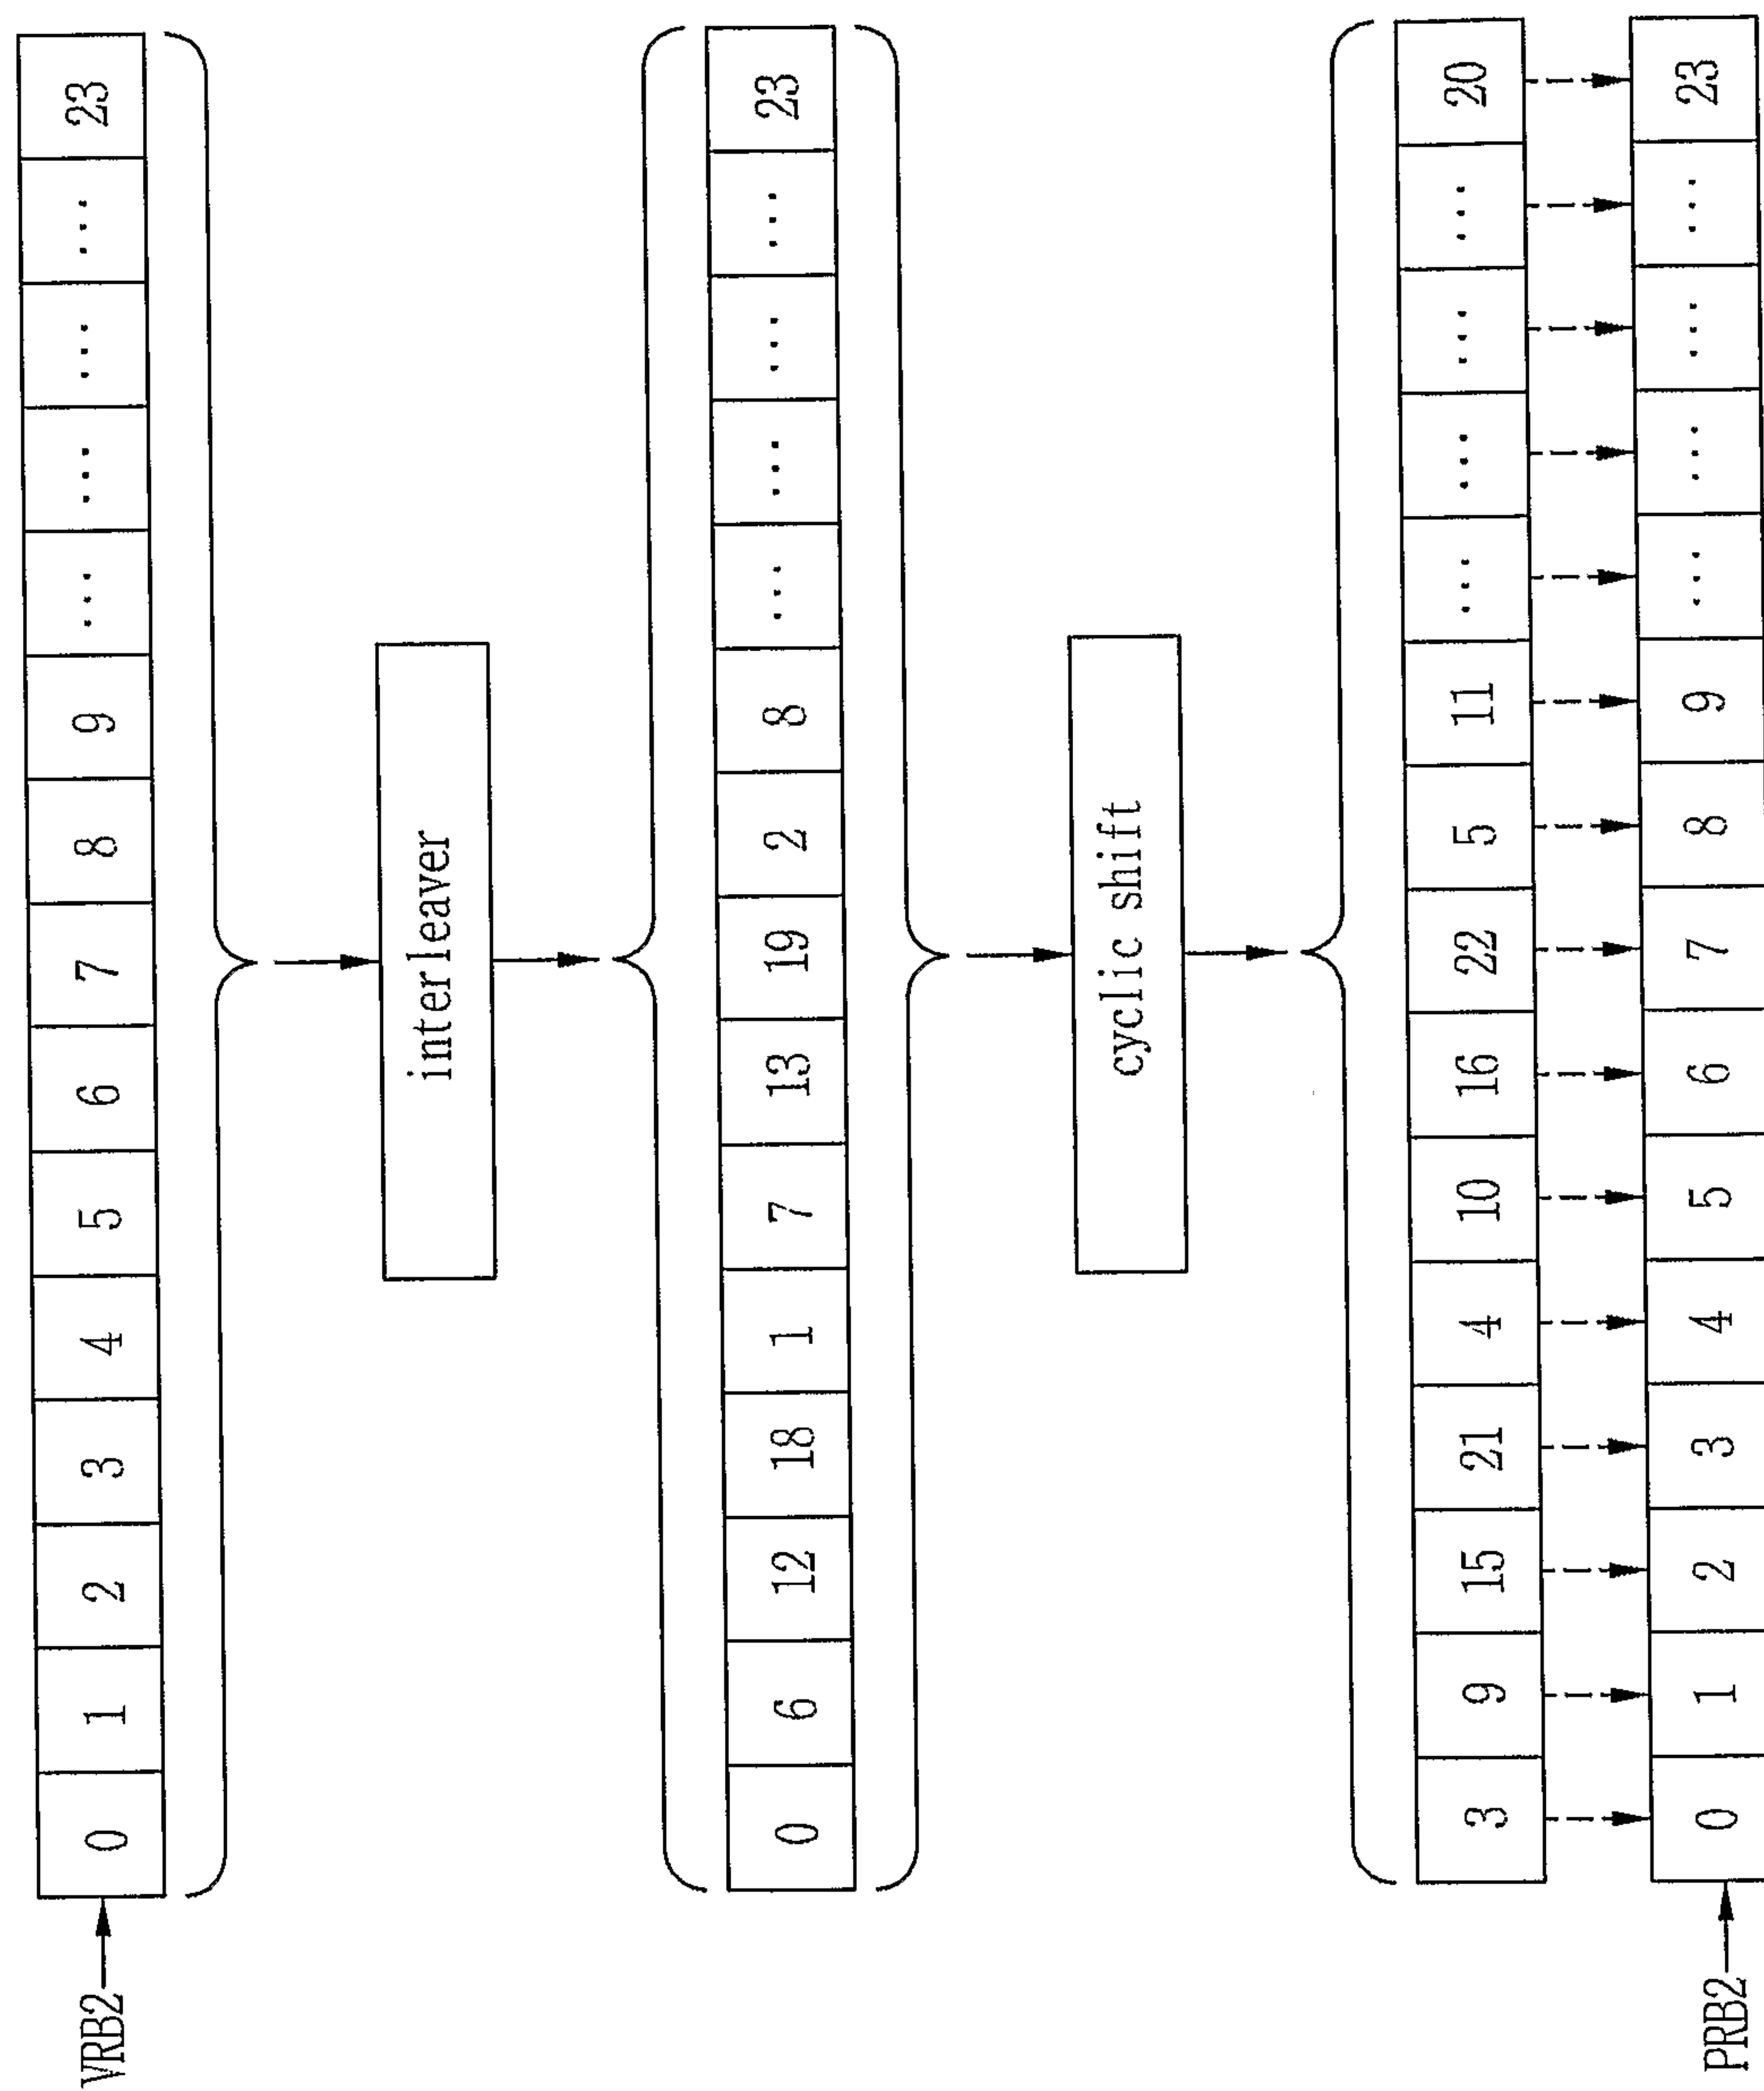


FIG. 8


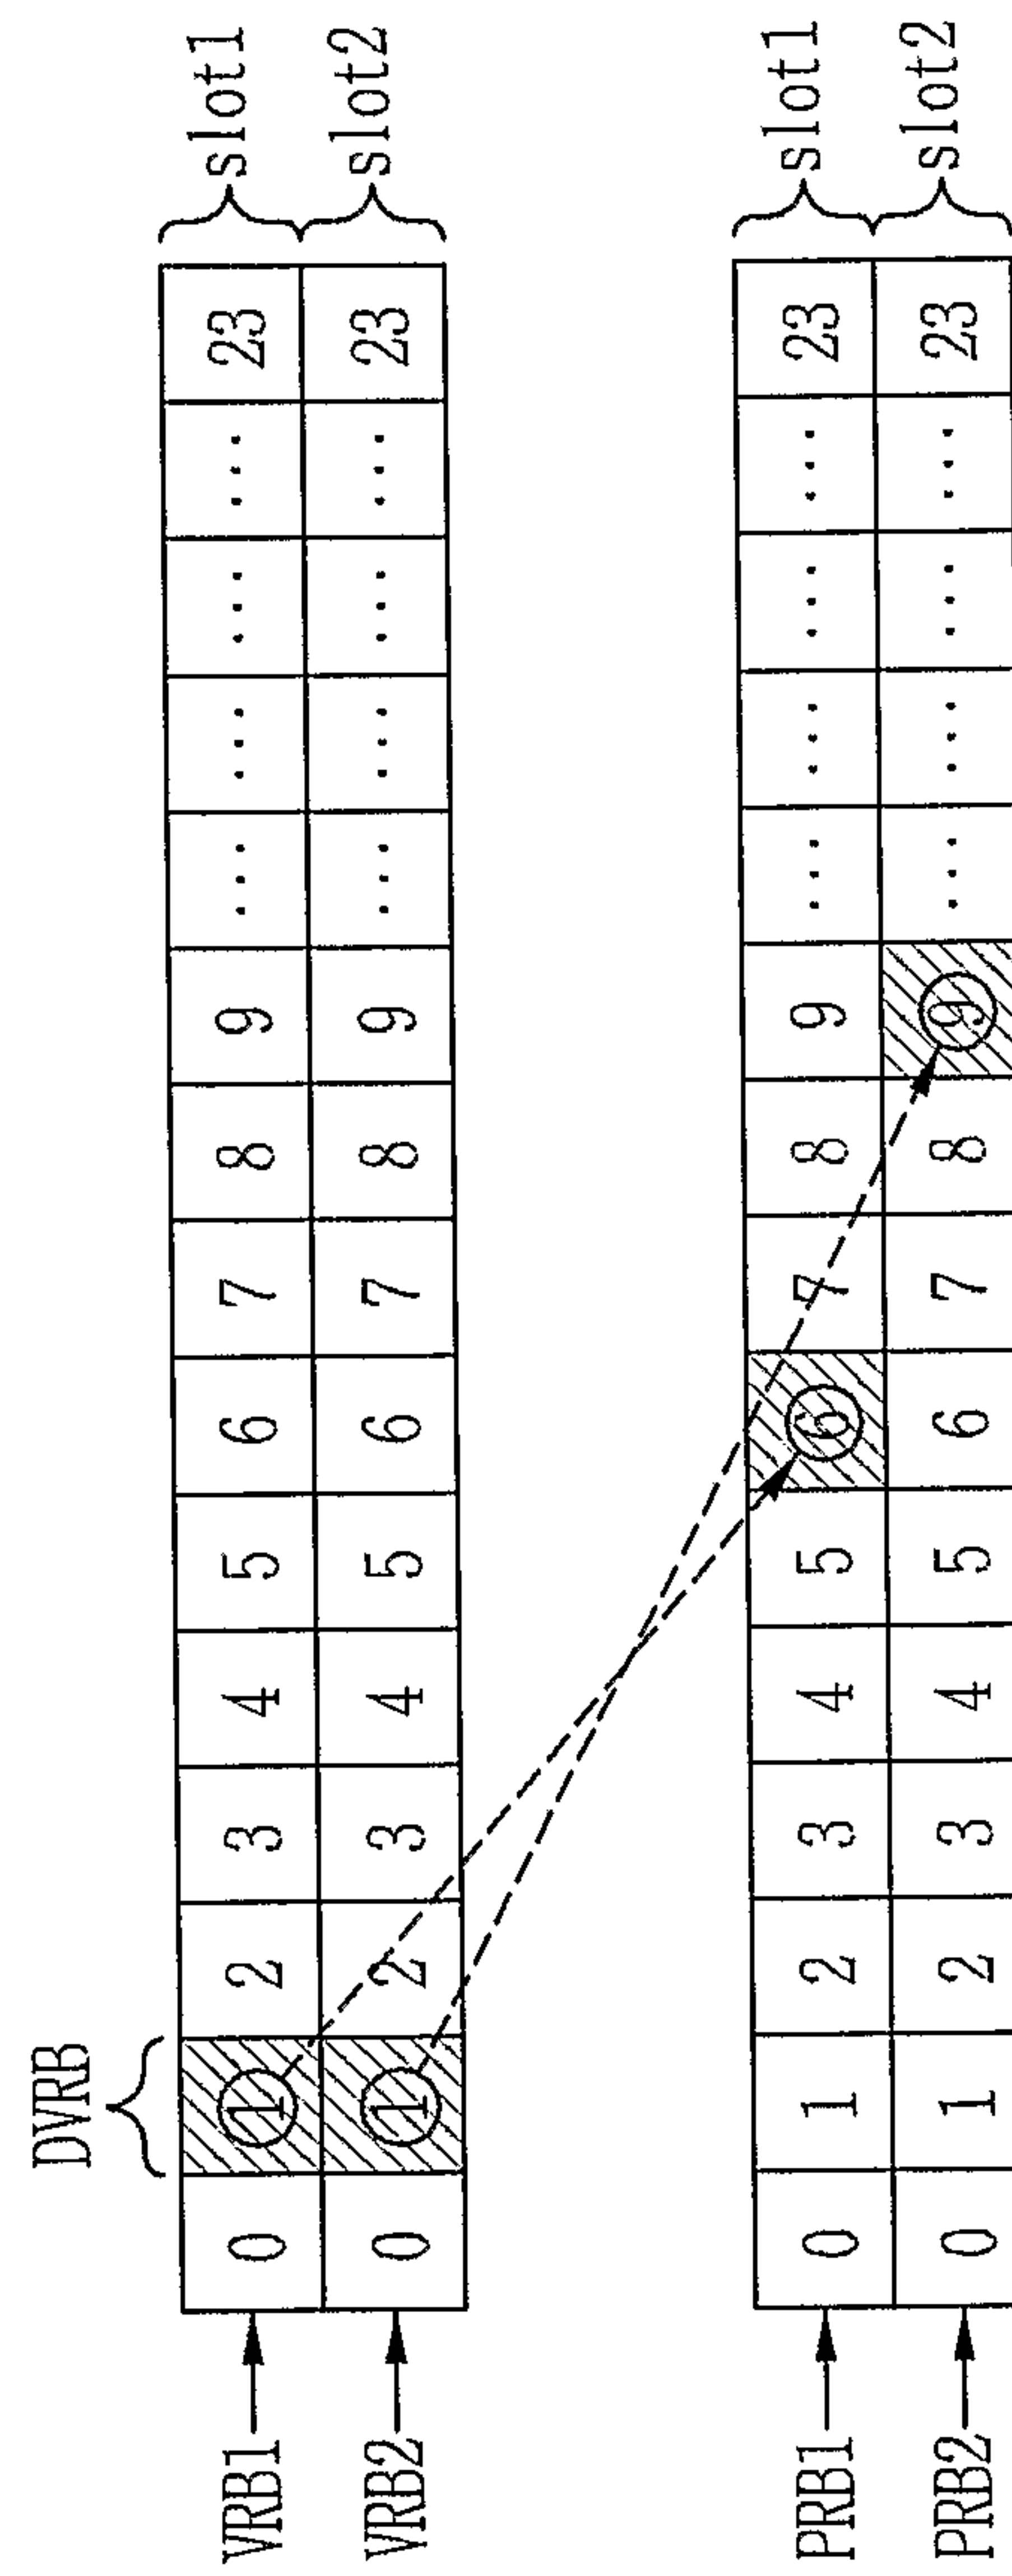


FIG. 9

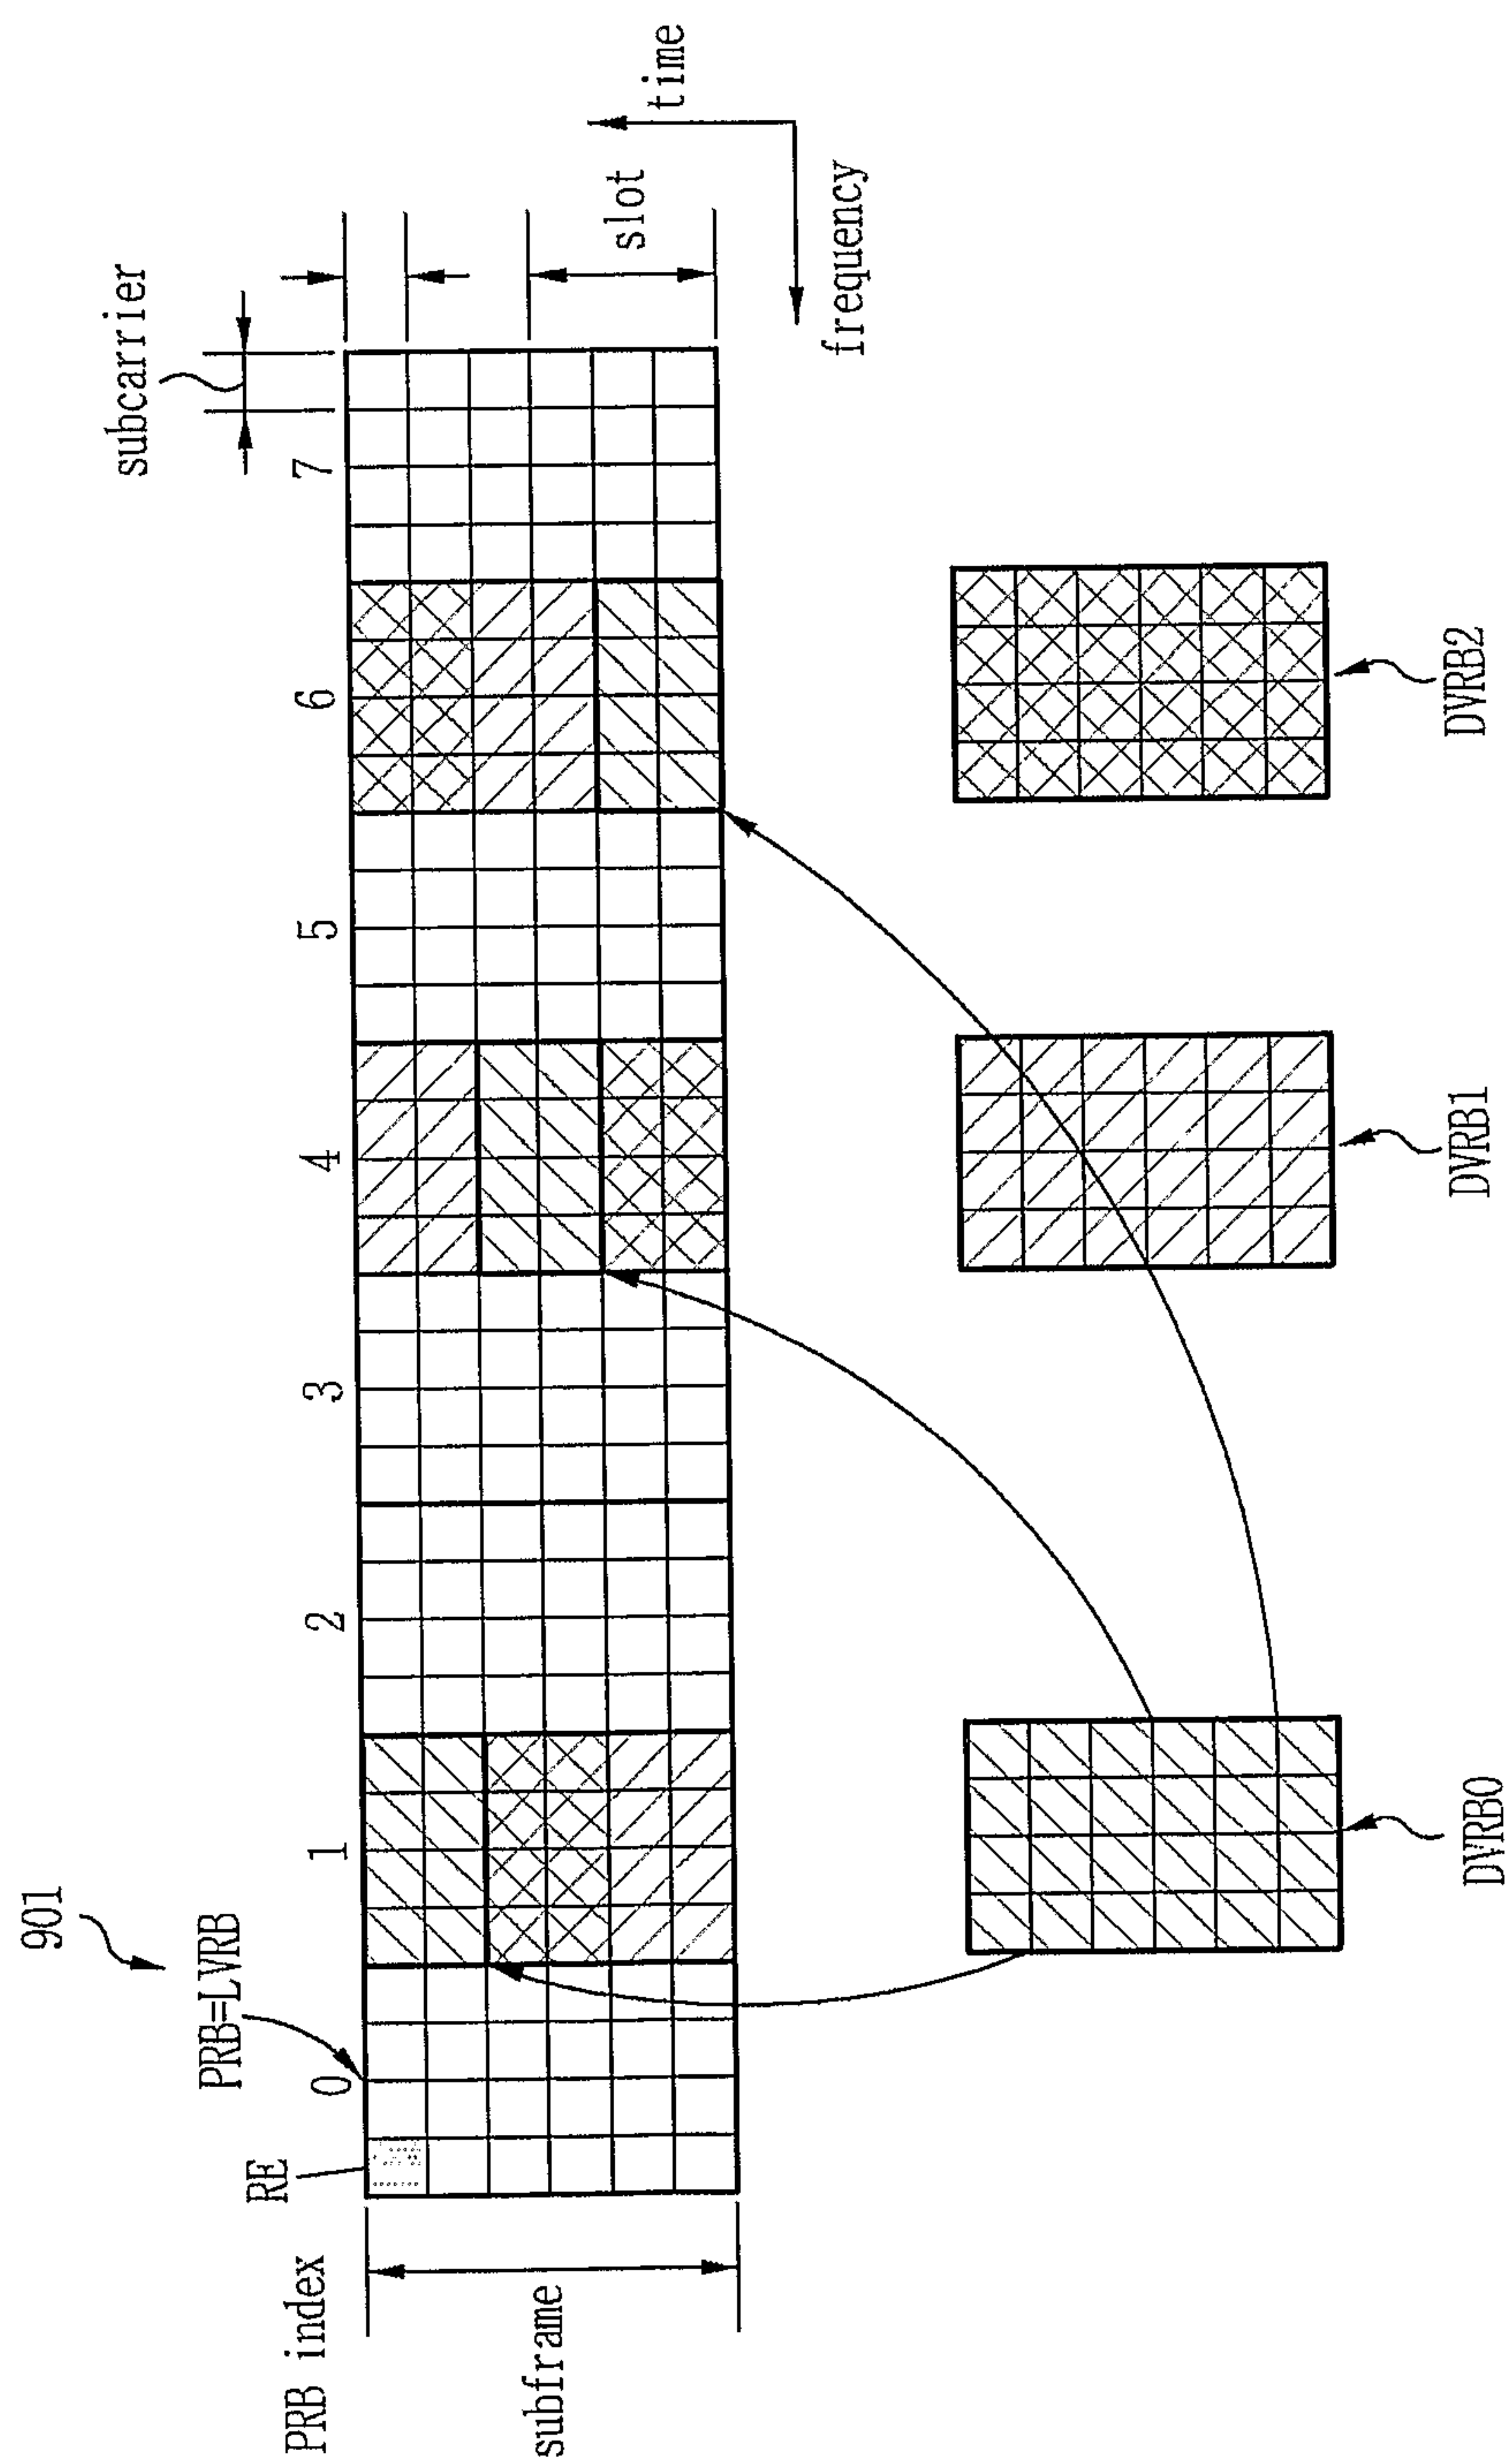

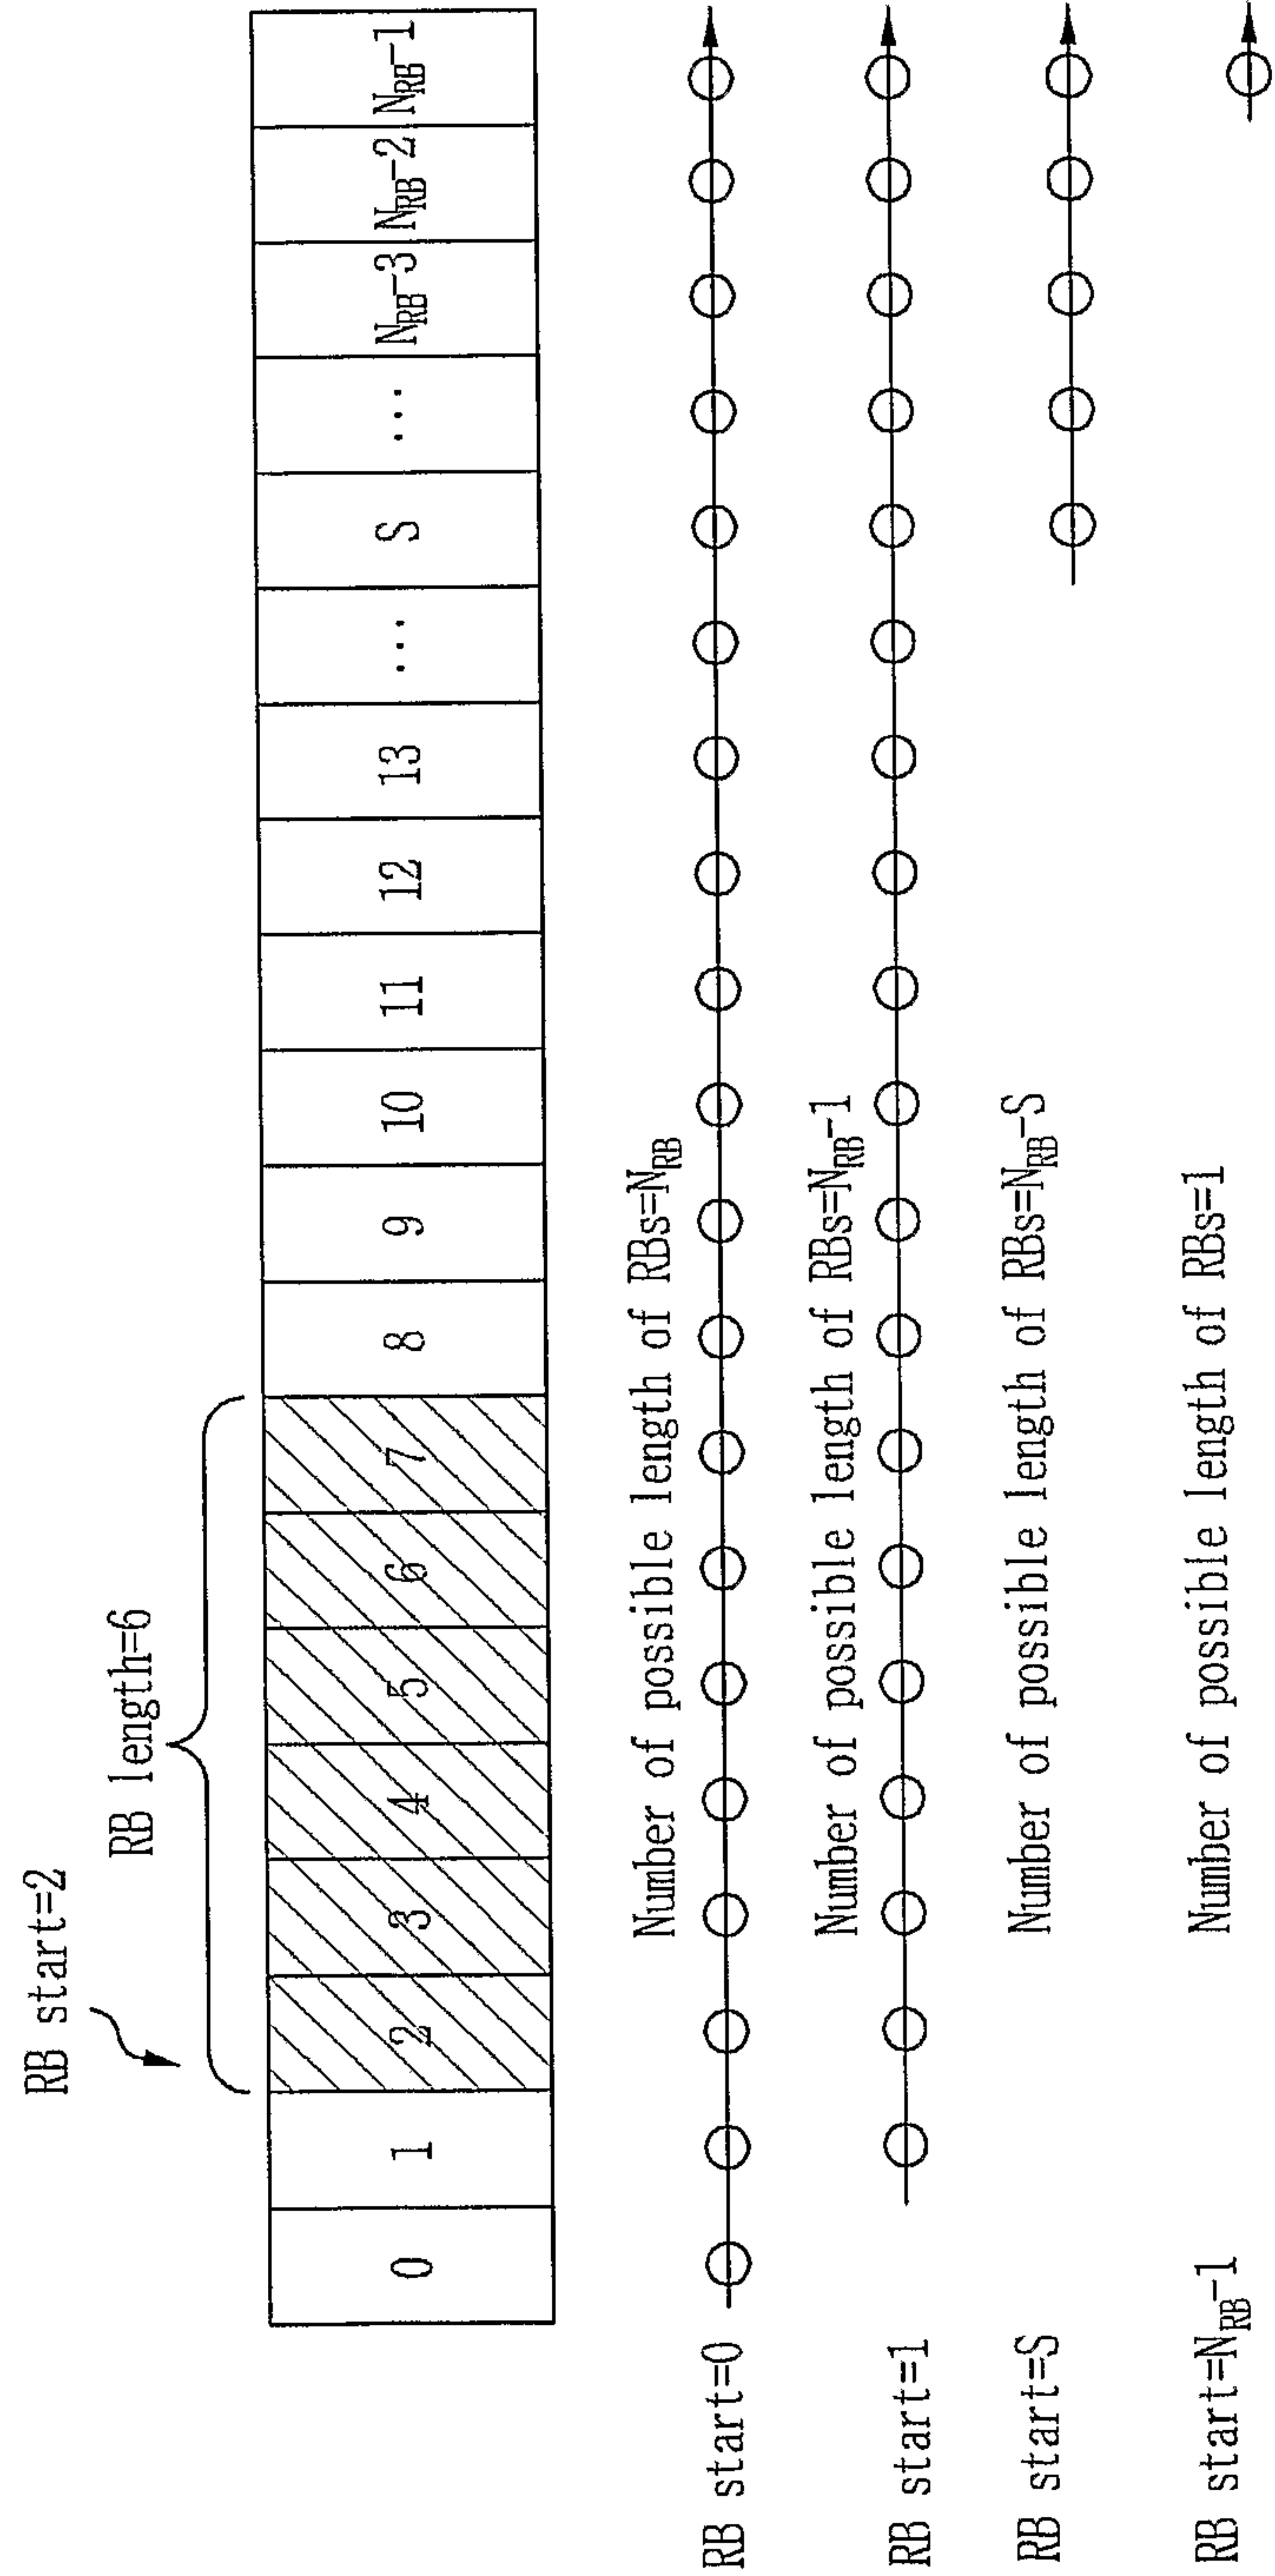


FIG. 10

Number of hypotheses of resource allocation = $N_{RB}(N_{RB}+1)/2$
Required number of bits for hypotheses = $\text{ceiling}(\log_2(N_{RB}(N_{RB}+1)/2))$

FIG. 11

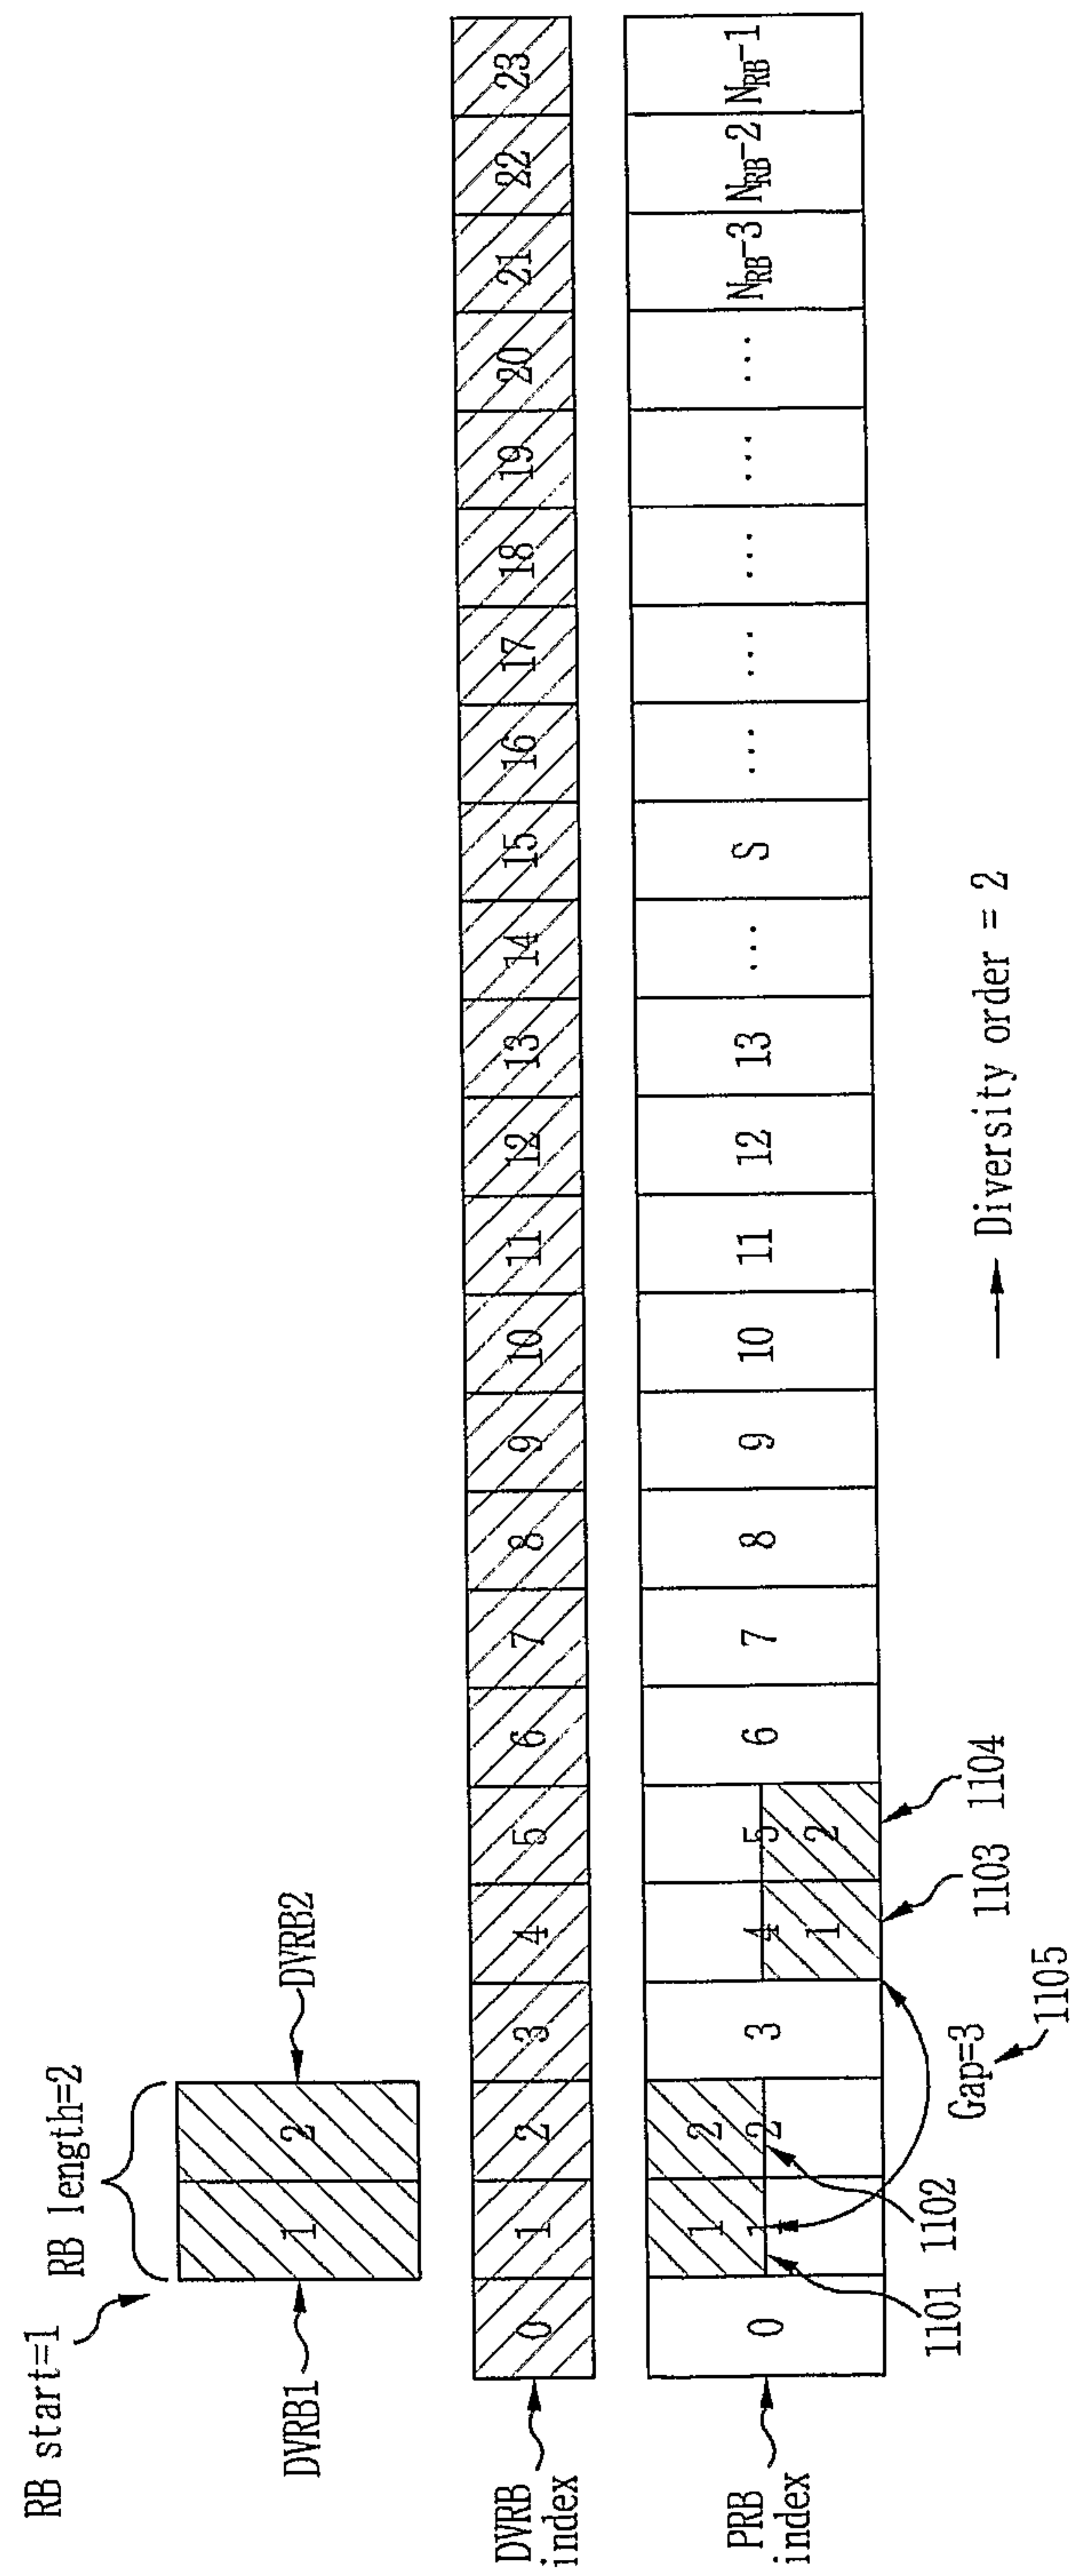


FIG. 12

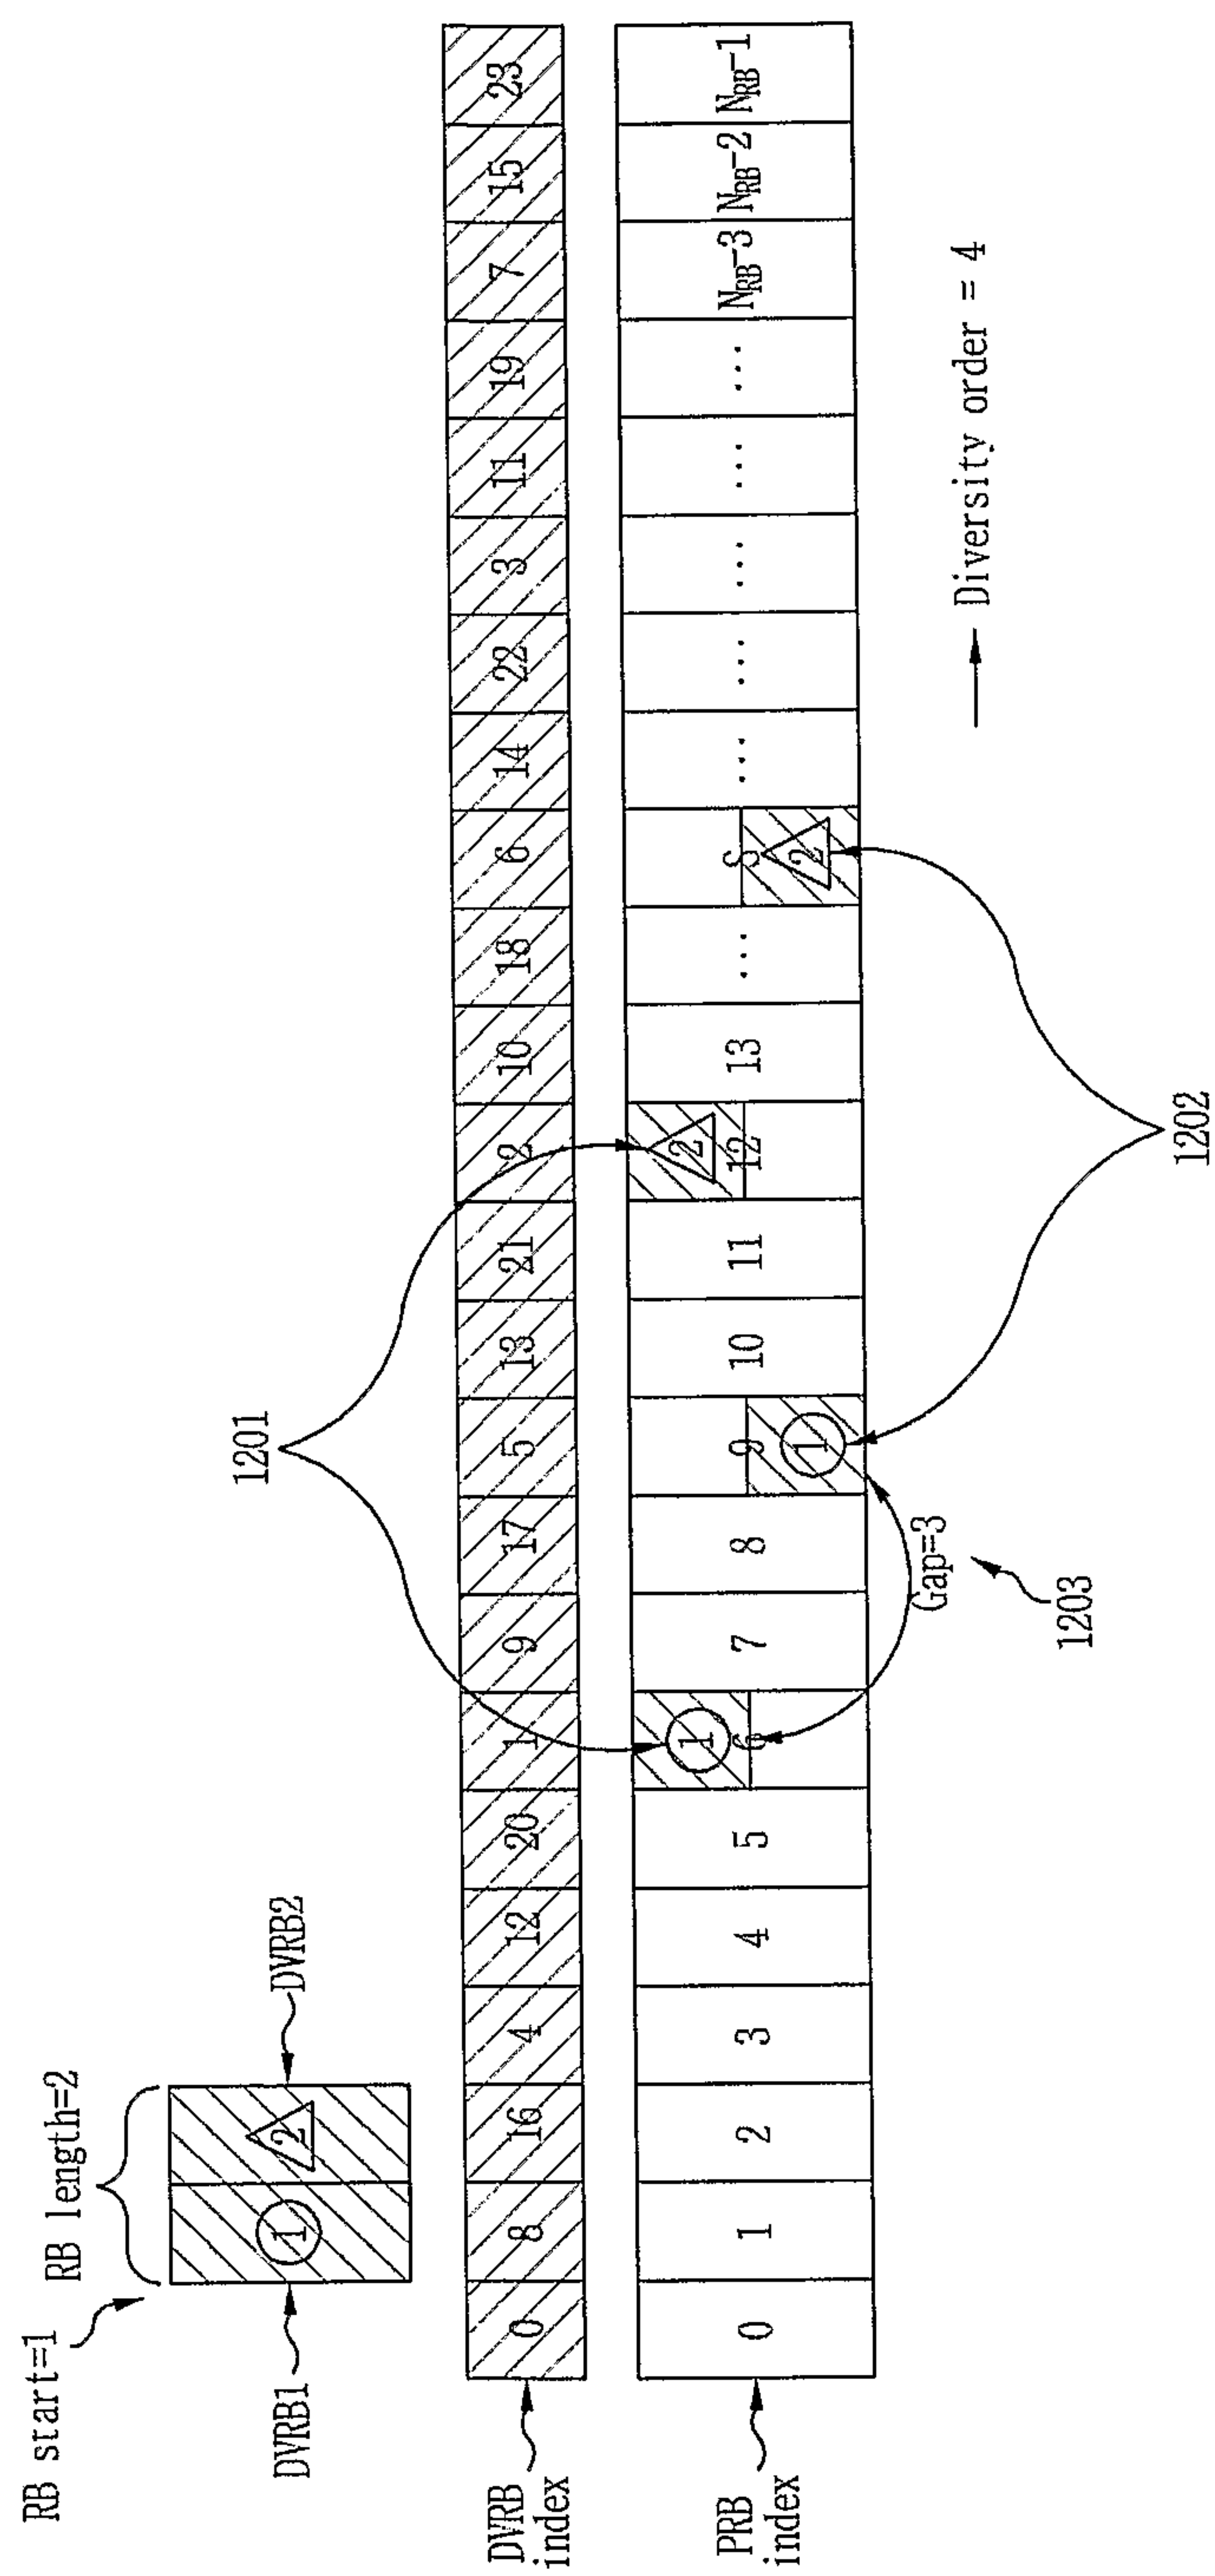


FIG. 13

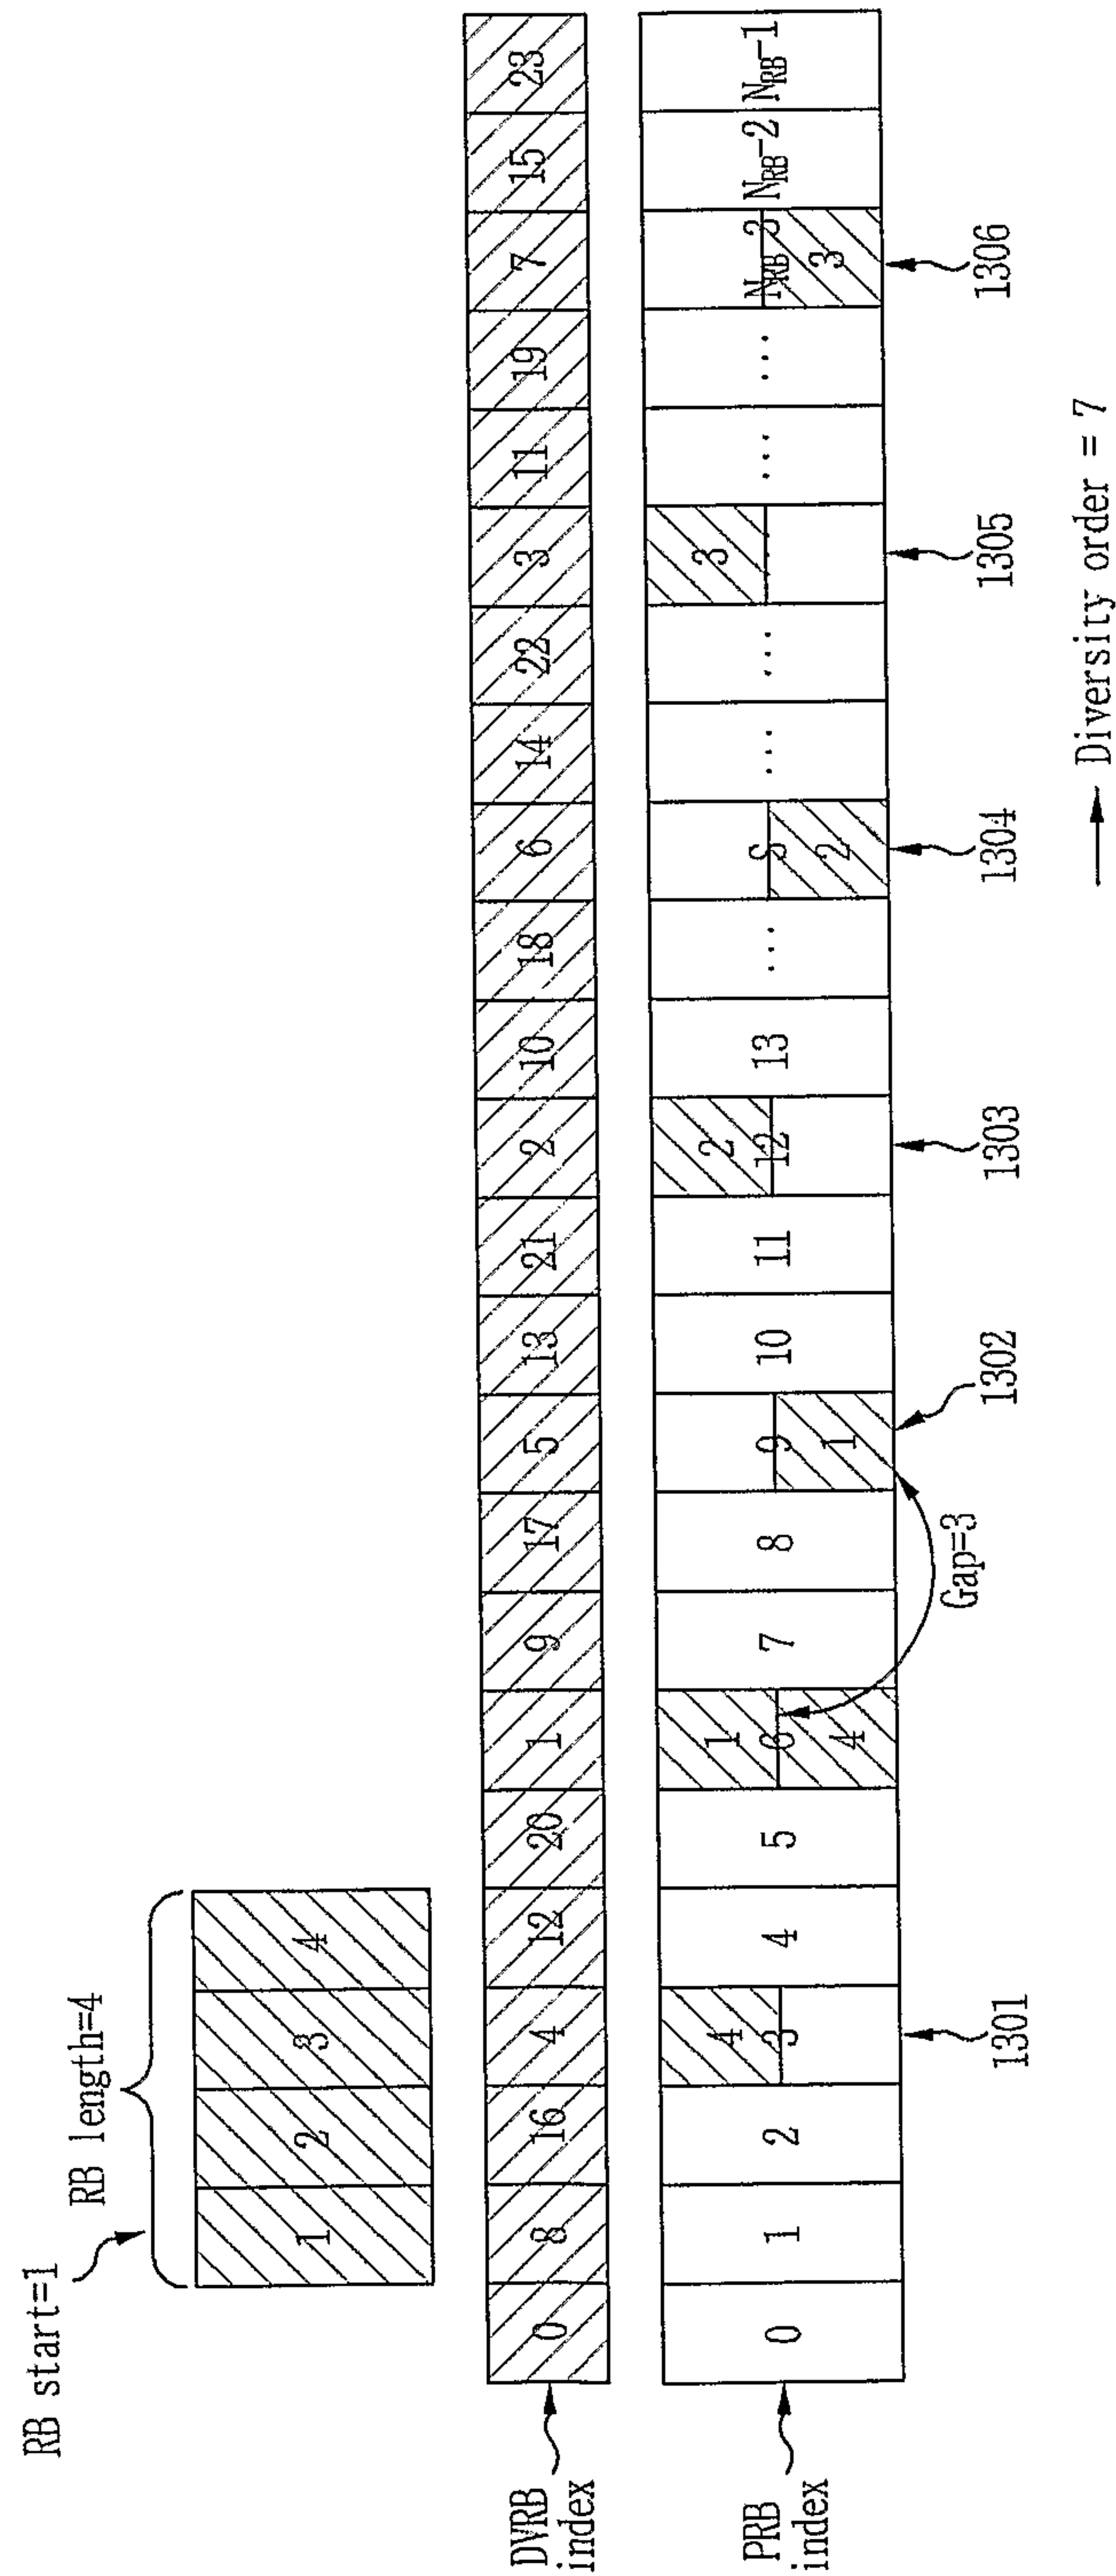


FIG. 14

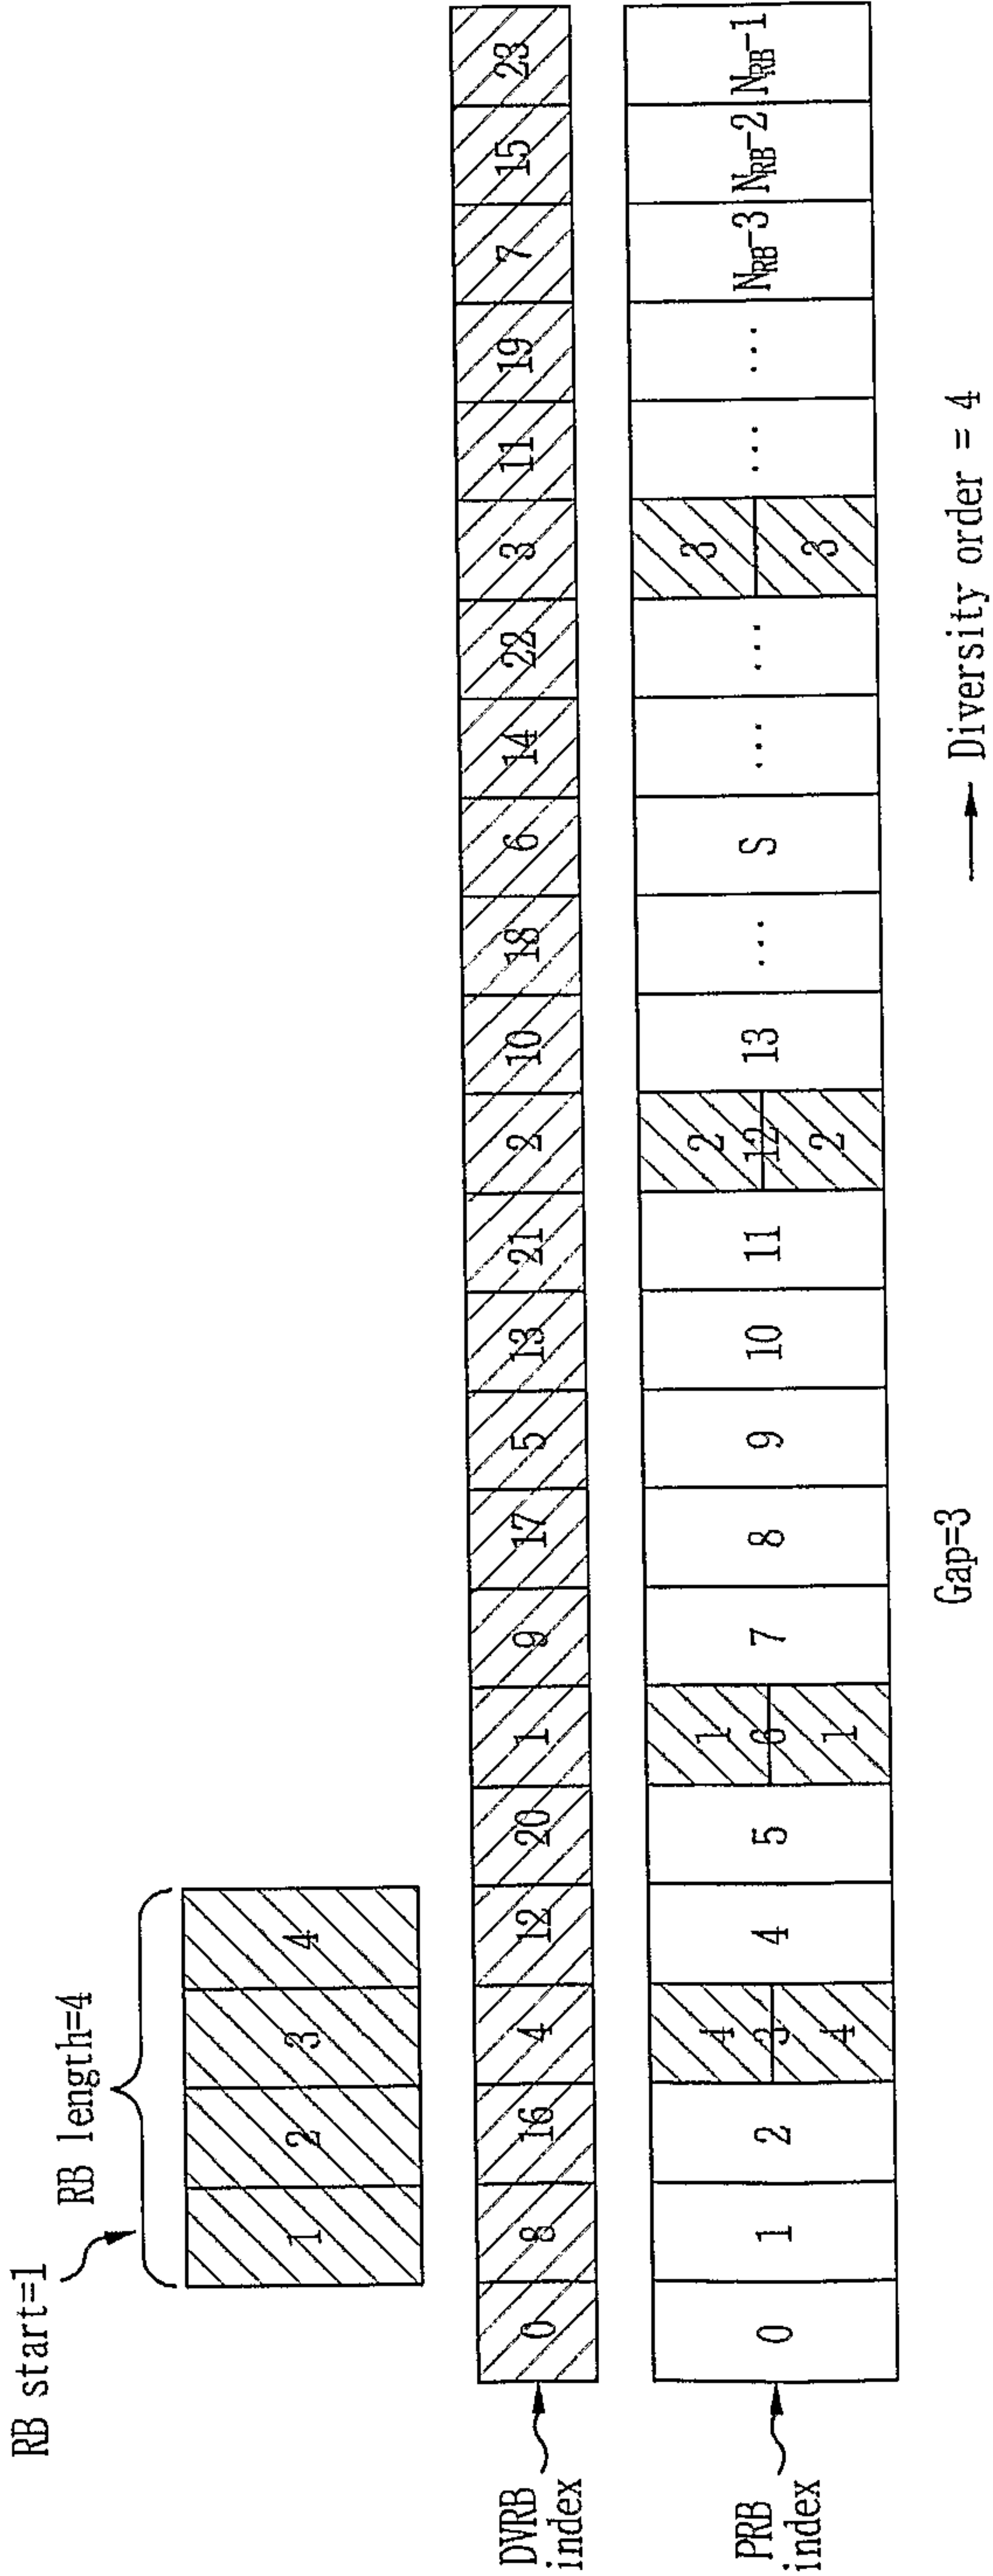


FIG. 15

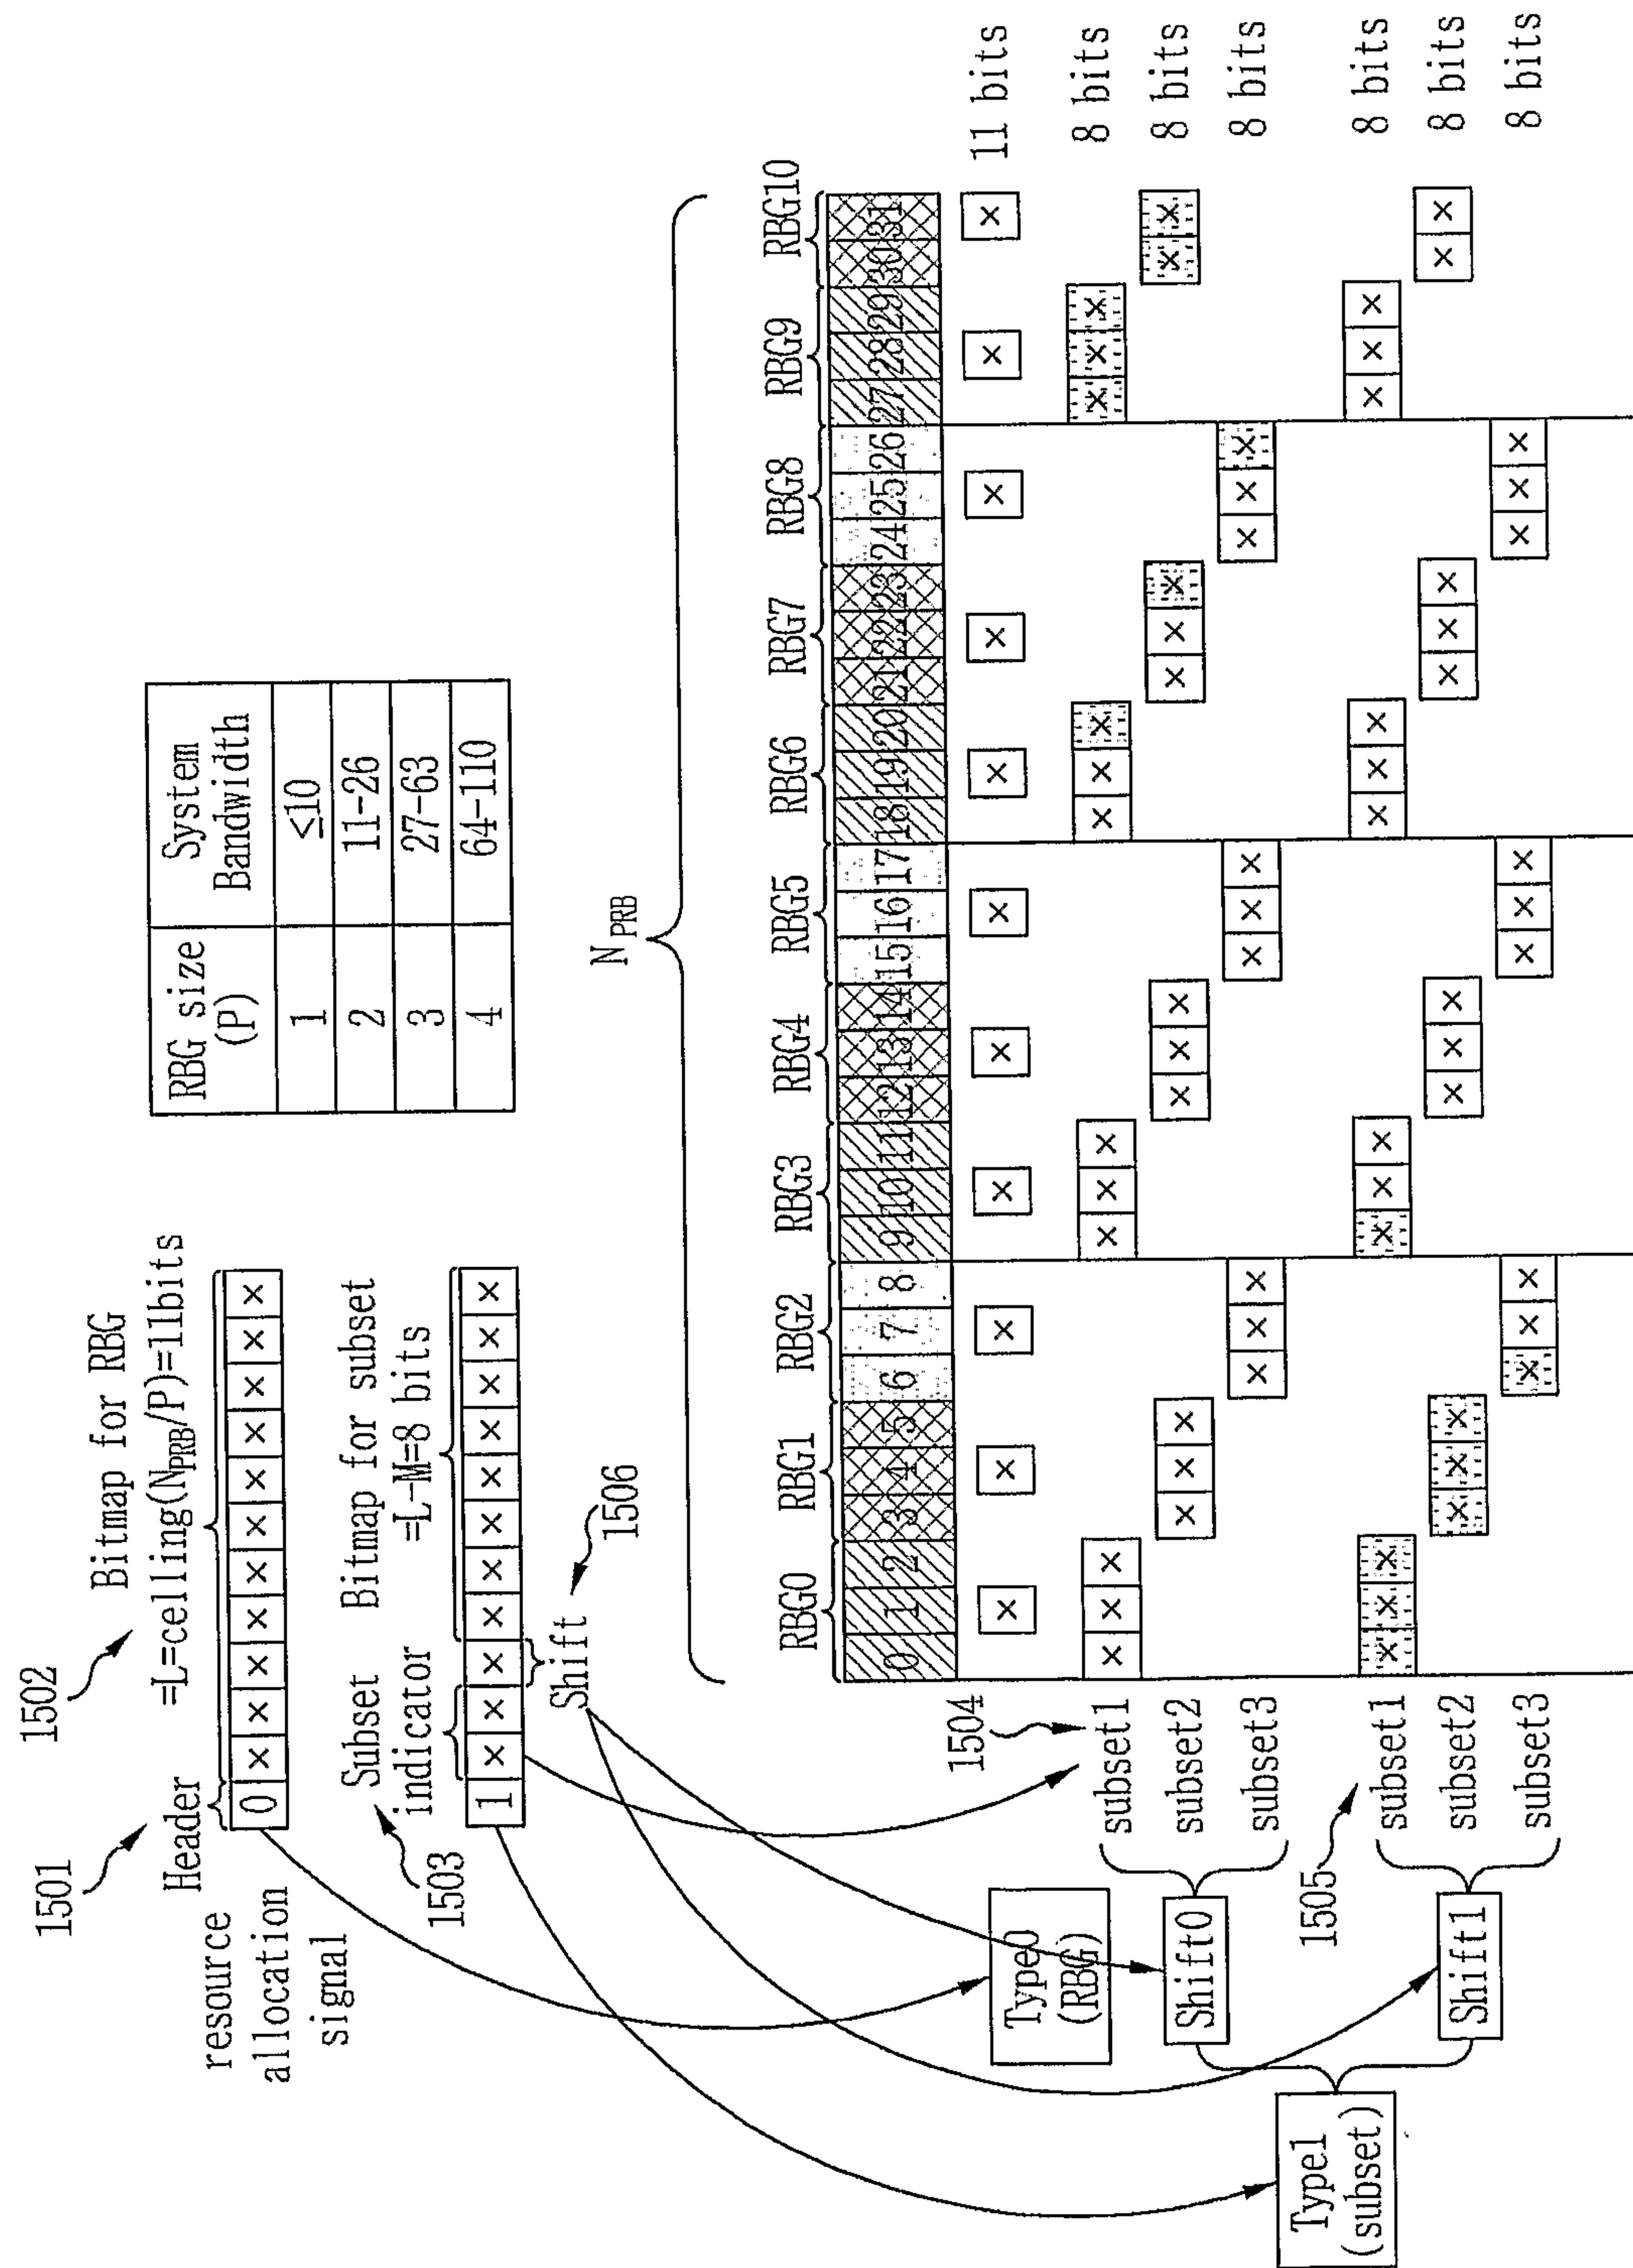


FIG. 16

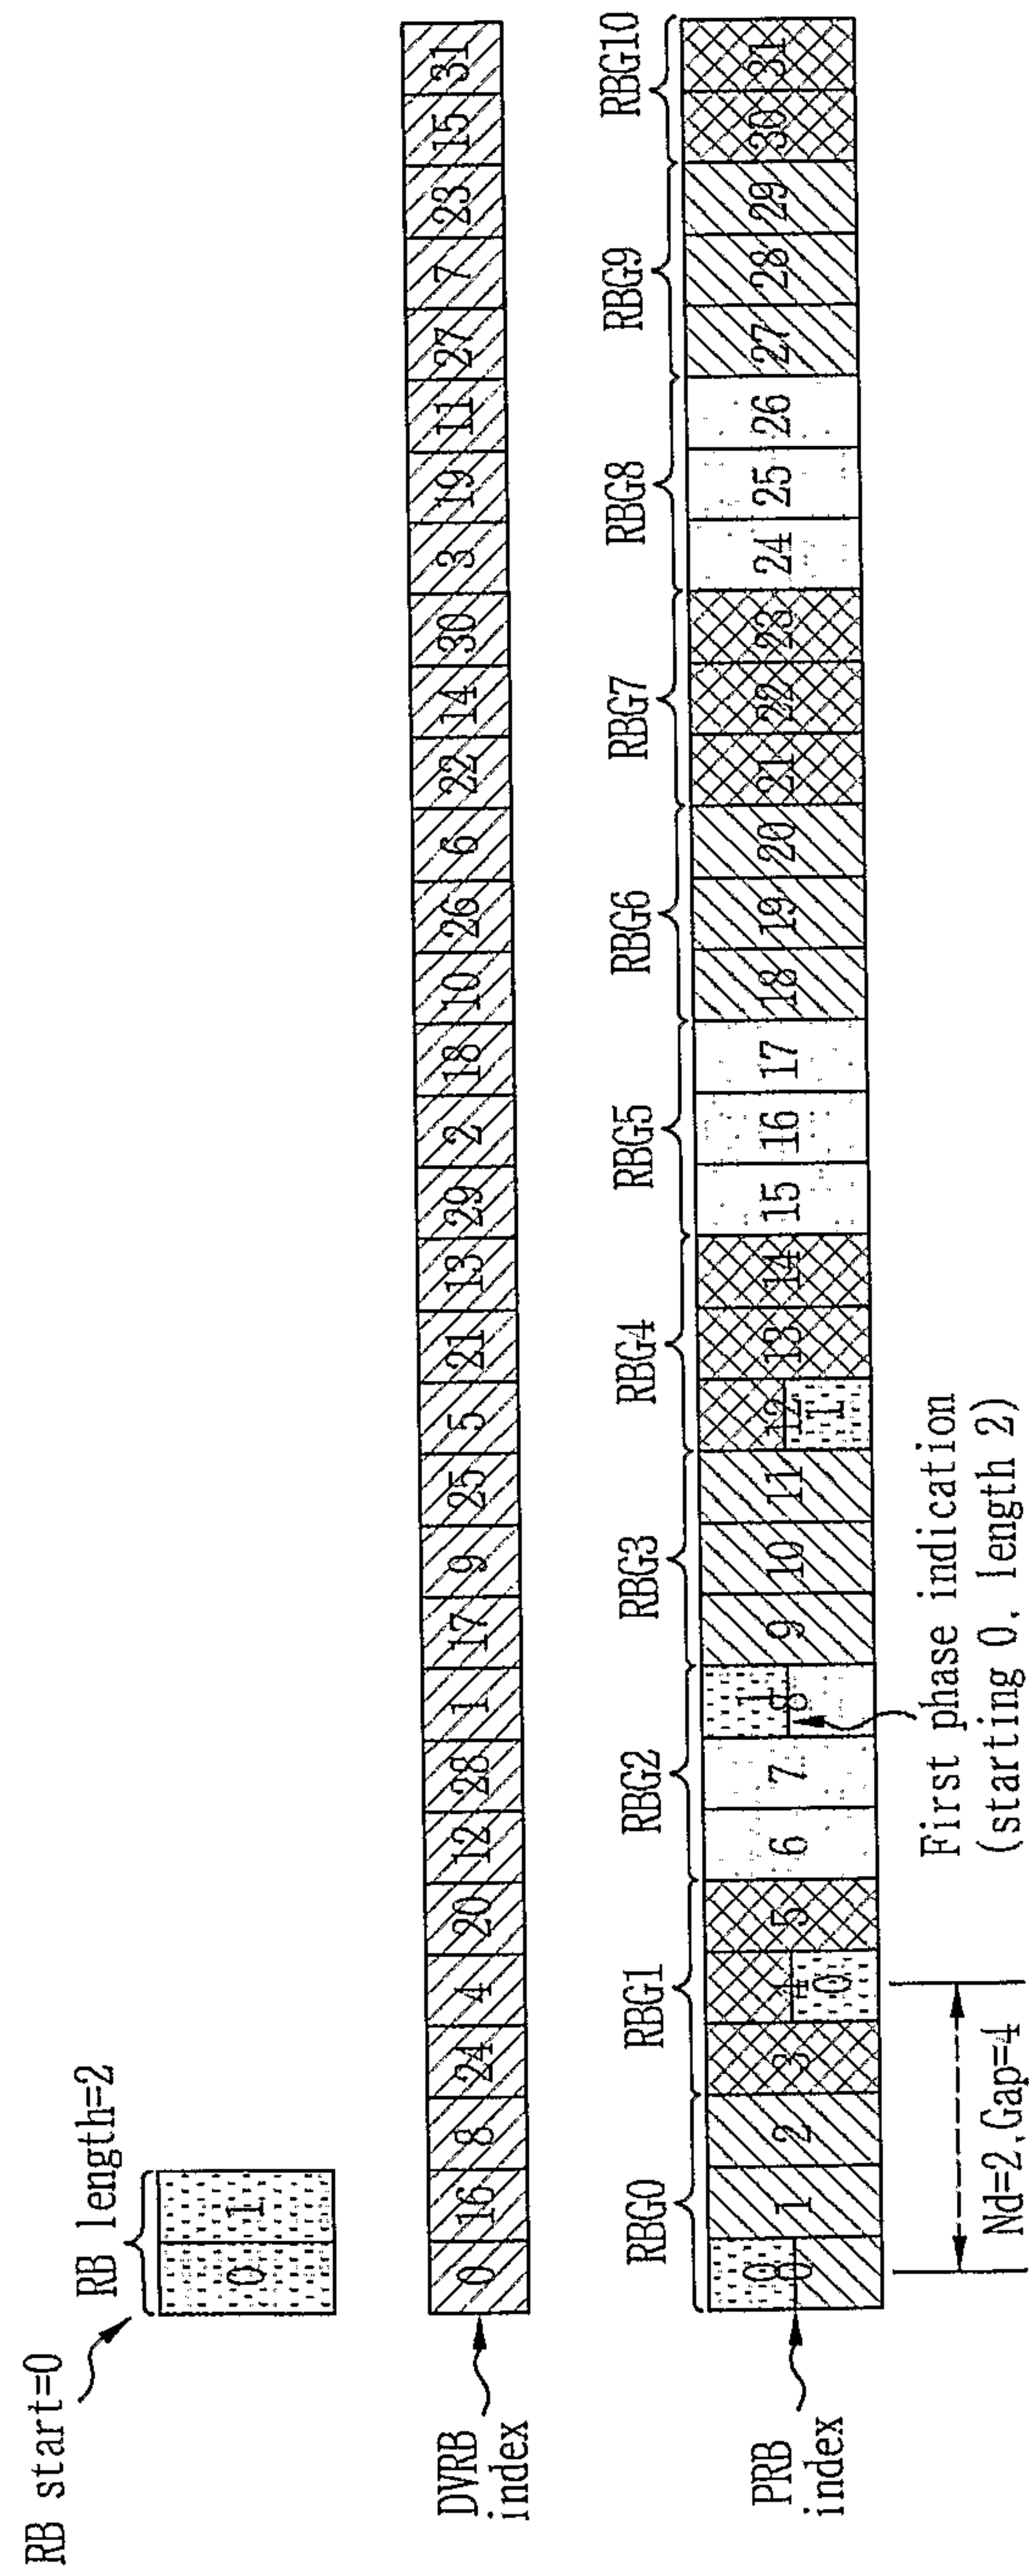


FIG. 17

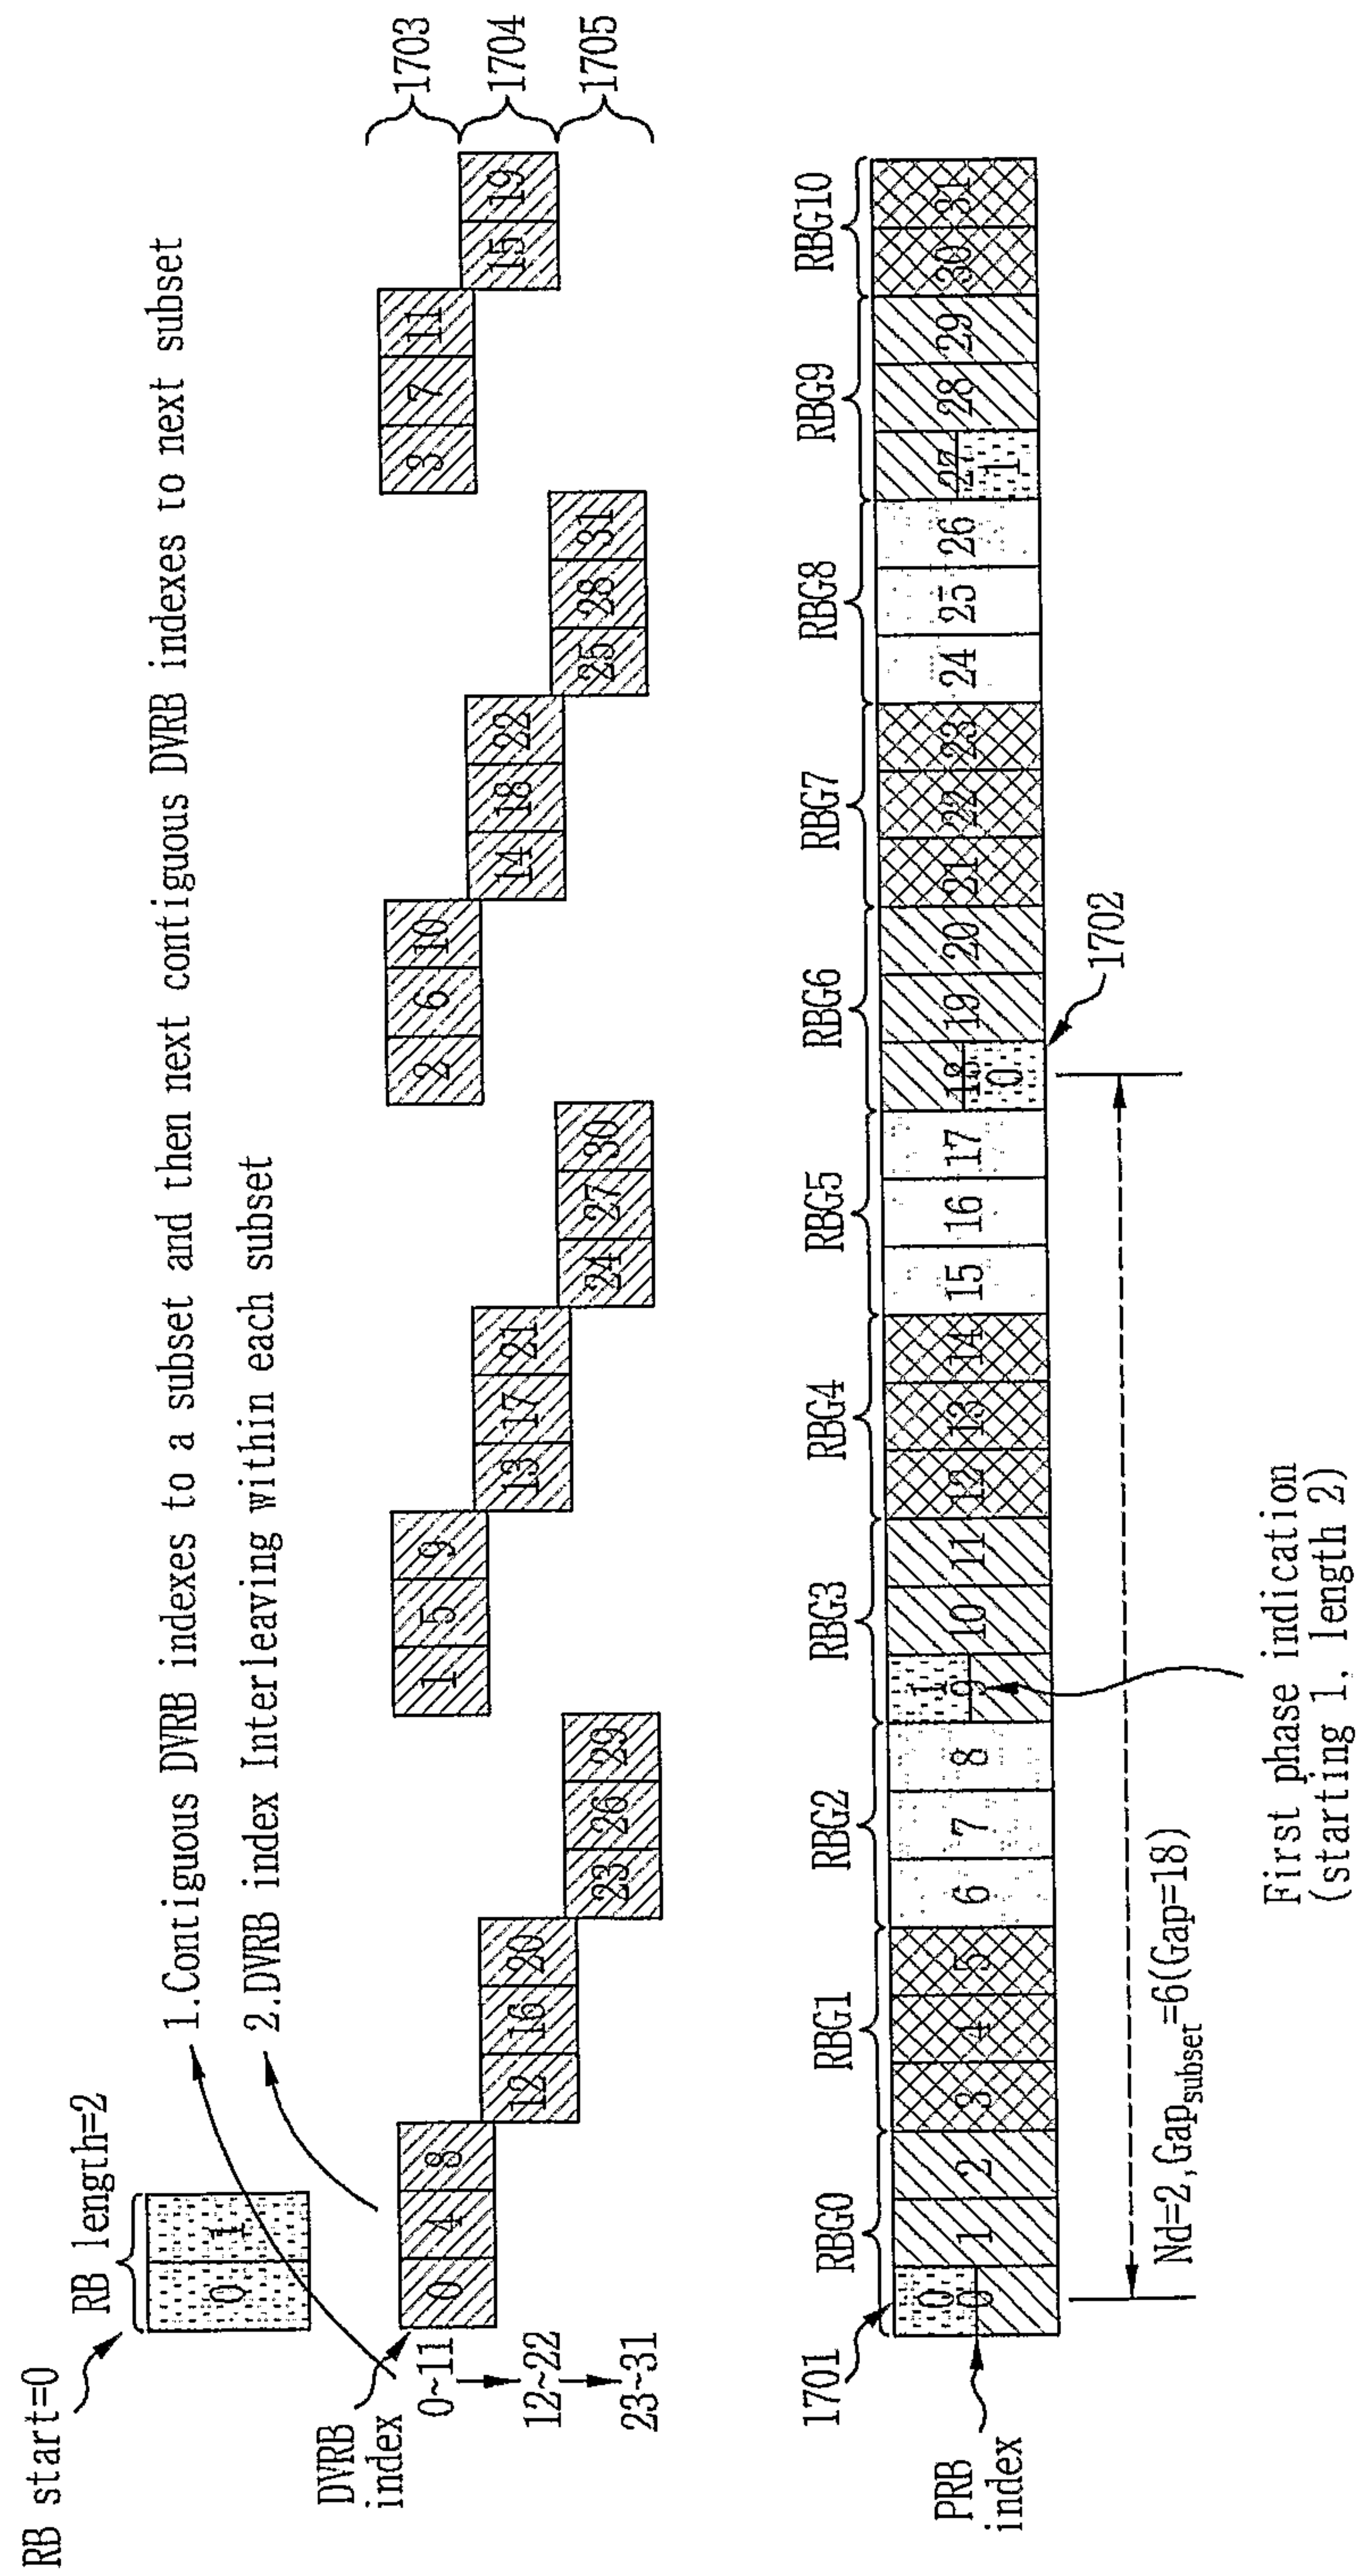


FIG. 18

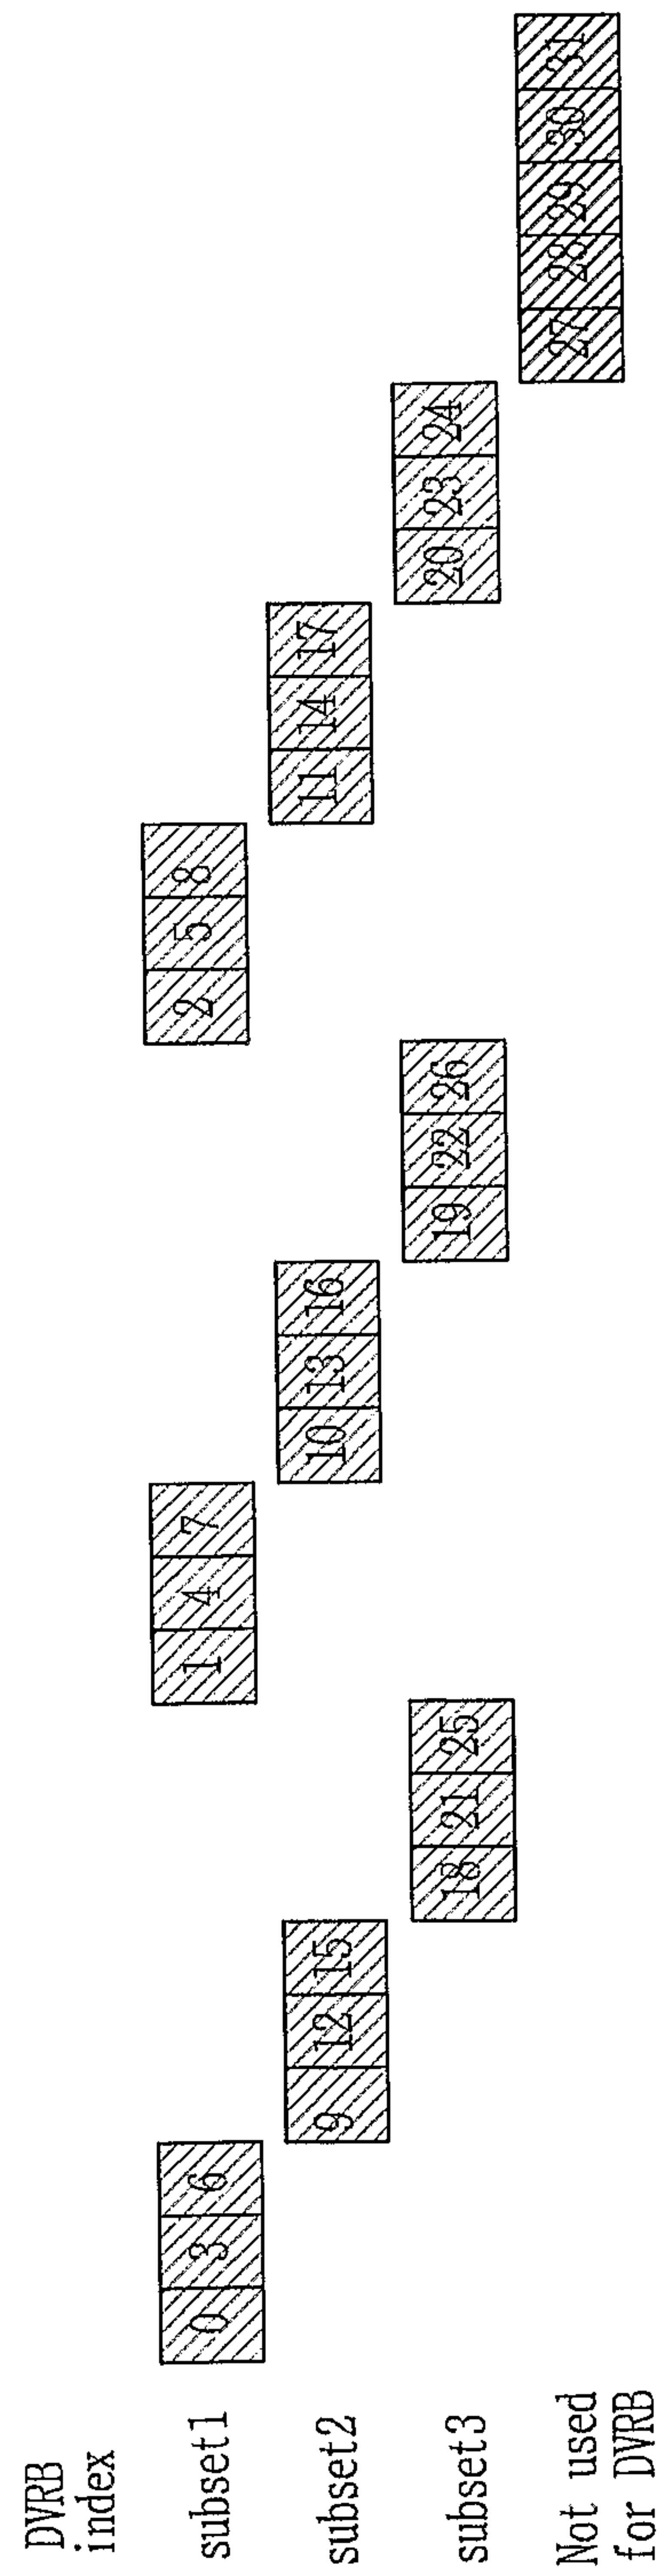


FIG. 19

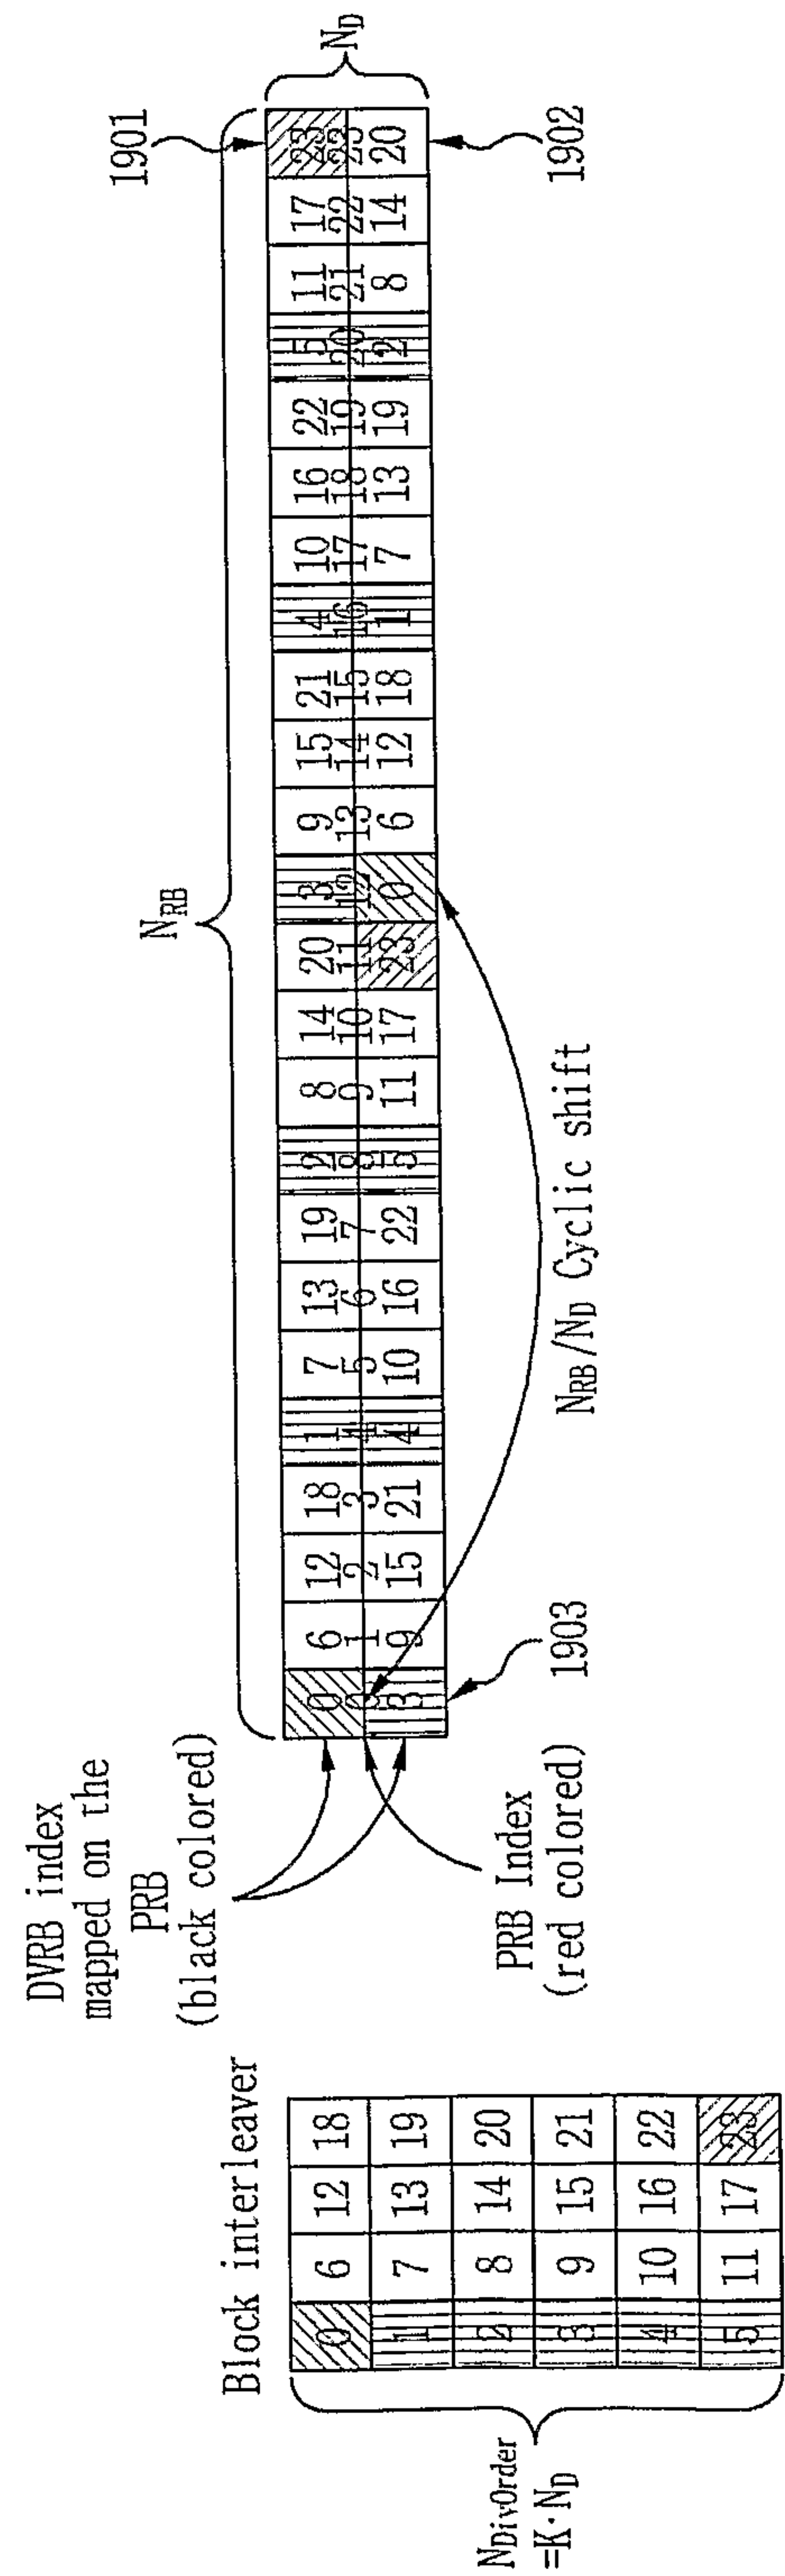


FIG. 20

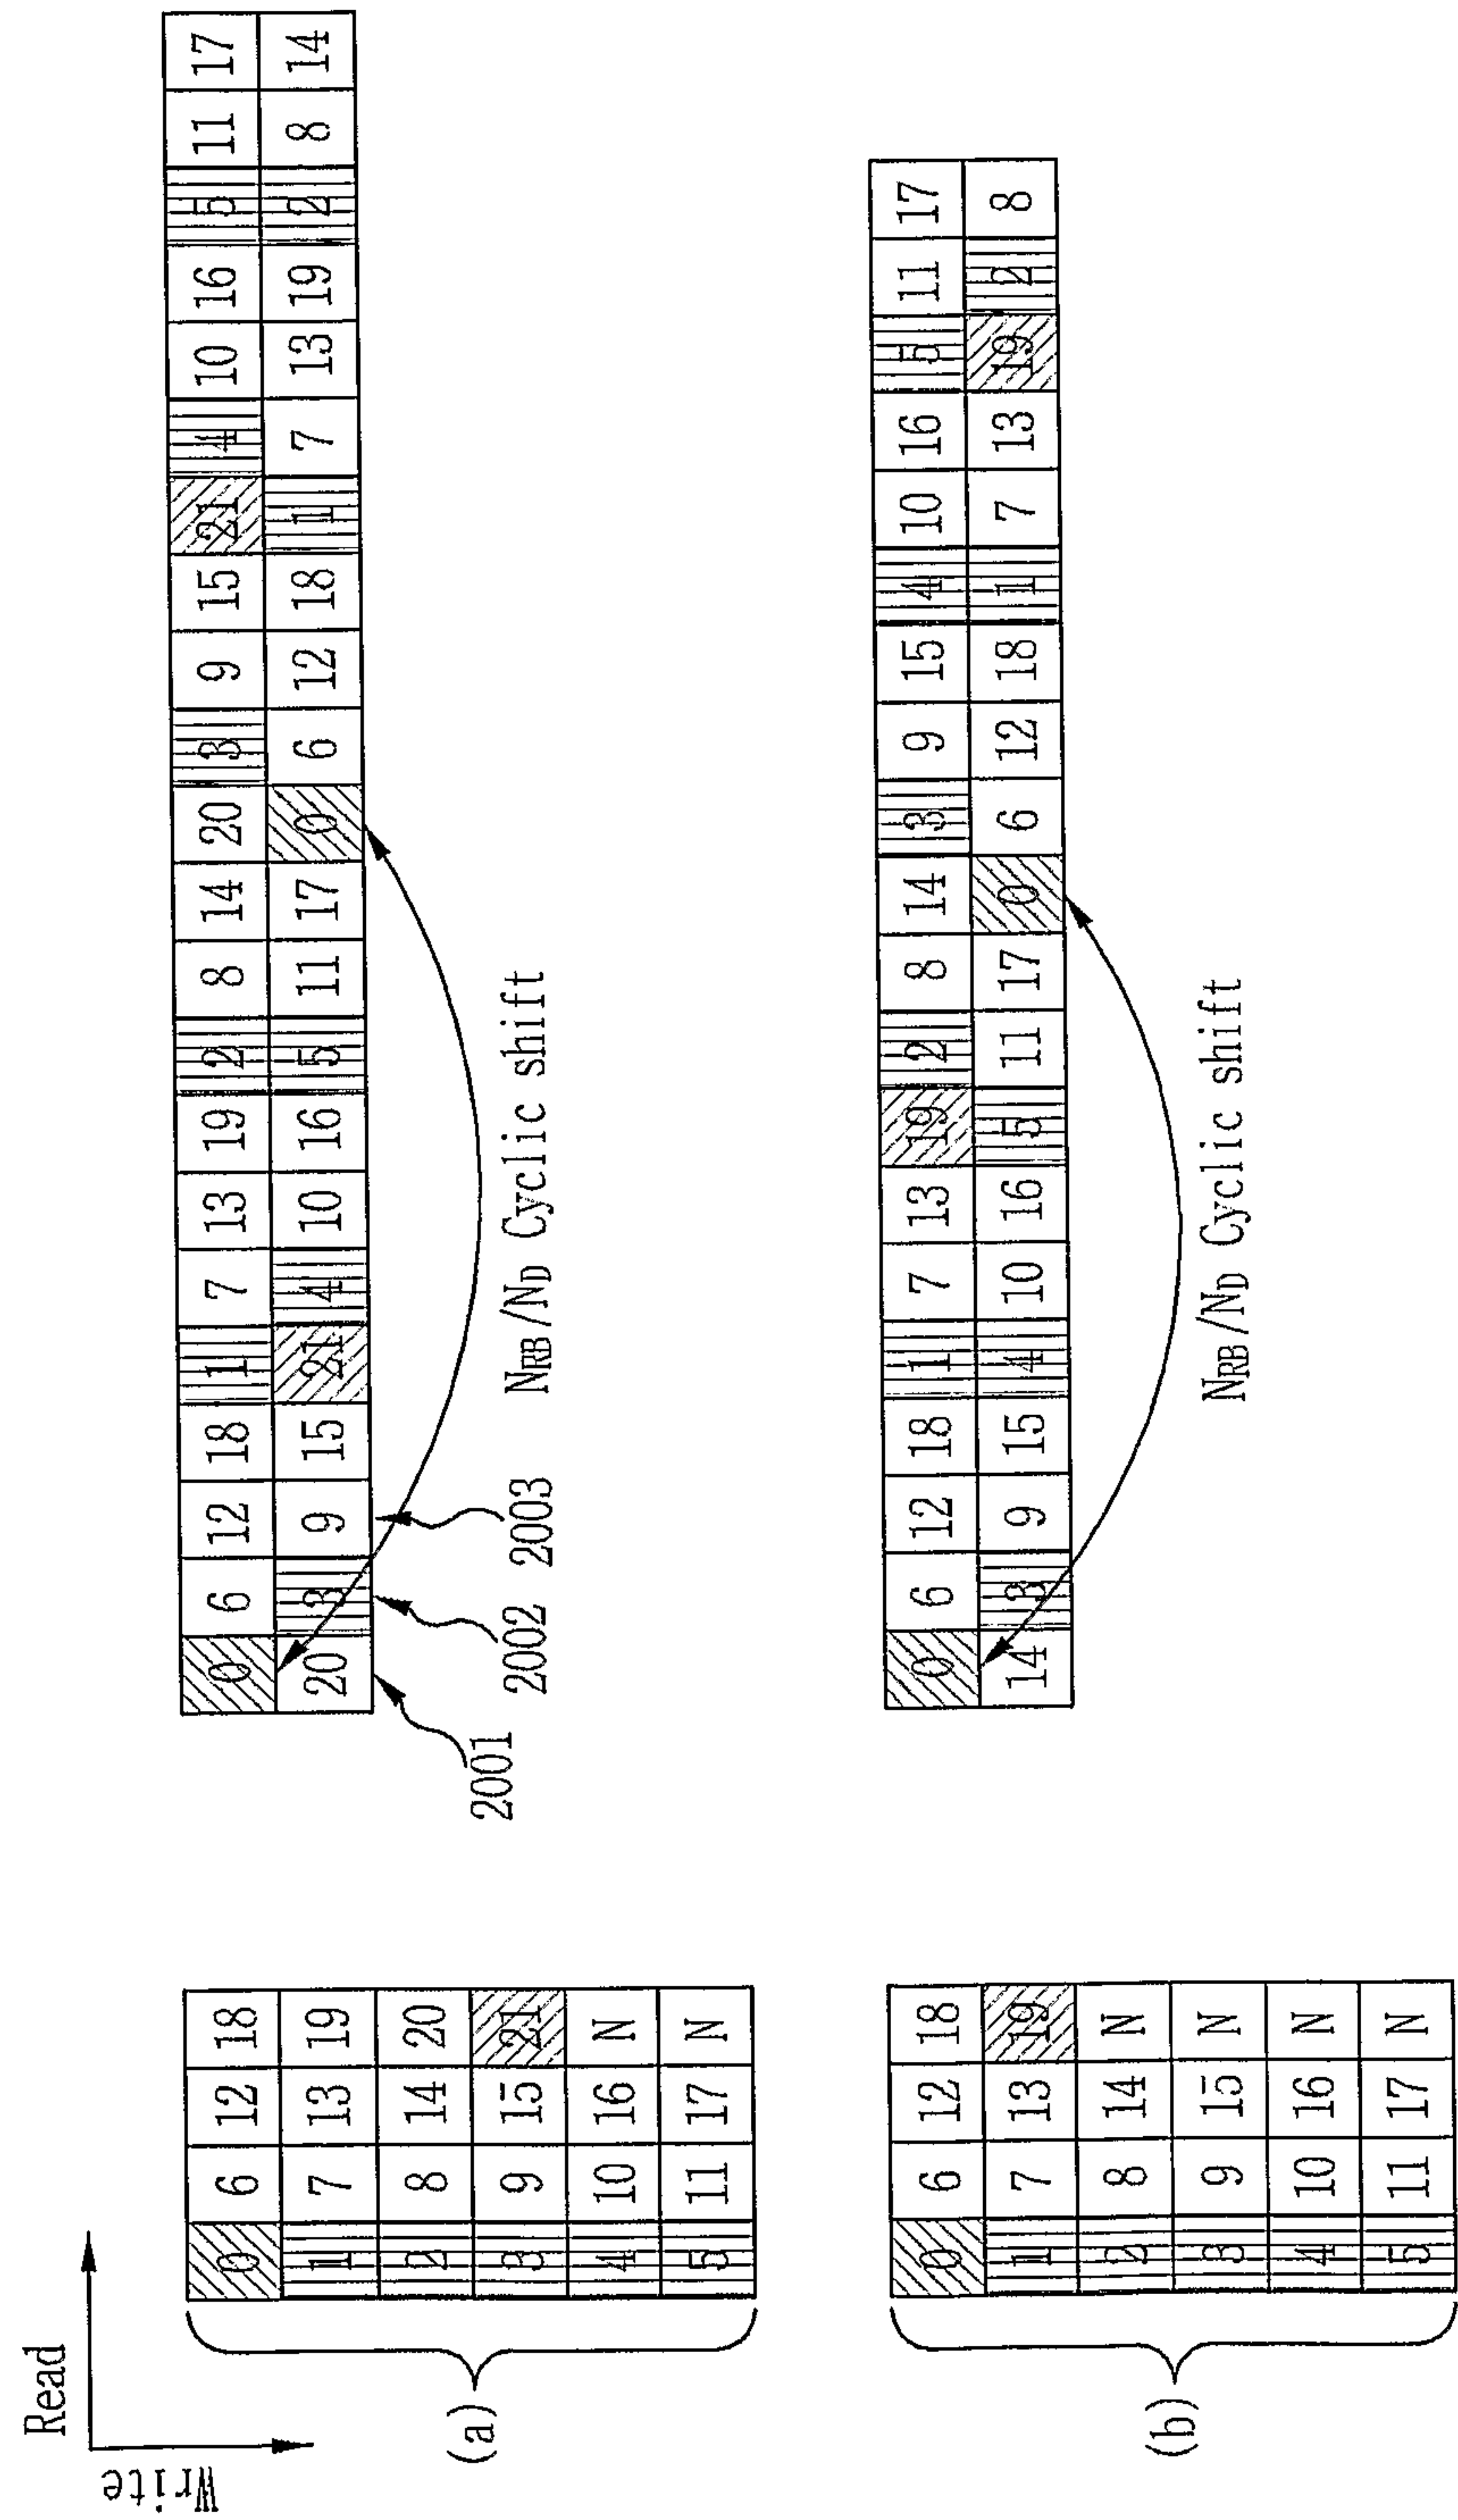


FIG. 21

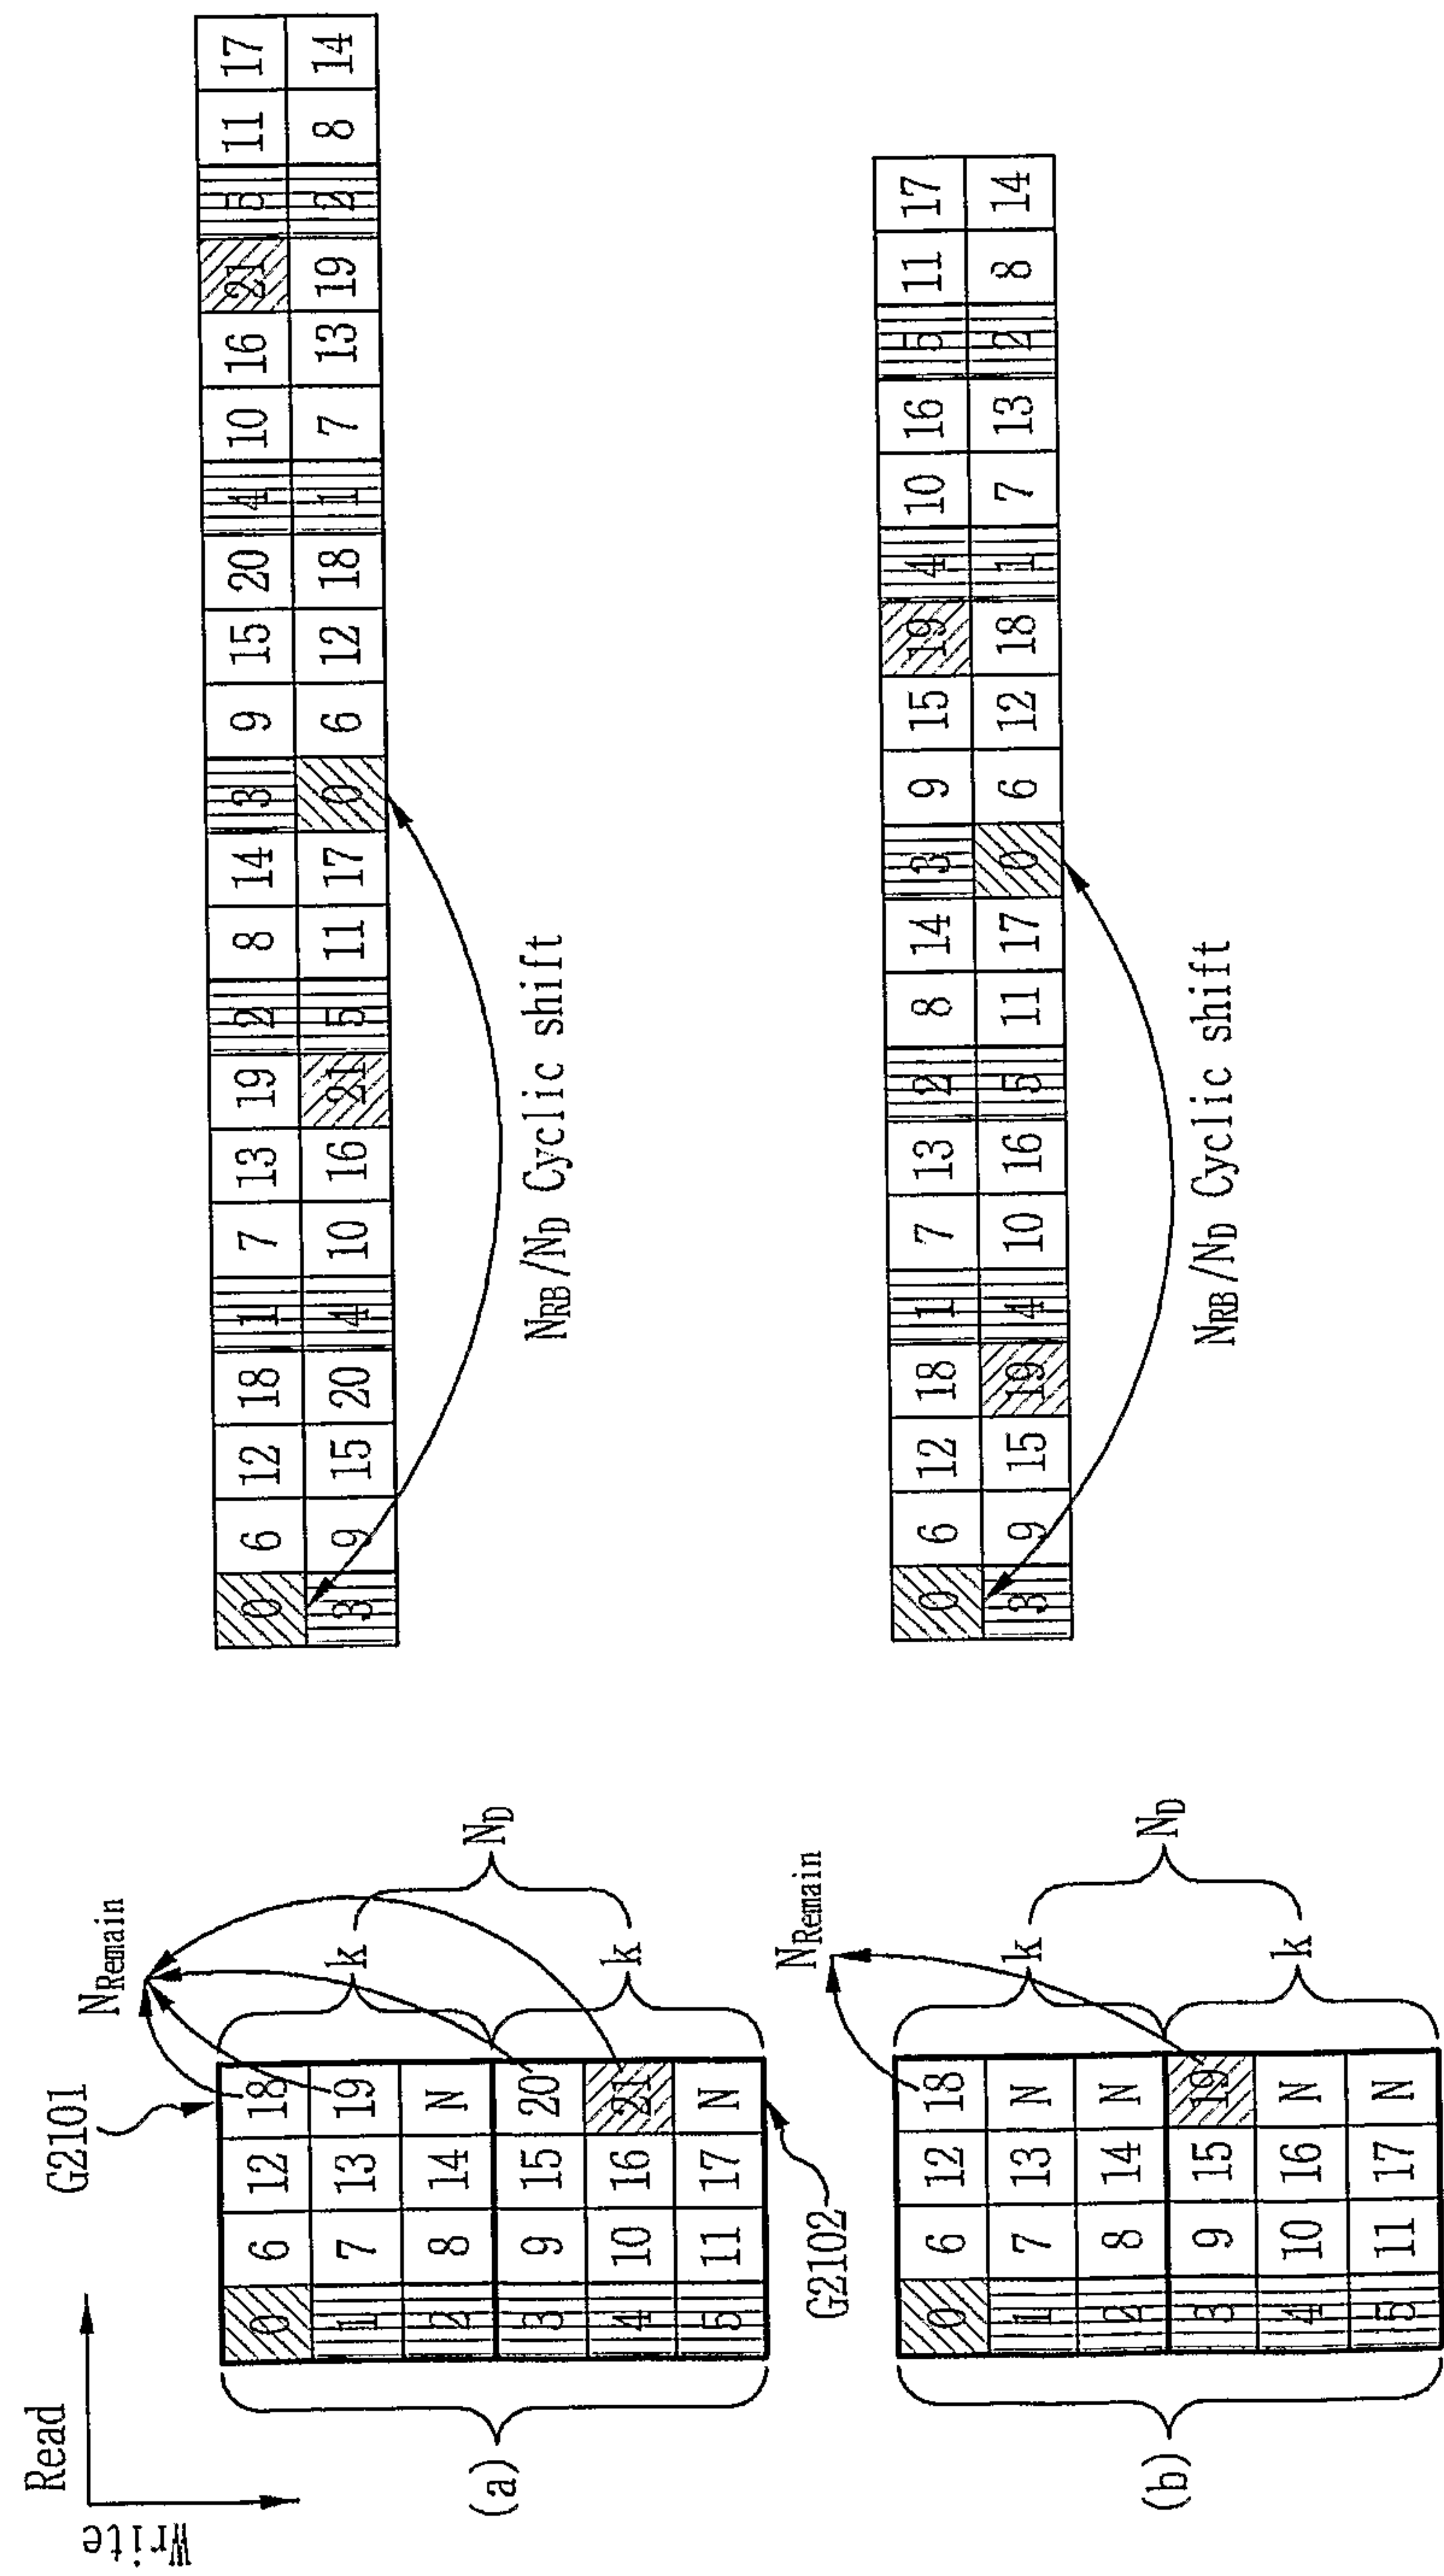


FIG. 22

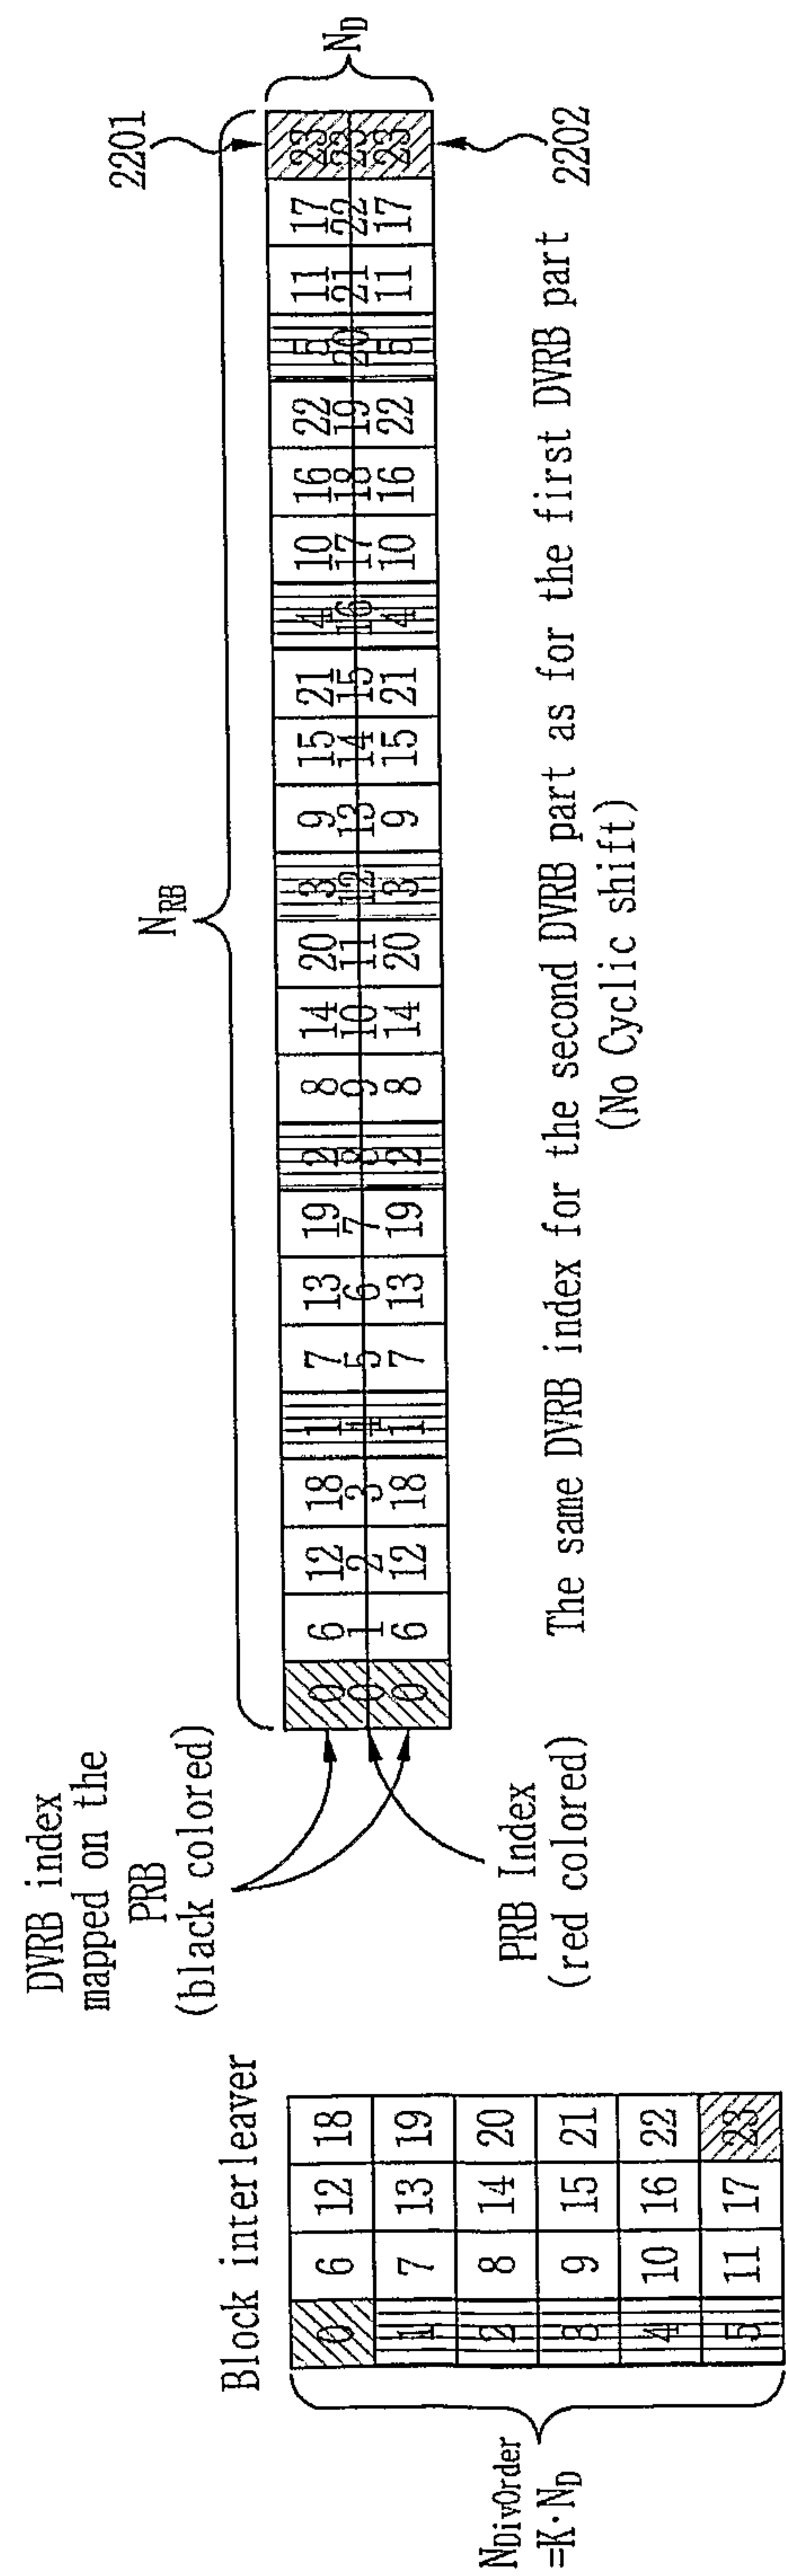


FIG. 23

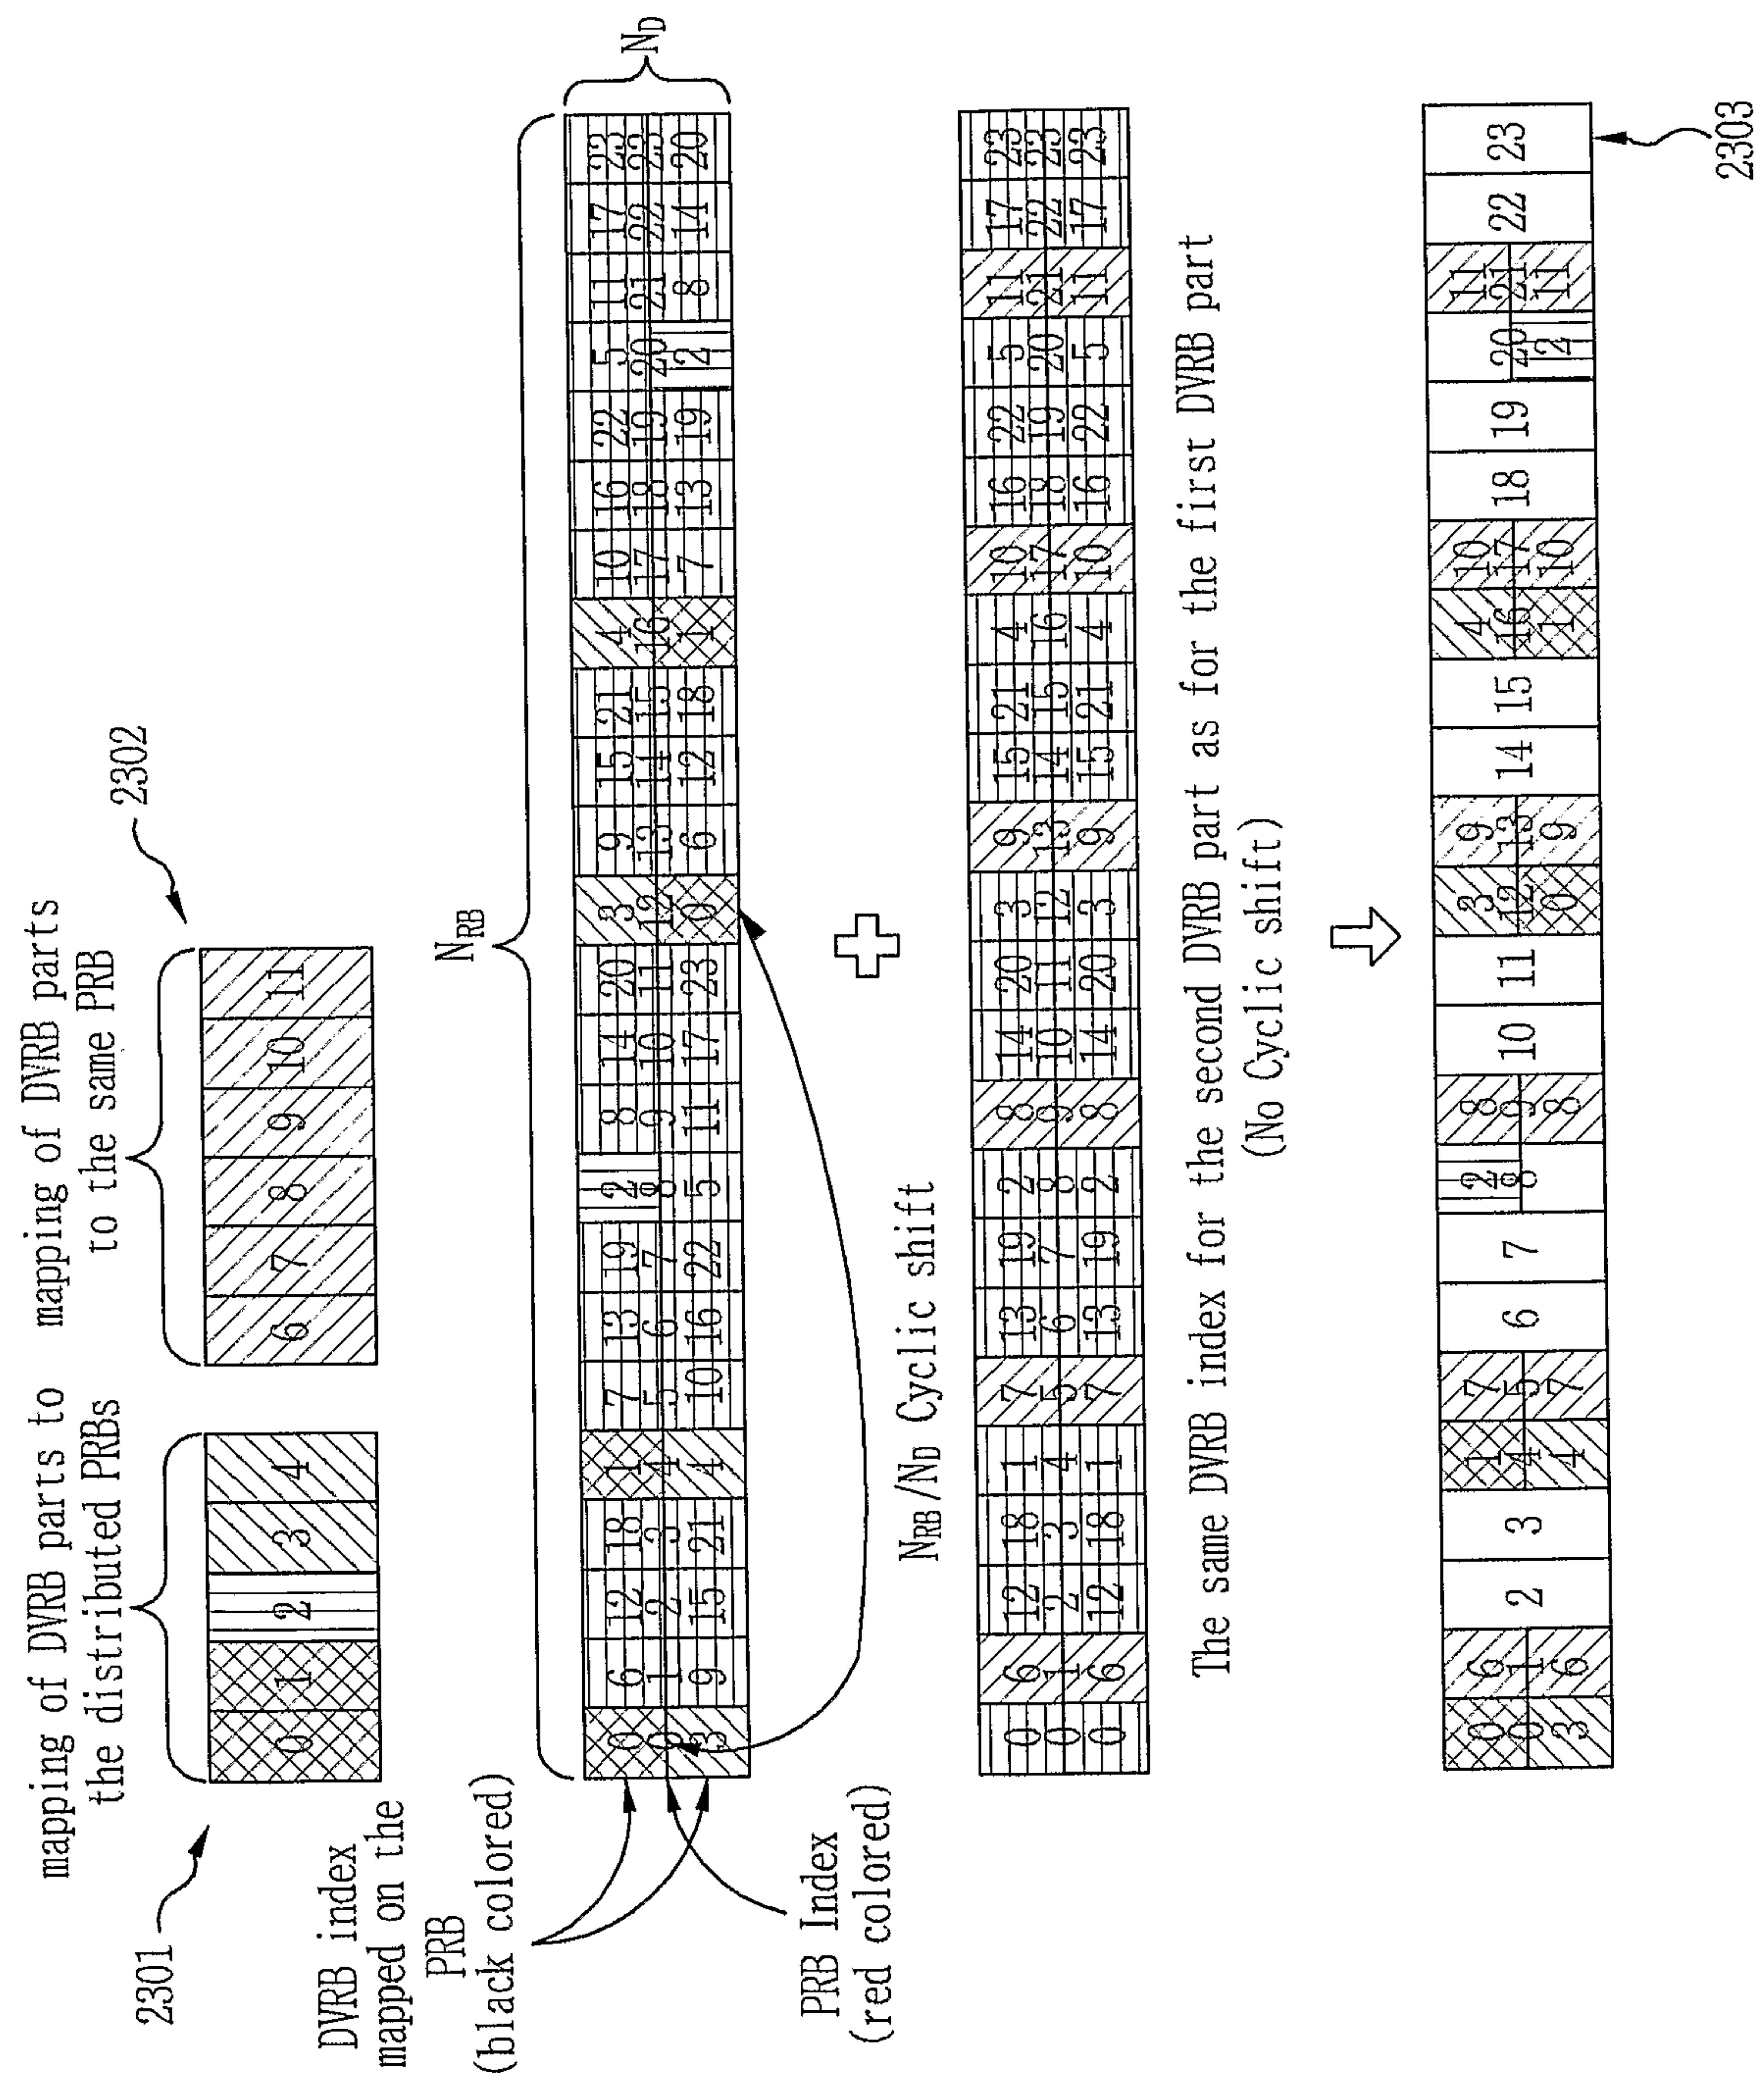


FIG. 24

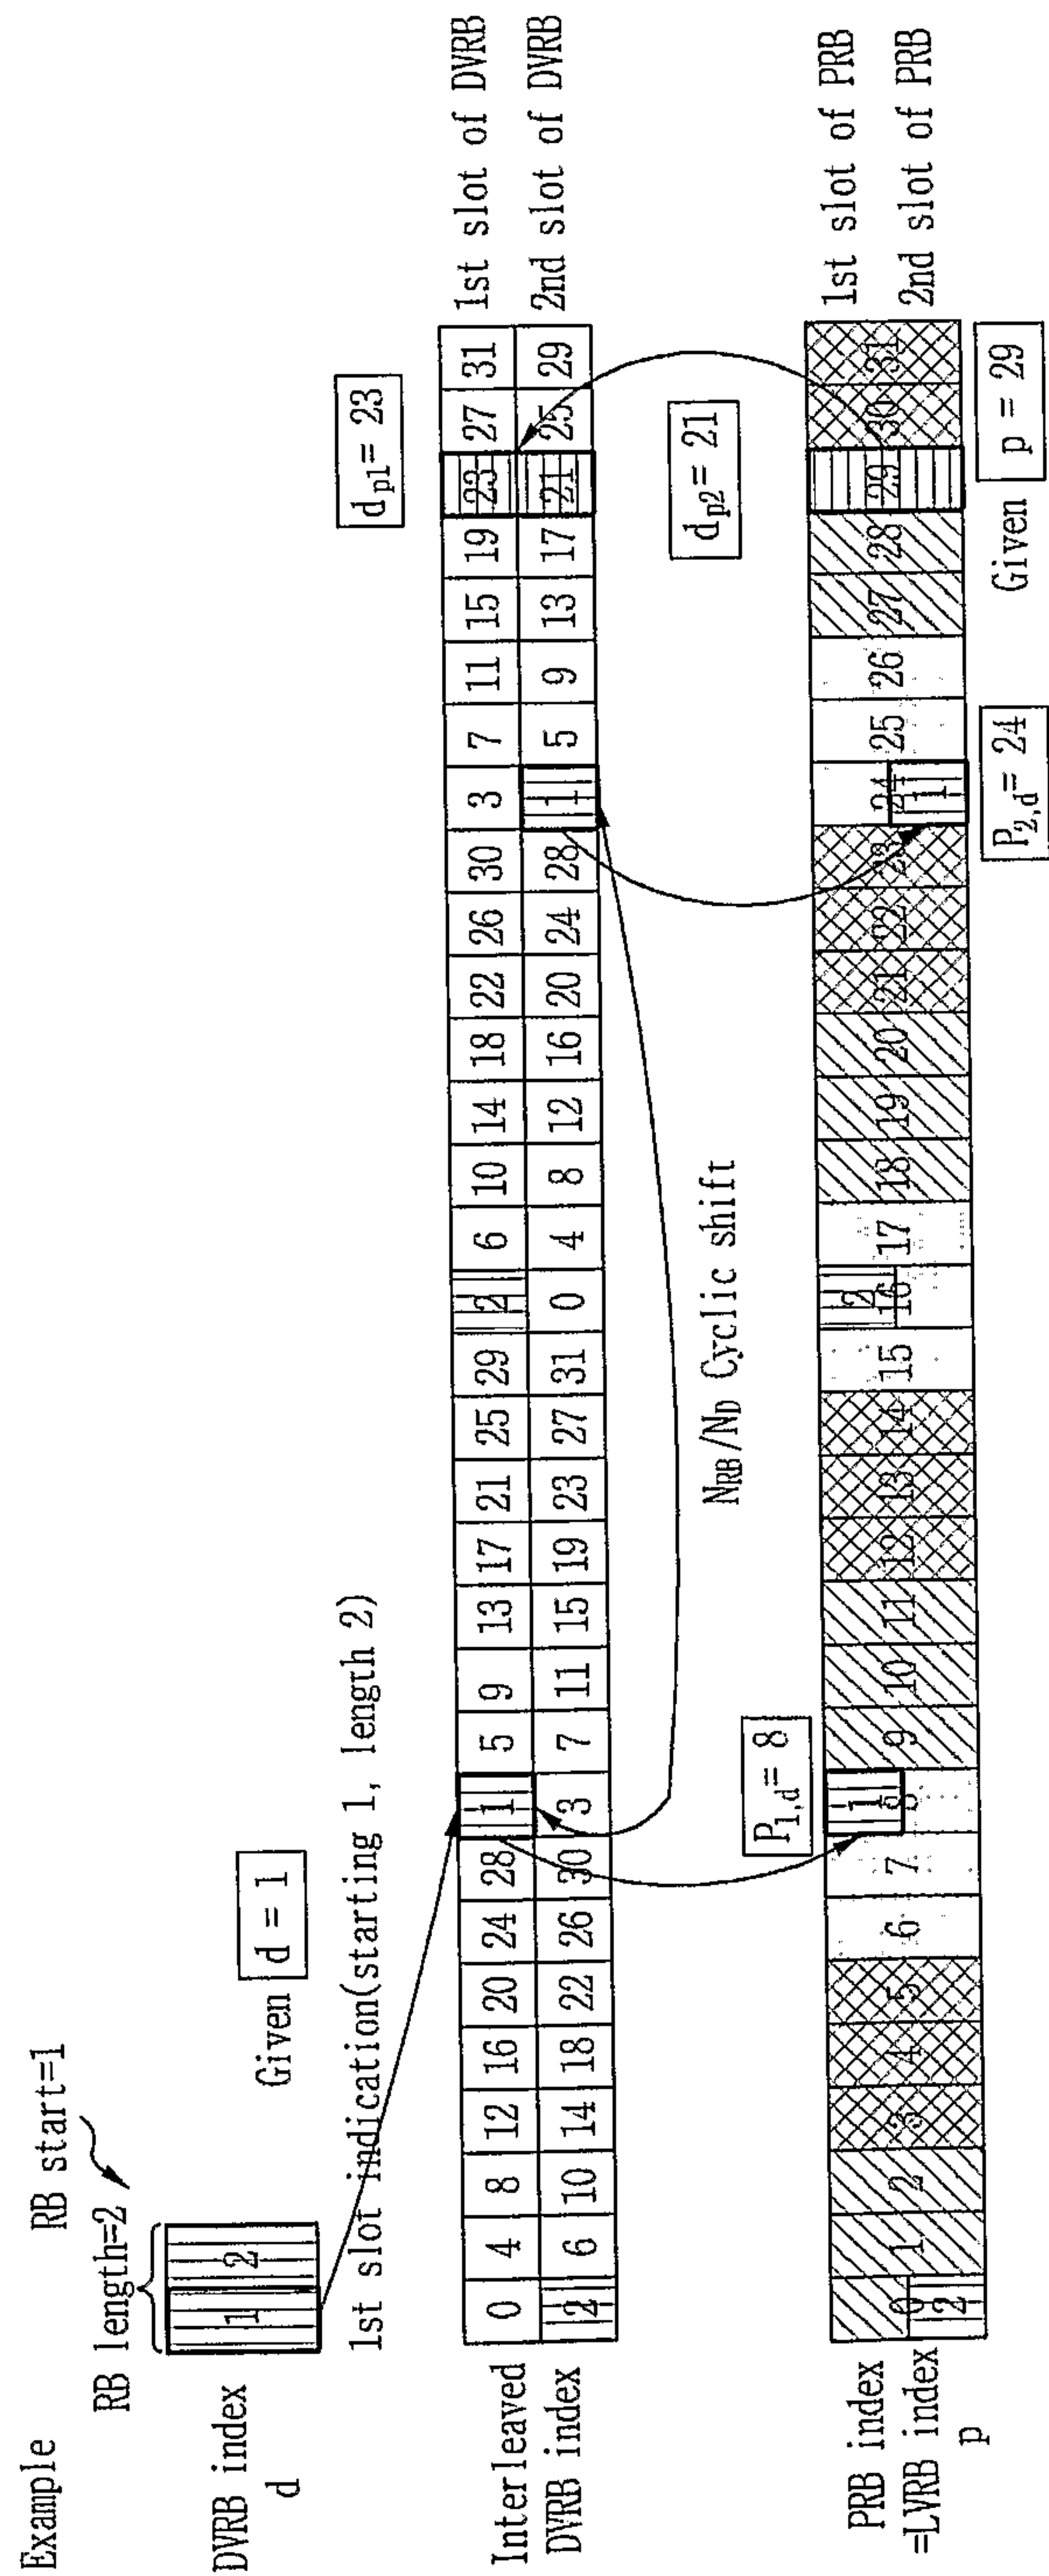


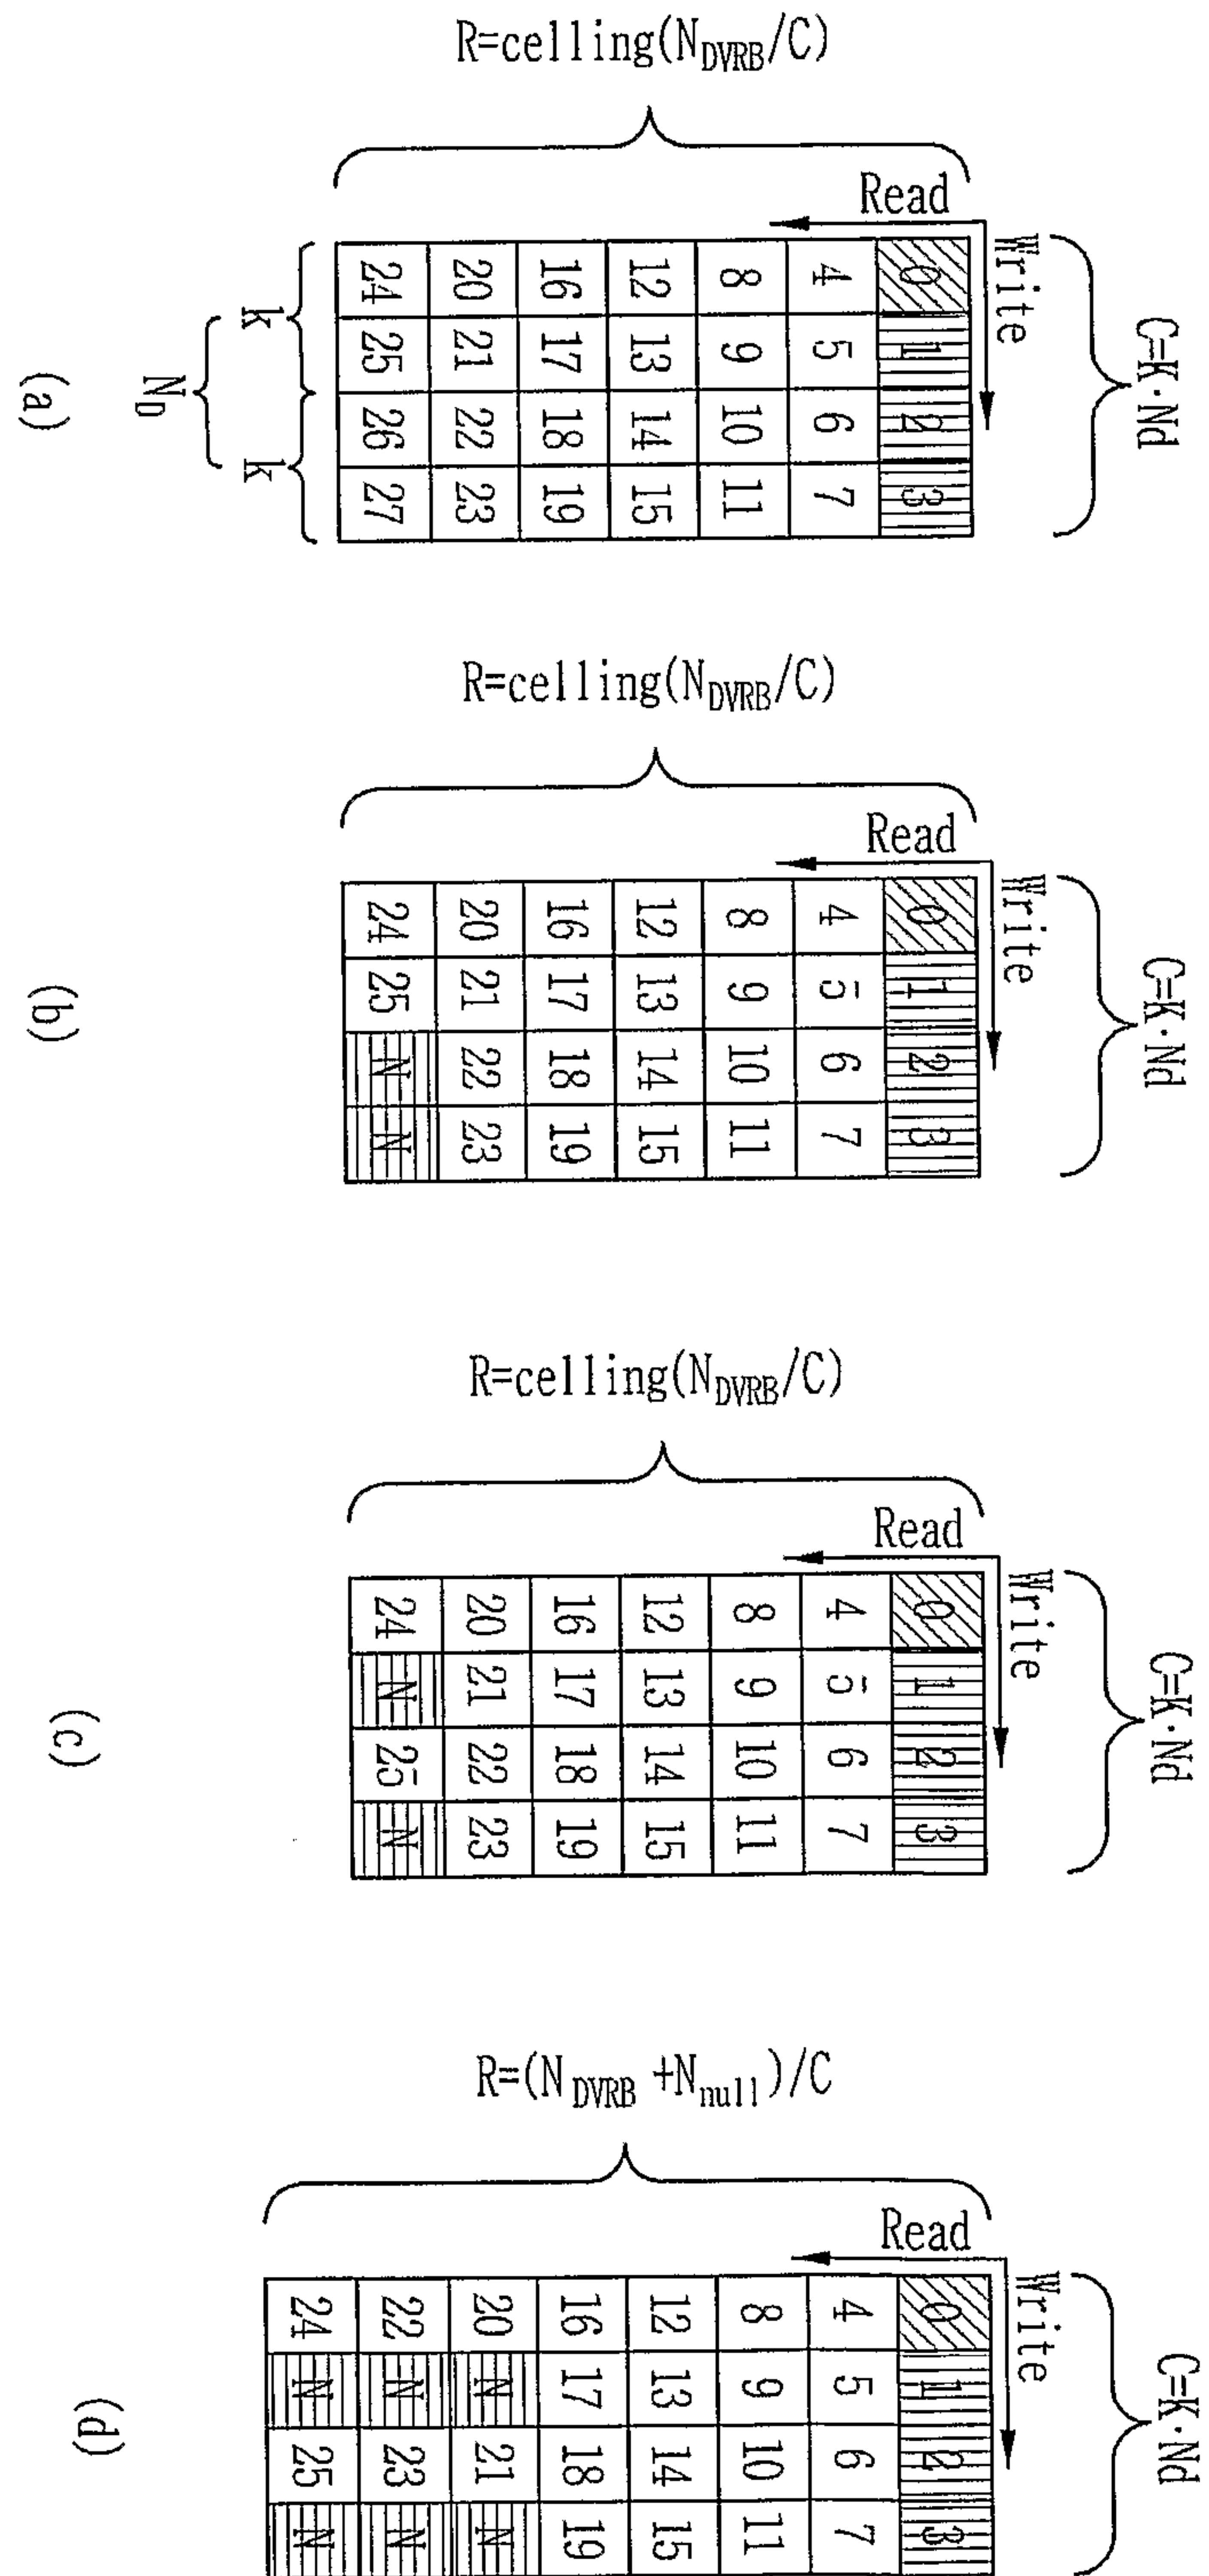
FIG. 25

FIG. 26

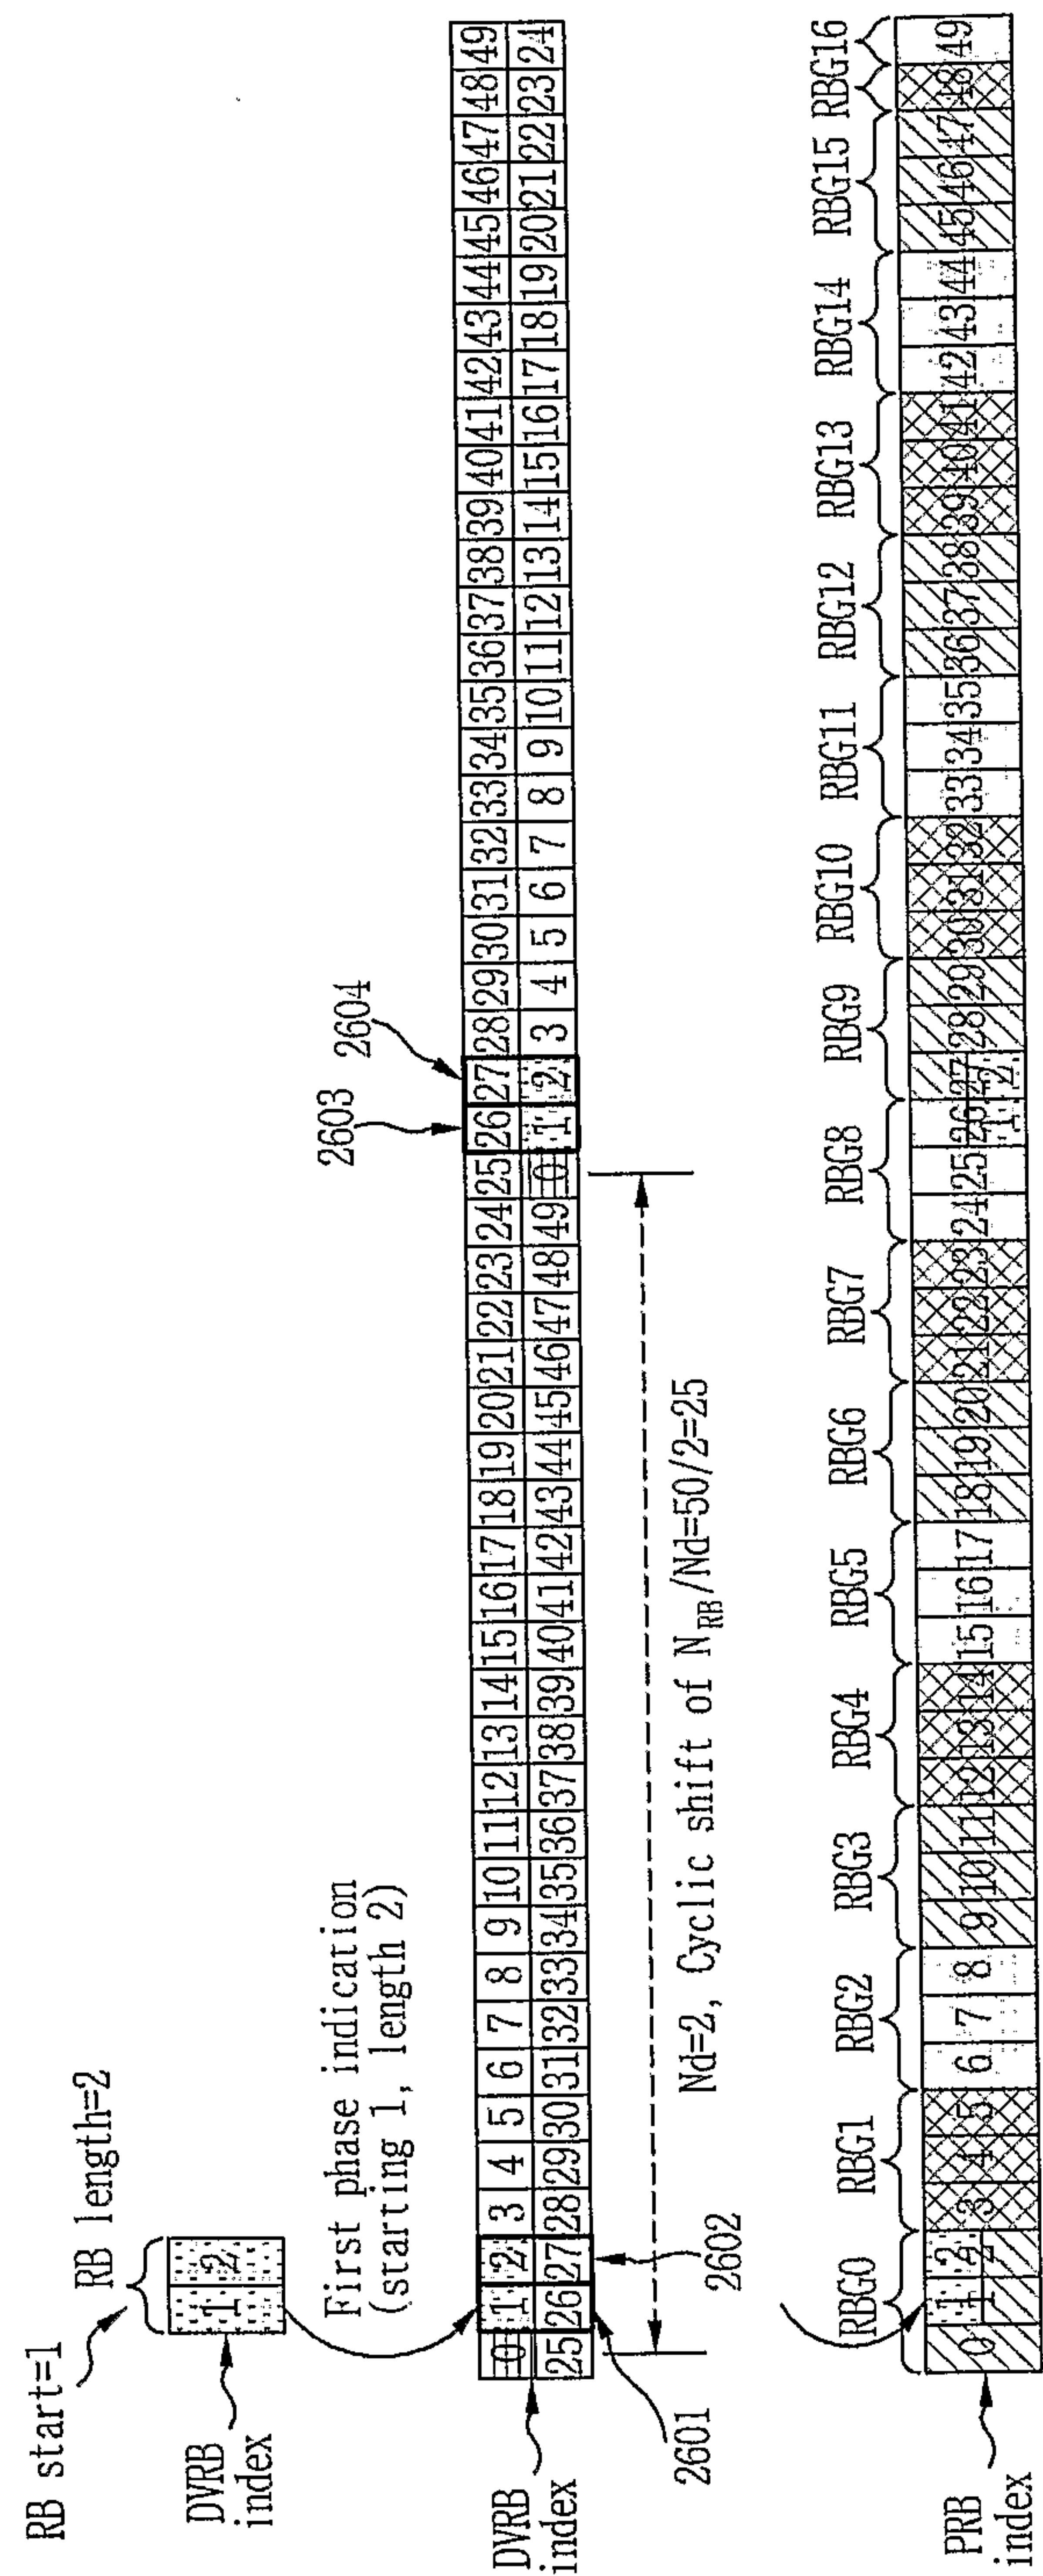


FIG. 27

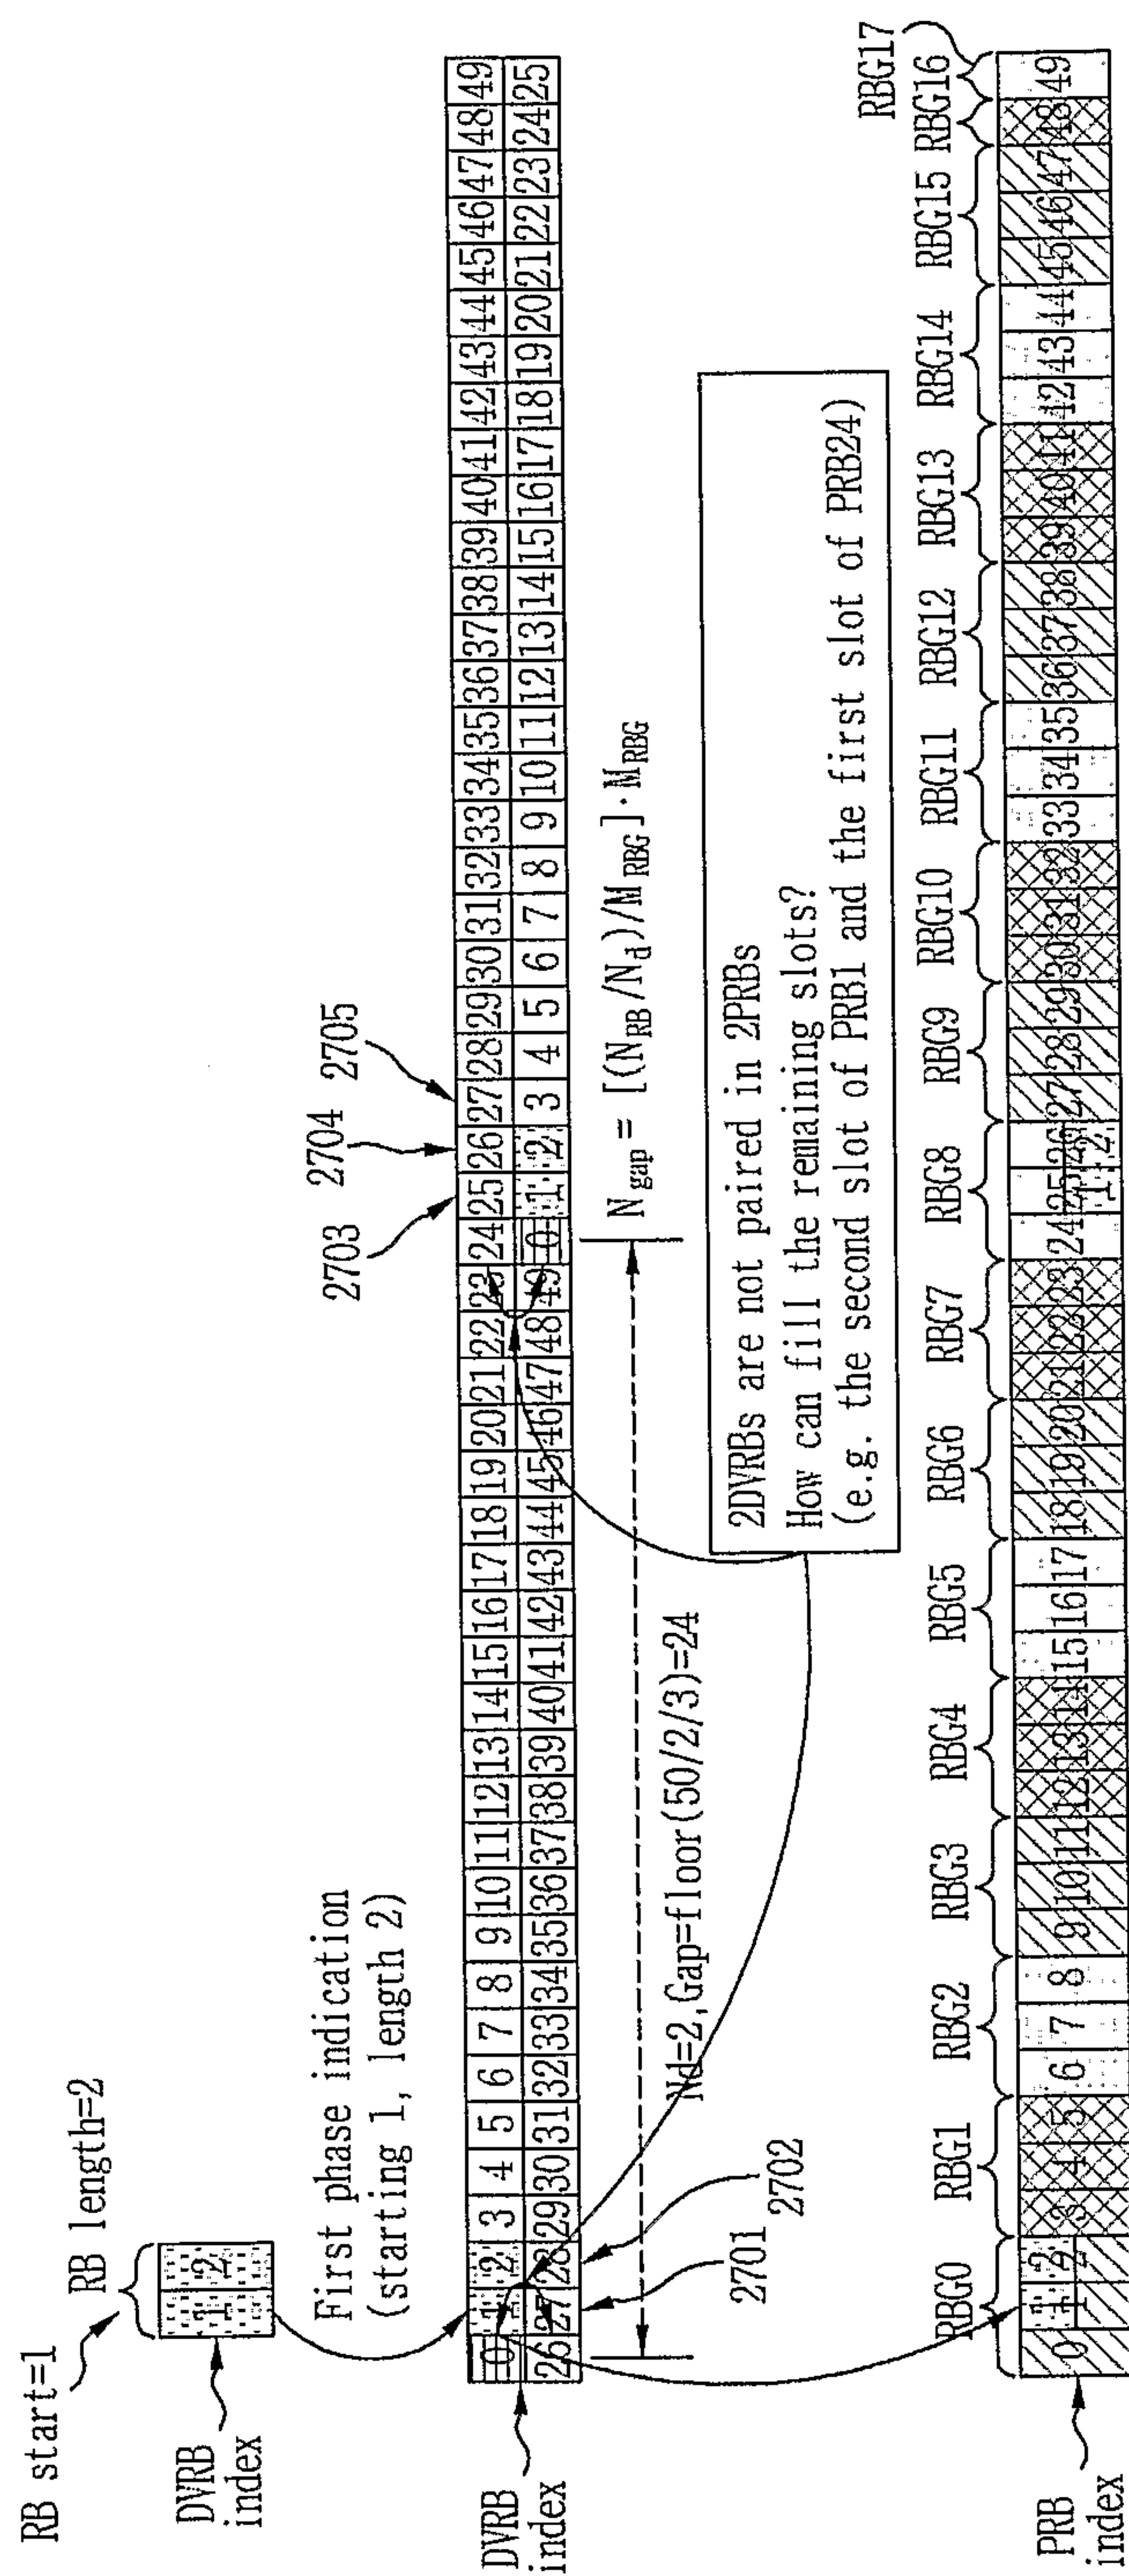


FIG. 28

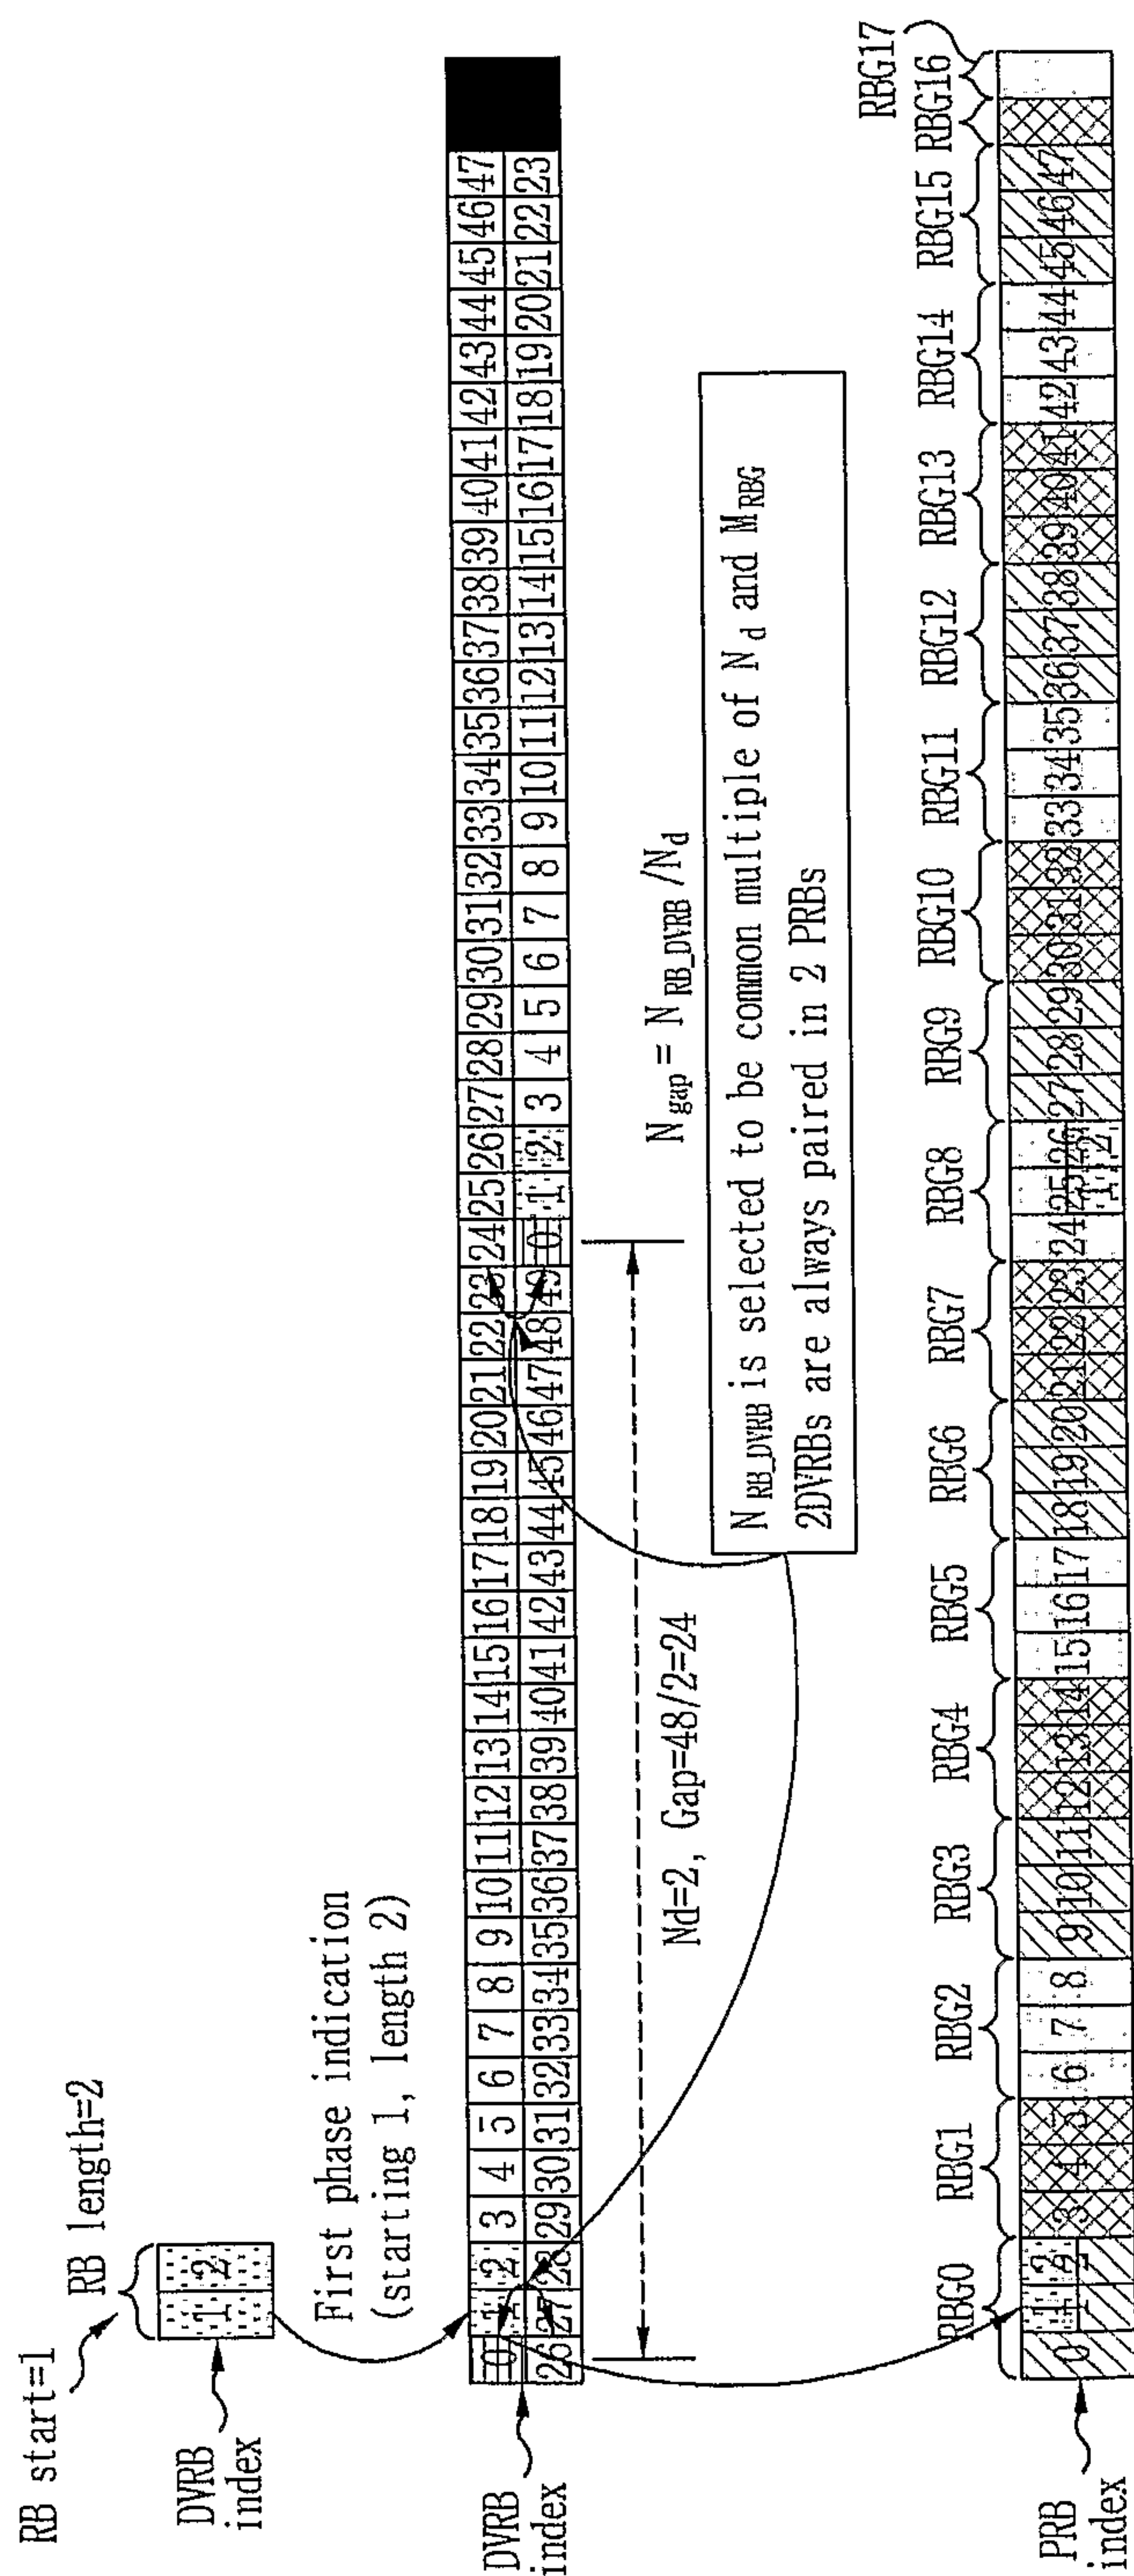


FIG. 29

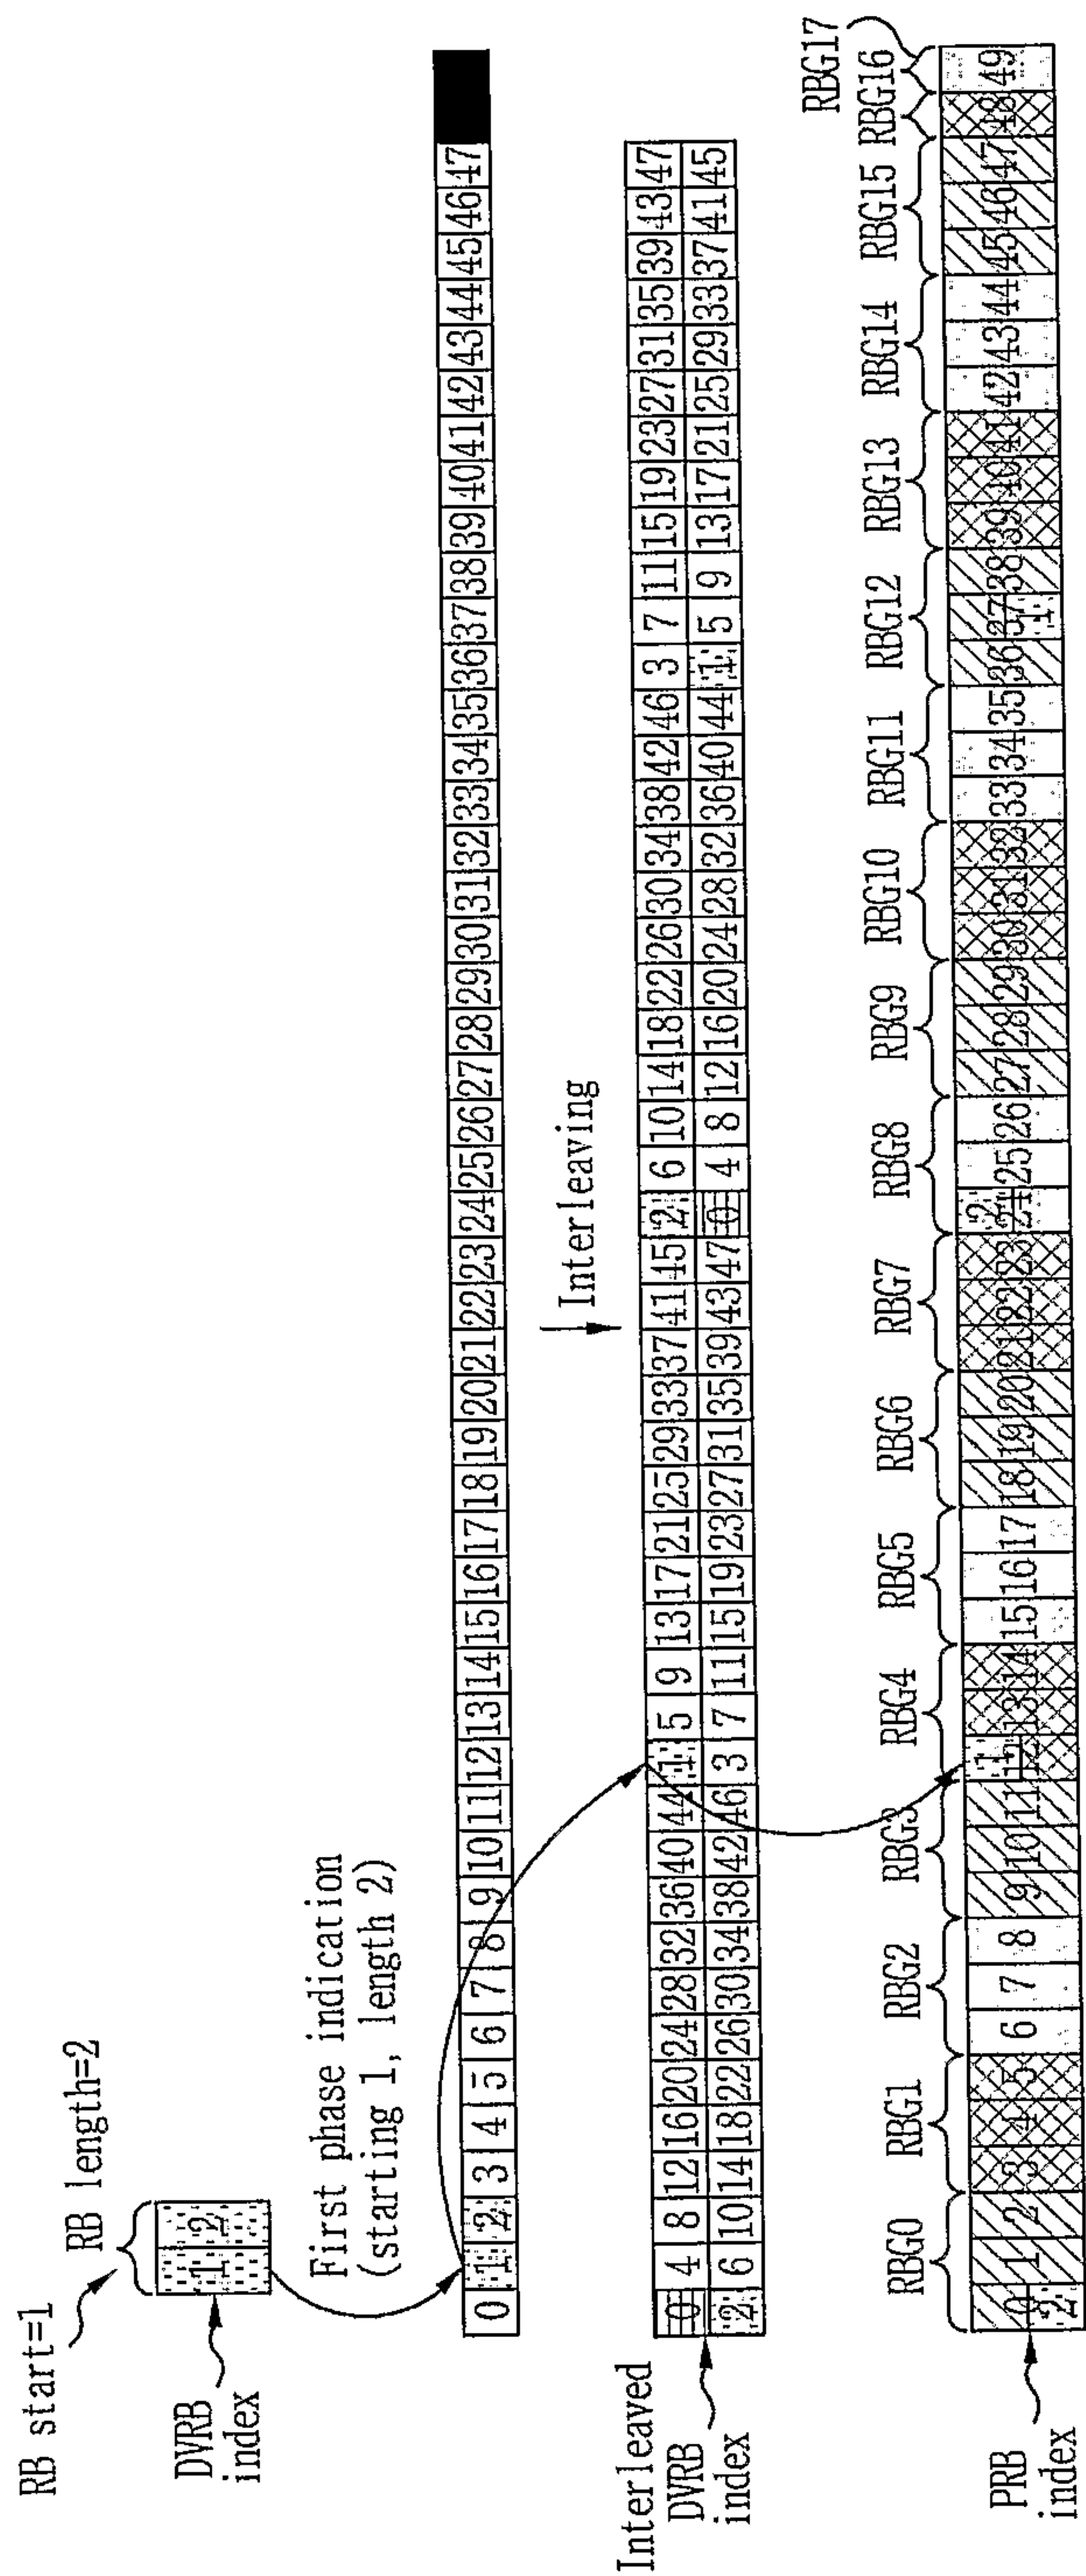


FIG. 30

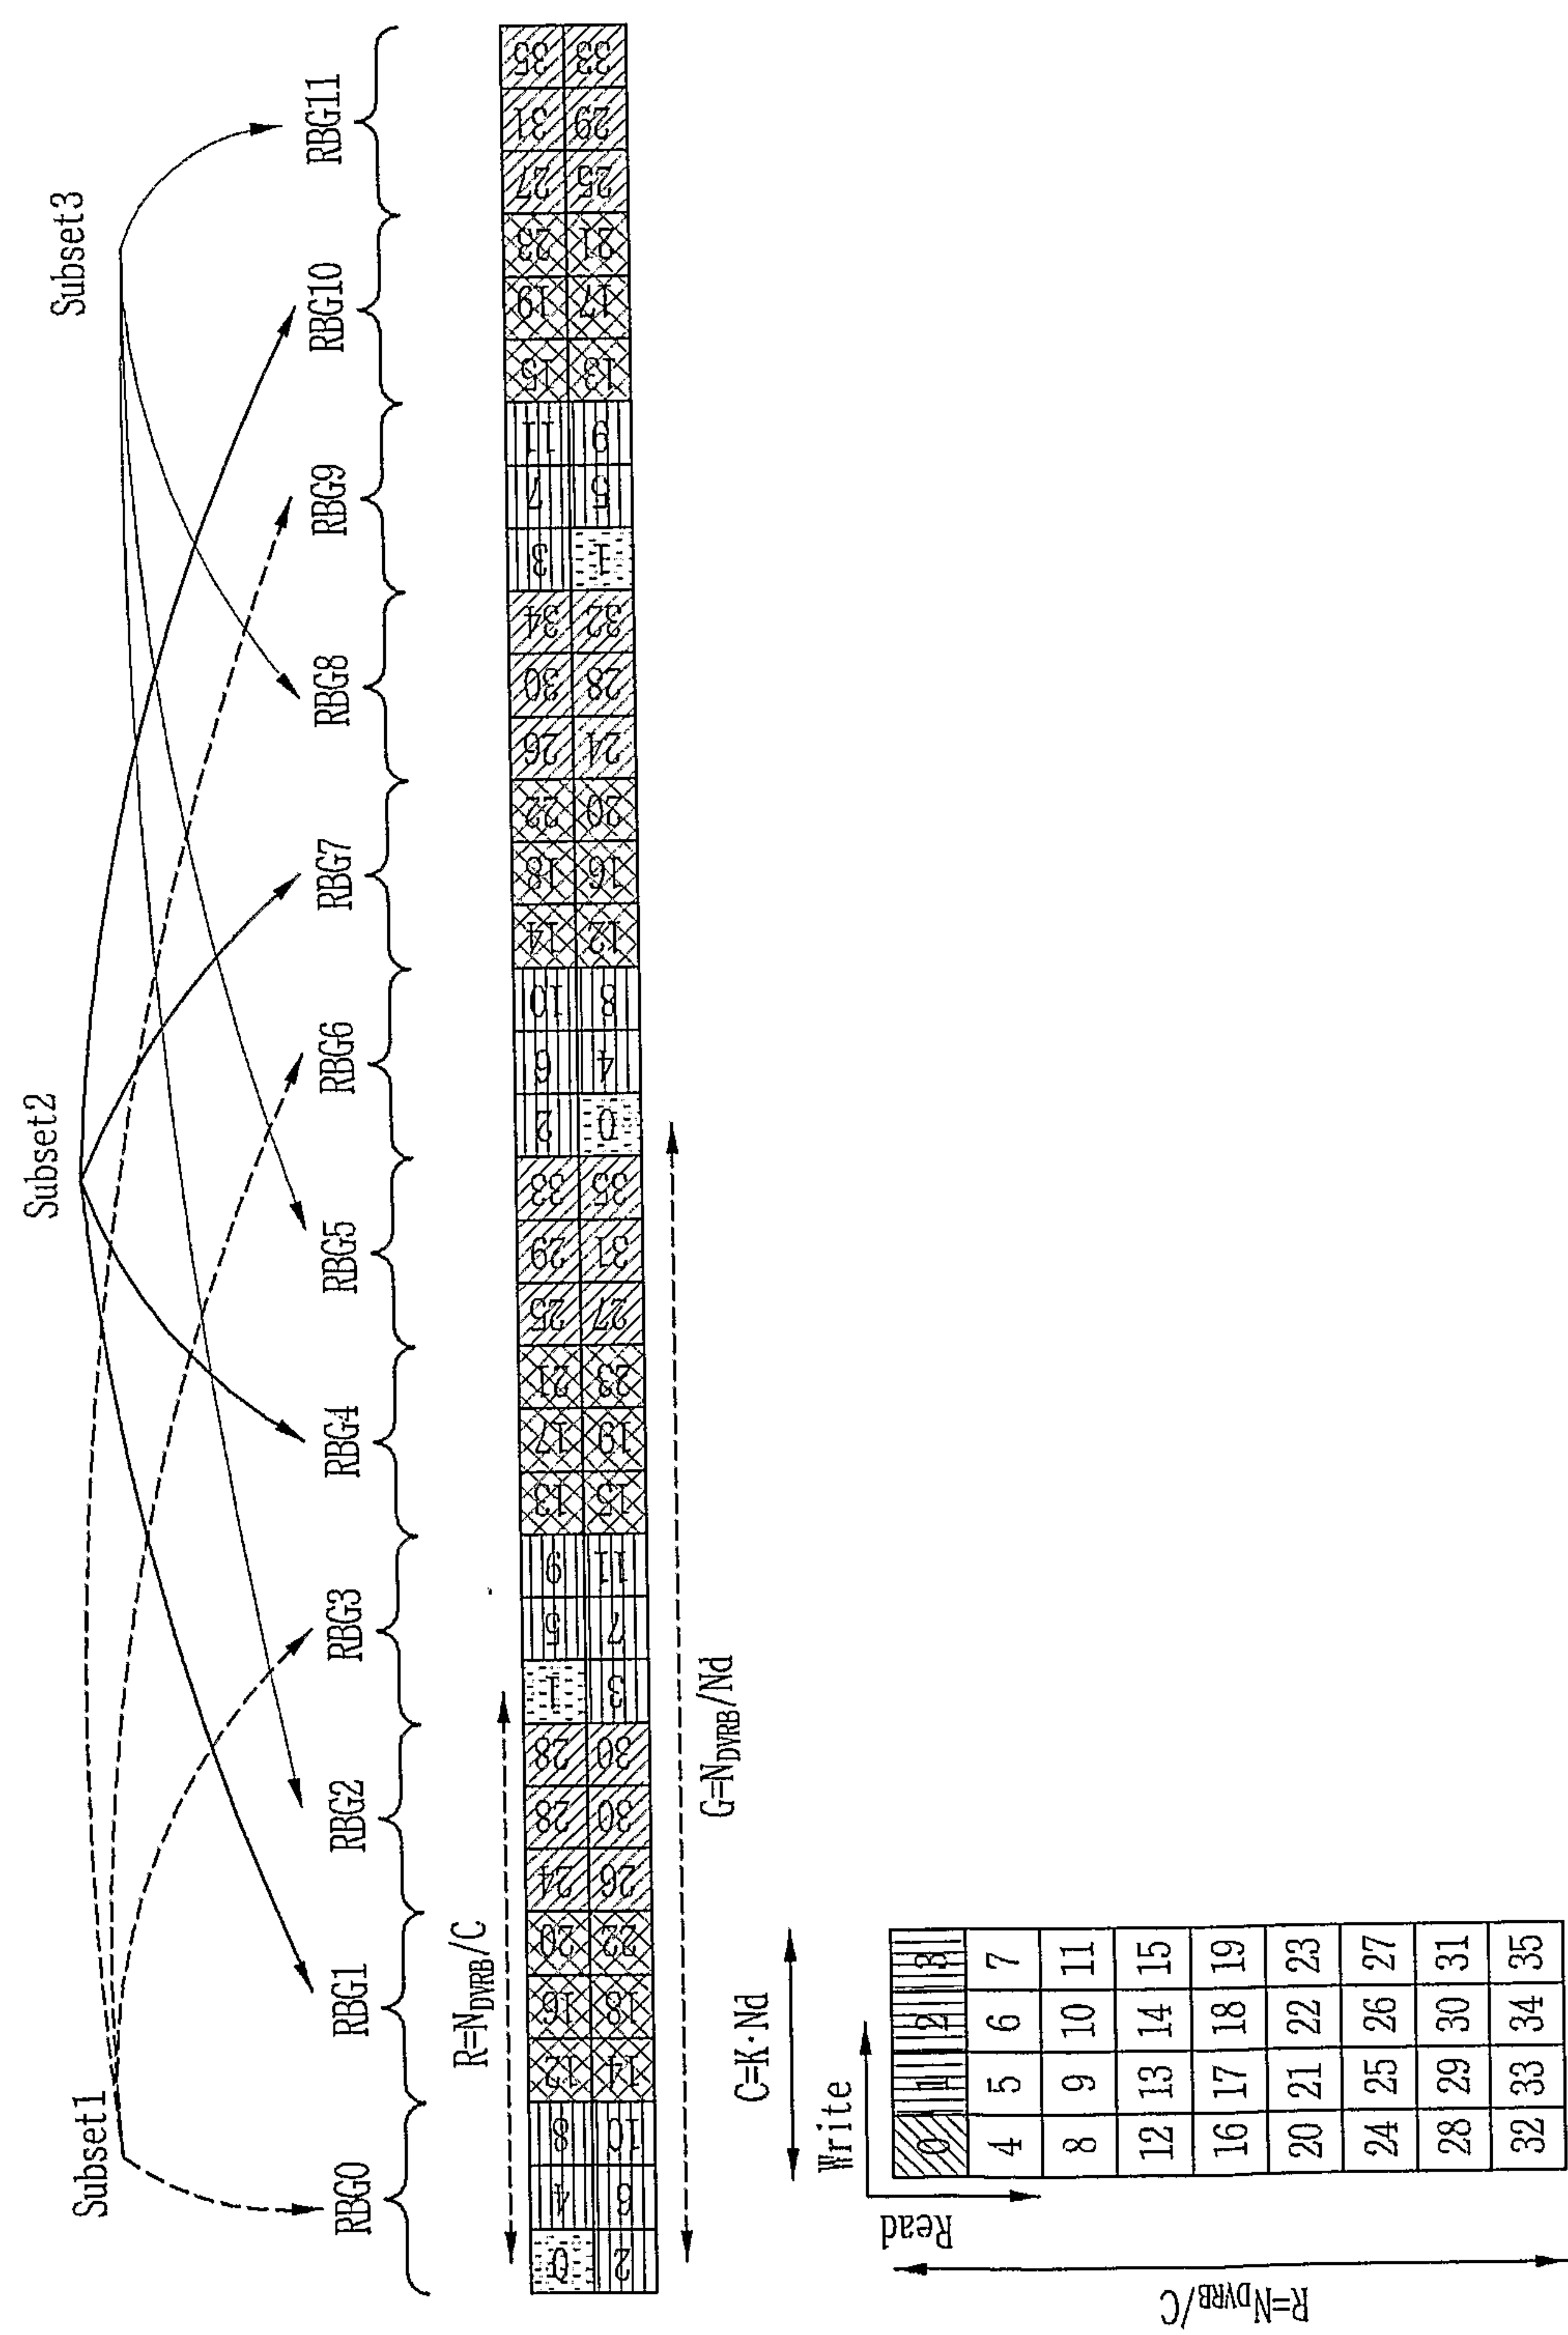


FIG. 31

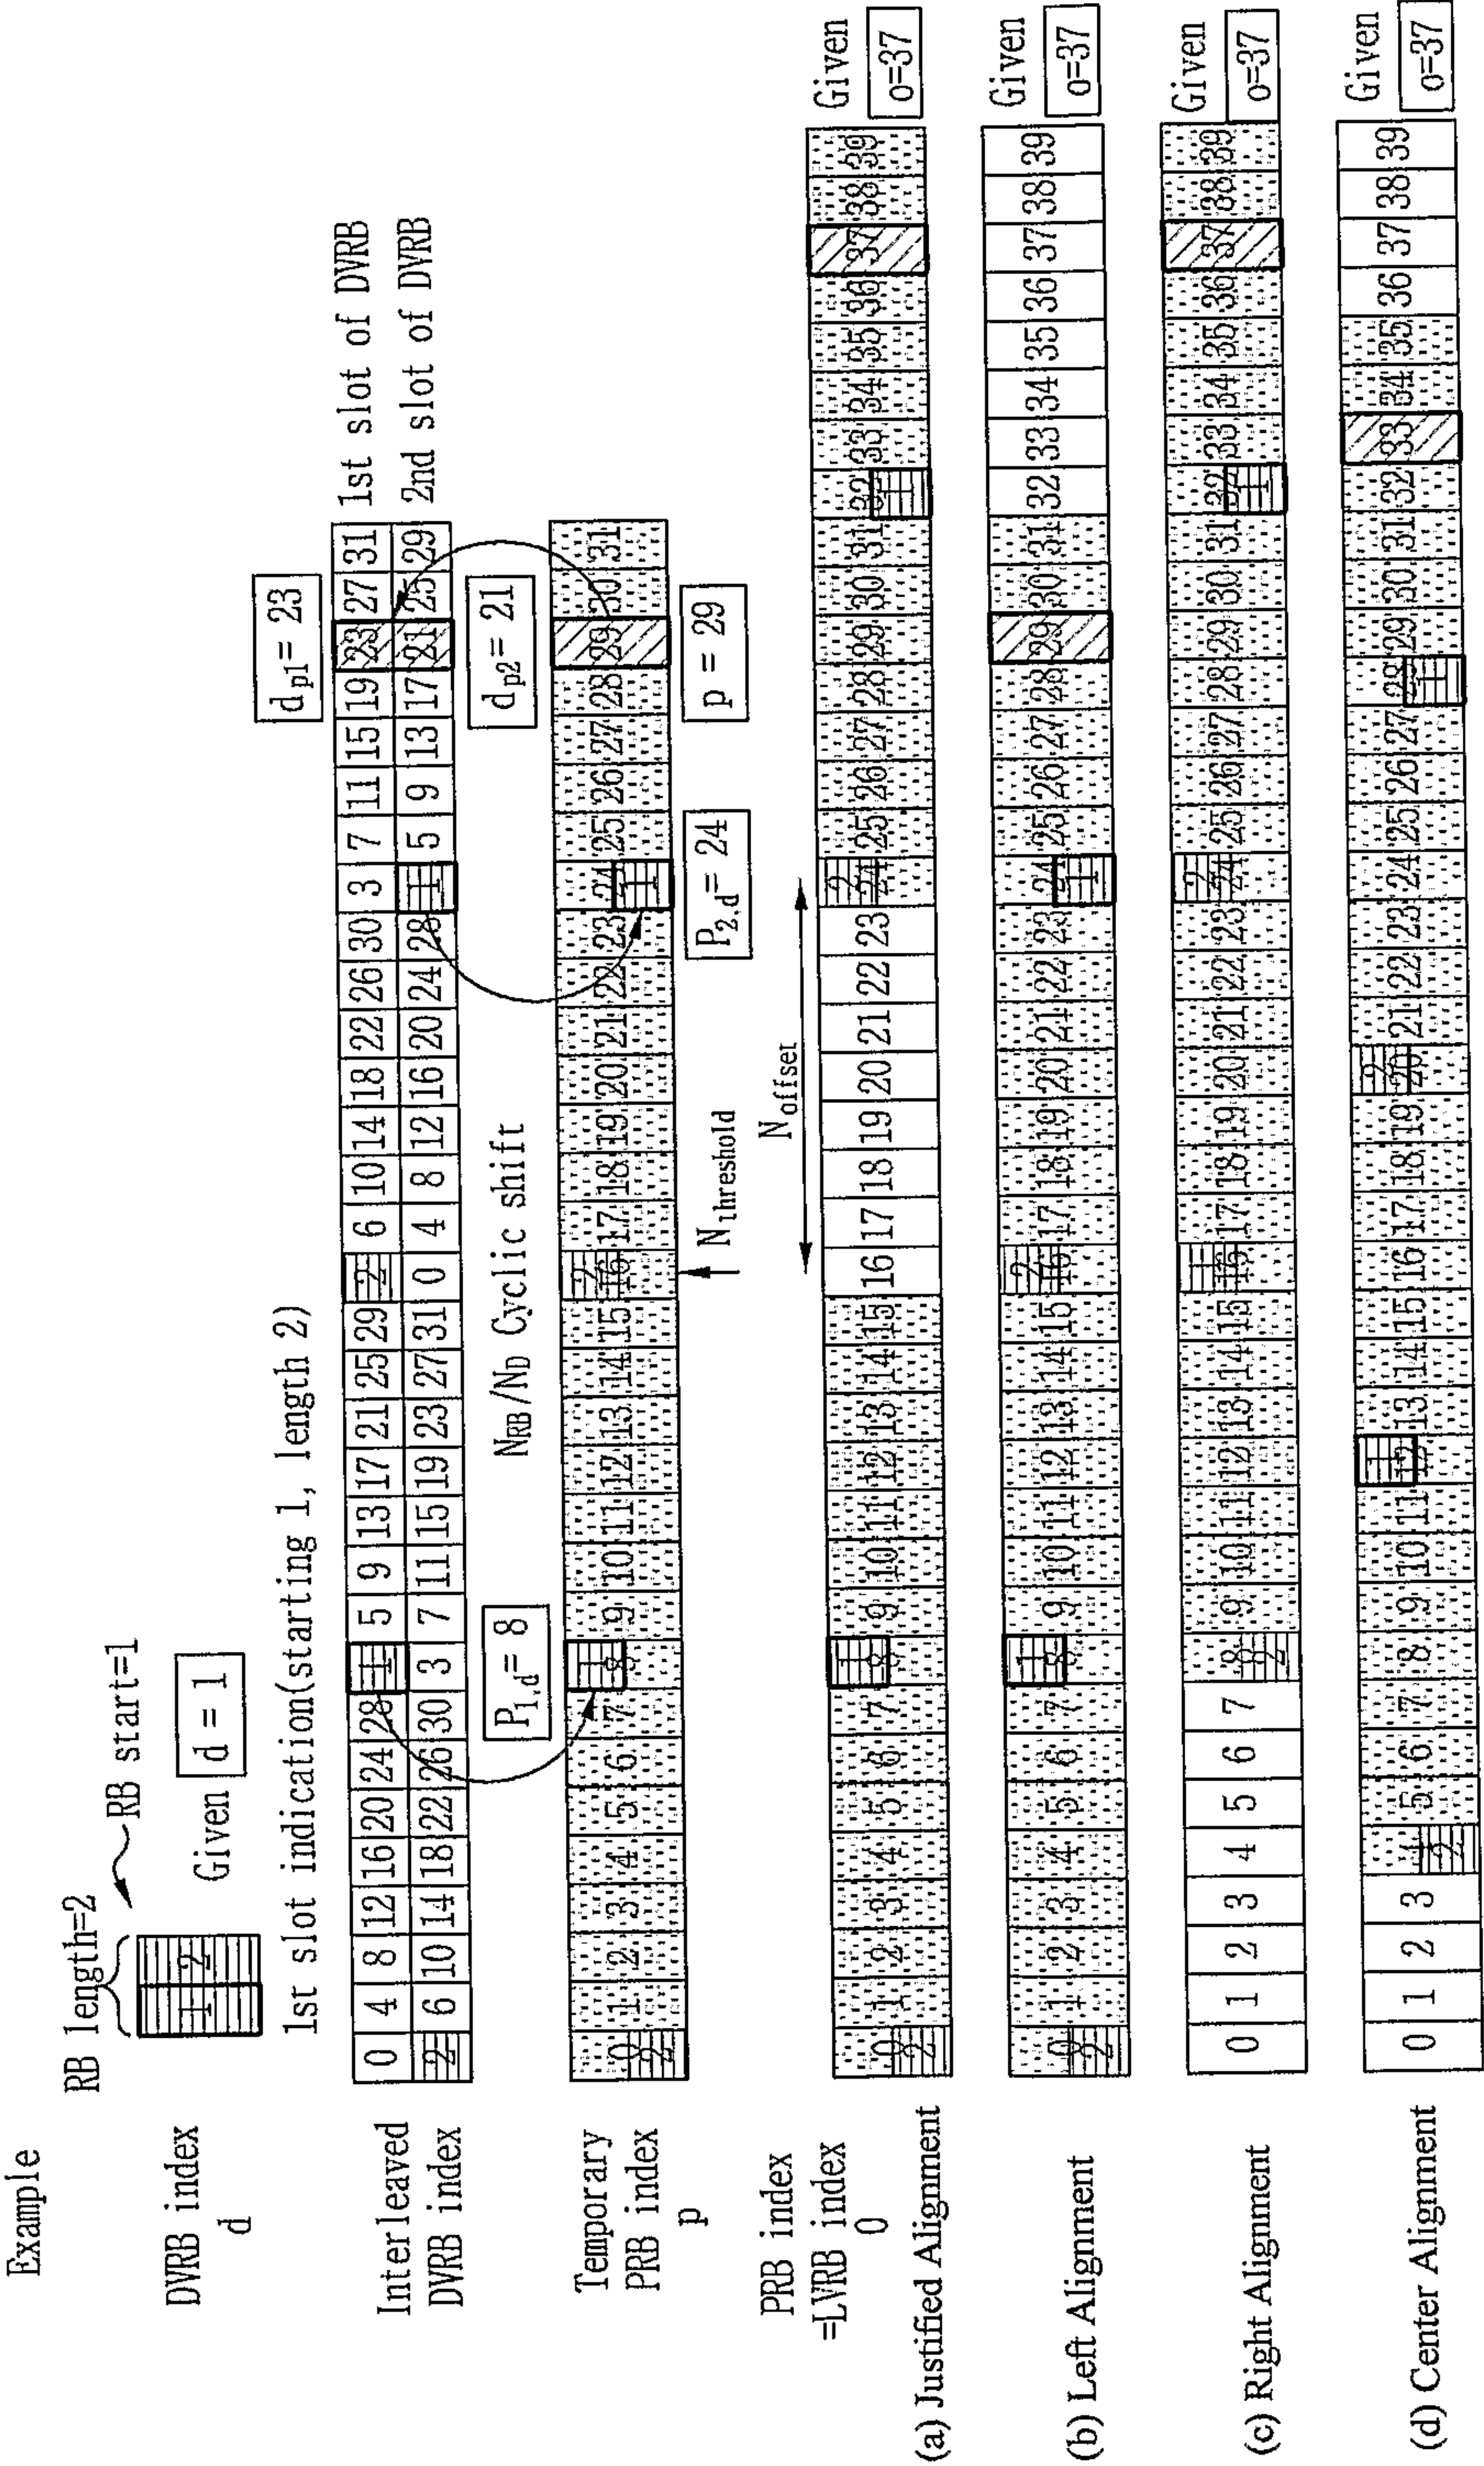


FIG. 32



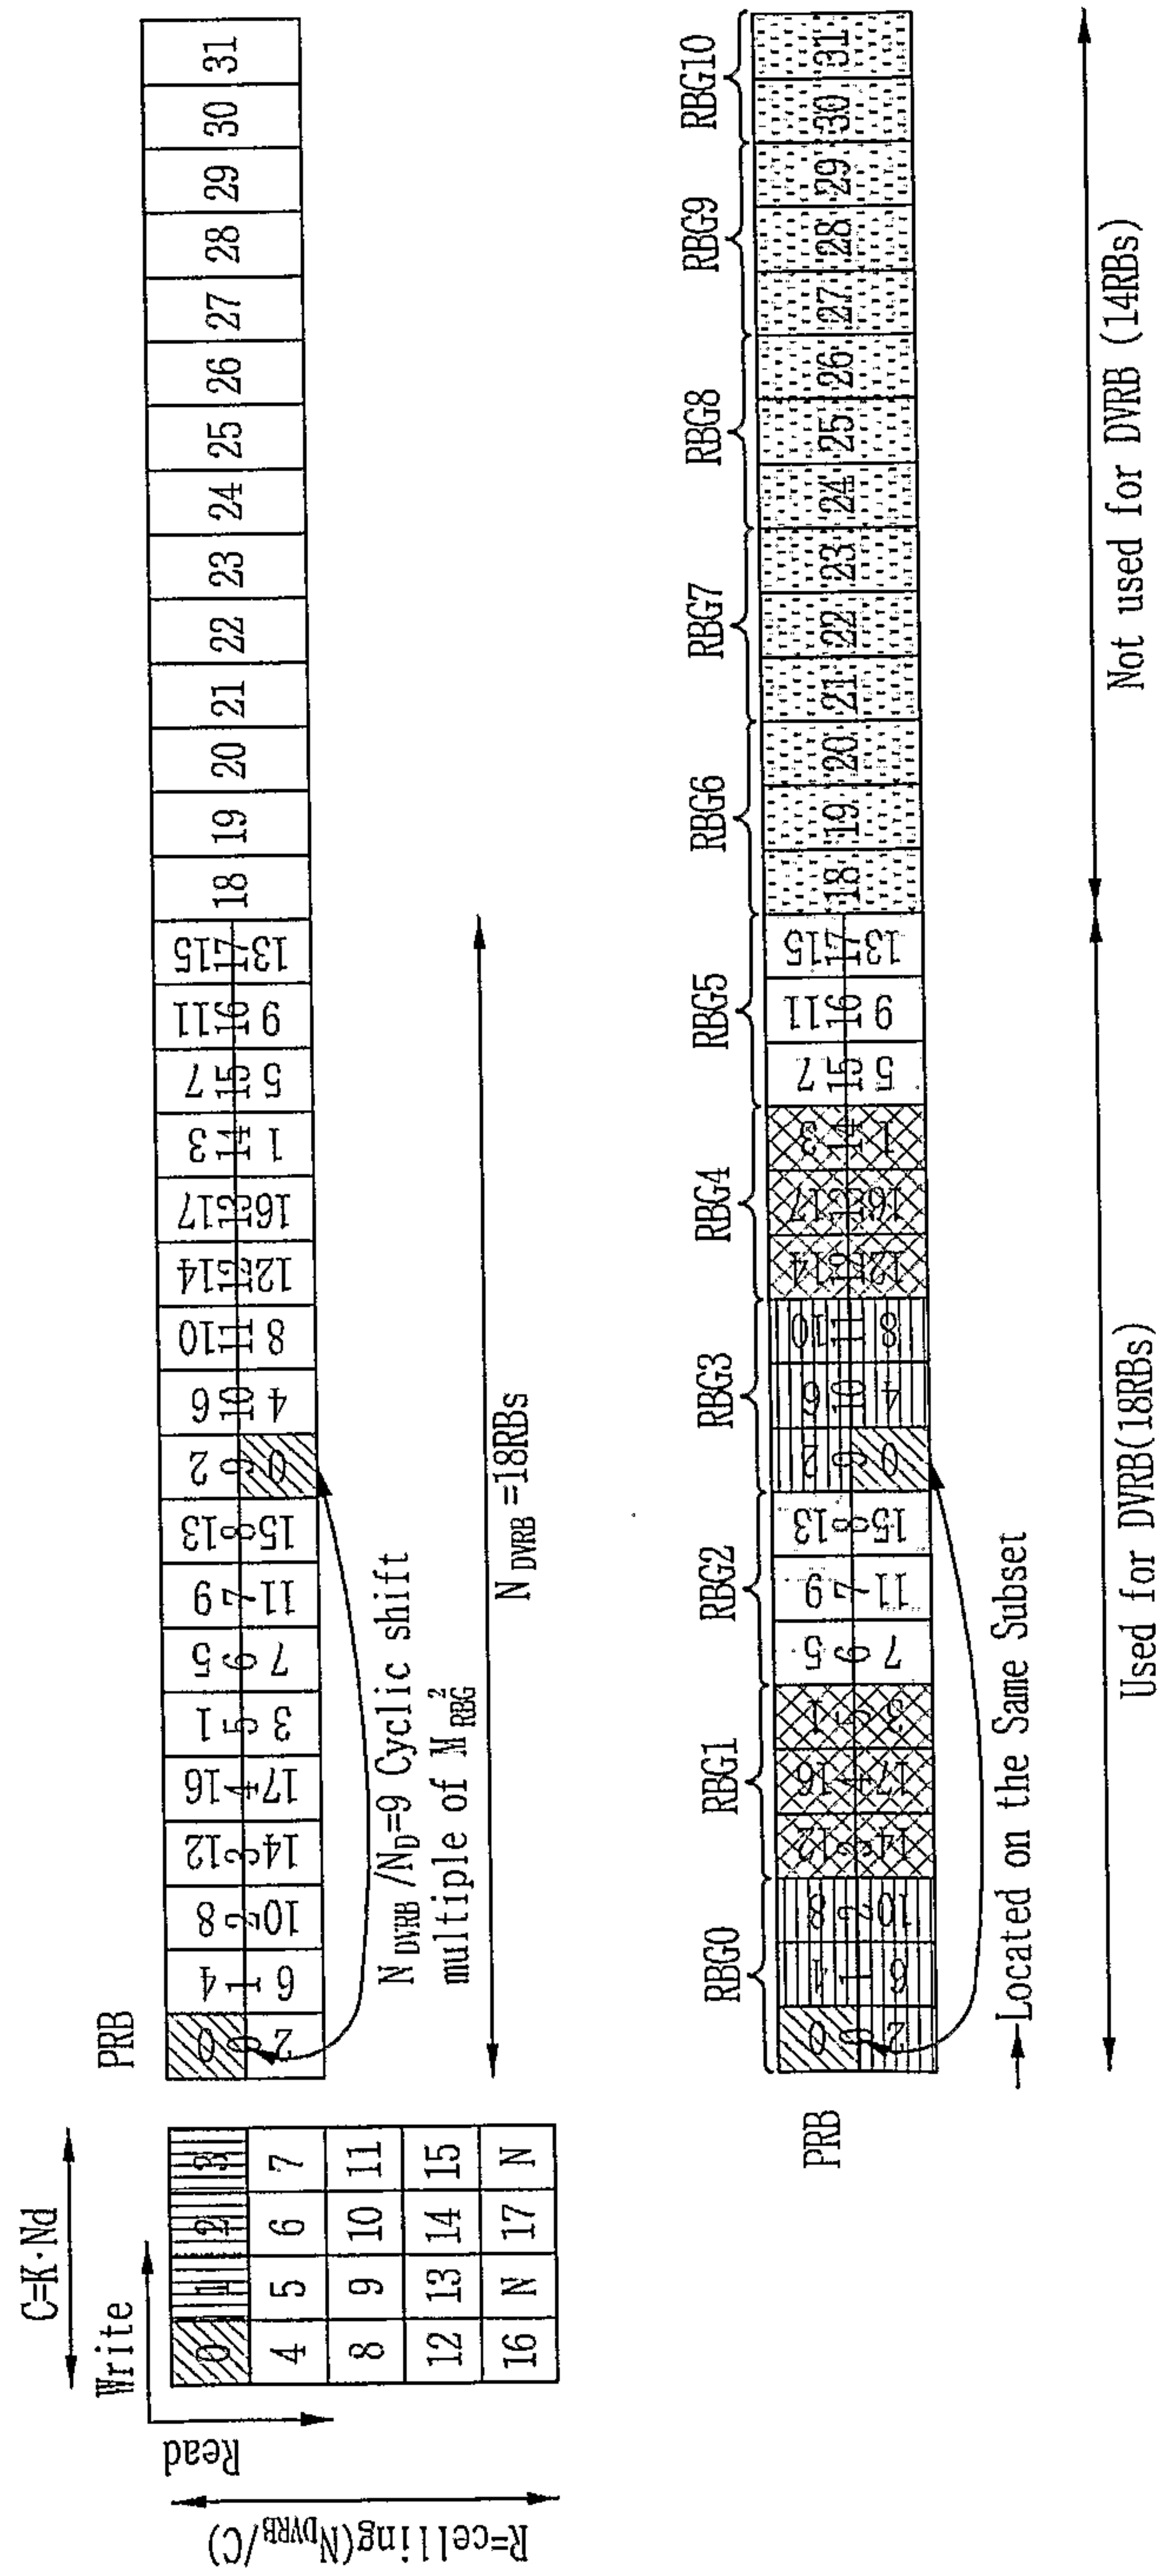


FIG. 33

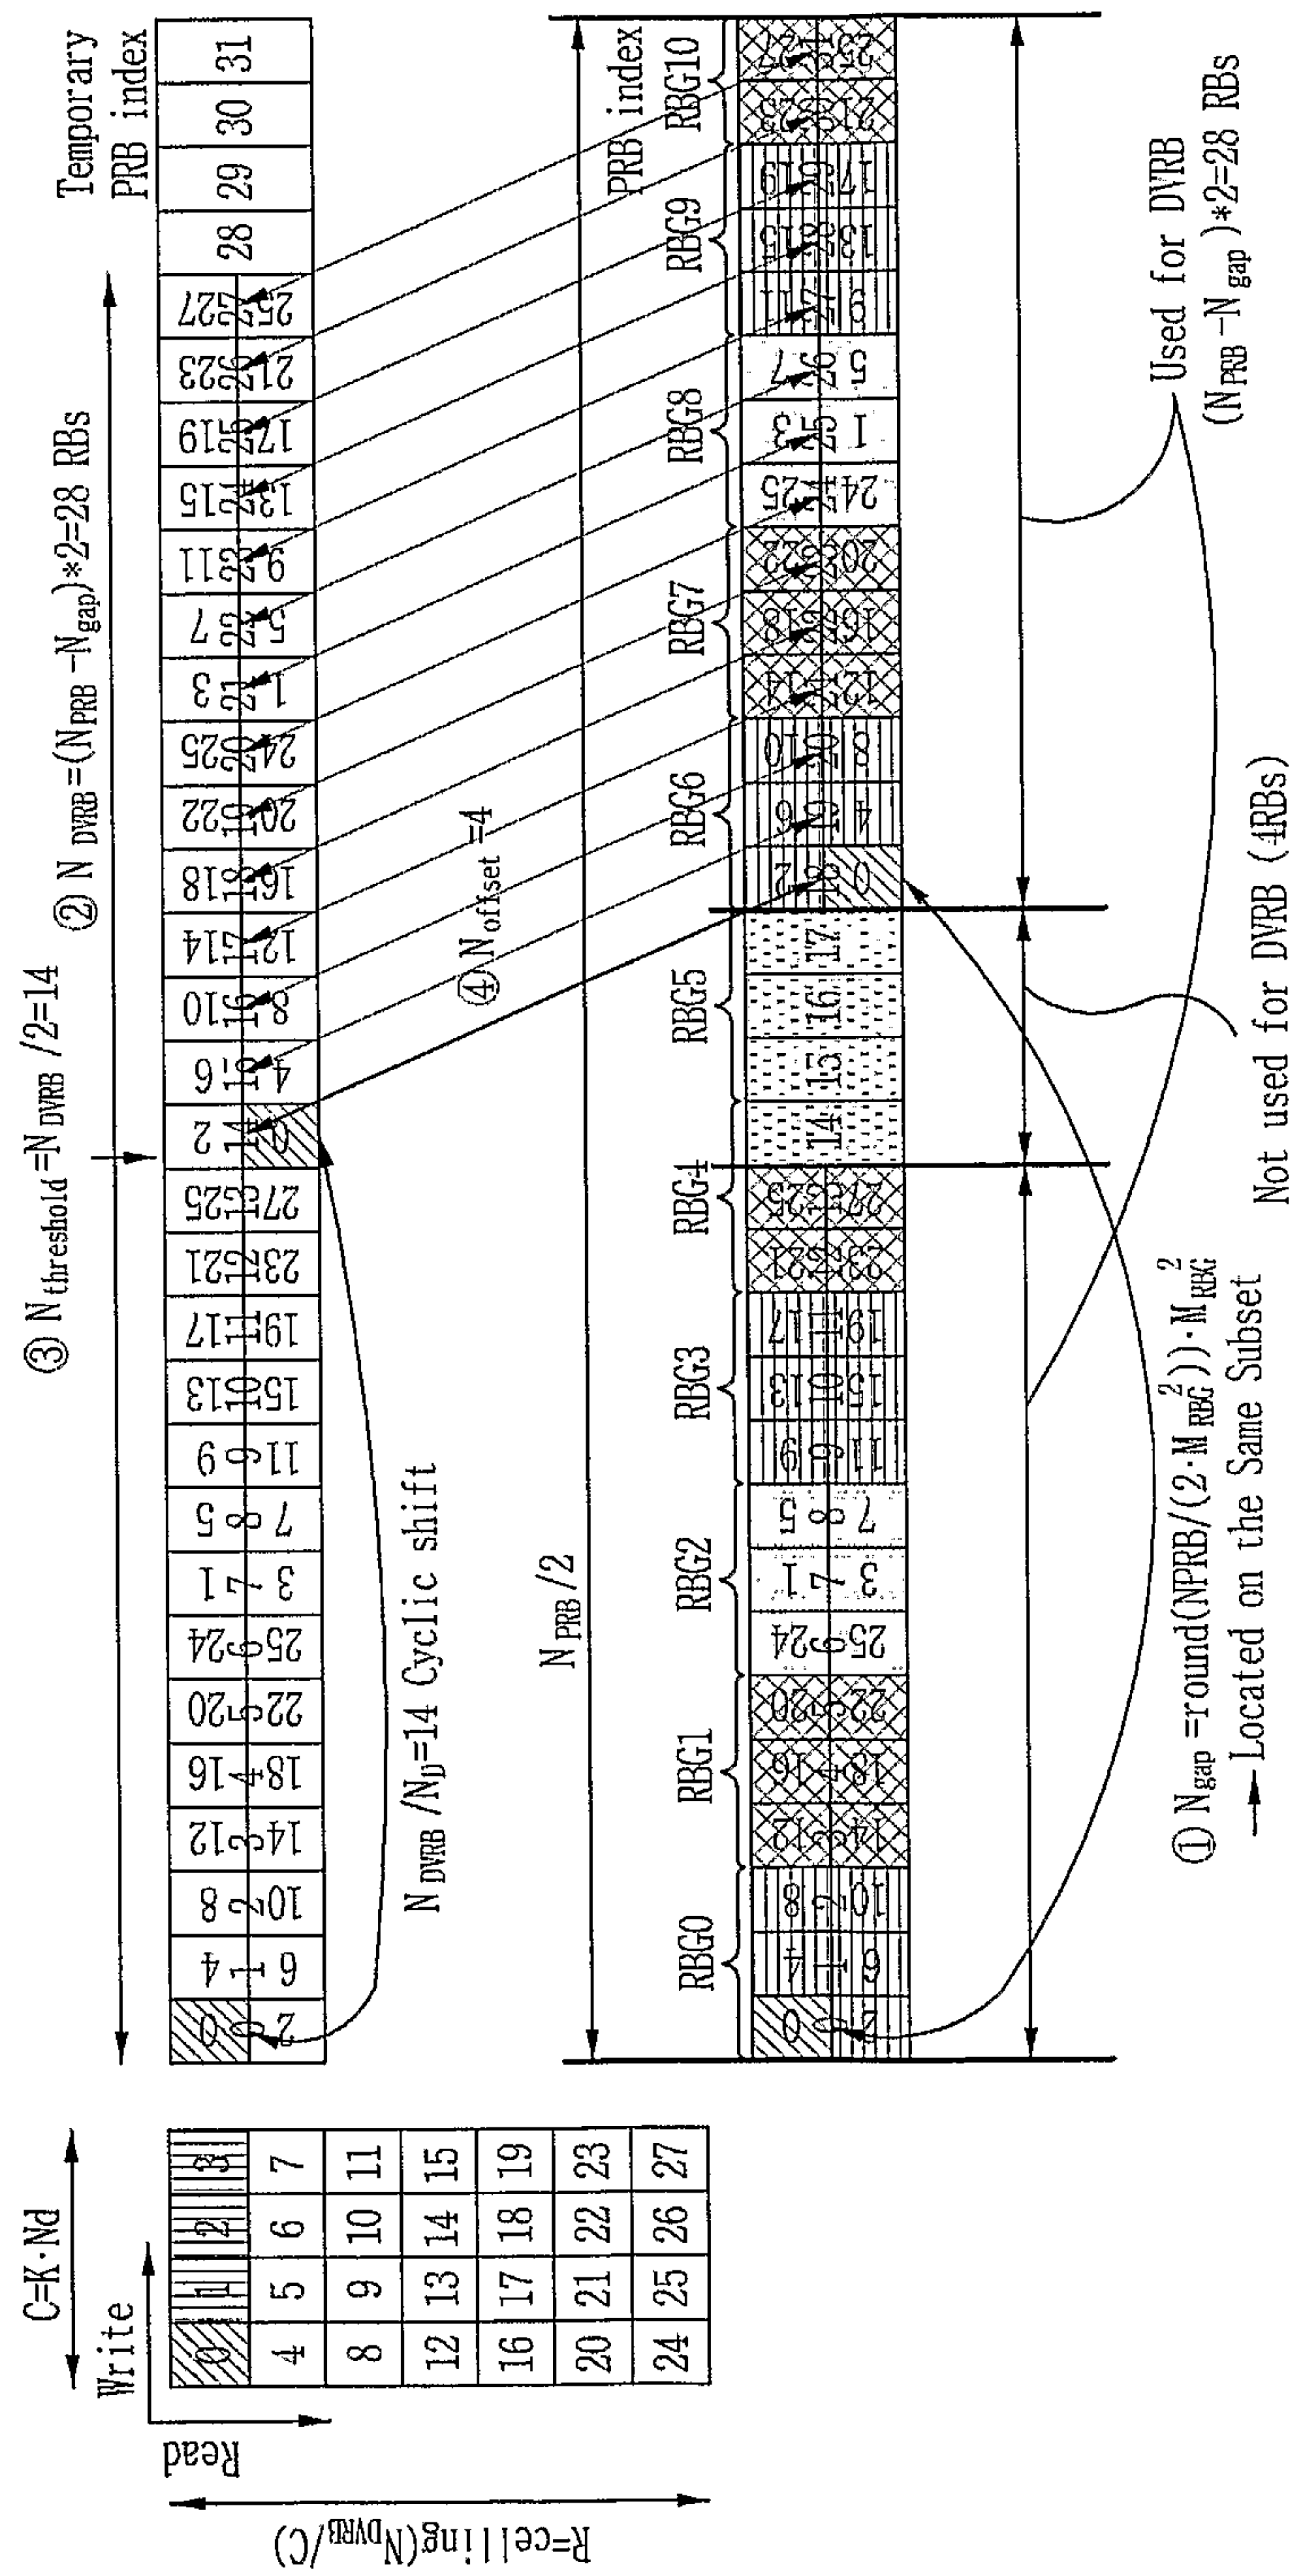

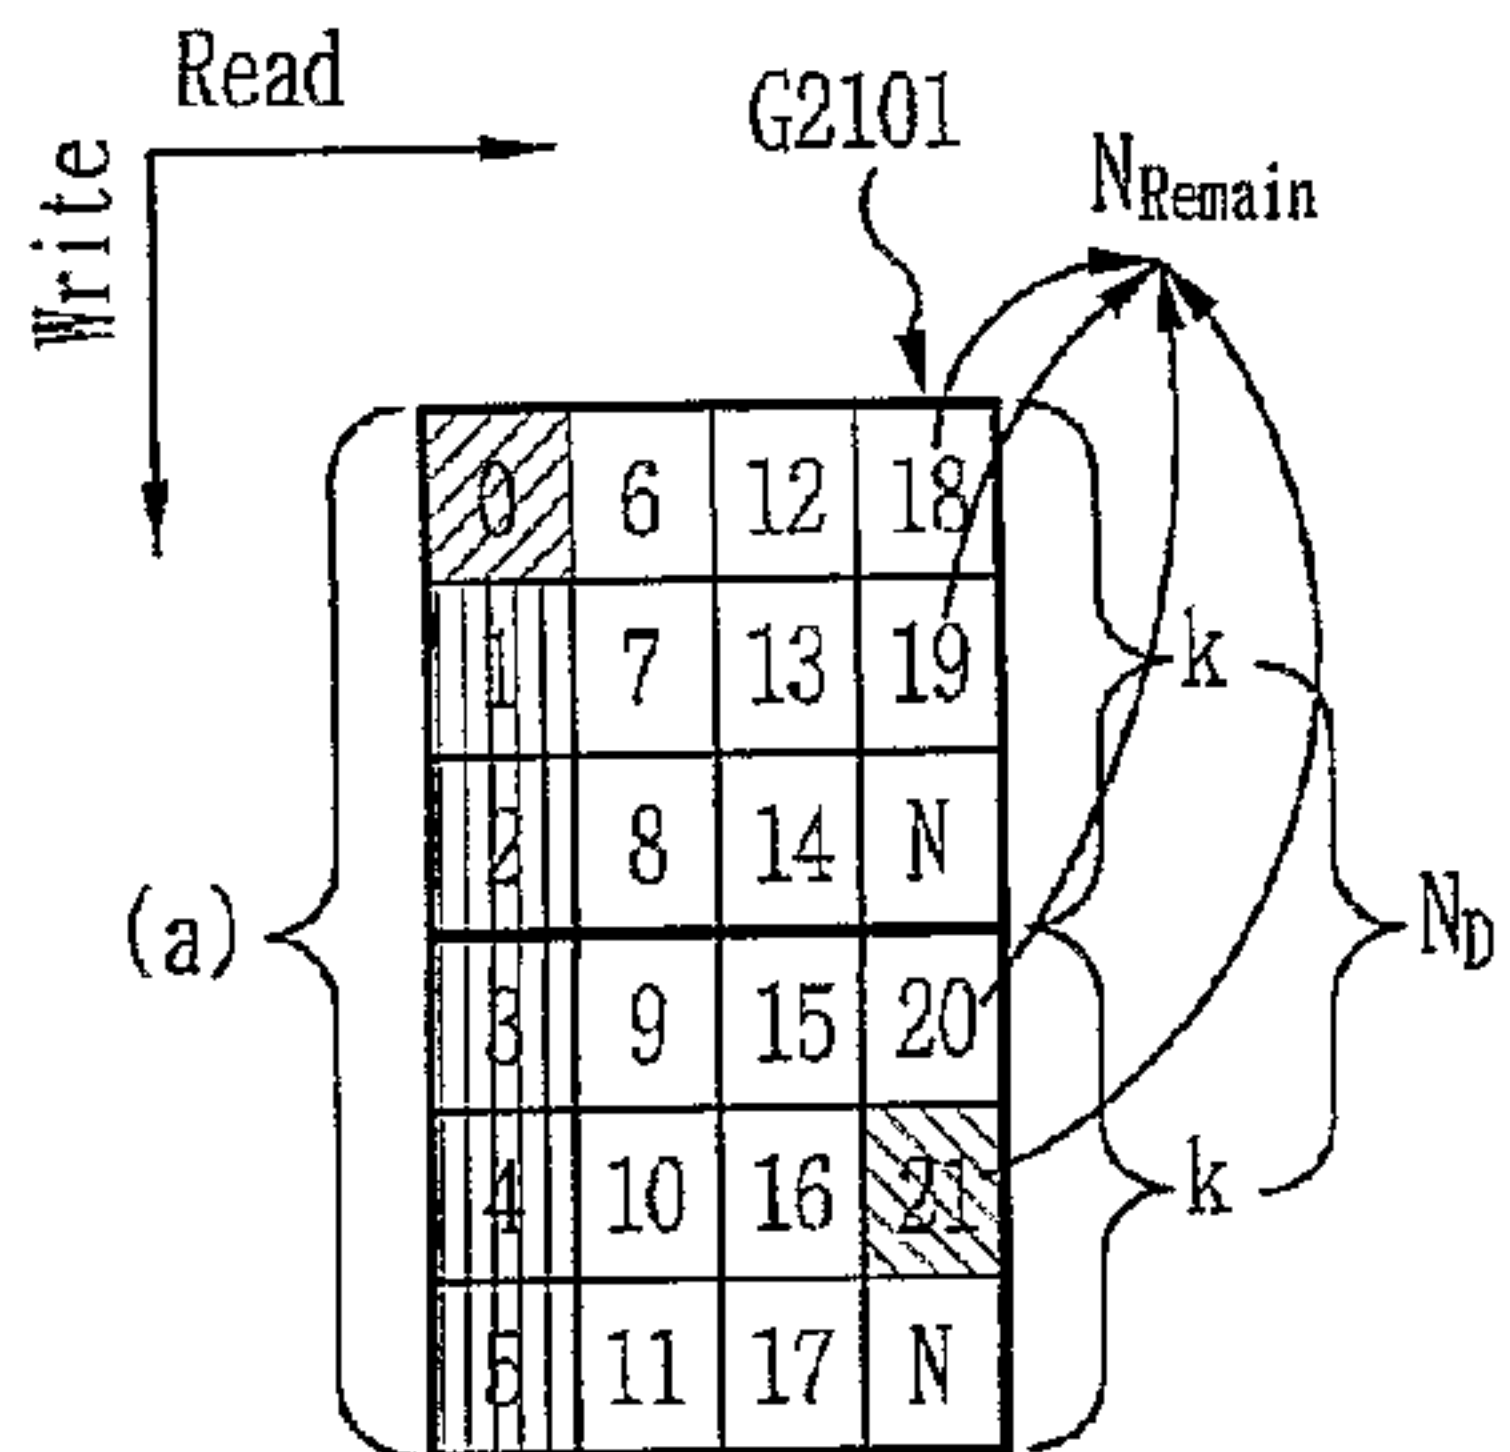

0	6	12	18	1	7	13	19	2	8	14	3	9	15	20	4	10	16	21	5	11	17
3	9	15	20	4	10	16	21	5	11	17	0	6	12	18	1	7	13	19	2	8	14

N_{RB}/N_D Cyclic shift

0	6	12	18	1	7	13	2	8	14	3	9	15	19	4	10	16	5	11	17
3	9	15	19	4	10	16	5	11	17	0	6	12	18	1	7	13	2	8	14

N_{RB}/N_D Cyclic shift

