

[54] **EXTERIOR FORM SPREADER SYSTEM
FOR THREADED END CONCRETE TIES**

[76] Inventors: **Peter R. Lovisa**, 1040 Pelhamdale Ave., Pelham Manor, N.Y. 10803;
Dusan Tausanovitch, 24 Crestwood Drive, Northport, N.Y. 11768;
Tullio E. Lovisa, 91 Whitson Road, Huntington, Long Island, N.Y. 11743

[22] Filed: Nov. 21, 1974

[21] Appl. No.: 525,887

[52] U.S. Cl. 249/40; 249/213; 249/219 W

[51] Int. Cl.² E04G 11/06; E04G 17/06

[58] Field of Search 249/40, 42, 45, 46, 190,
249/191, 213, 219 R, 219 W, 167, 216, 217,
218

[56] **References Cited**

UNITED STATES PATENTS

1,938,153	12/1933	Reeves	249/217
1,956,771	5/1934	McKeown	249/216 X
2,270,448	1/1942	Juhl	249/213 X
3,128,524	4/1964	Kay	249/217
3,292,893	12/1966	Williams	249/213 X

Primary Examiner—Francis S. Husar


Assistant Examiner—John S. Brown






Attorney, Agent, or Firm—Kane, Dalsimer, Kane,
Sullivan & Kurucz



[57] **ABSTRACT**

An externally controlled spreader system is designed for the adjustment of forms in both lateral directions, and is capable of being remotely activated as the forming operations require. This system is advantageously built into existing tie holding devices and includes a nut having a continuous circular notch on its exterior surface with an elongated member having a slotted hole adapted to be slideably connected to a conventional plate-washer. The slotted hole on the slideable member is modified in shape to engage or disengage the continuous notch on the nut, respectively, and consequently conform it to the position of the slideable member, without restricting its rotation. During threading, the nut exerts a force on the plate-washer assembly, which is adequately connected to the forms, and thus moves the forms laterally in the desired direction, while maintaining them constantly at any predetermined distance apart through the rigid tie rod.

9 Claims, 13 Drawing Figures

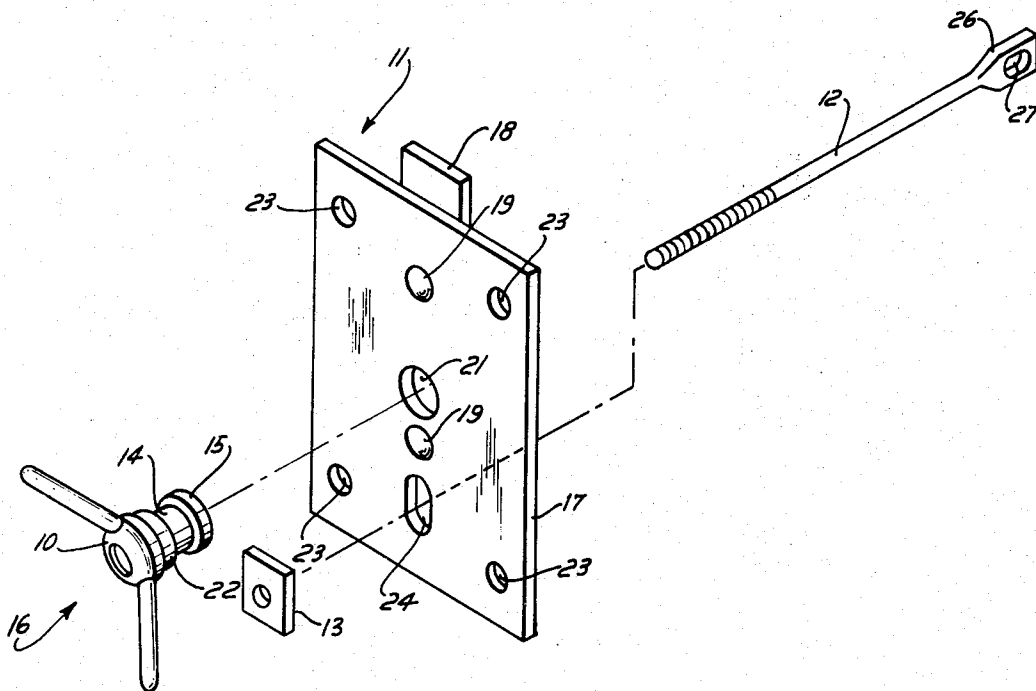

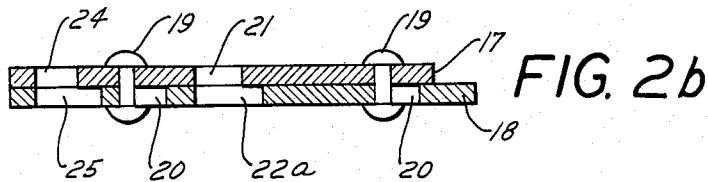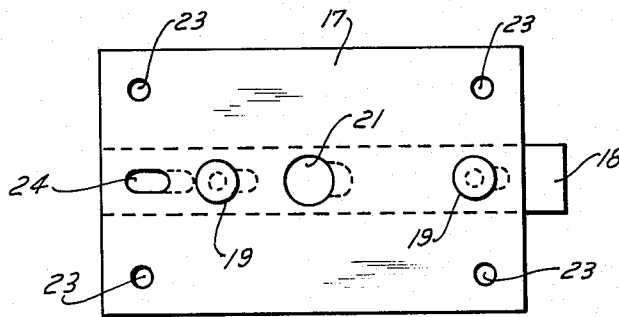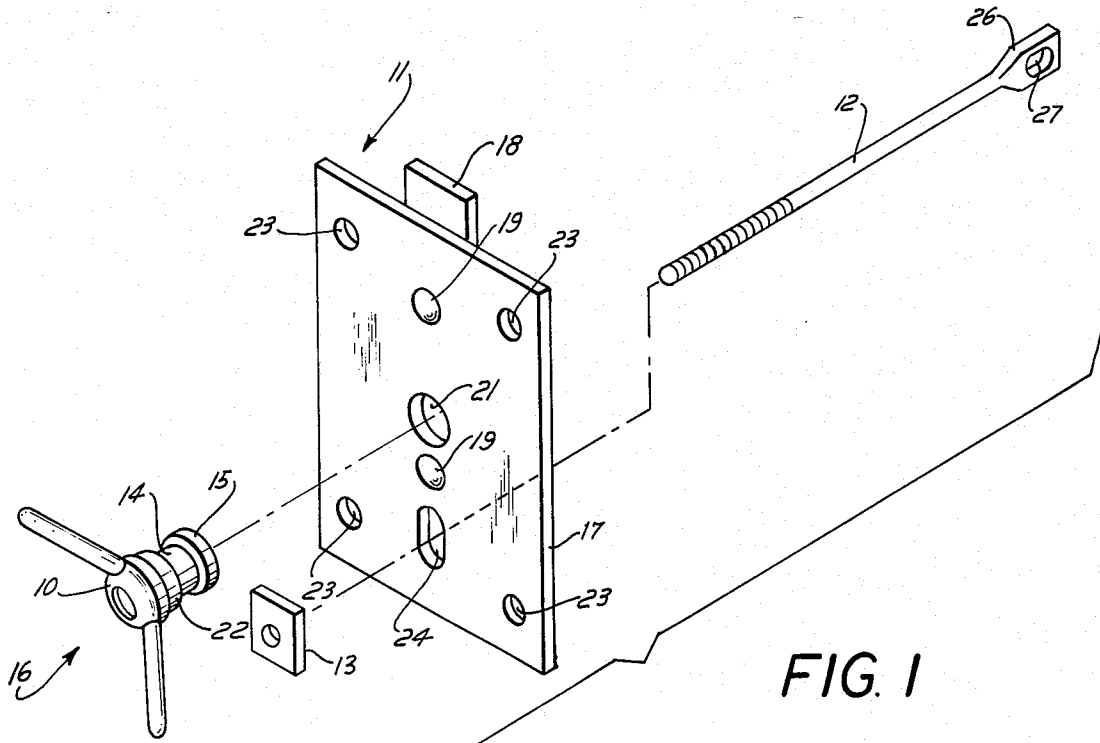

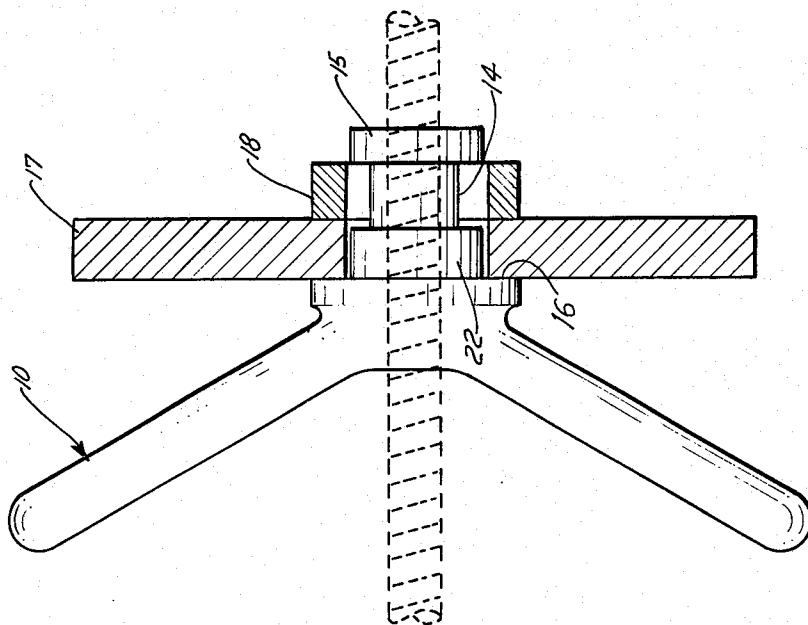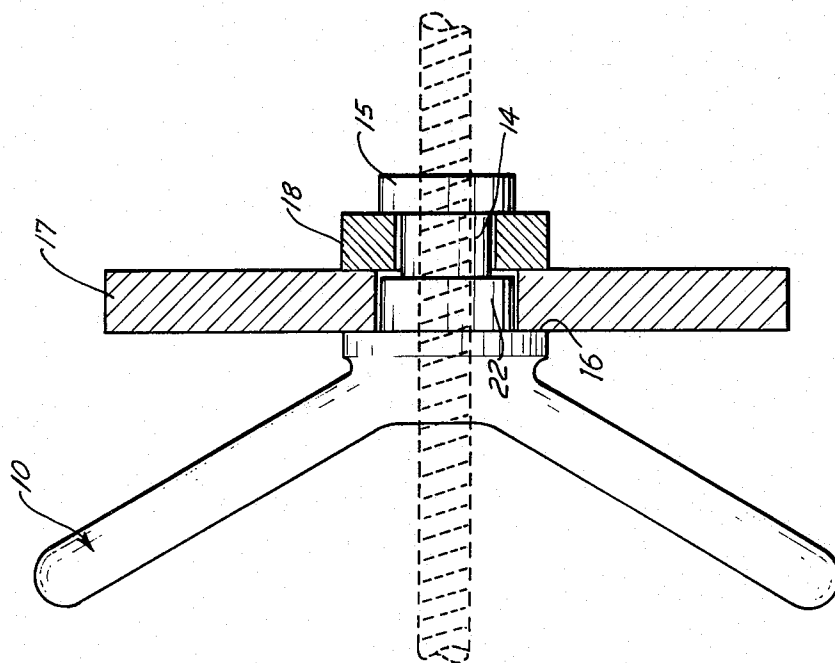

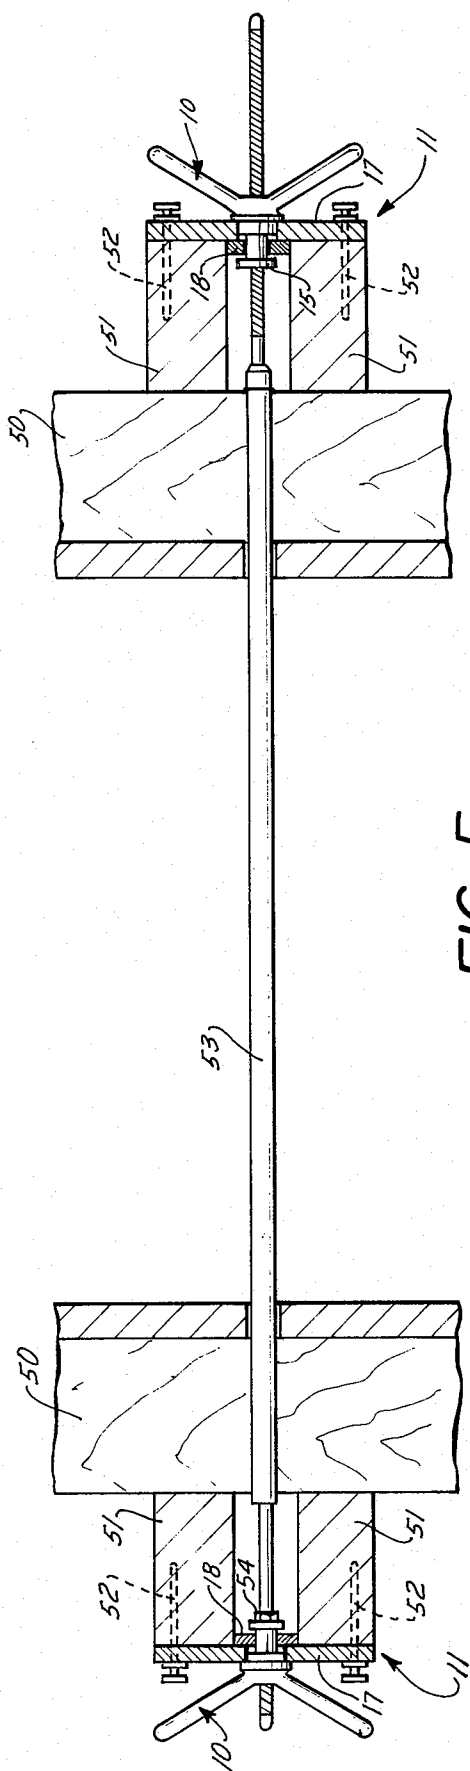


FIG. 5

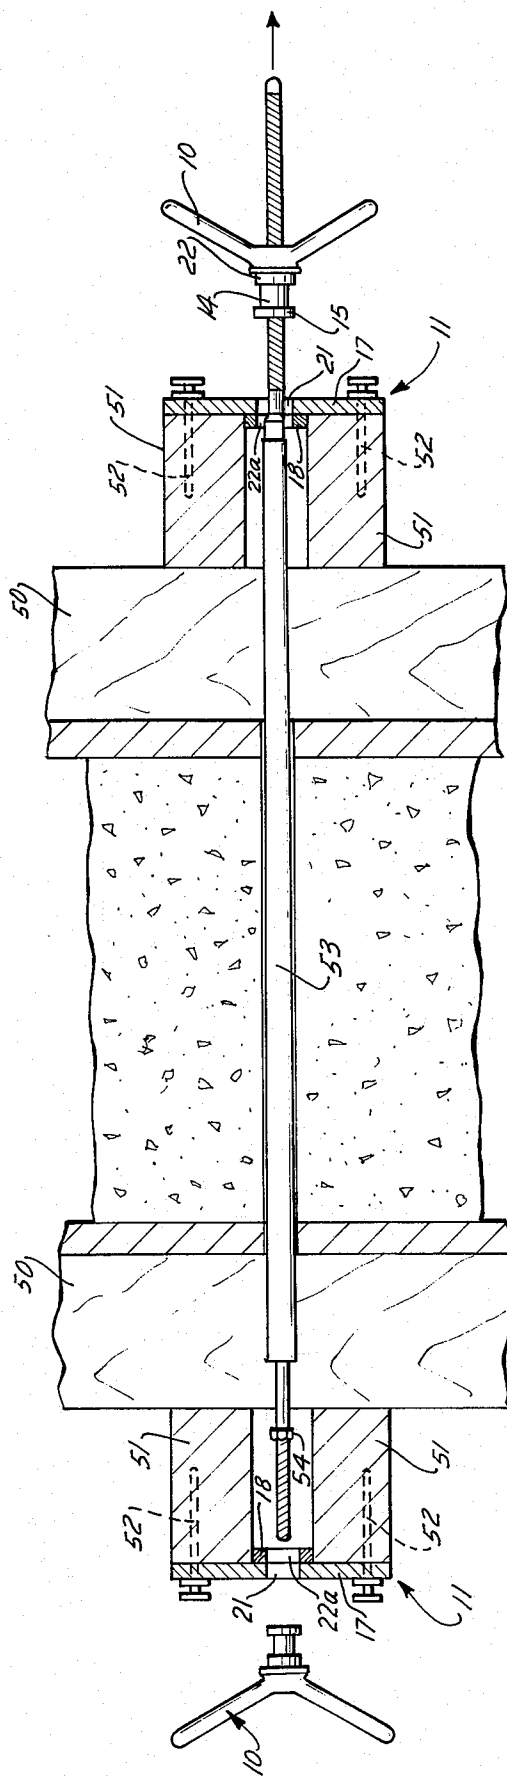


FIG. 6




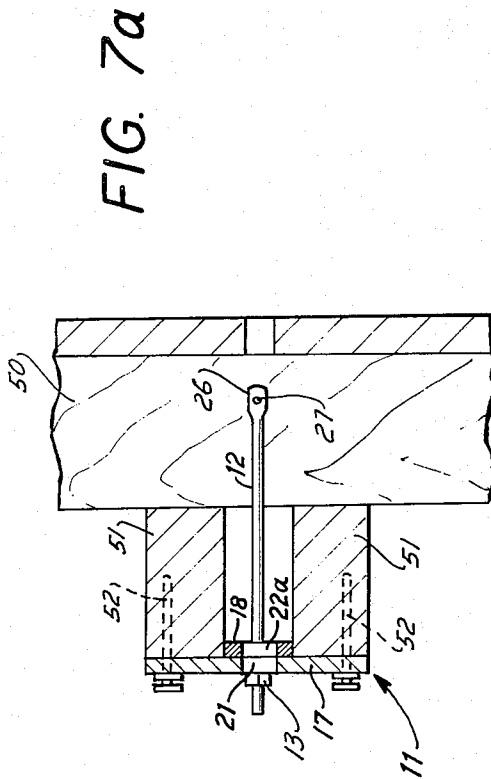


FIG. 7b

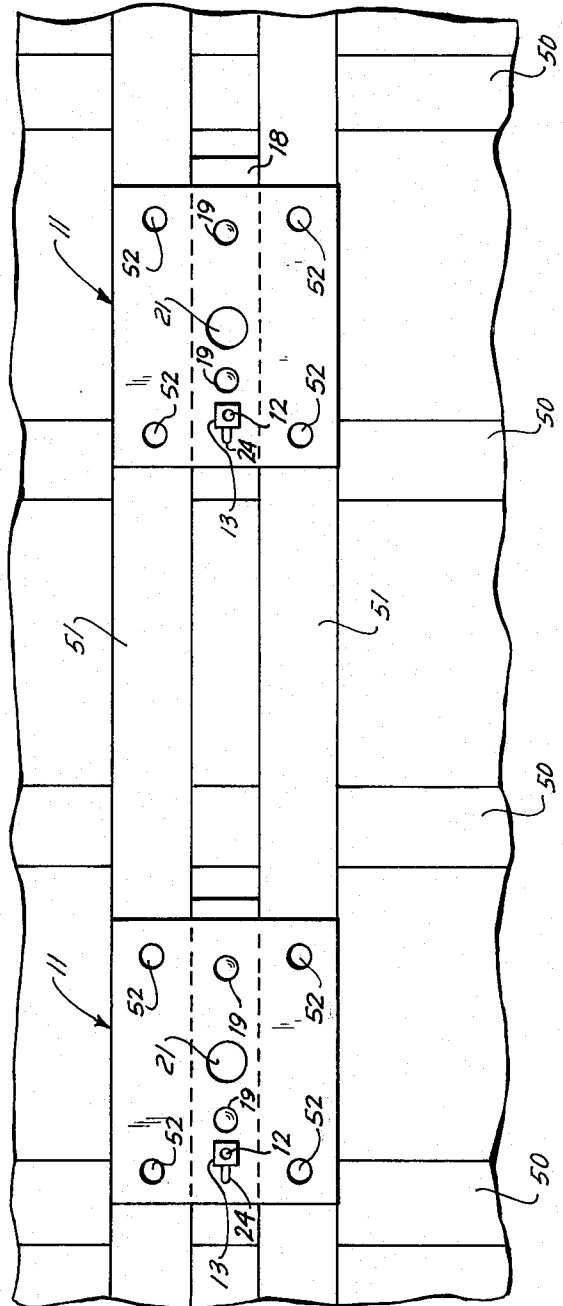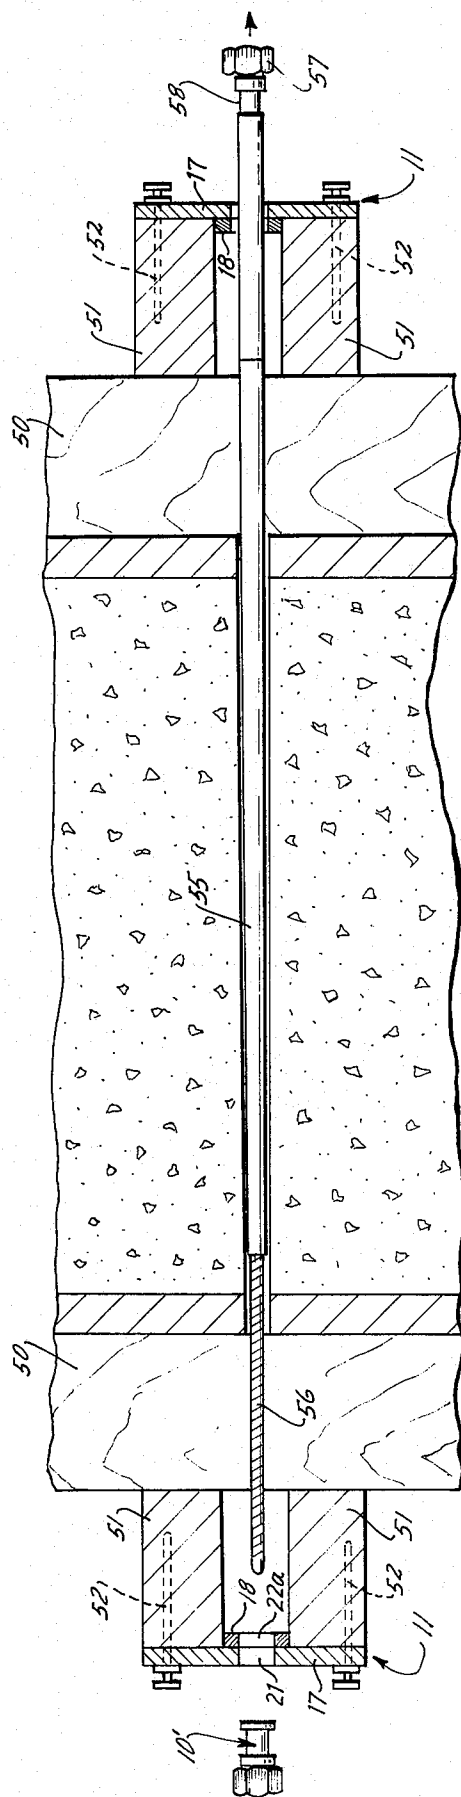

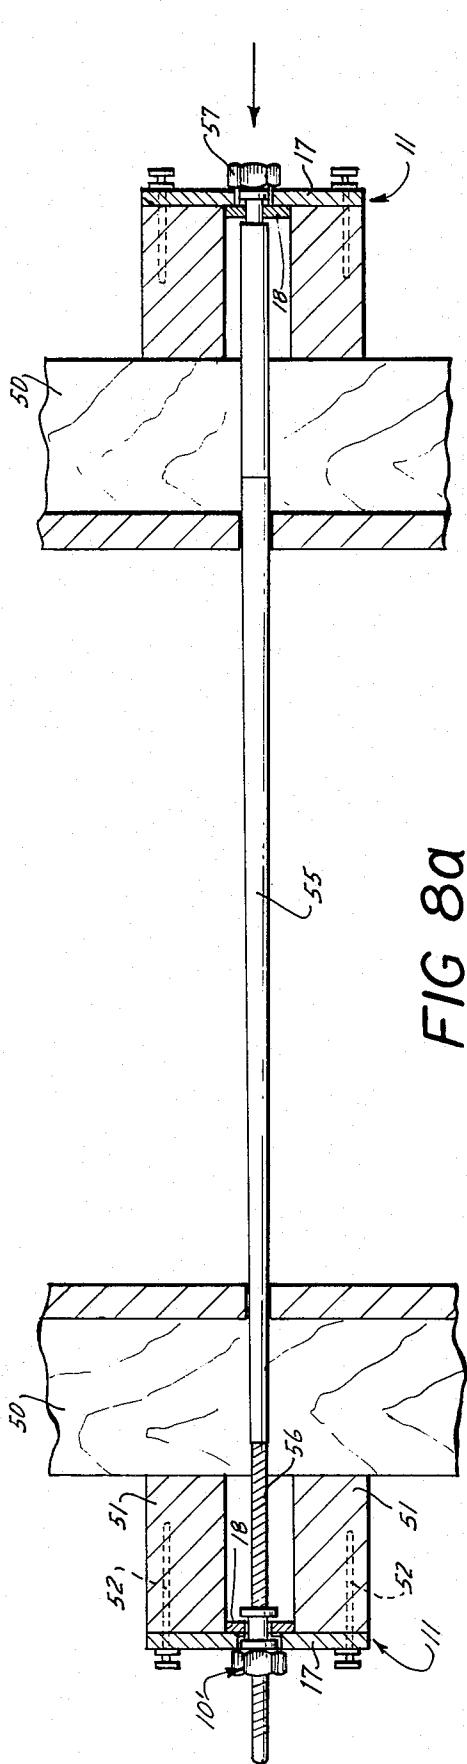

EXTERIOR FORM SPREADER SYSTEM FOR THREADED END CONCRETE TIES

BACKGROUND OF THE INVENTION

Spreader action in concrete form ties is important and is required in order to keep both adjacent forms a specified distance apart during the concrete pour and also to assure integrity of design, uniform thickness and planar surfaces of the poured concrete wall. In addition, during the pour the upper part of the forms has a tendency to close and reduce wall dimensions at the top, because of the relatively heavy pressures of the poured concrete at the bottom. Thus, the spreader action of ties has to overcome this problem.

The normally employed spreader systems of conventional ties depend heavily on the rigidity of tie rods themselves. These rods have at each end projected swedging or similar provisions to support and maintain washers or cones inside of forms exactly at the face of the contemplated concrete wall. Consequently, washers or cones, larger than holes in the plywood, engage the inner face of the plywood and usually other members are designed to transfer compressive forces of exterior tie holding devices to the tie rods. Ties of this type require stripping of forms first and then removal of cones or perhaps break of the tie ends with washers after the forms are removed.

In the case of the commonly known pull-out-ties and tapered ties, the rods are inserted through both erected forms, through the holes in the plywood of minimum required size to both permit entry of the rods and prevents excessive leakage of concrete grout. After concrete pour, the ties are removed before stripping of the forms. This procedure in closing and stripping forms is very beneficial and results in substantial labor savings in forming operations. It is also extremely conducive to the relatively new and economical large panel or gang forming operations normally handled by cranes. It is preferred, however, that the employed ties not have any built-in internal spreader system utilizing either projected washers or cones, which otherwise would be difficult if not impossible to insert through both forms in place, or to remove them from the concrete.

Some of the commercially available ties have notches on the external part of tie rods for special brackets engageable with outer form members (walers). However, an external spreader system of this type is not fully effective and practical, because it consists of many loose parts and is rather time consuming in execution. In addition, effective adjustment is limited to an inward direction only. If the forms are initially placed closer than the required distance or part of a form is leaning inwardly, existing exterior spreader systems simply cannot be used. These forms would then have to be reset or pulled out by hand, involving more work and costly crane time. There are a number of concrete construction personnel that still depend on the old fashioned deployment of pieces of wood between forms to be gradually removed as pour of concrete progresses.

To date, a fully effective, practical and economical spreader system is not in existence for the above group of ties with threaded ends which are inserted through both forms while in place, and after the ties are removed from the concrete both forms are free for stripping.

These ties with threaded ends are advantageous because they are the fastest and the most economical for

gang forming. Also, completely removable ties of this type eliminate any possibility of rust marks. They are used more and more, especially with the growing volume of architectural concrete where it would be more convenient for better patching and matching of the concrete color and texture.

SUMMARY OF THE INVENTION

The principal object of the present invention is to provide a novel spreader system for removable concrete form ties having threaded ends, and which provides a simple but effective controlled adjustment of forms in both directions thereby eliminating costly and time consuming work.

Another object of the invention is to have a spreader system capable of adjusting and maintaining the forms at essentially any desired distance apart over a predetermined range of adjustment for the same tie to accommodate different wall sizes.

According to the invention herein, an externally controlled adjustment is provided for the form distance and is achieved by a releasable connection between the slideable part of a plate-washer assembly and a nut, which during the threading operation exerts the force on the plate-washer assembly, which is securely attached to the forms, and consequently moves and maintains the forms at the desired distance apart from one another.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

FIG. 1 is an exploded view of the improved concrete form spreader system;

FIG. 2a is a plan elevational view of the plate-washer assembly;

FIG. 2b is a longitudinal section of the plate-washer assembly;

FIG. 2c is an end view of the plate-washer assembly;

FIG. 2d is a plan view of the sliding member of the plate-washer assembly;

FIG. 3 is an elevational view partly in section showing the sliding member engaging the nut;

FIG. 4 is a similar view showing the sliding member releasing the nut;

FIG. 5 is an elevational view partly in section of the spreader system applied to a contemplated embodiment of removable tie mounted in an elastic sleeve;

FIG. 6 is a similar elevational view showing the spreader system in a disengaged position with the tie ready to be withdrawn;

FIG. 7a is an enlarged fragmentary end elevational view partly in section illustrating means for attachment of the plate-washer to the forms;

FIG. 7b is an enlarged fragmentary side elevational view showing the attachment of the plate washer of FIG. 7a; and

FIGS. 8a and 8b are enlarged fragmentary and elevational views partly in section of the spreader system applied to another form of tie known in the trade as tapered ties.

DETAILED DESCRIPTION

The form spreader system of the present invention shown in FIG. 1 includes a nut 10, plate-washer assembly 11 and waler holder 12, equipped with a corresponding nut 13. Nut 10 has a continuous circular notch 14, radially projected bottom flange 15 and larger upper portion providing adequate bearing area

16. Plate-washer assembly 11, also shown separately in FIGS. 2a, b, c and d consists of a plate-washer 17 and an elongated member 18 slidably connected to the plate-washer 17, by means of two rivets 19 disposed in two slotted holes 20 located in the member 18. Part of the rivets 19 which are embedded in the plate 17 may be of a slightly smaller diameter, forming a shoulder like area in order to create a small gap between part 17 and part 18 to thereby avoid possible friction between these parts. Circular hole 21 in the center of plate 17 is of size to allow insertion of projected portions 15 and 22 of nut 10 (see FIGS. 3 and 4), cylindrical portion 22 serving as a guide in centering the nut 10 in the washer-plate assembly 11. Projected bottom ring 15 provides the connection between nut 10 and slidable member 18 without restricting rotation threading of the nut 10. Elongated hole 22a located in the slidable member 18 is modified in shape to engage or disengage flange 15 depending on the relative position of the slidable member 18. The length of continuous notch 14 is slightly larger than the thickness of slidable member 18 in order to avoid any friction between member 18 and the nut 10 during the releasing operation after the concrete has been poured.

Concrete compressive forces will push the forms with plate assembly 11 towards the nut 10 (as shown in FIGS. 3 and 4), creating sufficient clearance for the slideable member 18 to be freely moved to the disengaged position. Holes 23 in the corners of plate-washer 17 are provided for nails to secure plate-washer assembly to the forms. Slot 24 in the plate-washer 17 and corresponding elongated slot 25 on the slideable member 18 are provided for the waler holder 12 to be installed as required, without restricting movement of slideable member 18. Waler holder 12 is threaded for connection with nut 13; opposite end 26 is flattened and formed with hole 27 for nailing or bolting to the stud 50 as shown in FIG. 7. Waler holder 12 is installed in the several required locations primarily to keep walers 51 in position. Nails 52 driven through the holes 23 on plate-washer 17 are sufficient to secure a permanent connection between the forms and plate-washer assembly 11.

In FIG. 5 the spreader system of this invention is applied to one type of commercial removable tie 53, possessing a tie rod and elastic sleeve. In this embodiment nut 10 of FIG. 5 will exert force on the plate-washer assembly 11 through the slideable member 18. Consequently, the forms move out or in, depending on the direction of turning or threading keeping the forms in any desired position by the means of the connection between the spreader system and the tie 53 to withstand compressive or tensile forces applied to the forms.

FIG. 6 shows the spreader system with slideable member 18 in its disengaged position, creating no interference to the tie 53 to be completely removed through the hole 21 located on the plate 17. It is evident that adjustment and spreading of the forms is achieved in a simple and effective way without any loose parts forming part of the spreader system. In comparison with conventional exterior spreader systems, which provide fixed distances between forms, the spreader system of this invention offers a continuous range of adjustment for the same tie used in different wall sizes. Positive control of a such adjustment is provided by measuring the lengths of the threaded tie rod ends that are projected beyond the nuts. As a simplification of the adjustment, the tie may be equipped on one threaded end,

with swedgings 54 (on left side of FIG. 5) which will automatically stop and locate nut 10 in a fixed position, leaving only one opposite long threaded tie end for required adjustment by the same means of measuring tie end length projected beyond nut 10. Bearing in mind that usually one side of the forms is set first and braced in the selected proper position, this simplified arrangement advantageously contemplates the longer threaded tie end being installed only on the closing forms which under these circumstances is conveniently adjustable.

FIGS. 8a and 8b illustrates an application of the new spreader system of this invention to another type of tie known commercially as a tapered tie. Basically the same principle of spreader system is used with a simplified adjustment on one side only. Tapered ties 55 have a thread 56 on one end only for connection with nut 10' which is releasably connected to plate-washer assembly 11. On the opposite end, loose nut 10' is eliminated and substituted with permanent head 57 and notch 58 since there is no need for the thread and adjustment on this end. Therefore, this end may be located at the closing form side. Notch 58 corresponds to the notch 14 on the nut' and may be engaged or disengaged with plate-washer assembly 11 by means similar to slidable member 18. It should be obvious that tapered tie 55 may have both ends threaded as with the embodiment of FIG. 5 and FIG. 6. Alternatively, tie 53 of the previous embodiment may have a similar form of spreader arrangement as that in FIGS. 8a and 8b.

From the foregoing description, it will be seen that the present invention provides an improved, simple and economical exterior spreader system with easily achieved adjustment of forms in both directions and with elimination of all loose parts common to conventional spreader systems.

As variations may be made in the form, construction and arrangement of the parts herein, without departing from the spirit and scope of the invention, it is to be understood that all matters are to be interpreted as illustrative and not in any limiting sense.

We claim:

1. An exterior spreader system for threaded end ties having a longitudinal axis and for permitting adjustment of concrete forms in both lateral directions substantially normal to said axis, comprising nut means with notch associated therewith, a platewasher assembly for securement to the adjacent forms and for releasable coupling with the notch and nut means, the nut means with notch being located at one end and forming an integral part of a tie rod, the nut means adapted to bear on the exterior of the plate-washer assembly and the plate-washer assembly including shiftable means for entering into and retracting from the notch, the assembly including a plate and the shiftable means including a washer shiftable connected with the plate, the plate adapted to be nailed to the walers of the forms, the washer having a hole having a portion large enough to permit the notch to project therethrough and another portion of reduced dimension to engage with surfaces of the notch to releasably lock the assembly to the nut means.

2. The invention in accordance with claim 1, wherein a waler holder is coupled with the assembly for connecting walers to the studs of the forms.

3. An exterior spreader system for threaded end ties having a longitudinal axis and for permitting adjustment of concrete forms in both lateral directions substantially normal to said axis, comprising nut means

5

with notch associated therewith, a plate-washer assembly for securement to the adjacent forms and for releasable coupling with the notch and nut means, the nut means with notch forming an integral part of an internally threaded wing nut adapted to be coupled with the threaded end of a tie rod, and the nut means adapted to bear on the exterior of the plate-washer assembly and the plate-washer assembly includes shiftable means for entering into and retracting from the notch, the assembly including a plate and the shiftable means including a washer shiftable connected with the plate, the plate adapted to be nailed to the walers of the forms, the washer having a hole having a portion large enough to permit the notch to project therethrough and another portion of reduced dimension to engage with surfaces of the notch to releasably lock the assembly to the nut means.

4. The invention in accordance with claim 3, wherein a waler holder is coupled with the assembly for connecting walers to the studs of the forms.

5. A concrete form tie rod assembly comprising a tie rod having a longitudinal axis and at least one threaded end, an exterior spreader system for coupling with the threaded end tie and for permitting adjustment of concrete forms in both lateral directions substantially normal to the rod axis comprising nut means with notch associated therewith, a plate-washer assembly for securement to the adjacent forms and for releasable coupling with the notch and nut means, the nut means with notch being located at one end and forming an integral part of a tie rod, the nut means adapted to bear on the exterior of the platewasher assembly and the plate-washer assembly including shiftable means for entering into and retracting from the notch, the assembly including a plate and the shiftable means including a washer shiftable connected with the plate, the plate adapted to be nailed to the walers of the forms, the washer having a hole having a portion large enough to

6

permit the notch to project therethrough and another portion of reduced dimension to engage with surfaces of the notch to releasably lock the assembly to the nut means.

6. The invention in accordance with claim 5, wherein a waler holder is coupled with the assembly for connecting walers to the studs of the forms.

7. The invention in accordance with claim 5, wherein the concrete form tie rod assembly is coupled with a starting and closing form.

8. A concrete form tie rod assembly comprising a tie rod having a longitudinal axis and at least one threaded end, an exterior spreader system for coupling with the threaded end tie and for permitting adjustment of concrete forms in both lateral directions substantially normal to the rod axis comprising nut means with notch associated therewith, a plate-washer assembly for securement to the adjacent forms and for releasable coupling with the notch and nut means, the nut means with notch forming an integral part of an internally threaded wing nut adapted to be coupled with the threaded end of a tie rod, and the nut means adapted to bear on the exterior of the plate-washer assembly and the plate-washer assembly includes shiftable means for entering into and retracting from the notch, the assembly including a plate and the shiftable means including a washer shiftable connected with the plate, the plate adapted to be nailed to the walers of the forms, the washer having a hole having a portion large enough to permit the notch means to project therethrough and another portion of reduced dimension to engage with surfaces of the notch means to releasably lock the assembly to the nut means.

9. The invention in accordance with claim 8, wherein a waler holder is coupled with the assembly for connecting the walers to the studs of the forms.

* * * * *

40

45

50

55

60

65

UNITED STATES PATENT OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 3,920,214

DATED : November 18, 1975

INVENTOR(S) : Peter R. Lovisa, Dusan Tausanovitch, Tullio E. Lovisa

It is certified that error appears in the above-identified patent and that said Letters Patent are hereby corrected as shown below:

Column 4, line 24 change "nut'" to ~~nut~~ 10'--;

Column 4, line 45 change "normal" to --parallel--;

Column 4, line 68 change "normal" to --parallel--;

Column 5, lines 25 and 26 change "normal" to --parallel--;

Column 6, lines 15 and 16 change "normal" to --parallel--.

Signed and Sealed this

twenty-third Day of March 1976

[SEAL]

Attest:

RUTH C. MASON
Attesting Officer

C. MARSHALL DANN
Commissioner of Patents and Trademarks