




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : H01Q 21/20, 3/26, 21/06, 21/22</p>	A1	<p>(11) International Publication Number: WO 00/52787</p> <p>(43) International Publication Date: 8 September 2000 (08.09.00)</p>
<p>(21) International Application Number: PCT/NL00/00124</p> <p>(22) International Filing Date: 28 February 2000 (28.02.00)</p> <p>(30) Priority Data: 1011421 2 March 1999 (02.03.99) NL</p> <p>(71) Applicant (for all designated States except US): NEDERLANDSE ORGANISATIE VOOR TOEGEPAST-NATUURWETENSCHAPPELIJK ON- DERZOEK TNO [NL/NL]; Schoemakerstraat 97, NL-2628 VK Delft (NL).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): SCHOLZ, John, Arthur [NL/NL]; De Poorterstraat 31, NL-2597 CR The Hague (NL).</p> <p>(74) Agent: OTTEVANGERS, S., U.; Vereenigde, Nieuwe Parklaan 97, NL-2587 BN The Hague (NL).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	

(54) Title: VOLUMETRIC PHASED ARRAY ANTENNA SYSTEM

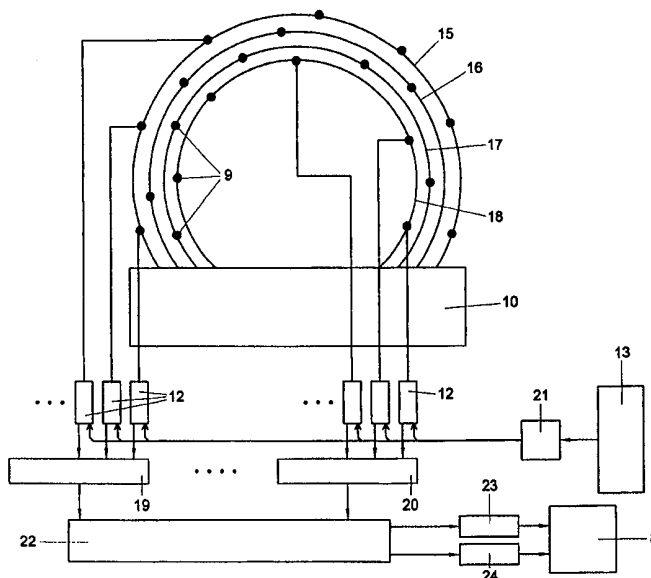

(57) Abstract

A volumetric phased array antenna system comprising a number of antenna elements, each of which is connected to a T/R (transmitter/receiver) module, being under the control of a beam steering computer (BSC), to which T/R module a transmitting signal is fed for forming a transmitting beam, via which T/R modules RF signals are received and via a radar receiver are fed to a signal processing unit connected thereto. The antenna elements are arranged in mutually spaced conformal curved virtual surfaces having the same center of curvature or the same centers of curvature, with each combination of antenna elements in one or more surfaces together forming a volumetric phased array antenna or a part thereof.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Title: Volumetric phased array antenna system

The present invention relates to a volumetric phased array antenna system whose antenna elements are spatially arranged in three dimensions and which is often referred to as Crow's Nest Antenna (CNA).

5 More concretely, the invention relates to a volumetric phased array antenna system comprising a number of antenna elements, each of which is connected to a T/R (transmitter/receiver) module, which is under the control of a beam steering computer (BSC), to which T/R module a
10 transmitting signal is fed for forming a transmitting beam, and via which T/R modules RF signals are received and via a radar receiver are fed to a signal processing unit connected thereto.

As is the case with all antenna systems, the CNA too is
15 sensitive to interference sources, the signals from which are received in the side lobes of the antenna pattern. In military systems, interference signals are produced by the enemy to make intercommunication or target position measurements impossible. In civilian systems, such
20 interference is caused by neighboring transmitting stations or by reflections from nearby objects.

When in the use of conventional radar antenna systems the location of the interference source is not known, use can be made, for the purpose of suppressing such
25 interference or limiting the interference level, of so-called adaptive nulling systems, whereby one or more auxiliary antennas are arranged close to the main antenna. If one interference source is present, one auxiliary antenna is sufficient. The pattern of the main antenna is formed by
30 a strong main lobe and a large number of weak side lobes; the antenna pattern of the auxiliary antenna is formed by a broad lobe which extends over at least the whole angular interval of the pattern of the main antenna, that is, over the entire field of view of the main antenna, but has a
35 strength much smaller than that of the main lobe of the

pattern of the main antenna. In the case of a sufficiently strong interference source, the interference signals received via the side lobes of the pattern of the main antenna may still be stronger than the reflection signals of the radiated radar beam received therein. Via the auxiliary antenna, practically always an interference signal will be received that is stronger than the signal coming from a target. It is known to extract from the target signals and interference signals received by the two antennas the target signal received by the main antenna in the main lobe, using algorithms developed therefor; for this purpose, a so-called nulling processor is used. It is further known, when there are several sources of interference, to also deploy several auxiliary antennas. To obtain maximum signal correlation and the highest possible interference suppression, it is important in these known systems that the auxiliary antennas are arranged close to the main antenna and that they all cover the same field of view of the main antenna. In planar and in linear phased array antennas, this is achieved by placing the auxiliary antennas in the same plane or in the same line as the main antenna. In a CNA this is not possible since there is not any plane containing all antenna elements. A possible solution for suppressing interference from an unknown interference source would be to arrange a large number of auxiliary antennas around the CNA. However, each auxiliary antenna requires its own receiver with pulse compression facility, Doppler processing, and so forth, so that the costs of such a solution become extremely high.

The object of the invention is to provide a design of a volumetric phased array antenna system, such that in a relatively simple manner and at relatively low cost, an efficient suppression of interference can be realized in it.

To achieve this object, according to the invention, the volumetric phased array antenna system such as described in the preamble is characterized in that the antenna elements are arranged in mutually spaced conformal curved virtual

surfaces having the same center of curvature or the same centers of curvature, with each combination of antenna elements in one or more surfaces together forming a volumetric phased array antenna or a part thereof.

5 Insofar as these surfaces have one and the same center of curvature, the virtual surfaces referred to form spherical shells or parts thereof. Thus, for instance, six of such spherical shells can be present, with each spherical shell potentially containing tens to hundreds of antenna
10 elements. When these spherical shells are numbered 1 to 6 from the perimeter to the center, it holds, for instance, that the antenna elements in the outermost shell (shell 1) form an antenna for a weak and narrow beam, that the antenna elements in the innermost shell (shell 6) form an antenna
15 for a weak and wide beam, that the antenna elements in, for instance, the outermost four shells (shells 1-4) form an antenna for a strong and narrow beam, and the antenna elements of the innermost four shells (shells 3-6) form an antenna for a strong and wide beam. It will be clear that
20 all kinds of combinations of shells are possible. Thus, for instance, a main antenna can also be obtained by combining the antenna elements in the shells 1-5, and for the purpose of interference suppression an auxiliary antenna can be obtained by combining, for instance, the antenna elements in
25 the shells 5 and 6. In all of these combinations, it is also possible, as in the planar array systems, to generate antenna patterns with several beams oriented in different directions.

 The antenna elements located on the same virtual
30 surface are connected via a T/R module to a single combination unit, while for an antenna pattern to be formed, a number of these combination units are connected to a further combination unit. If the antenna elements are to form, for instance, two antenna patterns where
35 conventionally two discrete antennas would have to be used, two of such further combination units will be present. In

this way, it is possible to form a fixed combination of antenna patterns, for instance a main antenna pattern and, for the purpose of interference suppression, two auxiliary antenna patterns. In such a situation, separate radar receivers for frequency down-conversion and detection of the radar signals will be connected to the further combination units, whereafter the thus detected signals can be further processed in a nulling processor. More difficult is the situation where the choice of the number of antenna patterns to be formed and the properties thereof has not been fixed. The further combination unit is then formed by a matrix switching unit for forming a number of antenna patterns that is to be set as desired, with beam properties that are to be set as desired. This measure therefore means that the discrete combination units are grouped as desired. This choice can naturally depend on, for instance, the extent of interference suppression in the nulling processor. A consequence of this setup, however, is that the discrete combination units must be connected directly to a radar receiver for frequency down-conversion and detecting the radar signals before these are fed to the matrix switching unit, which may render the costs of the entire radar system high again, after all. In practice, however, in, for instance, an interference suppression system with a main antenna pattern and one or two auxiliary antenna patterns, a fixed grouping of combination units will suffice.

Through the measures according to the invention, the following further advantages are obtained. Because the main antenna and auxiliary antennas are assembled into one integrated whole, this enables proper correlation of the signals obtained via these antennas, and hence proper interference suppression. The number of auxiliary antennas can be set as desired. The auxiliary antennas can be chosen so as to yield, to a considerable extent, the same antenna gain in all directions and hence equal interference suppression in virtually all directions. When the location

of an interference source is known, the auxiliary antenna can be given an increased antenna gain in the direction of the interference source through steering by means of the beam steering computer, thus enabling further improved interference suppression.

In addition to being used for suppressing interference in military and civilian radar systems, the present invention can also be used for communication purposes.

When, for instance, in a communication system two users at widely divergent distances are to be simultaneously served from the same communication station, then, through a different choice of combining shells of antenna elements, two beams in the direction of the respective users can be obtained simultaneously, such that the station is sufficiently sensitive to the distant user, but does not induce any saturation effects in the nearby user; in other words, the dynamic range of the receiving system of the station with an antenna construction according to the invention can be considerably limited.

When, in another example, in a communication system the service of a mobile user from a first station is taken over by a second station, then, after the takeover by the second station, it is possible in the first station, by means of a nulling system therein, to make the first station insensitive in the direction of the mobile user and hence in the direction of the second station.

The invention will now be further elucidated with reference to the accompanying drawings. In the drawings:

Fig. 1 shows a planar array antenna system with a main antenna and an auxiliary antenna on either side thereof;

Fig. 2 shows the receiving pattern of the main antenna and the auxiliary antennas in Fig. 1;

Fig. 3 shows a volumetric phased array antenna system; and

Fig. 4 shows a volumetric phased array antenna system in which the antenna elements are arranged in a shell structure and are combined per shell.

5 Figs. 1 and 2 relate to an antenna system according to the prior art, having a main antenna 1 and two auxiliary antennas 2 and 3. The antennas are of the planar phased array type and have been arranged as close to each other as possible. Only via the main antenna 1 is a beam radiated.
10 The receiving beam pattern of the antenna 1 is represented in Fig. 2 and comprises a main lobe 4 and a large number of side lobes 5. The signals stemming from a target and received within the narrow main lobe are relatively strong; the signals from the target that are received outside the
15 main lobe rapidly decrease in strength with increasing angular deviation. The receiving beam pattern 6 of the auxiliary antennas covers the entire field of view of the main antenna, and with increasing angular deviation the received signals from the target decrease only very little
20 in strength. In addition, in Fig. 2 an interference source 7 is indicated. The signals stemming from the target and the signals stemming from the interference source are received by both the main antenna and the two auxiliary antennas and, in receivers not shown, subjected to frequency
25 down-conversion and detected. The signals obtained are processed in a processing unit, in particular a nulling processor 8, whereby the unwanted interference signals are suppressed.

As already mentioned earlier, such a system does not
30 straightforwardly work in the case of a volumetric phased array antenna. Such an antenna is depicted in Fig. 3. In this figure, only a limited number of spatially positioned antenna elements 9 are represented. In practice, this number will be much greater, even up to many thousands. The antenna
35 elements 9 are disposed above a base 10. The support of the antenna elements is here formed by coax connections 11.

Through these coax connections, each antenna element 9 is connected to a T/R module 12. These T/R modules in turn are connected to a transmitter 13 and a receiver 14. Signals are transmitted via the transmitter 13, the T/R modules 12 and the antenna elements 9 connected thereto, and signals are received via the antenna elements 9, the T/R modules 12 and the receiver 14. In the presence of the interference source 7 of Fig. 2, both signals reflected by the target and signals coming from the interference source are received. To still enable the interference signals to be suppressed, use is to be made again of discrete auxiliary antennas as indicated in Fig. 1, unless special measures are taken. These measures require a special manner of positioning the antenna elements 9. According to the invention, therefore, the antenna elements are disposed, in the present exemplary embodiment, so as to lie on concentric virtual surfaces of a sphere; these surfaces of a sphere are hereinafter referred to as shells. In Fig. 4, four of such shells 15-18 are indicated. When the total number of antenna elements runs up to many thousands, the number of shells can also be considerably greater. To each of the antenna elements, again a T/R module 12 is connected. The T/R modules of the antenna elements 9 belonging to a shell are connected to a combination unit. Accordingly, there are as many combination units as there are shells. In Fig. 4, only the combination units 19 and 20 are represented, which are connected to the T/R modules for the antenna elements 9 in the shells 15 and 18. A transmitting signal is transmitted by the transmitter 13 via the distributing unit 21, the T/R modules 12 and the antenna elements 9. The signals received via the antenna elements 9 and the T/R modules 12 are combined per shell in the combination units. In the matrix switching unit 22, the information from the separate units is combined. For obtaining a beam pattern for a main antenna, for instance all shells are combined in the matrix switching unit 22. This means that the signals of all combination units

together represent the signal received by this main antenna. This signal is fed to the main antenna receiver 23 to be frequency converted and detected. For obtaining an auxiliary antenna, for instance the shells 17 and 18 are combined in the matrix switching unit 22. This means that the signals of only two combination units together represent the signal received by this auxiliary antenna. This signal is fed to the auxiliary antenna receiver 24 to be likewise frequency converted and detected. The thus detected signals are fed from the receivers 23 and 24 to the nulling processor 8 for suppressing any interference signals. Although in this exemplary embodiment the matrix switching unit 22 is tailored to a fixed shell combination, it can also be set each time, viz. by each time selecting a discrete antenna pattern tailored to a specific application, through a corresponding combination of shells. Given a large number of shells, a great multiplicity of combinations of shells are possible. In that case, it is more favorable to arrange a receiver at the output of each combination unit, and to combine the frequency converted and detected signals in the matrix switching unit 22.

The invention is not limited to the embodiment described with reference to Fig. 4, but comprises all kinds of modifications thereof, naturally insofar as they fall within the scope of protection of the following claims. It is noted here that the nulling processor forms part of a signal processing unit, in which in addition to interference suppression further video signal processing can take place.

CLAIMS

1. A volumetric phased array antenna system comprising a number of antenna elements, each of which is connected to a T/R (transmitter/receiver) module, which is under the control of a beam steering computer (BSC), to which T/R
5 module a transmitting signal is fed for forming a transmitting beam, and via which T/R modules RF signals are received and via a radar receiver are fed to a signal processing unit connected thereto, characterized in that the antenna elements are arranged in mutually spaced conformal
10 curved virtual surfaces having the same center of curvature or the same centers of curvature, with each combination of antenna elements in one or more surfaces together forming a volumetric phased array antenna or a part thereof.
2. A volumetric phased array antenna system according to claim 1, characterized in that the antenna elements located
15 on the same virtual surface are connected via a T/R module to a single combination unit.
3. A volumetric phased array antenna system according to claim 2, characterized in that for an antenna pattern to be
20 formed, a number of combination units are connected to a further combination unit.
4. A volumetric phased array antenna system according to claim 3, characterized in that the further combination unit is formed by a matrix switching unit for forming a number of
25 antenna patterns to be set as desired, with beam properties to be set as desired.

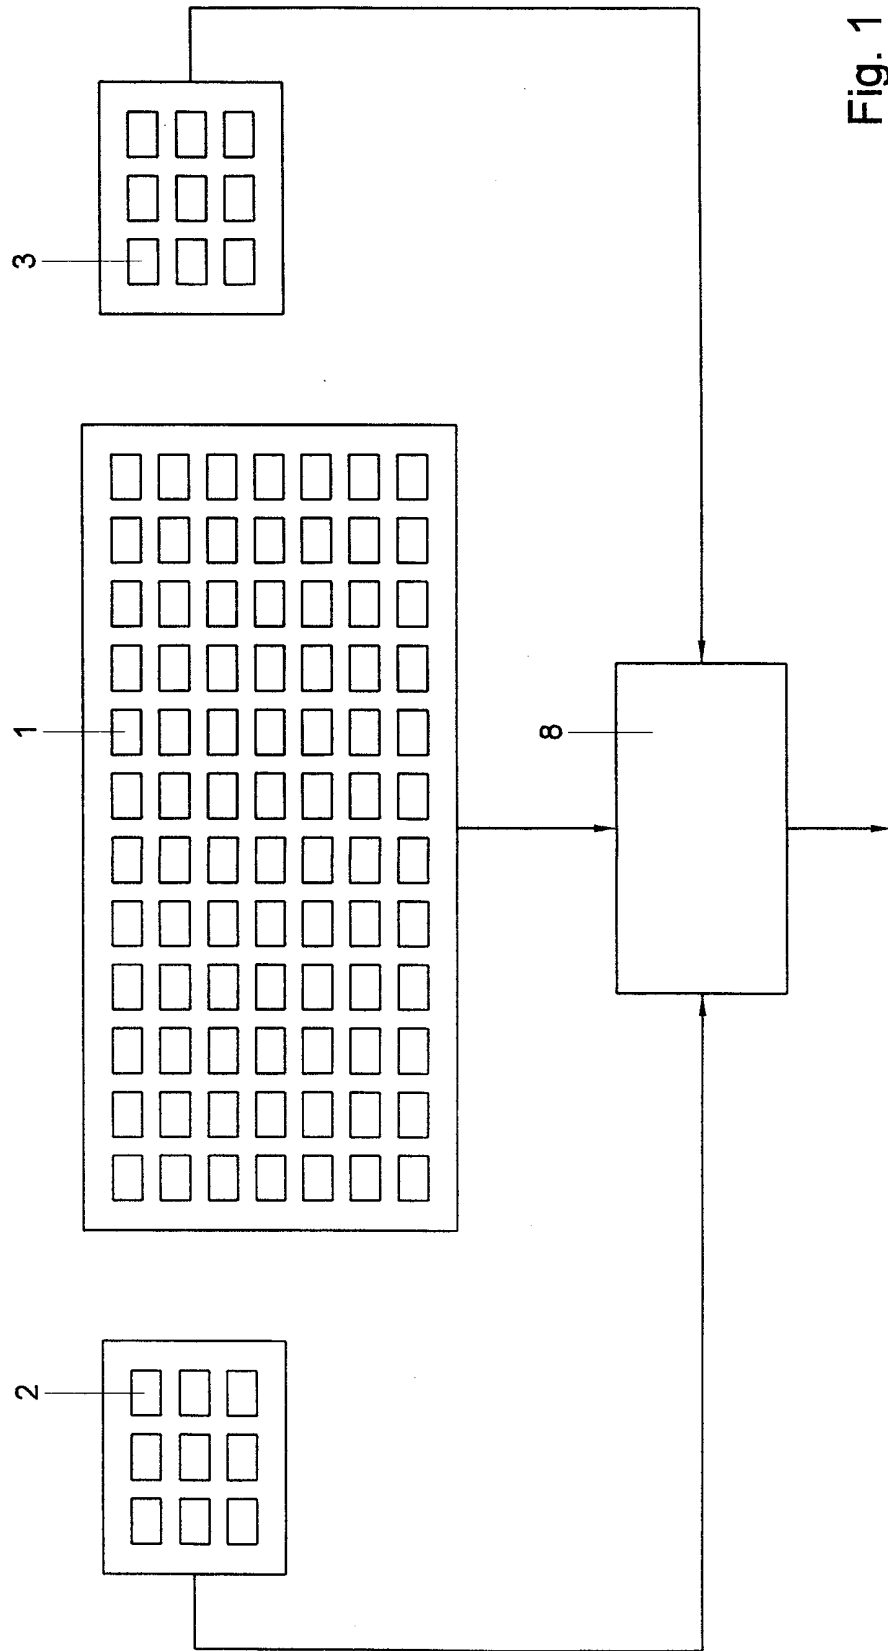
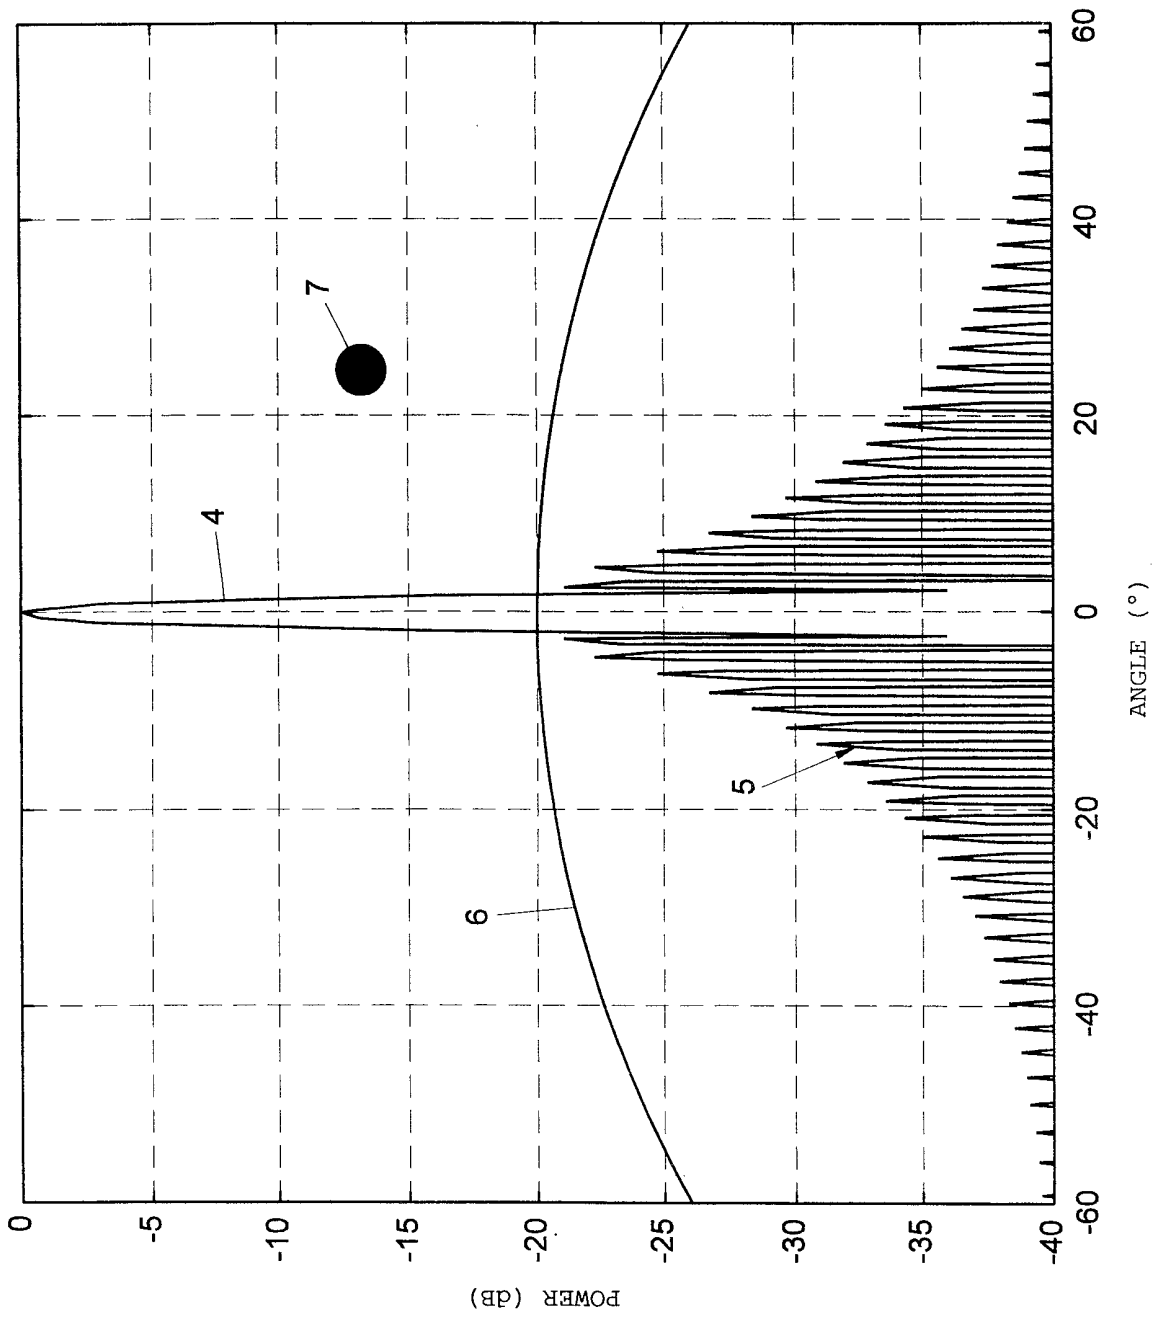


Fig. 2



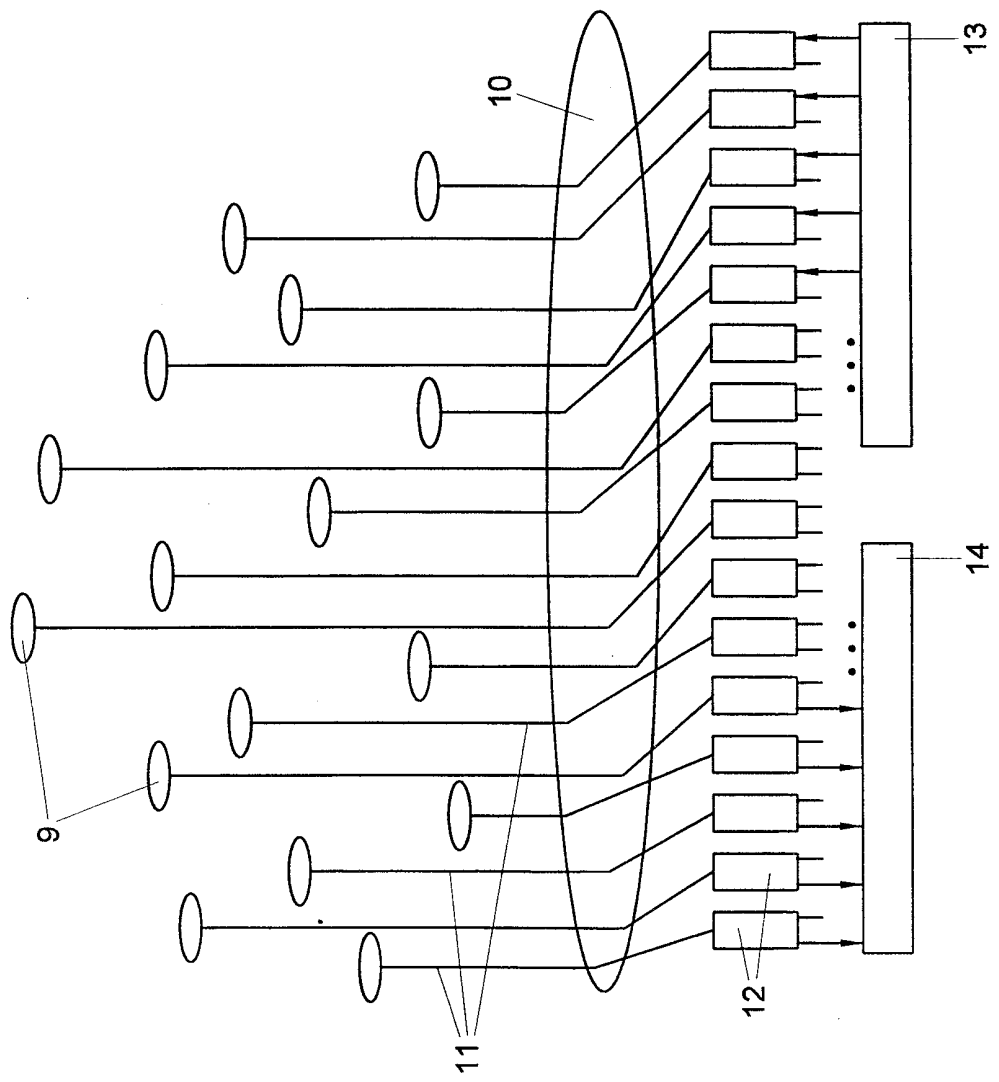


Fig. 3

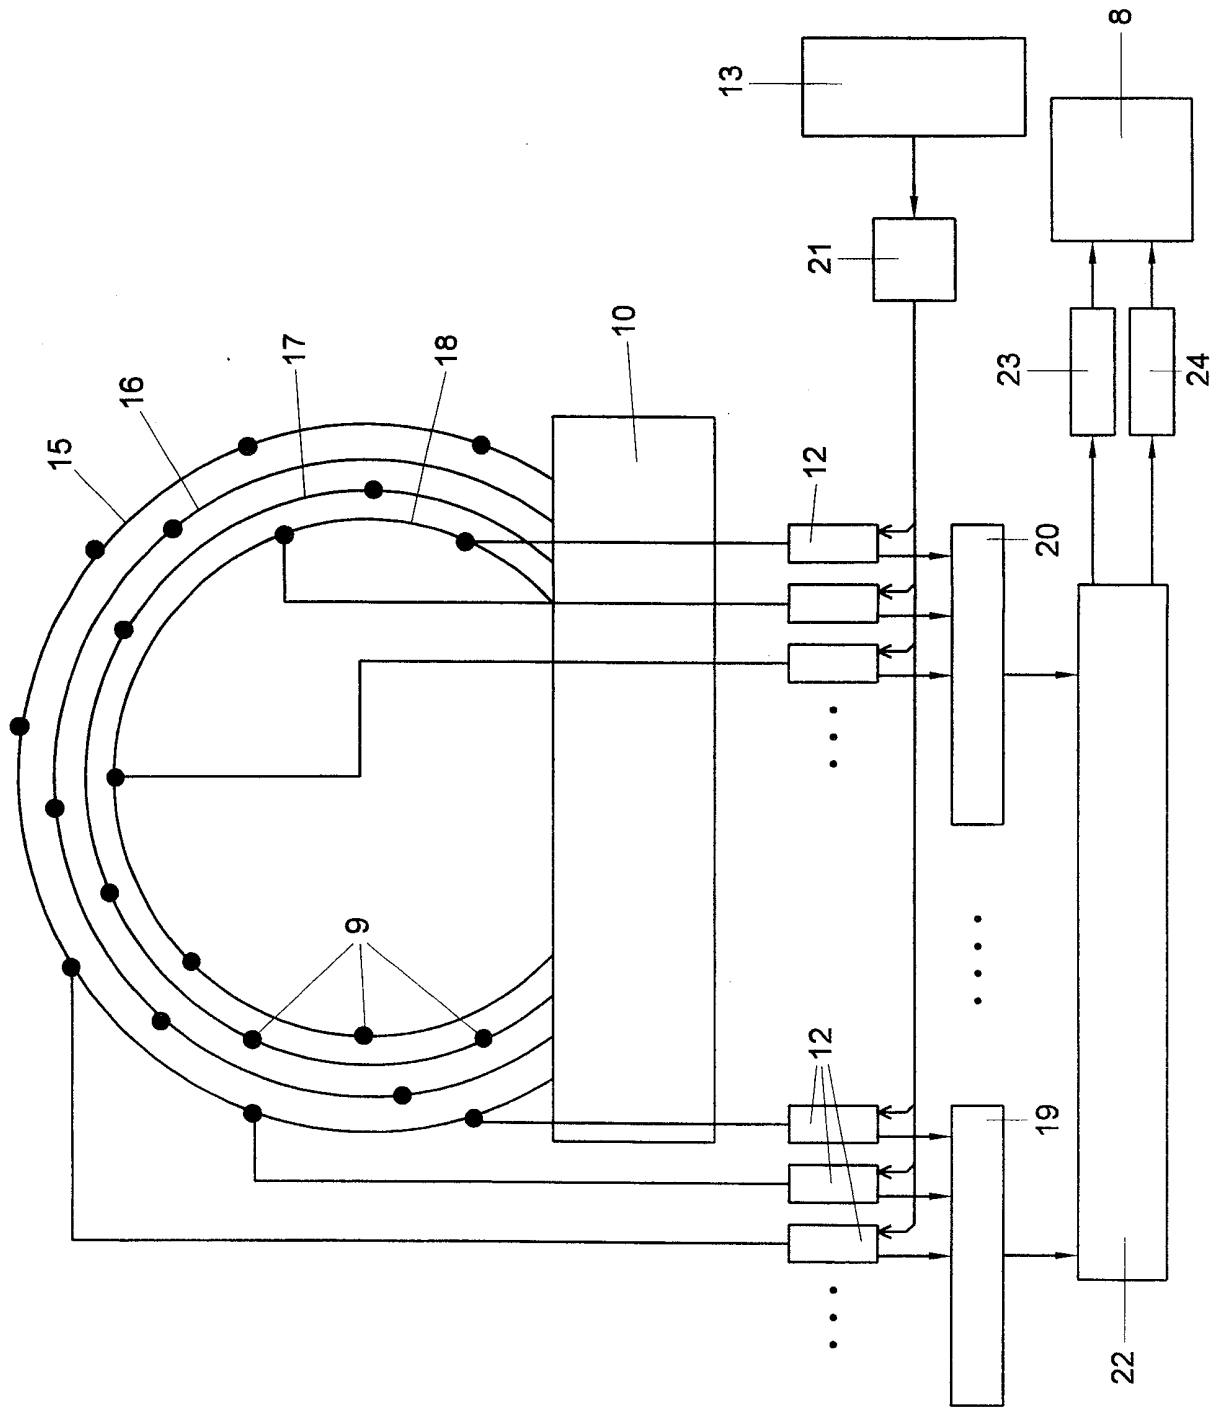


Fig. 4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/NL 00/00124

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H01Q21/20 H01Q3/26 H01Q21/06 H01Q21/22				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) IPC 7 H01Q				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
Y	WILDEN H: "The crow's-nest radar-an omnidirectional phased array system" IEEE 1980 INTERNATIONAL RADAR CONFERENCE, 28 - 30 April 1980, pages 253-258, XP002118329 Arlington, VA, USA the whole document	1,2		
A	---	3,4		
Y	US 3 152 330 A (CHATELAIN M G) 6 October 1964 (1964-10-06) the whole document	1,2		
A	---	3,4		
A	US 5 038 149 A (AUBRY CLAUDE ET AL) 6 August 1991 (1991-08-06) column 4, line 44 -column 6, line 25; figures 1,2	1		
--- -/--				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.				
<input checked="" type="checkbox"/> Patent family members are listed in annex.				
* Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family			
Date of the actual completion of the international search <p style="text-align: center; font-size: 1.2em;">8 May 2000</p>	Date of mailing of the international search report <p style="text-align: center; font-size: 1.2em;">15/05/2000</p>			
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer <p style="text-align: center; font-size: 1.2em;">Van Dooren, G</p>			

INTERNATIONAL SEARCH REPORT

International Application No

PCT/NL 00/00124

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 734 700 A (BRUNNER ANTON) 29 March 1988 (1988-03-29) column 5, line 31 -column 6, line 5; figure 5 ----	1
A	US 3 680 112 A (THOMAS RICHARD K) 25 July 1972 (1972-07-25) column 2, line 38 -column 4, line 36; claim 1; figure 1 ----	1
A	DE 26 34 111 A (MEINKE HANS HEINRICH PROF DR) 2 February 1978 (1978-02-02) claim 1 -----	3,4

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/NL 00/00124

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3152330 A	06-10-1964	NONE	
US 5038149 A	06-08-1991	FR 2640821 A DE 68907575 T EP 0374008 A	22-06-1990 27-01-1994 20-06-1990
US 4734700 A	29-03-1988	EP 0207511 A	07-01-1987
US 3680112 A	25-07-1972	NONE	
DE 2634111 A	02-02-1978	NONE	