



(51) International Patent Classification:

A43B 13/12 (2006.01) A43B 17/00 (2006.01)  
A43B 13/04 (2006.01)

(21) International Application Number:

PCT/US2019/027752

(22) International Filing Date:

16 April 2019 (16.04.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/658,161 16 April 2018 (16.04.2018) US

(71) Applicant: **COLUMBIA SPORTSWEAR NORTH AMERICA, INC.** [US/US]; 14375 NW Science Park Drive, Portland, OR 97229 (US).

(72) Inventors: **WEI, Yi, Jiang**; 14375 NW Science Park Drive, Portland, OR 97229 (US). **BECKHAM, Haskell**; 14375 NW Science Park Drive, Portland, OR 97229 (US).

**BANIK, Gary, John**; 14375 NW Science Park Drive, Portland, OR 97229 (US).


(74) Agent: **GRISWOLD, Ian, J.**; SCHWABE, WILLIAMSON & WYATT, P.C., Pacwest Center, 1211 SW 5th Avenue, Suite 1900, Portland, OR 97204 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: COMPOSITE FOAM FOR MIDSOLE

FIG. 1

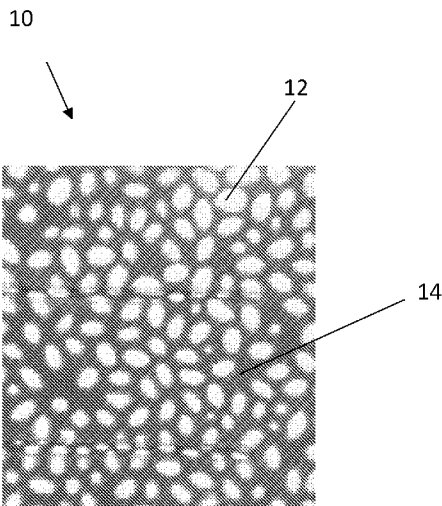

(57) Abstract: Embodiments herein relate generally to the field of footwear, and more particularly to components of performance footwear, such as midsoles, and in particular related to a high performance composite foam for a midsole, the composite foam comprising: a pelletized expanded thermoplastic elastomer; and a polyurethane (PU) matrix, wherein the pelletized expanded thermoplastic elastomer is mixed within the PU matrix. Midsoles made from a high performance composite foam and footwear including such midsoles. A method of making a high performance midsole is also provided.



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

## COMPOSITE FOAM FOR MIDSOLE

### Cross-Reference to Related Application

[0001] This application claims the right of priority to and benefit of earlier filing date of U.S. Provisional Application No. 62/658,161, filed on April 16, 2018, which is hereby incorporated herein by reference in its entirety.

### Technical Field

[0002] Embodiments herein relate generally to the field of footwear, and more particularly to foam for components of performance footwear, such as midsoles.

### Background

[0003] Performance athletic footwear typically includes two primary components, an upper and a sole. The upper provides a covering for the foot and positions the foot with respect to the sole. The sole is coupled to the upper and is generally configured to contact the ground during impact. In modern shoe design the sole provides cushioning during impact, traction, and motion control.

[0004] The structure of the sole portion of a performance athletic shoe typically has a layered configuration that may include an insole, a resilient midsole formed from a polymer foam material, and a ground-contacting outsole that provides both abrasion-resistance and traction. The midsole is the primary structural element that provides cushioning and motion control. In many if not most performance athletic shoes, the midsole is made from a polymer foam. Polymer foams are particularly suited for use in midsole construction because their compression and resiliency attenuate reaction forces created by impact with the ground. Conventional polymer foam materials are resiliently compressible, in part, due to the

inclusion of a plurality of open or closed cells that define an inner volume substantially displaced by gas.

### **Brief Description of the Drawings**

[0005] Embodiments will be readily understood by the following detailed description in conjunction with the accompanying drawings. Embodiments are illustrated by way of example and not by way of limitation in the figures of the accompanying drawings.

[0006] Figure 1 is a digital image of an exemplary composite foam for a midsole, in accordance with various embodiments.

[0007] Figure 2 is a digital image of a toe to heel cross-sectional slice of an exemplary composite foam for a midsole, in accordance with various embodiments.

[0008] Figure 3 is a digital image of the exemplary composite foam of Figure 2 looking down (from the insole orientation), in accordance with various embodiments.

[0009] Figure 4 is a digital image of pelletized foam material used in a composite foam, in accordance with various embodiments.

[0010] Figures 5A-5C are digital images showing the delamination/degranulation of test foams not encompassed by this disclosure.

[0011] Figures 6A and 6B are digital images showing a midsole composed of a composite foam, in accordance with various embodiments.

### **Detailed Description of Disclosed Embodiments**

[0012] In the following detailed description, reference is made to the accompanying drawings which form a part hereof, and in which are shown by way of illustration embodiments that may be practiced. It is to be understood that other embodiments may be utilized and structural or logical changes may be made without departing from the scope.

Therefore, the following detailed description is not to be taken in a limiting sense, and the scope of embodiments is defined by the appended claims and their equivalents.

[0013] Various operations may be described as multiple discrete operations in turn, in a manner that may be helpful in understanding embodiments; however, the order of description should not be construed to imply that these operations are order dependent.

[0014] The description may use perspective-based descriptions such as up/down, back/front, and top/bottom. Such descriptions are merely used to facilitate the discussion and are not intended to restrict the application of disclosed embodiments.

[0015] The terms “coupled” and “connected,” along with their derivatives, may be used. It should be understood that these terms are not intended as synonyms for each other. Rather, in particular embodiments, “connected” may be used to indicate that two or more elements are in direct physical contact with each other. “Coupled” may mean that two or more elements are in direct physical or electrical contact. However, “coupled” may also mean that two or more elements are not in direct contact with each other, but yet still cooperate or interact with each other.

[0016] For the purposes of the description, a phrase in the form “A/B” or in the form “A and/or B” means (A), (B), or (A and B). For the purposes of the description, a phrase in the form “at least one of A, B, and C” means (A), (B), (C), (A and B), (A and C), (B and C), or (A, B and C). For the purposes of the description, a phrase in the form “(A)B” means (B) or (AB) that is, A is an optional element.

[0017] The description may use the terms “embodiment” or “embodiments,” which may each refer to one or more of the same or different embodiments. Furthermore, the terms “comprising,” “including,” “having,” and the like, as used with respect to embodiments, are synonymous.

**[0018]** Disclosed here is a composite foam for use in a midsole of performance footwear. While certain embodiments are discussed with reference to performance footwear such as running shoes, embodiments herein may be applicable to a wide variety of activities, such as running and hiking; various sports, such as volleyball, basketball, and tennis; various professions, such as medical, industrial, safety, rescue, and military, and other suitable applications.

**[0019]** Foams used for midsole applications are expected to be lightweight, cushion, but rebound. Over time, the repeated compression-and-release that a midsole foam undergoes leads to 'set', meaning that it does not rebound as much as it did when it was new. It gets "set", typically to some increasing extent, in its compressed state. This is known in the industry as 'pack out'. It is desirable to have a midsole foam with high values of rebound, also known as resilience, and low values of compression set, while being lightweight.

**[0020]** The composite foam compositions disclosed herein include one or more expanded thermoplastic elastomers, such as an expanded thermoplastic polyester elastomer (eTPEE), an expanded thermoplastic poly(ether-amide) (eTPEA) (e.g., a block copolymer with polyether and polyamide backbone blocks), an expanded thermoplastic polyolefin (eTPO), or an expanded blend of polymers in a pelletized form that is embedded within a polyurethane (PU) matrix (see, e.g. Figures 1-4). In embodiments, an expanded thermoplastic elastomer includes one or more different thermoplastic elastomers, such as described above.

**[0021]** Although the pellets are within the matrix, some of the pellet surfaces may be visible on the exterior surface of a midsole made from such foams, see for example Figures 6A and 6B. One of the features that makes composite foams so useful, is that the properties of both the expanded thermoplastic elastomer and PU can be tuned independently to create a composite that exhibits a combination of properties that cannot be otherwise achieved,

especially by blending the two materials which generally leads to averaging of the physical properties, and a resultant compromised product.

[0022] However, a major challenge in creating composites for applications in which the composite will be flexed or otherwise stressed is insufficient bonding at the interface between the two components, in this case the expanded thermoplastic elastomer and PU interface. Because the two primary components of the disclosed composite foam are two different polymers there is an expectation that the interface would not be of sufficient strength to resist delamination and/or degranulation resulting in mechanical failure at the interface, e.g. splitting. This expectation was based in part on the finding that early composite foams composed of an expanded thermoplastic polyurethane (eTPU) and a polyurethane (PU) failed at the intermaterial interface (see e.g., Figures. 5A-5C). Thus, even though the components in the early composite foams were both polyurethanes, the bonding at the interface was not good enough to withstand flexing during wear tests. One of ordinary skill in the art would not expect bonding to be improved by changing one of the components to a different material type. More likely the expectation would be that adhesives or surface modification protocols, with the added cost and manufacturing step involved, would need to be considered. The expectation would have been that a composite of two linked materials (the expanded thermoplastic polyurethane pellets and the polyurethane matrix) would have had a significantly higher bond strength at the interface than a pelletized expanded thermoplastic polyester or block copolymer elastomer and polyurethane matrix. Surprisingly however, when evaluating alternative composite foam compositions, a composite of eTPEE and PU was found to have a significantly higher interface bond strength than eTPU/PU composite (20 N/cm for the eTPEE/PU composite vs. 9 N/cm for the eTPU/PU composite). While eTPU/PU hybrid composites can be manufactured with better interfacial bond strength, they

have not been observed to exhibit the overall combination of physical properties that the eTPEE/PU and eTPEA/PU hybrid composites exhibit.

[0023] Furthermore, this increase in interface bond strength was not made at the expense of other desirable characteristics. As shown in Table 1 below, the eTPEE/PU maintained desirable characteristics for a performance foam, such as hardness, resilience and compression set while having an increased wear resistance over the eTPU/PU composite, as shown by the split tear results.

**Table 1**

	eTPU	PU	eTPU/PU	eTPEE/PU	eTPEA/PU
<b>Hardness<sup>a</sup></b> <b>(Asker Scale)</b>	40C	35C	45C	42C	45C
<b>Density<sup>b</sup></b> <b>(g/cm<sup>3</sup>)</b>	0.22	0.31	0.30	0.30	0.19
<b>Split Tear<sup>c</sup></b> <b>(N/cm)</b>	>27	12.5	9	20	26
<b>Resilience<sup>d</sup></b>	55%	42%	53%	55%	64%
<b>Compression</b> <b>Set<sup>e</sup></b>	45-50%	15%	51%	32%	33%

<sup>a</sup> ASTM D-2240, Satra TM205-99

<sup>b</sup> Satra TM134-98

<sup>c</sup> Satra TM65

<sup>d</sup> ASTM D2632

<sup>e</sup> ASTM D395



[0024] With reference to Table 1, the eTPEE/PU and eTPEA/PU heterogeneous composites exhibit the best combination of high resiliency with low compression set. The high resiliency measured demonstrates a high rebound and high energy return, which are desired features for high performance footwear. The low value for compression also demonstrates the high durability of the composite foam. As previously described, the split tear strength is, for the heterogeneous composite materials, an indication of the interfacial bond strength, and how well the material can withstand flexing. The same wear trials that resulted in the poor interfacial bonding exemplified by Figures 5A-5C have been successfully tried on footwear made from eTPEE/PU composite midsoles, resulting in no delamination or degranulation failure. Similar results were observed for the interface of the ePEA and PU. The eTPEE/PU hybrid exhibits higher energy return than the PU, eTPU, and eTPU/PU hybrid materials. The dynamic compression set for the eTPEE/PU hybrid is also lower than the dynamic compression set for the eTPU and eTPU/PU hybrid materials. Lower density hybrid composites can be made using Pebax® (Arkema), a poly(ether amide), without significantly compromising the energy return. While the PU exhibits lower dynamic compression set (3%), it also exhibits lower energy return. By combining the PU and eTPEE to make a hybrid composite, a cushioning material can be made with high energy return and low compression set.

[0025] The disclosed composite foam composition includes an expanded thermoplastic elastomer in a pelletized form embedded within a polyurethane (PU) matrix, such as eTPEE, eTPEA, eTPO, or an expanded blend of polymers. In embodiments, the expanded thermoplastic elastomer pellets are generally spheroid in shape with major and minor axes ranging between about 1 mm to about 12 mm, such as about 2 mm to about 8 mm. In embodiments, the expanded thermoplastic elastomer pellets have a density of between about 0.06 g/cm<sup>3</sup> and about 0.20 g/cm<sup>3</sup>, such as about 0.11 g/cm<sup>3</sup> or 0.13 g/cm<sup>3</sup>. This

low density combined with other properties, such as a resilience of greater than about 50% or 60%, provides a foam material useful as a midsole for performance footwear.

**[0026]** In an example, the disclosed composite foam composition includes an expanded thermoplastic polyester elastomer (eTPEE) in a pelletized form embedded within a polyurethane (PU) matrix. In embodiments, the eTPEE pellets are generally spheroid in shape with major and minor axes ranging between about 1 mm to about 12 mm, such as about 2 mm to about 8 mm. In embodiments, the eTPEE pellets have a density of between about 0.08 g/cm<sup>3</sup> and about 0.20 g/cm<sup>3</sup>, such as about 0.13 g/cm<sup>3</sup>. This low density combined with other properties, such as a resilience of greater than about 50%, provides a foam material useful as a midsole for performance footwear.

**[0027]** In an example, disclosed composite foam composition includes an expanded thermoplastic poly(ether amide) (eTPEA) in a pelletized form embedded within a polyurethane (PU) matrix. In embodiments, the eTPEA pellets are generally spheroid in shape with major and minor axes ranging between about 1 mm to about 12 mm, such as about 2 mm to about 8 mm. In embodiments, the eTPEA pellets have a density of between about 0.08 g/cm<sup>3</sup> and about 0.20 g/cm<sup>3</sup>, such as about 0.11 g/cm<sup>3</sup>. This low density combined with other properties, such as a resilience of greater than about 60%, provides a foam material useful as a midsole for performance footwear.

**[0028]** In another example, disclosed composite foam composition includes an expanded thermoplastic polyolefin (eTPO) in a pelletized form embedded within a polyurethane (PU) matrix. In embodiments, the eTPO pellets are generally spheroid in shape with major and minor axes ranging between about 1 mm to about 12 mm, such as about 2 mm to about 8 mm. In embodiments, the eTPO pellets have a density of between about 0.08 g/cm<sup>3</sup> and about 0.20 g/cm<sup>3</sup>. This low density combined with other properties, such as a

resilience of greater than about 60%, provides a foam material useful as a midsole for performance footwear.

**[0029]** In an example, disclosed composite foam composition includes a blend of polymers, e.g., an expanded blend of polymers in a pelletized form embedded within a polyurethane (PU) matrix. In embodiments, the pellets are generally spheroid in shape with major and minor axes ranging between about 1 mm to about 12 mm, such as about 2 mm to about 8 mm. In embodiments, the pellets have a density of between about 0.08 g/cm<sup>3</sup> and about 0.20 g/cm<sup>3</sup>. This low density combined with other properties, such as a resilience of greater than about 60%, provides a foam material useful as a midsole for performance footwear.

**[0030]** In an embodiment, the composite foam is prepared by mixing the expanded thermoplastic elastomer pellets with a polyisocyanate and a polyol prepolymer containing chain extender, water, pigment, stabilizers, and other additives, to form a slurry. The mixing ratio of polyisocyanate to polyol prepolymer is in the range of 0.5 to 1.5, depending on specific chemical structure of each component and the processing conditions. In another embodiment, the composite foam is prepared by mixing the expanded thermoplastic elastomer pellets with a single-component polyurethane prepolymer containing blowing agent, pigment, stabilizers, and other additives, to form a slurry. The weight percentage of expanded thermoplastic elastomer pellets to PU is 40% to 70%. The mixing occurs at 40 to 50 °C, and the slurry is then poured into a mold for PU expansion and curing. The top plate of the mold is closed, and then the expansion and curing occurs over the course of 5 to 20 minutes, about half of which time the mold is 60 to 80 °C. In some manufacturing process set-ups, the expansion and curing time may be shortened by using molds that allow more efficient heat maintenance and transfer

[0031] In embodiments, a formed midsole made from a disclosed composite foam has a density of about 0.10 g/cm<sup>3</sup> to about 0.40 g/cm<sup>3</sup>, such as about 0.2 g/cm<sup>3</sup> or 0.3 g/cm<sup>3</sup>. In embodiments, a formed midsole made from a disclosed composite foam has an Asker hardness of at least 35C, for example greater than about 40C, such as between about 40C and about 55C, e.g. about 42C. In embodiments, a formed midsole made from a disclosed composite foam has a split tear value of at least 15 N/cm, for example at least 16, 17, 18, 19, 20, 25, 30 and 35 N/cm, such as between about 18 and about 28 N/cm, e.g., about 20 N/cm or 26 N/cm. In embodiments, a formed midsole made from a disclosed composite foam has a resilience of at least about 40%, such as at least 45%, at least 46%, at least 47%, at least 48%, at least 49%, or at least 50%, for example between about 50% and 70%, such as about 55%, 64%, or 68%. In embodiments, a formed midsole made from a disclosed composite foam has a dynamic compression set below about 12%, such as below about 11%, 10%, 9%, 8%, or even 7%.

[0032] Figures 1-3 are digital images of composite foams, in accordance with various embodiments. Figure 1 is a digital image of an exemplary composite foam 10 for a midsole, in accordance with various embodiments. Figure 2 is a digital image of a toe to heel cross-sectional slice of an exemplary composite foam 10 for a midsole, in accordance with various embodiments. Figure 3 is a digital image of the exemplary composite foam 10 of Figure 2 looking down (from the insole orientation), in accordance with various embodiments. With reference to Figures 1-3, the composite foam 10 is composed of expanded thermoplastic elastomer pellets 12 (eTPEE pellets in this example) homogenously mixed (mixed throughout in a substantially uniform distribution) within a PU matrix 14. Figure 4 is a close up of the expanded thermoplastic elastomer pellets 12 prior to mixing with the PU. Figures 6A and 6B are digital images showing a midsole 20 composed of a composite foam 10, in accordance with various embodiments.

**[0033] Example 1**

**[0034]** Slabs of eTPU/PU and eTPEE/PU hybrid composites were prepared at the same 60/40 weight percentages of expanded pellets to PU resin. Slabs of eTPEA/PU hybrid composites were prepared at a 50/50 weight percentage. Data were collected and are shown in the table below.

	Density (g/cm <sup>3</sup> )	Energy Return <sup>a</sup>	Dynamic Compression Set <sup>b</sup>
PU	0.30	57%	3%
eTPU	0.24	57%	10%
eTPU/PU	0.19	56%	12%
eTPEE/PU	0.29	65%	7%
eTPEA/PU	0.20	62%	7%

<sup>a</sup>ASTM F1976

<sup>b</sup>Measured after 100,000 degradation cycles, simulating a 100-mile run based on an average stride length of a male runner.

**[0035]** Data are averages of two measurements. Dynamic compression set measured after 100,000 degradation cycles (5 J), simulating a 100-mile run based on an average stride length of a male runner, using a custom-built degradation machine. Samples were slabs molded to be between 18 and 26 mm thick. After 100,000 cycles, slabs were allowed to recover for 1 hour and then the thickness measured. The difference between this measured thickness and the original thickness were used to compute the dynamic compression set. Energy return was measured in an impact device.

**[0036]** The eTPEE/PU and eTPEA/PU hybrid composites exhibit higher energy return than the PU, eTPU, and eTPU/PU hybrid materials. The dynamic compression set for the eTPEE/PU and eTPEA/PU hybrids is also lower than the dynamic compression set for the

eTPU and eTPU/PU hybrid materials. Lower density hybrid composites can be made using expanded poly(ether amide) pellets, without significantly compromising the energy return. While the PU exhibits lower dynamic compression set (3%), it also exhibits lower energy return. By combining the PU and expanded thermoplastic elastomer to make a hybrid composite, a cushioning material can be made with high energy return and low compression set.

Although certain embodiments have been illustrated and described herein, it will be appreciated by those of ordinary skill in the art that a wide variety of alternate and/or equivalent embodiments or implementations calculated to achieve the same purposes may be substituted for the embodiments shown and described without departing from the scope. Those with skill in the art will readily appreciate that embodiments may be implemented in a very wide variety of ways. This application is intended to cover any adaptations or variations of the embodiments discussed herein. Therefore, it is manifestly intended that embodiments be limited only by the claims and the equivalents thereof.

## Claims

What is claimed is:

1. A high performance composite foam for a midsole comprising:  
a pelletized expanded thermoplastic elastomer; and  
a polyurethane (PU) matrix, wherein the pelletized expanded thermoplastic elastomer is mixed within the PU matrix.
2. The high performance composite foam of claim 1, wherein the pelletized expanded thermoplastic elastomer comprises an expanded thermoplastic polyester elastomer.
3. The high performance composite foam of claim 1, wherein the pelletized expanded thermoplastic elastomer comprises an expanded thermoplastic poly(ether amide) elastomer.
4. The high performance composite foam of claim 1, wherein the pelletized expanded thermoplastic elastomer comprises an expanded thermoplastic polyolefin.
5. The high performance composite foam of claim 1, wherein the pelletized expanded thermoplastic elastomer comprises an expanded blend of thermoplastic polymers.
6. The high performance composite foam of claim 1, wherein the pelletized expanded thermoplastic elastomer is generally spheroid in shape with major and minor axes ranging between about 1 mm to about 12 mm.

7. The high performance composite foam of claim 1, wherein the pelletized expanded thermoplastic elastomer pellets have a density of between about 0.06 g/cm<sup>3</sup> and about 0.20 g/cm<sup>3</sup>.

8. The high performance composite foam of claim 1, wherein the PU matrix is prepared from one or more polyisocyanates and one or more polyols.

9. The high performance composite foam of claim 1, wherein the composite foam has a density of about 0.18 g/cm<sup>3</sup> to about 0.40 g/cm<sup>3</sup>.

10. The high performance composite foam of claim 1, wherein the composite foam has an Asker hardness at least 35C.

11. The high performance composite foam of claim 1, wherein the composite foam has a split tear value of at least 15 N/cm.

12. The high performance composite foam of claim 1, wherein the composite foam has a resilience of at least about 40%.

13. The high performance composite foam of claim 1, wherein the composite foam has dynamic compression set below about 12%.

14. The high performance composite foam of claim 1, wherein the expanded thermoplastic elastomer is mixed homogenously within the PU matrix.



15. A midsole for footwear comprising the high performance composite foam of claim 1.
16. An article of footwear comprising the midsole of claim 15.
17. A method of making a high performance midsole comprising:  
mixing a pelletized expanded thermoplastic elastomer and a polyurethane (PU) matrix; and molding the expanded thermoplastic elastomer PU mixture to form the midsole.
18. The method of claim 17, wherein the pelletized expanded thermoplastic elastomer comprises an expanded thermoplastic polyester elastomer.
19. The method of claim 17, wherein the pelletized expanded thermoplastic elastomer comprises an expanded thermoplastic poly(ether amide) elastomer.
20. The method of claim 17, wherein the pelletized expanded thermoplastic elastomer comprises an expanded thermoplastic polyolefin.
21. The method of claim 17, wherein the pelletized expanded thermoplastic elastomer comprises an expanded blend of thermoplastic polymers.
22. The method of claim 17, wherein the pelletized expanded thermoplastic elastomer is generally spheroid in shape with major and minor axes ranging between about 1 mm to about 12 mm.

23. The method of claim 17, further comprising preparing the PU matrix from one or more polyisocyanates and one or more polyols.

24. The method of claim 17, further comprising forming the pelletized expanded thermoplastic elastomer.

FIG. 1

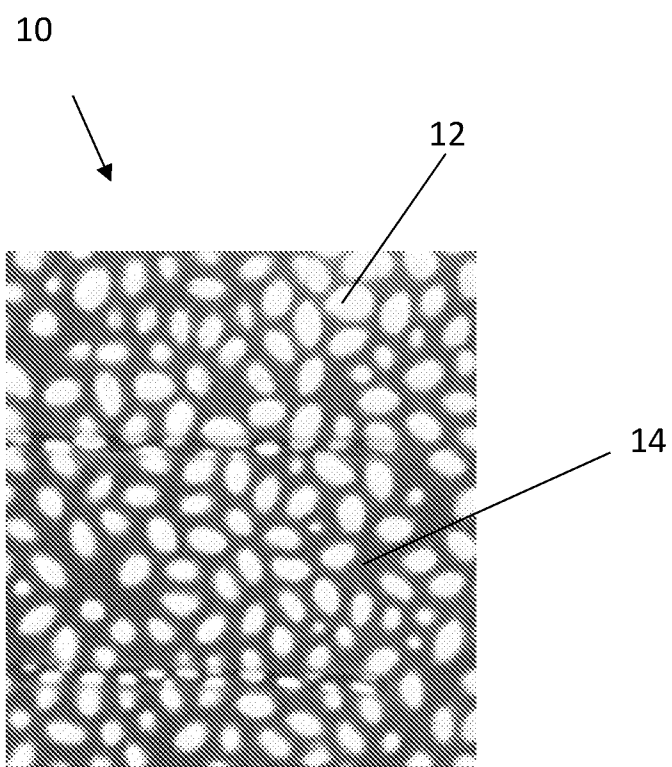


FIG. 2


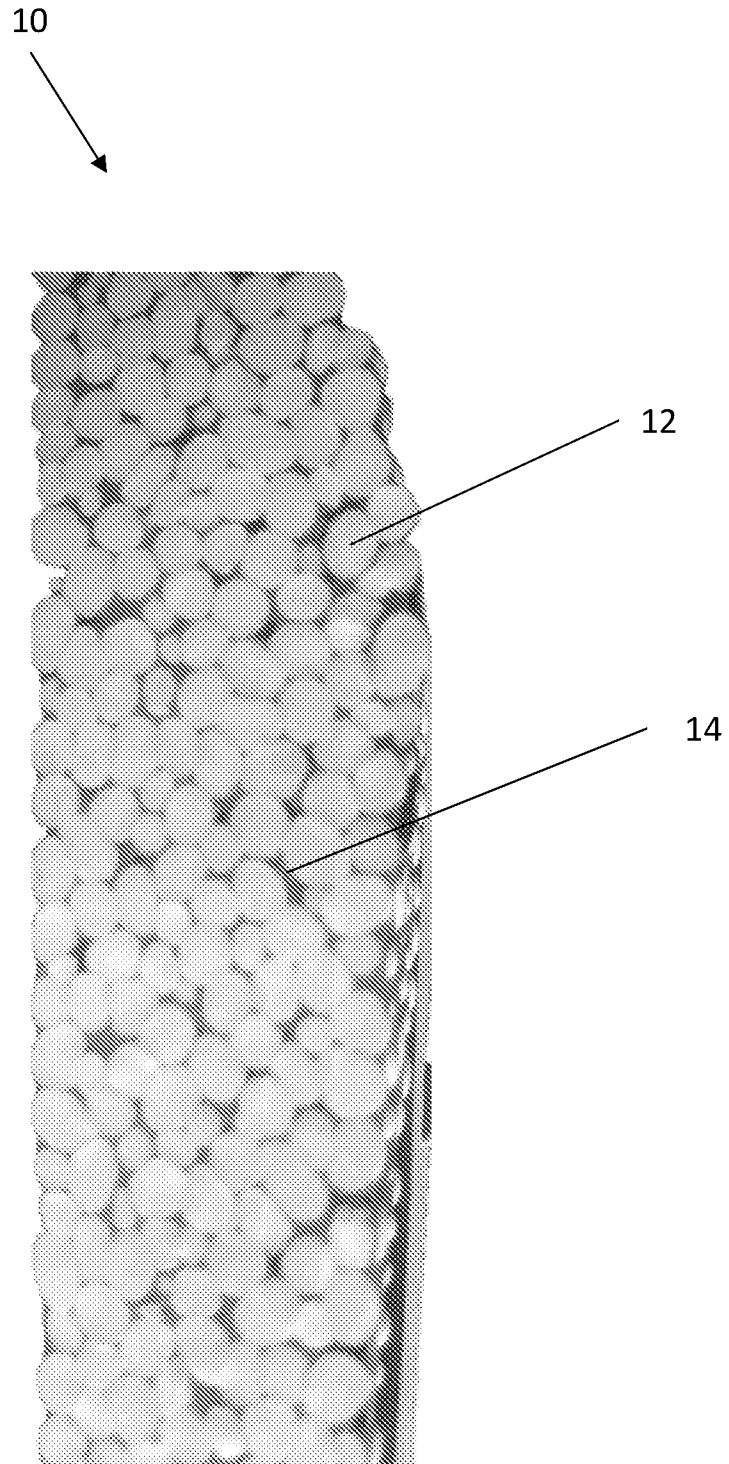


FIG. 3

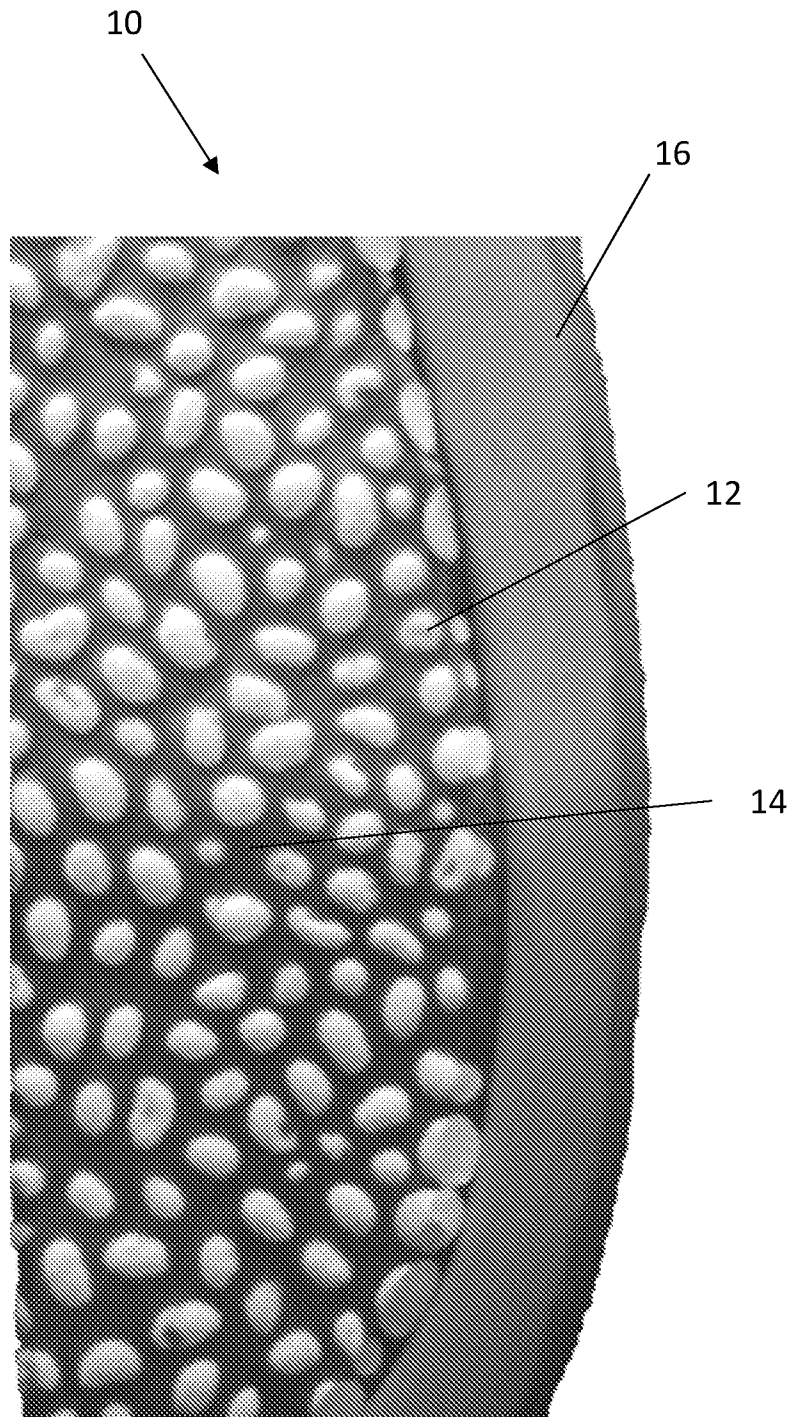

12



FIG. 4

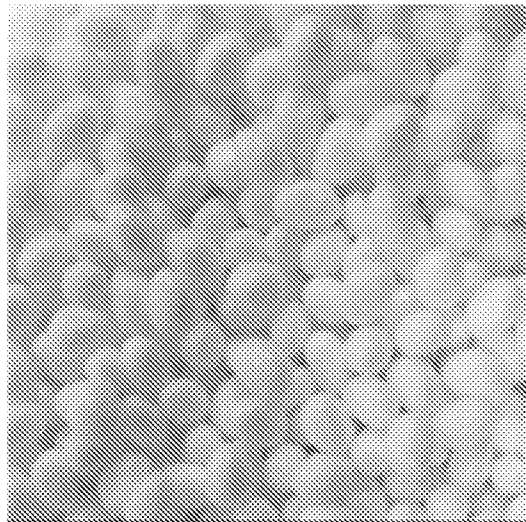


FIG. 5A

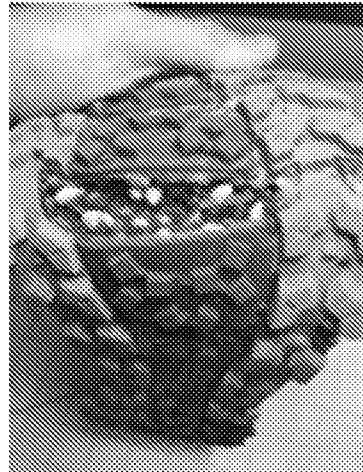


FIG. 5B

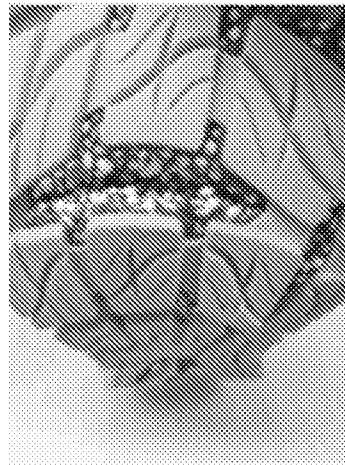


FIG. 5C



FIG. 6A


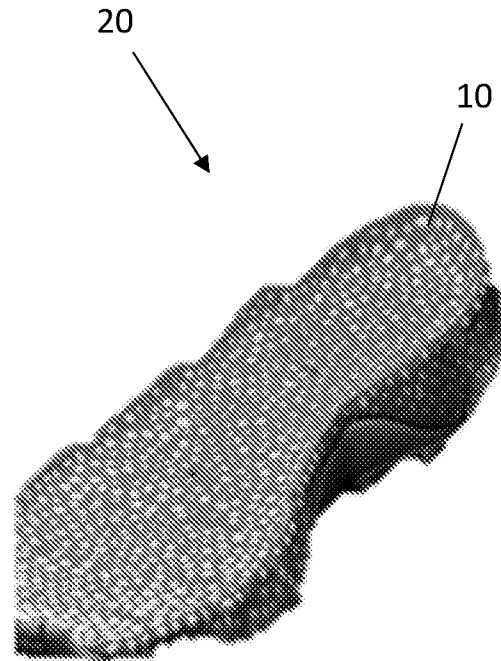


FIG. 6B



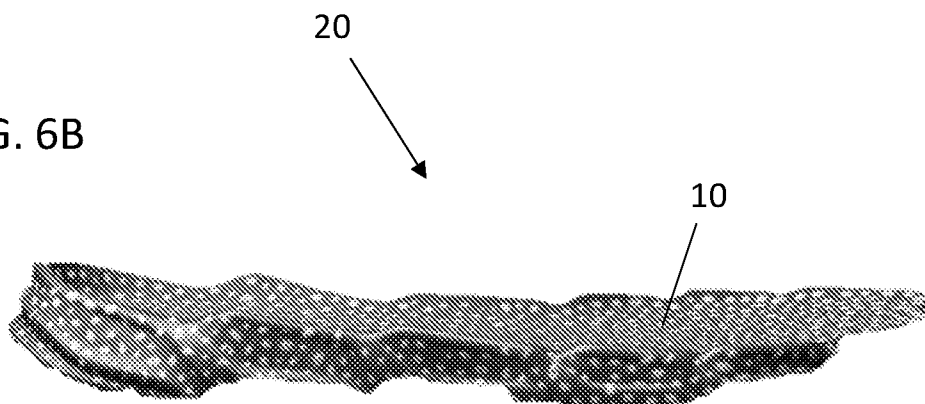

**A. CLASSIFICATION OF SUBJECT MATTER****A43B 13/12(2006.01)i, A43B 13/04(2006.01)i, A43B 17/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

A43B 13/12; A43B 13/04; A43B 13/18; B29C 43/18; B29C 44/02; B32B 3/26; C08J 9/16; C08J 9/228; C08L 75/04; A43B 17/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) &amp; keywords: midsole, pelletized, expanded, thermoplastic, elastomer, polyurethane

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2010-0047550 A1 (PRISSOK, F. et al.) 25 February 2010 See claims 1-24; paragraphs [0014], [0024], [0086]-[0087], [0108]; and Table 2.	1-24
Y	WO 2016-030333 A1 (ADIDAS AG) 03 March 2016 See claims 1-52.	1-24
A	US 9682522 B2 (NIKE, INC.) 20 June 2017 See the whole document.	1-24
A	US 2015-0038607 A1 (NIKE, INC.) 05 February 2015 See the whole document.	1-24
A	EP 3109281 A1 (MIRACLL CHEMICALS CO., LTD.) 28 December 2016 See the whole document.	1-24

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

02 August 2019 (02.08.2019)

Date of mailing of the international search report

**05 August 2019 (05.08.2019)**

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

MIN, In Gyou

Telephone No. +82-42-481-3326



## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2019/027752

Patent document cited in search report	Publication date	Patent family member(s)	Publication date		
US 2010-0047550 A1	25/02/2010	CN 101583656 A	18/11/2009		
		CN 101583656 B	05/09/2012		
		EP 2109637 A1	21/10/2009		
		EP 2109637 B1	25/07/2018		
		US 2015-0252163 A1	10/09/2015		
		WO 2008-087078 A1	24/07/2008		
		WO 2016-030333 A1	03/03/2016	CN 107075163 A	18/08/2017
CN 107124873 A	01/09/2017				
DE 102014216992 A1	03/03/2016				
EP 3186306 A1	05/07/2017				
JP 2017-525819 A	07/09/2017				
JP 2017-531064 A	19/10/2017				
JP 2018-127642 A	16/08/2018				
JP 6336678 B2	06/06/2018				
KR 10-2017-0047327 A	04/05/2017				
KR 10-2017-0047328 A	04/05/2017				
US 2017-0253710 A1	07/09/2017				
WO 2016-030026 A1	03/03/2016				
US 9682522 B2	20/06/2017			CA 2878031 A1	16/01/2014
				CN 104797392 A	22/07/2015
		CN 105479652 A	13/04/2016		
		CN 105479652 B	14/11/2017		
		EP 2872309 A1	20/05/2015		
		EP 2872309 B1	22/11/2017		
		JP 2015-523251 A	13/08/2015		
		JP 5815912 B2	17/11/2015		
		KR 10-1569659 B1	16/11/2015		
		KR 10-2015-0012320 A	03/02/2015		
		MX 2015000305 A	23/07/2015		
		MX 338259 B	11/04/2016		
		TW 201417981 A	16/05/2014		
		US 2014-0017450 A1	16/01/2014		
		US 2015-0128359 A1	14/05/2015		
		US 8961844 B2	24/02/2015		
		ZA 201409507 B	31/08/2016		
US 2015-0038607 A1	05/02/2015	CN 105451956 A	30/03/2016		
		CN 105451956 B	03/10/2017		
		EP 3027376 A1	08/06/2016		
		KR 10-1844693 B1	02/04/2018		
		KR 10-2016-0040639 A	14/04/2016		
		TW 201512262 A	01/04/2015		
		US 2018-0162024 A1	14/06/2018		
		US 9919458 B2	20/03/2018		
		WO 2015-017090 A1	05/02/2015		
EP 3109281 A1	28/12/2016	CN 103804890 A	21/05/2014		

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2019/027752**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 103804890 B	27/01/2016
		KR 10-2016-0124820 A	28/10/2016
		MX 2016010761 A	02/02/2017
		US 2017-0246765 A1	31/08/2017
		WO 2015-123961 A1	27/08/2015