




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H03M 7/48		A2	(11) International Publication Number: WO 99/59251
			(43) International Publication Date: 18 November 1999 (18.11.99)
(21) International Application Number: PCT/IB99/00820		(81) Designated States: CN, JP, KR, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 6 May 1999 (06.05.99)			
(30) Priority Data: 98201515.8 13 May 1998 (13.05.98) EP		Published <i>Without international search report and to be republished upon receipt of that report.</i>	
(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).			
(71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE).			
(72) Inventors: KAHLMAN, Josephus, A., H., M.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). SCHOUHAMER IMMINK, Kornelis, A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).			
(74) Agent: VAN DER KRUK, Willem, L.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).			

(54) Title: ENCODING OF AN INPUT INFORMATION SIGNAL

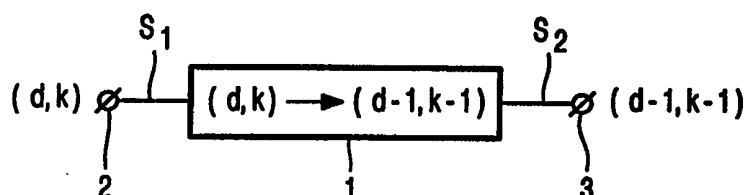

1 0 0 0 1 0 0 0 0 0 1 0 0 0 0 0 1 0 0 1 0 0 0 0 0 0 0 1

1 0 0 1 0 0 0 0 1 0 0 0 0 1 0 1 0 0 0 0 0 0 0 0 0 0 1

s_1

s_2

(57) Abstract

The invention proposes an apparatus for encoding an information signal. The information signal can be a (d,k) sequence. The apparatus encodes the (d,k) sequence into a $(d+n,k+n)$ sequence by changing the number of zeroes between each time two subsequent ones in the sequence by n . The information signal can also be an RLL sequence of the type (d,k) . The apparatus encodes the signal into an RLL sequence of the type $(d+n,k+n)$ by changing the run lengths by n bitcells each.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Encoding of an input information signal.

The invention relates to an apparatus for encoding a runlength limited (RLL) information signal of the type (d,k) into an encoded information signal, the apparatus comprising:

- input means for receiving an input signal,
- 5 - conversion means for converting the runlength limited t information signal into the encoded information signal,
- output means for supplying the encoded information signal.

The invention also relates to an apparatus for encoding a signal in the form of a (d,k) sequence into an encoded information signal, the apparatus comprising:

- 10 - input means for receiving an input signal,
- conversion means for converting the runlength limited information signal into the encoded information signal,
- output means for supplying the encoded information signal.

The invention further relates to corresponding encoding methods for encoding
15 the input information signal. An apparatus as defined above is well known in the art. Reference is made in this respect to USP 5,477,222 (PHN 14.448).

The apparatus described in the above identified publication is capable of
20 generating a (d,k) sequence (which is also called an NRZI encoded signal), which upon precoding in a 1T precoder results in a runlength limited information signal of the type (d,k) (which is also called an NRZ encoded signal). The (d,k) sequence comprises at least d and at most k zeroes between subsequent ones that occur after each other in the (d,k) sequence. The runlength limited information signal obtained from the above (d,k) sequence comprises
25 runlengths (either an array of consecutive zeroes or an array of consecutive ones) of d+1 at minimum and k+1 at maximum, between subsequent signal reversals in the information signal.

The invention aims at providing an improved encoding apparatus. In accordance with the invention, the apparatus for encoding a runlength limited information signal of the type (d,k) into an encoded information signal, the apparatus comprising:

- 5 - input means for receiving an input signal,
- conversion means for converting the runlength limited information signal into the encoded information signal,
- output means for supplying the encoded information signal,
wherein the conversion means is adapted to convert the runlength limited information signal of the type (d,k) into a runlength limited information signal of the type $(d+n,k+n)$ as the encoded information signal, by changing the runlengths in the runlength limited information signal by n bitcells of the runlength limited information signal, where n is a constant value.

Further, in accordance with the invention, the apparatus for encoding a signal in the form of a (d,k) sequence into an encoded information signal, comprises:

- 15 - input means for receiving an input signal,
- conversion means for converting the runlength limited information signal into the encoded information signal,
- output means for supplying the encoded information signal,
wherein the conversion means is adapted to convert the (d,k) sequence into a $(d+n,k+n)$ sequence as the encoded information signal, by changing the number of zeroes between each time two subsequent ones in the (d,k) sequence by n , where n is a constant value.

The invention is based on the following recognition. Recently, a channel code called EFM+ was proposed for DVD optical disks. The EFM+ channel code is described in USP 5,696,505 (PHN 14746) and has a d constraint equal to 2. That means that the minimum runlength in the EFM+ modulated signal recorded on the disk equals 3. For recordable media, based on phase change, the edges of the pits on the record carrier are less well defined. When high bit densities are required on the disk, a channel code with a lower d constraint, such as $d=1$, is preferred. So, when going out from the same source material, different channel encoders would be required in order to obtain the channel encoded information signal needed for recording on the DVD disk and the recordable disk. The present invention overcomes this, by proposing a converter apparatus that converts the EFM+ encoded channel signal with a d constraint equal to 2, into another channel encoded signal that has a d constraint equal to 1. The conversion can be carried out in the NRZI domain or in the NRZ domain.

As a result, all runlengths will be shortened by one bitcell, resulting in a converted channel encoded signal which is also DC free, as was the original channel encoded signal.

Upon channel decoding, the runlengths can be enlarged by adding one bitcell, resulting in a replica of the original EFM+ modulated signal.

It should be noted in this respect that there is no need for n being an integer constant. Thus, runlengths could be changed by a length unequal to the length of an integer number of bitcells.

It should further be noted that the publication 'A universal algorithm for generating optimal and nearly optimal runlength-limited, charge constrained binary sequences' by P.E. Bender et al in Proc. IEEE, Int. Symposium on Information Theory 1993, Santa Antonia, USA, describes the stuffing of ones in a sequence in order to avoid a violation of the d or k constraints.

These and other aspects of the invention will be further described in the figure description, in which

figure 1 shows an apparatus for converting a (d,k) sequence into a $(d-1,k-1)$ sequence,

figure 2 shows an apparatus for converting a (d,k) sequence into a $(d+1,k+1)$ sequence,

figure 3 shows the conversion of a RLL sequence of the type (d,k) into a RLL sequence of the type $(d-1,k-1)$,

figure 4 shows an embodiment of encoding apparatus further provided with a channel encoder for generating the (d,k) sequence, and

figure 5 shows an embodiment of the encoding apparatus further provided with a channel encoder for generating a RLL sequence of the type (d,k) .

Figure 1 shows an apparatus 1 that converts a (d,k) sequence into a $(d-1,k-1)$ sequence by deleting a zero from the array of zeroes that occur each time between two consecutive ones in the (d,k) sequence. A sequence s_1 is applied to the input 2 of the apparatus. Figure 1 shows the signal s_1 , which has a d constraint equal to 2, this for the reason that the number of zeroes between the fourth and the fifth one in the sequence is 2. Upon

conversion, the sequence s_2 has been obtained. It follows from figure 1 that the number of zeroes between consecutive ones in the sequence s_2 each time has been decreased by one. As a result, the signal s_2 is a $(d-1, k-1)$ constrained sequence. The signal s_2 , obtained with the apparatus of figure 1 could, after having carried out a 1T precoding on the signal s_2 , be
5 recorded on a record carrier, such as an optical record carrier, eg. a DVD disk.

When viewed on a time scale, the two signals s_1 and s_2 will, of course, be substantially equally long. The difference lies in the fact that the bitrate for the signal s_2 is lower than for the signal s_1 .

Figure 2 shows an apparatus 10 that converts a (d, k) sequence into a $(d+1, k+1)$ sequence by adding a zero to the array of zeroes that occur each time between two consecutive
10 ones in the (d, k) sequence. A sequence s_2 is applied to the input 12 of the apparatus. Figure 2 shows the signal s_2 , which has a d constraint equal to 1, this for the reason that the number of zeroes between the fourth and the fifth one in the sequence is 1. Upon conversion, the sequence s_1 has been obtained. It follows from figure 2 that the number of zeroes between
15 consecutive ones in the sequence s_1 each time has been increased by one. As a result, the signal s_1 is a $(d+1, k+1)$ constrained sequence, which has the same bitrate as the signal s_1 in figure 1, assuming that the signal s_2 in figure 2 is the same signal as the signal s_2 in figure 1.

Figure 3 shows a runlength limited signal s_3 , with a minimum runlength of 3. An apparatus, alike the apparatus of figure 1, which is capable of changing the runlengths in
20 the signal s_3 by subtracting one bitcell (or 1T) from each runlength occurring in the signal s_3 , results in the signal s_4 , also shown in figure 3. Conversely, an apparatus, alike the apparatus of figure 2, which is capable of changing the runlengths in the signal s_4 , by adding one bitcell (or 1T) to each runlength occurring in the signal s_4 , results in the signal s_3 .

Here again, when viewed on a time scale, the two signals s_3 and s_4 will, of
25 course, be substantially equally long. The difference lies in the fact that the bitrate for the signal s_4 is lower than for the signal s_3 .

Figure 4 shows an embodiment of the encoding apparatus, where the conversion unit 1 of figure 1 is used, together with a channel encoder 20, an aT precoder, more specifically a 1T precoder 22 and a detector 24. A source signal is supplied to the input 26,
30 which is converted into the (d, k) sequence s_1 . The channel encoder 20 can be any channel encoder, such as the EFM+ coder introduced earlier that channel encodes the input signal into the (d, k) sequence. After conversion in the converter unit 1, the converted signal is encoded in the 1T precoder, well known in the art, resulting in an output signal which is available at the output 28. The channel encoder encodes its input signal into the (d, k) sequence in response to

a control signal supplied by the detector 24. The control signal may, as an example, lead to the output signal of the 1T precoder being DC free, or any other requirement to be imposed on the precoder output signal.

The channel coder 20 is preferably adapted to generate such a (d,k) sequence in response to the source signal, that the number of 'ones' per bit is substantially constant. In the earlier mentioned USP 5,477,222, single 2-bit source words were converted into single 3-bit converted words, or two subsequent 2-bit source words were converted into two subsequent 3-bit converted words, or three subsequent 2-bit source words were converted into three subsequent 3-bit converted words. One could imagine that the conversion of single 2-bit source words leads to converted words that include only one '1' bit, that the conversion of two subsequent 2-bit source words leads to two subsequent 3-bit converted words including two '1' bits and that the conversion of three subsequent 2-bit source words leads to three subsequent 3-bit converted words including three '1' bits. As a result, the output signal of the channel encoder 20 includes 1/3 '1' bits per bit.

A possible embodiment of a channel coder that is capable of realizing a constant number of 'ones' per bit, is as follows. Let us assume that the d constraint equals 1 and that a 7/12 conversion code is aimed at. 233 channel words of length 12 exist that satisfy the d=1 constraint and start with at least one 'zero', so that they can be concatenated freely. Of those 233 channel words, 11 channel words comprise only one 'one', 45 channel words comprise two 'ones', 84 channel words comprise three 'ones', 70 channel words comprise four 'ones', 21 channel words comprise five 'ones' and one channel word comprises six 'ones'.

The channel coder can now be realized by allocating the 84 channel words comprising three 'ones' each to a corresponding one of 84 7-bit source words. Further, choose 45 pairs of channel words comprising two or four 'ones'. Allocate each pair to one of 45 7-bit source words. As the sum of 45 and 84 equals 129, which is larger than 128, it is possible to realize the 7/12 channel code. Encoding is now realized as follows. Encoding of the 84 source words into the 84 channel words comprising three 'ones' is straightforward. As soon as a source word appears that corresponds to a pair of channel words, alternately the channel word comprising two 'ones' and the channel word comprising four 'ones' is chosen. As a consequence, a channel code conversion is carried out resulting in a channel signal comprising one 'one' per three bits.

Figure 5 shows another embodiment of the encoding apparatus, in which the conversion as explained with reference to figure 3 is employed. Apart from the encoding unit 1a, which changes the runlengths in the way described above with reference to figure 3, the

embodiment comprises, again, a channel encoder 20, an aT precoder, more specifically a 1T precoder 22 and a detector 24. The converter 1a is now located at another position, namely at the output of the 1T precoder, so that the converter 1a can convert the RLL sequence generated by the 1T precoder 22.

5 A source signal is supplied to the input 26, which is converted into the (d,k) sequence s_1 . The channel encoder 20 can be any channel encoder, such as the EFM+ coder introduced earlier that channel encodes the input signal into the (d,k) sequence. The (d,k) sequence is encoded in the 1T precoder, well known in the art, resulting in the RLL sequence at its output. The converter 1a subsequently converts the RLL sequence, in the way described
10 above, into the output signal, which is available at the output 28. The channel encoder encodes its input signal into the (d,k) sequence in response to a control signal supplied by the detector 24. The control signal may, as an example, lead to the output signal of the 1T precoder being DC free, or any other requirement to be imposed on the precoder output signal.

 The channel coder 20 is preferably adapted to generate such a (d,k) sequence in
15 response to the source signal, that the number of signal transitions per bit in the RLL sequence at the output of the precoder 22 is substantially constant. This could be realized by using a channel coder 20 as described above.

 Whilst the invention has been described with reference to preferred
embodiments therefor, it is to be understood that these are not limitative examples. Thus,
20 various modification may become apparent to those skilled in the art, without departing from the scope of the invention, as defined by the claims.

 It is expressly stated here that, although the word "encoding" is mostly used in transmitters/recording apparatuses, and the word "decoding" is mostly used in receivers/reproducing apparatuses to indicate that an encoding inverse to the encoding in the
25 transmitter/recording apparatuses is carried out, there is no essential difference between those words. So, also receivers/reproducing apparatuses can be considered to be provided with encoding apparatuses. Such encoding apparatuses encode the received/reproduced signal in a way inverse to the encoding during transmission/encoding.

 An example: suppose that a transmitter/recording apparatus is provided with an
30 encoding apparatus that changes the runlengths (number of zeroes) by +n bit cells (by +n), then the corresponding encoding apparatus in the receiver/reproducing apparatus changes the runlengths (number of zeroes) by -n bit cells (by -n).

 Further, the invention lies in each and every novel feature or combination of features.

CLAIMS:

1. Encoding apparatus for encoding a runlength limited information signal of the type (d,k) into an encoded information signal, the apparatus comprising:

- input means for receiving an input signal,
- conversion means for converting the runlength limited information signal into the encoded information signal,
- output means for supplying the encoded information signal,

wherein the conversion means is adapted to convert the runlength limited information signal of the type (d,k) into a runlength limited information signal of the type $(d+n,k+n)$ as the encoded information signal, by changing the runlengths in the runlength limited information signal by n bitcells of the runlength limited information signal, where n is a constant value.

2. Encoding apparatus as claimed in claim 1, wherein the apparatus further comprises channel encoding means for channel encoding said input signal into said runlength limited information signal, the channel encoding means being adapted to generate said runlength limited information signal in response to said input signal, such that the number of transitions per bit in the runlength limited information signal is substantially constant.

3. Encoding apparatus as claimed in claim 1, wherein n is an integer constant, which preferably equals $+1$.

4. Encoding apparatus as claimed in claim 1, wherein n is an integer constant, which preferably equals -1 .

5. Encoding method for encoding a runlength limited information signal of the type (d,k) into an encoded information signal, the method comprising the steps of:

- receiving an input signal,
- converting the runlength limited information signal into the encoded information signal,
- supplying the encoded information signal,

wherein the conversion step is adapted to convert the runlength limited information signal of the type (d,k) into a runlength limited information signal of the type $(d+n,k+n)$ as the encoded information signal, by changing the runlengths in the runlength limited information signal by n bitcells of the runlength limited information signal, where n is a constant value.

5

6. Encoding apparatus for encoding a signal in the form of a (d,k) sequence into an encoded information signal, the apparatus comprising:

- input means for receiving an input signal,
- conversion means for converting the (d,k) sequence into the encoded information signal,
- 10 - output means for supplying the encoded information signal,

wherein the conversion means is adapted to convert the (d,k) sequence into a $(d+n,k+n)$ sequence as the encoded information signal, by changing the number of zeroes between each time two subsequent ones in the (d,k) sequence by n , where n is a constant value.

15

7. Encoding apparatus as claimed in claim 6 wherein the apparatus further comprises channel encoding means for channel encoding said input signal into said (d,k) sequence, the channel encoding means being adapted to generate said (d,k) sequence, such that the number of ones per bit in the (d,k) sequence is substantially constant.

20

8. Encoding apparatus as claimed in claim 6, wherein n is an integer constant, which preferably equals $+1$.

9. Encoding apparatus as claimed in claim 6, wherein n is an integer constant, which preferably equals -1 .

25

10. Encoding method for encoding a signal in the form of a (d,k) sequence into an encoded information signal, the method comprising the steps of:

- receiving an input signal,
- converting the (d,k) sequence into the encoded information signal,
- 30 - supplying the encoded information signal,

wherein the conversion step is adapted to convert the (d,k) sequence into a $(d+n,k+n)$ sequence as the encoded information signal, by changing the number of zeroes between each time two subsequent ones in the (d,k) sequence by n , where n is a constant value.

1/2

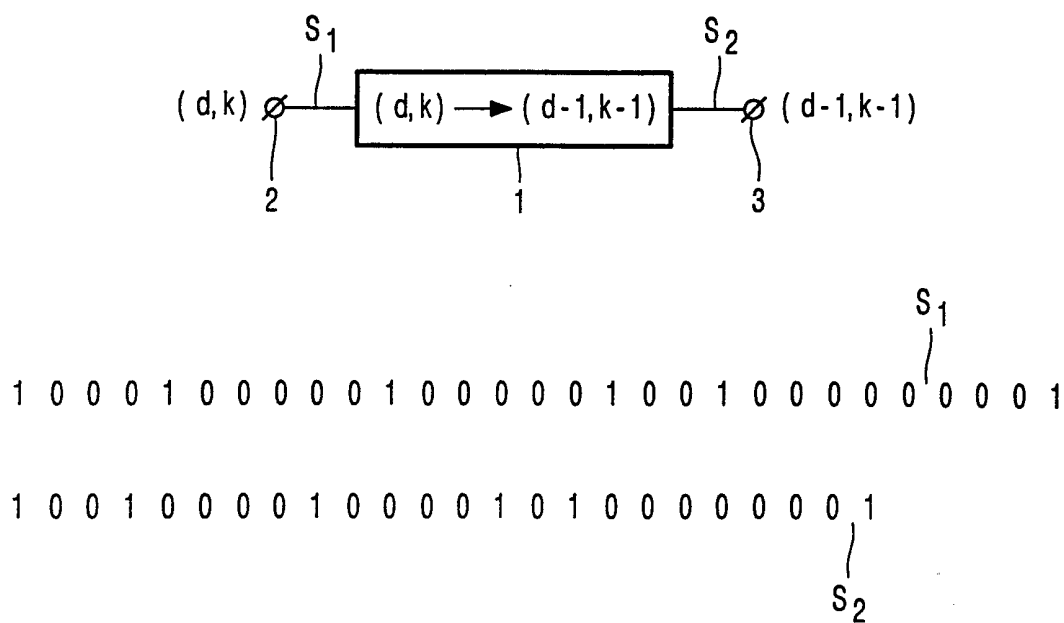


FIG. 1

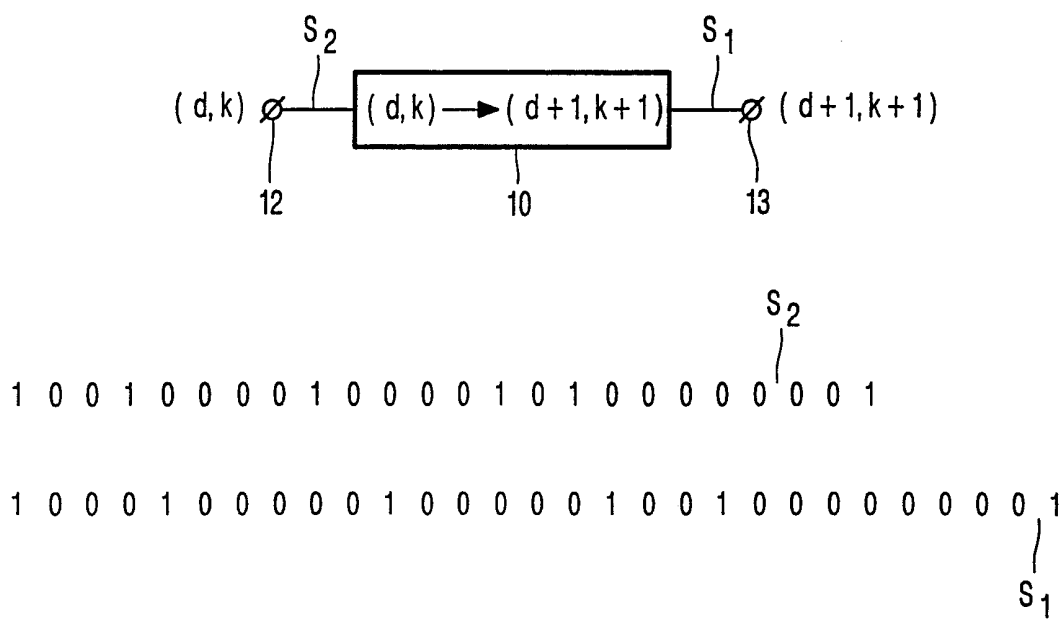


FIG. 2

2/2

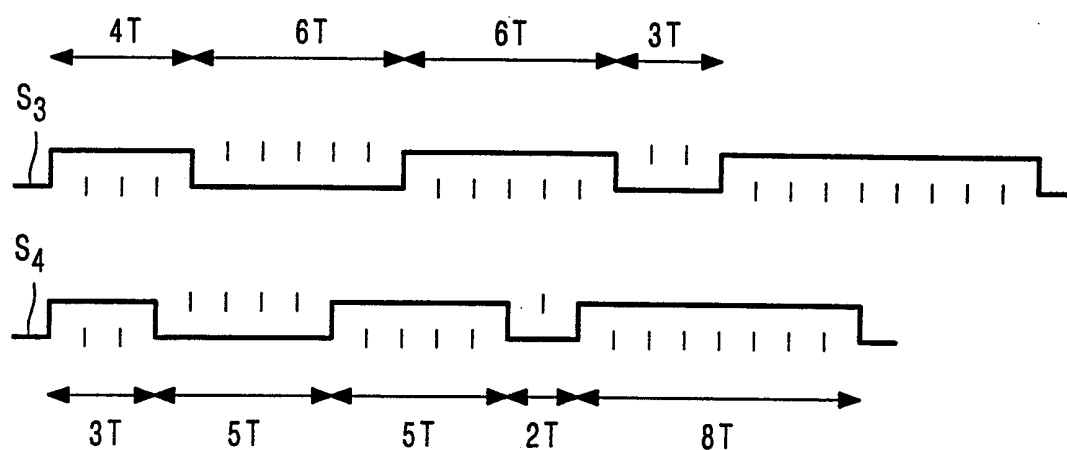


FIG. 3

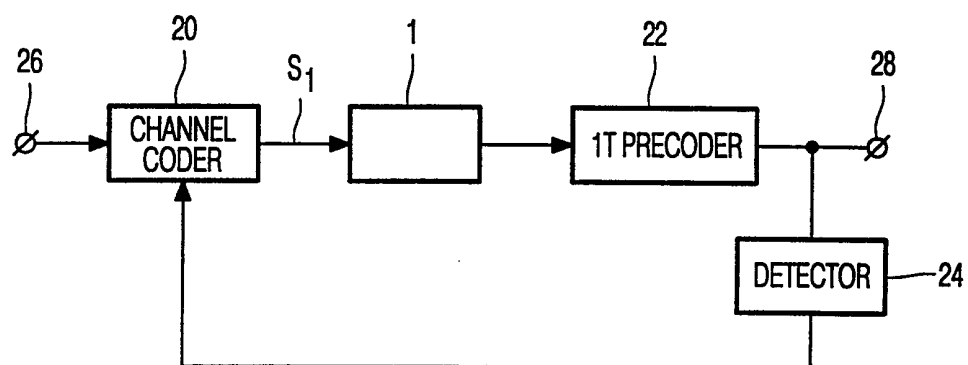


FIG. 4

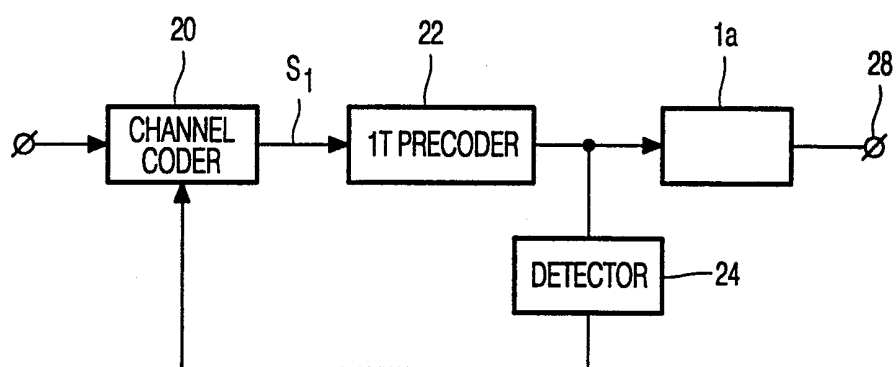


FIG. 5