



(51) International Patent Classification:

*C08J 7/04* (2006.01)      *D04H 1/4391* (2012.01)  
*B29C 55/00* (2006.01)      *B01D 67/00* (2006.01)  
*C08J 5/18* (2006.01)

(21) International Application Number:

PCT/US2012/064908

(22) International Filing Date:

14 November 2012 (14.11.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/351,052      16 January 2012 (16.01.2012)      US  
13/675,730      13 November 2012 (13.11.2012)      US

(71) Applicant: **W.L. GORE & ASSOCIATES, INC.**  
[US/US]; 555 Paper Mill Road, Newark, DE 19711 (US).

(72) Inventors: **KOVACH, Larry, J.**; 229 South Dunnam  
Street, Flagstaff, AZ 86001 (US). **RADSPINNER,  
Rachel**; 2980 E. Matterhorn Drive, Flagstaff, AZ 86004  
(US).

(74) Agents: **MILLER, Amy** et al.; W.L.gore & Associates,  
Inc., 551 Paper Mill Road, Newark, DE 19711 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every


kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ARTICLES INCLUDING EXPANDED POLYTETRAFLUOROETHYLENE MEMBRANES WITH SERPENTINE FIBRILS AND HAVING A DISCONTINUOUS FLUOROPOLYMER LAYER THEREON

FIGURE 3

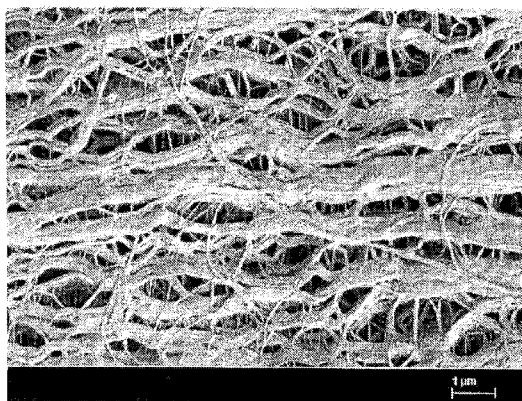

(57) Abstract: Articles comprising an expanded polytetrafluoroethylene membrane having serpentine fibrils and having a discontinuous coating of a fluoropolymer thereon are provided. The fluoropolymer may be located at least partially in the pores of the expanded fluoropolymer membrane. In exemplary embodiments, the fluoropolymer is fluorinated ethylene propylene. The application of a tensile force at least partially straightens the serpentine fibrils, thereby elongating the article. The expanded polytetrafluoroethylene membrane may include a microstructure of substantially only fibrils. The articles can be elongated to a predetermined point at which further elongation is inhibited by a dramatic increase in stiffness. In one embodiment, the articles are used to form a covered stent device that requires little force to distend in the radial direction to a first diameter but is highly resistant to further distension to a second diameter (stop point). A large increase in diameter can advantageously be achieved prior to reaching the stop point.



**TITLE OF THE INVENTION**

Articles Including Expanded Polytetrafluoroethylene  
Membranes with Serpentine Fibrils and Having a  
Discontinuous Fluoropolymer Layer Thereon

5

**CROSS REFERENCE TO RELATED APPLICATIONS**

This application is a continuation-in-part of U.S. Patent Application No. 13/351,052 to White, *et al.* filed on January 16, 2012.

10

**FIELD OF THE INVENTION**

The present invention relates to expanded polytetrafluoroethylene (ePTFE) membranes having serpentine fibrils and a discontinuous fluoropolymer layer and to materials made therefrom.

15

**DEFINITIONS**

As used herein, the term "serpentine fibrils" means multiple fibrils that curve or turn one way then another.

20

As used herein, the term "controlled retraction" refers to causing articles to shorten in length in at least one direction by the application of heat, by wetting with a solvent, or by any other suitable means or combinations thereof in such a way as to inhibit folding, pleating, or wrinkling of the subsequent article visible to the naked eye.

25

The term "imbibed or imbibing" as used herein is meant to describe any means for at least partially filling at least a portion of the pores of a porous material such as ePTFE or the like.

The term "elongation" as used herein is meant to denote the increase in length in response to the application of a tensile force.

The term "discontinuously located" as used herein refers to a substance having at least one unconnected region.

30

The term "precursor membrane" as used herein refers to the starting membrane.

The terms "stent graft" and "covered stent" may be used interchangeably herein to describe a stent with a cover thereon.

The term "increase in stiffness" as used herein refers the increase in resistance to further elongation once the stop-point is reached.

5 For purposes of this invention, the entire device is considered to be "wrinkle-free" if within a 1 cm length of the device, the graft portion is devoid of wrinkles and folds. It is to be noted that the terms "free of folds", "devoid of folds", and "fold free" are used interchangeably herein.

## 10 BACKGROUND OF THE INVENTION

Porous fluoropolymer materials, and in particular, expanded polytetrafluoroethylene (ePTFE) materials, typically exhibit relatively low elongation when stressed in the direction parallel to the orientation of the fibrils. High strength ePTFE materials have relatively low elongation values compared  
15 to lower strength ePTFE materials. Uniaxially expanded materials can exhibit high elongation when stressed in the direction orthogonal to the fibrils; however, the membranes are exceptionally weak in this direction.

Uniaxially expanded ePTFE tubes positioned on mandrels have been mechanically compressed and heat treated to achieve higher elongations prior to  
20 rupture. Such tubes also exhibit recovery if elongated prior to rupture and released from stress. U.S. Patent No. 4,877,661 to House, *et al.* discloses porous PTFE having the property of rapid recovery and a method for producing these materials. Additionally, the pores of compressed tubes have been penetrated with elastomeric materials. For example, U.S. Patent No. 7,789,908  
25 to Sowinski, *et al.* discloses an elastomeric recoverable PTFE material that includes longitudinally compressed fibrils of an ePTFE material penetrated by an elastomeric material within the pores which define an elastomeric matrix.

A need continues to exist for thin, strong membranes that exhibit high degrees of elongation, such as greater than 50% elongation. Some applications  
30 further demand qualities such as thinness, low density, and/or small pore size, as

well as combinations thereof. Other applications require a relatively low force to elongate the membrane.

### SUMMARY OF THE INVENTION

5           The present invention is directed to fluoropolymer membranes that exhibit high elongation while substantially retaining the strength properties of the fluoropolymer membrane. Such membranes characteristically possess serpentine fibrils having a width of about 1.0 micron or less.

          It is an object of the present invention to provide an article that includes an  
10   expanded fluoropolymer membrane having a discontinuous coating of a fluoropolymer thereon. The fluoropolymer may be located at least partially in some or all of the pores of the expanded fluoropolymer membrane. The expanded fluoropolymer membrane characteristically contains serpentine fibrils, and may have a microstructure of substantially only serpentine fibrils. The  
15   serpentine fibrils have a width less than about 1.0 micron or less. In one exemplary embodiment, the expanded fluoropolymer membrane includes a plurality of serpentine fibrils. In at least one embodiment of the invention, the fluoropolymer membrane is expanded polytetrafluoroethylene. One exemplary fluoropolymer is fluorinated ethylene propylene. The application of a tensile force  
20   at least partially straightens the serpentine fibrils, thereby elongating the article. The composite material exhibits high elongation while substantially retaining the strength properties of the fluoropolymer membrane. Additionally, the expanded fluoropolymer membrane may be thermally retracted in at least one direction to less than about 90% of the initial, expanded fluoropolymer length. Also, the  
25   expanded fluoropolymer membrane may be restrained in at least one direction during the thermal retraction.

          It is another object of the present invention to provide an endoprosthesis device that includes a tubular member defining at least one opening, an interior surface, and an exterior surface where the tubular member includes a composite  
30   material including a fluoropolymer membrane having serpentine fibrils and a discontinuous coating of a fluoropolymer. The serpentine fibrils have a width less

than about 1.0 micron or less. The fluoropolymer may be located at least partially in some or all of the pores of the expanded fluoropolymer membrane. In one or more exemplary embodiment, the fluoropolymer membrane includes expanded polytetrafluoroethylene and the fluoropolymer includes fluorinated ethylene propylene. The composite material exhibits an increase in stiffness when expanded to a diameter of about 7 mm. The tubular member may be used as a covering for a stent.

It is a further object of the present invention to provide a stent graft that includes (1) a stent having a wall with at least one opening, an exterior surface, and an interior surface and (2) a cover affixed to the stent where the cover includes a composite material including an expanded polytetrafluoroethylene membrane having serpentine fibrils and a discontinuous coating of a fluoropolymer. The fluoropolymer may be located at least partially in all or substantially all of the pores of the expanded fluoropolymer membrane. The serpentine fibrils have a width of about 1.0 micron or less. The composite material at least partially covers at least one of the interior and exterior surfaces of the stent. In addition, the composite material may be affixed to the exterior and/or interior surface of the stent. The fluoropolymer may be fluorinated ethylene propylene. The composite material remains wrinkle-free and fold-free regardless of the diameter of the stent graft. Also, the composite material exhibits high elongation while substantially retaining the strength properties of the polytetrafluoroethylene membrane. The expanded polytetrafluoroethylene membrane may include a microstructure of substantially only serpentine fibrils. In one embodiment, the expanded fluoropolymer membrane may include a plurality of serpentine fibrils. The composite material exhibits an increase in stiffness when expanded to a diameter of about 7 mm.

It is also an object of the present invention to provide a stent graft having (1) a wall with at least one opening, an exterior surface, and an interior surface and (2) a cover affixed to the stent where the cover includes a composite material including an expanded fluoropolymer membrane and a discontinuous coating of a fluoropolymer thereon. The composite material exhibits an increase

in stiffness when expanded to a diameter of about 7 mm. Additionally, the composite material at least partially covers at least one of the interior and exterior surfaces of the stent. It is to be appreciated that the fluoropolymer is not substantially adhered to the stent. The fluoropolymer may be fluorinated ethylene propylene. The expanded polytetrafluoroethylene membrane may include a microstructure of substantially only serpentine fibrils. In at least one exemplary embodiment, the expanded fluoropolymer membrane may include a plurality of serpentine fibrils.

It is yet another object of the present invention to provide a method of forming a covered stent that includes (1) positioning a first tubular member on an interior surface of a stent, (2) positioning a second tubular member on an external surface of the stent, where each tubular member includes a composite material having an expanded polytetrafluoroethylene membrane and a discontinuous coating of a fluoropolymer thereon and the expanded polytetrafluoroethylene membrane includes serpentine fibrils, and (3) heating the stent having thereon the first and second tubular members to adhere the fluoropolymer on the first tubular member to the second tubular member through interstices of the stent and form a covered stent. The fluoropolymer is positioned on an external surface of the first tubular member and on an interior surface of the second tubular member. The serpentine fibrils have a width of about 1.0 micron or less. In at least one embodiment, the fluoropolymer is fluorinated ethylene propylene.

It is a further object of the present invention to provide a method of forming a covered stent that includes (1) forming a tube having a composite material that includes an expanded polytetrafluoroethylene membrane and a discontinuous coating of a fluoropolymer thereon, where the fluoropolymer is positioned on an external surface of the tube, (2) cutting the tube cross-sectionally to form a first tubular member and a second tubular member, (3) everting the second tubular member to position the fluoropolymer on an interior surface of the second tubular member, (4) positioning the first tubular member within a stent, (5) positioning the second tubular member on an external surface

of the stent, and (6) heating the stent having thereon the first and second tubular members to adhere the fluoropolymer on the first tubular member to the second tubular member through interstices of the stent to form a covered stent. In exemplary embodiments, the expanded fluoropolymer membrane includes  
5 serpentine fibrils. The serpentine fibrils have a width of about 1.0 micron or less.

The foregoing and other objects, features, and advantages of the invention will appear more fully hereinafter from a consideration of the detailed description that follows. It is to be expressly understood, however, that the drawings are for illustrative purposes and are not to be construed as defining the  
10 limits of the invention.

### **BRIEF DESCRIPTION OF THE FIGURES**

The advantages of this invention will be apparent upon consideration of the following detailed disclosure of the invention, especially when taken in  
15 conjunction with the accompanying drawings wherein:

Figure 1 is a schematic illustration of an exemplary, idealized serpentine fibril;

Figure 2 is a scanning electron micrograph (SEM) of a retracted membrane with a discontinuous coating of FEP taken at 200x;

20 Figure 3 is a scanning electron micrograph of the surface of a stent cover taken at 10,000x; and

Figure 4 is a graphical illustration of a pressure vs. diameter curve of an exemplary stent graft according to the present invention where the intersection of the tangent lines depicts the stop point of the composite material.  
25

### **DETAILED DESCRIPTION OF THE INVENTION**

Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which the invention belongs. In the drawings, the thickness of the lines,  
30 layers, and regions may be exaggerated for clarity. Like numbers found throughout the figures denote like elements.

The present invention is directed to fluoropolymer membranes that exhibit high elongation while substantially retaining the strength properties of the fluoropolymer membrane. Such membranes characteristically possess serpentine fibrils, such as the idealized serpentine fibril exemplified in FIG. 1. As depicted generally in FIG. 1, a serpentine fibril curves or turns generally one way in the direction of arrow 10 then generally another way in the direction of arrow 20. It is to be understood that the amplitude, frequency, or periodicity of the serpentine-like fibrils as exemplified in FIG. 1 may vary. In one embodiment, the fluoropolymer membranes are expanded fluoropolymer membranes. Non-limiting examples of expandable fluoropolymers include, but are not limited to, expanded PTFE, expanded modified PTFE, and expanded copolymers of PTFE. Patents have been filed on expandable blends of PTFE, expandable modified PTFE, and expanded copolymers of PTFE, such as, for example, U.S. Patent No. 5,708,044 to Branca; U.S. Patent No. 6,541,589 to Baillie; U.S. Patent No. 7,531,611 to Sabol *et al.*; U.S. Patent Application No. 11/906,877 to Ford; and U.S. Patent Application No. 12/410,050 to Xu *et al.*

The high elongation is enabled by forming relatively straight fibrils into serpentine fibrils that substantially straighten upon the application of a force in a direction opposite to the compressed direction. The creation of the serpentine fibrils can be achieved through a thermally-induced controlled retraction of the expanded polytetrafluoroethylene, through wetting the article with a solvent (followed by drying), or by a combination of these two techniques. The solvent may be, but is not limited to, isopropyl alcohol or Fluorinert<sup>®</sup> (a perfluorinated solvent commercially available from 3M, Inc., St. Paul, MN). In general, for unrestrained articles, the higher the temperature and the longer the dwell time, the higher the degree of retraction up to the point of maximum retraction. In addition, the speed of retraction can be increased by increasing the retraction temperature. The retraction of the membrane does not result in visible pleating, folding, or wrinkling of the ePTFE, unlike what occurs during mechanical compression. The retraction also can be applied to very thin membranes, unlike



known methods. During the retraction process, the fibrils become serpentine in shape and, in some instances, may also increase in width.

The precursor materials can be biaxially expanded ePTFE membranes. In one embodiment, materials such as those made in accordance with the general teachings of U.S. Patent No. 7,306,729 to Bacino, *et al.* are suitable precursor membranes, especially if small pore size articles are desired. These membranes may possess a microstructure of substantially only fibrils. The precursor membrane may or may not be amorphously locked. Additionally, the precursor membrane may be at least partially filled, coated, imbibed, or otherwise combined with additional materials. For example, the precursor membrane may contain or be at least partially coated or imbibed with a fluoropolymer, such as, for example, fluorinated ethylene propylene.

The precursor membrane may be restrained in one or more directions during the retraction process in order to prescribe the desired amount of elongation of the final article. The amount of elongation is directly related to, and is determined by, the amount of retraction. In the instant invention, the amount of retraction can be less than about 90%, 75%, 50%, or 25% of the initial unretracted length. The resultant amounts of elongation in the direction of retraction can be at least about 60%, 80%, 100%, 200%, 300%, 400%, 500%, 600%, or even greater, including any and all percentages therebetween.

The retraction temperature range includes temperatures that result in the retraction of the precursor membrane. In some instances, the retraction temperature can exceed the amorphous locking temperature of the precursor membrane.

In one embodiment, retraction can be achieved in a uniaxial tenter frame by positioning the rails at a distance less than the width of the precursor membrane prior or during the application of heat or solvent or both. When using a biaxial tenter frame, one or both of the sets of grips, pins, or other suitable attachment means can similarly be positioned at a distance less than the dimensions of the precursor membrane. It is to be appreciated that these

retraction means differ from the mechanical compression taught by the House and Sowinski patents noted above.

In another embodiment, the article can be retracted while being held by hand. A tubular article can be retracted by fitting it over a mandrel prior to  
5 retraction. In yet another embodiment, the membrane can be placed in an oven and allowed to retract unrestrained. It is to be understood that any suitable means of retracting the article that does not result in the formation of visible folds, pleats, or wrinkles can be employed.

The resulting retracted articles surprisingly exhibit high elongation while  
10 substantially retaining the strength properties of the fluoropolymer membrane. Upon retraction, the expanded fluoropolymer membrane possesses serpentine fibrils. These retracted membranes characteristically possess serpentine fibrils and are free of wrinkles. In some exemplary embodiments, the retracted membranes may possess a microstructure of substantially only serpentine fibrils.  
15 In certain instances, it may be necessary to partially elongate the retracted membrane in order to observe the serpentine fibrils with magnification. In at least one embodiment, the fluoropolymer membranes include a plurality of serpentine fibrils. As used herein, the phrase "plurality of serpentine fibrils" is meant to denote the presence of 2 or more, 5 or more, 10 or more, or 15 or more  
20 serpentine fibrils in the fluoropolymer membrane within a field of view as taught below. The serpentine fibrils have a width of about 1.0 micron or less, and in some embodiments, about 0.5 microns or less. In one embodiment, the serpentine fibrils have a width from about 0.1 to about 1.0 microns, or from about 0.1 to about 0.5 microns.

25 In another embodiment of the present invention, the precursor membranes described above can be imbibed with an elastomeric material prior, during, or subsequent to retraction to form a composite material. In the absence of such elastomeric materials, fluoropolymer articles having serpentine fibrils do not exhibit appreciable recovery after elongation. Suitable elastomeric materials  
30 include, but are not limited to, PMVE-TFE (perfluoromethylvinyl ether-tetrafluoroethylene) copolymers, PAVE-TFE (perfluoro (alkyl vinyl ether)-

tetrafluoroethylene) copolymers, silicones, polyurethanes, and the like. It is to be noted that PMVE-TFE and PAVE-TFE are fluoroelastomers. Other fluoroelastomers are suitable elastomeric materials. The resultant retracted article not only possesses high elongation while substantially retaining the strength properties of the fluoropolymer membrane, but also possesses the additional property of low percent unrecoverable strain energy density. These articles can exhibit percent unrecoverable strain energy density values less than about 85%, less than about 80%, less than about 70%, less than about 60%, and lower, including any and all percentages therebetween.

In another embodiment of the invention, the precursor membrane is imbibed or coated, at least partially or completely, or otherwise combined with at least one other material that may include, but is not limited to, fluorinated ethylene propylene (FEP), other fluoropolymers, polymers, copolymers, or terpolymers, ethylene fluorinated ethylene propylene (EFEP), THV (a terpolymer of tetrafluoroethylene, hexafluoropropylene, and vinylidene fluoride), PFA (perfluoroalkoxy copolymer resin), ECTFE (ethylene chlorotrifluoroethylene), PVDF (polyvinylidene fluoride), and PEEK (polyether ether ketone). The fluoropolymer membrane may be imbibed or coated with this other material during, prior, or subsequent to retraction. The fluoropolymer (or other material) may also or alternatively be located in at least a portion of or all of the pores of the fluoropolymer membrane.

A further embodiment of the invention takes advantage of a beneficial property of the inventive composite material (*i.e.*, an expanded fluoropolymer membrane having a discontinuous coating of a fluoropolymer thereon).

Composite materials of this invention not only exhibit elongation, but also exhibit a dramatic increase in stiffness after achieving a high, optionally predetermined, elongation. As a consequence, the composite materials can be elongated to a point at which further elongation is inhibited by the dramatic increase in stiffness. That is, the composite material has a stop point at which further expansion, elongation, or both occur only in conjunction with a significant increase in

pressure or force. Additionally, the composite material is substantially free of wrinkles.

In one specific instance, the inventive composite material can be used to create a covered stent device that requires little pressure to distend to a first diameter but which is highly resistant to further distension after reaching a certain diameter. The result is that the device can be distended in the radial direction under relatively low force until reaching that certain diameter. This diameter is a function of the inventive composite material. In other words, the diametric increase in the diameter of the covered stent device prior to reaching the stop point is a function of the inflection point in the elongation versus force curve for the inventive material, which in turn, is a function of the degree of retraction of the precursor membrane. A benefit of the composite material is that a large increase in diameter of the covered stent device can be achieved prior to reaching the stop point. The stop point of the composite material in exemplary covered stents may occur at a diameter of at least about 7 mm, at least about 8 mm, at least about 9 mm, at least about 10 mm, or even greater. One significance of the stop point is that the stent graft does not itself become aneurismal.

When the composite material is used as a cover for a stent, the composite material remains wrinkle-free and fold-free regardless of the diameter of the covered stent device. For purposes of this invention, the entire device is considered to be "wrinkle-free" if within a 1 cm length of the device, the graft portion is devoid of wrinkles and folds when viewed by the naked eye. It is to be noted that 1 cm length of the device should be used unless the entire length of the device is less than 1 cm. In that instance, the entire device should be utilized to determine if the device is "wrinkle-free." The ability of the cover to remain wrinkle-free results in less or no material infolding during compaction, which, in turn, permits the resulting covered stent device to have a smaller profile (*e.g.*, a reduction in delivery profile of at least about 1 Fr). The absence of folds in the cover reduces or eliminates the potential for thrombus accumulation that can ultimately result in total occlusion of the device. Also, the composite material

exhibits high elongation until reaching a length elongation corresponding to an increase in stiffness while substantially retaining the strength properties of the fluoropolymer membrane. The extension of the serpentine fibrils in the composite material to a substantially straight orientation surprisingly retains the strength properties of the fluoropolymer membrane. The composite material allows the cover to be attached to the stent at a small stent diameter and when the stent graft is expanded, the cover does not develop folds. In addition, the composite material both inhibits over-distension of the stent graft and allows over-distension with the application of a substantially higher force. Additionally, the covered stent exhibits minimal foreshortening during the expansion process prior to over-distension.

It is to be appreciated that the break strength of the cover can be altered by using few or numerous layers of the composite material to cover the stent. Alternatively, or in addition to, weaker or stronger fluoropolymer membranes can be used to achieve the same or substantially the same effect.

It is also to be appreciated that when the composite material is used as a cover for a stent, the fluoropolymer coating on the expanded fluoropolymer membrane is not substantially attached to the stent. As used herein, the term "substantially attached" means that the fluoropolymer is not attached to the stent or is only minimally attached to the stent. Rather, the fluoropolymer is utilized as an adhesive to affix two composite materials together to form the cover. For example, a first tube having a fluoropolymer-covered exterior surface and a second tube having a fluoropolymer interior surface are positioned on the interior and exterior surfaces of a stent, respectively, such that the fluoropolymer on the first tube adheres to the fluoropolymer on the second tube (*i.e.*, the opposite surface) through the interstices of the stent, thereby creating a covered stent device. In the present invention, it is important that the composite material forming the cover is not firmly attached to the stent. If the composite material was firmly attached, the cover would tear upon expansion of the covered stent device. That is, the primary means of attachment is achieved by bonding the

fluoropolymer (e.g., FEP) portions of the composite covers through the interstices of the stent.

Articles of the present invention can take various forms including, but not limited to, sheets, tubes, covers, and laminates.

5 Having generally described this invention, a further understanding can be obtained by reference to certain specific examples illustrated below which are provided for purposes of illustration only and are not intended to be all inclusive or limiting unless otherwise specified.

## 10 **Testing Methods**

It should be understood that although certain methods and equipment are described below, any method or equipment determined suitable by one of ordinary skill in the art may be alternatively utilized.

## 15 **Thickness**

Membrane samples were die cut to form rectangular sections about 2.54 cm by about 15.24 cm to measure thickness (using a Käfer Fz1000/30 snap gauge). The average of three measurements was reported.

## 20 **Scanning Electron Microscopy**

Scanning electron micrographs were created choosing magnifications suitable for identifying fibrils. Articles that have been retracted in accordance with the teachings of invention may require elongation in the direction of retraction in order to identify the serpentine fibrils. For the purposes of identifying  
25 the number of serpentine fibrils, a field of view of 7 microns by 7 microns of the sample is to be employed.

In addition, for the purpose of characterizing fibril width, measurements should be made for serpentine fibrils that are substantially separated from each other and do not band together or otherwise form series of fibrils paralleling each  
30 other within the membrane. To determine the fibril width, a line is drawn through the SEM image to bisect it. The SEM image should be of sufficient magnification

such that at least 5 serpentine fibrils and not more than 20 serpentine fibrils are clearly visible within the SEM image. Starting from one edge of the bisected image, the width of the first five consecutive serpentine fibrils that intersect the bisecting line are measured. The measurements are made where the fibril  
5 intersects the bisecting line. Next, the five measurements are averaged and the average measurement is recorded.

### Radial Elongation Test

The test method that follows describes the test method for an 8mm  
10 covered stent:

A covered stent that had been crushed to its delivery diameter onto an as-packaged (*i.e.*, deflated) 8mm balloon was positioned on the end of a balloon catheter. The covered stent was placed within the measuring zone of a laser micrometer (e.g., DataMike Model 700, TechMet Co., Dayton, OH).

15 A balloon inflator (e.g., COMPAK balloon inflator, Merit Medical, South Jordan, UT) was obtained. The balloon inflator was filed with water and attached to the luer fitting of the balloon catheter.

The handle on the inflator was slowly turned while the change in pressure as indicated on the dial was observed. The balloon was then inflated to 2  
20 atmospheres of pressure. The stent easily continued to expand, causing the pressure to drop. The inflation was continued until the pressure of 2 ATM was maintained. The stent was then inflated at 1 ATM intervals and the diameters at those pressures once pressure equilibrated were recorded. Inflation was  
25 continued until 14 atmospheres was achieved, which was 1 ATM below the rated burst pressure of the balloon.

A similar procedure should be followed for different sizes of covered stents. For other covered stent sizes, choose an appropriately sized balloon. Continue inflating until reaching 1 ATM below the rated burst pressure of the  
30 balloon.

The pressure-diameter curves relating to composite materials and covered stents of the present invention exhibit an inflection point due to the change in

slope upon reaching a diameter referred to herein as the stop point. FIG. 4 is a graphical illustration of a pressure vs. diameter curve of an exemplary stent graft according to the present invention where the intersection of the tangent lines depicts the stop point of the stent graft. The intersection of the tangent lines is depicted by reference numeral 70. An estimate of the stop point may be determined in the following manner. The slope of the pressure-diameter curve prior to reaching the stop point can be approximated by drawing a straight line tangent to the curve as shown as line 50 in FIG. 4. The slope of the pressure-diameter curve beyond the stop point can be approximated by drawing a straight line tangent to the curve as shown as line 60 in FIG. 4. The diameter corresponding to the intersection of the two tangent lines is an estimation of the stop point for that composite material.

## EXAMPLES

15

### **EXAMPLE 1**

#### **Expanded fluoropolymer membrane with Discontinuous FEP**

Fine powder of PTFE polymer as described and taught in U.S. Patent Number 6,541,589 was blended with Isopar K (Exxon Mobil Corp., Fairfax, VA) in the proportion of 0.209 g/g of fine powder. The lubricated powder was compressed into a cylinder to form two pellets that were placed into an oven set at 49°C for approximately 12 hours. The compressed and heated pellets were ram extruded to produce tape approximately 16.2 cm wide by 0.70 mm thick. The two extruded tapes were then layered and rolled down between compression rolls to a thickness of 0.381 mm. The calendared tape was then transversely stretched to 32 cm (*i.e.*, at a ratio of 2.0:1) and dried at a temperature of approximately 230 °C. An approximately 12.5 um thick by approximately 28 cm wide FEP film available from Dupont De Numerous, Inc., (Wilmington, DE) was obtained. The calendared PTFE tape and the FEP film were laminated together during a longitudinal expansion process that consisted of stretching the two materials, in contact with one another, between banks of rolls over a heated plate

30



set to a temperature of 300 °C. The speed ratio between the second bank of rolls to the first bank of rolls was 10:1. The width of the resulting longitudinal expanded membrane was approximately 14 cm. The longitudinally expanded membrane (having FEP film laminated on one side) was then expanded  
5 transversely at a temperature of approximately 280 °C to a ratio of about 30:1 and then constrained from shrinkage and heated in an oven set at 360 °C for approximately 10 seconds. The resulting expanded fluoropolymer membrane had regions of FEP discontinuously located on one surface thereof.

This expanded, discontinuously coated fluoropolymer membrane was  
10 thermally retracted in the following manner. A roll of precursor membrane where the length direction corresponded with the strongest direction of the membrane, was restrained in the clamps of a heated, uniaxial tenter frame and fed into the heated chamber of the tenter frame. The oven temperature was set to about 270 °C. The rails of the tenter frame within the heated chamber were angled inward  
15 to allow membrane shrinkage to about 24.6% of its original width in response to the heat. The membrane was retracted over a period of time of approximately 20 seconds.

A scanning electron micrograph of the retracted membrane is provided in  
20 FIG. 2, in which the magnification was 200x. Note the presence of regions of FEP, depicted by reference numeral 40, discontinuously located on the surface.

## EXAMPLE 2

The retracted membrane of Example 1 was used to create a covered stent  
device. An 8 mm diameter x 6 mm long stainless steel stent (Cordis Palmaz-  
25 Schatz Transhepatic Biliary stent, Cat. No. PS5608A, Lot No. R0599853, Cordis Corp., Bridgewater, NJ) was obtained. The retracted membrane of Example 1 was used to cover the stent as follows. A tube was constructed from a 150 mm wide sample of the membrane. A 4 mm diameter, 150 mm long stainless steel mandrel was obtained. Twelve layers of the 150 mm wide membrane were  
30 circumferentially wrapped around the mandrel such that the retracted direction of the membrane was oriented along the circumferential axis of the mandrel. The

FEP side of the membrane faced outward. A soldering iron set to approximately 320°C was used to spot tack the free edge of the film. A 1.3 cm wide slit of an ePTFE film was wrapped on each end of the tube to avoid longitudinal retraction during subsequent heating. The assembly was then placed into an oven set to 5 340° C for about 20 minutes, thereby creating a tube. The tube was allowed to cool and was removed from the mandrel. The tube was cut into two 75 mm lengths. One length was everted in order to position the FEP on the interior surface of the tube.

The tube with the FEP positioned on the exterior surface was placed over 10 the 4 mm stainless steel mandrel. The 8 mm stent was partially inflated to about 3 mm (using the balloon onto which the commercially available stent had been mounted). The stent was removed from the balloon and slipped onto a tapered 4.5 mm stainless steel mandrel in order to increase its diameter. The stent was removed from the 4.5 mm mandrel and slipped on top of the membrane-covered 15 4 mm stainless steel mandrel. The everted tube was then placed over top of the stent. A 5 mm inner diameter, 0.75 mm thick extruded, expanded sacrificial ePTFE tube was placed over the tube/stent assembly. An iris-style radial crushing device (Blockwise Engineering LLC, Tempe, AZ) was used to bring the exterior tube through the stent openings into contact with the inner tube, thereby 20 bringing the FEP on both tubes into contact.

With the tubes still in contact, an ePTFE film was wrapped around the outside of the exterior sacrificial tube. The entire assembly was then placed in an oven set to 320° C for about 15 minutes. The assembly was removed from the oven, allowed to cool, and the now-formed covered stent was removed from 25 the mandrel and sacrificial layers. The excess tube material at the ends of the stent was trimmed. The covered stent was crushed onto the deflated 8 mm balloon on which the stent had been provided.

A scanning electron micrograph of the cover inflated to approximately 4 mm is provided in FIG. 3 at a magnification of 10,000x.

30 A balloon inflator (COMPAK balloon inflator, Merit Medical, South Jordan, UT)) was obtained and utilized to create a pressure-diameter curve as shown in

FIG. 4 using the method described above. FIG. 4 is the pressure-diameter curve corresponding to the covered stent where the cover is formed of the retracted membrane containing discontinuous FEP. As shown in FIG. 4, the retracted membrane can be elongated at a low pressure until reaching the diameter where the slope of the curve substantially decreases, indicating an increased stiffness. The stent cover remained wrinkle-free throughout the test. At about 3 ATM, the stent began to expand. Once about 9 ATM was reached, the stent resisted further expansion due to the presence of the cover. The covered stent exhibited minimal foreshortening during the expansion process and the composite material exhibited a stop point at a diameter of about 7 mm.

The invention of this application has been described above both generically and with regard to specific embodiments. The invention is not otherwise limited, except for the recitation of the claims set forth below.

## CLAIMS

### What is claimed is:

1. An article comprising an expanded fluoropolymer membrane having a  
5 discontinuous coating of a fluoropolymer thereon,  
wherein said expanded fluoropolymer membrane includes serpentine  
fibrils, each said serpentine fibril having a width of about 1.0 micron or less.
2. The article of claim 1, wherein the expanded fluoropolymer membrane  
comprises pores and the fluoropolymer at least partially penetrates a plurality of  
10 said pores.
3. The article of claim 1, wherein the fluoropolymer is fluorinated ethylene  
propylene.
4. The article of claim 1, wherein the expanded fluoropolymer membrane is  
expanded polytetrafluoroethylene.
- 15 5. The article of claim 1, wherein the expanded fluoropolymer membrane  
comprises a microstructure of substantially only serpentine fibrils.
6. The article of claim 1, wherein the expanded fluoropolymer membrane  
comprises a plurality of serpentine fibrils.
7. The article of claim 1, wherein the expanded fluoropolymer membrane is  
20 thermally retracted in at least one direction to less than about 90% of the initial,  
expanded fluoropolymer membrane length.
8. The article of claim 7, wherein the expanded fluoropolymer membrane is  
thermally retracted in at least one direction.
9. The article of claim 8, wherein the expanded fluoropolymer membrane is  
25 restrained in at least one direction during said thermal retraction.
10. The article of claim 1, further comprising at least one elastomer  
incorporated at least partially into the expanded fluoropolymer membrane.
11. The article of claim 1, wherein said width of said serpentine fibril is 0.5  
microns or less.
- 30 12. An endoprosthesis device comprising:

a wrinkle-free tubular member defining at least one opening, an interior surface, and an exterior surface, said tubular member comprising a composite material including an expanded fluoropolymer membrane having serpentine fibrils and a discontinuous coating of a fluoropolymer thereon.

- 5 13. The endoprosthesis device of claim 12, wherein each said serpentine fibril has a width of about 1.0 micron or less.
14. The endoprosthesis device of claim 13, wherein each said serpentine fibril has a width of 0.5 microns or less.
15. The endoprosthesis device of claim 12, wherein the expanded  
10 fluoropolymer membrane comprises pores and the fluoropolymer at least partially penetrates a plurality of said pores.
16. The endoprosthesis device of claim 12, wherein said expanded fluoropolymer membrane comprises expanded polytetrafluoroethylene.
17. The endoprosthesis device of claim 12, wherein said tubular member is a  
15 cover for a stent.
18. The endoprosthesis device of claim 17, wherein said fluoropolymer on said exterior surface bonds to said fluoropolymer on said interior surface through interstices of said stent to affix said cover to said stent.
19. The endoprosthesis device of claim 12, wherein said fluoropolymer  
20 comprises a member selected from the group consisting of fluorinated ethylene propylene (FEP), ethylene fluorinated ethylene propylene (EFEP), THV (a terpolymer of tetrafluoroethylene, hexafluoropropylene, and vinylidene fluoride), PFA (perfluoroalkoxy copolymer resin), ECTFE (ethylene chlorotrifluoroethylene), PVDF (polyvinylidene fluoride) and PEEK (polyether ether ketone).
- 25 20. The endoprosthesis device of claim 12, wherein said fluoropolymer is fluorinated ethylene propylene.
21. The endoprosthesis device of claim 12, wherein the expanded polytetrafluoroethylene membrane comprises a microstructure of substantially only serpentine fibrils.
- 30 22. The endoprosthesis device of claim 12, wherein the expanded fluoropolymer membrane comprises a plurality of serpentine fibrils.

23. The endoprosthesis device of claim 12, wherein said composite material is radially expanded to a diameter beyond which further expansion is inhibited.

24. The endoprosthesis device of claim 12, further comprising at least one elastomer incorporated at least partially into the expanded fluoropolymer membrane.

25. The endoprosthesis device of claim 12, wherein the expanded fluoropolymer membrane is thermally retracted in at least one direction to less than about 90% of the initial, expanded fluoropolymer membrane length.

26. The endoprosthesis device of claim 25, wherein the expanded fluoropolymer membrane is restrained in at least one direction during said thermal retraction.

27. The endoprosthesis device of claim 12, wherein said composite material exhibits an increase in stiffness when expanded to a diameter of about 7 mm.

28. A stent graft comprising:

a stent having a wall with at least one opening, an exterior surface, and an interior surface; and

a wrinkle-free cover affixed to said stent, said cover comprising a composite material including an expanded fluoropolymer membrane having serpentine fibrils and a discontinuous coating of a fluoropolymer thereon,

wherein said composite material at least partially covers at least one of the interior and exterior surfaces of said stent.

29. The stent graft of claim 28, wherein each said serpentine fibril has a width of about 1.0 micron or less.

30. The stent graft of claim 29, wherein each said serpentine fibril has a width of 0.5 microns or less.

31. The stent graft of claim 28, wherein the expanded fluoropolymer membrane comprises pores and the fluoropolymer at least partially penetrates a plurality of said pores.

32. The stent graft of claim 28, wherein said stent is extended to a first diameter at a first pressure and to a second diameter at a second pressure, said second pressure being greater than said first pressure.

33. The stent graft of claim 28, wherein said fluoropolymer on said exterior surface bonds to said fluoropolymer on said interior surface through interstices of said stent to affix said cover to said stent.

34. The stent graft of claim 28, wherein the fluoropolymer is fluorinated ethylene propylene.

35. The stent graft of claim 28, wherein the expanded fluoropolymer is expanded polytetrafluoroethylene.

36. The stent graft of claim 28, wherein the expanded fluoropolymer membrane comprises a microstructure of substantially only serpentine fibrils.

37. The stent graft of claim 28, wherein the expanded fluoropolymer membrane comprises a plurality of serpentine fibrils.

38. The stent graft of claim 28, wherein said composite material is radially expanded to a diameter beyond which further expansion is inhibited.

39. The stent graft of claim 28, wherein said composite material exhibits an increase in stiffness when expanded to a diameter of about 7 mm.

40. The stent graft of claim 28, wherein said composite material is free of wrinkles.

41. A method of forming a covered stent comprising:

positioning a first tubular member on an interior surface of a stent;

positioning a second tubular member on an external surface of said stent,

each said tubular member comprising a composite material including an expanded polytetrafluoroethylene membrane having serpentine fibrils and a discontinuous coating of a fluoropolymer thereon, said fluoropolymer being positioned on an external surface of said first and tubular member and on an interior surface of said second tubular member; and

heating said stent having thereon said first and second tubular members to adhere said fluoropolymer on said first tubular member to said second tubular member through interstices of said stent and form a covered stent.

42. The method of claim 41, wherein the fluoropolymer is fluorinated ethylene propylene.

43. The method of claim 41, wherein the expanded fluoropolymer membrane comprises a microstructure of substantially only serpentine fibrils.
44. The method of claim 41, wherein the expanded fluoropolymer membrane comprises a plurality of serpentine fibrils.
- 5 45. The method of claim 41, wherein said composite material is radially expanded to a diameter beyond which further expansion is inhibited.
46. The method of claim 41, wherein said first and second tubular members are wrinkle-free.
47. The method of claim 41, wherein the expanded fluoropolymer membrane  
10 comprises pores and the fluoropolymer at least partially penetrates a plurality of said pores.
48. The method of claim 41, wherein said composite material exhibits an increase in stiffness when expanded to a diameter of about 7 mm.
49. The method of claim 41, wherein each said serpentine fibril has a width of  
15 about 1.0 micron or less.
50. The method of claim 51, wherein each said serpentine fibril has a width of 0.5 microns or less.
51. A method of forming a covered stent comprising:  
forming a tube comprising a composite material including an expanded  
20 polytetrafluoroethylene membrane and a discontinuous coating of a fluoropolymer thereon, said fluoropolymer being positioned on an external surface of said tube;  
cutting said tube cross-sectionally to form a first tubular member and a second tubular member;  
25 everting said second tubular member to position said fluoropolymer on an interior surface of said second tubular member;  
positioning said first tubular member within a stent;  
positioning said second tubular member on an external surface of said stent; and



heating said covered stent to adhere said fluoropolymer on said first tubular member to said second tubular member through interstices of said stent to form a covered stent.

52. The method of claim 51, wherein said expanded fluoropolymer membrane  
5 comprises a microstructure of serpentine fibrils.
53. The method of claim 52, wherein each said serpentine fibril has a width of about 1.0 micron or less.

FIGURE 1

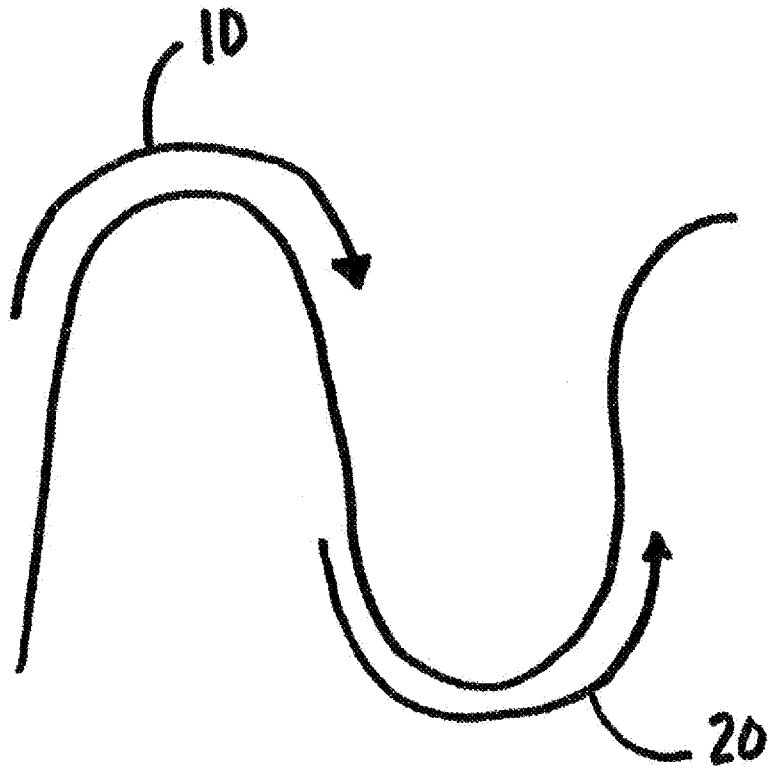


FIGURE 2

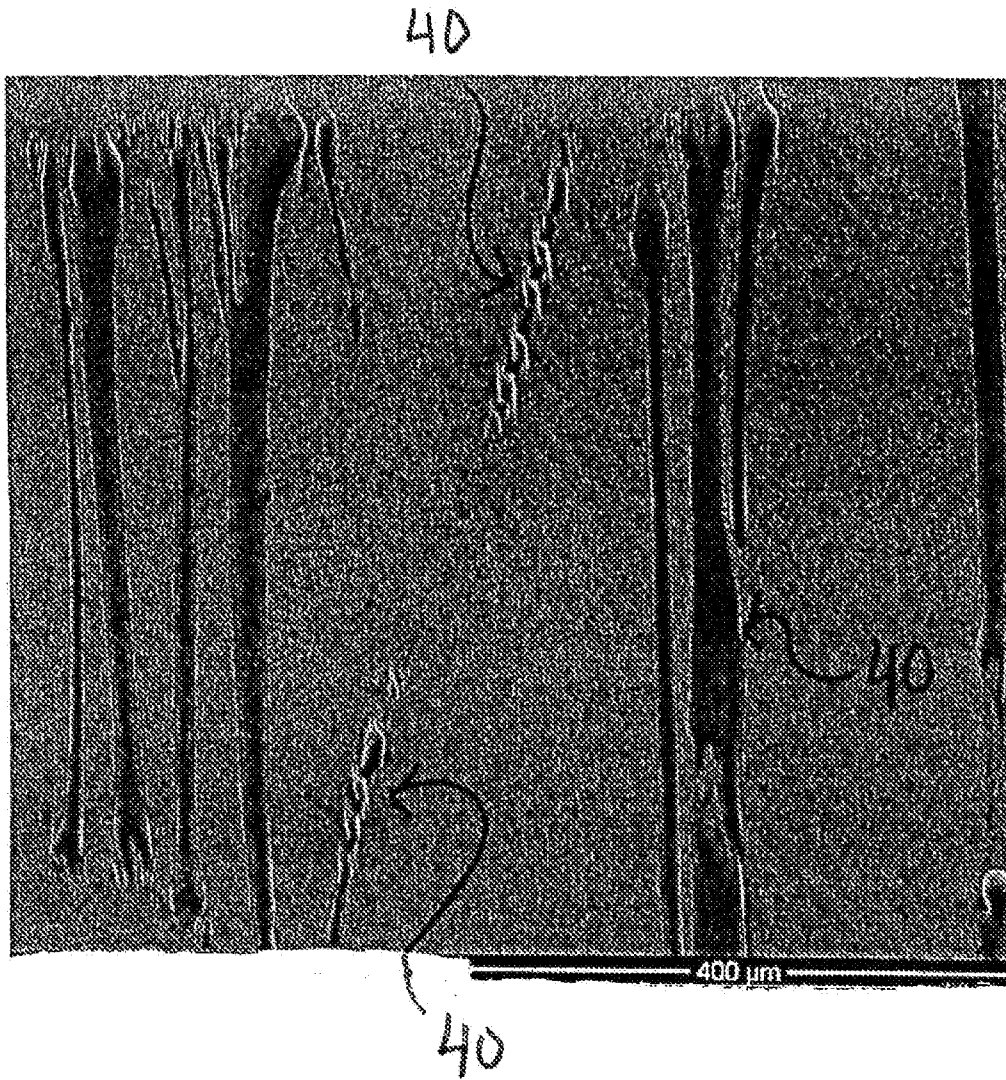


FIGURE 3


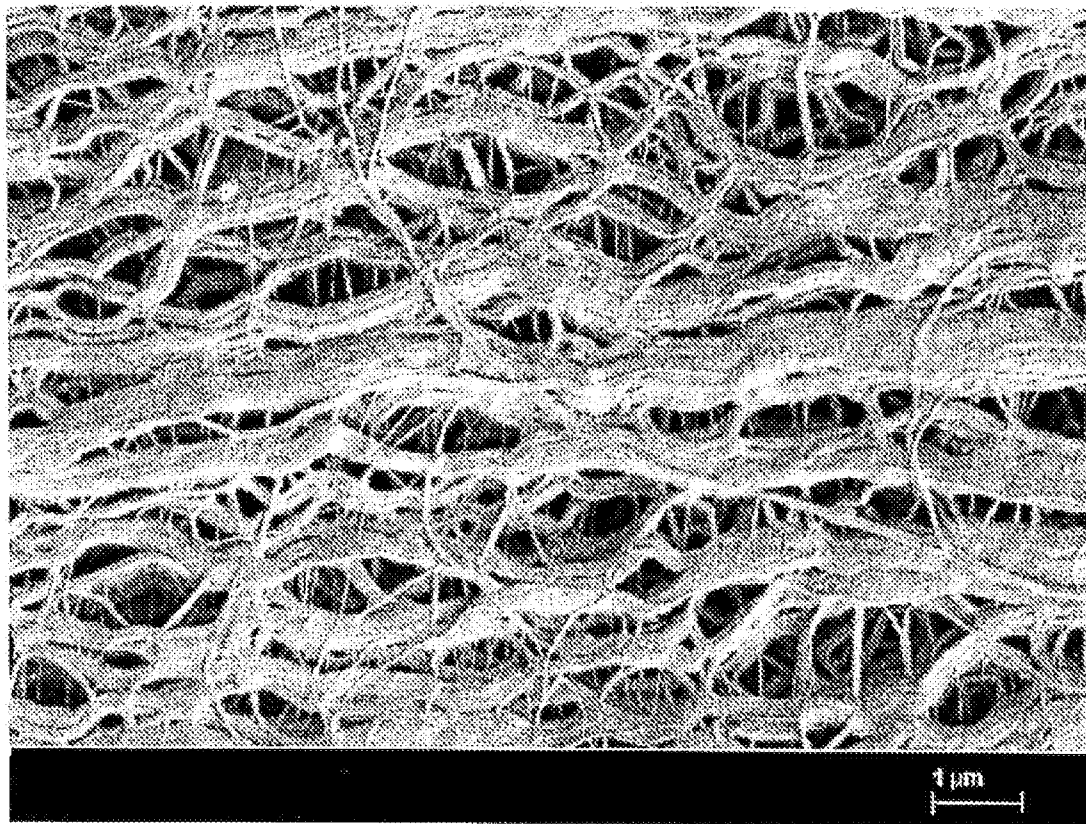


FIGURE 4

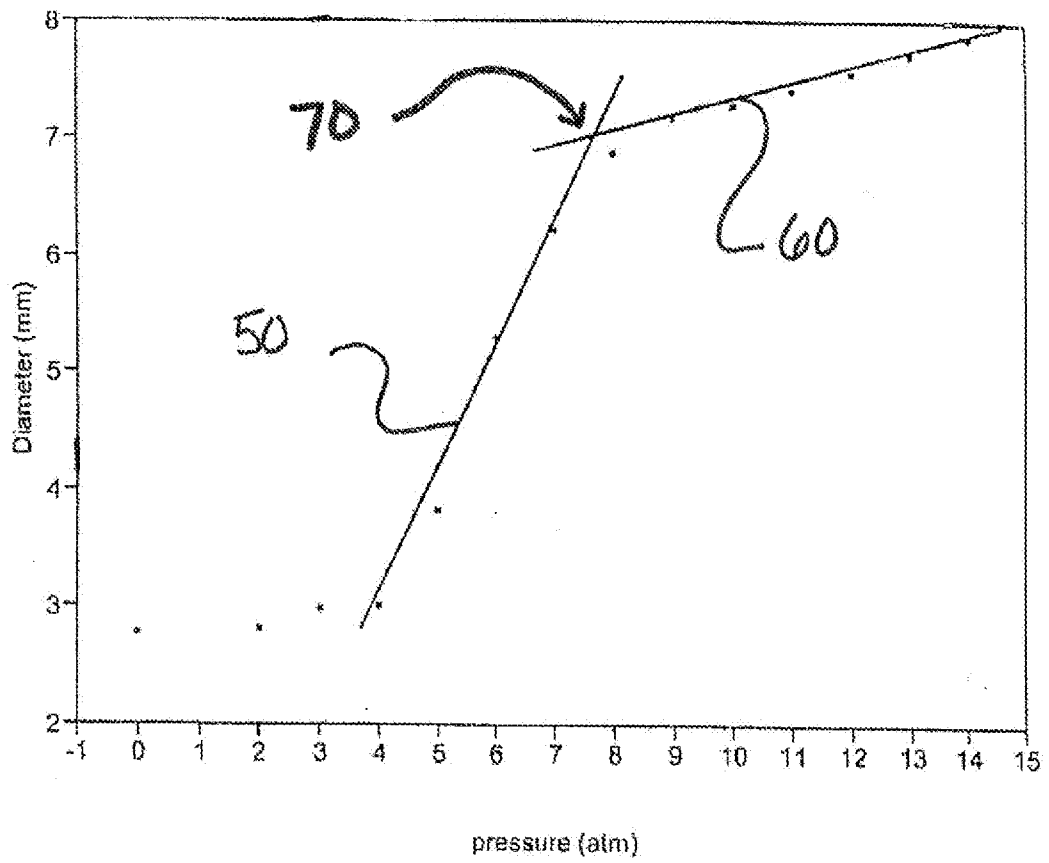

**INTERNATIONAL SEARCH REPORT**

International application No PCT/US2012/064908
---

**A. CLASSIFICATION OF SUBJECT MATTER**  
 INV. C08J7/04 B29C55/00 C08J5/18 D04H1/4391 B01D67/00  
 ADD.  
 According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**  
 Minimum documentation searched (classification system followed by classification symbols)  
 C08J  
 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
 EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/198588 A1 (ARMSTRONG JOSEPH R [US] ET AL) 26 December 2002 (2002-12-26)	1-40
Y	paragraphs [0070], [0071], [0089], [0095]; claims; figures -----	41-49
X	WO 95/05555 A1 (GORE & ASS [US]) 23 February 1995 (1995-02-23) claims; figures; examples -----	1-40
X	WO 97/10871 A1 (GORE & ASS [US]) 27 March 1997 (1997-03-27) claims; figures; examples -----	1-40
Y	US 6 010 529 A (HERWECK STEVE A [US] ET AL) 4 January 2000 (2000-01-04) column 2, lines 40-66; claims -----	41-49
	-/--	

Further documents are listed in the continuation of Box C.       See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search  28 January 2013	Date of mailing of the international search report  04/02/2013
--	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Frison, Céline
--	--

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2012/064908

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2010/159171 A1 (CLOUGH NORMAN ERNEST [US]) 24 June 2010 (2010-06-24) the whole document -----	1-53
A	EP 0 293 090 A2 (BAXTER TRAVENOL LAB [US]) 30 November 1988 (1988-11-30) cited in the application the whole document -----	1-53

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/064908

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002198588 A1	26-12-2002	AT 326197 T	15-06-2006
		AU 774924 B2	15-07-2004
		AU 2623300 A	07-08-2000
		CA 2328999 A1	27-07-2000
		DE 60027999 T2	26-04-2007
		EP 1121066 A2	08-08-2001
		ES 2259996 T3	01-11-2006
		US 2002198588 A1	26-12-2002
		WO 0042947 A2	27-07-2000
WO 9505555 A1	23-02-1995	AU 7635794 A	14-03-1995
		CA 2167708 A1	23-02-1995
		DE 69409814 D1	28-05-1998
		DE 69409814 T2	22-10-1998
		EP 0714487 A1	05-06-1996
		JP H09501759 A	18-02-1997
		US 6027779 A	22-02-2000
		WO 9505555 A1	23-02-1995
		WO 9710871 A1	27-03-1997
CA 2230973 A1	27-03-1997		
DE 69625216 D1	16-01-2003		
DE 69625216 T2	14-08-2003		
EP 0851777 A1	08-07-1998		
JP H11512329 A	26-10-1999		
US 5868704 A	09-02-1999		
US 6120477 A	19-09-2000		
US 2003074016 A1	17-04-2003		
US 2005273152 A1	08-12-2005		
US 2007061000 A1	15-03-2007		
US 2008312730 A1	18-12-2008		
WO 9710871 A1	27-03-1997		
US 6010529 A	04-01-2000		
		US 6270523 B1	07-08-2001
US 2010159171 A1	24-06-2010	CA 2746633 A1	15-07-2010
		CN 102317520 A	11-01-2012
		EP 2358934 A1	24-08-2011
		JP 2012512971 A	07-06-2012
		KR 20110104514 A	22-09-2011
		US 2010159171 A1	24-06-2010
		WO 2010080126 A1	15-07-2010
EP 0293090 A2	30-11-1988	CA 1302897 C	09-06-1992
		EP 0293090 A2	30-11-1988
		JP 1046468 A	20-02-1989
		US 4816339 A	28-03-1989