


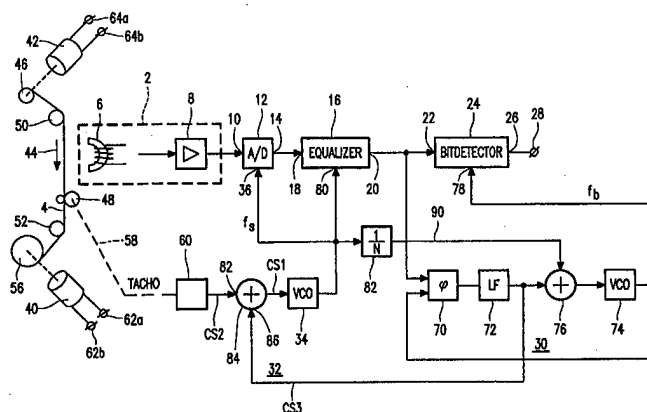

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G11B 20/10, 15/52	A2	(11) International Publication Number: WO 98/49683 (43) International Publication Date: 5 November 1998 (05.11.98)
(21) International Application Number: PCT/IB98/00365 (22) International Filing Date: 16 March 1998 (16.03.98) (30) Priority Data: 97201273.6 28 April 1997 (28.04.97) EP (34) Countries for which the regional or international application was filed: NL et al. (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE). (72) Inventor: VAN DEN ENDEN, Gijsbert, Joseph; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: VAN DER KRUK, Willem, L.; Internationaal Octroobureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).		(81) Designated States: CN, JP, KR, NO, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: REPRODUCTION OF AN INFORMATION SIGNAL FROM A RECORD CARRIER**(57) Abstract**

The invention relates to an apparatus for reproducing an information signal from a record carrier. The apparatus comprises reading means (6, 8) for reading the information signal from a track on the record carrier (4). The reading means comprises at least one read head (6) for reading the information signal from said track. Further, an A/D converter (12, 34) is available for A/D converting the information signal read from the record carrier with a specific clock frequency (f_s), in response to a first control signal (cs1). A bit detector unit (24) is provided having an input coupled to the A/D conversion means, which bit detector unit is adapted to retrieve a sequence of bits from the signal applied to its input, with a specific bit frequency (f_b). A generator unit for deriving said first control signal, as well as a generator for deriving said specific bit frequency is available. The generator unit for deriving said first control signal comprises a coarse control signal generator (48, 60) for deriving a coarse control signal so as to generate such specific clock frequency (f_s) that roughly N samples per bit are supplied by the A/D conversion means (12, 34), irrespective of the relative velocity of the said at least one read head with reference to the said track, and a fine control signal generator (30, 70, 72) for deriving a fine control signal (cs3) so as to correct for the deviation of the specific clock frequency, expressed in number of samples per bit, from the value of N samples per bit, where N is a positive constant value.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Reproduction of an information signal from a record carrier

The invention relates to an apparatus for reproducing an information signal from a record carrier. Such apparatuses are well known in the art. Reference is made in this respect to US Patent Spec. 5,569,912, document D1 in the list of related documents that can be found at the end of this description.

5

The apparatus defined above may be of the SDAT type or the DCC type, or may be of the helical scanning type. In all apparatuses, the at least one reading head reads the information signal from a track on the record carrier, whilst the head is moved relative to the track with a specific velocity. The record carrier is aimed at being transported with a nominal velocity during reproduction, so that an information signal with a substantially constant bitrate can be regenerated from the record carrier.

The invention aims at providing a reproducing apparatus which is more versatile and is capable of reading information from the record carrier at various speeds.

In accordance with the invention, the apparatus for reproducing an information signal from a record carrier, comprising

- reading means (6,8) for reading the information signal from a track on the record carrier (4), the reading means comprising at least one read head (6) for reading the information signal from said track,
- A/D conversion means (12,34) for A/D converting the information signal read from the record carrier with a specific clock frequency (f_s), in response to a first control signal (cs1),
- bit detector means (24) having an input coupled to the A/D conversion means, which bit detector means is adapted to retrieve a sequence of bits from the signal applied to its input, with a specific bit frequency (f_b),
- output means (28) for supplying the sequence of bits,
- means for deriving said first control signal,
- means (30) for deriving said specific bit frequency,

wherein the means for deriving said first control signal comprises means (48,60) for deriving a second control signal (cs2) which is a measure of the relative velocity of the said at least one read head with reference to the said track, and means (30,70,72) for deriving a third

control signal (cs3) which has a relationship with the bit frequency, and means (84) for deriving the first control signal from the second and third control signal.

The invention is based on the recognition to provide an apparatus having an A/D converter and further digital elements, such as an equalizer and bitdetector means, where the ratio between the specific clock frequency and the bit frequency is a fixed value N. This is realized by two control loops, one coarse control loop and a fine control loop. The coarse control loop generates the second control signal and controls the said specific clock frequency in such a way that the A/D converter supplies a substantially fixed number of N samples per bit to be detected, irrespective of the relative velocity of the read head with reference to the track. The fine control loop generates the third control signal and controls said specific clock frequency so as to correct for the deviation of the specific clock frequency, expressed in number of samples per bit, from the value of N samples per bit.

As a result, although the means for deriving said specific bit frequency may have a small capture range, the apparatus will very quickly control towards the N samples per bit situation.

These and other aspects of the invention will be apparent from and elucidated with respect to the embodiments described hereafter in the figure description, in which

figure 1 shows an embodiment of the apparatus,
figure 2 shows the addition of an output buffer to the apparatus of figure 1,

figure 3 shows another embodiment of the A/D converter in the apparatus of figure 1,

figure 4 shows an embodiment of the equalizer unit in the apparatus of figure 1,

figure 5 shows the magnitude characteristic as a function of frequency of the information signal read from the record carrier, for two different speeds of the record carrier during reproduction,

figure 6 shows the filter curve of the equalizer unit as a function of frequency, for the same two different speeds of the record carrier, and

figure 7 shows the capture range of the phase locked loop in the apparatus of figure 1.

Figure 1 shows an embodiment of the reproducing apparatus in accord-

ance with the invention. The apparatus comprises a reading unit 2 for reading the information from a record carrier 4. The reading unit comprises at least one read head 6 and generally also a pre amplifier 8. An output of the reading unit 2 is coupled to an input 10 of an A/D converter 12, which has an output 14. The A/D converter 12 samples the information read from a track on the record carrier 4 with a specific clock frequency (or sampling) f_s and supplies samples of the information signal with said specific clock frequency at its output 14.

The apparatus is generally provided with an equalizer unit 16. The equalizer unit 16 is however not strictly necessary for explaining the invention, so could be left out. An input 18 of the equalizer unit 16 is coupled to the output 14 of the A/D converter 12 and an output of the equalizer unit 16 is coupled to an input 22 of a bit detector unit 24. An output 26 of the bit detector unit 24 is coupled to an output terminal 28.

The bit detector unit 24 is adapted to retrieve a sequence of bits from the signal applied to its input 22, with a specific bit frequency f_b .

The apparatus further comprises a generator circuit 30 for generating the bit frequency f_b and a generator circuit 32 for generating the clock frequency f_s . The generator circuit 32 is a phase locked loop and comprises a phase comparator 70, a loop filter 72 and a voltage controlled oscillator 74. A first input of the phase comparator 70 is coupled to the output of the equalizer unit 16 and a second input of the phase comparator 70 is coupled to the output of the oscillator 74. An output of the phase comparator 70 is coupled to an input of the loopfilter 72, which has an output coupled, via a signal combination unit 76 to an input of the oscillator 74. The output of the oscillator 74 is further coupled to a clock input of the bit detector 24.

It should be noted that the generator circuits 30 and 32 function such that they generate frequencies f_b and f_s respectively, such that $f_s/f_b = N$, where N is a constant, not necessarily an integer constant, irrespective of the relative speed of the head 6 with reference to the track on the record carrier which is read out.

The value N stands for the number of samples per bit, to be detected by the bit detector unit 24, and generated by the A/D converter 12.

The A/D converter 12 converts the information signal read from the record carrier with said specific clock frequency f_s , in response to a first control signal $cs1$. In the present embodiment, this clock signal is generated by a voltage controlled oscillator 34, which is part of the loop 32 and supplies the clock frequency f_s to a clock input 36 of the A/D converter 12. The clock frequency f_s is also supplied to a clock input 80 of the

equalizer unit 16 and to a converter 82. The converter 82 is in the form of a frequency divider and divides the frequency f_s supplied to its input by N and supplies a frequency f_s/N to its output. This output is coupled to another input of the signal combination unit 76.

Drive motors 40 and 42 are provided for transporting the record carrier 4 in a direction indicated by the arrow 44 or in a direction reverse thereto. When driven in the direction indicated by the arrow 44, the record carrier is transported from a supply reel 46, via a roller 50, past the read head 6 and a friction roller 48, and via a roller 52 onto a take up reel 56. The friction roller 48 is provided with a tacho generator which supplies tacho pulses via the line 58 towards a converter 60. Drive signals to drive the drive motors 40 and 42 are supplied via their terminals 62a, 62b and 64a, 64b, respectively.

The converter 60 generates a second control signal $cs2$ in response to the tacho pulses generated by the tacho generator coupled to the friction roller 48. The second control signal $cs2$ is a measure of the relative velocity of the read head 6 with reference to the track from which it reads the information signal. The second control signal $cs2$ is supplied to an input 82 of a signal combination unit 84. Via a second input 86 of the combination unit 84, a third control signal $cs3$ is supplied. This third control signal $cs3$ is the output signal of the loop filter 72 in the PLL 30.

The functioning of the apparatus will now be described in greater detail. It is assumed that the record carrier is driven at a specific speed v_1 . As a result, tacho pulses are supplied to the converter 60 and the converter 60 generates a second control signal $cs2$ in response thereto. The second control signal $cs2$ is supplied to the oscillator 34 and results in the generation of a clock frequency f_s , which is supplied to the A/D converter 12. In response thereto, the A/D converter 12 samples the information signal read from the record carrier such that roughly N samples per bit to be detected are generated. When the record carrier speed changes, either increases or decreases, the frequency of the tacho pulses generated increases or decreases. As a result, the clock frequency f_s increases or decreases. With an increased (decreased) record carrier speed, however, the information signal is read out with an increased (decreased) speed and this information signal is sampled with an increased (decreased) clock frequency f_s , so that, in the end, again roughly N samples per bit to be detected are generated by the A/D converter 12, irrespective of the record carrier speed.

The control loop, formed by the elements 48, 60, 34 thus constitutes a coarse control loop, such that at the output of the A/D converter 12, roughly a fixed number (N) of samples per bit to be detected is generated. N could, as an example be chosen equal

to 3.

The equalizer unit 16 also receives the clock frequency f_s . Figure 4 shows an example of an embodiment of the equalizer unit 16, figure 5 shows an example of the magnitude characteristic M_1 as a function of frequency, of the information signal read from the record carrier at said specific speed v_1 and figure 6 shows by the curve H_1 the frequency characteristic of the equalizer unit 16 at said specific record carrier speed v_1 . The magnitude characteristic M_1 has a certain magnitude $M_1(f_b)$ the bit frequency f_b .

The delay elements denoted T in the equalizer unit of figure 4 are controlled by the clock frequency f_s and realize a delay T which equals $1/f_s$. With this delay, the equalizer unit 16 of figure 4 realizes the frequency characteristic H_1 in figure 6.

When changing the record carrier speed, such as decreasing the speed by a factor of 2, the magnitude characteristic of the signal read from the record carrier scales down by a factor of 2, so that it changes into the characteristic M_2 shown in figure 5. The magnitude $M_2(f_b')$ at the new bit frequency f_b' , is equal to $M_1(f_b)$. Because of the control loop formed by the elements 48, 60 and 34, the clock frequency f_s is changed (decreased) with the same ratio of 2. As a result, the delays in the equalizer unit of figure 4 change, in the sense that their delay increases by this same factor of 2. This results in the frequency characteristic H_2 in figure 6. This characteristic H_2 has thus been scaled down to the same extent as the magnitude characteristic M_2 of the information signal read from the record carrier.

The functioning of the equalizer unit 16 is thus such that, again irrespective of the record carrier speed, the equalizer unit 16 correctly equalizes the signal read from the record carrier, under the control of the clock frequency f_s generated by the oscillator 34.

The converter unit 82 generates a control signal at its output which is supplied via the combination unit 76 to the oscillator 74 so as to position the oscillator unit 74 at the frequency f_s/N .

It should be noted that the PLL 30 controls the frequency of the oscillator 74 towards f_b . The PLL 30, however, has a small capture range of, eg. 10 % smaller or larger than f_b , see figure 7. Using the control signal, applied via the line 90 and the signal combination unit 76 to the VCO 74, this VCO 74 is quickly brought into the vicinity of f_b , such as indicated by the line 92 in figure 7. Without the fine control, using the control signal cs_3 , to be described later, the VCO 74 will maintain the frequency value f_b'' and a disturbance, eg. caused by a variation in the speed of the record carrier will bring the frequency out of the capture range of the loop 30, as shown by the curve 92 in figure 7, so that the PLL 30

is out of lock.

The phase comparator 70 and loopfilter 72, however, generate a control signal, which is the control signal cs3, which is a measure of the deviation of the frequency of the VCO 74 from the required bit frequency f_b . It should be noted here, that the required
5 bit frequency f_b is not a fixed frequency value, but varies with varying record carrier speed.

This control signal cs3 is supplied to the second input 86 of the signal combination unit 84. This control signal cs3 is a fine control signal and controls the frequency of the VCO 74 towards the required bit frequency f_b . This is shown by the line 94
10 in figure 7. A disturbance, eg. caused by a variation in the speed of the record carrier, will result in a variation in the frequency of the VCO 74. This variation however is kept within the capture range of the loop 30, as shown by the curve 94 in figure 7, so that the PLL 30 remains in a locked situation.

Figure 2 shows a buffer memory 100 that can be coupled to the output terminal 28 of the apparatus of figure 1. The buffer memory 100 functions as a FIFO
15 memory. The sequence of bits detected by the bit detector 24 can be stored in the buffer memory with a specific frequency f_{in} , which will equal the frequency f_b , generated by the oscillator 74.

The detected bits can be retrieved from the buffer memory 100 using a read out clock frequency f_{out} . This frequency f_{out} can be smaller or larger than f_{in} . In the
20 former case, the buffer memory 100 will gradually be filled with information, resulting in an overflow. In the latter case, the buffer will gradually be emptied, until no bits are available anymore for supply with the required rate of f_{out} . In order to overcome these problems, the buffer memory 100 is provided with an output 102, at which output 102 a signal is available which is indicative of the filling degree of the buffer memory 100. This signal is converted
25 into a control signal in a converter 104, and supplied to a motor control unit 106. The motor control unit 106 supplies drive signals to the inputs 62a,62b and 64a,64b of the motors 40 and 42 respectively.

When f_{out} is larger than f_{in} , the filling degree decreases. As a result, a control signal is generated such that the transport speed of the record carrier 4 is increased.
30 When f_{out} is smaller than f_{in} , the filling degree increases. As a result, a control signal is generated such that the transport speed of the record carrier 4 is decreased. The coarse control loop via the elements 60, 82 and 34 as well as the fine control loop 30, via the elements 70, 72, 82 and 34 adapts itself automatically to the varying transport speed of the record carrier, as explained above.

Figure 3 shows another embodiment of the A/D converter unit 12 of figure 1. The A/D converter unit of figure 3 comprises an A/D converter 110, which receives a sampling frequency generated by an oscillator 112 via a clock input 114. The sampling frequency generated by the oscillator 112 can be higher than f_s . The samples generated by the converter 110 are supplied to a down sampler, which down samples the signal supplied to its input 118 in response to the first control signal cs_1 , applied to a control signal input 120. At its output 14, the information signal, sampled at the frequency f_s will be available.

It should be noted that the down sampler 116 can not only down sample the array of samples applied to its input 118, but can also, if required, carry out an interpolation, so as to obtain its output signal.

Whilst the invention has been described with reference to preferred embodiments thereof, it is to be understood that these are not limitative examples. Thus, various modifications may become apparent to those skilled in the art, without departing from the scope of the invention, as defined by the claims. As an example, the control signal cs_2 need not be derived from tacho impulses supplied by a tacho generator coupled to the friction roller 48. The second control signal could be derived in a different way, such as from signals (such as eg. a control pulse signal) recorded in a track running on (eg. longitudinally along) the record carrier 4. Further, in an alternative embodiment, the third control signal cs_3 could be generated in a way different from the way described above, namely, from the output 102 of the buffer memory 100. In this alternative embodiment, f_{out} is eg. derived from the element 82, see figure 1, and equals f_s/N . The control signal present at the output 102 of the buffer memory 100 is now a measure of the integral of $f_b - f_s/N$, and therefore a measure of the integral of the control signal cs_3 . Further, the record carrier may be a longitudinal record carrier, or a disk type record carrier, of the magnetic or the optical type.

Further, the invention lies in each and every novel feature or combination of features.

Related documents

(D1) USP 5,569,912 (PHN 14.875)

Claims

1. Apparatus for reproducing an information signal from a record carrier, comprising
 - reading means (6,8) for reading the information signal from a track on the record carrier (4), the reading means comprising at least one read head (6) for reading the information
 - 5 signal from said track,
 - A/D conversion means (12,34) for A/D converting the information signal read from the record carrier with a specific clock frequency (f_s), in response to a first control signal (cs1),
 - bit detector means (24) having an input coupled to the A/D conversion means, which bit detector means is adapted to retrieve a sequence of bits from the signal applied to its input,
 - 10 with a specific bit frequency (f_b),
 - output means (28) for supplying the sequence of bits,
 - means for deriving said first control signal,
 - means (30) for deriving said specific bit frequency,wherein the means for deriving said first control signal comprises means (48,60) for deriving
15 a second control signal (cs2) which is a measure of the relative velocity of the said at least one read head with reference to the said track, and means (30,70,72) for deriving a third control signal (cs3) which has a relationship with the bit frequency, and means (84) for deriving the first control signal from the second and third control signal.
2. Apparatus as claimed in claim 1, wherein the apparatus further comprises
20 voltage controlled oscillator means (34) for generating said specific clock frequency in response to said first control signal (cs1).
3. Apparatus as claimed in claim 1 or 2, wherein digital equalizer filter means (16) are provided for carrying out an equalization step on the digitized information signal read from the record carrier so as to obtain an equalized information signal, with said
25 specific clock frequency,
4. Apparatus as claimed in claim 3, wherein the means (30) for deriving said specific bit frequency is in digital form and is adapted to derive said specific bit frequency from said equalized information signal.
5. Apparatus for reproducing an information signal from a record carrier,

comprising

- reading means (6,8) for reading the information signal from a track on the record carrier (4), the reading means comprising at least one read head (6) for reading the information signal from said track,
 - 5 - A/D conversion means (12,34) for A/D converting the information signal read from the record carrier with a specific clock frequency (f_s), in response to a first control signal (cs1),
 - bit detector means (24) having an input coupled to the A/D conversion means, which bit detector means is adapted to retrieve a sequence of bits from the signal applied to its input, with a specific bit frequency (f_b),
 - 10 - output means (28) for supplying the sequence of bits,
 - means for deriving said first control signal,
 - means (30) for deriving said specific bit frequency,
- wherein the means for deriving said first control signal is adapted to generate such first control signal that the specific clock frequency and the bit frequency are in a substantially
- 15 fixed ratio N to each other, irrespective of the relative velocity of the said at least one read head with reference to the said track, where N is a positive constant value.

6. Apparatus for reproducing an information signal from a record carrier, comprising

- reading means (6,8) for reading the information signal from a track on the record carrier
- 20 (4), the reading means comprising at least one read head (6) for reading the information signal from said track,
- A/D conversion means (12,34) for A/D converting the information signal read from the record carrier with a specific clock frequency (f_s), in response to a first control signal (cs1),
- bit detector means (24) having an input coupled to the A/D conversion means, which bit
- 25 detector means is adapted to retrieve a sequence of bits from the signal applied to its input, with a specific bit frequency (f_b),
- output means for supplying the sequence of bits,
- means for deriving said first control signal,
- means (30) for deriving said specific bit frequency,
- 30 wherein the means for deriving said first control signal comprises coarse control signal generator means (48,60) for deriving a coarse control signal so as to generate such specific clock frequency (f_s) that roughly N samples per bit are supplied by the A/D conversion means (12,34), irrespective of the relative velocity of the said at least one read head with reference to the said track, and fine control signal generator means (30,70,72) for deriving a

fine control signal (cs3) so as to correct for the deviation of the specific clock frequency, expressed in number of samples per bit, from the value of N samples per bit, where N is a positive constant value.

1/3

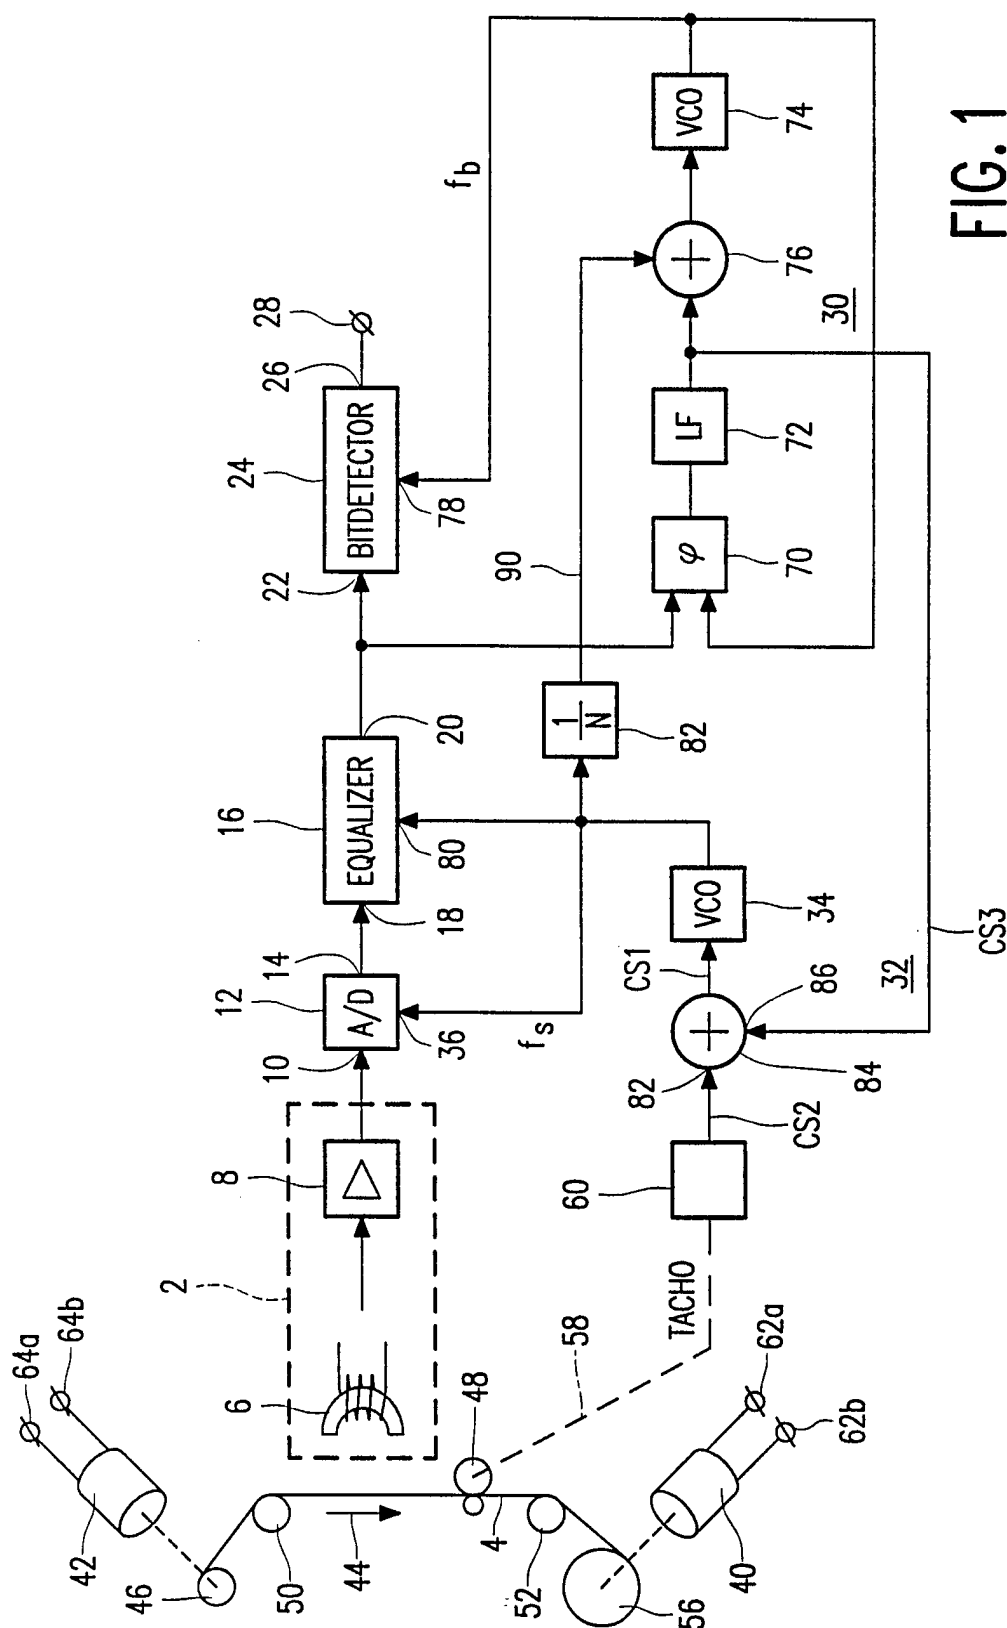


FIG. 1

2/3

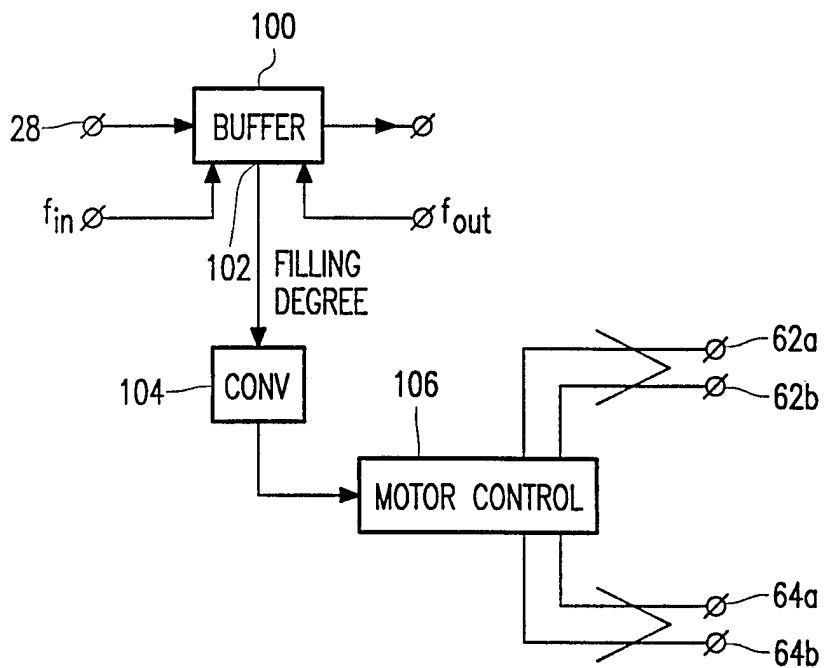


FIG. 2

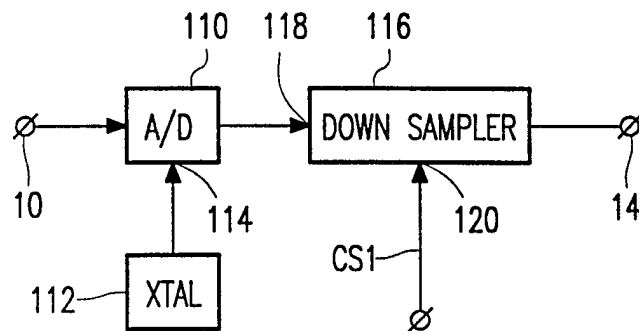


FIG. 3

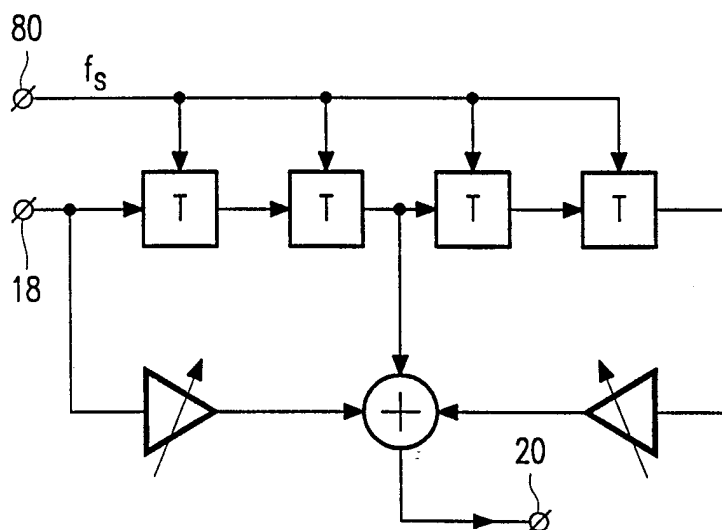


FIG. 4

3/3

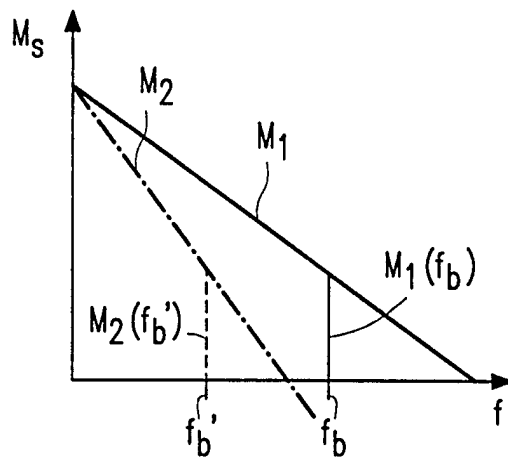


FIG. 5

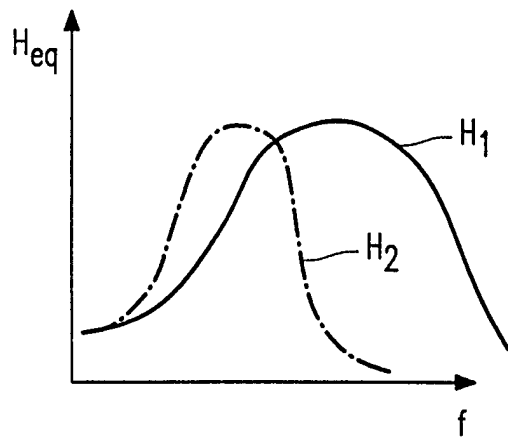


FIG. 6

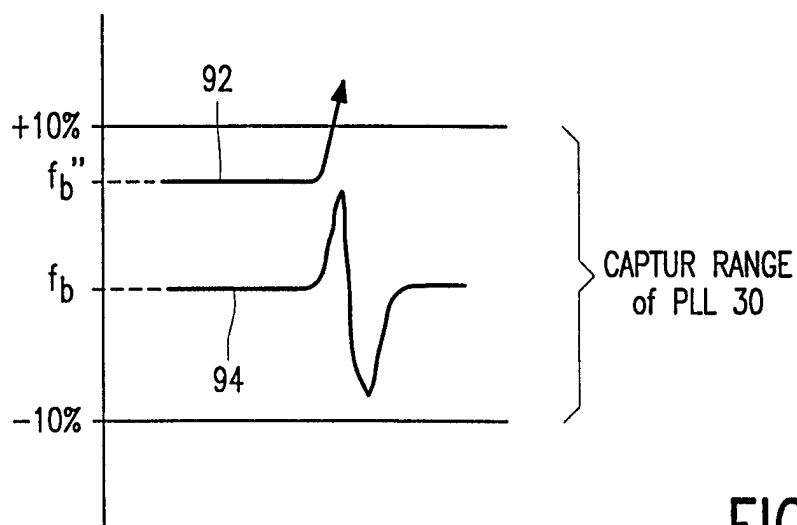


FIG. 7