


(72) Allen, Gary Robert, US
(72) Allison, Joseph Michael, US
(72) Davenport, John Martin, US
(72) Hansler, Richard Lowell, US
(73) GENERAL ELECTRIC COMPANY, US

(51) Int.Cl.⁵ H05B 41/24

(54) **FONCTIONNEMENT EN RESONANCE ACOUSTIQUE POUR
LAMPES AU XENON ET A HALOGENURE DE METAL**
(54) **ACOUSTIC RESONANCE OPERATION FOR XENON-METAL
HALIDE LAMPS**

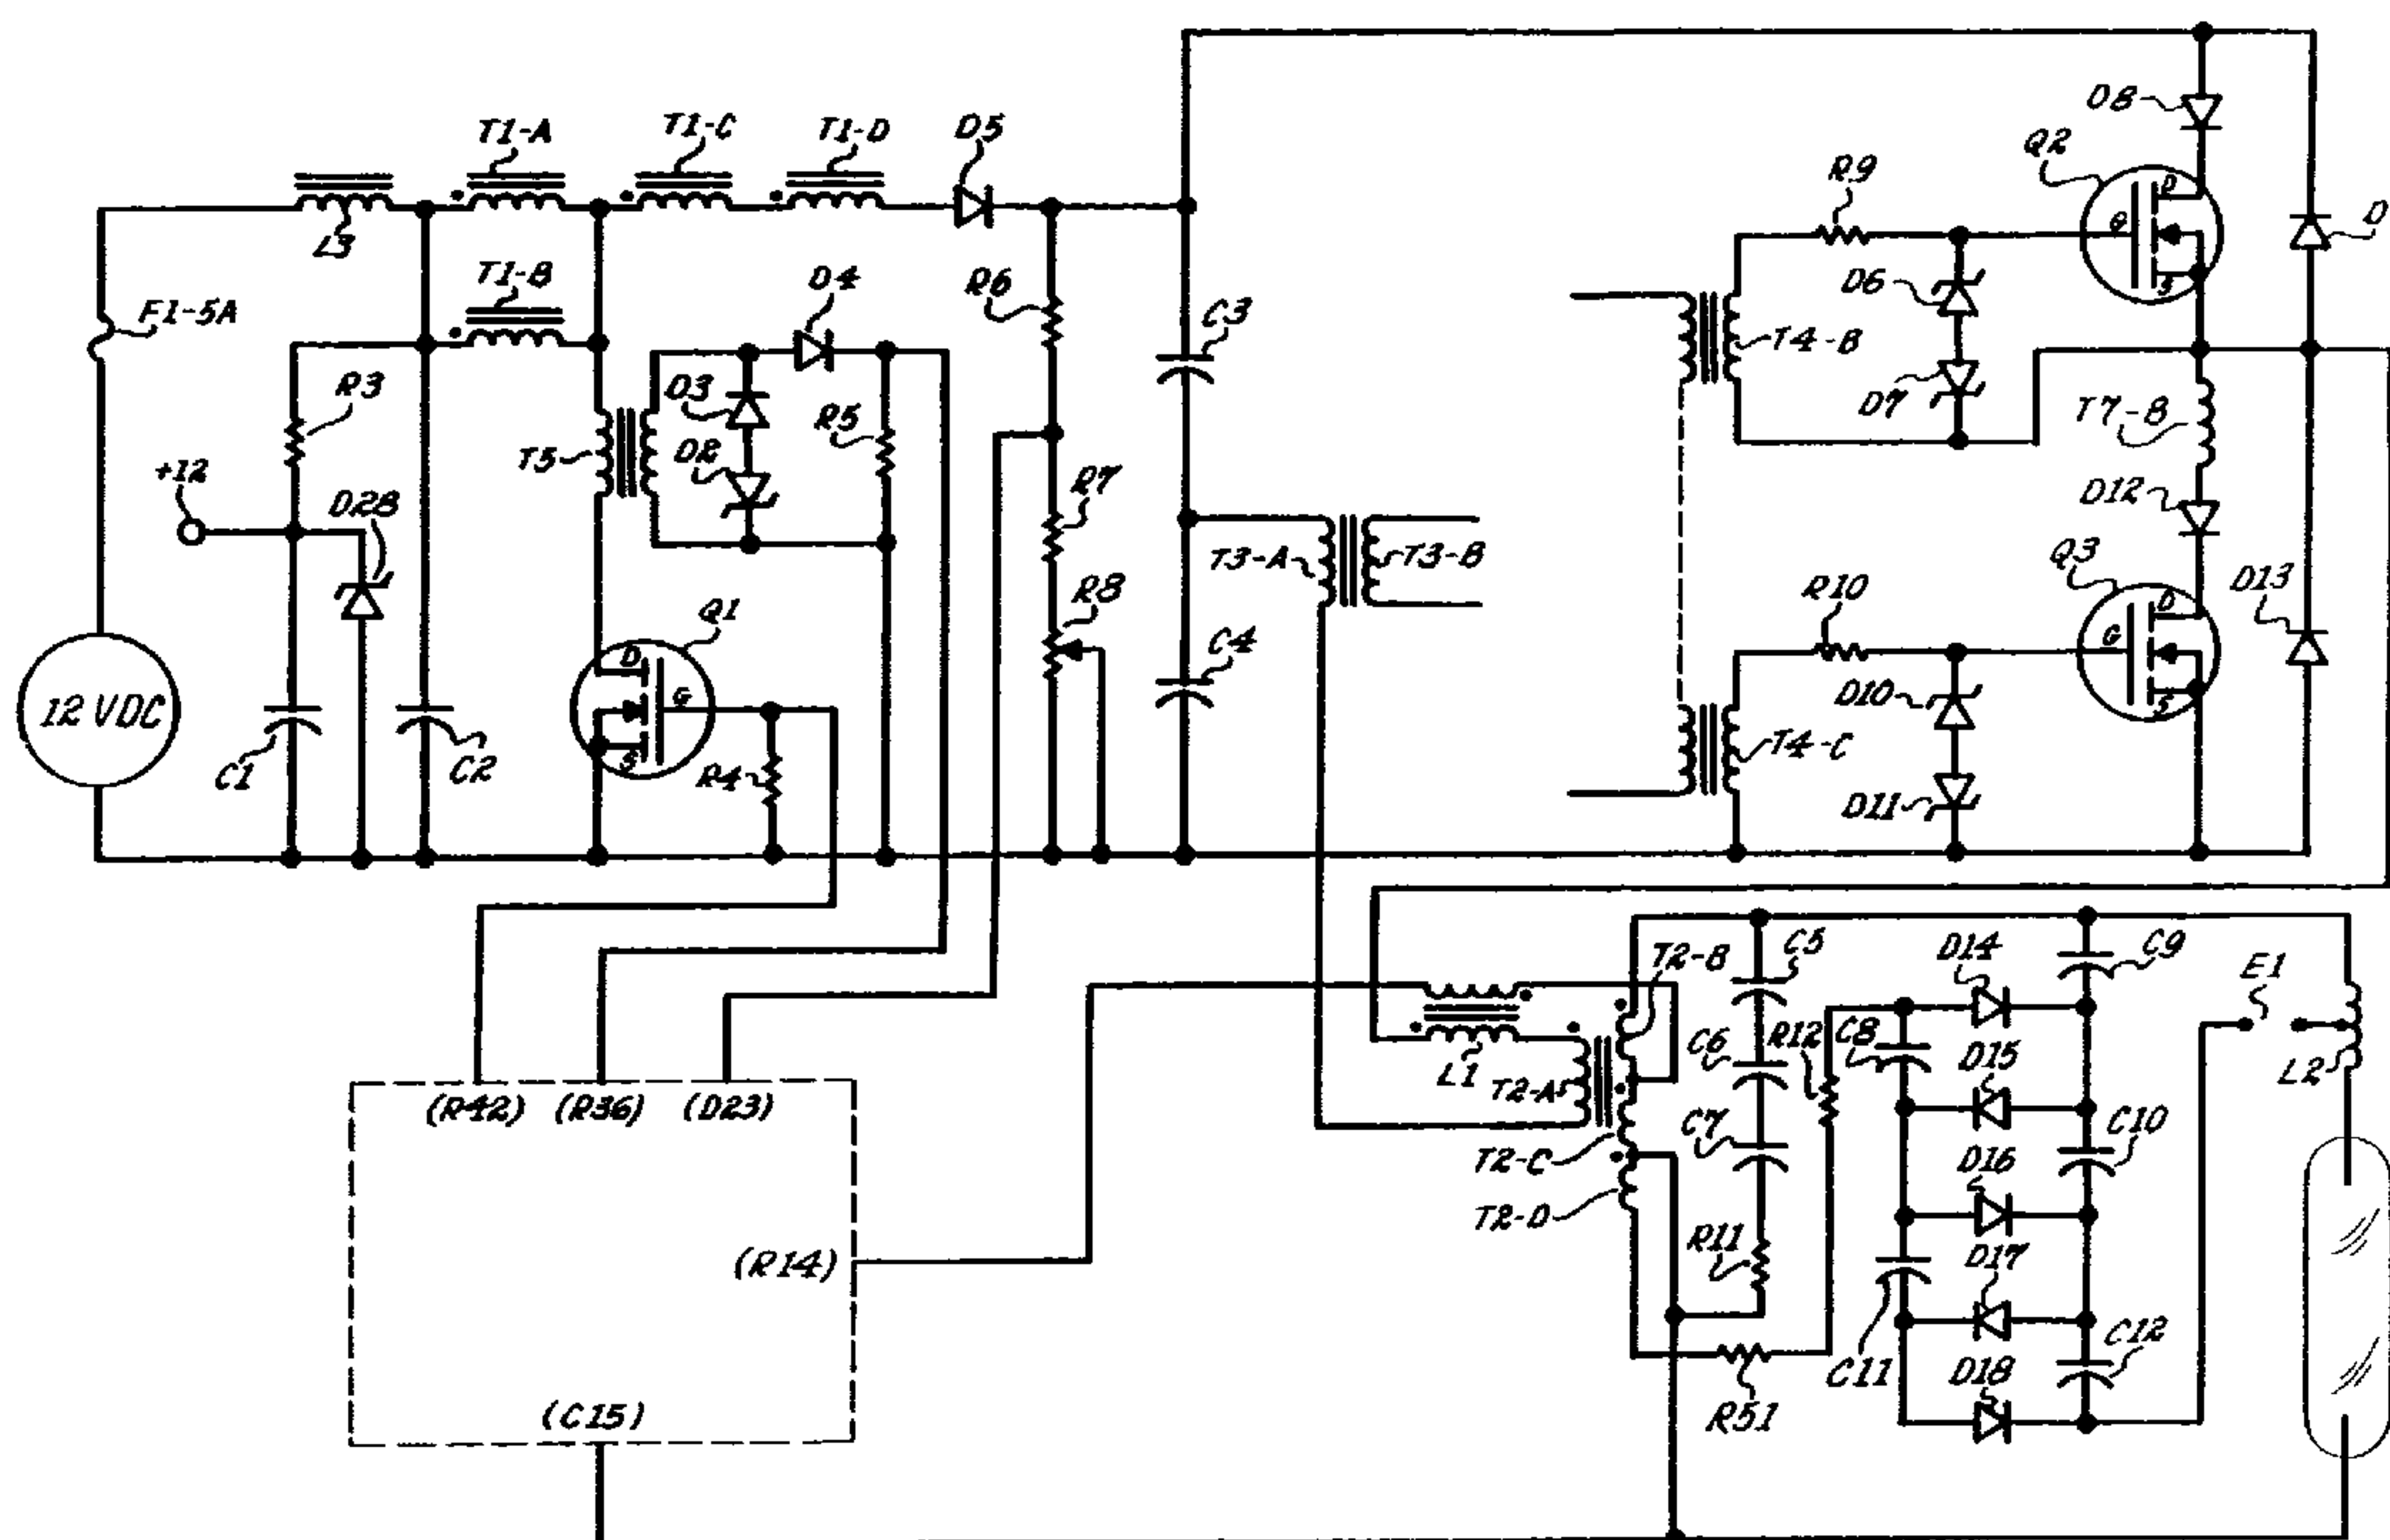

(57) A circuit arrangement and a method of operating a highly desirable discharge lamp for automotive applications are disclosed. The discharge lamp contains a high xenon pressure along with a fill of mercury and a halide typically used for metal halide lamps. The high xenon pressure allows the xenon-metal halide lamp to obtain instantaneous light at a high intensity level which is particularly suited for automotive applications. The circuit related to the present invention provides for acoustic operation of the lamp which substantially eliminates known disadvantages of the high pressure xenon lamp of (1) severe arc bowing of such lamps having electrode spacing greater than two (2) millimeters; (2) increased hot-spot temperatures of such lamps; (3) decreased cold-spot temperatures of said lamps and (4) reduced lamp efficiency and life respectively due to decreased cold spots and increased hot-spot temperatures. The circuit in a preferred embodiment incorporates frequency modulation to broaden the desired operational frequency band of the circuit along with straightening the arc between electrodes of the high-pressure xenon-metal halide lamp.

LD 9950

ACOUSTIC RESONANCE OPERATION FOR
XENON-METAL HALIDE LAMPS

ABSTRACT OF THE INVENTION

A circuit arrangement and a method of operating a highly desirable discharge lamp for automotive applications are disclosed. The discharge lamp
5 contains a high xenon pressure along with a fill of mercury and a halide typically used for metal halide lamps. The high xenon pressure allows the xenon-metal halide lamp to obtain instantaneous light at a high intensity level which is particularly suited for
10 automotive applications. The circuit related to the present invention provides for acoustic operation of the lamp which substantially eliminates known disadvantages of the high pressure xenon lamp of (1) severe arc bowing of such lamps having electrode
15 spacing greater than two (2) millimeters; (2) increased hot-spot temperatures of such lamps; (3) decreased cold-spot temperatures of said lamps and (4) reduced lamp efficiency and life respectively due to decreased cold spots and increased hot-spot temperatures. The
20 circuit in a preferred embodiment incorporates frequency modulation to broaden the desired operational frequency band of the circuit along with straightening the arc between electrodes of the high-pressure xenon-metal halide lamp.

- 1 -

LD 9950

ACOUSTIC RESONANCE OPERATION FOR
XENON-METAL HALIDE LAMPS

BACKGROUND OF THE INVENTION

5 This invention relates to a method and an operating circuit both for a xenon-metal halide lamp. More particularly, the invention relates to a method network and a circuit for acoustically operating a xenon-metal halide lamp containing a high pressure of xenon which provides such a lamp that is particularly suited for automotive applications.

10 Canadian Patent No. 1,301,238 issued May 19, 1992 of R. S. Bergman et al. assigned to the same assignee as the present invention, discloses a xenon-metal halide lamp particularly suited for automotive applications. The xenon-metal halide lamp provides improved efficiency and longer life relative to incandescent lamps while a high pressure of xenon gas
15 primarily achieves instant light capabilities making such a lamp particularly suited for the automotive applications.

20 U.S. Patent 4,904,907 issued February 27, 1990 of J. Allison et al., assigned to the same assignee as the present invention, discloses a ballast circuit for operating metal halide lamps including the xenon-metal halide lamps of Canadian Patent

1,301,238. The ballast circuit of Allison et al. operates the metal halide lamps at a relatively high frequency operation of about 1 to 10 kilohertz and applies a square wave of current to the lamp. The square wave of current results in a square wave of voltage in phase with the current so that the lamp power (current x voltage) is constant allowing for advantageous lamp operation. The operation of such a ballast avoids any acoustic resonance effects because the power is constant in time. U.S. Patent 4,170,746 of Davenport, assigned to the same assignee as the present invention, discloses a circuit unlike U.S. Patent 4,904,907 for operating mercury-metal halide lamps of relatively small dimensions having a volumetric capacity of less than one cubic centimeter. Such a ballast circuit employs acoustic operation of the mercury-metal halide miniature lamps devoid of the high pressure xenon at relatively narrow windows within frequency bands in the range from 10 - 50 kHz.

In a manner similar to U.S. Patent 4,904,907, U.S. Patents 3,890,537 and 4,042,856 of Park et al and Steigerwald, respectively, both assigned to the same assignee as the present invention, disclose circuits for gas discharge lamps that avoid acoustic resonance effects during the operation of these lamps.

The various gas discharge lamps and ballast circuits given hereinbefore have limitations related to automotive applications. Of the various lamps, the one more suited for automotive applications is that of Bergman et al. but it has practical limitations with regard to the amount of instant light that it may provide which is primarily determined by the pressure

of the xenon gas contained within the lamp. In order to obtain a desired high instant light level for such lamps for automotive applications a xenon gas pressure of at least four atmospheres is required. The
5 xenon-metal halide lamps having the xenon gas pressure of at least four (4) atmospheres and operated by known ballast circuits disadvantageously experience strong convection effects which are increased by arranging the lamp in a horizontal manner within an automotive
10 headlamp. The undesired convection causes at least three (3) disadvantages which are: (1) severe bowing of the arc of such lamps having electrode spacings that are greater than about two (2) millimeters; (2) reduced life of such lamps due to the increased hot-spot
15 temperatures; and (3) reduced lamp efficacy or lumens per watt due to the decreased cold-spot temperatures. It is desired that means, such as an operating circuit, be provided that allows for the use of a high pressure xenon-metal halide lamp that provides instant light in
20 automotive applications without experiencing the disadvantages created by convection effects.

In addition to the instant light capabilities, it is desired that the light source for automotive applications provide both high beam and low beam
25 illumination. It is desired that means, such as an operating circuit, be provided that allows the high pressure xenon-metal halide lamp to serve as the source of light for high and low beam illumination patterns for the automobile.

30 Accordingly, it is an object of the present invention to provide an operating circuit that allows the use of a high pressure xenon gas within a xenon-metal halide lamp that yields a high level of instant light which is particularly suited for
35 automotive or vehicle applications.

A further object of the present invention is to

provide an operation circuit that allows the high pressure xenon-metal halide lamp to serve as a light source for low and high beam illumination pattern of a vehicle.

5 A still further object of the present invention is to provide a method for operating a high pressure xenon-metal halide lamp that is particularly suited for automotive applications.

SUMMARY OF THE INVENTION

10 The present invention is directed to a circuit and a method for operating a high pressure xenon-metal halide lamp which is particularly suited for automotive applications.

The circuit for operating the high-pressure xenon-metal halide lamp is adapted to be connected to either
15 a source of alternating current (AC) excitation or a source of direct current (DC). The operating circuit comprises means for developing a first signal serving as an unmodulated signal and having a selected carrier
20 frequency, and means for developing a second signal serving as a modulating signal and having a selectable amplitude along with a selectable modulating frequency. Further, the circuit comprises means for combining the first and second signals so as to develop
25 a third signal which is applied to the high-pressure xenon-metal halide lamp and which third signal serves as a frequency modulated signal having center, lower and upper frequencies. The lower and upper frequencies are determined by both the selectable amplitude and
30 frequency, whereas, the center frequency corresponds to the selectable carrier frequency. The center and the lower frequencies differ by a quantity $-DF$ and the center and the upper frequencies differ by a quantity $+DF$.

35 The method comprises the steps of supplying an

excitation signal $V(t)$ having a shape selected from triangular, sawtooth and sinusoidal variations to a high pressure xenon-metal halide lamp. The excitation signal $V(t)$ has selected parameters in accordance with
5 the expression;

$$V(t) = V_m \sin [2\pi t + (DF/f \sin(2\pi f t))]$$

where V_m = peak voltage of the excitation signal;
CF = a carrier frequency of an unmodulated signal; DF
= a maximum frequency excursion from the carrier
10 frequency; and f = frequency of a modulating signal.

The quantity (f) is the frequency at which the frequency scans from the minimum ($CF - DF$) to the maximum ($CF + DF$) and then back to the minimum.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Fig. 1 is an illustration showing the interrelationship between the xenon pressure and the instantaneous light both related to a xenon-metal halide lamp.

Fig. 2 illustrates the interrelationship between
20 the xenon pressure and the hot-spot temperature associated with a xenon-metal halide lamp for a 60 Hz square wave operation and high frequency operation related to the present invention.

Fig. 3 illustrates the interrelationship between
25 wall loading and the hot-spot temperature and luminous efficacy associated with a xenon-metal halide lamp for high frequency operation related to the present invention.

Fig. 4 consists of Figs. 4(a) and 4(b) respectively
30 illustrating the frequency bands related to high frequency operation and high frequency with modulation operation both for a high pressure xenon-metal halide lamp.

Fig. 5 consist of Fig. 5(a), 5(b), and 5(c)
35 respectively illustrating an unmodulated carrier wave,

a modulating signal, and a frequency modulated wave with all signals being related to the operating circuit of the present invention.

Fig. 6 illustrates the frequency spectrum of the
5 signal of the present invention related to a xenon-metal halide lamp.

Figs. 7, 8, 9 and 10 are schematics of a preferred
embodiment of the circuit arrangement of the present
invention for starting and operating a high pressure
10 xenon-metal halide lamp.

DETAILED DESCRIPTION

Xenon-Metal Halide Lamp Characteristics Related To Automotive Applications

A dominant limitation affecting the amount of
15 instant light yielded by a xenon-metal halide lamp
serving as a light source for automotive or vehicle
application, is the pressure of the xenon gas contained
within the lamp. To obtain instant light capabilities
sufficient to meet the needs of vehicle applications,
20 it is desired to have at least four (4) atmospheres of
xenon gas contained in typical 7 by 9 mm prolate-
spheroid shaped arc tubes serving as xenon-metal halide
lamps. As discussed in the "Background" section, such
a xenon pressure undesirably creates very strong
25 convection within the xenon-metal halide lamp.
Further, to obtain a desired beam pattern for
automotive applications, it is desired to orient the
metal halide lamp in a horizontal manner which, in
turn, causes the strong convection to disadvantageously
30 contribute to arc bowing problems. Still further, for
automotive applications, in order to obtain a desired
beam pattern, it is desired to provide a relatively
small image for the light source so that dimensions of
less than five millimeters for the spacing between the
35 electrodes of the xenon-metal halide lamp are
selected. A short arc gap reduces bowing compared to a

long gap. A shorter gap, however, requires higher mercury pressure which increases convection and bowing. The net effect is that a shorter gap reduces bowing even with higher mercury pressure.

5 The combination of the high xenon pressure and the mercury pressure within such a lamp produces strong vertical convection in a horizontally oriented lamp resulting in increased hot-spot temperatures on the top of the lamp and cooler temperatures on the bottom of
10 such a lamp. The increased hot-spot and decreased cold-spot temperatures produce a temperature gradient that promotes convection within the lamp which, in turn, creates severe bowing of the arc between the electrodes that are separated longer than about two (2)
15 millimeters. The increased hot-spot temperature on the top of the lamp decreases or shortens the life of such a lamp, while, the decreased cold-spot temperature on the bottom of the lamp reduces the halide pressure therein and thereby reduces the lamp efficacy or lumens
20 per watt. Further, the bowed arc condition created by the high-pressure xenon gas and the high pressure of mercury gas diminishes the optical quality of the beam patterns related to automotive applications. The disadvantages created by the high-pressure xenon gas
25 may be further discussed with regard to Fig. 1.

 The relationship between the xenon fill pressure within the lamp and the instantaneous light desired for automotive applications is shown in Fig. 1 for a xenon-metal halide lamp comprised of a 7 by 9 mm prolate
30 spheroid arc tube having a separation of electrodes of approximately 4 mm and energized with about 4.5 amperes of current. The X axis of Fig. 1 is related to the xenon fill pressure within the lamp and is given in atmospheres, whereas, its Y axis is related to the
35 instant light, given in lumens, yielded by such a lamp. Fig. 1 illustrates a best-fit type straight

line, curve 10, formed from a plurality of points 10A, 10B, . . . and 10H. As shown in Fig. 1, the related xenon fill pressure is needed to be of a value of 7 atmospheres in order to yield an instant light output of 1,5000 lumens which is desired for an automotive headlamp.

This relatively high pressure is further increased for the xenon-metal halide lamps of the present invention. The voltage drop of the lamp, typically of a value of 40 volts, is determined primarily by the mercury operating pressure which is about 15 atmospheres for relative small spacing distance of less than 4 millimeters between electrodes used for automotive applications. The high average gas temperature of the lamp when it is operating, increases or adds to the xenon pressure within the xenon-metal halide lamp therefore yielding a total operating pressure of about 35 atmospheres which when added to the 15 atmospheres of mercury operating pressure results in severe convection problems related to the horizontally burning lamps commonly used in automotive applications. As the xenon gas pressure increases, the upward convection velocity of the hot gases that are contributing to the arc bowing within the arc tube increases and the temperature of the bulb above the arc increases. The effect of such an increase may be discussed with regard to Fig. 2.

Fig. 2 has an X coordinate representing the xenon pressure within the lamp, given in atmospheres, and a Y coordinate representing the hot-spot temperature, given in °C, of the xenon-metal halide lamp. Fig. 2 further illustrates two straight line curves 12 and 14, respectively representative of the operation of a xenon-metal halide lamp by a square-wave ballast circuit operated at 60 Hz in a manner as described in the previously mentioned U.S. Patent No. 4,904,907.

of Allison et al., and the operation of the xenon-metal halide lamp by a high frequency operating circuit related to the present invention to be described hereinafter.

From Fig. 2 related to curve 12, it is seen that a hot-spot temperature of about 1000°C is exceeded for a xenon pressure above about 2 atmospheres, whereas, the hot-spot temperature under high-frequency, arc-straightened operation related to curve 14 does not exceed 1000°C at the desired xenon pressures. Operation of a xenon-metal halide lamp above this 1000°C condition causes the quartz material commonly comprising the related arc tube to deteriorate in a relatively rapid manner. The operation of an arc tube with a temperature less than 1000°C may be further discussed with regard to Fig. 3.

Fig. 3 illustrates the acoustically straightened arc operation related to the present invention of a 6 x 8.5mm prolate-spheroid arc tube with a 3.4mm spacing between electrodes and having 10.3 atmospheres of Xe. Fig. 3 has an X coordinate representative of wall loading, given in watts per square centimeters, and is indicative of the discharge power per arc-tube-wall surface area of the lamp. Fig. 3 has a first and a second Y coordinate respectively representative of the hot spot temperature of the lamp, given in °C, and the efficacy or lumens per watt (LPW) related to the xenon-metal halide lamp. Fig. 3 further illustrates a first curve 16 representative of efficacy vs wall loading operation of the arc tube, and a second curve 18 representative of the hot-spot temperature vs wall loading operation of the arc tube.

From Fig. 3, it is seen that the present invention provides for operating the arc tube at increasing wall loading (curve 18) while maintaining hot-spot temperatures less than approximately 1000°C and

thereby yielding increasing efficacy (curve 18)
operation of the arc tube. For example, from Fig. 3 it
is seen that the arc tube may be operated at 20 W/cm²
so as to produce an efficacy of 70 LPW which occurs at
5 less than the 1000°C hot-spot temperature.

PRACTICE OF THE PRESENT INVENTION

The practice of the present invention may be
described with reference to Figs. 2 and 3 and also to
Fig. 1. From Fig. 2 it can be seen that if the
10 xenon-metal halide lamp is operated at a high
frequency, in a manner and by a circuit arrangement to
be described, represented by curve 14, then the xenon
gas fill pressure needed to produce 1500 lumens of
instantaneous light within the xenon-metal halide lamp
15 results in a hot-spot temperature below the critical
value of 1000°C. From Fig. 3, it is seen that wall
loading of 20 watts per square centimeter, indicative
of a xenon-metal halide lamp having an efficacy of
about 70 LPW, is obtained while still maintaining the
20 hot-spot temperature below the critical value of
1000°C. From Fig. 1, it is seen that a xenon fill
pressure of 7 atmospheres yields an instant light
output of at least 1500 lumens which amount is
particularly suited for and more than meets the needs
25 of automotive or vehicle applications.

Preferred Method of Operating High Pressure Xenon-Metal Halide Lamps

The preferred method of operating a high pressure
xenon-metal halide lamp having a xenon pressure
30 sufficiently high to produce instantaneous light for
automotive applications comprises the steps of
supplying a particular excitation signal and also
selecting the parameters of such a signal. The
gaseous discharge lamp comprises an envelope having a
35 bulbous portion with a volume between about 0.05 to

about 1.0 cubic centimeters. The lamp may have a fill within its bulbous portion comprising a xenon gas having a cold pressure in the range of about 2 to about 15 atmospheres, mercury having an operating pressure in the range of about 5 to about 20 atmospheres and a halide compound of an amount in the range from about 1 to about 5 milligrams. Further, the lamp houses a pair of electrodes respectively located at opposite ends of the envelope and spaced apart from each other by a distance from about 1.5 to about 5 mm. The electrodes are supplied with a sufficient current so as to establish a spot mode operation since glow mode starting is difficult due to the high pressure Xe fill related to the present invention. The current requirements for spot mode operation along with a general discussion of glow mode starting is discussed in U.S. Patent 4,574,219, issued May 4, 1986 of Davenport et al.

The excitation signal may be of a waveform selected from the group comprising approximately sinusoidal, triangular, sawtooth or exponential or any composite waveform whose instantaneous power to the lamp is time-varying at a frequency in the 20kHz to 80kHz range. The simplest or representative example of such a waveform is a sinusoidal waveform where the signal $V(t)$ may be represented as;

$$V(t) = V_m \sin[2\pi \cdot CF \cdot t + (DF/f) \cdot \sin(2\pi \cdot f \cdot t)] \quad (1)$$

where V_m is the peak voltage;

CF is the carrier frequency;

DF is the maximum frequency excursion from the carrier frequency, and

f is the modulation frequency.

The excitation signal of a triangular, sawtooth, exponential or composite waveshape is similarly

represented as functions of CF, DF and f with the same interpretation for each variable, but the instantaneous voltage varies linearly, or in a step manner, or exponentially or in some composite manner in each
5 respective situation.

The high-pressure xenon-metal halide lamp may be operated by various methods in accordance with the present invention related to the selection of the parameters of the excitation signal of expression (1).
10 For the signal given in expression (1), the quantity f may be preferably in the range from about $0.01 \times CF$ to about $0.05 \times CF$. Similarly, the quantity DF may be of a value in the range from about $0.07 \times CF$ to about $0.20 \times CF$. Further, the quantity CF may have a value in the
15 range of about 20 kHz to about 80 kHz. If desired, the xenon-metal halide lamp may be operated without frequency-modulation by selecting f and DF to have a value of zero (0) and CF to have a value in the range of about 20 kHz to about 80 kHz. The various methods
20 related to the present invention may be further described with reference to Fig. 4.

Fig. 4 has an X coordinate given in kilohertz and is representative of the carrier frequency (CF) of the excitation signal of expression (1), applied to the
25 high pressure xenon-metal halide lamp. Fig. 4 is segmented into Figs. 4a and 4b respectively illustrating a frequency-modulated high-frequency operation 20, that is, the quantity DF of expression (1) having a value in the desired previously given
30 range, and a high-frequency operation 22 without frequency modulation ($DF = 0$) both operations being related to the high pressure xenon-metal halide lamp. The frequency-modulated high-frequency modulation operation 20 is segmented into portions 20A, 20B, and
35 20C, which are representative of the frequencies of the excitation signal of expression (1) for which the arc

of the xenon halide lamp is unstable. The portions 20A, 20B and 20C represent the unstable arc conditions of flickering and bowing. The high frequency operation 22 without modulation is segmented into portions 22A, 22B, 22C, 22D, 22E, 22F, and 22G which are indicative of the frequencies for the unstable operation of the arc within the xenon-metal halide lamp. The portions 22A - 22F indicate instabilities which cause extinguishing, flickering, or bowing of the arc. The frequencies not encompassed by the portions 20A - 20F are representative of bands of frequencies or windows for which the arc operates in a straight and stable manner.

A comparison between Figs. 4a and 4b reveals that the high frequency with modulation operation 20 of Fig. 4a provides a relatively large window of arc stability represented by the spacing between portions 20A and 20B for stable operation of the lamp, whereas, Fig. 4b shows a plurality of frequency windows but none having the wide coverage of the window in 20.

With regard to Fig. 4a, we have discovered that the high-frequency operation 20, of the xenon-metal halide lamp significantly reduces the gravity-induced convection ordinarily encountered with such xenon-metal halide lamps having a xenon fill pressure in excess of two (2) atmospheres. The behavior of the xenon-metal halide lamp of Fig. 4a is quite different from a metal halide lamp operated by the circuit of the previously mentioned U. S. Patent 4,170,746. The effect of the operation shown in Fig. 4a is to acoustically operate the xenon-metal halide lamp in such a manner that the upper wall temperatures of the related lamps are reduced by about 200°C, and the efficacy is doubled relative to 60 cycle operation previously discussed relative to Fig. 2, while at the same time the gravity-induced convection is

substantially reduced even to the point of arc
straightening conditions. The arc straightening is
primarily achieved due to the dominance of the acoustic
motion of the xenon and mercury over the vertical
5 convection which otherwise would bend the arc between
the electrodes in an upward manner. The frequency
window of the stable, straightened arc in the operation
20 corresponds to the presence of acoustic
perturbations of the gas which symmetrically force the
10 arc to the center of the arc tube, rather than
asymmetrically toward the wall of the arc tube. The
widest stable band (SB) of operation without frequency
modulation, related to Fig. 4(b), between instabilities
is about 5 kHz, or about 10% of the carrier frequency
15 (CF) of expression (1). With regard to Fig. 4(a), with
frequency modulation, the stable band of operation
representative of the spacing between portions 20A and
20B may be of a value SB/CF of between 30% to 50%. The
acoustical operation of a xenon-metal halide lamp
20 supplemented with a frequency modulated signal and
represented by operation 20 of Fig. 4(a) may be further
described with reference to Fig. 5.

Fig. 5 is segmented into Figs. 5(a), 5(b), and 5(c)
respectively representative of: (a) the unmodulated
25 carrier frequency, CF, given in expression (1) as a
sinewave, but represented for simplicity as a
triangular wave, (b) the modulating signal at frequency
f also given in expression (1), and (c) the
frequency-modulated signal representative of the V(t)
30 of expression (1). The periods of the CF unmodulated
carrier and f modulating signal are shown in Figs.
5(a), 5(b) and 5(c) as $1/CF$ and $1/f$. Fig. 5(c) also
shows the shape of the wave as it passes through the
maximum ($CF + DF$), median (CF) and minimum ($CF - DF$)
35 frequencies.

A preferred method of the present invention is to

select an excitation signal as in expression (1) having a sinusoidal, triangular, sawtooth or composite waveshape and to then further select a preferred range for DF and for f so that the arc of the xenon-metal halide lamp is relatively straight. The preferred range of the quantity DF is given in the below expression (2), whereas, the preferred range of the quantity f is given in the below expression (3);

$$0.07 < DF/CF < 0.20 \quad (2)$$

$$0.01 < f/CF < 0.05 \quad (3)$$

The high-frequency modulation operation 20, in particular, a frequency, f, of 0.7 kHz, and a DF quantity of 4.2 kHz were used to operate a prolate ellipsoidal arc tube having an inside minor diameter of 5.8 mm and an inside major diameter of 10.0 mm. The operation resulted in a straight, stable arc over a carrier frequency, CF, in the range extending from 32 kHz to 48 kHz.

The frequency modulation operation 20 of the present operation may be further described with reference to Fig. 6, illustrating the frequency spectrum of an excitation signal of expression (1), which may be applied to the high-pressure xenon-metal halide lamp. Fig. 6, having an X-axis given in frequency and a Y-axis represented in the log of the power, shows the acoustic power distributed over many discrete frequencies, F, throughout a range of $(CF - DF) < F < (CF + DF)$. The discrete frequency components are separated by an amount equal to f, and the half-width at half-maximum (3db) points of the spectrum roughly equal DF, when DF/f is much greater than 1. If most of the power delivered to the lamp is at stable frequencies, as shown in Fig. 4(a), then the arc instabilities are avoided. In order to significantly spread the acoustic power, the width, $2*DF$, of the frequency spectrum should exceed the width of the

unstable frequency bands (typically having a value of a few kilohertz), but must not exceed the width of the region where straight, stable operation is found (typically 10-20 kHz wide). Furthermore, if the frequency modulation signal, f , is too large, then there will be too few frequency components, and too much power may be present in each (potentially unstable) component. The smaller the value of f is, the larger the number of frequency components which deliver the acoustic power and the less likely that an instability will be excited. The preferred value of f is in the range given by expression (3). The selection of the lower limit of f may be further discussed with regard to Fig. 5.

With reference to Figs. 5(b) and 5(c) and assuming a frequency, F , related to the excitation signal of expression (1), it is seen that the applied frequency, F , is changing from $(CF - DF)$ to $(CF + DF)$ (Fig. 5(c)) in a duration of one half $1/f$ (Fig. 5(b)). As the applied frequency F is swept from a stable frequency band (See Fig. 4(a), between 20A, and 20B) through an unstable band of width UB , the instability is being driven for a time $T = UB/4fDF$. By "instability being driven" it is meant that an undesirable motion that is either bowing or flickering is created or "turned-on" and allowed to grow bigger for a time, T . In order for the instability to grow to an appreciable amplitude to create an undesired operational condition, for example, a bowed, flickering or extinguished arc, the lamp must be driven for many oscillation periods (of length $1/F$), such that $F \cdot T$ is much greater than 10. Typically, UB has a value of approximately 2 kilohertz, f has a value of approximately 0.7 kilohertz, DF has a value of approximately 4.2 hertz, and F has a value of approximately 40 kilohertz so that the quantity $F \cdot T$ is approximately 6. Because of the relative quickness

with which F is scanned through the unstable band, the instability is allowed to grow for only approximately 6 oscillations, in this example, for the values of UB , f , DF and F previously given, and the amplitude of the
5 instability remains imperceptible. From our analysis, it is apparent that when the sweep rate, that is, the quantity $f \cdot DF$ becomes too low, and the frequency is allowed to linger in the unstable bands (See Fig. 4(a) 20A, 20B and 20C) for an excess of time. Therefore,
10 there is a lower limit of f of a few hundred Hertz. Furthermore, as we have experimentally observed, the triangular or sawtooth waveforms for the frequency modulation at frequency, f , are preferred to the sinusoidal waveform, since then the frequency of the
15 triangular and sawtooth waveforms does not dwell at the maximum and minimum frequencies corresponding to $(CF + DF)$ and $(CF - DF)$ of Fig. 5(c) which would otherwise allow growth times at potentially unstable frequencies.

All of the frequencies (CF , DF and f) are observed
20 to scale inversely with linear dimensions of the arc tube, serving as the xenon-metal halide lamp, requiring higher frequencies for small arc tubes and vice versa, but the wide stable band (SB/CF approximately 30% to 50%) is obtained for miniature xenon-metal halide lamps
25 having arc tubes with volumetric capacity of less than 0.3 cubic centimeters and having all types of geometric shapes studied including spheres, prolate spheroids and cylinders.

30 DETAILED DESCRIPTION OF THE PREFERRED BALLAST EMBODIMENTS

A preferred embodiment of the present invention is schematically illustrated in Figs. 7, 8, 9 and 10 for an operating circuit related to a gaseous discharge 60 which is started by a starter circuit primarily
35 illustrated in Fig. 7. Figs. 7, 8, 9 and 10 are

composed of various components of a typical value or type as designated Table 1.

TABLE 1

	<u>DESIGNATOR</u>	<u>DESCRIPTION</u>	<u>VENDOR</u>
5	D5,D8,D12	fast recovery diode MUR1540 400V 15A	MOTOROLA
	D9,D13	fast recovery diode UES 1306	UNITRODE
10	D1,D20,D21, D24,D25,D26 D27,D22	high speed switching IN4148A	DIODES INC.
	D3,D4,D19	fast recovery diode UES 1106	UNITRODE
15	U1-U3	comparator TL331	T.I.
	U5-U12	op amp TL1321	T.I.
20	U6	flip flop dual D MC14013B	MOTOROLA
	U7-U13	cmos timer 7555	INTERSIL
25	U9	analog switch MC14066CP	MOTOROLA
	U10	pulse width modulator UC3843N	UNITRODE
	Q1	N-channel HEXFET IRFP250	I.R.
30	Q2-Q3	N-channel HEXFET IRFP350	I.R.
	Q4-Q5	nnp transistor 2N2222	
35	Q6	pnp transistor 2N2907	
	D6,D7,D10, D11	zener diode 15v 1/2w	

	D23	zener diode 6.2v 1/2 w	
5	D2	zener diode 130V 1/2W 1M130Z	MOTOROLA
	D28	zener diode 130V 1/2W 1M130Z	
10	R41	1k 1/2 w 3386P	BOURNS
	R8	potentiometer 5k 1/2w 3386P	BOURNS
15	R25,R22,R31, R47,R13	potentiometer 10k 1/2 w 3386P	BOURNS
	R49	potentiometer 100k 1/2 w 3386P	BOURNS
20	C2	4700mf 35v	
	C3,C4	capacitor electrolytic 56mf 200v 673D	SPRAGUE
25	R43	potentiometer 50k 1/2w 3386P	BOURNES
30	C1,C33,C18	capacitor electrolytic 100mf 25v	PANASONIC
	C13,C14,C23, C24	capacitor .1mf 50v CKR05BX 104KR	SFE TECHNOLOGIES
35	C25	capacitor electrolytic 10mf 25v	PANASONIC
	C15	capacitor disc 130pf 1kv	

-20-

LD 9950

	C28	capacitor electrolytic 4.7mf 50v	PANASONIC
5	C26	capacitor non ceramic .002mf	
	C20	capacitor non-ceramic .01mf	SFE TECHNOLOGIES
10	C22	capacitor 330pf	
	C21,C34	capacitor .47mf 50v CKR06BX47KR	SFE TECHNOLOGIES
15	C35	capacitor 47mf, 16v	
	C31	capacitor .033mf CKR05BX333KR	SFE TECHNOLOGIES
20	C17,C19	capacitor .0012mf100v CKROBX122KR	SFE TECHNOLOGIES
	C16	capacitor 2.2mf	
25	C30	capacitor .15mf	
	C27	capacitor .022mf	
30	R9,R10,R42	resistor carbon film 10 1/4w	
	R6	resistor carbon film 330k 1/4w	
35	R7	resistor carbon film 6.8k 1/4w	
40	R35	resistor carbon film 4.7k 1/4w	

	R14	resistor carbon film 2.2k 1/2w
5	R15	resistor carbon film 5.6k 1/2w
	R3	3.9 ohm 1/2 w
10	R16	resistor carbon film 33k 1/4w
	R27	resistor carbon film 47 1/4w
15	R19	resistor carbon film 15k 1/4w
	R4,R39,R18, R26	resistor carbon film 10k 1/4w
20	R21,R24	resistor carbon film 100k 1/4w
25	R32	resistor carbon film 120k 1/4w
	R1,R23,R34, R36	resistor carbon film 1k 1/4w
30	R37,R28,R29, R33	resistor carbon film 3.9k 1/4w
	R5	resistor carbon film 6.8 ohm 5%
35	R38	5.1k 1/4w
	R40	resistor carbon film 390 1/4w
40	R46	resistor carbon film 2.2k 1/4w

	R48	resistor carbon film 5.6k 1/4w	
5	R17	resistor carbon film 560k 1/4w	
	R20	resistor carbon film 68k 1/4w	
10	R30	resistor carbon film 18k 1/4w	
	T1	transformer/inductor 26 turns quadfilar wound. 60 uh per winding bobbin pin out dot7-6 green dot9-4 amber dot11-1 red	
15		all pins on .200" centers except 1-2 is .150" center	
	T4	pulse transformer PE 63387	PULSE ENGINEER INC
25	T3,T5,T6, T7	current transformer 100:1	
	L1	Inductor 35uh	
	T4	transformer	SIGNAL TRANSFORMER
30	S1	toggle switch 20A SPST 90-0002	McGILL
	R61	180	
	R62	4.2M	
35	R63	potentiometer 1M	
	R64	100K	
	R65	2K	
	R66	2K	

	R67	2K
	R68	470K
	R69	470K
	R70	100K
5	R71	potentiometer 1M
	R72	9.1K
	D41	zener diode 8.2v
10	D42,D43 and D44	diodes
	C41	4.7mf
	C42	4.7mf
15	U14	comparator LF356J

In general, the circuit arrangements shown in Figs. 7, 8, 9 and 10 generate a frequency-modulated, high-frequency voltage to drive the xenon-metal halide lamp 60 disclosed hereinbefore. The circuit arrangements of Figs. 7-10 are related to supplying the lamp 60 with a composite waveshape which is similar to a sinusoidal or triangular wave, and may be described as having approximately an exponential shape. The frequency is in the range of 10 kHz-200 kHz. The frequency modulation (DF/CF) is about 10% and the modulation rate is such as to allow the frequency to stay in the stable band previously discussed. The waveshape is further characterized to obtain stable operation by being continuous, have no appreciable times at zero power, and in which the crest factor (ratio of PEAK to RMS) is less than 2:1. The circuit arrangements of Figs. 7, 8, 9 and 10 provide sufficient

voltage and current to instantly break down the lamp 60, even when hot, and transition it into a sustained arc condition.

For one embodiment, the operating circuit of Figs. 7-10 is adapted to be connected to a source of alternating current (a.c.) excitation 52 typically of a value of 120 volts at a frequency of 60 Hz. For another embodiment, the operating circuit may be directly connected to a source of direct current (d.c.) eliminating the need of associated rectifying components.

The circuit arrangements of Figs. 7-10 form a ballast for lamp 60 which in one embodiment comprises a two-stage power converter. The input stage at the ballast circuit is a DC-to-DC boost converter while the output stage is a DC-to-AC inverter. The input boost converter is controlled while the output inverter is uncontrolled. Lamp voltage and current are fed back to the input boost converter to regulate lamp power. The output inverter is frequency-modulated. The current flowing within lamp 60 is limited on an instantaneous basis by a linear ballasting inductor while average power is regulated by a controlled DC link voltage.

The major components of the input boost converter are given in Table 2 and are interconnected as shown in the related figures also given in Table 2.

TABLE 2 - INPUT CONVERTER

<u>Major Components</u>	<u>Related Figure</u>
L3	7
Transformers T1 and T5	7
Transistor Q1	7
Diode D5	7
PWM Controller U10	8

The components of Table 2 and their associated

circuitry illustrated in Fig. 7 and 8, comprise a tapped-inductor, current-mode-controlled, DC-to-DC boost converted. The input converter is controlled so that the gas discharge lamp 60 provides for instant
5 light for vehicle applications. Instant light is achieved by the input converter supplying a relatively high wattage (voltage x current) in a ramp-like manner to the lamp 60 at turn-on, and then ramping the power down as the lamp warms up. The turn-on of the lamp
10 having a relatively low impedance occurs after the lamp is started in a manner to be discussed, whereas, the warmed-up condition of the lamp occurs after the lamp is turned-on for a sufficient duration so as to obtain a relatively high impedance value.

15 The timer circuit, illustrated in Fig. 10, supplies a ramping current by means of resistors R22 and R23 into the summing node (pin2) of the PWM error amplifier U10. This current ramp is a component of the reference signal that is part of the feedback control system that
20 regulates lamp wattage. In operation, scaled samples of lamp current and voltage are multiplied and fed into the above-mentioned summing node. A negative feedback control system acts to balance the scaled lamp volt-amp product with the ramping reference generated by the
25 arrangement of Fig.10. After warm-up of the lamp 60, the reference to the PWR error amplifier remains constant so as to maintain a constant run or operate power in the lamp. A winding (T2-D) on transformer, T2, provides the lamp voltage sample and current
30 transformer, T3, supplies a scaled representation of the lamp current. These two signals are multiplied using circuit components, Q6, U3, U6-A, U9, and their associated components illustrated in Fig. 8.

35 The timer of Fig. 10 that supplies the reference signal to the power feedback control loop of Fig. 8 having ramp-like features, has two important

characteristics related to the present invention, which are:

- 5
- 10
- 15
- 20
- 25
- 30
- 1) The output current ramp has a delay feature. That is, the ramp begins after an initial time during which the timer output is at a level condition. This delay feature improves the instant light performance of lamp 60 especially if the source of alternating current (A.C.) connected to the ballast circuit of Figs. 7-10 experiences an interruption;
 - 2) The capacitors C41 and C42, which determine the delay time and ramp rate, discharge relatively slowly after all power is removed from the circuit. When power is removed, then immediately reapplied, the capacitor voltages remain mostly unchanged. This feature obviates the "pulse of light" that otherwise would occur. The slow discharge of the timing capacitors is primarily achieved by the current arrangement of the present invention preferably using insulated-gate integrated circuits that do not have the usual substrate diodes on their inputs.

The major components of the output converter are given in Table 3 and are interconnected as shown in the related figures also given in Table 3.

Table 3 - Output Inverter

<u>Major Components</u>	<u>Related Figure</u>
Transistors Q2 and Q3	7
Drive Logic Integrated Circuits	
• U11	9
• U4-B	9
• U7	9
• U5 and U8	9

The output inverter incorporates the frequency modulation feature of the present invention having a

carrier frequency which may be about 55 kHz that is generated by timer U8 of Fig. 9. The timer U8 has a modulation frequency of about 700 Hz applied to its input 3 and which is generated by timer U7 of Fig. 9. The timer U8 further has a switch S1 cooperating with resistor 150 applied to its input pin 7 so as to provide a step change in the carrier frequency that is especially suited for automotive forward illumination applications.

10 The present invention provides the ability of generating various shapes or conditions of the arc between the electrodes of the xenon-metal halide lamp so as to form a concentrated light source for various applications. The ability is provided by a switch (S1) to switch the position of the arc of lamp 60 from a bowed or slightly bowed arc to a substantially perfectly straight arc, which, in turn, may be used to switch the beam pattern emitted from a headlamp reflector having the lamp 60 disposed therein, from a first or low beam to a second or high beam illumination pattern merely by changing the carrier frequency of the arrangement of Fig. 9 by a fixed amount, for example, from 45 kHz to 55 kHz. Other suitable frequency shifts, according to the dimensions and stable windows, previously discussed, of lamp 60 may also be used. For one embodiment, the frequency shift causes the arc within the lamp to change from a straight condition to a bent or bowed condition, and thereby moves the primary concentration of light related to the arc from a first location within the reflector corresponding to the point associated with high beam illumination to a second location within the reflector corresponding to the focal point related to low beam illumination or vice-versa.

35 This approach to moving the position of the arc is preferable to magnetic deflection of the arc for at

least two reasons: a) magnetic deflection may require additional circuitry and hardware, and b) acoustic operation, even in the slightly bowed configuration of the arc, still operates at a reduced hot-spot
5 temperature previously discussed.

Further, this approach to achieving the bowing is accomplished by adjusting the waveform so that it has the proper mixture of a bending mode (fundamental acoustic frequency) and a straightening mode (first
10 even harmonic). This allows the arc to be straightened, bowed or anything in between to provide a wide variety of applications.

The relatively high voltage necessary for initial breakdown and hot restrike of the arc is generated by
15 the circuit arrangement of Fig. 7 utilizing a spark-gap device and comprising a five-stage diode-capacitor voltage multiplier along with a step-up coil that utilizes the open circuit output voltage of the inverter. The components of the breakdown circuit are
20 D14 through D18, C8 through C12, and the step-up coil is L2.

The ballast circuit of Figs. 7-10 develops a first signal serving as an unmodulated signal (see Fig. 5A) and having a selectable carrier frequency (CF). The
25 circuit further develops a second signal serving as a modulating signal (see Fig. 5B). Further, the circuit of Figs. 7-10 by combining the first and second signals develops the excitation signal of expression (1) which is applied to the gaseous discharge lamp 60. The
30 ballast circuit of Figs. 7-10 develops the excitation signal of expression (1) within its ranges of parameters previously discussed by the appropriate selections of the associated circuit components.

It should now be appreciated that the practice of
35 the present invention provides circuit arrangements which generate a frequency-modulated, high-frequency

voltage and current to provide excitation for the high-pressure xenon-metal halide lamp. The circuit arrangements allow for the use of a high-pressure xenon gas within the xenon-metal halide lamp so as to yield a high level of instant light which is particularly suited for automotive or vehicle application. The xenon-metal halide lamp operates at a significantly higher pressure (due to both the xenon and mercury) than for normal metal halide lamps and at significantly higher wall loading than is normally used. In addition, for applications in some optical systems, very short arc gaps, that is spacing between electrodes, are desired, which to achieve reasonable lamp voltages, require even higher mercury pressure than discharge lamps with normal arc lengths. Frequency-modulated high-frequency excitation is preferred to overcome the extraordinarily high convection forces produced by the very high pressures, and this results in a more nearly isothermal lamp which again is desired in order to use the very high wall loading which produces the exceptionally high efficacy not normally possible in compact mercury-metal halide discharge lamps not having xenon such as disclosed in U.S. Patent 4,170,746. If without the benefit of the present invention, a xenon-metal halide lamp was operated with low-frequency power, the arc would move against the wall and bulging of the arc tube would occur resulting in the failure of the lamp. Without the benefits of the present invention of frequency-modulating the high frequency, the acoustic frequency windows are narrow and preclude a practical design of the xenon-metal halide lamp. The pressure of xenon related to the present invention is sufficiently high that adequate light is produced instantly for applications such as automotive forward lighting. The shape and size of the bulb, and the frequency and

frequency modulation are chosen in combination to achieve the lumen output and size of the discharge needed for the specific application and such that with the arc straightened, optimum bulb temperature is
5 obtained so as to vaporize the desired amount of halide and at the same time keeping the maximum bulb temperature low enough to achieve the design life.

It should be further appreciated that the present invention provides an optical system utilizing a high
10 pressure xenon-metal halide lamp and a ballast circuit, in which the presence of a straight arc and symmetric discharge results from overcoming the extreme effects of convection associated with the extraordinary high pressure. The effects are overcome by controlled
15 acoustic resonance, which produces a uniform light field useful in various types of projection and display systems. In automotive headlamps ordinarily related to the present invention, in which the light is produced by a high pressure xenon-metal halide lamp operated by
20 a frequency-modulated, high frequency ballast in which superior performance results from the instant light available by virtue of the presence of the high pressure xenon. The small size and straitness of the light source within the optics of the headlamp, yielded
25 by the small size and more isothermal character of the lamp, result from the overcoming of the very rapid convection by means of the acoustic resonance which is controlled by means of the modulation of the high frequency and the control of the waveshapes in
30 accordance with the practice of the present invention.

Still further, in one embodiment the frequency of the excitation signal for the xenon-metal halide lamp is capable of being shifted to cause the arc within the lamp to change from a straight to a bent or bowed
35 condition and thereby move the primary concentration of the light of arc from a first to a second location.

These first and second locations are selected to correspond to the points associated with the high and low beam illumination for a vehicle.

5 Further still, whereas the ballast circuit of Figs. 7-10 is particularly suited for xenon-metal halide lamps, if desired, the ballast circuit of the present invention may be used to advantageously start and operate other gas discharge lamps other than the xenon-metal halide types.

CLAIMS:

1. A method of operating a miniature high pressure metal vapor discharge lamp having a major axis and of a kind comprising:

5 an envelope defining a discharge space having a volume not exceeding approximately 1 cubic centimeter,

a pair of electrodes in the envelope and defining an arc gap, and a fill comprising mercury, metal halides and xenon gas, said method comprising:

10 applying a current having an alternating component causing instantaneous variations in input power across the electrode gap,

said variations in power being at a frequency selected in a preferred band within the range from 20kHz to
15 80 kHz,

said band being one in which acoustic resonance excites arc-straightening modes which reduce the effects of gravity-induced convection in the fill.

2. The method as claimed in claim 1, wherein said
20 preferred band is one in which acoustic resonance excites a mode effective to reduce gravity-induced bowing of the arc.

3. The method as claimed in claim 1, wherein the current is alternating with a waveshape which assures time-fluctuations of input power at said selected frequency.

25 4. The method as claimed in claim 1, wherein the alternating component of the current through the lamp at said selected frequency is frequency-modulated in order to broaden the width of the band of frequencies in which a straight and stable arc is obtained.

30 5. The method as claimed in claim 1, wherein said alternating component may be shifted in frequency between two bands, one band being an arc-straightening band, and the other being a band allowing

some arc-bowing with attendant spatial displacement of the light concentration in said lamp.

6. The method as claimed in claim 1, wherein said variations in power are at a frequency F selected as a center frequency in said preferred band;

said center frequency F is frequency modulated in order to broaden the width of said band,

said frequency modulation being with a frequency deviation DF at a modulating frequency f , DF and f being chosen to maximize the width of said band.

7. The method as claimed in claim 6, wherein the frequency deviation is from 7 to 20% of the center frequency F , and the modulating frequency is from 1 to 5% of the center frequency F .

8. The method as claimed in claim 6, wherein the frequency deviation is from 7 to 20% of the center frequency F , the modulating frequency is from 1 to 5% of the center frequency F , and the waveform of the modulating frequency envelope inclines to triangular or sawtooth.

9. The method as claimed in claim 1, practiced on a lamp of said kind wherein the electrodes define a horizontal arc gap parallel to the major axis.

10. A miniature high pressure metal vapor discharge lamp system comprising a lamp having a major axis and associated operating means, said lamp comprising:

an envelope defining a discharge space having a volume not exceeding approximately 1 cubic centimeter,

a pair of electrodes in the envelope defining an arc gap, and a fill comprising mercury, metal halides, and xenon gas, said operating means comprising:

5 a source of current connected across said electrodes, said source being capable of delivering a current having an alternating component causing instantaneous variations in input power across the electrode gap,

said variations in power being at a frequency selected in a preferred band within the range from 20 kHz to 80 kHz,

10 said band being one in which acoustic resonance excites arc-strengthening modes which reduce the effects of gravity-induced convection in the fill.

11. The lamp system as claimed in claim 10, wherein said preferred band is one in which acoustic resonance excites a mode
15 effective to reduce gravity-induced bowing of the arc.

12. The lamp system as claimed in claim 10, wherein the electrodes define a horizontal arc gap parallel to the major axis.

13. The lamp system as claimed in claim 10, wherein the current source is capable of delivering alternating current with a wave shape
20 which assures time-fluctuations of input power at said selected frequency.

14. The lamp system as claimed in claim 10, wherein the alternating component of the current through the lamp causing said power variations at said selected frequency is frequency-modulated in order to broaden the width of the band of frequencies in which a straight and
25 stable arc is obtained.

15. The lamp system as claimed in claim 10, wherein the envelope of said lamp defines a generally prolate-spheroid discharge

space, and wherein the electrodes define a horizontal arc gap parallel to the major axis.


16. The lamp system as claimed in claim 10,
wherein the arc gap is horizontal, and said variations
5 in power are at a frequency F selected as a center
frequency in said preferred band, said center frequency
 F being frequency modulated in order to broaden the
width of said band, said frequency modulation being
with a frequency deviation DF at a modulating frequency
10 f , DF and f being chosen to maximize the width of said
band.

17. The lamp system as claimed in claim 16,
wherein the frequency deviation DF is from 7 to 20% of
the center frequency F , and the modulating frequency f
15 is from 1 to 5% of the center frequency F .

18. The lamp system as claimed in claim 16,
wherein the frequency deviation is from 7 to 20% of the
center frequency F , the modulating frequency f is from
1 to 5% of the center frequency F , and the waveform of
20 the modulating frequency envelope inclines to
triangular or sawtooth.

19. The lamp system as claimed in claim 16,
including a headlamp reflector in which said lamp is
located, and switch means for step-shifting the center
25 frequency from a controlled arc-bowing region to an
arc-straightening band, whereby to physically displace
the light concentration in said lamp to effect beam-
switching.

Fig. 1

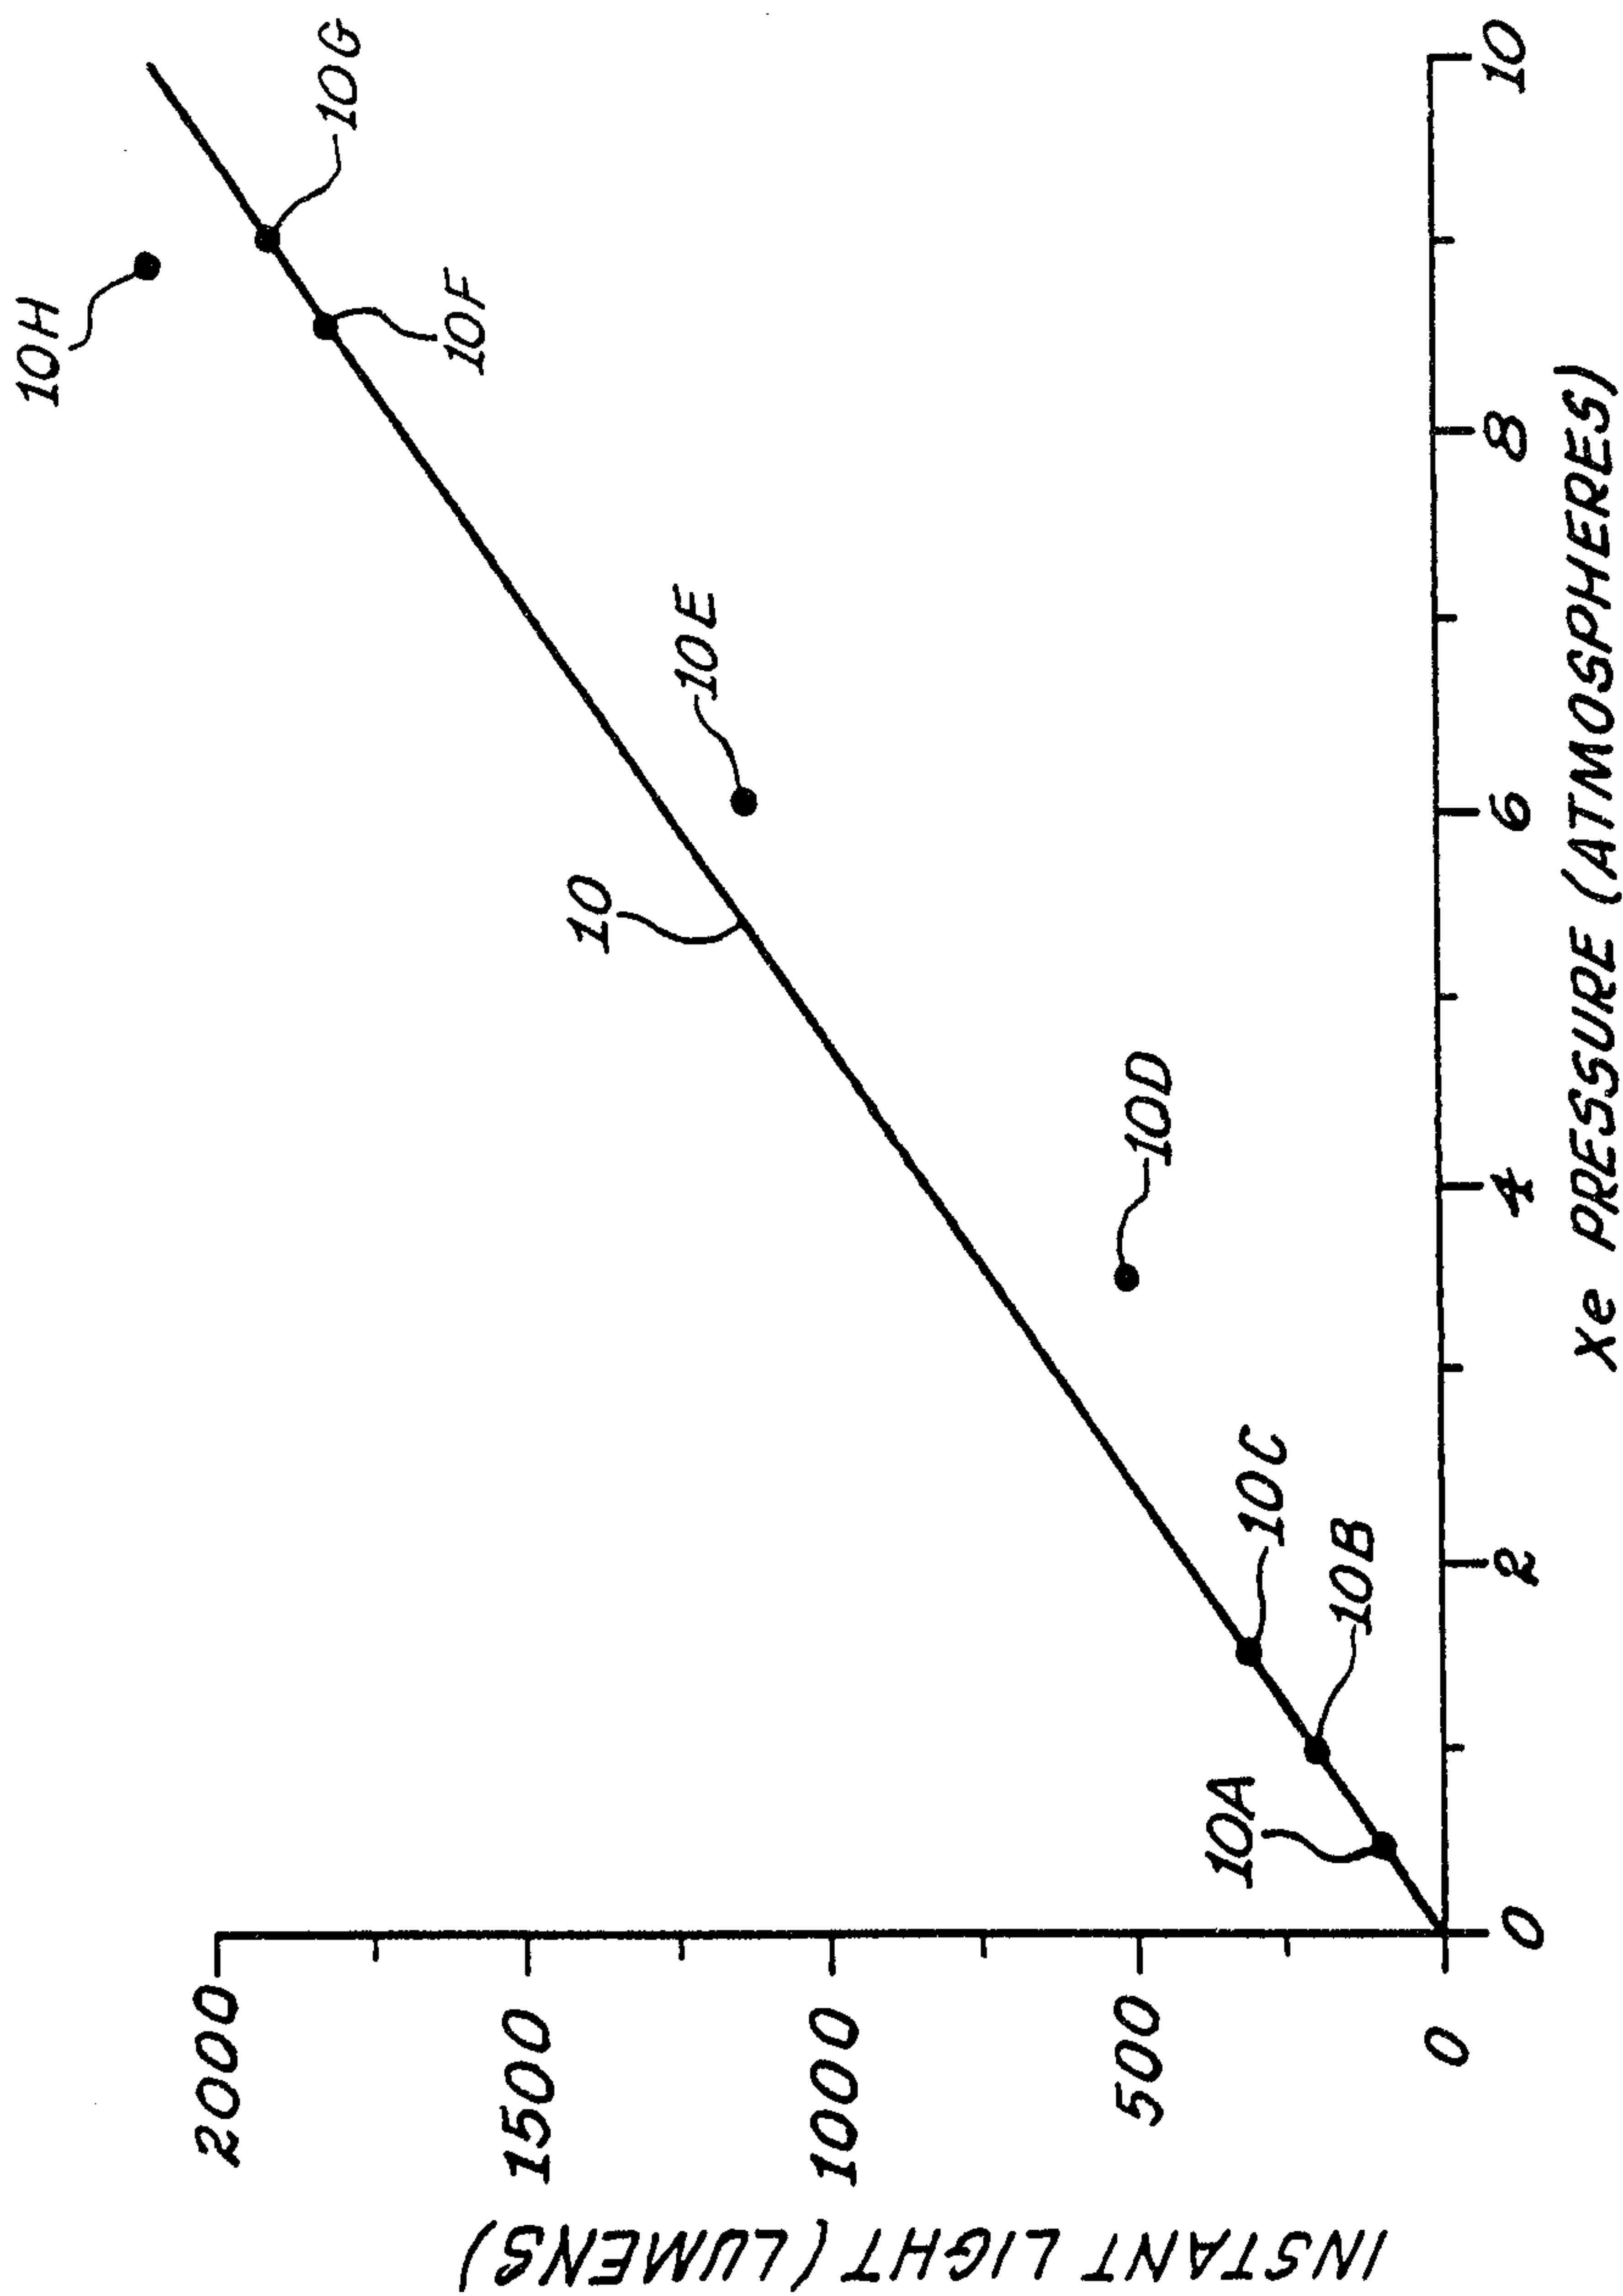

Cochran and Wilson

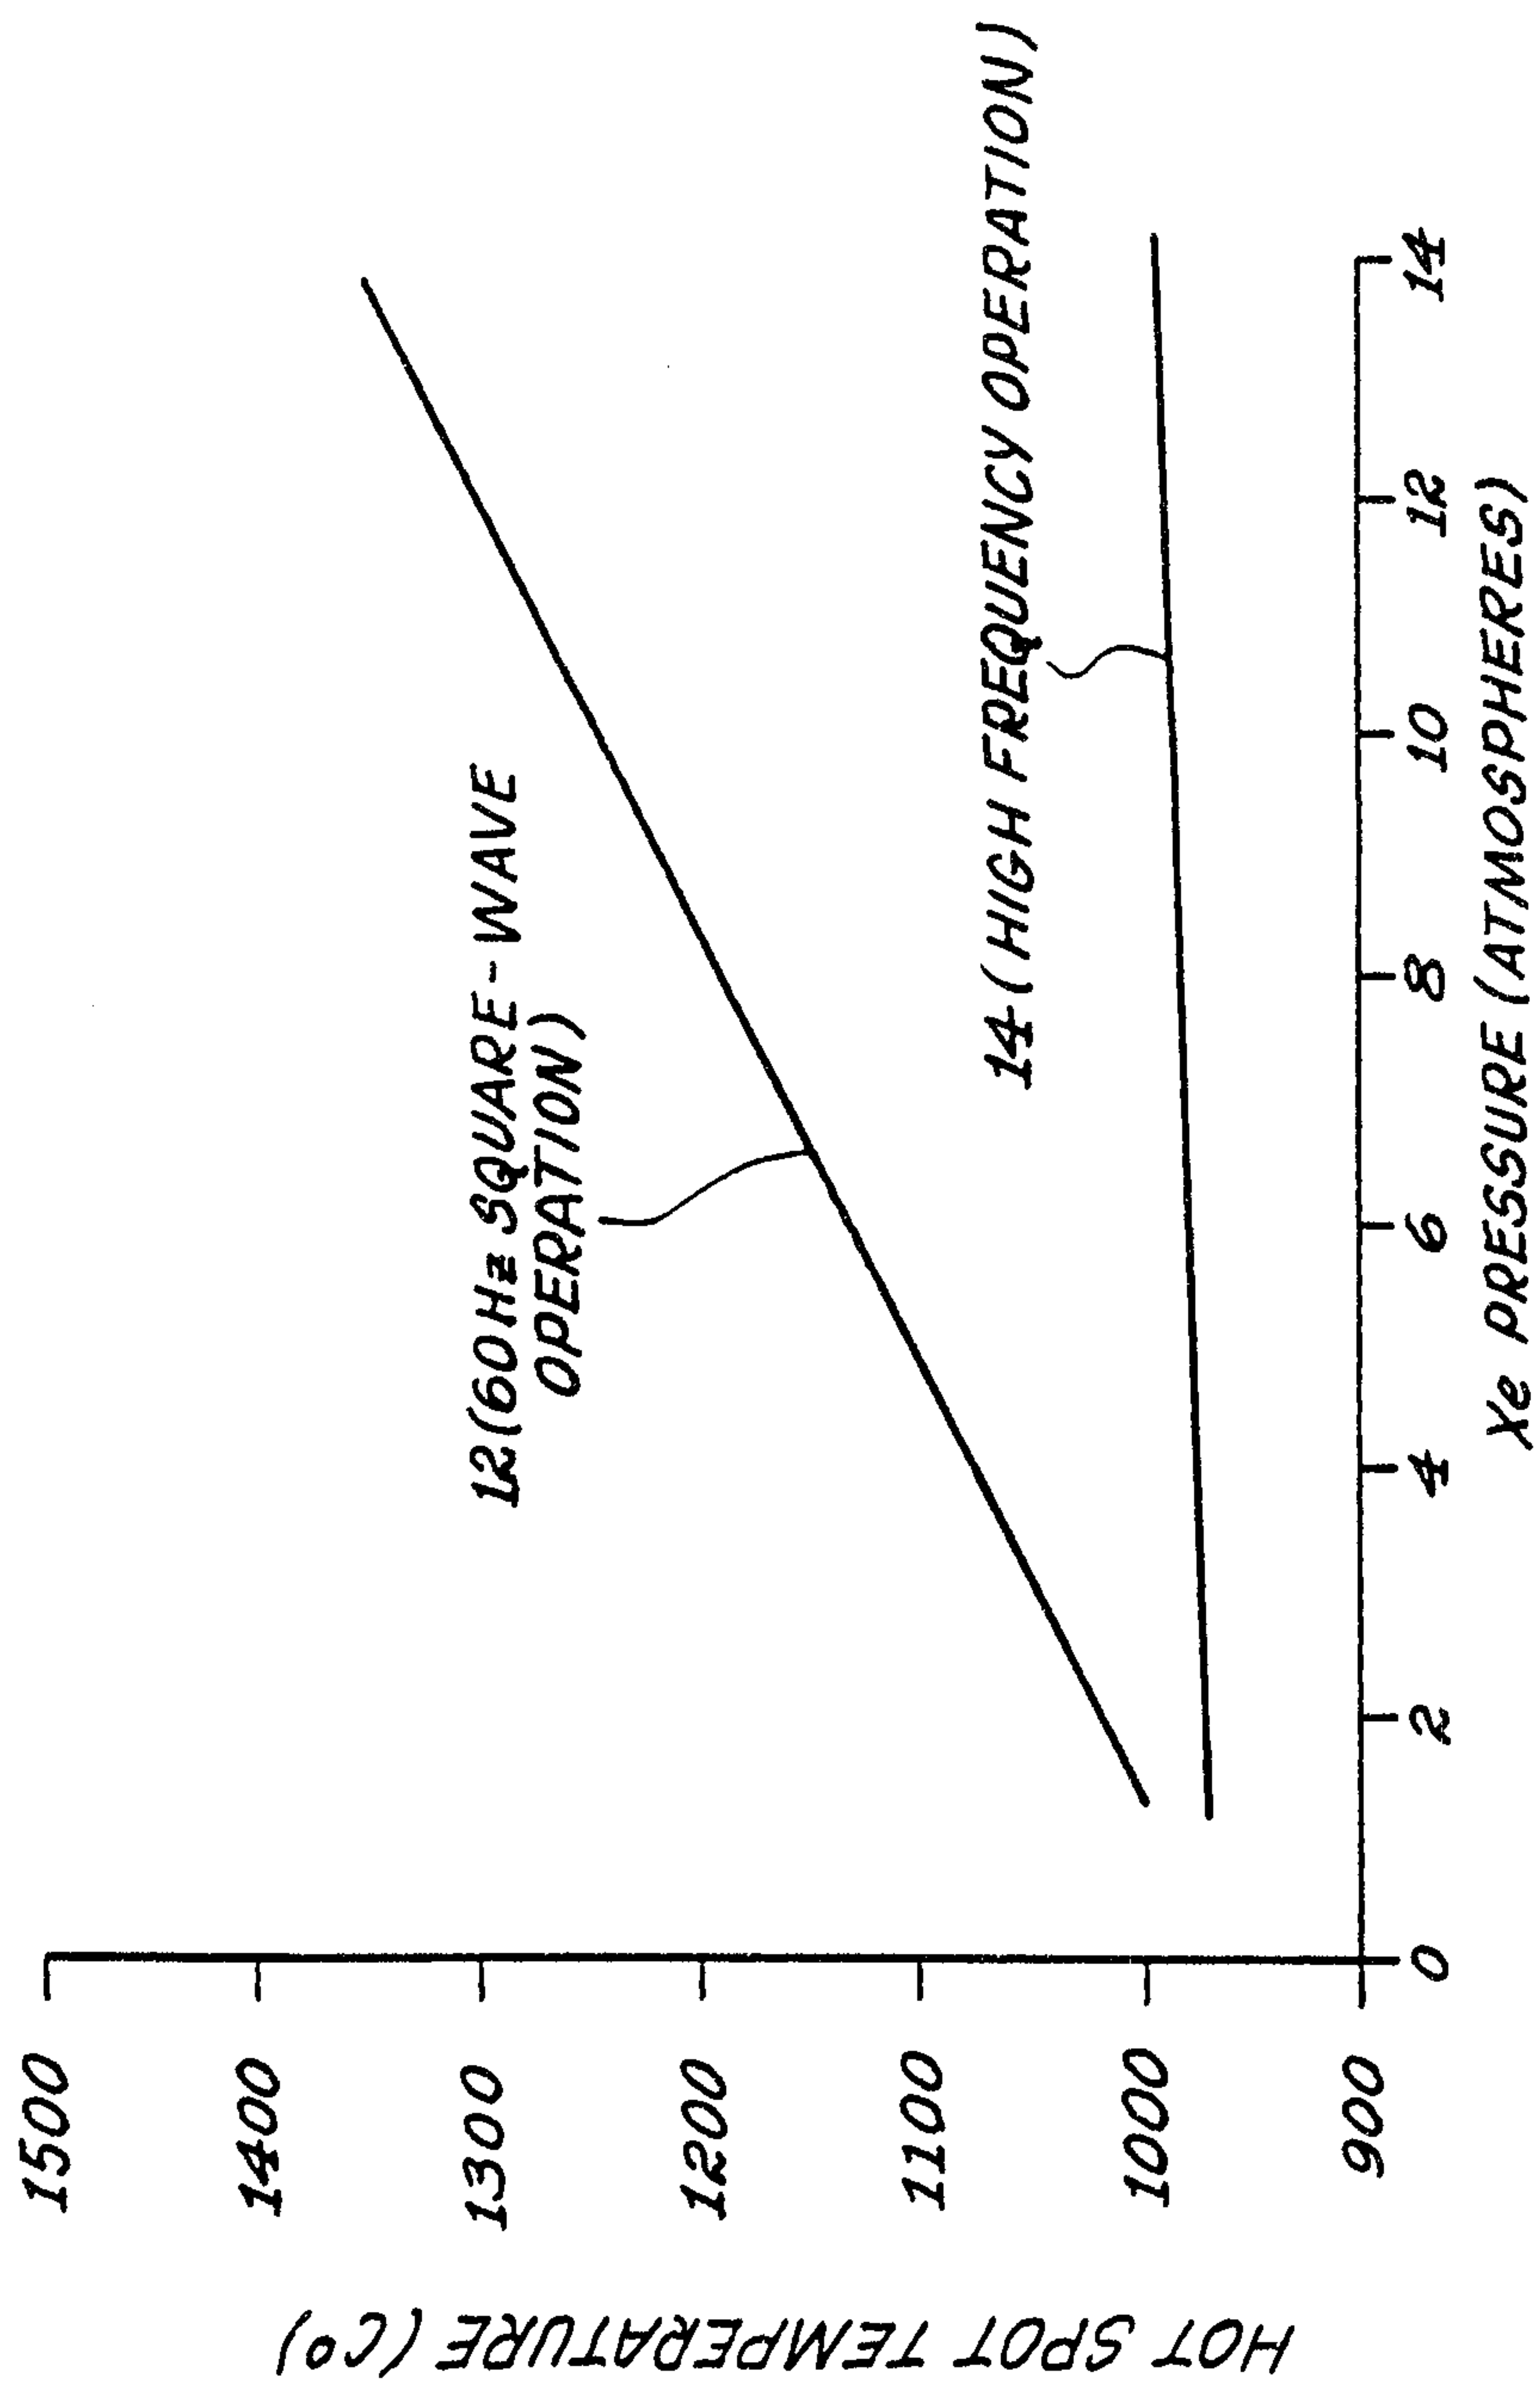


Fig. 2

Crichton and Wilson


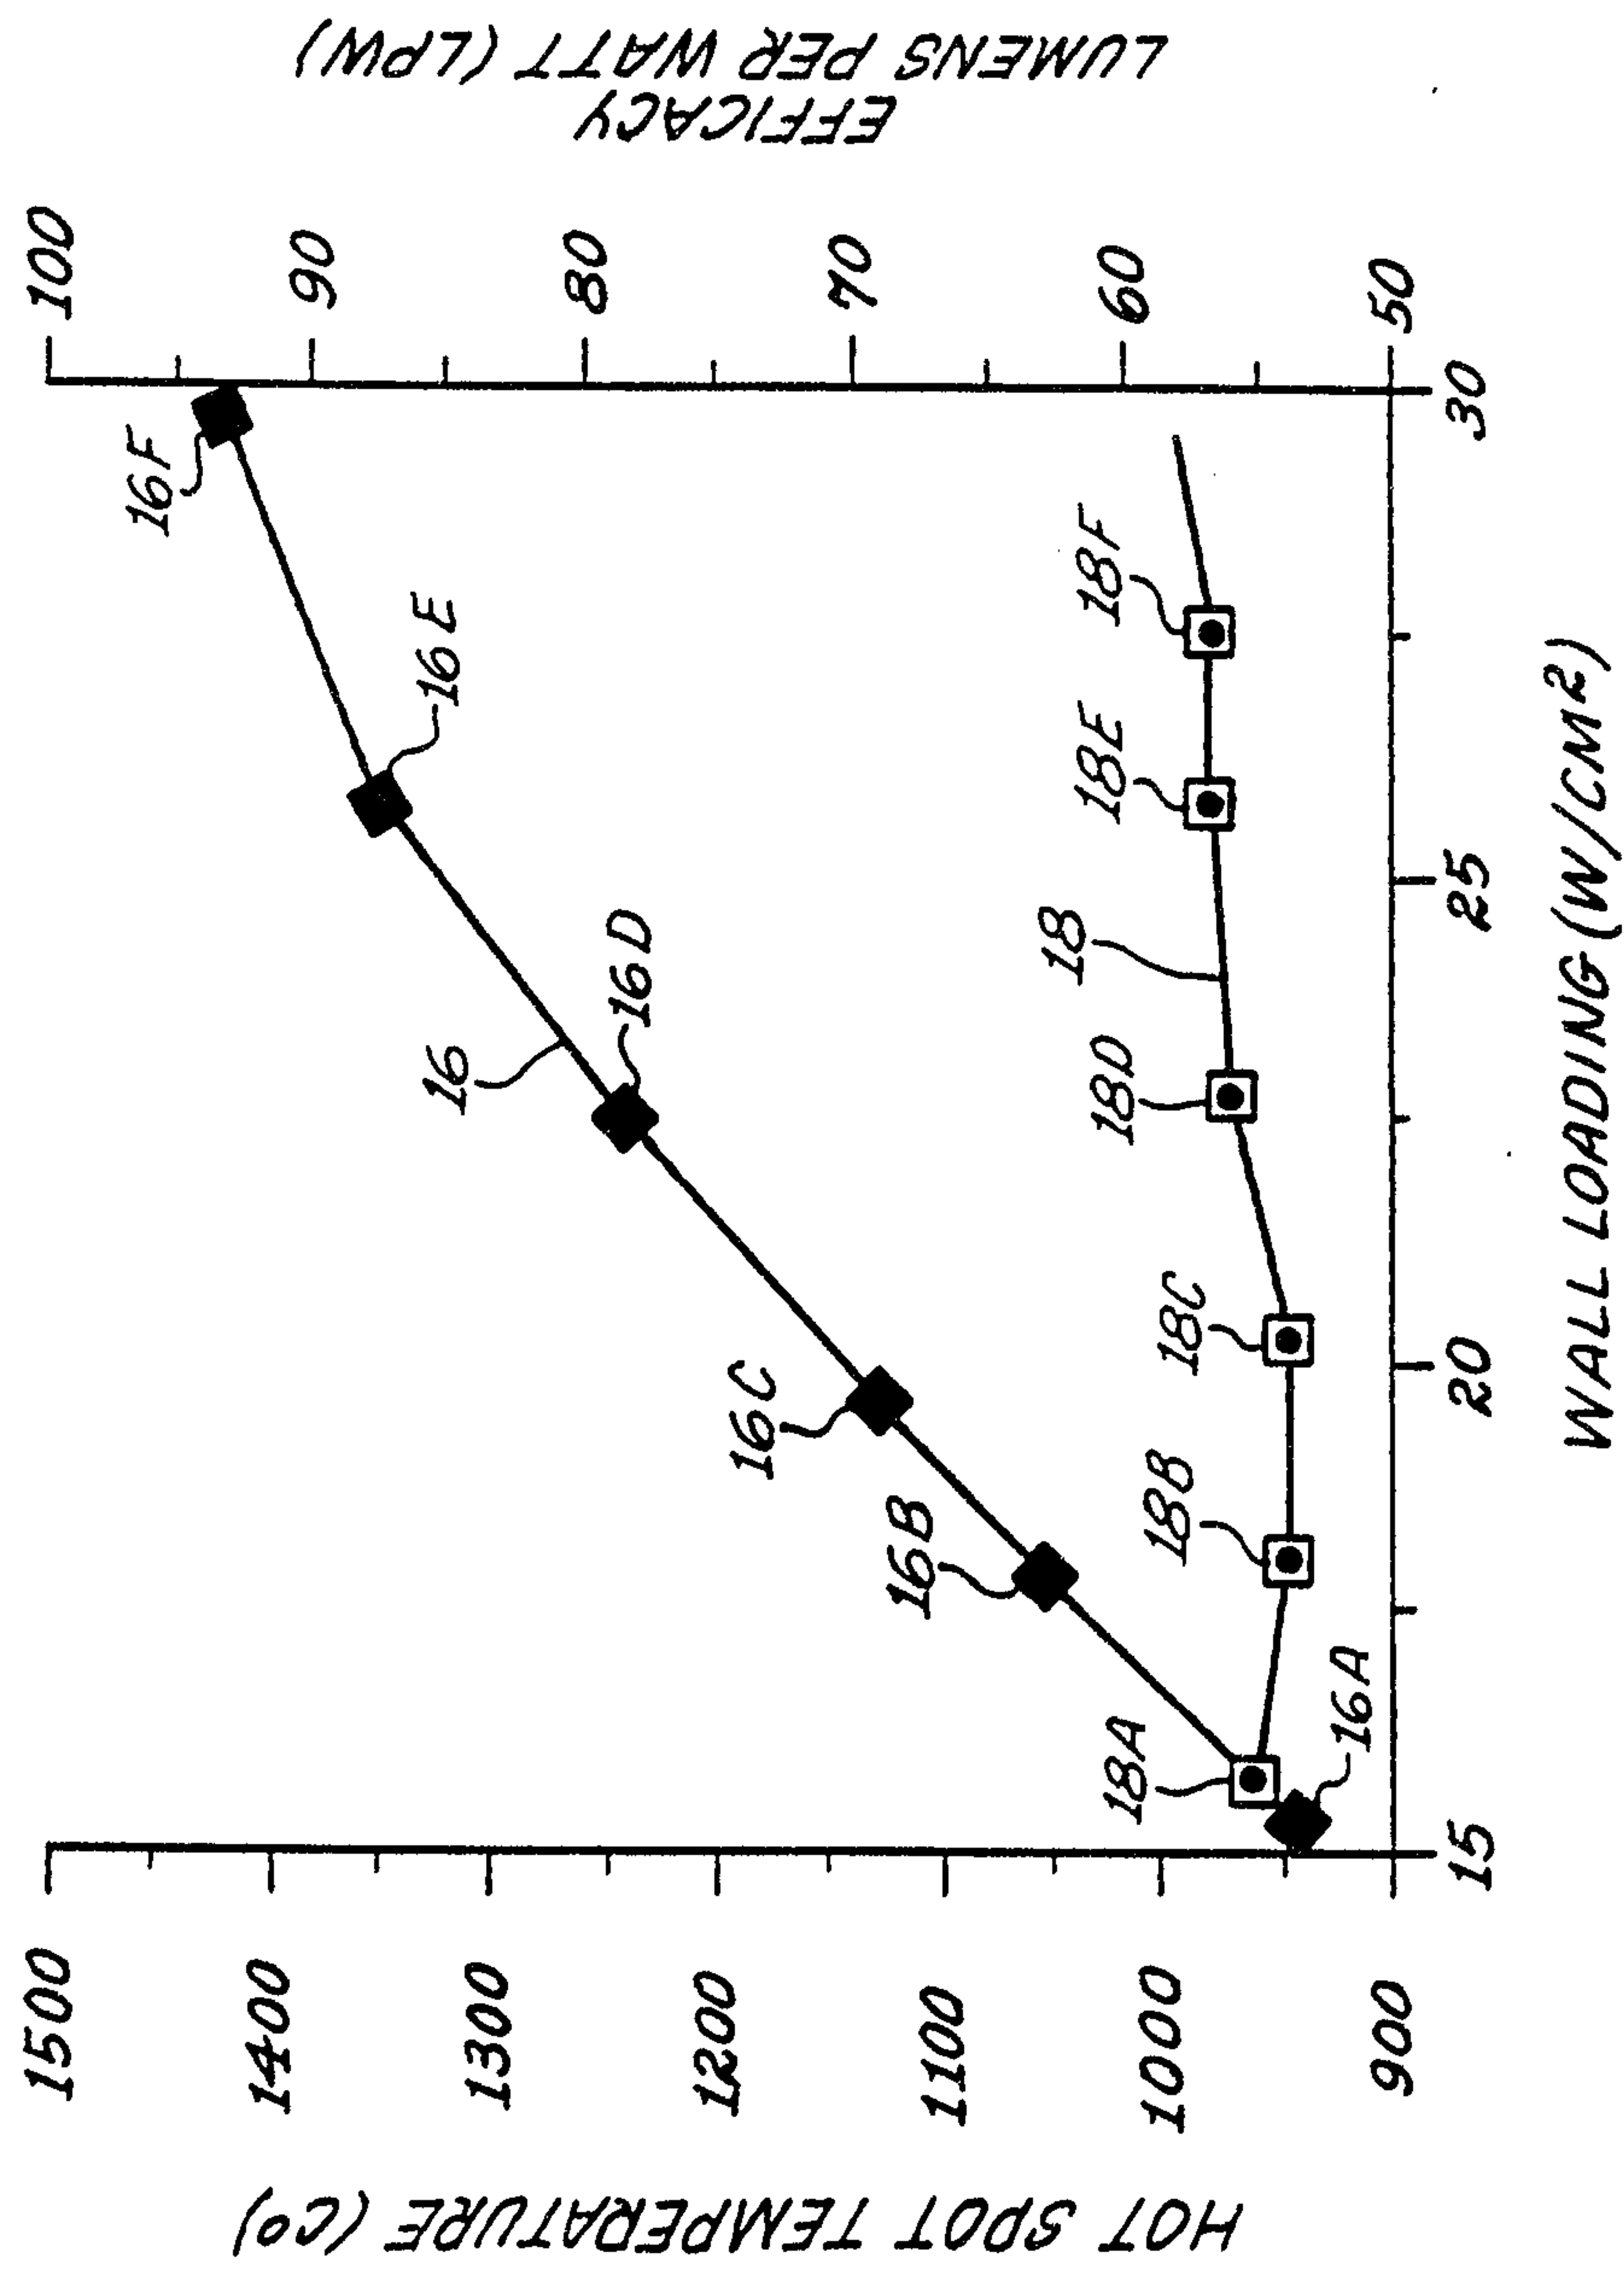


Fig. 3

Redham and Wilson

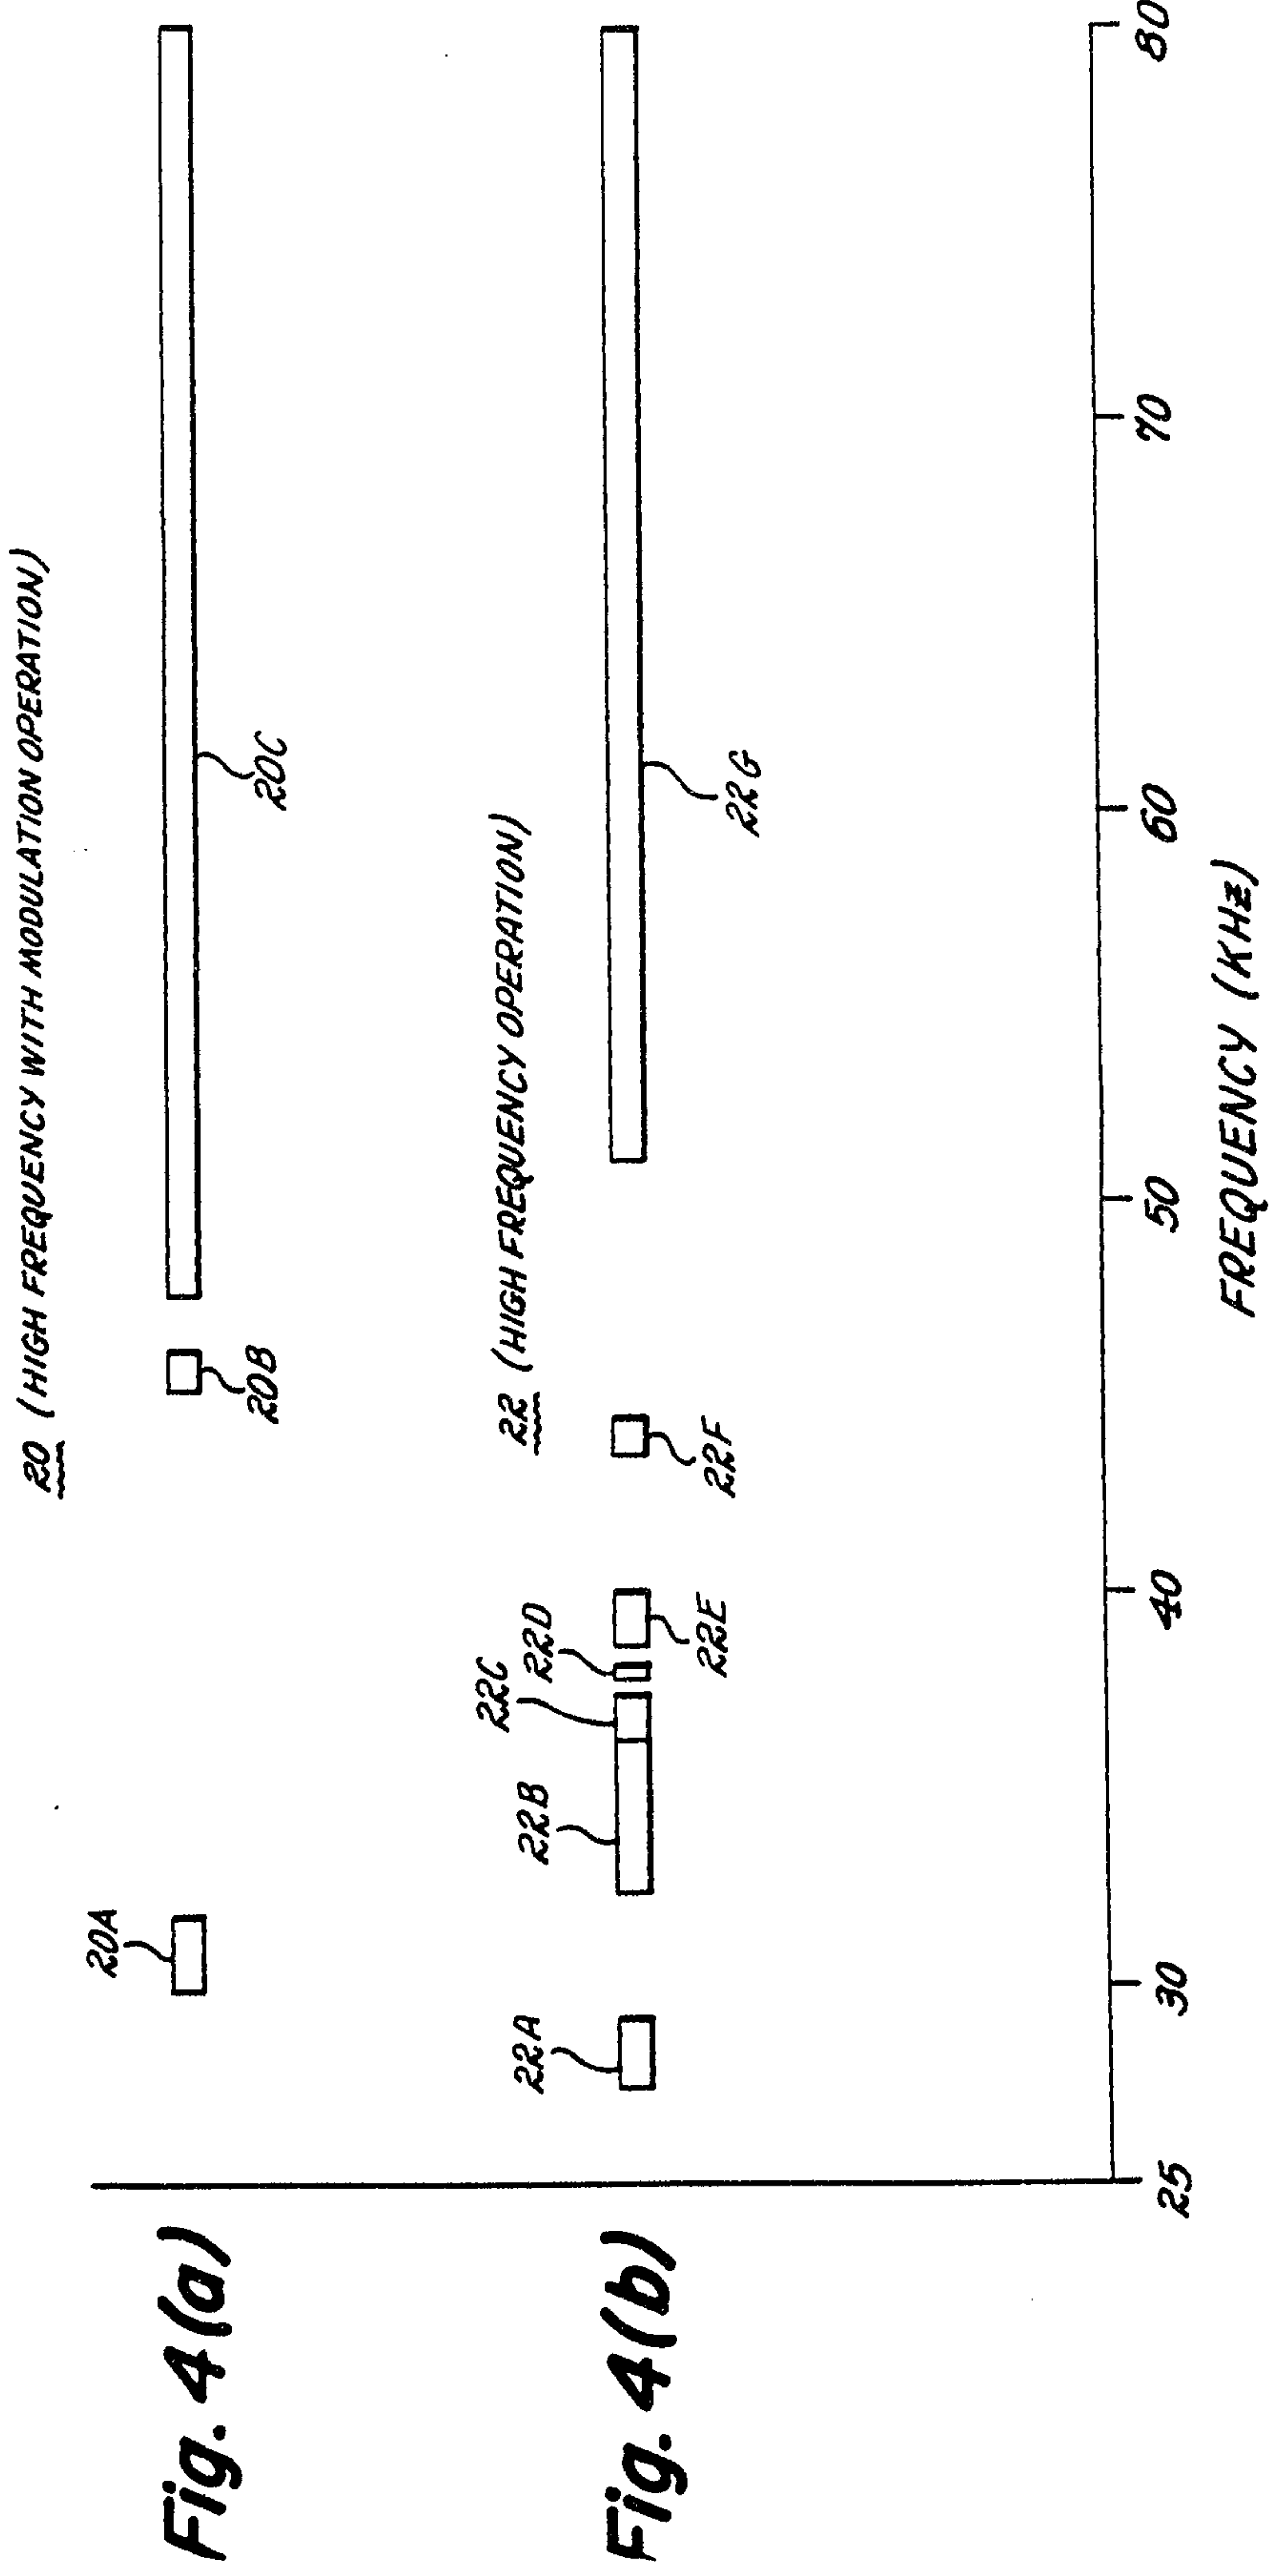

Graham and Gibson

Fig. 4

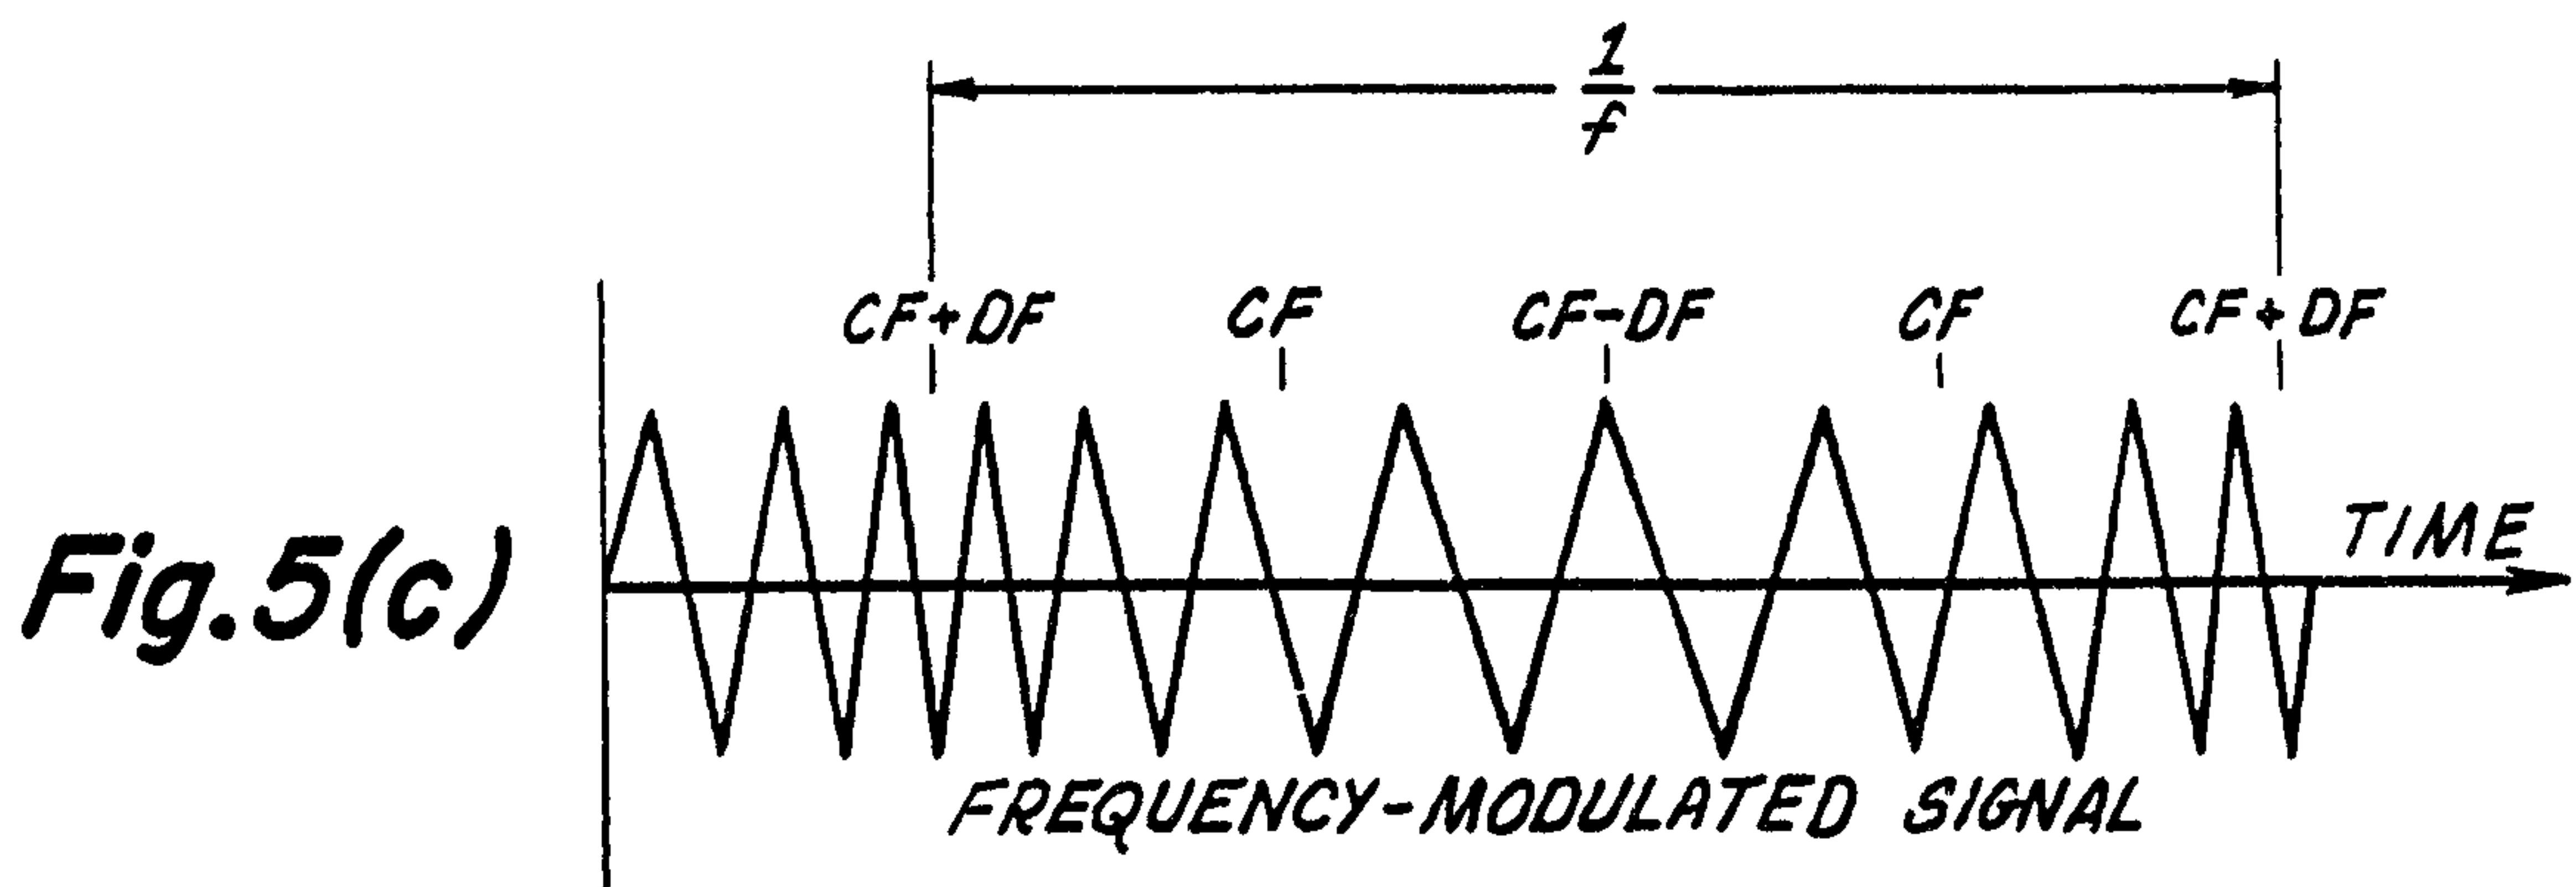
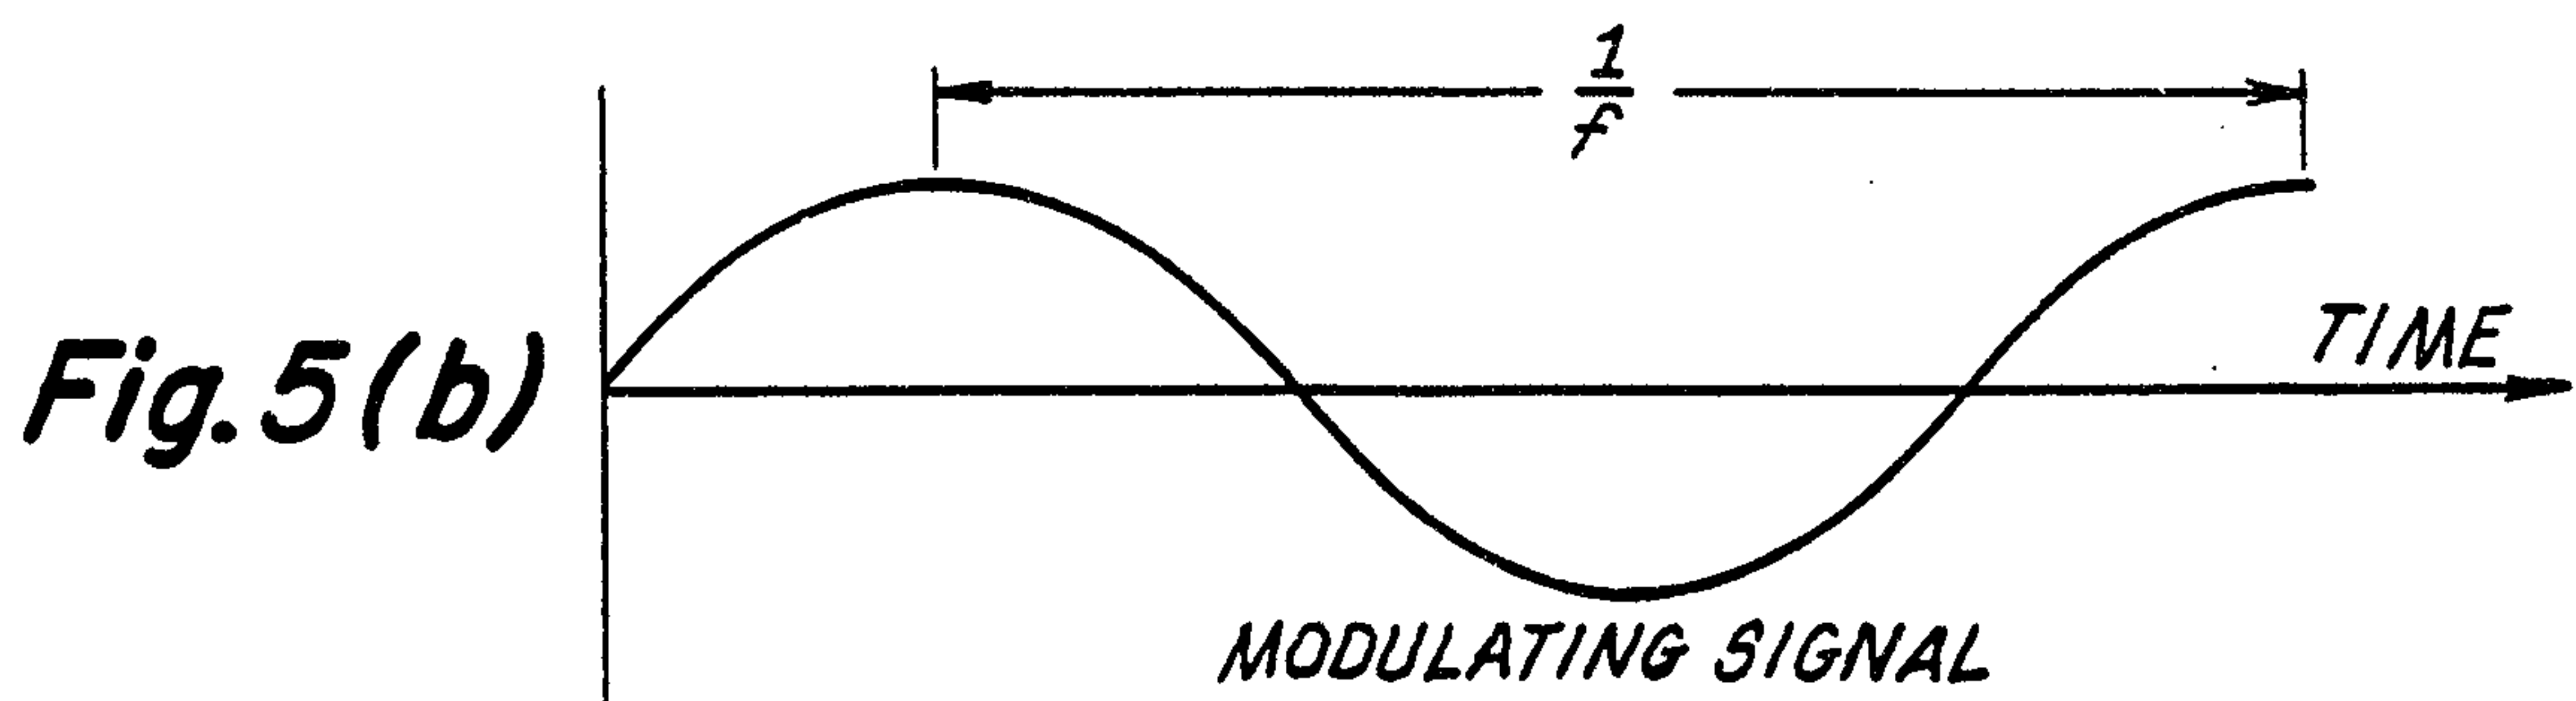
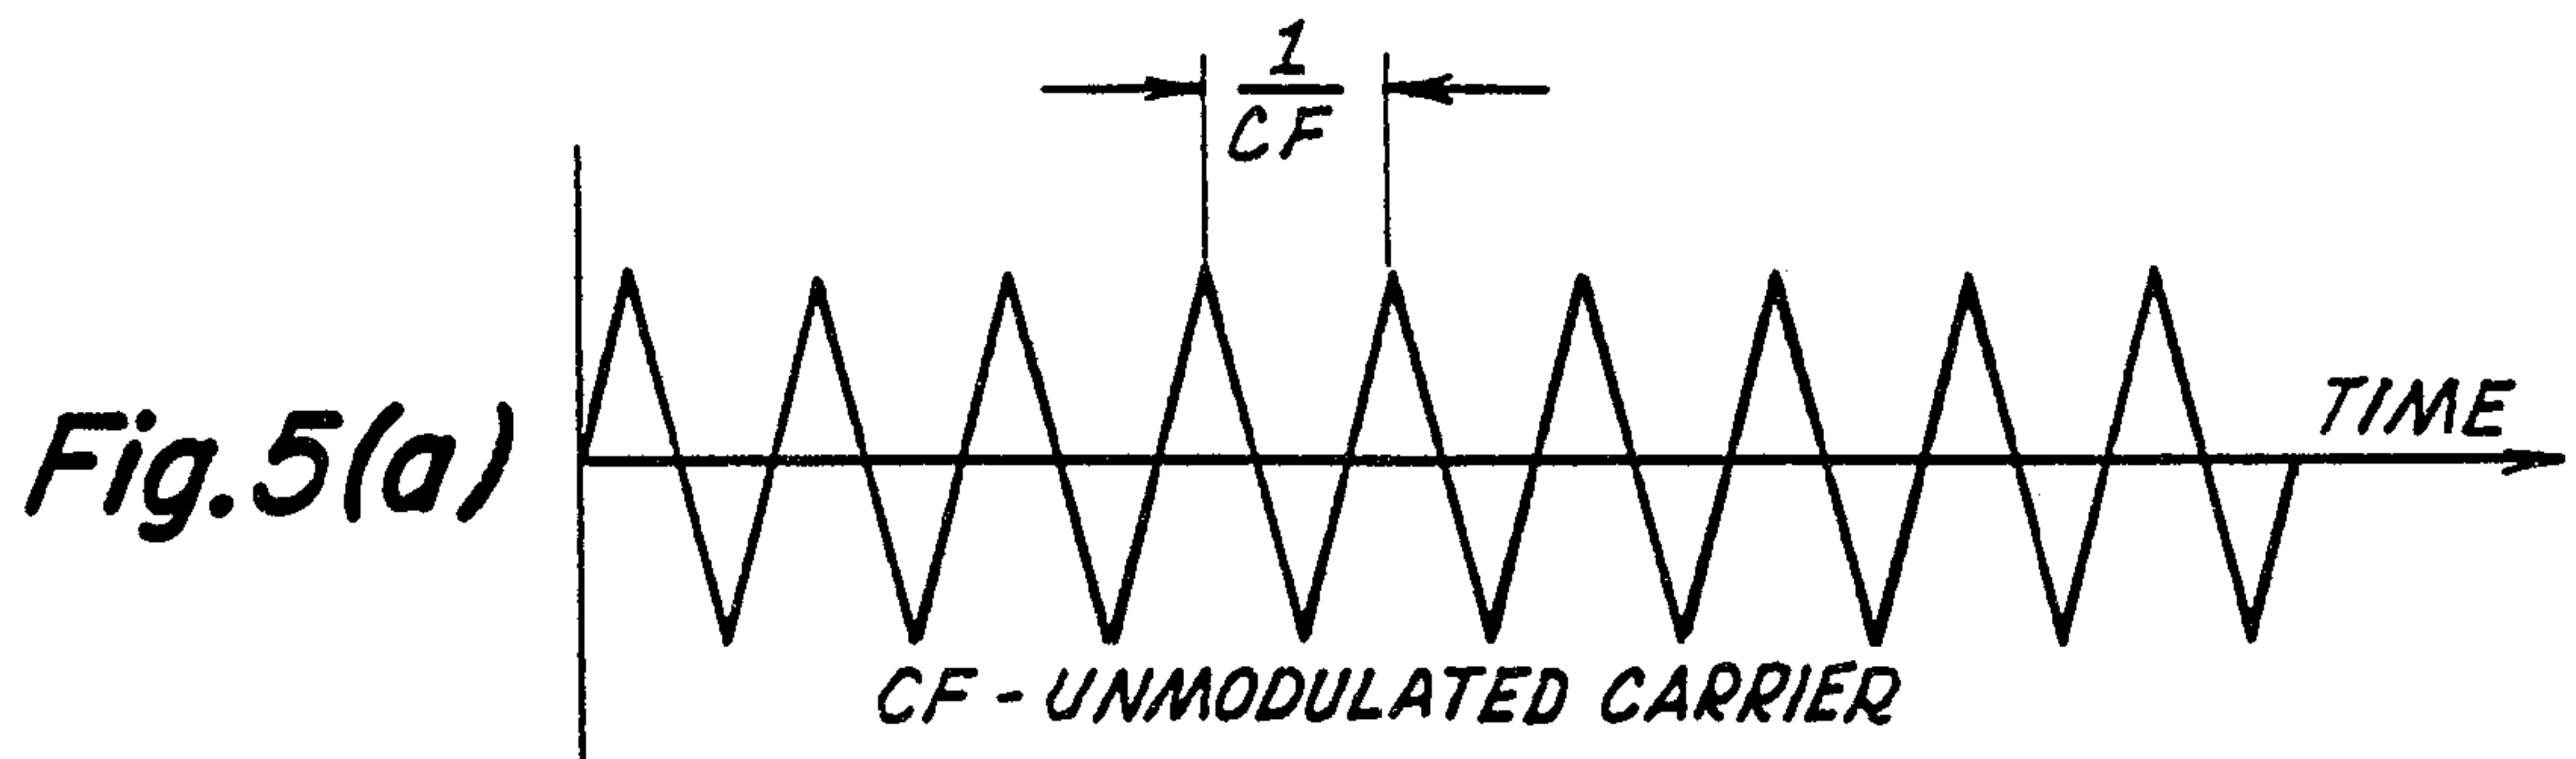


Fig. 5

Leatham and Wilson

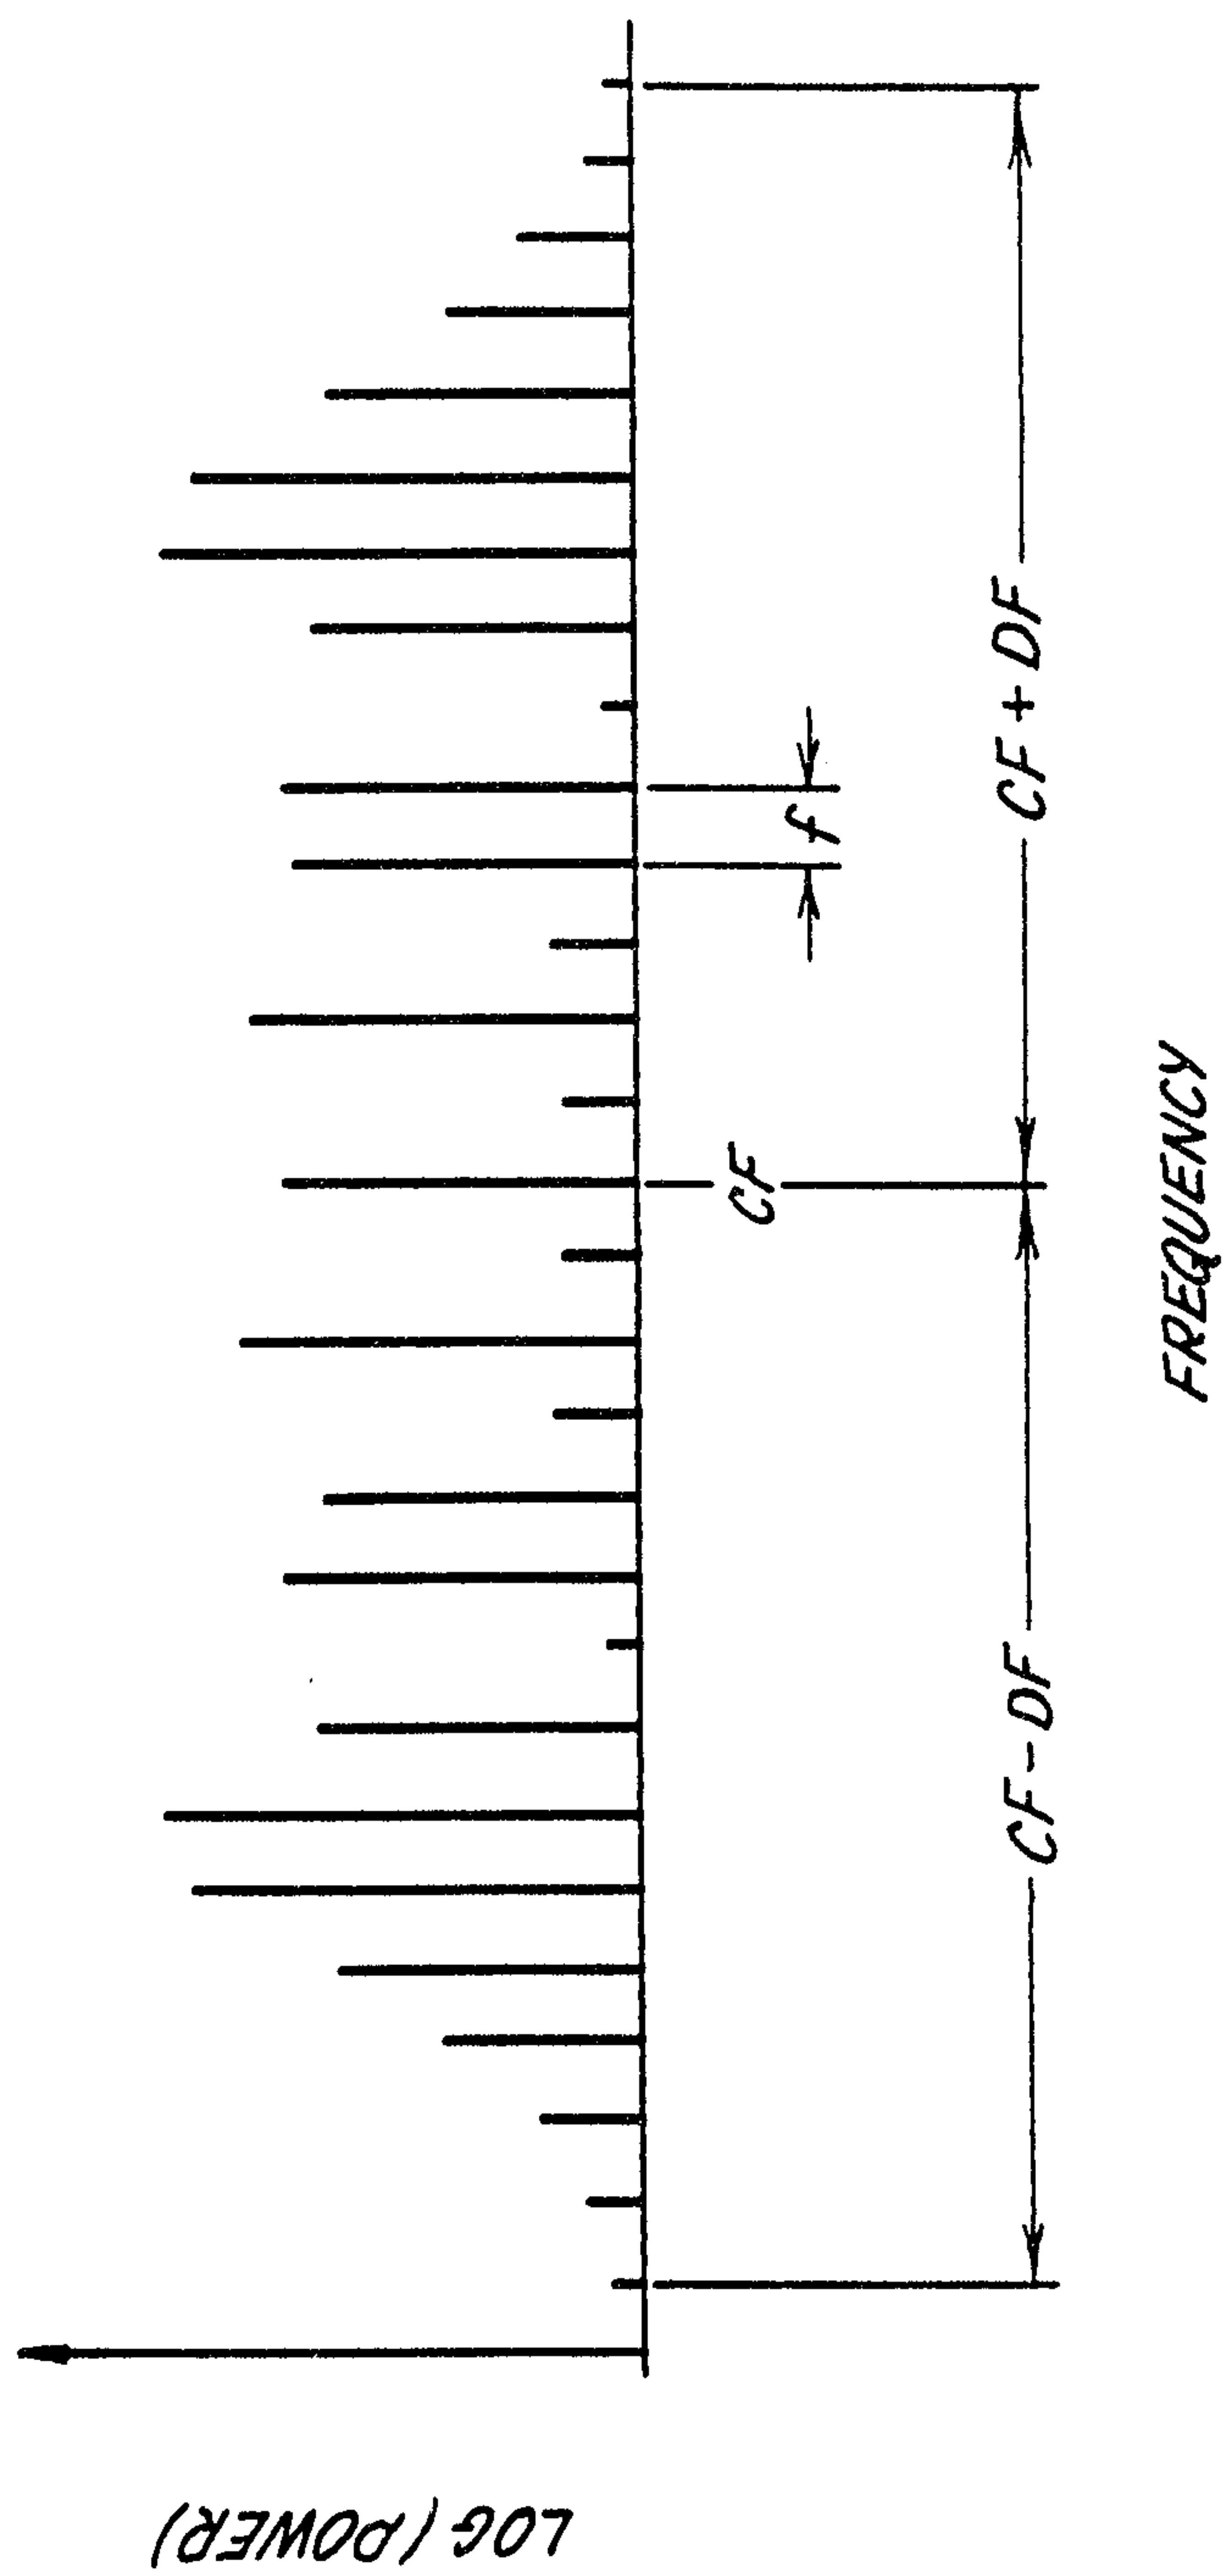


Fig. 6

Adams and Wilson

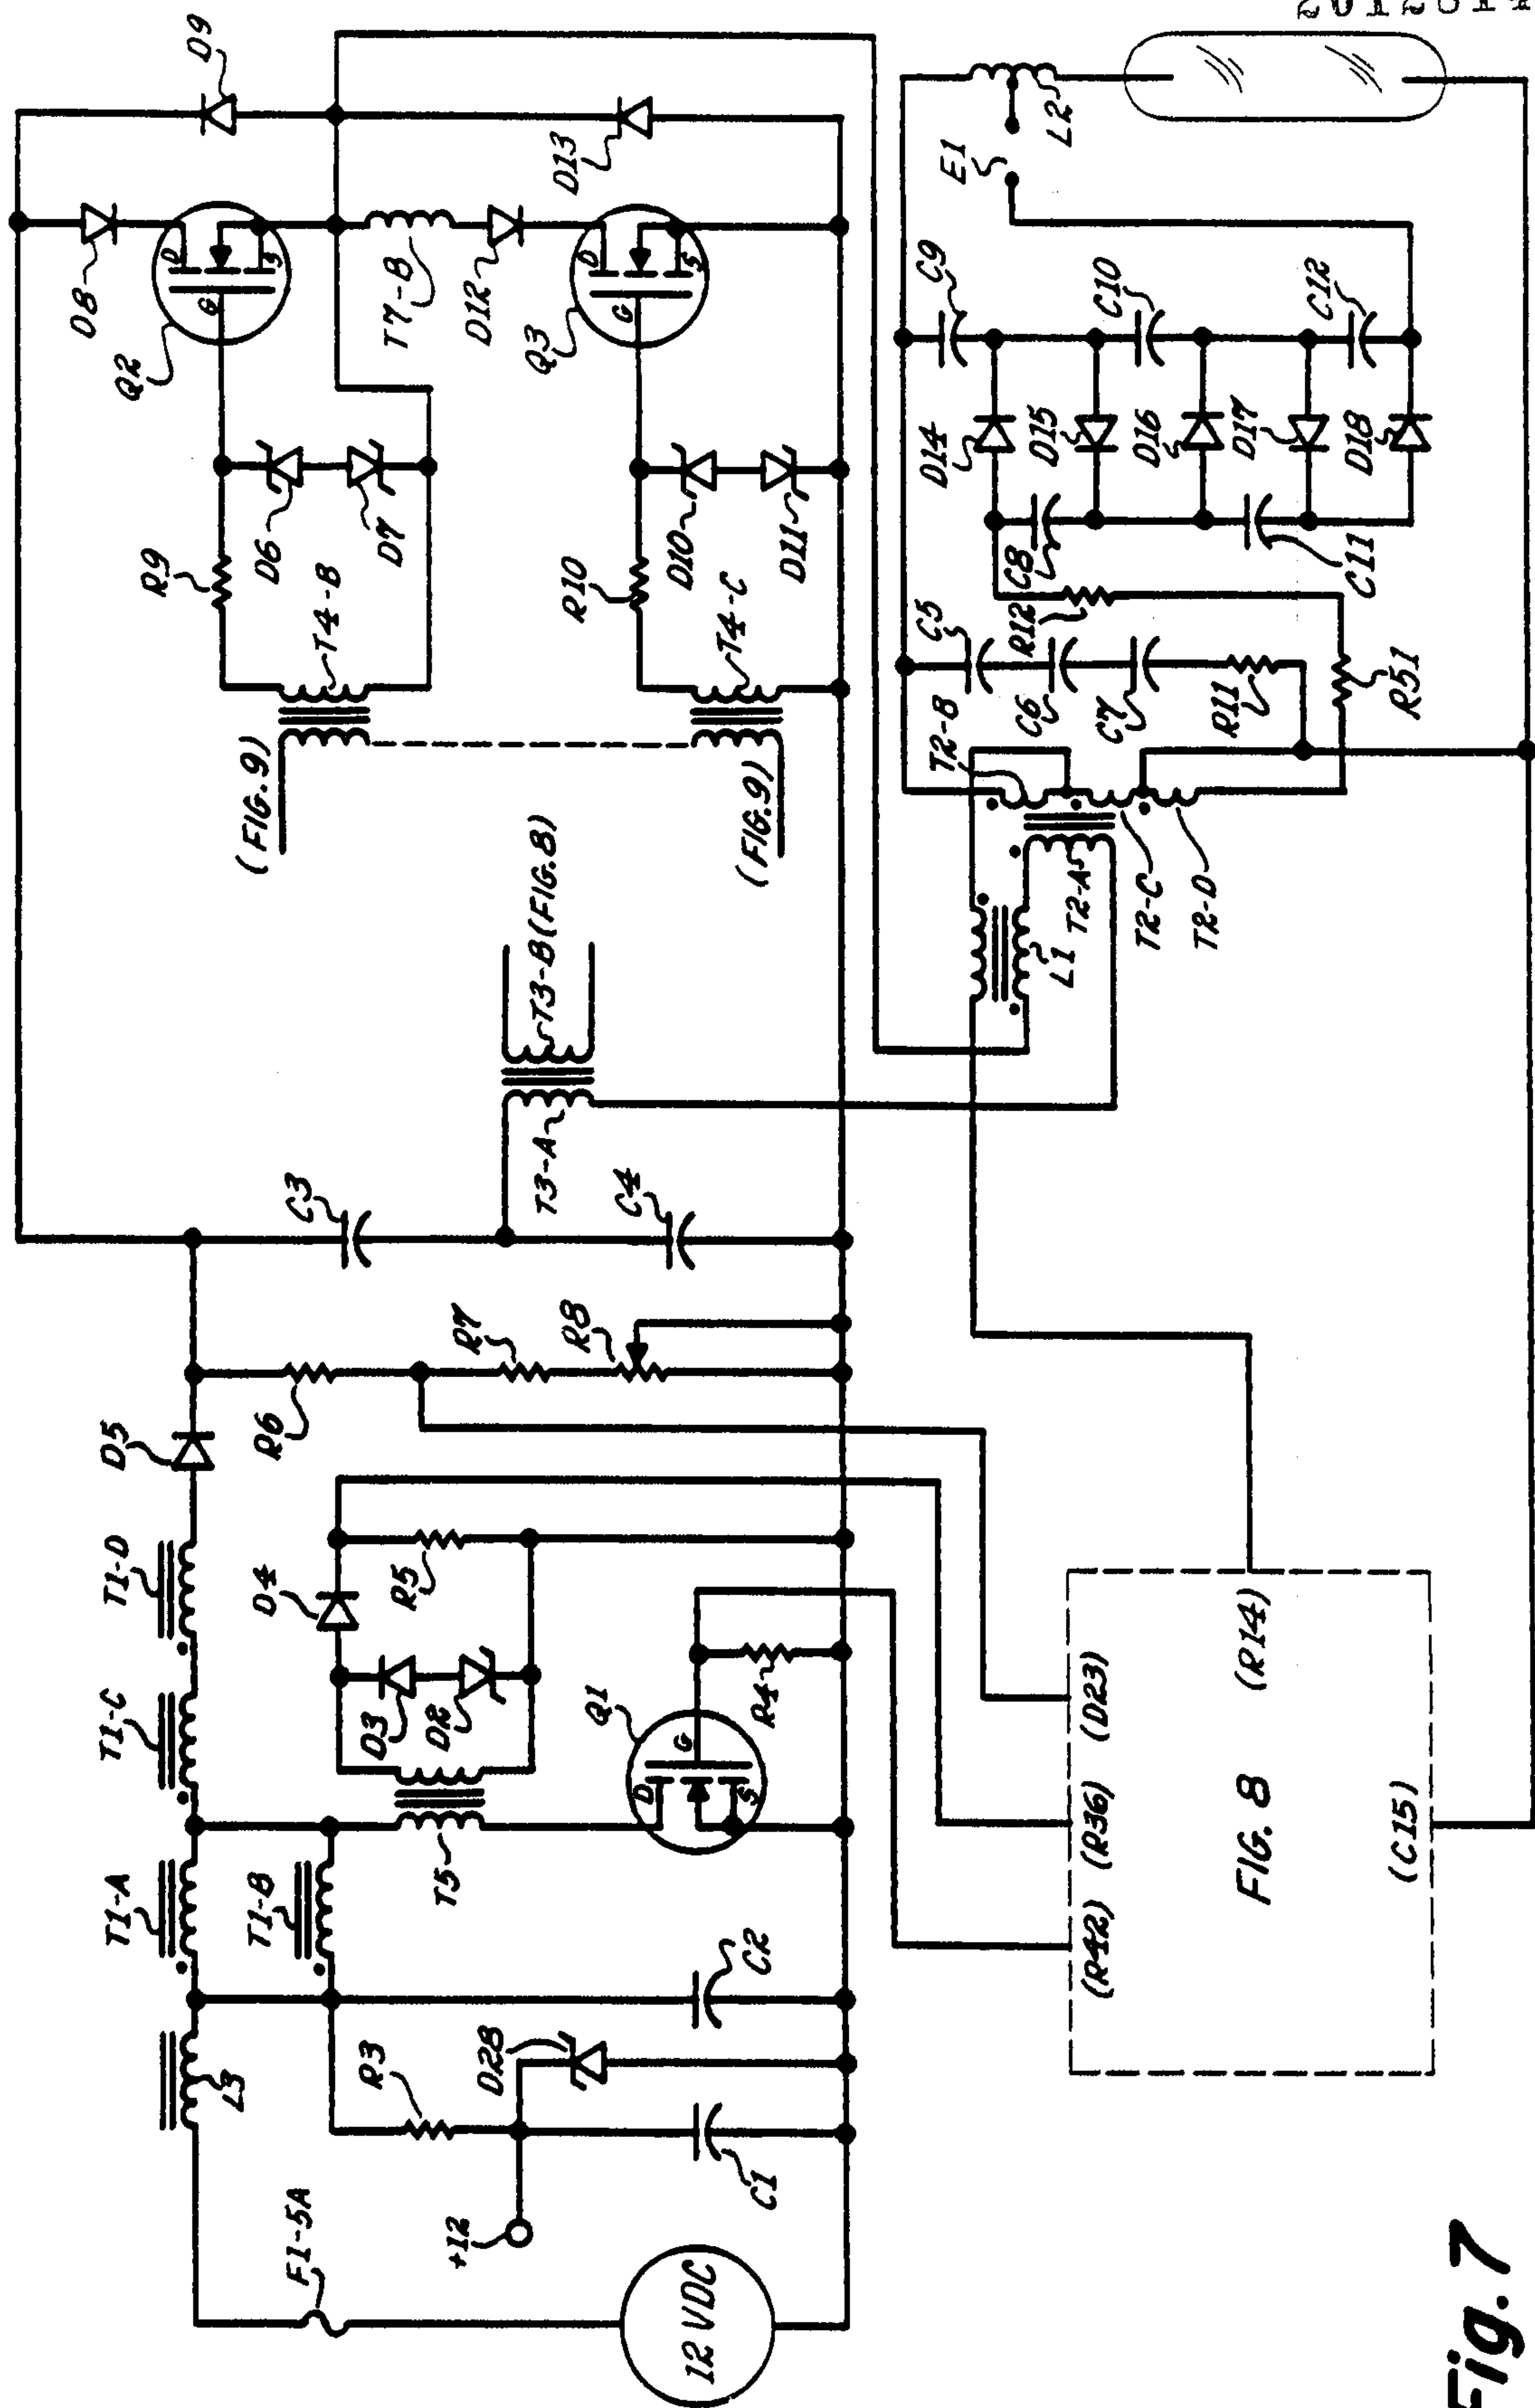


Fig. 7

Debban and Wilson

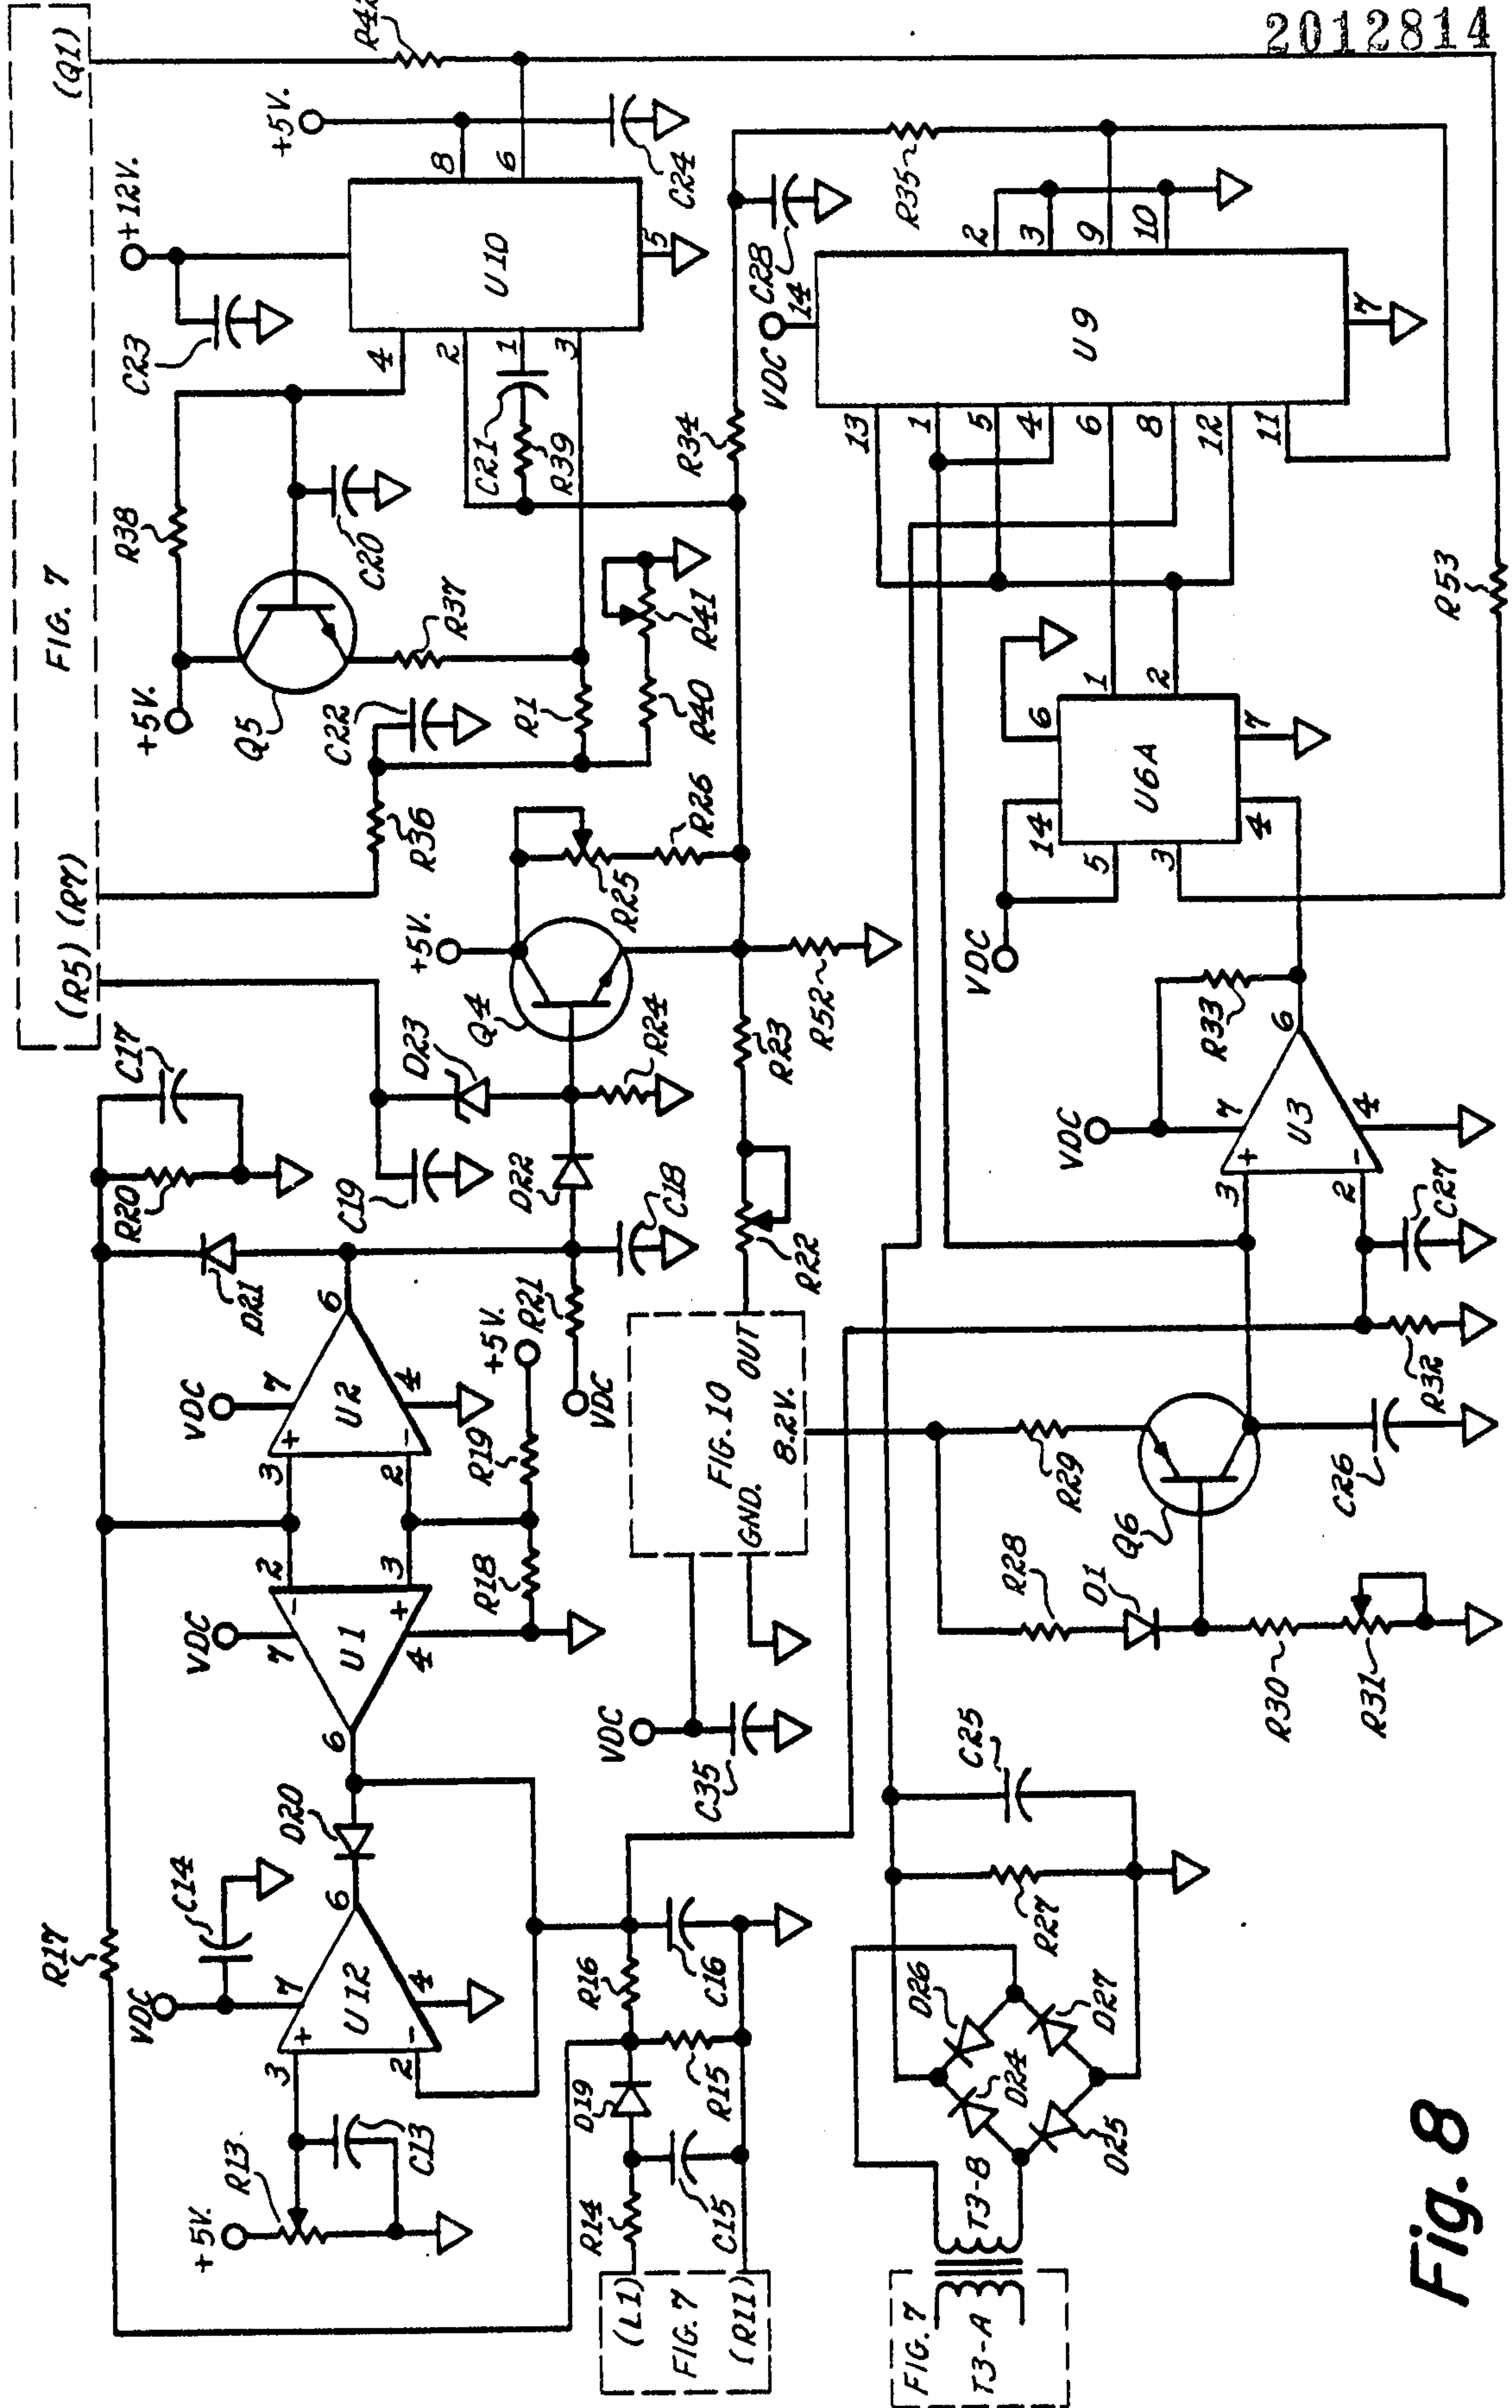


Fig. 8

Deborah and Liban

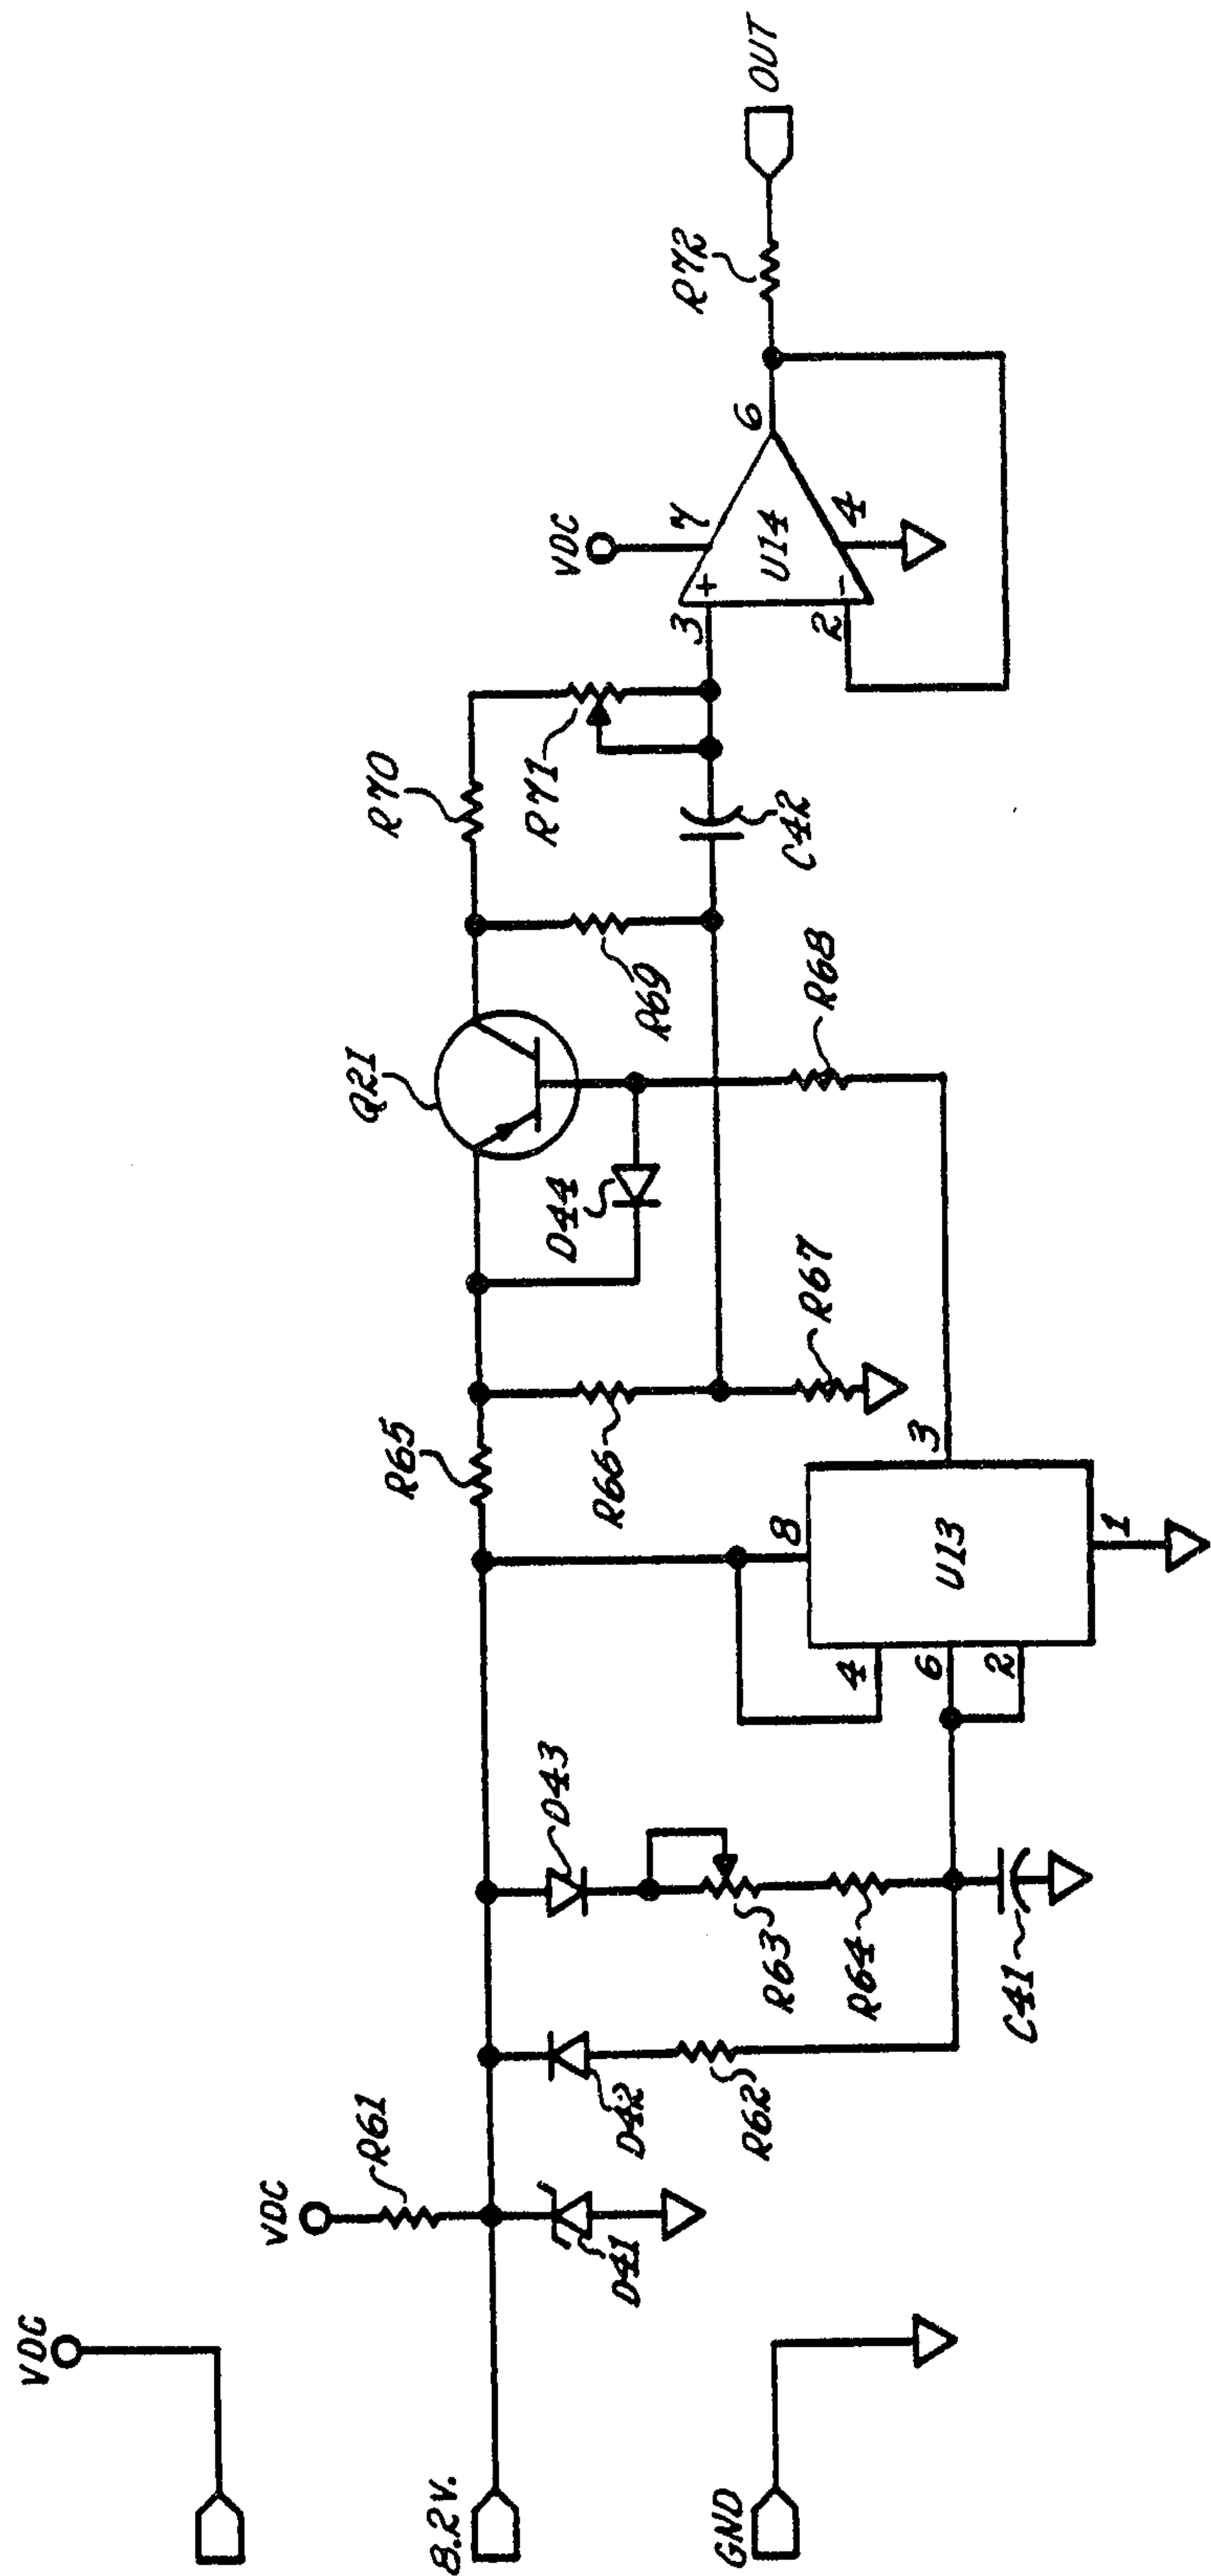


Fig. 10

Redham and Wilson