

(19) **DANMARK**

(10) **DK/EP 3101761 T3**



Patent- og
Varemærkestyrelsen

(12) Oversættelse af
europæisk patentskrift

-
- (51) Int.Cl.: **H 02 J 7/00 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2019-01-28**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2018-10-10**
- (86) Europæisk ansøgning nr.: **14881227.4**
- (86) Europæisk indleveringsdag: **2014-05-15**
- (87) Den europæiske ansøgnings publiceringsdag: **2016-12-07**
- (86) International ansøgning nr.: **CN2014077547**
- (87) Internationalt publikationsnr.: **WO2015113348**
- (30) Prioritet: **2014-01-28 CN 201410043064**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Guangdong Oppo Mobile Telecommunications Corp., Ltd., No.18 Haibin Road , Wusha, Chang'an, Dongguan, Guangdong 523860, Kina**
- (72) Opfinder: **ZHANG, Jialiang, No.18 Haibin Road, Wusha, Chang'an, Dongguan, Guangdong 523841, Kina**
WU, Kewei, No.18 Haibin Road, Wusha, Chang'an, Dongguan, Guangdong 523841, Kina
ZHANG, Jun, No.18 Haibin Road, Wusha, Chang'an, Dongguan, Guangdong 523841, Kina
PENG, Liangcai, No.18 Haibin Road, Wusha, Chang'an, Dongguan, Guangdong 523841, Kina
LIAO, Fuchun, No.18 Haibin Road, Wusha, Chang'an, Dongguan, Guangdong 523841, Kina
- (74) Fuldmægtig i Danmark: **AWA Denmark A/S, Strandgade 56, 1401 København K, Danmark**
- (54) Benævnelse: **Fremgangsmåde og system til hurtigladestyring.**
- (56) Fremdragne publikationer:
EP-A2- 0 731 549
WO-A1-2009/119271
CN-A- 101 414 753
CN-A- 103 199 595
CN-A- 103 236 568
CN-U- 203 205 908
GB-A- 2 308 246
JP-A- 2009 106 010
US-A1- 2006 284 595
US-A1- 2012 119 694

DESCRIPTION

TECHNICAL FIELD

[0001] The present disclosure relates to the mobile terminal field, and more particularly, to a quick-charging control method and system.

BACKGROUND

[0002] With the time goes on, the Internet and mobile communication networks provide a large number of function applications. A user cannot only use the mobile terminal to perform a conventional application, such as answering the phone or making a call, but can also use the mobile terminal to browse webpages, transmit pictures and play games, etc.

[0003] With the increasing use of the mobile terminal, the mobile terminal requires frequent charging. In addition, according to charging requirements of users, some terminals can accept high-current charging without monitoring the charging current (for example, the charging current is 2A). Moreover, many charging adapters are developed, via which the high-current charging can be performed constantly. Although the charging time is reduced to some extent, the high charging current can cause some safety risks, for example, a damage to the cell and the charging circuit in the mobile terminal, or even a fire, if the charging adapter is not disconnected in time when the cell is fully charged. Thus, there is a need to control the whole charging process of the cell.

[0004] WO 2009/119271 A1 provides an assembled cell system. The system includes an assembled cell (11) including a plurality of cells (11-1...11-n) connected in series, a voltage detecting unit (12) which detects a voltage of the cell, a setting unit (32) which sets a charging current setting value so as to lower the charging current setting value of the assembled cell, when at least one of the detected cell voltages reaches a predetermined charge termination upper limit voltage, and a switch unit (15) which stops the charge, when the lowest cell voltage is lower than a predetermined charge termination lower limit voltage at a time when at least one of the cell voltages reaches the charge termination upper limit voltage.

SUMMARY

[0005] Embodiments of the present disclosure are to provide a quick-charging control method and a quick-charging control system, so as to avoid problems in the related art that the cell and the charging circuit is easily damaged, if there is no charging control when the charging adapter charges the cell of the mobile terminal using a constant, single and high charging current.

[0006] In at least one embodiment, a quick-charging control method is provided to be applied to a charging system including a charging adapter and a mobile terminal. The quick-charging control method includes:

with a first controller, obtaining a voltage value of a cell via a cell connector, and sending the voltage value of the cell to a second controller, in which the mobile terminal includes the first controller, the cell connector and the cell, the charging adapter includes the second controller;

with the second controller, searching a threshold segment table to find a current regulation instruction matched with a threshold segment containing the voltage value of the cell, and sending the current regulation instruction to a regulation circuit, in which the charging adapter includes the regulation circuit, and the threshold segment table records one or more threshold segments and current regulation instructions having a mapping relation with the threshold segments;

with the regulation circuit, performing a current regulation according to the current regulation instruction, and outputting a power signal after the current regulation, such that the charging adapter outputs the power signal after the current regulation;

with the second controller, sending a second switch-off instruction to the first controller and a second switch circuit respectively if second abnormal charging information is detected, in which the charging adapter includes the second switch circuit; and

with the second switch circuit, controlling the charging adapter to stop sending the power signal after the current regulation if the second switch circuit receives the second switch-off instruction.

[0007] In at least one embodiment, a quick-charging control system is provide to include a charging adapter including a second controller, a regulation circuit and a second switch circuit and a mobile terminal including a cell connector, a first controller and a cell;

the first controller is configured to obtain a voltage value of the cell via the cell connector, and to send the voltage value of the cell to the second controller;

the second controller is configured to search a threshold segment table to find a current regulation instruction matched with a threshold segment containing the voltage value of the cell, to send the current regulation instruction to the regulation circuit, and to send a second switch-off instruction to the first controller and the second switch circuit respectively if second abnormal charging information is detected;

the regulation circuit is configured to perform a current regulation according to the current regulation instruction, to output a power signal after the current regulation, such that the charging adapter outputs the power signal after the current regulation; and

the second switch circuit is configured to control the charging adapter to stop sending the power signal after the current regulation if the second switch-off instruction is received.

[0008] Some embodiments of the present disclosure at least have the following benefits. The second controller in the charging adapter obtains the voltage value of the cell in mobile terminal in real time, and determines whether there is a need to regulate the current value of the power signal outputted from the charging adapter (the power signal outputted from the regulation circuit after the current regulation) according to the threshold segment table and the voltage value of the cell. Moreover, during the charging process, if the second controller detects the second abnormal charging information, the second switch circuit is switched off timely, such that the charging adapter stops charging the cell of the mobile terminal. Thus, the charging current flowing into the cell can be adjusted in time so as to avoid over-charging the cell, and the charging adapter can be prevented from charging the cell of the mobile terminal if an abnormal charging occurs, such that the charging circuit in the mobile terminal and the charging circuit in the charging adapter can be protected effectively.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] In order to make the technical solutions of embodiments of the present disclosure more clearly, the accompanying drawings used in the description of embodiments of the present disclosure are briefly described hereunder. Obviously, the described drawings are merely some embodiments of present disclosure. For persons skilled in the art, other drawings can be obtained based on these drawings without any creative work.

Fig. 1 is a first flow chart of a quick-charging control method according to an embodiment of the present disclosure.

Fig. 2 is a flow chart of step S3 in a quick-charging control method according to an embodiment of the present disclosure.

Fig. 3 is a second flow chart of a quick-charging control method according to an embodiment of the present disclosure.

Fig. 4 is a third flow chart of a quick-charging control method according to an embodiment of the present disclosure.

Fig. 5 is a first block diagram of a quick-charging control system according to embodiment of the present disclosure.

Fig. 6 is a second block diagram of a quick-charging control system according to an embodiment of the present disclosure.

Fig. 7 is a third block diagram of a quick-charging control system according to an embodiment of the present disclosure.

Fig. 8 is a fourth block diagram of a quick-charging control system according to an embodiment of the present disclosure.

DETAILED DESCRIPTION

[0010] To make the objectives, the technical solutions, and the advantages of embodiments of the present disclosure clearer, the technical solutions in embodiments of the present disclosure are hereinafter described clearly and completely with reference to the accompanying drawings in embodiments of the present disclosure. It should be understood that, specific embodiments described herein are merely used to explain the present disclosure, but not used to limit the present disclosure. In order to illustrate the technical solutions of the present disclosure, specific embodiments are described in the following.

[0011] In embodiments of the present disclosure, "first" in "first charging interface", "first power wire", "first switch circuit", "first ground wire" and "first controller" is used for reference, and "second" in "second charging interface", "second switch circuit", "second power wire", "second ground wire" and "second controller" is also used for reference.

[0012] In at least one embodiment, the charging adapter in the present disclosure includes a power adapter, a charger, a terminal such as an IPAD and a smart phone which can output a power signal for charge a cell (a cell of a mobile terminal), or the like.

[0013] In an embodiment of the present disclosure, a second controller is added in the charging adapter, and a first controller is added in the mobile terminal. When the charging adapter charges the cell of the mobile terminal, the first controller communicates with the second controller, such that a quick-charging coordination is performed with respect to whether the charging adapter is needed (for example, the second controller asks the first controller whether there is a need to quick-charge the cell of the mobile terminal), and the charging current is regulated during the whole charging process, thus avoiding overcharging the cell effectively and ensuring a safe quick-charging.

[0014] Fig. 1 illustrates a first flow chart of a quick-charging control method according to an embodiment of the present disclosure. For illustration purposes, only the parts related to embodiments of the present disclosure are shown, which will be described in detail as follows.

[0015] The quick-charging control method provided by embodiments of the present disclosure is applied to a charging system including the charging adapter and the mobile terminal, and includes the followings.

[0016] In step S1, the first controller obtains a voltage value of the cell via a cell connector, and sends the voltage value of the cell obtained to the second controller, in which the mobile terminal includes the first controller, the cell connector and the cell, and the charging adapter includes the second controller.

[0017] In step S2, the second controller searches a threshold segment table to find a current

regulation instruction matched with a threshold segment containing the voltage value of the cell, and sends the current regulation instruction to the regulation circuit, in which the charging adapter includes the regulation circuit, and the threshold segment table records one or more threshold segments and current regulation instructions have a mapping relation with the threshold segments.

[0018] In step S3, the regulation circuit performs a current regulation according to the current regulation instruction, and outputs a power signal after the current regulation, such that the charging adapter outputs the power signal after the current regulation.

[0019] In step S4, the second controller sends a second switch-off instruction to the first controller and a second switch circuit respectively if second abnormal charging information is detected, in which the charging adapter includes the second switch circuit.

[0020] In step S5, the second switch circuit controls the charging adapter to stop outputting the power signal after the current regulation if the second switch circuit receives the second switch-off instruction.

[0021] In general cases, electronic components capable of supporting high current (charging current larger than or equal to 3A) and/or charging circuits (including the charging circuit in the charging adapter (for example, a rectifier and filter circuit and a voltage and current regulation circuit) and the charging circuit in the mobile terminal) capable of supporting high current can be used to realize high-current charging for the cell. However, if the cell of the mobile terminal is charged with a constant high-current, additional impedances such as an internal resistance, a parasitic resistance and a coupling resistance can be introduced into the charging loop (including the charging circuit in the mobile terminal and the charging circuit in the charging adapter), and thus a larger heat dissipation (i.e., more heat energy) can be generated.

[0022] Thus, in embodiments of the present disclosure, in order to reduce the charging time, to reduce the heat dissipation, and to perform an overcharge protection on the cell, the second controller regulates the current value of the power signal outputted from the regulation circuit according to the threshold segment table and the voltage value of the cell received in real time when the first charging interface of the mobile terminal is coupled to the second charging interface of the charging adapter, so as to regulate the current value of the power signal flowing into the cell. Thus, through steps S1, S2 and S3, the charging adapter can perform a high-current charging on the cell of the mobile terminal with adjustable charging current.

[0023] In at least one embodiment, the threshold segment table is stored in the second controller, and the threshold segment table can be preset according to control requirements on the charging time and the charging current of charging the cell. The threshold segment table records one or more threshold segments, and for each threshold segment (a numerical interval), there is a voltage upper limit and a voltage lower limit. Moreover, the threshold segment table records one or more current regulation instructions, each of which has one corresponding threshold segment. In at least one embodiment, the voltage threshold segment

consisting of all the threshold segments in the threshold segment table is continuous on the numerical. In this way, for each voltage value (the voltage value of the cell) detected, a corresponding current regulation instruction can be found.

[0024] Further, if the voltage value of the cell received subsequently jumps to another threshold segment from one threshold segment, the second controller will send a current regulation instruction matched with the other threshold segment to the regulation circuit.

[0025] When receiving the current regulation instruction, the regulation circuit outputs the power signal after the current regulation, in which the current value of the power signal outputted from the regulation circuit is equal to the current value specified by the current regulation instruction. Thus, the charging adapter sends the power signal outputted from the regulation circuit to the mobile terminal.

[0026] In at least one embodiment, if the second controller identifies second abnormal charging information according to data received, during a process in which the charging adapter charges the cell of the mobile terminal, the second controller sends a second switch-off instruction to the second switch circuit, such that via the second switch circuit, sending the power signal (the power signal is outputted by the regulation circuit) to the mobile terminal is stopped timely. In at least one embodiment, the second abnormal charging information includes abnormal information such as information indicating an abnormal temperature of the charging adapter, information indicating that the charging adapter has been pulled out, and information indicating that the current or voltage value of the power signal outputted by the charging adapter is too high. Further, once the second abnormal charging information is detected, the second switch circuit is switched off timely, so as to prevent the charging adapter from sending the power signal to the mobile terminal.

[0027] In addition, when the second abnormal charging information is detected, the second controller also sends the second switch-off instruction to the first controller in addition to the second switch circuit, so as to notify the mobile terminal of a need to switch off the charging. Further, the first controller of the mobile terminal can execute corresponding operations according to the second switch-off instruction received. For example, when receiving the second switch-off instruction, the first controller also controls the first switch circuit to switch off, so as to switch off the charging to the cell via the first switch circuit.

[0028] In at least one embodiment, the threshold segment table is edited by a terminal having an editing function, and downloaded to the second controller after being edited. In at least one embodiment, when the voltage value of the cell is lower, the charging adapter outputs the power signal with high current (for example, 4A) for charging the cell. As the voltage value of the cell increases, the voltage value received by the second controller continuously jumps to a threshold segment with higher values from a threshold segment with lower values, and the second controller sends the current regulation instruction matched with the threshold segment with higher values to the regulation circuit according to the threshold segment table. The regulation circuit performs a current regulation according to the current regulation instruction,

and outputs the power signal with lower current (for example, 3A) for charging the cell. Accordingly, based on the threshold segment table, the current value of the power signal outputted by the regulation circuit is gradually reduced as the voltage value of the cell increases, thus reducing the charging time and avoiding overcharging the cell.

[0029] In at least one embodiment of the present disclosure, when the detected voltage value of the cell is in a range from 0V to 4.3V, the charging adapter outputs the power signal with 4A for charging the cell; when the detected voltage value of the cell is in a range from 4.3V to 4.32V, the charging adapter outputs the power signal with 3A for charging the cell; when the detected voltage value of the cell is in a range from 4.32V to 4.35V, the charging adapter outputs the power signal with 2A for charging the cell; when the detected voltage value of the cell exceeds 4.35V, the charging adapter outputs the power signal with just hundreds of milliamps for charging the cell. Thus, by monitoring the voltage of the cell in real time, the charging adapter outputs high current (charging current with larger than 3A) to the cell for performing the high-current charging on the cell, when the voltage of the cell is lower. Further, when the voltage of the cell reaches a turn-off voltage threshold (i.e., when the cell is to be fully charged), the charging adapter outputs low current (charging current with hundreds of milliamps) to the cell for performing the low-current charging on the cell. In this way, not only overcharging the cell is avoided, the charging time is also reduced.

[0030] In another embodiment of the present disclosure, since additional impedances such as an internal resistance, a parasitic resistance and a coupling resistance will be introduced into the charging loop (including the charging circuit in the mobile terminal and the charging circuit in the charging adapter), and these impedances will consume part of current (this part of current will not flow into the cell of the mobile terminal), the current value specified by the current regulation instruction will be larger than the current value of the power signal input into the cell (considering the part of current consumed by the introduced impedances), so as to ensure that the current value flowing into the cell reaches the preset current value. In at least one embodiment, the current value specified by the current regulation instruction equals to a sum of the preset current value flowing into the cell and the current value of the part of current consumed by the introduced impedances. For example, if the desired current value of the power signal flowing into the cell is 3.2A, and the current value of the part of current consumed by the introduced impedances is 0.8A, then the current value specified by the current regulation instruction (i.e., the current value of the power signal outputted from the charging adapter) is set to 4A.

[0031] In an embodiment of the present disclosure, before step S1, the second controller sends a quick-charging request to the first controller. The first controller responds to the quick-charging request of the second controller, and feeds back a quick-charging permission instruction to the second controller. The second controller sends a notification request for obtaining the voltage value of the cell to the first controller, via which the first controller is instructed to feed back the voltage value of the cell to the second controller in real time.

[0032] Specifically, in the present embodiment, if a conventional charging adapter is used to

charge the cell of the mobile terminal, the conventional charging adapter does not have the second controller, and thus will not send the quick-charging request to the first controller for asking whether there is a quick-charging need. However, in embodiments of the present disclosure, the charging adapter is provided with the second controller, and the mobile terminal is provided with the first controller, such that the whole charging process can be monitored in real time through the communication between the first controller and the second controller.

[0033] Further, if the charging adapter has the capability of outputting high current, the first controller and the second controller will perform communication as to whether there is a quick-charging need. Specifically, the second controller sends the quick-charging request to the first controller, for asking the first controller whether to accept the high-current charging of the charging adapter on the cell of the mobile terminal. If it is allowed to perform the high-current charging on the cell of the mobile terminal, the first controller sends the quick-charging permission instruction to the second controller, and then the second controller determines that the high-current charging for the cell of the mobile can be performed after receiving the quick-charging permission instruction.

[0034] Further, the second controller sends the notification request to the first controller, and asks the first controller about the voltage value of the cell via the notification request. During the whole charging process, the cell connector coupled to the \ cell always obtains the voltage value of the cell in real time, and sends the obtained voltage value of the cell to the first controller in real time. Once the first controller receives the notification request, the first controller sends the voltage value of the cell to the second controller in response to the notification request.

[0035] In another embodiment of the present disclosure, the charging adapter further includes a current and voltage detection circuit.

[0036] Moreover, the second controller sends the second switch-off instruction to the first controller and the second switch circuit respectively if the second abnormal charging information is detected as follows.

[0037] The second controller obtains a current value and a voltage value of the power signal after the current regulation via the current and voltage detection circuit, and sends the second switch-off instruction to the first controller and the second switch circuit respectively if the current value of the power signal after the current regulation is greater than an overcurrent threshold and/or if the voltage value of the power signal after the current regulation is greater than an overvoltage threshold.

[0038] In the present embodiment, the current and voltage detection circuit is connected in series between the regulation circuit and the second charging interface of the charging adapter, and the current value and the voltage value of the power signal outputted from the regulation circuit (the power signal after the current regulation) can be detected in real time via the current and voltage detection circuit. Meanwhile, the second controller receives the

detected current value and voltage value in real time.

[0039] Then, the second controller determines whether the obtained current value is larger than the overcurrent threshold (set according to the charging requirements of the charging adapter and the mobile terminal) and whether the obtained voltage value is larger than the overvoltage threshold (set according to the charging requirements of the charging adapter and the mobile terminal), and sends the second switch-off instruction to the first controller and the second switch circuit respectively if the obtained current value (the current value of the power signal after the current regulation) is larger than the overcurrent threshold and/or if the obtained voltage value (the voltage value of the power signal after the current regulation) is larger than the overvoltage threshold.

[0040] Further, the second switch circuit is switched off, and the charging adapter is prevented from charging the cell of the mobile terminal. Meanwhile, the first controller can also decide whether there is a need to execute corresponding operations, such as controlling the first switch circuit to switch off for stopping charging the cell via the first switch circuit, according to the received second switch-off instruction.

[0041] Fig. 2 illustrates a specific flow chart of step S3 in the quick-charging control method provided by embodiments of the present disclosure. For illustration purposes, only the parts related to embodiments of the present disclosure are shown, which will be described in detail in the following.

[0042] In another embodiment of the present disclosure, in order to ensure that the power signal outputted from the regulation circuit has a high current (the high current has the current value specified by the current regulation instruction), there is a need to monitor in real time whether the power signal outputted from the charging adapter has the current value specified by the current regulation instruction. Thus, the regulation circuit includes a current detection circuit.

[0043] Moreover, the regulation circuit performs the current regulation according to the current regulation instruction and outputs the power signal after the current regulation as follows.

[0044] In step S31, the current detection circuit detects a current value of the power signal outputted from the regulation circuit, and sends the detected current value to the second controller.

[0045] In step S32, the second controller calculates a difference between the detected current value and the current value specified by the current regulation instruction, and send a calibration instruction to the regulation circuit if an absolute value of the calculated difference is larger than a difference threshold.

[0046] In step S33, the regulation circuit calibrates the power signal according to the current difference specified by the calibration instruction, outputs the power signal after the calibration,

in which the current value of the power signal after the calibration is equal to the current value specified by the current regulation instruction.

[0047] In the present embodiment, the regulation circuit has the current detection circuit, via which the current value of the power signal outputted by the regulation circuit (i.e., the current value of the power signal outputted by the charging adapter) can be detected in real time. In at least one embodiment, the current detection circuit has a current detection resistor, via which the current value of the power signal outputted by the regulation circuit is detected in real time and converted to the voltage value, which is sent to the second controller. Then, the second controller determines the current value of the power signal outputted by the regulation circuit according to the received voltage value and the resistance of the current detection resistor.

[0048] Further, the second controller calculates the difference between the detected current value and the current value specified by the current regulation instruction, calculates the absolute value of the difference, and determines whether the absolute value is larger than the difference threshold. If the absolute value is larger than the difference threshold, the second controller feeds back the calibration instruction to the regulation circuit, such that the regulation circuit regulates the current value of the power signal outputted timely according to the calibration instruction. In at least one embodiment, the difference threshold can be pre-adjusted according to the actual working environment of the regulation circuit.

[0049] Further, if the regulation circuit receives the calibration instruction, it indicates that the current value of the power signal outputted by the regulation circuit has a higher deviation from the current value specified by the current regulation instruction, and the regulation circuit needs to perform the current regulation again, specifically, performs the current regulation according to the current difference specified by the calibration instruction, for ensuring that the current value of the power signal outputted by the regulation circuit is equal to the current value specified by the current regulation instruction.

[0050] In a specific embodiment of the present disclosure, the regulation circuit further includes a voltage and current regulation circuit, which obtains the original power signal after performing the rectification and filter on the commercial power. In order to calibrate the power signal outputted by the regulation circuit according to the calibration instruction, the regulation circuit will determine a voltage regulation instruction according to the current difference specified by the calibration instruction during regulating the voltage of the original power signal, and sends the voltage regulation instruction to the voltage and current regulation circuit. The voltage and current regulation circuit performs the voltage regulation according to the voltage regulation instruction, and outputs the power signal after the voltage regulation. Since the power signal after the voltage regulation will flow through the current detection resistor, it is possible to re-detect by the current detection resistor whether the current value of the power signal after the voltage regulation is equal to the current value specified by the current regulation instruction. When the current value of the power signal flowing through the current detection resistor (the power signal after the voltage regulation) is equal to the current value specified by the current regulation instruction, the regulation circuit stops determining the

voltage regulation instruction according to the received calibration instruction, and the voltage and current regulation circuit stops performing the voltage regulation.

[0051] Thus, in order to ensure in real time that the current value of the power signal outputted by the regulation circuit is equal to the current value specified by the current regulation instruction, a real-time detection is performed by the current detection circuit, and if the current is too high or too low, the current value is fed back to the second controller. The second controller generates the calibration instruction according to the feedback current value and sends the calibration instruction to the regulation circuit. The regulation circuit determines the voltage regulation instruction according to the calibration instruction and sends the voltage regulation instruction to the voltage and current regulation circuit. Further, the voltage and current regulation circuit performs the voltage regulation according to the voltage regulation instruction, and outputs the power signal after the voltage regulation. Then, whether the current value of the power signal after the voltage regulation is equal to the current signal specified by the current regulation instruction is detected again by the current detection resistor.

[0052] Fig. 3 is a second flow chart of a quick-charging control method according to an embodiment of the present disclosure. For illustration purposes, only the parts related to embodiments of the present disclosure are shown, which will be described in detail in the following.

[0053] In another embodiment of the present disclosure, after the regulation circuit performs the current regulation and outputs the power signal after the current regulation, the quick-charging control method further includes following steps.

[0054] In step S6, the charging adaptor sends the power signal to a first charging interface of the mobile terminal via a second charging interface, such that the charging adapter charges the cell of the mobile terminal, in which the first power wires of the first charging interface is coupled to the second power wires of the second charging interface, the first ground wires of the first charging interface is coupled to the second ground wires of the second charging interface, and there are P first power wires, Q first ground wires, where P is greater than or equal to 2, and Q is greater than or equal to 2.

[0055] In the present embodiment, the existing MICRO USB interface (including the MICRO USB plug of the charging adapter and the MICRO USB socket of the mobile terminal) merely includes one power wire and one ground wire, such that the charging loop can be formed only by the power wire and the ground wire, and thus the charging current is generally hundreds of milliamps and generally less than 3A.

[0056] For this, the present embodiment provides the first charging interface capable of supporting the high-current charging (the charging current above 3A). Since the first charging interface has at least two first power wires and at least two first ground wires, the mobile terminal can support the high-current charging when being charged via the first charging

interface.

[0057] In addition, if the charging adapter plugged with the first charging interface is the conventional charging adapter (for example, the charging adapter which uses the existing MICRO USB interface to charge), only the conventional charging can be performed (the only one power wire of the MICRO USB interface is plugged with the one first power wire of the first charging interface, the only one ground wire of the MICRO USB interface is plugged with the one first ground wire of the first charging interface, and the cell is charged using the only one power wire and the only one ground wire).

[0058] In at least one embodiment, there are P second power wires, and Q second ground wires.

[0059] The P first power wires of the first charging interface are coupled to the P second power wires of the second charging interface correspondingly, and the Q first ground wires of the first charging interface are coupled to the Q second ground wires of the second charging interface correspondingly.

[0060] In the present embodiment, when the first charging interface is coupled to the second charging interface, at least two charging loops can be formed (the number of the charging loops is the minimum value of P and Q). Thus, by coupling the first charging interface with the second charging interface, the high-current charging (the charging current above 3A) can be supported. Further, the charging adapter can output the power signal with high current (e.g. the power signal of 4A) when the voltage value of the cell is lower (for example, the voltage value of the cell is lower than 4.3V), so as to charge the cell of the mobile terminal with the high-current.

[0061] In at least one embodiment, the power wire and the ground wire of the existing MICRO USB interface are made of metal copper foil whose electric conductivity is less than 20%, but the first power wires and the first ground wires included in the first charging interface provided by the present embodiment and the second power wires and the second ground wires included in the second charging interface provided by the present embodiment are made of phosphor bronze C7025 whose electric conductivity reaches 50%. Thus, the charging current can be further enhanced base on the case that at least two charging loops (including at least two first power wires, at least first ground wires, at least two second power wires and at least two ground wires) are used to charge. In at least one embodiment, the first power wires and the first ground wires included in the first charging interface provided by the present embodiment and the second power wires and the second ground wires included in the second charging interface provided by the present embodiment are made of chromium bronze C18400 whose electric conductivity reaches 70%, which can further enhance the charging current.

[0062] In another embodiment of the present disclosure, the mobile terminal further includes a first switch circuit, which is controlled to switch on or off by the first controller. Thus, in the present embodiment, the first switch circuit is added in the mobile terminal based on the

existing charging circuit in the mobile terminal. When the second charging interface is coupled to the first charging interface, the cell can be charged via the existing charging circuit in the mobile terminal, and the first controller can also control the first switch circuit to switch on, such that the charging adapter can charge the cell via the existing circuit as well as via the switched-on first switch circuit.

[0063] As at least one embodiment of the present disclosure, when the first controller receives the quick-charging request sent by the second controller and the first controller detects that there is a first switch circuit, it indicates that the cell can be charged via the existing charging circuit in the mobile terminal as well as via the first switch circuit, thus realizing charging the cell with high current.

[0064] Further, the first controller feeds back the quick-charging permission instruction to the second controller, i.e., notifies the second controller that it is possible to charge the cell with high current. Meanwhile, the first controller sends the switch-on instruction to the first switch circuit.

[0065] When the first switch circuit receives the switch-on instruction, the first switch circuit is switched on, and the charging adapter can also charge the cell via the switched-on first switch circuit when charging the cell via the existing charging circuit in the mobile terminal.

[0066] Fig. 4 illustrates a third flow chart of a quick-charging control method according to an embodiment of the present disclosure. For illustration purposes, only the parts related to embodiments of the present disclosure are shown, which will be described in detail in the following.

[0067] In another embodiment of the present disclosure, the quick-charging control method can include following steps.

[0068] In step S7, the first controller sends a switch-off instruction to the second controller and the first switch circuit respectively if first abnormal charging information is detected, in which the first abnormal charging information includes an anode contact signal generated when an anode of the cell is not in good contact, a cathode contact signal generated when a cathode of the cell is not in good contact, and a temperature signal generated when a temperature of the cell is higher than a temperature threshold.

[0069] In step S8, if the first switch circuit receives the switch-off instruction, the charging loop for the charging adapter to charge the cell via the first switch circuit is switched off.

[0070] In the present embodiment, the first controller receives the charging information in real time and analyzes whether the received charging information is the first abnormal charging information. In at least one embodiment, the charging information is received via the cell connector. For example, the cell connector generates the anode contact signal when detecting whether the anode of the cell is in contact, generates the cathode contact signal when

detecting whether the cathode of the cell is in contact, and generates the temperature signal when detecting the temperature of the cell, and sends the charging information such as the anode contact signal, the cathode contact signal and the temperature signal to the first controller.

[0071] Further, if the first controller determines that the received charging information is the first abnormal charging information, the first controller sends the switch-off instruction to the first switch circuit. For example, the first controller determines that the first abnormal charging information is detected and sends the switch-off instruction to the first switch circuit, if determining that the anode charging contact is not in contact with the anode of the cell well according to the anode contact signal received, or if determining that the cathode charging contact is not in contact with the cathode of the cell well according to the cathode contact signal received, or if determining that the temperature of the cell exceeds the temperature threshold according to the temperature signal. Further, the first switch circuit is switched off, so as to stop charging the mobile terminal via the first switch circuit.

[0072] If the first controller determines that the received charging information is the first abnormal charging information, the first controller also sends the switch-off instruction to the second controller while sending the switch-off instruction to the first switch circuit. The second controller can execute corresponding operations according to the received switch-off instruction, for example, can control the second switch circuit to switch off for preventing the charging adapter from sending the power signal to the mobile terminal.

[0073] As at least one embodiment of the present disclosure, the first controller determines whether the obtained voltage value of the cell is greater than the turn-off voltage threshold, and sends the switch-off instruction to the first switch circuit if the obtained voltage value of the cell is greater than the turn-off voltage threshold. When the first switch circuit receives the switch-off instruction, the charging loop for the charging adapter to charge the cell via the first switch circuit is switched off.

[0074] Specifically, during the whole charging process for the cell, the cell connector always obtains the voltage value of the cell in real time, and sends the voltage value of the cell to the first controller. When the cell is charged via the first switch circuit, the first controller determines whether the obtained voltage value of the cell is greater than the turn-off voltage threshold in real time. If the obtained voltage value of the cell is greater than the turn-off voltage threshold, the first controller sends the switch-off instruction to the first switch circuit. When the first switch circuit receives the switch-off instruction, the first switch circuit is switched off. Further, the charging adapter can charge the cell of the mobile merely via the existing charging circuit in the mobile terminal, but can not charge the cell via the switched-off first switch circuit.

[0075] In at least one embodiment, when the obtained voltage value of the cell is greater than the turn-off voltage threshold, the second controller can also send the current regulation instruction to the regulation circuit, and the power signal with lower current (for example, hundreds of milliamps) outputted by the regulation circuit is specified by the current regulation

instruction.

[0076] In an embodiment of the present disclosure, the first controller can be a controller existing in the mobile terminal.

[0077] In another embodiment of the present disclosure, the mobile terminal not only has a third controller (already existed in the mobile terminal) used for handling applications, but also has the first controller which controls the first switch circuit and controls charging the cell of the mobile terminal.

[0078] Further, the first controller can forward the voltage value of the cell received in real time to the third controller, and the third controller determines whether the obtained voltage value of the cell is greater than the turn-off voltage threshold. If the obtained voltage value of the cell is greater than the turn-off voltage threshold, the third controller sends a first switch-off instruction to the first controller, and then the first controller sends the switch-off instruction to the first switch circuit. In at least one embodiment, if the obtained voltage value of the cell is greater than the turn-off voltage threshold, the third controller directly sends the switch-off instruction to the first switch circuit. When the first switch circuit receives the switch-off instruction, the charging loop for the charging adapter to charge the cell via the first switch circuit is switched off.

[0079] In at least one embodiment of the present disclosure, the first controller receives the charging information (including the anode contact signal, the cathode contact signal and the temperature signal) sent by the cell connector in real time, and forwards the charging information to the third controller.

[0080] Further, the third controller determines whether the charging information received is the first abnormal charging information, for example, determines whether the anode charging contact of the first switch circuit and the charging circuit in the mobile terminal is in good contact with the anode of the cell well according to the anode contact signal, determines whether the cathode charging contact of the first switch circuit and the charging circuit in the mobile terminal is in good contact with the cathode of the cell according to the cathode contact signal, and determines whether the temperature of the cell exceeds the temperature threshold according to the temperature signal.

[0081] Further, if the third controller determines that the charging information received is the first abnormal charging information, the third controller sends the switch-off instruction to the first switch circuit and the second controller, such that the first switch circuit is switched off, and the charging adapter is prevented from charging the cell via the first switch circuit. For example, if it is determined that the anode charging contact is not in good contact with the anode of the cell according to the anode contact signal, or if it is determined that the cathode charging contact is not in good contact with the cathode of the cell according to the cathode contact signal, or if it is determined that the temperature of the cell exceeds the temperature threshold according to the temperature signal, the charging information received is determined

as the first abnormal charging information.

[0082] In at least one embodiment of the present disclosure, when the MICRO USB interface of the existing charging adapter is coupled to the first charging interface of the mobile terminal, the charging is performed via the existing charging circuit in the mobile terminal. Based on the existing charging circuit in the mobile terminal, the mobile terminal of the present embodiment is also added with a first switch circuit. Further, when the second charging interface is coupled to the first charging interface, not only the charging is performed via the existing charging circuit in the mobile terminal, but also the first controller controls the first switch circuit to switch on, such that the charging adapter can charge the cell via the switched-on first switch circuit while charging the cell via the existing charging circuit. Thus, when the second charging interface is coupled to the first charging interface, the first controller controls to charge the cell via the existing charging circuit in the mobile terminal and/or via the first switch circuit in the mobile terminal according to charging requirements.

[0083] Fig. 5 illustrates a first structure of a quick-charging control system according to an embodiment of the present disclosure. For illustration purposes, only the parts related to embodiments of the present disclosure is provided, which will be described in detail in the following.

[0084] In at least one embodiment, the quick-charging control system provided by embodiments of the present disclosure can use the quick-charging control method provided by embodiments of the present disclosure, and the quick-charging control method provided by embodiments of the present disclosure can be applied to the quick-control system provided by embodiments of the present disclosure.

[0085] Embodiments of the present disclosure provide a quick-charging control system, and the quick-charging control system includes a charging adapter 2 including a second controller 21, a regulation circuit 22 and a second switch circuit 23 and a mobile terminal 1 including a cell connector, a first controller 11 and a cell.

[0086] The first controller 11 is configured to obtain a voltage value of the cell via the cell connector, and sends the voltage value of the cell obtained to the second controller 21.

[0087] The second controller 21 is configured to search a threshold segment table to find a current regulation instruction matched with a threshold segment containing the voltage value of the cell, to send the current regulation instruction to the regulation circuit 22, and to send a second switch-off instruction to the first controller 11 and the second switch circuit 23 respectively if second abnormal charging information is detected.

[0088] The regulation circuit 22 is configured to perform a current regulation according to the current regulation instruction, and to output a power signal after the current regulation, such that the charging adapter 2 outputs the power signal after the current regulation.

[0089] The second switch circuit 23 is configured to control the charging adapter 2 to stop outputting the power signal after the current regulation if the second switch-off instruction is received.

[0090] Fig. 6 illustrates a second structure of a quick-charging control system according to an embodiment of the present disclosure. For illustration purposes, only parts related to embodiments of the present disclosure are shown, which will be described in detail in the following.

[0091] In another embodiment of the present disclosure, the regulation circuit 22 includes a current detection circuit 221.

[0092] The current detection circuit 221 is configured to detect a current value of the power signal outputted by the regulation circuit 22 and to send the current value detected to the second controller 21.

[0093] The second controller 21 is further configured to calculate a difference between the current value detected and the current value specified by the current regulation instruction, and to send a calibration instruction to the regulation circuit 22 if an absolute value of the difference calculated is greater than a difference threshold.

[0094] The regulation circuit 22 is further configured to calibrate the power signal according to the current difference specified by the calibration instruction, and to output the power signal after the calibration, in which the current value of the power signal after the calibration is equal to the current value specified by the current regulation instruction.

[0095] Fig. 7 illustrates a third structure of a quick-charging control system according to an embodiment of the present disclosure. For illustration purposes, only parts related to embodiments of the present disclosure are shown, which will be described in detail in the following.

[0096] In another embodiment of the present disclosure, the charging adapter further includes a current and voltage detection circuit 24.

[0097] The second controller 21 is further configured to obtain a current value and a voltage value of the power signal after the current regulation via the current and voltage detection circuit 24, and to send a second switch-off instruction to the second switch circuit 23 if the current value of the power signal after the current regulation is higher than an overcurrent threshold and/or the voltage value of the power signal after the current regulation is higher than an overvoltage threshold.

[0098] In another embodiment of the present disclosure, the charging adapter 2 is further configured to send the power signal to the first charging interface of the mobile terminal 1 via the second charging interface, such that the charging adapter 2 charges the cell of the mobile

terminal 1. There are P first power wires and Q first ground wires in the first charging interface, there are P second power wires and Q second ground wires in the second charging interface, the P first power wires are coupled to the P second power wires correspondingly, and the Q first ground wires are coupled to the Q second ground wires corresponding, where P is greater than or equal to 2, and Q is greater than or equal to 2.

[0099] Fig. 8 illustrates a fourth structure of a quick-charging control system according to an embodiment of the present disclosure. For illustration purposes, only parts related to embodiments of the present disclosure are shown, which will be described in detail in the following.

[0100] In another embodiment of the present disclosure, the mobile terminal 1 further includes a first switch circuit 12.

[0101] The first controller 11 is further configured to send a switch-off instruction to the second controller 21 and the first switch circuit 12 when first abnormal charging information is detected, in which the first abnormal charging information includes an anode contact signal generated when an anode of the cell is not in good contact, a cathode contact signal generated when a cathode of the cell is not in good contact, and a temperature signal generated when a temperature of the cell is greater than a temperature threshold.

[0102] The first switch circuit 12 is configured to switch off the charging loop for the charging adapter to charge the cell via the first switch circuit 12 if the switch-off instruction is received.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- [WO2009119271A1 \[0004\]](#)

P A T E N T K R A V

1. Fremgangsmåde til hurtigladestyring, anvendt på et ladesystem, som omfatter en ladeadapter (2) og en mobil terminal (1), og hvor fremgangsmåden omfatter:

5 med en første styreindretning (11), at hente (S1) en spændingsværdi af en celle via en celleforbinder, og at sende (S1) spændingsværdien af cellen til en anden styreindretning (21), hvor den mobile terminal (1) omfatter den første styreindretning (11), celleforbinderen og cellen, hvor ladeadapteren (2) omfatter den anden styreindretning (21);

10 med den anden styreindretning (21), at søge (S2) i en grænseværdisegmenttabel, for at finde en strømreguleringsinstruktion, som er matchet med et grænseværdisegment, der indeholder spændingsværdien af cellen, og at sende (S2) strømreguleringsinstruktionen til et reguleringskredsløb (22), hvor ladeadapteren (2) omfatter reguleringskredsløbet (22), og hvor grænseværdisegmenttabellen registrerer én eller flere grænseværdisegmenter og strømreguleringsinstruktioner, som har en mappingrelation med grænseværdisegmenterne;

15 med reguleringskredsløbet (22), at udføre (S3) en strømregulering ifølge strømreguleringsinstruktionen, og at afgive (S3) et effektsignal, således at ladeadapteren afgiver effektsignalet, der er afgivet af reguleringskredsløbet (22);

20 at sende (S4) en anden afbrydningsinstruktion henholdsvis til den første styreindretning (11) og et andet kontaktkredsløb (23) med den anden styreindretning (21), hvis anden unormal ladeinformation er detekteret, hvor ladeadapteren (2) omfatter det andet kontaktkredsløb (23); og

at styre (S5) ladeadapteren (2) med det andet kontaktkredsløb (23), til at stoppe med at sende effektsignalet, der er afgivet af reguleringskredsløbet (22), hvis det andet kontaktkredsløb (23) modtager den anden afbrydningsinstruktion.

25 2. Fremgangsmåde til hurtigladestyring ifølge krav 1, hvor reguleringskredsløbet (22) omfatter et strømdetekteringskredsløb (221);

og hvor, med reguleringskredsløbet (22), at udføre (S3) strømreguleringen ifølge strømreguleringsinstruktionen, og at afgive effektsignalet, der er afgivet af reguleringskredsløbet (22), omfatter følgende:

30 med strømdetekteringskredsløbet (221), at detektere (S31) en strømværdi af effektsignalet, der er afgivet fra reguleringskredsløbet (22), og at sende (S31) den detekterede strømværdi til den anden styreindretning (21);

med den anden styreindretning (21), at beregne (S32) en forskel mellem den detekterede strømværdi og en strømværdi, der er specificeret af strømreguleringsinstruktionen, og at sende (S32) en kalibreringsinstruktion til reguleringskredsløbet (22), hvis en absolut værdi af den beregnede forskel er større end en forskelsgrænseværdi;

med reguleringskredsløbet (22), at kalibrere (S33) effektsignalet ifølge en strømfor-
skel, der er specificeret af kalibreringsinstruktionen, og at afgive (S33) effektsignalet efter kalibrering, hvor en strømværdi af effektsignalet efter kalibrering er lig med strømværdien,

der er specificeret af strømreguleringsinstruktionen.

3. Fremgangsmåde til hurtigladestyring ifølge krav 2, hvor reguleringskredsløbet (22) omfatter et spændings- og strømreguleringskredsløb; hvor fremgangsmåden til hurtigladestyring yderligere omfatter:

5 at sende en spændingsreguleringsinstruktion til spændings- og strømreguleringskredsløbet ifølge kalibreringsinstruktionen med reguleringskredsløbet (22);

med spændings- og strømreguleringskredsløbet, at udføre en spændingsregulering ifølge spændingsreguleringsinstruktionen, og at afgive effektsignalet efter spændingsreguleringen;

10 at gendetektere med strømdekteteringskredsløbet (221), hvorvidt en strømværdi af effektsignalet efter spændingsregulering er lig med strømværdien, der er specificeret af strømreguleringsinstruktionen;

at stoppe med at bestemme spændingsreguleringsinstruktionen ifølge kalibreringsinstruktionen med reguleringskredsløbet (22), og stoppe med at udføre spændingsreguleringen med spændings- og strømreguleringskredsløbet, hvis strømværdien af effektsignalet efter spændingsreguleringen er lig med strømværdien, der er specificeret af strømreguleringsinstruktionen,

hvor strømdekteteringskredsløbet (211) yderligere har en strømdekteteringsmodstand; hvor fremgangsmåden til hurtigladestyring yderligere omfatter;

20 med strømdekteteringsmodstanden, at detektere strømværdien af effektsignalet, der er afgivet af reguleringskredsløbet (22), i real tid, at konvertere strømværdien af effektsignalet, der er afgivet af reguleringskredsløbet (22), til spændingsværdien, og at sende spændingsværdien til den anden styreindretning (21);

at bestemme med den anden styreindretning (21) strømværdien af effektsignalet, der er afgivet af reguleringskredsløbet (22), ifølge spændingsværdien, der er modtaget fra strømdekteteringsmodstanden, og modstanden af strømdekteteringsmodstanden.

4. Fremgangsmåde til hurtigladestyring ifølge et hvilket som helst af kravene 1-3, hvor ladeadapteren (2) yderligere omfatter et strøm- og spændingsdekteteringskredsløb (24); og hvor at sende (S4) den anden afbrydningsinstruktion til henholdsvis den første styreindretning (11) og det andet kontaktkredsløb (23) med den anden styreindretning (21), hvis anden unormal ladeinformation er detekteret, omfatter følgende:

med den anden styreindretning (21), at hente en spændingsværdi og en strømværdi af effektsignalet, der er afgivet af reguleringskredsløbet (22) via strøm- og spændingsdekteteringskredsløbet (24), og at sende den anden afbrydelsesinstruktion henholdsvis til den første styreindretning (11) og det andet kontaktkredsløb (23), hvis strømværdien af effektsignalet, der er afgivet af reguleringskredsløbet (22), er større end en overstrømsgrænseværdi, og/eller spændingsværdien af effektsignalet, der er afgivet af reguleringskredsløbet (22), er større end en overstrømsgrænseværdi.

5. Fremgangsmåde til hurtigladestyring ifølge et hvilket som helst af kravene 1-4, hvor den anden unormale ladeinformation yderligere omfatter: information som indikerer en unormal temperatur af ladeadapteren (2), eller information som indikerer at ladeadapteren (2) er blevet hevet ud;

5 hvor fremgangsmåden yderligere omfatter:

at sende den anden afbrydelsesinstruktion til henholdsvis den første styreindretning (11) og det andet kontaktkredsløb (23) med den anden styreindretning (21), hvis anden unormal ladeinformation er detekteret;

10 at sende den anden afbrydelsesinstruktion til henholdsvis den første styreindretning (11) og det andet kontaktkredsløb (23) med den anden styreindretning (21), hvis informationen, som indikerer en unormal temperatur af ladeadapteren (2), er detekteret, eller hvis informationen, som indikerer at ladeadapteren (2) er blevet hevet ud, er detekteret.

6. Fremgangsmåde til hurtigladestyring ifølge et hvilket som helst af kravene 1-5, hvor fremgangsmåden til hurtigladestyring, efter at udføre (S3) strømreguleringen ifølge 15 strømreguleringsinstruktionen med den anden styreindretning (21), og at afgive (S3) effektsignalet, der er afgivet af reguleringskredsløbet (22), yderligere omfatter:

20 at sende (S6) effektsignalet til en første ladegrænseflade af den mobile terminal (1) via en anden ladegrænseflade med ladeadapteren (2), således at ladeadapteren (2) lader cellen af den mobile terminal (1), hvor der er P første effektleddninger og Q første jordledninger i den første ladegrænseflade, der er P anden effektleddninger og Q anden jordledninger i den anden ladegrænseflade, hvor de P første effektleddninger er tilsvarende koblet til de P anden effektleddninger, de Q første jordledninger er tilsvarende koblet til de Q anden jordledninger, hvor P er større end eller lig med 2, og Q er større end eller lig med 2.

7. Fremgangsmåde til hurtigladestyring ifølge et hvilket som helst af kravene 1-6, 25 hvor den mobile terminal (1) yderligere omfatter et første kontaktkredsløb (12), og hvor det første kontaktkredsløb (12) er styret af den første styreindretning (11) til at tænde eller slukke;

hvor fremgangsmåden til hurtigladestyring yderligere omfatter:

30 at sende (S7) en afbrydelsesinstruktion til henholdsvis den anden styreindretning (21) og det første kontaktkredsløb (23) med den første styreindretning (11), hvis første unormal ladeinformation er detekteret, hvor den første unormale ladeinformation omfatter et anodekontaktsignal, der er genereret når en anode af cellen ikke er i god kontakt, et katodekontaktsignal, der er genereret når en katode af cellen ikke er i god kontakt, og et temperatursignal, der er genereret når en temperatur af cellen er større end en temperaturgrænseværdi;

35 at styre (S8) det første kontaktkredsløb (12), til at afbryde et ladekredsløb gennem hvilket ladeadapteren (2) lader cellen via det første kontaktkredsløb (12), hvis det første kontaktkredsløb (12) modtager afbrydelsesinstruktionen.

8. Fremgangsmåde til hurtigladestyring ifølge krav 7, som yderligere omfatter:

at styre det første kontaktkredsløb (12) med den første styreindretning (11), til at afbryde ladekredsløbet, hvis den første styreindretning (11) modtager den anden afbrydelsesinstruktion; og/eller

5 at styre det andet kontaktkredsløb (23) med den anden styreindretning (21), til at styre ladeadapteren (2) til at stoppe med at sende effektsignalet, der er afgivet af reguleringskredsløbet (22), hvis den anden styreindretning (21) modtager afbrydelsesinstruktionen.

9. Fremgangsmåde til hurtigladestyring ifølge et hvilket som helst af kravene 1-8, som yderligere omfatter:

10 at sende en hurtigladeanmodning til den første styreindretning (11) med den anden styreindretning (21), hvor hurtigladeanmodningen spørger den første styreindretning (11), hvorvidt en højstrømsladning af ladeadapteren (2) på cellen af den mobile terminal (1) kan godkendes.

15 at sende et hurtigladetilladelsesinstruktion til den anden styre indretning (21) med den første styreindretning (11), hvis den første styreindretning (11) accepterer højstrømsladningen af ladeadapteren (2) på cellen af den mobile terminal (1); og

at fastlægge med den anden styreindretning om højstrømsladningen af cellen af den mobile terminal (1) er udført efter modtagelse af hurtigladetilladelsesinstruktionen.

10. Hurtigladestyringssystem, som omfatter:

20 en ladeadapter (2), som omfatter en anden styreindretning (21), et reguleringskredsløb (22) og et andet kontaktkredsløb (23); og

en mobil terminal (1), der omfatter en celleforbinder, en første styreindretning (11) og en celle; hvor

25 den første styreindretning (11) er konfigureret til at hente en spændingsværdi af cellen via celleforbinderen, og at sende spændingsværdien af cellen til en anden styreindretning (21);

30 hvor den anden styreindretning (21) er konfigureret til at søge i en grænseværdi-segmenttabel, for at finde en nuværende strømreguleringsinstruktion matchet med et grænseværdisegment, der indeholder spændingsværdien af cellen, at sende strømreguleringsinstruktionen til et reguleringskredsløb (22), og at sende en anden afbrydelsesinstruktion til henholdsvis den første styreindretning (11) og det andet kontaktkredsløb (23), hvis anden unormal ladeinformation er detekteret;

35 hvor reguleringskredsløbet (22) er konfigureret til at udføre en strømregulering ifølge strømreguleringsinstruktionen, og at afgive et effektsignal, således at ladeadapteren (2) afgiver effektsignalet, der er afgivet af reguleringskredsløbet (22);

hvor det andet kontaktkredsløb (23) er konfigureret til at styre ladeadapteren (2) til at stoppe med at sende effektsignalet, der afgivet af reguleringskredsløbet (22), hvis det andet kontaktkredsløb (23) modtager den anden afbrydningsinstruktion.

11. Hurtiglادestylingssystem ifølge krav 10, hvor reguleringskredsløb (22) omfatter et strømdektekeringskredsløb (221);

hvor strømdektekeringskredsløb (221) er konfigureret til at dektekere en strømværdi af effektsignalet, der er afgivet fra reguleringskredsløbet (22); og til at sende den dektekede strømværdi til den anden styreindretning (21);

hvor den anden styreindretning (21) er yderligere konfigureret til at beregne en forskel mellem den dektekede strømværdi og en strømværdi, der er specificeret af strømguleringsinstruktionen, og til at sende en kalibreringsinstruktion til reguleringskredsløbet (22), hvis en absolut værdi af den beregnede forskel er større end en forskelsgrænseværdi;

hvor reguleringskredsløbet (22) er yderligere konfigureret til at kalibrere effektsignalet ifølge en strømforskel, der er specificeret af kalibreringsinstruktionen, og til at afgive effektsignalet efter kalibrering, hvor en strømværdi af effektsignalet efter kalibrering er lig med strømværdien, der er specificeret af strømguleringsinstruktionen.

12. Hurtiglادestylingssystem ifølge krav 11, hvor reguleringskredsløbet (22) omfatter et spændings- og strømguleringskredsløb;

hvor reguleringskredsløbet (22) er yderligere konfigureret til at sende en spændingsreguleringsinstruktion til spændings- og strømguleringskredsløbet ifølge kalibreringsinstruktionen;

hvor spændings- og strømguleringskredsløbet er konfigureret til at udføre en spændingsregulering ifølge spændingsreguleringsinstruktionen, og at afgive effektsignalet efter spændingsreguleringen;

hvor strømdektekeringskredsløbet (221) er yderligere konfigureret til at dektekere igen, hvorvidt en strømværdi af effektsignalet efter spændingsregulering er lig med strømværdien, der er specificeret af strømguleringsinstruktionen;

hvor reguleringskredsløbet (22) er yderligere konfigureret til at stoppe med at bestemme spændingsreguleringsinstruktionen ifølge kalibreringsinstruktionen, og hvor spændings- og strømguleringskredsløbet er yderligere konfigureret til at stoppe med at udføre spændingsreguleringen, hvis strømværdien af effektsignalet efter spændingsreguleringen er lig med strømværdien, der er specificeret af strømguleringsinstruktionen,

yderligere, hvor strømdektekeringskredsløbet (211) har en strømdektekeringsmodstand;

hvor strømdektekeringsmodstanden er konfigureret til at dektekere strømværdien af effektsignalet, der er afgivet af reguleringskredsløbet (22), i real tid, for at konvertere strømværdien af effektsignalet, der er afgivet af reguleringskredsløbet (22), til spændingsværdien, og at sende spændingsværdien til den anden styreindretning (21);

hvor den anden styreindretning (21) er yderligere konfigureret til at bestemme strømværdien af effektsignalet, der er afgivet af reguleringskredsløbet (22), ifølge spæn-

dingsværdien modtaget fra strømdekteteringsmodstanden og modstanden af strømdekteteringsmodstanden.

13. Hurtigladestyringssystem ifølge et hvilket som helst af kravene 10-12, hvor ladeadapteren (2) yderligere omfatter et strøm- og spændingsdekteteringskredsløb (24);

5 hvor den anden styreindretning (21) er yderligere konfigureret til at hente en spændingsværdi og en strømværdi af effektsignalet, der er afgivet af reguleringskredsløbet (22) via strøm- og spændingsdekteteringskredsløbet (24), og til at sende den anden afbrydelsesinstruktion til det andet kontaktkredsløb (23), hvis strømværdien af effektsignalet, der er afgivet af reguleringskredsløbet (22), er større end en overstrømsgrænseværdi, og/eller
10 spændingsværdien af effektsignalet, der er afgivet af reguleringskredsløbet (22), er større end en overstrømsgrænseværdi.

14. Hurtigladestyringssystem ifølge et hvilket som helst af kravene 10-13, hvor den anden unormale ladeinformation yderligere omfatter: information, som indikerer en unormal temperatur af ladeadapteren (2), eller information, som indikerer at ladeadapteren (2)
15 er blevet hevet ud;

hvor den anden styreindretning (21) er yderligere konfigureret til at sende den anden afbrydelsesinstruktion til henholdsvis den første styreindretning (11) og det andet kontaktkredsløb (23), hvis informationen, som indikerer en unormal temperatur af ladeadapteren (2), er dekteteret, eller hvis informationen, som indikere at ladeadapteren (2) er blevet hevet ud, er dekteteret.
20

15. Hurtigladestyringssystem ifølge et hvilket som helst af kravene 10-14, hvor ladeadapteren (2) er yderligere konfigureret til at sende effektsignalet til en første ladegrænseflade af den mobile terminal (1) via en anden ladegrænseflade, således at ladeadapteren (2) lader cellen af den mobile terminal (1), hvor der er P første effektleddninger og Q første
25 jordledninger i den første ladegrænseflade, og der er P anden effektleddninger og Q anden jordledninger i den anden ladegrænseflade, hvor de P første effektleddninger er tilsvarende koblet til de P anden effektleddninger og, de Q første jordledninger er tilsvarende koblet til de Q anden jordledninger, hvor P er større end eller lig med 2, og Q er større end eller lig med 2.

30 16. Hurtigladestyringssystem ifølge et hvilket som helst af kravene 10-15, hvor den mobile terminal (1) yderligere omfatter et første kontaktkredsløb (12);

hvor den første styreindretning (11) er yderligere konfigureret til at sende en afbrydelsesinstruktion til henholdsvis den anden styreindretning (21) og det første kontaktkredsløb (23), hvis første unormal ladeinformation er dekteteret, hvor den første unormale
35 ladeinformation omfatter et anodekontaktsignal, der er genereret når en anode af cellen ikke er i god kontakt, et katodekontaktsignal, der er genereret når en katode af cellen ikke er i god kontakt, og et temperatursignal, der er genereret når en temperatur af cellen er større end en temperaturgrænseværdi;

hvor det første kontaktkredsløb (12) er konfigureret til at afbryde et ladekredsløb, gennem hvilket ladeadapteren (2) lader cellen via det første kontaktkredsløb (12), hvis det første kontaktkredsløb (12) modtager afbrydelsesinstruktionen.

17. Hurtigladestyringssystem ifølge krav 16, som yderligere omfatter:

5 hvor den første styreindretning (11) er yderligere konfigureret til at styre det første kontaktkredsløb (12), til at afbryde ladekredsløbet, hvis den første styreindretning (11) modtager den anden afbrydelsesinstruktion; og/eller

10 hvor den anden styreindretning (21) er yderligere konfigureret til at styre det andet kontaktkredsløb, (23) til at styre ladeadapteren (2), til at stoppe med at sende effektsignalet, der er afgivet af reguleringskredsløbet (22), hvis den anden styreindretning (21) modtager afbrydelsesinstruktionen.

15 18. Hurtigladestyringssystem ifølge et hvilket som helst af kravene 10-17, hvor den anden styreindretning (21) er yderligere konfigureret til at sende en hurtigladeanmodning til den første styreindretning (11), hvor hurtigladeanmodningen spørger den første styreindretning (11), hvorvidt en højstrømsladning af ladeadapteren (2) på cellen af den mobile terminal (1) kan godkendes,

20 hvor den første styreindretning (11) er yderligere konfigureret til at sende en hurtigladetilladelsesinstruktion til den anden styreindretning (21), hvis den første styreindretning (11) accepter højstrømsladningen af ladeadapteren (2) på cellen af den mobile terminal (1); og

den anden styreindretning (21) er yderligere konfigureret til at bestemme at højstrømsladningen for cellen af den mobile terminal (1) er udført efter modtagelse af hurtigladetilladelsesinstruktionen.

DRAWINGS

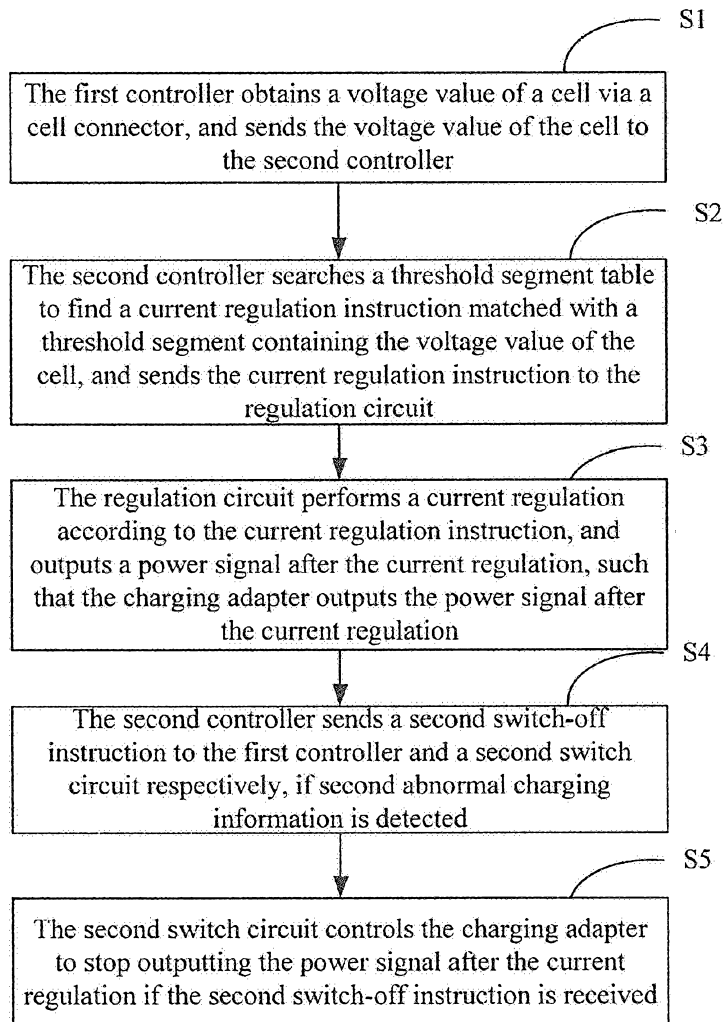


Fig. 1

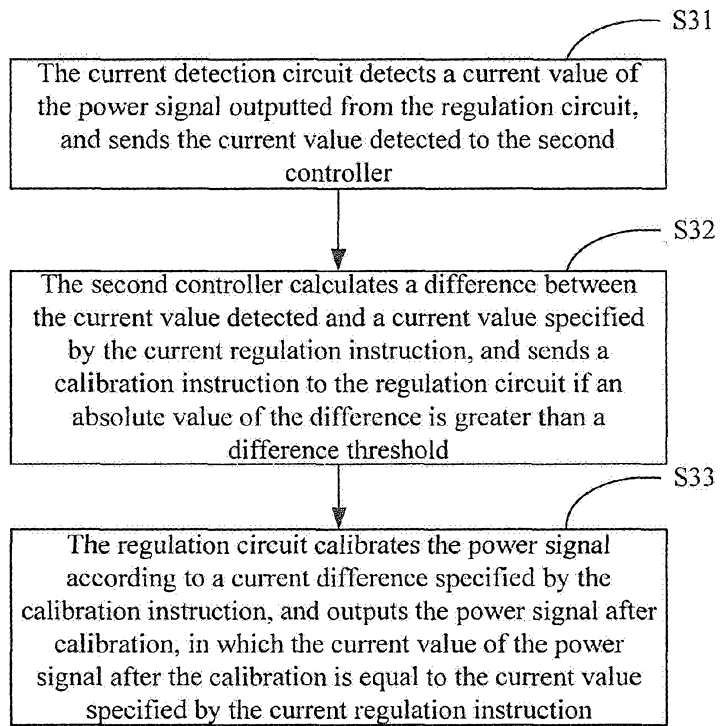


Fig. 2

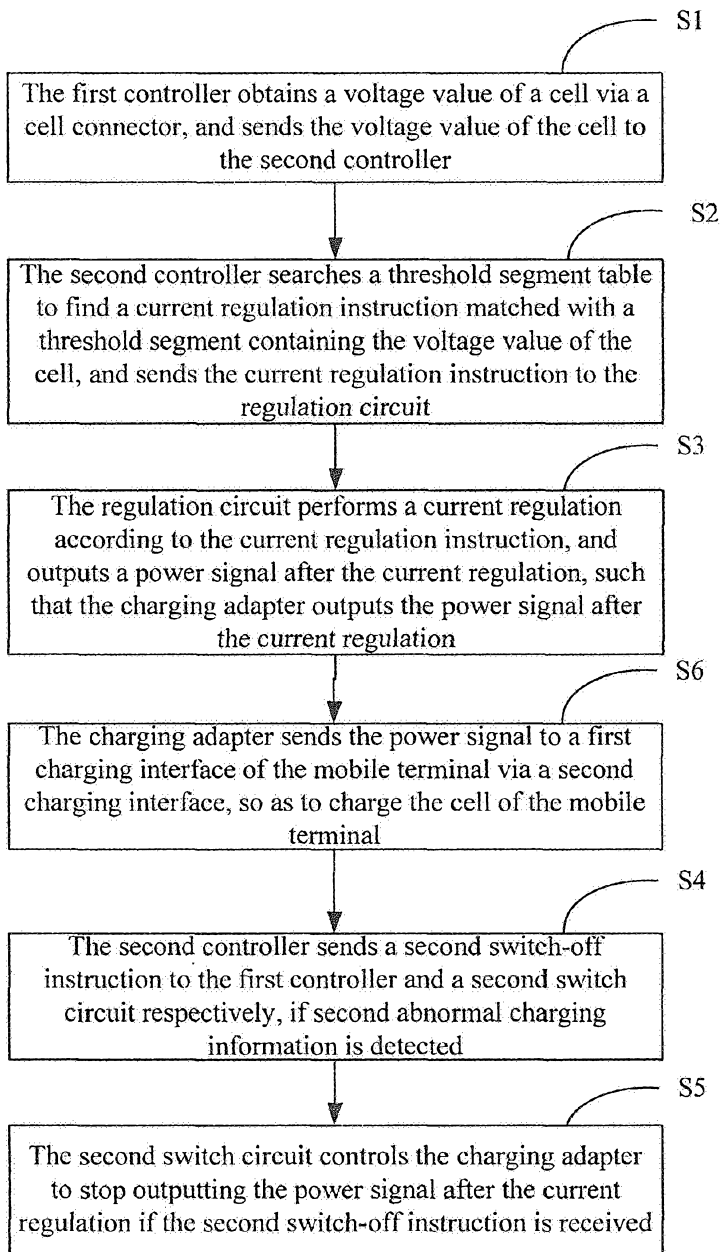


Fig. 3

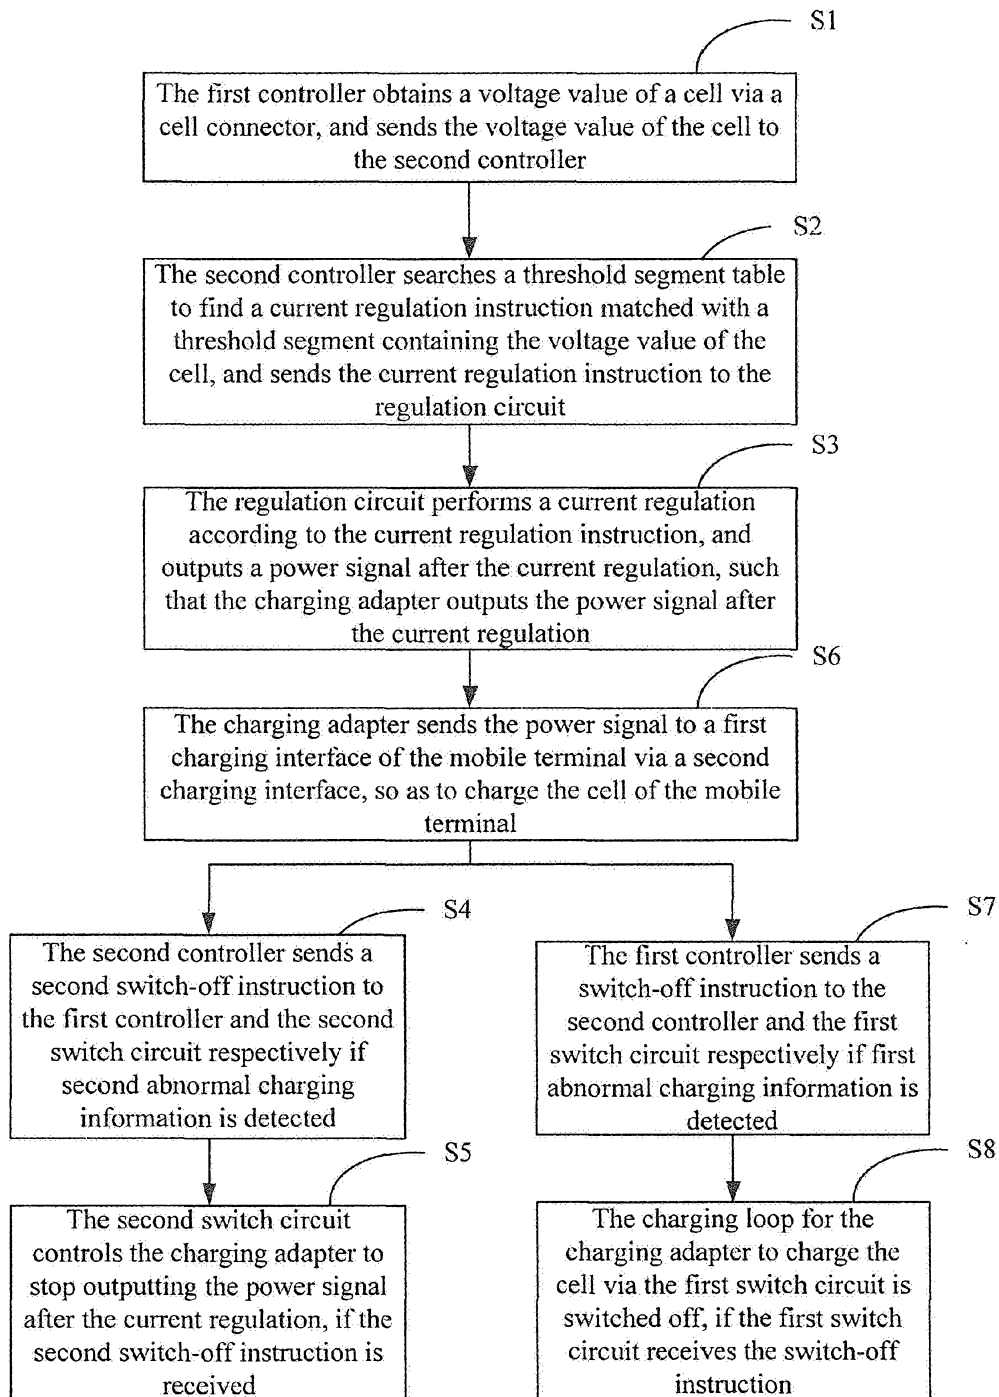


Fig. 4

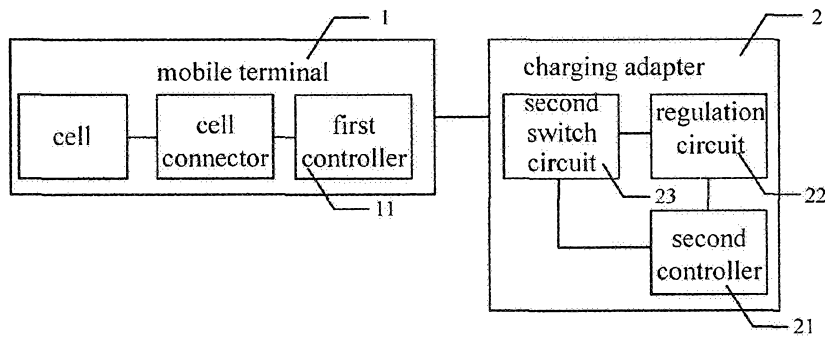


Fig. 5

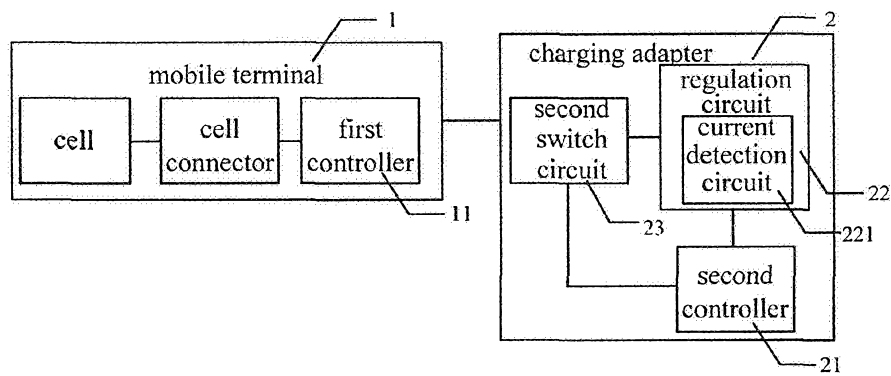


Fig. 6

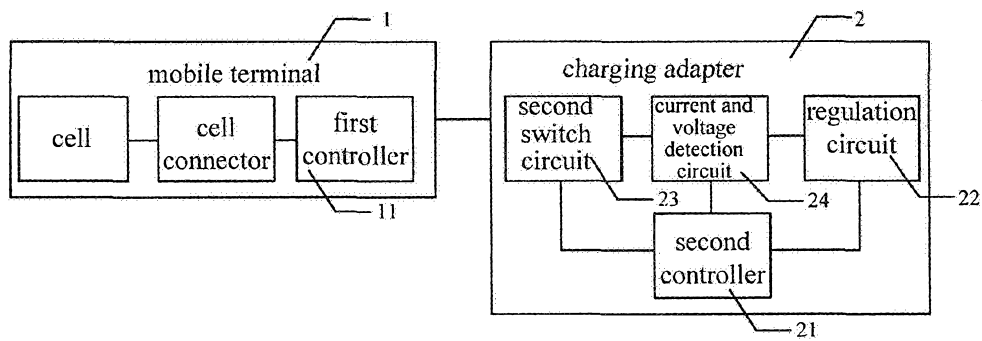


Fig. 7

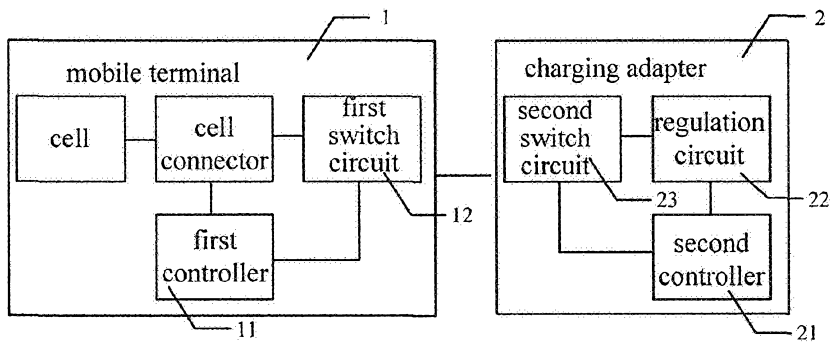


Fig. 8