



(51) International Patent Classification:

H04W 28/10 (2009.01) H04W 72/23 (2023.01)

H04W 28/02 (2009.01)

TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(21) International Application Number:

PCT/KR2024/006975

(22) International Filing Date:

23 May 2024 (23.05.2024)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

63/521,347 16 June 2023 (16.06.2023) US

Published:

— with international search report (Art. 21(3))


(71) Applicant: LG ELECTRONICS INC. [KR/KR]; 128, Yeoui-daero, Yeongdeungpo-gu, Seoul 07336 (KR).

(72) Inventors: JO, Geumsan; IP Center, LG Electronics Inc., 19, Yangjae-daero 11-gil, Seocho-gu, Seoul 06772 (KR). KIM, Seongjoon; IP Center, LG Electronics Inc., 19, Yangjae-daero 11-gil, Seocho-gu, Seoul 06772 (KR).

(74) Agent: KBK & ASSOCIATES; (Jamsil Hyundae Building 7th Floor), 82, Olympic-ro, Songpa-gu, Seoul 05556 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,

(54) Title: METHOD AND APPARATUS FOR TRANSMITTING INFORMATION RELATED TO EXPECTED DATA VOLUME DURING DATA BURST TRANSMISSION IN WIRELESS COMMUNICATION SYSTEM

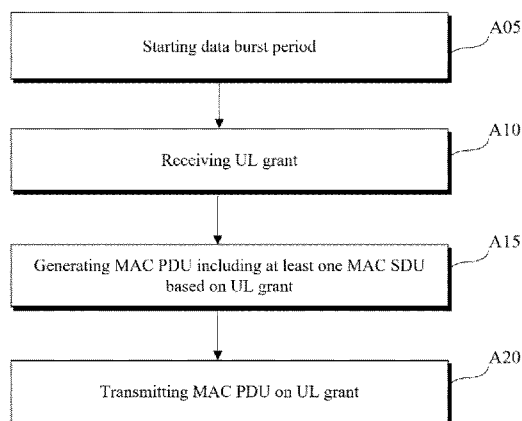

(57) Abstract: The present disclosure relates to a method of performing operations for a User Equipment (UE) in a wireless communication system. In particular, the method includes the steps of: starting a data burst period; receiving an uplink (UL) grant; generating a Medium Access Control (MAC) Protocol Data Unit (PDU) including at least one MAC Service Data Unit (SDU) based on the uplink grant, wherein, based on there being no more SDU to be transmitted and based on the data burst period being considered to be on-going, the MAC PDU includes zero Buffer Size (BS) information and information indicating that the data burst period is on-going; and transmitting the MAC PDU on the UL grant.

Description

Title of Invention: METHOD AND APPARATUS FOR TRANSMITTING INFORMATION RELATED TO EXPECTED DATA VOLUME DURING DATA BURST TRANSMISSION IN WIRELESS COMMUNICATION SYSTEM

Technical Field

- [1] The present disclosure relates to a wireless communication system, and more particularly, to a method for transmitting information related to expected data volume during a data burst transmission in a wireless communication system and an apparatus therefor.

Background Art

- [2] Introduction of new radio communication technologies has led to increases in the number of user equipments (UEs) to which a base station (BS) provides services in a prescribed resource region, and has also led to increases in the amount of data and control information that the BS transmits to the UEs. Due to typically limited resources available to the BS for communication with the UE(s), new techniques are needed by which the BS utilizes the limited radio resources to efficiently receive/transmit uplink/downlink data and/or uplink/downlink control information. In particular, overcoming delay or latency has become an important challenge in applications whose performance critically depends on delay/latency.

Disclosure of Invention

Technical Problem

- [3] Accordingly, an object of the present disclosure is to provide a method for transmitting information related to expected data volume during a data burst transmission in a wireless communication system and an apparatus therefor.

Solution to Problem

- [4] The object of the present disclosure can be achieved by the method for performing operations of a User Equipment (UE) in a wireless communication system, comprising the steps of starting a data burst period; receiving an uplink (UL) grant; generating a Medium Access Control (MAC) Protocol Data Unit (PDU) including at least one MAC Service Data Unit (SDU) based on the uplink grant, wherein, based on there being no more SDU to be transmitted and based on the data burst period being considered to be on-going, the MAC PDU includes zero Buffer Size (BS) information and information indicating that the data burst period is on-going; and transmitting the MAC PDU on the UL grant.

- [5] Further, it is suggested a user equipment (UE) in a wireless communication system comprising at least one transceiver; at least one processor; and at least one computer memory operably connectable to the at least one processor and storing instructions that, when executed, cause the at least one processor to perform operations comprising starting a data burst period; receiving an uplink (UL) grant; generating a Medium Access Control (MAC) Protocol Data Unit (PDU) including at least one MAC Service Data Unit (SDU) based on the uplink grant, wherein, based on there being no more SDU to be transmitted and based on the data burst period being considered to be on-going, the MAC PDU includes zero Buffer Size (BS) information and information indicating that the data burst period is on-going; and transmitting the MAC PDU on the UL grant.
- [6] Preferably, the information indicating that the data burst period is on-going includes information on a size of at least one remaining MAC SDU within the data burst period.
- [7] Preferably, generating the MAC PDU comprises determining whether there is expected data volume to be transmitted until an end of the data burst period.
- [8] More preferably, if the UE determines that there is expected data volume to be transmitted until the end of the data burst period, the data burst period is considered to be on-going. Further, else (i.e., if the UE determines that there is not expected data volume to be transmitted until the end of the data burst period), the MAC PDU includes zero BS information and information indicating an end of the data burst.
- [9] It will be appreciated by persons skilled in the art that the effects that can be achieved through the present disclosure are not limited to what has been particularly described hereinabove and other advantages of the present disclosure will be more clearly understood from the following detailed description.

Advantageous Effects of Invention

- [10] According to the present disclosure, the network can identify when to finish the data burst period. With this, the network indicates an indication to the UE in order to stop the PDCCH monitoring. With this, the power saving gain would be increased.
- [11] Effects obtainable from the present disclosure may be non-limited by the above mentioned effect. And, other unmentioned effects can be clearly understood from the following description by those having ordinary skill in the technical field to which the present disclosure pertains.

Brief Description of Drawings

- [12] The accompanying drawings, which are included to provide a further understanding of the present disclosure, illustrate embodiments of the present disclosure and together with the description serve to explain the principle of the present disclosure:

- [13] FIG. 1 illustrates an example of a communication system 1 to which implementations of the present disclosure is applied;
- [14] FIG. 2 is a block diagram illustrating examples of communication devices which can perform a method according to the present disclosure;
- [15] FIG. 3 illustrates an example of a frame structure in a 3GPP based wireless communication system;
- [16] FIG. 4 illustrates an example of protocol stacks in a third generation partnership project (3GPP) based wireless communication system;
- [17] FIG. 5 illustrates a data flow example in the 3GPP new radio (NR) system;
- [18] FIG. 6 illustrates an example of PDSCH time domain resource allocation by PDCCH, and an example of PUSCH time resource allocation by PDCCH;
- [19] FIG. 7 illustrates an example of physical layer processing at a transmitting side;
- [20] FIG. 8 illustrates an example of physical layer processing at a receiving side;
- [21] FIG. 9 shows a Short BSR MAC CE and a Short Truncated BSR MAC CE according to the NR system;
- [22] FIG. 10 shows a Long BSR MAC CE and a Long Truncated BSR MAC CE according to the NR system;
- [23] FIG. 11 shows a concept of data burst transmissions in XR traffic transmission;
- [24] FIG. 12 shows an example of data burst transmissions in the conventional art;
- [25] FIG. 13 shows an example of problems occurred in data burst transmissions in the conventional art;
- [26] FIG. 14 shows an example of transmitting the MAC PDU with eBSR according to the present disclosure; and
- [27] FIG. 15 is a flow chart of performing operations for the UE according to the present disclosure.

Best Mode for Carrying out the Invention

- [28] Reference will now be made in detail to the exemplary implementations of the present disclosure, examples of which are illustrated in the accompanying drawings. The detailed description, which will be given below with reference to the accompanying drawings, is intended to explain exemplary implementations of the present disclosure, rather than to show the only implementations that can be implemented according to the disclosure. The following detailed description includes specific details in order to provide a thorough understanding of the present disclosure. However, it will be apparent to those skilled in the art that the present disclosure may be practiced without such specific details.
- [29] The following techniques, apparatuses, and systems may be applied to a variety of wireless multiple access systems. Examples of the multiple access systems

include a code division multiple access (CDMA) system, a frequency division multiple access (FDMA) system, a time division multiple access (TDMA) system, an orthogonal frequency division multiple access (OFDMA) system, a single carrier frequency division multiple access (SC-FDMA) system, and a multicarrier frequency division multiple access (MC-FDMA) system. CDMA may be embodied through radio technology such as universal terrestrial radio access (UTRA) or CDMA2000. TDMA may be embodied through radio technology such as global system for mobile communications (GSM), general packet radio service (GPRS), or enhanced data rates for GSM evolution (EDGE). OFDMA may be embodied through radio technology such as institute of electrical and electronics engineers (IEEE) 802.11 (Wi-Fi), IEEE 802.16 (WiMAX), IEEE 802.20, or evolved UTRA (E-UTRA). UTRA is a part of a universal mobile telecommunications system (UMTS). 3rd generation partnership project (3GPP) long term evolution (LTE) is a part of evolved UMTS (E-UMTS) using E-UTRA. 3GPP LTE employs OFDMA in DL and SC-FDMA in UL. LTE-advanced (LTE-A) is an evolved version of 3GPP LTE.

[30] For convenience of description, implementations of the present disclosure are mainly described in regards to a 3GPP based wireless communication system. However, the technical features of the present disclosure are not limited thereto. For example, although the following detailed description is given based on a mobile communication system corresponding to a 3GPP based wireless communication system, aspects of the present disclosure that are not limited to 3GPP based wireless communication system are applicable to other mobile communication systems. For terms and technologies which are not specifically described among the terms of and technologies employed in the present disclosure, the wireless communication standard documents published before the present disclosure may be referenced. For example, the following documents may be referenced.

- [31] 3GPP LTE
- [32] - 3GPP TS 36.211: Physical channels and modulation
- [33] - 3GPP TS 36.212: Multiplexing and channel coding
- [34] - 3GPP TS 36.213: Physical layer procedures
- [35] - 3GPP TS 36.214: Physical layer; Measurements
- [36] - 3GPP TS 36.300: Overall description
- [37] - 3GPP TS 36.304: User Equipment (UE) procedures in idle mode
- [38] - 3GPP TS 36.314: Layer 2 - Measurements
- [39] - 3GPP TS 36.321: Medium Access Control (MAC) protocol
- [40] - 3GPP TS 36.322: Radio Link Control (RLC) protocol
- [41] - 3GPP TS 36.323: Packet Data Convergence Protocol (PDCP)
- [42] - 3GPP TS 36.331: Radio Resource Control (RRC) protocol

- [43] 3GPP NR (e.g. 5G)
- [44] - 3GPP TS 38.211: Physical channels and modulation
- [45] - 3GPP TS 38.212: Multiplexing and channel coding
- [46] - 3GPP TS 38.213: Physical layer procedures for control
- [47] - 3GPP TS 38.214: Physical layer procedures for data
- [48] - 3GPP TS 38.215: Physical layer measurements
- [49] - 3GPP TS 38.300: Overall description
- [50] - 3GPP TS 38.304: User Equipment (UE) procedures in idle mode and in RRC inactive state

- [51] - 3GPP TS 38.321: Medium Access Control (MAC) protocol
- [52] - 3GPP TS 38.322: Radio Link Control (RLC) protocol
- [53] - 3GPP TS 38.323: Packet Data Convergence Protocol (PDCP)
- [54] - 3GPP TS 38.331: Radio Resource Control (RRC) protocol
- [55] - 3GPP TS 37.324: Service Data Adaptation Protocol (SDAP)
- [56] - 3GPP TS 37.340: Multi-connectivity; Overall description

[57] In the present disclosure, a user equipment (UE) may be a fixed or mobile device. Examples of the UE include various devices that transmit and receive user data and/or various kinds of control information to and from a base station (BS). In the present disclosure, a BS generally refers to a fixed station that performs communication with a UE and/or another BS, and exchanges various kinds of data and control information with the UE and another BS. The BS may be referred to as an advanced base station (ABS), a node-B (NB), an evolved node-B (eNB), a base transceiver system (BTS), an access point (AP), a processing server (PS), etc. Especially, a BS of the UMTS is referred to as a NB, a BS of the enhanced packet core (EPC) / long term evolution (LTE) system is referred to as an eNB, and a BS of the new radio (NR) system is referred to as a gNB.

[58] In the present disclosure, a node refers to a point capable of transmitting/receiving a radio signal through communication with a UE. Various types of BSs may be used as nodes irrespective of the terms thereof. For example, a BS, a node B (NB), an e-node B (eNB), a pico-cell eNB (PeNB), a home eNB (HeNB), a relay, a repeater, etc. may be a node. In addition, the node may not be a BS. For example, the node may be a radio remote head (RRH) or a radio remote unit (RRU). The RRH or RRU generally has a lower power level than a power level of a BS. Since the RRH or RRU (hereinafter, RRH/RRU) is generally connected to the BS through a dedicated line such as an optical cable, cooperative communication between RRH/RRU and the BS can be smoothly performed in comparison with cooperative communication between BSs connected by a radio line. At least one antenna is installed per node. The antenna may include a physical antenna or an antenna port or a virtual antenna.

- [59] In the present disclosure, the term “cell” may refer to a geographic area to which one or more nodes provide a communication system, or refer to radio resources. A “cell” of a geographic area may be understood as coverage within which a node can provide service using a carrier and a “cell” as radio resources (e.g. time-frequency resources) is associated with bandwidth (BW) which is a frequency range configured by the carrier. The “cell” associated with the radio resources is defined by a combination of downlink resources and uplink resources, for example, a combination of a downlink (DL) component carrier (CC) and an uplink (UL) CC. The cell may be configured by downlink resources only, or may be configured by downlink resources and uplink resources. Since DL coverage, which is a range within which the node is capable of transmitting a valid signal, and UL coverage, which is a range within which the node is capable of receiving the valid signal from the UE, depends upon a carrier carrying the signal, the coverage of the node may be associated with coverage of the “cell” of radio resources used by the node. Accordingly, the term “cell” may be used to represent service coverage of the node sometimes, radio resources at other times, or a range that signals using the radio resources can reach with valid strength at other times.
- [60] In the present disclosure, a physical downlink control channel (PDCCH), and a physical downlink shared channel (PDSCH) refer to a set of time-frequency resources or resource elements (REs) carrying downlink control information (DCI), and a set of time-frequency resources or REs carrying downlink data, respectively. In addition, a physical uplink control channel (PUCCH), a physical uplink shared channel (PUSCH) and a physical random access channel (PRACH) refer to a set of time-frequency resources or REs carrying uplink control information (UCI), a set of time-frequency resources or REs carrying uplink data and a set of time-frequency resources or REs carrying random access signals, respectively.
- [61] In carrier aggregation (CA), two or more CCs are aggregated. A UE may simultaneously receive or transmit on one or multiple CCs depending on its capabilities. CA is supported for both contiguous and non-contiguous CCs. When CA is configured the UE only has one radio resource control (RRC) connection with the network. At RRC connection establishment/re-establishment/handover, one serving cell provides the non-access stratum (NAS) mobility information, and at RRC connection re-establishment/handover, one serving cell provides the security input. This cell is referred to as the Primary Cell (PCell). The PCell is a cell, operating on the primary frequency, in which the UE either performs the initial connection establishment procedure or initiates the connection re-establishment procedure. Depending on UE capabilities, Secondary Cells (SCells) can be configured to form together with the PCell a set of serving cells. An SCell is a cell providing additional radio resources on top of Special Cell. The configured set of serving cells for a

UE therefore always consists of one PCell and one or more SCells. In the present disclosure, for dual connectivity (DC) operation, the term “special Cell” refers to the PCell of the master cell group (MCG) or the PSCell of the secondary cell group (SCG), and otherwise the term Special Cell refers to the PCell. An SpCell supports physical uplink control channel (PUCCH) transmission and contention-based random access, and is always activated. The MCG is a group of serving cells associated with a master node, comprising of the SpCell (PCell) and optionally one or more SCells. The SCG is the subset of serving cells associated with a secondary node, comprising of the PSCell and zero or more SCells, for a UE configured with DC. For a UE in RRC_CONNECTED not configured with CA/DC there is only one serving cell comprising of the PCell. For a UE in RRC_CONNECTED configured with CA/DC the term “serving cells” is used to denote the set of cells comprising of the SpCell(s) and all SCells.

- [62] The MCG is a group of serving cells associated with a master BS which terminates at least S1-MME, and the SCG is a group of serving cells associated with a secondary BS that is providing additional radio resources for the UE but is not the master BS. The SCG includes a primary SCell (PSCell) and optionally one or more SCells. In DC, two MAC entities are configured in the UE: one for the MCG and one for the SCG. Each MAC entity is configured by RRC with a serving cell supporting PUCCH transmission and contention based Random Access. In the present disclosure, the term SpCell refers to such cell, whereas the term SCell refers to other serving cells. The term SpCell either refers to the PCell of the MCG or the PSCell of the SCG depending on if the MAC entity is associated to the MCG or the SCG, respectively.
- [63] In the present disclosure, monitoring a channel refers to attempting to decode the channel. For example, monitoring a physical downlink control channel (PDCCH) refers to attempting to decode PDCCH(s) (or PDCCH candidates).
- [64] In the present disclosure, “C-RNTI” refers to a cell RNTI, “SI-RNTI” refers to a system information RNTI, “P-RNTI” refers to a paging RNTI, “RA-RNTI” refers to a random access RNTI, “SC-RNTI” refers to a single cell RNTI, “SL-RNTI” refers to a sidelink RNTI, “SPS C-RNTI” refers to a semi-persistent scheduling C-RNTI, and “CS-RNTI” refers to a configured scheduling RNTI.
- [65] FIG. 1 illustrates an example of a communication system 1 to which implementations of the present disclosure is applied.
- [66] Three main requirement categories for 5G include (1) a category of enhanced mobile broadband (eMBB), (2) a category of massive machine type communication (mMTC), and (3) a category of ultra-reliable and low latency communications (URLLC).

- [67] Partial use cases may require a plurality of categories for optimization and other use cases may focus only upon one key performance indicator (KPI). 5G supports such various use cases using a flexible and reliable method.
- [68] eMBB far surpasses basic mobile Internet access and covers abundant bidirectional work and media and entertainment applications in cloud and augmented reality. Data is one of 5G core motive forces and, in a 5G era, a dedicated voice service may not be provided for the first time. In 5G, it is expected that voice will be simply processed as an application program using data connection provided by a communication system. Main causes for increased traffic volume are due to an increase in the size of content and an increase in the number of applications requiring high data transmission rate. A streaming service (of audio and video), conversational video, and mobile Internet access will be more widely used as more devices are connected to the Internet. These many application programs require connectivity of an always turned-on state in order to push real-time information and alarm for users. Cloud storage and applications are rapidly increasing in a mobile communication platform and may be applied to both work and entertainment. The cloud storage is a special use case which accelerates growth of uplink data transmission rate. 5G is also used for remote work of cloud. When a tactile interface is used, 5G demands much lower end-to-end latency to maintain user good experience. Entertainment, for example, cloud gaming and video streaming, is another core element which increases demand for mobile broadband capability. Entertainment is essential for a smartphone and a tablet in any place including high mobility environments such as a train, a vehicle, and an airplane. Other use cases are augmented reality for entertainment and information search. In this case, the augmented reality requires very low latency and instantaneous data volume.
- [69] In addition, one of the most expected 5G use cases relates a function capable of smoothly connecting embedded sensors in all fields, i.e., mMTC. It is expected that the number of potential IoT devices will reach 204 hundred million up to the year of 2020. An industrial IoT is one of categories of performing a main role enabling a smart city, asset tracking, smart utility, agriculture, and security infrastructure through 5G.
- [70] URLLC includes a new service that will change industry through remote control of main infrastructure and an ultra-reliable/available low-latency link such as a self-driving vehicle. A level of reliability and latency is essential to control a smart grid, automatize industry, achieve robotics, and control and adjust a drone.
- [71] 5G is a means of providing streaming evaluated as a few hundred megabits per second to gigabits per second and may complement fiber-to-the-home (FTTH) and cable-based broadband (or DOCSIS). Such fast speed is needed to deliver TV in resolution of 4K or more (6K, 8K, and more), as well as virtual reality and augmented reality. Virtual reality (VR) and augmented reality (AR) applications include almost

immersive sports games. A specific application program may require a special network configuration. For example, for VR games, gaming companies need to incorporate a core server into an edge network server of a network operator in order to minimize latency.

- [72] Automotive is expected to be a new important motivated force in 5G together with many use cases for mobile communication for vehicles. For example, entertainment for passengers requires high simultaneous capacity and mobile broadband with high mobility. This is because future users continue to expect connection of high quality regardless of their locations and speeds. Another use case of an automotive field is an AR dashboard. The AR dashboard causes a driver to identify an object in the dark in addition to an object seen from a front window and displays a distance from the object and a movement of the object by overlapping information talking to the driver. In the future, a wireless module enables communication between vehicles, information exchange between a vehicle and supporting infrastructure, and information exchange between a vehicle and other connected devices (e.g., devices accompanied by a pedestrian). A safety system guides alternative courses of a behavior so that a driver may drive more safely drive, thereby lowering the danger of an accident. The next stage will be a remotely controlled or self-driven vehicle. This requires very high reliability and very fast communication between different self-driven vehicles and between a vehicle and infrastructure. In the future, a self-driven vehicle will perform all driving activities and a driver will focus only upon abnormal traffic that the vehicle cannot identify. Technical requirements of a self-driven vehicle demand ultra-low latency and ultra-high reliability so that traffic safety is increased to a level that cannot be achieved by human being.
- [73] A smart city and a smart home/building mentioned as a smart society will be embedded in a high-density wireless sensor network. A distributed network of an intelligent sensor will identify conditions for costs and energy-efficient maintenance of a city or a home. Similar configurations may be performed for respective households. All of temperature sensors, window and heating controllers, burglar alarms, and home appliances are wirelessly connected. Many of these sensors are typically low in data transmission rate, power, and cost. However, real-time HD video may be demanded by a specific type of device to perform monitoring.
- [74] Consumption and distribution of energy including heat or gas is distributed at a higher level so that automated control of the distribution sensor network is demanded. The smart grid collects information and connects the sensors to each other using digital information and communication technology so as to act according to the collected information. Since this information may include behaviors of a supply company and a consumer, the smart grid may improve distribution of fuels such as electricity by a

method having efficiency, reliability, economic feasibility, production sustainability, and automation. The smart grid may also be regarded as another sensor network having low latency.

[75] Mission critical application (e.g. e-health) is one of 5G use scenarios. A health part contains many application programs capable of enjoying benefit of mobile communication. A communication system may support remote treatment that provides clinical treatment in a faraway place. Remote treatment may aid in reducing a barrier against distance and improve access to medical services that cannot be continuously available in a faraway rural area. Remote treatment is also used to perform important treatment and save lives in an emergency situation. The wireless sensor network based on mobile communication may provide remote monitoring and sensors for parameters such as heart rate and blood pressure.

[76] Wireless and mobile communication gradually becomes important in the field of an industrial application. Wiring is high in installation and maintenance cost. Therefore, a possibility of replacing a cable with reconstructible wireless links is an attractive opportunity in many industrial fields. However, in order to achieve this replacement, it is necessary for wireless connection to be established with latency, reliability, and capacity similar to those of the cable and management of wireless connection needs to be simplified. Low latency and a very low error probability are new requirements when connection to 5G is needed.

[77] Logistics and freight tracking are important use cases for mobile communication that enables inventory and package tracking anywhere using a location-based information system. The use cases of logistics and freight typically demand low data rate but require location information with a wide range and reliability.

[78] Referring to FIG. 1, the communication system 1 includes wireless devices, base stations (BSs), and a network. Although FIG. 1 illustrates a 5G network as an example of the network of the communication system 1, the implementations of the present disclosure are not limited to the 5G system, and can be applied to the future communication system beyond the 5G system.

[79] The BSs and the network may be implemented as wireless devices and a specific wireless device 200a may operate as a BS/network node with respect to other wireless devices.

[80] The wireless devices represent devices performing communication using radio access technology (RAT) (e.g., 5G New RAT (NR)) or Long-Term Evolution (LTE)) and may be referred to as communication/radio/5G devices. The wireless devices may include, without being limited to, a robot 100a, vehicles 100b-1 and 100b-2, an eXtended Reality (XR) device 100c, a hand-held device 100d, a home appliance 100e, an Internet of Things (IoT) device 100f, and an Artificial Intelligence

(AI) device/server 400. For example, the vehicles may include a vehicle having a wireless communication function, an autonomous driving vehicle, and a vehicle capable of performing communication between vehicles. The vehicles may include an Unmanned Aerial Vehicle (UAV) (e.g., a drone). The XR device may include an Augmented Reality (AR)/Virtual Reality (VR)/Mixed Reality (MR) device and may be implemented in the form of a Head-Mounted Device (HMD), a Head-Up Display (HUD) mounted in a vehicle, a television, a smartphone, a computer, a wearable device, a home appliance device, a digital signage, a vehicle, a robot, etc. The hand-held device may include a smartphone, a smartpad, a wearable device (e.g., a smartwatch or a smartglasses), and a computer (e.g., a notebook). The home appliance may include a TV, a refrigerator, and a washing machine. The IoT device may include a sensor and a smartmeter.

- [81] In the present disclosure, the wireless devices 100a to 100f may be called user equipments (UEs). A user equipment (UE) may include, for example, a cellular phone, a smartphone, a laptop computer, a digital broadcast terminal, a personal digital assistant (PDA), a portable multimedia player (PMP), a navigation system, a slate personal computer (PC), a tablet PC, an ultrabook, a vehicle, a vehicle having an autonomous traveling function, a connected car, an unmanned aerial vehicle (UAV), an artificial intelligence (AI) module, a robot, an augmented reality (AR) device, a virtual reality (VR) device, a mixed reality (MR) device, a hologram device, a public safety device, an MTC device, an IoT device, a medical device, a FinTech device (or a financial device), a security device, a weather/environment device, a device related to a 5G service, or a device related to a fourth industrial revolution field. The unmanned aerial vehicle (UAV) may be, for example, an aircraft aviated by a wireless control signal without a human being onboard. The VR device may include, for example, a device for implementing an object or a background of the virtual world. The AR device may include, for example, a device implemented by connecting an object or a background of the virtual world to an object or a background of the real world. The MR device may include, for example, a device implemented by merging an object or a background of the virtual world into an object or a background of the real world. The hologram device may include, for example, a device for implementing a stereoscopic image of 360 degrees by recording and reproducing stereoscopic information, using an interference phenomenon of light generated when two laser lights called holography meet. The public safety device may include, for example, an image relay device or an image device that is wearable on the body of a user. The MTC device and the IoT device may be, for example, devices that do not require direct human intervention or manipulation. For example, the MTC device and the IoT device may include smartmeters, vending machines, thermometers, smartbulbs, door locks, or various

sensors. The medical device may be, for example, a device used for the purpose of diagnosing, treating, relieving, curing, or preventing disease. For example, the medical device may be a device used for the purpose of diagnosing, treating, relieving, or correcting injury or impairment. For example, the medical device may be a device used for the purpose of inspecting, replacing, or modifying a structure or a function. For example, the medical device may be a device used for the purpose of adjusting pregnancy. For example, the medical device may include a device for treatment, a device for operation, a device for (in vitro) diagnosis, a hearing aid, or a device for procedure. The security device may be, for example, a device installed to prevent a danger that may arise and to maintain safety. For example, the security device may be a camera, a CCTV, a recorder, or a black box. The FinTech device may be, for example, a device capable of providing a financial service such as mobile payment. For example, the FinTech device may include a payment device or a point of sales (POS) system. The weather/environment device may include, for example, a device for monitoring or predicting a weather/environment.

[82] The wireless devices 100a to 100f may be connected to the network 300 via the BSs 200. An AI technology may be applied to the wireless devices 100a to 100f and the wireless devices 100a to 100f may be connected to the AI server 400 via the network 300. The network 300 may be configured using a 3G network, a 4G (e.g., LTE) network, a 5G (e.g., NR) network, and a beyond-5G network. Although the wireless devices 100a to 100f may communicate with each other through the BSs 200/network 300, the wireless devices 100a to 100f may perform direct communication (e.g., sidelink communication) with each other without passing through the BSs/network. For example, the vehicles 100b-1 and 100b-2 may perform direct communication (e.g., Vehicle-to-Vehicle (V2V)/Vehicle-to-everything (V2X) communication). The IoT device (e.g., a sensor) may perform direct communication with other IoT devices (e.g., sensors) or other wireless devices 100a to 100f.

[83] Wireless communication/connections 150a and 150b may be established between the wireless devices 100a to 100f/BS 200-BS 200. Herein, the wireless communication/connections may be established through various RATs (e.g., 5G NR) such as uplink/downlink communication 150a and sidelink communication 150b (or D2D communication). The wireless devices and the BSs/the wireless devices may transmit/receive radio signals to/from each other through the wireless communication/connections 150a and 150b. For example, the wireless communication/connections 150a and 150b may transmit/receive signals through various physical channels. To this end, at least a part of various configuration information configuring processes, various signal processing processes (e.g., channel encoding/decoding, modulation/demodulation, and resource mapping/demapping), and resource allocating processes,

for transmitting/receiving radio signals, may be performed based on the various proposals of the present disclosure.

[84] FIG. 2 is a block diagram illustrating examples of communication devices which can perform a method according to the present disclosure.

[85] Referring to FIG. 2, a first wireless device 100 and a second wireless device 200 may transmit/receive radio signals to/from an external device through a variety of RATs (e.g., LTE and NR). In FIG. 2, {the first wireless device 100 and the second wireless device 200} may correspond to {the wireless device 100a to 100f and the BS 200} and/or {the wireless device 100a to 100f and the wireless device 100a to 100f} of FIG. 1.

[86] The first wireless device 100 may include one or more processors 102 and one or more memories 104 and additionally further include one or more transceivers 106 and/or one or more antennas 108. The processor(s) 102 may control the memory(s) 104 and/or the transceiver(s) 106 and may be configured to implement the functions, procedures, and/or methods described in the present disclosure. For example, the processor(s) 102 may process information within the memory(s) 104 to generate first information/signals and then transmit radio signals including the first information/signals through the transceiver(s) 106. The processor(s) 102 may receive radio signals including second information/signals through the transceiver 106 and then store information obtained by processing the second information/signals in the memory(s) 104. The memory(s) 104 may be connected to the processor(s) 102 and may store a variety of information related to operations of the processor(s) 102. For example, the memory(s) 104 may store software code including commands for performing a part or the entirety of processes controlled by the processor(s) 102 or for performing the procedures and/or methods described in the present disclosure. Herein, the processor(s) 102 and the memory(s) 104 may be a part of a communication modem/circuit/chip designed to implement RAT (e.g., LTE or NR). The transceiver(s) 106 may be connected to the processor(s) 102 and transmit and/or receive radio signals through one or more antennas 108. Each of the transceiver(s) 106 may include a transmitter and/or a receiver. The transceiver(s) 106 may be interchangeably used with radio frequency (RF) unit(s). In the present invention, the wireless device may represent a communication modem/circuit/chip.

[87] The second wireless device 200 may include one or more processors 202 and one or more memories 204 and additionally further include one or more transceivers 206 and/or one or more antennas 208. The processor(s) 202 may control the memory(s) 204 and/or the transceiver(s) 206 and may be configured to implement the functions, procedures, and/or methods described in the present disclosure. For example, the processor(s) 202 may process information within the memory(s) 204 to generate third

information/signals and then transmit radio signals including the third information/signals through the transceiver(s) 206. The processor(s) 202 may receive radio signals including fourth information/signals through the transceiver(s) 106 and then store information obtained by processing the fourth information/signals in the memory(s) 204. The memory(s) 204 may be connected to the processor(s) 202 and may store a variety of information related to operations of the processor(s) 202. For example, the memory(s) 204 may store software code including commands for performing a part or the entirety of processes controlled by the processor(s) 202 or for performing the procedures and/or methods described in the present disclosure. Herein, the processor(s) 202 and the memory(s) 204 may be a part of a communication modem/circuit/chip designed to implement RAT (e.g., LTE or NR). The transceiver(s) 206 may be connected to the processor(s) 202 and transmit and/or receive radio signals through one or more antennas 208. Each of the transceiver(s) 206 may include a transmitter and/or a receiver. The transceiver(s) 206 may be interchangeably used with RF unit(s). In the present invention, the wireless device may represent a communication modem/circuit/chip.

[88] Hereinafter, hardware elements of the wireless devices 100 and 200 will be described more specifically. One or more protocol layers may be implemented by, without being limited to, one or more processors 102 and 202. For example, the one or more processors 102 and 202 may implement one or more layers (e.g., functional layers such as PHY, MAC, RLC, PDCP, RRC, and SDAP). The one or more processors 102 and 202 may generate one or more Protocol Data Units (PDUs) and/or one or more Service Data Unit (SDUs) according to the functions, procedures, proposals, and/or methods disclosed in the present disclosure. The one or more processors 102 and 202 may generate messages, control information, data, or information according to the functions, procedures, proposals, and/or methods disclosed in the present disclosure. The one or more processors 102 and 202 may generate signals (e.g., baseband signals) including PDUs, SDUs, messages, control information, data, or information according to the functions, procedures, proposals, and/or methods disclosed in the present disclosure and provide the generated signals to the one or more transceivers 106 and 206. The one or more processors 102 and 202 may receive the signals (e.g., baseband signals) from the one or more transceivers 106 and 206 and acquire the PDUs, SDUs, messages, control information, data, or information according to the functions, procedures, proposals, and/or methods disclosed in the present disclosure.

[89] The one or more processors 102 and 202 may be referred to as controllers, microcontrollers, microprocessors, or microcomputers. The one or more processors 102 and 202 may be implemented by hardware, firmware, software, or a combination thereof. As an example, one or more Application Specific Integrated Circuits (ASICs),

one or more Digital Signal Processors (DSPs), one or more Digital Signal Processing Devices (DSPDs), one or more Programmable Logic Devices (PLDs), or one or more Field Programmable Gate Arrays (FPGAs) may be included in the one or more processors 102 and 202. The functions, procedures, proposals, and/or methods disclosed in the present disclosure may be implemented using firmware or software and the firmware or software may be configured to include the modules, procedures, or functions. Firmware or software configured to perform the functions, procedures, proposals, and/or methods disclosed in the present disclosure may be included in the one or more processors 102 and 202 or stored in the one or more memories 104 and 204 so as to be driven by the one or more processors 102 and 202. The functions, procedures, proposals, and/or methods disclosed in the present disclosure may be implemented using firmware or software in the form of code, commands, and/or a set of commands.

[90] The one or more memories 104 and 204 may be connected to the one or more processors 102 and 202 and store various types of data, signals, messages, information, programs, code, instructions, and/or commands. The one or more memories 104 and 204 may be configured by Read-Only Memories (ROMs), Random Access Memories (RAMs), Electrically Erasable Programmable Read-Only Memories (EPROMs), flash memories, hard drives, registers, cash memories, computer-readable storage media, and/or combinations thereof. The one or more memories 104 and 204 may be located at the interior and/or exterior of the one or more processors 102 and 202. The one or more memories 104 and 204 may be connected to the one or more processors 102 and 202 through various technologies such as wired or wireless connection.

[91] The one or more transceivers 106 and 206 may transmit user data, control information, and/or radio signals/channels, mentioned in the methods and/or operational flowcharts of the present disclosure, to one or more other devices. The one or more transceivers 106 and 206 may receive user data, control information, and/or radio signals/channels, mentioned in the functions, procedures, proposals, methods, and/or operational flowcharts disclosed in the present disclosure, from one or more other devices. For example, the one or more transceivers 106 and 206 may be connected to the one or more processors 102 and 202 and transmit and receive radio signals. For example, the one or more processors 102 and 202 may perform control so that the one or more transceivers 106 and 206 may transmit user data, control information, or radio signals to one or more other devices. The one or more processors 102 and 202 may perform control so that the one or more transceivers 106 and 206 may receive user data, control information, or radio signals from one or more other devices. The one or more transceivers 106 and 206 may be connected to the one or more antennas 108 and 208 and the one or more transceivers 106 and 206

may be configured to transmit and receive user data, control information, and/or radio signals/channels, mentioned in the functions, procedures, proposals, methods, and/or operational flowcharts disclosed in the present disclosure, through the one or more antennas 108 and 208. In the present disclosure, the one or more antennas may be a plurality of physical antennas or a plurality of logical antennas (e.g., antenna ports). The one or more transceivers 106 and 206 may convert received radio signals/channels etc. from RF band signals into baseband signals in order to process received user data, control information, radio signals/channels, etc. using the one or more processors 102 and 202. The one or more transceivers 106 and 206 may convert the user data, control information, radio signals/channels, etc. processed using the one or more processors 102 and 202 from the base band signals into the RF band signals. To this end, the one or more transceivers 106 and 206 may include (analog) oscillators and/or filters. For example, the transceivers 106 and 206 can up-convert OFDM baseband signals to a carrier frequency by their (analog) oscillators and/or filters under the control of the processors 102 and 202 and transmit the up-converted OFDM signals at the carrier frequency. The transceivers 106 and 206 may receive OFDM signals at a carrier frequency and down-convert the OFDM signals into OFDM baseband signals by their (analog) oscillators and/or filters under the control of the transceivers 102 and 202.

[92] In the implementations of the present disclosure, a UE may operate as a transmitting device in uplink (UL) and as a receiving device in downlink (DL). In the implementations of the present disclosure, a BS may operate as a receiving device in UL and as a transmitting device in DL. Hereinafter, for convenience of description, it is mainly assumed that the first wireless device 100 acts as the UE, and the second wireless device 200 acts as the BS, unless otherwise mentioned or described. For example, the processor(s) 102 connected to, mounted on or launched in the first wireless device 100 may be configured to perform the UE behaviour according to an implementation of the present disclosure or control the transceiver(s) 106 to perform the UE behaviour according to an implementation of the present disclosure. The processor(s) 202 connected to, mounted on or launched in the second wireless device 200 may be configured to perform the BS behaviour according to an implementation of the present disclosure or control the transceiver(s) 206 to perform the BS behaviour according to an implementation of the present disclosure.

[93] In the present disclosure, at least one memory (e.g. 104 or 204) may store instructions or programs that, when executed, cause at least one processor, which is operably connected thereto, to perform operations according to some embodiments or implementations of the present disclosure.

[94] In the present disclosure, a computer readable storage medium stores at least one instructions or computer programs that, when executed by at least one processor, cause

the at least one processor to perform operations according to some embodiments or implementations of the present disclosure.

[95] In the present disclosure, a processing device or apparatus may comprise at least one processor, and at least one computer memory connectable to the at least one processor and storing instructions that, when executed, cause the at least one processor to perform operations according to some embodiments or implementations of the present disclosure.

[96] FIG. 3 illustrates an example of a frame structure in a 3GPP based wireless communication system.

[97] The frame structure illustrated in FIG. 3 is purely exemplary and the number of subframes, the number of slots, and/or the number of symbols in a frame may be variously changed. In the 3GPP based wireless communication system, OFDM numerologies (e.g., subcarrier spacing (SCS), transmission time interval (TTI) duration) may be differently configured between a plurality of cells aggregated for one UE. For example, if a UE is configured with different SCSs for cells aggregated for the cell, an (absolute time) duration of a time resource (e.g. a subframe, a slot, or a TTI) including the same number of symbols may be different among the aggregated cells. Herein, symbols may include OFDM symbols (or CP-OFDM symbols), SC-FDMA symbols (or discrete Fourier transform-spread-OFDM (DFT-s-OFDM) symbols).

[98] Referring to FIG. 5, downlink and uplink transmissions are organized into frames. Each frame has $T_f = 10$ ms duration. Each frame is divided into two half-frames, where each of the half-frames has 5 ms duration. Each half-frame consists of 5 subframes, where the duration T_{sf} per subframe is 1 ms. Each subframe is divided into slots and the number of slots in a subframe depends on a subcarrier spacing. Each slot includes 14 or 12 OFDM symbols based on a cyclic prefix (CP). In a normal CP, each slot includes 14 OFDM symbols and, in an extended CP, each slot includes 12 OFDM symbols. The numerology is based on exponentially scalable subcarrier spacing $\Delta f = 2^u \cdot 15$ kHz. The following table shows the number of OFDM symbols per slot, the number of slots per frame, and the number of slots per for the normal CP, according to the subcarrier spacing $\Delta f = 2^u \cdot 15$ kHz.

[99] [Table 1]

u	$N_{\text{slot}}^{\text{slot}}$	$N_{\text{frame},u}^{\text{slot}}$	$N_{\text{subframe},u}^{\text{slot}}$
0	14	10	1
1	14	20	2
2	14	40	4
3	14	80	8
4	14	160	16

[100] The following table shows the number of OFDM symbols per slot, the number of slots per frame, and the number of slots per for the extended CP, according to the subcarrier spacing $\Delta f = 2^u * 15$ kHz.

[101] [Table 2]

u	$N_{\text{slot}}^{\text{symb}}$	$N_{\text{frame},u}^{\text{slot}}$	$N_{\text{subframe},u}^{\text{slot}}$
2	12	40	4

[102] A slot includes plural symbols (e.g., 14 or 12 symbols) in the time domain. For each numerology (e.g. subcarrier spacing) and carrier, a resource grid of $N_{\text{grid},x}^{\text{size},u} * N_{\text{sc}}^{\text{RB}}$ subcarriers and $N_{\text{symb}}^{\text{subframe},u}$ OFDM symbols is defined, starting at common resource block (CRB) $N_{\text{grid}}^{\text{start},u}$ indicated by higher-layer signaling (e.g. radio resource control (RRC) signaling), where $N_{\text{grid},x}^{\text{size},u}$ is the number of resource blocks in the resource grid and the subscript x is DL for downlink and UL for uplink. $N_{\text{sc}}^{\text{RB}}$ is the number of subcarriers per resource blocks. In the 3GPP based wireless communication system, $N_{\text{sc}}^{\text{RB}}$ is 12 generally. There is one resource grid for a given antenna port p , subcarrier spacing configuration u , and transmission direction (DL or UL). The carrier bandwidth $N_{\text{grid}}^{\text{size},u}$ for subcarrier spacing configuration u is given by the higher-layer parameter (e.g. RRC parameter). Each element in the resource grid for the antenna port p and the subcarrier spacing configuration u is referred to as a resource element (RE) and one complex symbol may be mapped to each RE. Each RE in the resource grid is uniquely identified by an index k in the frequency domain and an index l representing a symbol location relative to a reference point in the time domain. In the 3GPP based wireless communication system, a resource block is defined by 12 consecutive subcarriers in the frequency domain.

[103] In the 3GPP NR system, resource blocks are classified into CRBs and physical resource blocks (PRBs). CRBs are numbered from 0 and upwards in the frequency domain for subcarrier spacing configuration u . The center of subcarrier 0 of CRB 0 for subcarrier spacing configuration u coincides with 'point A' which serves as a common reference point for resource block grids. In the 3GPP NR system, PRBs are defined within a bandwidth part (BWP) and numbered from 0 to $N_{\text{BWP},i}^{\text{size}} - 1$, where i is the number of the bandwidth part. The relation between the physical resource block n_{PRB} in the bandwidth part i and the common resource block n_{CRB} is as follows: $n_{\text{PRB}} = n_{\text{CRB}} + N_{\text{BWP},i}^{\text{size}}$, where $N_{\text{BWP},i}^{\text{size}}$ is the common resource block where bandwidth part starts relative to CRB 0. The BWP includes a plurality of consecutive resource blocks. A carrier may include a maximum of N (e.g., 5) BWPs. A UE may be configured with one or more BWPs on a given component carrier. Only one BWP among BWPs

configured to the UE can active at a time. The active BWP defines the UE's operating bandwidth within the cell's operating bandwidth.

[104] NR frequency bands are defined as 2 types of frequency range, FR1 and FR2. FR2 is may also called millimeter wave(mmW). The frequency ranges in which NR can operate are identified as described in Table 3.

[105] [Table 3]

<i>Frequency Range designation</i>	<i>Corresponding frequency range</i>	<i>Subcarrier Spacing</i>
<i>FR1</i>	<i>450MHz – 7125MHz</i>	<i>15, 30, 60kHz</i>
<i>FR2</i>	<i>24250MHz – 52600MHz</i>	<i>60, 120, 240kHz</i>

[106] FIG. 4 illustrates an example of protocol stacks in a 3GPP based wireless communication system.

[107] In particular, FIG. 4(a) illustrates an example of a radio interface user plane protocol stack between a UE and a base station (BS) and FIG. 4(b) illustrates an example of a radio interface control plane protocol stack between a UE and a BS. The control plane refers to a path through which control messages used to manage call by a UE and a network are transported. The user plane refers to a path through which data generated in an application layer, for example, voice data or Internet packet data are transported. Referring to FIG. 4(a), the user plane protocol stack may be divided into a first layer (Layer 1) (i.e., a physical (PHY) layer) and a second layer (Layer 2). Referring to FIG. 4(b), the control plane protocol stack may be divided into Layer 1 (i.e., a PHY layer), Layer 2, Layer 3 (e.g., a radio resource control (RRC) layer), and a non-access stratum (NAS) layer. Layer 1, Layer 2 and Layer 3 are referred to as an access stratum (AS).

[108] The NAS control protocol is terminated in an access management function (AMF) on the network side, and performs functions such as authentication, mobility management, security control and etc.

[109] In the 3GPP LTE system, the layer 2 is split into the following sublayers: medium access control (MAC), radio link control (RLC), and packet data convergence protocol (PDCP). In the 3GPP New Radio (NR) system, the layer 2 is split into the following sublayers: MAC, RLC, PDCP and SDAP. The PHY layer offers to the MAC sublayer transport channels, the MAC sublayer offers to the RLC sublayer logical channels, the RLC sublayer offers to the PDCP sublayer RLC channels, the PDCP sublayer offers to the SDAP sublayer radio bearers. The SDAP sublayer offers to 5G Core Network quality of service (QoS) flows.

[110] In the 3GPP NR system, the main services and functions of SDAP include: mapping between a QoS flow and a data radio bearer; marking QoS flow ID (QFI) in both DL

and UL packets. A single protocol entity of SDAP is configured for each individual PDU session.

- [111] In the 3GPP NR system, the main services and functions of the RRC sublayer include: broadcast of system information related to AS and NAS; paging initiated by 5G core (5GC) or NG-RAN; establishment, maintenance and release of an RRC connection between the UE and NG-RAN; security functions including key management; establishment, configuration, maintenance and release of signalling radio bearers (SRBs) and data radio bearers (DRBs); mobility functions (including: handover and context transfer; UE cell selection and reselection and control of cell selection and reselection; Inter-RAT mobility); QoS management functions; UE measurement reporting and control of the reporting; detection of and recovery from radio link failure; NAS message transfer to/from NAS from/to UE.
- [112] In the 3GPP NR system, the main services and functions of the PDCP sublayer for the user plane include: sequence numbering; header compression and decompression: ROHC only; transfer of user data; reordering and duplicate detection; in-order delivery; PDCP PDU routing (in case of split bearers); retransmission of PDCP SDUs; ciphering, deciphering and integrity protection; PDCP SDU discard; PDCP re-establishment and data recovery for RLC AM; PDCP status reporting for RLC AM; duplication of PDCP PDUs and duplicate discard indication to lower layers. The main services and functions of the PDCP sublayer for the control plane include: sequence numbering; ciphering, deciphering and integrity protection; transfer of control plane data; reordering and duplicate detection; in-order delivery; duplication of PDCP PDUs and duplicate discard indication to lower layers.
- [113] The RLC sublayer supports three transmission modes: Transparent Mode (TM); Unacknowledged Mode (UM); and Acknowledged Mode (AM). The RLC configuration is per logical channel with no dependency on numerologies and/or transmission durations. In the 3GPP NR system, the main services and functions of the RLC sublayer depend on the transmission mode and include: Transfer of upper layer PDUs; sequence numbering independent of the one in PDCP (UM and AM); error correction through ARQ (AM only); segmentation (AM and UM) and re-segmentation (AM only) of RLC SDUs; reassembly of SDU (AM and UM); duplicate detection (AM only); RLC SDU discard (AM and UM); RLC re-establishment; protocol error detection (AM only).
- [114] In the 3GPP NR system, the main services and functions of the MAC sublayer include: mapping between logical channels and transport channels; multiplexing/demultiplexing of MAC SDUs belonging to one or different logical channels into/from transport blocks (TB) delivered to/from the physical layer on transport channels; scheduling information reporting; error correction through HARQ (one HARQ

entity per cell in case of carrier aggregation (CA)); priority handling between UEs by means of dynamic scheduling; priority handling between logical channels of one UE by means of logical channel prioritization; padding. A single MAC entity may support multiple numerologies, transmission timings and cells. Mapping restrictions in logical channel prioritization control which numerology(ies), cell(s), and transmission timing(s) a logical channel can use. Different kinds of data transfer services are offered by MAC. To accommodate different kinds of data transfer services, multiple types of logical channels are defined i.e. each supporting transfer of a particular type of information. Each logical channel type is defined by what type of information is transferred. Logical channels are classified into two groups: Control Channels and Traffic Channels. Control channels are used for the transfer of control plane information only, and traffic channels are used for the transfer of user plane information only. Broadcast Control Channel (BCCH) is a downlink logical channel for broadcasting system control information, paging Control Channel (PCCH) is a downlink logical channel that transfers paging information, system information change notifications and indications of ongoing PWS broadcasts, Common Control Channel (CCCH) is a logical channel for transmitting control information between UEs and network and used for UEs having no RRC connection with the network, and Dedicated Control Channel (DCCH) is a point-to-point bi-directional logical channel that transmits dedicated control information between a UE and the network and used by UEs having an RRC connection. Dedicated Traffic Channel (DTCH) is a point-to-point logical channel, dedicated to one UE, for the transfer of user information. A DTCH can exist in both uplink and downlink. In Downlink, the following connections between logical channels and transport channels exist: BCCH can be mapped to BCH; BCCH can be mapped to downlink shared channel (DL-SCH); PCCH can be mapped to PCH; CCCH can be mapped to DL-SCH; DCCH can be mapped to DL-SCH; and DTCH can be mapped to DL-SCH. In Uplink, the following connections between logical channels and transport channels exist: CCCH can be mapped to uplink shared channel (UL-SCH); DCCH can be mapped to UL-SCH; and DTCH can be mapped to UL-SCH.

[115] FIG. 5 illustrates a data flow example in the 3GPP NR system.

[116] In FIG. 5, “RB” denotes a radio bearer, and “H” denotes a header. Radio bearers are categorized into two groups: data radio bearers (DRB) for user plane data and signalling radio bearers (SRB) for control plane data. The MAC PDU is transmitted/received using radio resources through the PHY layer to/from an external device. The MAC PDU arrives to the PHY layer in the form of a transport block.

[117] In the PHY layer, the uplink transport channels UL-SCH and RACH are mapped to physical uplink shared channel (PUSCH) and physical random access channel

(PRACH), respectively, and the downlink transport channels DL-SCH, BCH and PCH are mapped to physical downlink shared channel (PDSCH), physical broadcast channel (PBCH) and PDSCH, respectively. In the PHY layer, uplink control information (UCI) is mapped to PUCCH, and downlink control information (DCI) is mapped to PDCCH. A MAC PDU related to UL-SCH is transmitted by a UE via a PUSCH based on an UL grant, and a MAC PDU related to DL-SCH is transmitted by a BS via a PDSCH based on a DL assignment.

[118] In order to transmit data unit(s) of the present disclosure on UL-SCH, a UE shall have uplink resources available to the UE. In order to receive data unit(s) of the present disclosure on DL-SCH, a UE shall have downlink resources available to the UE. The resource allocation includes time domain resource allocation and frequency domain resource allocation. In the present disclosure, uplink resource allocation is also referred to as uplink grant, and downlink resource allocation is also referred to as downlink assignment. An uplink grant is either received by the UE dynamically on PDCCH, in a Random Access Response, or configured to the UE semi-persistently by RRC. Downlink assignment is either received by the UE dynamically on the PDCCH, or configured to the UE semi-persistently by RRC signaling from the BS.

[119] In UL, the BS can dynamically allocate resources to UEs via the Cell Radio Network Temporary Identifier (C-RNTI) on PDCCH(s). A UE always monitors the PDCCH(s) in order to find possible grants for uplink transmission when its downlink reception is enabled (activity governed by discontinuous reception (DRX) when configured). In addition, with Configured Grants, the BS can allocate uplink resources for the initial HARQ transmissions to UEs. Two types of configured uplink grants are defined: Type 1 and Type 2. With Type 1, RRC directly provides the configured uplink grant (including the periodicity). With Type 2, RRC defines the periodicity of the configured uplink grant while PDCCH addressed to Configured Scheduling RNTI (CS-RNTI) can either signal and activate the configured uplink grant, or deactivate it; i.e. a PDCCH addressed to CS-RNTI indicates that the uplink grant can be implicitly reused according to the periodicity defined by RRC, until deactivated.

[120] In DL, the BS can dynamically allocate resources to UEs via the C-RNTI on PDCCH(s). A UE always monitors the PDCCH(s) in order to find possible assignments when its downlink reception is enabled (activity governed by DRX when configured). In addition, with Semi-Persistent Scheduling (SPS), the BS can allocate downlink resources for the initial HARQ transmissions to UEs: RRC defines the periodicity of the configured downlink assignments while PDCCH addressed to CS-RNTI can either signal and activate the configured downlink assignment, or deactivate it. In other words, a PDCCH addressed to CS-RNTI indicates that the downlink

assignment can be implicitly reused according to the periodicity defined by RRC, until deactivated.

[121] <Resource allocation by PDCCH (i.e. resource allocation by DCI)>

[122] PDCCH can be used to schedule DL transmissions on PDSCH and UL transmissions on PUSCH, where the downlink control information (DCI) on PDCCH includes: downlink assignments containing at least modulation and coding format (e.g., modulation and coding scheme (MCS) index IMCS), resource allocation, and hybrid-ARQ information related to DL-SCH; or uplink scheduling grants containing at least modulation and coding format, resource allocation, and hybrid-ARQ information related to UL-SCH. The size and usage of the DCI carried by one PDCCH are varied depending on DCI formats. For example, in the 3GPP NR system, DCI format 0_0 or DCI format 0_1 is used for scheduling of PUSCH in one cell, and DCI format 1_0 or DCI format 1_1 is used for scheduling of PDSCH in one cell.

[123] FIG. 6 illustrates an example of PDSCH time domain resource allocation by PDCCH, and an example of PUSCH time resource allocation by PDCCH.

[124] Downlink control information (DCI) carried by a PDCCH for scheduling PDSCH or PUSCH includes a value m for a row index $m+1$ to an allocation table for PDSCH or PUSCH. Either a predefined default PDSCH time domain allocation A, B or C is applied as the allocation table for PDSCH, or RRC configured `pdsch-TimeDomainAllocationList` is applied as the allocation table for PDSCH. Either a predefined default PUSCH time domain allocation A is applied as the allocation table for PUSCH, or the RRC configured `pusch-TimeDomainAllocationList` is applied as the allocation table for PUSCH. Which PDSCH time domain resource allocation configuration to apply and which PUSCH time domain resource allocation table to apply are determined according to a fixed/predefined rule (e.g. Table 5.1.2.1.1-1 in 3GPP TS 38.214 v15.3.0, Table 6.1.2.1.1-1 in 3GPP TS 38.214 v15.3.0).

[125] Each indexed row in PDSCH time domain allocation configurations defines the slot offset K_0 , the start and length indicator SLIV, or directly the start symbol S and the allocation length L , and the PDSCH mapping type to be assumed in the PDSCH reception. Each indexed row in PUSCH time domain allocation configurations defines the slot offset K_2 , the start and length indicator SLIV, or directly the start symbol S and the allocation length L , and the PUSCH mapping type to be assumed in the PUSCH reception. K_0 for PDSCH, or K_2 for PUSCH is the timing difference between a slot with a PDCCH and a slot with PDSCH or PUSCH corresponding to the PDCCH. SLIV is a joint indication of starting symbol S relative to the start of the slot with PDSCH or PUSCH, and the number L of consecutive symbols counting from the symbol S . For PDSCH/PUSCH mapping type, there are two mapping types: one is Mapping Type A where demodulation reference signal (DMRS) is positioned in 3rd or

4th symbol of a slot depending on the RRC signaling, and other one is Mapping Type B where DMRS is positioned in the first allocated symbol.

[126] The scheduling DCI includes the Frequency domain resource assignment field which provides assignment information on resource blocks used for PDSCH or PUSCH. For example, the Frequency domain resource assignment field may provide a UE with information on a cell for PDSCH or PUSCH transmission, information on a bandwidth part for PDSCH or PUSCH transmission, information on resource blocks for PDSCH or PUSCH transmission.

[127] <Resource allocation by RRC>

[128] As mentioned above, in uplink, there are two types of transmission without dynamic grant: configured grant Type 1 where an uplink grant is provided by RRC, and stored as configured grant; and configured grant Type 2 where an uplink grant is provided by PDCCH, and stored or cleared as configured uplink grant based on L1 signaling indicating configured uplink grant activation or deactivation. Type 1 and Type 2 are configured by RRC per serving cell and per BWP. Multiple configurations can be active simultaneously only on different serving cells. For Type 2, activation and deactivation are independent among the serving cells. For the same serving cell, the MAC entity is configured with either Type 1 or Type 2.

[129] A UE is provided with at least the following parameters via RRC signaling from a BS when the configured grant type 1 is configured:

[130] - cs-RNTI which is CS-RNTI for retransmission;

[131] - periodicity which provides periodicity of the configured grant Type 1;

[132] - timeDomainOffset which represents offset of a resource with respect to SFN=0 in time domain;

[133] - timeDomainAllocation value m which provides a row index $m+1$ pointing to an allocation table, indicating a combination of a start symbol S and length L and PUSCH mapping type;

[134] - frequencyDomainAllocation which provides frequency domain resource allocation; and

[135] - mcsAndTBS which provides IMCS representing the modulation order, target code rate and transport block size. Upon configuration of a configured grant Type 1 for a serving cell by RRC, the UE stores the uplink grant provided by RRC as a configured uplink grant for the indicated serving cell, and initialise or re-initialise the configured uplink grant to start in the symbol according to timeDomainOffset and S (derived from SLIV), and to reoccur with periodicity. After an uplink grant is configured for a configured grant Type 1, the UE considers that the uplink grant recurs associated with each symbol for which: $[(SFN * \text{numberOfSlotsPerFrame} (\text{numberOfSymbolsPerSlot}) + (\text{slot number in the frame} \times \text{numberOfSymbolsPerSlot}) + \text{symbol number in the}$

slot] = (timeDomainOffset * numberOfSymbolsPerSlot + S + N * periodicity) modulo (1024 * numberOfSlotsPerFrame * numberOfSymbolsPerSlot), for all N ≥ 0.

[136] A UE is provided with at least the following parameters via RRC signaling from a BS when the configured grant Type 2 is configured:

[137] - cs-RNTI which is CS-RNTI for activation, deactivation, and retransmission; and

[138] - periodicity which provides periodicity of the configured grant Type 2. The actual uplink grant is provided to the UE by the PDCCH (addressed to CS-RNTI). After an uplink grant is configured for a configured grant Type 2, the UE considers that the uplink grant recurs associated with each symbol for which: [(SFN * numberOfSlotsPerFrame * numberOfSymbolsPerSlot) + (slot number in the frame * numberOfSymbolsPerSlot) + symbol number in the slot] = [(SFN_{start time} * numberOfSlotsPerFrame * numberOfSymbolsPerSlot + slot_{start time} * numberOfSymbolsPerSlot + symbol_{start time}) + N * periodicity] modulo (1024 × numberOfSlotsPerFrame * numberOfSymbolsPerSlot), for all N ≥ 0, where SFN_{start time}, slot_{start time}, and symbol_{start time} are the SFN, slot, and symbol, respectively, of the first transmission opportunity of PUSCH where the configured uplink grant was (re-)initialised. numberOfSlotsPerFrame and numberOfSymbolsPerSlot refer to the number of consecutive slots per frame and the number of consecutive OFDM symbols per slot, respectively.

[139] For configured uplink grants, the HARQ Process ID associated with the first symbol of a UL transmission is derived from the following equation:

[140] HARQ Process ID = [floor(CURRENT_symbol/periodicity)] modulo nrofHARQ-Processes

[141] where CURRENT_symbol = (SFN × numberOfSlotsPerFrame × numberOfSymbolsPerSlot + slot number in the frame × numberOfSymbolsPerSlot + symbol number in the slot), and numberOfSlotsPerFrame and numberOfSymbolsPerSlot refer to the number of consecutive slots per frame and the number of consecutive symbols per slot, respectively as specified in TS 38.211. CURRENT_symbol refers to the symbol index of the first transmission occasion of a repetition bundle that takes place. A HARQ process is configured for a configured uplink grant if the configured uplink grant is activated and the associated HARQ process ID is less than nrofHARQ-Processes.

[142] For downlink, a UE may be configured with semi-persistent scheduling (SPS) per serving cell and per BWP by RRC signaling from a BS. Multiple configurations can be active simultaneously only on different serving cells. Activation and deactivation of the DL SPS are independent among the serving cells. For DL SPS, a DL assignment is provided to the UE by PDCCH, and stored or cleared based on L1 signaling indicating

SPS activation or deactivation. A UE is provided with the following parameters via RRC signaling from a BS when SPS is configured:

- [143] - cs-RNTI which is CS-RNTI for activation, deactivation, and retransmission;
- [144] - nrofHARQ-Processes: which provides the number of configured HARQ processes for SPS;
- [145] - periodicity which provides periodicity of configured downlink assignment for SPS.
- [146] When SPS is released by upper layers, all the corresponding configurations shall be released.

- [147] After a downlink assignment is configured for SPS, the UE considers sequentially that the N^{th} downlink assignment occurs in the slot for which: $(\text{numberOfSlotsPerFrame} * \text{SFN} + \text{slot number in the frame}) = [(\text{numberOfSlotsPerFrame} * \text{SFN}_{\text{start time}} + \text{slot}_{\text{start time}}) + N * \text{periodicity} * \text{numberOfSlotsPerFrame} / 10] \text{ modulo } (1024 * \text{numberOfSlotsPerFrame})$, where $\text{SFN}_{\text{start time}}$ and $\text{slot}_{\text{start time}}$ are the SFN and slot, respectively, of the first transmission of PDSCH where the configured downlink assignment was (re-)initialised.

- [148] For configured downlink assignments, the HARQ Process ID associated with the slot where the DL transmission starts is derived from the following equation:

- [149] $\text{HARQ Process ID} = [\text{floor}(\text{CURRENT_slot} \times 10 / (\text{numberOfSlotsPerFrame} \times \text{periodicity}))] \text{ modulo } \text{nrofHARQ-Processes}$

- [150] where $\text{CURRENT_slot} = [(\text{SFN} \times \text{numberOfSlotsPerFrame}) + \text{slot number in the frame}]$ and $\text{numberOfSlotsPerFrame}$ refers to the number of consecutive slots per frame as specified in TS 38.211.

- [151] A UE validates, for scheduling activation or scheduling release, a DL SPS assignment PDCCH or configured UL grant type 2 PDCCH if the cyclic redundancy check (CRC) of a corresponding DCI format is scrambled with CS-RNTI provided by the RRC parameter cs-RNTI and the new data indicator field for the enabled transport block is set to 0. Validation of the DCI format is achieved if all fields for the DCI format are set according to Table 4 or Table 5. Table 4 shows special fields for DL SPS and UL grant Type 2 scheduling activation PDCCH validation, and Table 5 shows special fields for DL SPS and UL grant Type 2 scheduling release PDCCH validation.

- [152] [Table 4]

	DCI format 0_0/0_1	DCI format 1_0	DCI format 1_1
HARQ process number	set to all '0's	set to all '0's	set to all '0's
Redundancy version	set to '00'	set to '00'	For the enabled transport block: set to '00'

- [153] [Table 5]

	DCI format 0_0	DCI format 1_0
HARQ process number	set to all '0's	set to all '0's
Redundancy version	set to '00'	set to '00'
Modulation and coding scheme	set to all '1's	set to all '1's
Resource block assignment	set to all '1's	set to all '1's

- [154] Actual DL assignment and actual UL grant, and the corresponding modulation and coding scheme are provided by the resource assignment fields (e.g. time domain resource assignment field which provides Time domain resource assignment value m , frequency domain resource assignment field which provides the frequency resource block allocation, modulation and coding scheme field) in the DCI format carried by the DL SPS and UL grant Type 2 scheduling activation PDCCH. If validation is achieved, the UE considers the information in the DCI format as valid activation or valid release of DL SPS or configured UL grant Type 2.
- [155] For UL, the processor(s) 102 of the present disclosure may transmit (or control the transceiver(s) 106 to transmit) the data unit of the present disclosure based on the UL grant available to the UE. The processor(s) 202 of the present disclosure may receive (or control the transceiver(s) 206 to receive) the data unit of the present disclosure based on the UL grant available to the UE.
- [156] For DL, the processor(s) 102 of the present disclosure may receive (or control the transceiver(s) 106 to receive) DL data of the present disclosure based on the DL assignment available to the UE. The processor(s) 202 of the present disclosure may transmit (or control the transceiver(s) 206 to transmit) DL data of the present disclosure based on the DL assignment available to the UE.
- [157] The data unit(s) of the present disclosure is(are) subject to the physical layer processing at a transmitting side before transmission via radio interface, and the radio signals carrying the data unit(s) of the present disclosure are subject to the physical layer processing at a receiving side. For example, a MAC PDU including the PDCP PDU according to the present disclosure may be subject to the physical layer processing as follows.
- [158] FIG. 7 illustrates an example of physical layer processing at a transmitting side.
- [159] The following tables show the mapping of the transport channels (TrCHs) and control information to its corresponding physical channels. In particular, Table 6 specifies the mapping of the uplink transport channels to their corresponding physical channels, Table 7 specifies the mapping of the uplink control channel information to its corresponding physical channel, Table 8 specifies the mapping of the downlink transport channels to their corresponding physical channels, and Table 9 specifies the mapping of the downlink control channel information to its corresponding physical channel.

[160] [Table 6]

TrCH	Physical Channel
UL-SCH	PUSCH
RACH	PRACH

[161] [Table 7]

Control information	Physical Channel
UCI	PUCCH, PUSCH

[162] [Table 8]

TrCH	Physical Channel
DL-SCH	PDSCH
BCH	PBCH
PCH	PDSCH

[163] [Table 9]

Control information	Physical Channel
DCI	PDCCH

[164] <Encoding>

[165] Data and control streams from/to MAC layer are encoded to offer transport and control services over the radio transmission link in the PHY layer. For example, a transport block from MAC layer is encoded into a codeword at a transmitting side. Channel coding scheme is a combination of error detection, error correcting, rate matching, interleaving and transport channel or control information mapping onto/splitting from physical channels.

[166] In the 3GPP NR system, following channel coding schemes are used for the different types of TrCH and the different control information types.

[167] [Table 10]

TrCH	Coding scheme
UL-SCH	LDPC
DL-SCH	
PCH	
BCH	Polar code

[168] [Table 11]

Control Information	Coding scheme
DCI	Polar code
UCI	Block code
	Polar code

[169] For transmission of a DL transport block (i.e. a DL MAC PDU) or a UL transport block (i.e. a UL MAC PDU), a transport block CRC sequence is attached to provide error detection for a receiving side. In the 3GPP NR system, the communication device uses low density parity check (LDPC) codes in encoding/decoding UL-SCH and DL-SCH. The 3GPP NR system supports two LDPC base graphs (i.e. two LDPC base matrixes): LDPC base graph 1 optimized for small transport blocks and LDPC base graph 2 for larger transport blocks. Either LDPC base graph 1 or 2 is selected based

on the size of the transport block and coding rate R . The coding rate R is indicated by the modulation coding scheme (MCS) index IMCS. The MCS index is dynamically provided to a UE by PDCCH scheduling PUSCH or PDSCH, provided to a UE by PDCCH activating or (re-)initializing the UL configured grant 2 or DL SPS, or provided to a UE by RRC signaling related to the UL configured grant Type 1. If the CRC attached transport block is larger than the maximum code block size for the selected LDPC base graph, the CRC attached transport block may be segmented into code blocks, and an additional CRC sequence is attached to each code block. The maximum code block sizes for the LDPC base graph 1 and the LDPC base graph 2 are 8448 bits and 3480 bits, respectively. If the CRC attached transport block is not larger than the maximum code block size for the selected LDPC base graph, the CRC attached transport block is encoded with the selected LDPC base graph. Each code block of the transport block is encoded with the selected LDPC base graph. The LDPC coded blocks are then individually rate matched. Code block concatenation is performed to create a codeword for transmission on PDSCH or PUSCH. For PDSCH, up to 2 codewords (i.e. up to 2 transport blocks) can be transmitted simultaneously on the PDSCH. PUSCH can be used for transmission of UL-SCH data and layer 1/2 control information. Although not shown in FIG. 8, the layer 1/2 control information may be multiplexed with the codeword for UL-SCH data.

[170] <Scrambling and modulation>

[171] The bits of the codeword are scrambled and modulated to generate a block of complex-valued modulation symbols.

[172] <Layer mapping>

[173] The complex-valued modulation symbols of the codeword are mapped to one or more multiple input multiple output (MIMO) layers. A codeword can be mapped to up to 4 layers. A PDSCH can carry two codewords, and thus a PDSCH can support up to 8-layer transmission. A PUSCH supports a single codeword, and thus a PUSCH can support up to 4-layer transmission.

[174] <Transform precoding>

[175] The DL transmission waveform is conventional OFDM using a cyclic prefix (CP). For DL, transform precoding (in other words, discrete Fourier transform (DFT)) is not applied.

[176] The UL transmission waveform is conventional OFDM using a CP with a transform precoding function performing DFT spreading that can be disabled or enabled. In the 3GPP NR system, for UL, the transform precoding can be optionally applied if enabled. The transform precoding is to spread UL data in a special way to reduce peak-to-average power ratio (PAPR) of the waveform. The transform precoding is a form of DFT. In other words, the 3GPP NR system supports two options for UL

waveform: one is CP-OFDM (same as DL waveform) and the other one is DFT-s-OFDM. Whether a UE has to use CP-OFDM or DFT-s-OFDM is configured by a BS via RRC parameters.

[177] <Subcarrier mapping>

[178] The layers are mapped to antenna ports. In DL, for the layers to antenna ports mapping, a transparent manner (non-codebook based) mapping is supported and how beamforming or MIMO precoding is performed is transparent to the UE. In UL, for the layers to antenna ports mapping, both the non-codebook based mapping and a codebook based mapping are supported.

[179] For each antenna port (i.e. layer) used for transmission of the physical channel (e.g. PDSCH, PUSCH), the complex-valued modulation symbols are mapped to subcarriers in resource blocks allocated to the physical channel.

[180] <OFDM modulation>

[181] The communication device at the transmitting side generates a time-continuous OFDM baseband signal on antenna port p and subcarrier spacing configuration u for OFDM symbol l in a TTI for a physical channel by adding a cyclic prefix (CP) and performing IFFT. For example, for each OFDM symbol, the communication device at the transmitting side may perform inverse fast Fourier transform (IFFT) on the complex-valued modulation symbols mapped to resource blocks in the corresponding OFDM symbol and add a CP to the IFFT-ed signal to generate the OFDM baseband signal.

[182] <Up-conversion>

[183] The communication device at the transmitting side up-converts the OFDM baseband signal for antenna port p , subcarrier spacing configuration u and OFDM symbol l to a carrier frequency f_0 of a cell to which the physical channel is assigned.

[184] The processors 102 and 202 in FIG. 2 may be configured to perform encoding, scrambling, modulation, layer mapping, transform precoding (for UL), subcarrier mapping, and OFDM modulation. The processors 102 and 202 may control the transceivers 106 and 206 connected to the processors 102 and 202 to up-convert the OFDM baseband signal onto the carrier frequency to generate radio frequency (RF) signals. The radio frequency signals are transmitted through antennas 108 and 208 to an external device.

[185] FIG. 8 illustrates an example of physical layer processing at a receiving side.

[186] The physical layer processing at the receiving side is basically the inverse processing of the physical layer processing at the transmitting side.

[187] <Frequency down-conversion>

[188] The communication device at a receiving side receives RF signals at a carrier frequency through antennas. The transceivers 106 and 206 receiving the RF signals at

the carrier frequency down-converts the carrier frequency of the RF signals into the baseband in order to obtain OFDM baseband signals.

[189] <OFDM demodulation>

[190] The communication device at the receiving side obtains complex-valued modulation symbols via CP detachment and FFT. For example, for each OFDM symbol, the communication device at the receiving side removes a CP from the OFDM baseband signals and performs FFT on the CP-removed OFDM baseband signals to obtain complex-valued modulation symbols for antenna port p , subcarrier spacing u and OFDM symbol l .

[191] <Subcarrier demapping>

[192] The subcarrier demapping is performed on the complex-valued modulation symbols to obtain complex-valued modulation symbols of a corresponding physical channel. For example, the processor(s) 102 may obtain complex-valued modulation symbols mapped to subcarriers belong to PDSCH from among complex-valued modulation symbols received in a bandwidth part. For another example, the processor(s) 202 may obtain complex-valued modulation symbols mapped to subcarriers belong to PUSCH from among complex-valued modulation symbols received in a bandwidth part.

[193] <Transform de-precoding>

[194] Transform de-precoding (e.g. IDFT) is performed on the complex-valued modulation symbols of the uplink physical channel if the transform precoding has been enabled for the uplink physical channel. For the downlink physical channel and for the uplink physical channel for which the transform precoding has been disabled, the transform de-precoding is not performed.

[195] <Layer demapping>

[196] The complex-valued modulation symbols are de-mapped into one or two codewords.

[197] <Demodulation and descrambling>

[198] The complex-valued modulation symbols of a codeword are demodulated and descrambled into bits of the codeword.

[199] <Decoding>

[200] The codeword is decoded into a transport block. For UL-SCH and DL-SCH, either LDPC base graph 1 or 2 is selected based on the size of the transport block and coding rate R . The codeword may include one or multiple coded blocks. Each coded block is decoded with the selected LDPC base graph into a CRC-attached code block or CRC-attached transport block. If code block segmentation was performed on a CRC-attached transport block at the transmitting side, a CRC sequence is removed from each of CRC-attached code blocks, whereby code blocks are obtained. The code blocks are concatenated into a CRC-attached transport block. The transport block CRC

sequence is removed from the CRC-attached transport block, whereby the transport block is obtained. The transport block is delivered to the MAC layer.

- [201] In the above described physical layer processing at the transmitting and receiving sides, the time and frequency domain resources (e.g. OFDM symbol, subcarriers, carrier frequency) related to subcarrier mapping, OFDM modulation and frequency up/down conversion can be determined based on the resource allocation (e.g., UL grant, DL assignment).
- [202] For uplink data transmission, the processor(s) 102 of the present disclosure may apply (or control the transceiver(s) 106 to apply) the above described physical layer processing of the transmitting side to the data unit of the present disclosure to transmit the data unit wirelessly. For downlink data reception, the processor(s) 102 of the present disclosure may apply (or control the transceiver(s) 106 to apply) the above described physical layer processing of the receiving side to received radio signals to obtain the data unit of the present disclosure.
- [203] For downlink data transmission, the processor(s) 202 of the present disclosure may apply (or control the transceiver(s) 206 to apply) the above described physical layer processing of the transmitting side to the data unit of the present disclosure to transmit the data unit wirelessly. For uplink data reception, the processor(s) 202 of the present disclosure may apply (or control the transceiver(s) 206 to apply) the above described physical layer processing of the receiving side to received radio signals to obtain the data unit of the present disclosure.
- [204]
- [205] <Logical channel prioritization (LCP)>
- [206] Hereinafter, Logical channel prioritization in the NR system is described.
- [207] The Logical Channel Prioritization procedure is applied when a new transmission is performed. RRC controls the scheduling of uplink data by signalling for each logical channel: priority where an increasing priority value indicates a lower priority level, prioritisedBitRate which sets the Prioritized Bit Rate (PBR), bucketSizeDuration which sets the Bucket Size Duration (BSD).
- [208] The MAC entity shall maintain a variable B_j for each logical channel j . The value of B_j can be negative.
- [209] The MAC entity shall initialize B_j of the logical channel to zero when the logical channel is established.
- [210] For each logical channel j , the MAC entity shall increment B_j by the product $PBR \times T$ before every instance of the LCP procedure, where T is the time elapsed since B_j was last incremented.
- [211] If the value of B_j is greater than the bucket size (i.e. $PBR \times BSD$), the MAC entity shall set B_j to the bucket size.

- [212] When a new transmission is performed, the MAC entity shall allocate resources to the logical channels as follows:
- [213] - logical channels selected for the UL grant with $B_j > 0$ are allocated resources in a decreasing priority order. If the PBR of a logical channel is set to infinity, the MAC entity shall allocate resources for all the data that is available for transmission on the logical channel before meeting the PBR of the lower priority logical channel(s);
- [214] - decrement B_j by the total size of MAC SDUs served to logical channel j above;
- [215] - if any resources remain, all the logical channels selected are served in a strict decreasing priority order (regardless of the value of B_j) until either the data for that logical channel or the UL grant is exhausted, whichever comes first. Logical channels configured with equal priority should be served equally.
- [216] If the MAC entity is requested to simultaneously transmit multiple MAC PDUs, or if the MAC entity receives the multiple UL grants within one or more coinciding PDCCH occasions (i.e. on different Serving Cells), it is up to UE implementation in which order the grants are processed.
- [217] The UE shall also follow the rules a) ~ d) below during the scheduling procedures above:
- [218] a) the UE should not segment an RLC SDU (or partially transmitted SDU or retransmitted RLC PDU) if the whole SDU (or partially transmitted SDU or retransmitted RLC PDU) fits into the remaining resources of the associated MAC entity;
- [219] b) if the UE segments an RLC SDU from the logical channel, it shall maximize the size of the segment to fill the grant of the associated MAC entity as much as possible;
- [220] c) the UE should maximise the transmission of data;
- [221] d) if the MAC entity is given a UL grant size that is equal to or larger than 8 bytes (when eLCID is not used) or 10 bytes (when eLCID is used) while having data available and for transmission, the MAC entity shall not transmit only padding BSR and/or padding.
- [222] When the MAC entity is configured with `enhancedSkipUplinkTxDynamic` with value true and the grant indicated to the HARQ entity was addressed to a C-RNTI, or if the MAC entity is configured with `enhancedSkipUplinkTxConfigured` with value true and the grant indicated to the HARQ entity is a configured uplink grant, if there is no UCI to be multiplexed on this PUSCH transmission; and if there is no aperiodic CSI requested for this PUSCH transmission; and if the MAC PDU includes zero MAC SDUs; and if the MAC PDU includes only the periodic BSR and there is no data available for any LCG, or the MAC PDU includes only the padding BSR, the MAC entity shall not generate a MAC PDU for the HARQ entity.

[223] Else if the MAC entity is configured with skipUplinkTxDynamic with value true and the grant indicated to the HARQ entity was addressed to a C-RNTI, or the grant indicated to the HARQ entity is a configured uplink grant; and if there is no aperiodic CSI requested for this PUSCH transmission; and if the MAC PDU includes zero MAC SDUs; and if the MAC PDU includes only the periodic BSR and there is no data available for any LCG, or the MAC PDU includes only the padding BSR, the MAC entity shall not generate a MAC PDU for the HARQ entity.

[224]

[225] <Buffer Status Reporting (BSR)>

[226] Hereinafter, the buffer status reporting (BSR) in NR system is described.

[227] The BSR procedure is used to provide the serving gNB with information about UL data volume in the MAC entity.

[228] The RRC configures the following parameters to control the BSR:

[229] - periodicBSR-Timer;

[230] - retxBSR-Timer;

[231] - logicalChannelSR-DelayTimerApplied;

[232] - logicalChannelSR-DelayTimer;

[233] - logicalChannelSR-Mask;

[234] - logicalChannelGroup.

[235] Each logical channel may be allocated to an LCG using the logicalChannelGroup. The maximum number of LCGs is eight. The MAC entity determines the amount of UL data available for a logical channel according to the data volume calculation procedure according to 3GPP TS 38.322 and 3GPP TS 38.323 which are above mentioned.

[236] A BSR shall be triggered if any of the following events 1)-4) occur:

[237] 1) UL data, for a logical channel which belongs to an LCG, becomes available to the MAC entity; and either this UL data belongs to a logical channel with higher priority than the priority of any logical channel containing available UL data which belong to any LCG or none of the logical channels which belong to an LCG contains any available UL data. In this case, the BSR is referred below to as 'Regular BSR';

[238] 2) UL resources are allocated and number of padding bits is equal to or larger than the size of the Buffer Status Report MAC CE plus its sub-header, in which case the BSR is referred below to as 'Padding BSR';

[239] 3) retxBSR-Timer expires, and at least one of the logical channels which belong to an LCG contains UL data, in which case the BSR is referred below to as 'Regular BSR';

[240] 4) periodicBSR-Timer expires, in which case the BSR is referred below to as 'Periodic BSR'.

- [241] Especially, when Regular BSR triggering events occur for multiple logical channels simultaneously, each logical channel triggers one separate Regular BSR.
- [242] For Regular BSR, the MAC entity shall start or restart the logicalChannelSR-DelayTimer if the BSR is triggered for a logical channel for which logicalChannelSR-DelayTimerApplied is configured by upper layers. Else, when the logicalChannelSR-DelayTimer is running, the MAC entity shall stop the logicalChannelSR-DelayTimer.
- [243] For Regular and Periodic BSR, the MAC entity shall report Long BSR for all LCGs which have data available for transmission, if more than one LCG has data available for transmission when the MAC PDU containing the BSR is to be built. Else, the MAC entity shall report Short BSR.
- [244] For Padding BSR, if the number of padding bits is equal to or larger than the size of the Short BSR plus its sub-header but smaller than the size of the Long BSR plus its sub-header, and if more than one LCG has data available for transmission when the BSR is to be built, and if the number of padding bits is equal to the size of the Short BSR plus its sub-header, the MAC entity shall report Short Truncated BSR of the LCG with the highest priority logical channel with data available for transmission. However, if the number of padding bits is not equal to the size of the Short BSR plus its sub-header, the MAC entity shall report Long Truncated BSR of the LCG(s) with the logical channels having data available for transmission following a decreasing order of the highest priority logical channel (with or without data available for transmission) in each of these LCG(s), and in case of equal priority, in increasing order of LCGID.
- [245] Further, if more than one LCG does not have data available for transmission when the BSR is to be built, the MAC entity shall report Short BSR. Finally, else if the number of padding bits is equal to or larger than the size of the Long BSR plus its sub-header, the MAC entity shall report Long BSR for all LCGs which have data available for transmission.
- [246] For BSR triggered by retxBSR-Timer expiry, the MAC entity considers that the logical channel that triggered the BSR is the highest priority logical channel that has data available for transmission at the time the BSR is triggered.
- [247] If the Buffer Status reporting procedure determines that at least one BSR has been triggered and not cancelled, and if UL-SCH resources are available for a new transmission and the UL-SCH resources can accommodate the BSR MAC CE plus its sub-header as a result of logical channel prioritization, the MAC entity shall instruct the Multiplexing and Assembly procedure to generate the BSR MAC CE(s), start (or restart) periodicBSR-Timer except when all the generated BSRs are long or short Truncated BSRs, and start (or restart) retxBSR-Timer. However, if a Regular BSR has been triggered and logicalChannelSR-DelayTimer is not running, when there is no UL-SCH resource available for a new transmission, or when the MAC entity is

configured with configured uplink grant(s) and the Regular BSR was triggered for a logical channel for which logicalChannelSR-Mask is set to false; or when the UL-SCH resources available for a new transmission do not meet the LCP mapping restrictions configured for the logical channel that triggered the BSR, the MAC entity shall trigger a Scheduling Request.

- [248] UL-SCH resources are considered available if the MAC entity has an active configuration for either type of configured uplink grants, or if the MAC entity has received a dynamic uplink grant, or if both of these conditions are met. If the MAC entity has determined at a given point in time that UL-SCH resources are available, this need not imply that UL-SCH resources are available for use at that point in time.
- [249] A MAC PDU shall contain at most one BSR MAC CE, even when multiple events have triggered a BSR. The Regular BSR and the Periodic BSR shall have precedence over the padding BSR.
- [250] The MAC entity shall restart retxBSR-Timer upon reception of a grant for transmission of new data on any UL-SCH.
- [251] All triggered BSRs may be cancelled when the UL grant(s) can accommodate all pending data available for transmission but is not sufficient to additionally accommodate the BSR MAC CE plus its sub-header. All BSRs triggered prior to MAC PDU assembly shall be cancelled when a MAC PDU is transmitted and this PDU includes a Long or Short BSR MAC CE which contains buffer status up to (and including) the last event that triggered a BSR prior to the MAC PDU assembly.
- [252] MAC PDU assembly can happen at any point in time between uplink grant reception and actual transmission of the corresponding MAC PDU. BSR and SR can be triggered after the assembly of a MAC PDU which contains a BSR MAC CE, but before the transmission of this MAC PDU. In addition, BSR and SR can be triggered during MAC PDU assembly.
- [253]
- [254] <BSR MAC CE>
- [255] Buffer Status Report (BSR) MAC CEs consist of either Short BSR format (fixed size); or Long BSR format (variable size); or Short Truncated BSR format (fixed size); or Long Truncated BSR format (variable size). The BSR formats are identified by MAC subheaders with LCIDs.
- [256] FIG. 9 shows a Short BSR MAC CE and a Short Truncated BSR MAC CE according to the NR system. Further, FIG. 10 shows a Long BSR MAC CE and a Long Truncated BSR MAC CE according to the NR system.
- [257] Referring to FIG. 9 and FIG. 10, the fields in the BSR MAC CE are defined as follows:

- [258] - LCG ID: The Logical Channel Group ID field identifies the group of logical channel(s) whose buffer status is being reported. The length of the field is 3 bits;
- [259] - LCGi: For the Long BSR format, this field indicates the presence of the Buffer Size field for the logical channel group i. The LCGi field set to 1 indicates that the Buffer Size field for the logical channel group i is reported. The LCGi field set to 0 indicates that the Buffer Size field for the logical channel group i is not reported. For the Long Truncated BSR format, this field indicates whether logical channel group i has data available. The LCGi field set to 1 indicates that logical channel group i has data available. The LCGi field set to 0 indicates that logical channel group i does not have data available;
- [260] - Buffer Size: The Buffer Size (BS) field identifies the total amount of data available according to the data volume calculation procedure across all logical channels of a logical channel group after the MAC PDU has been built (i.e., after the logical channel prioritization procedure, which may result the value of the Buffer Size field to zero).
- [261] The amount of data is indicated in number of bytes. The size of the RLC headers and MAC subheaders are not considered in the buffer size computation. The length of this field for the Short BSR format and the Short Truncated BSR format is 5 bits. The length of this field for the Long BSR format and the Long Truncated BSR format is 8 bits.
- [262] The values for the 5-bit and 8-bit Buffer Size fields are shown in Table 12 and Table 13, respectively. For the Long BSR format and the Long Truncated BSR format, the Buffer Size fields are included in ascending order based on the LCGi. For the Long Truncated BSR format the number of Buffer Size fields included is maximized, while not exceeding the number of padding bits.

[263] [Table 12]

Index	BS value	Index	BS value	Index	BS value	Index	BS value
0	0	8	≤ 102	16	≤ 1446	24	≤ 20516
1	≤ 10	9	≤ 142	17	≤ 2014	25	≤ 28581
2	≤ 14	10	≤ 198	18	≤ 2806	26	≤ 39818
3	≤ 20	11	≤ 276	19	≤ 3909	27	≤ 55474
4	≤ 28	12	≤ 384	20	≤ 5446	28	≤ 77284
5	≤ 38	13	≤ 535	21	≤ 7587	29	≤ 107669
6	≤ 53	14	≤ 745	22	≤ 10570	30	≤ 150000
7	≤ 74	15	≤ 1038	23	≤ 14726	31	>150000

[264] [Table 13]

Index	BS value	Index	BS value	Index	BS value	Index	BS value
0	0	64	≤ 560	128	≤ 31342	192	≤ 1754595
1	≤ 10	65	≤ 597	129	≤ 33376	193	≤ 1868488
2	≤ 11	66	≤ 635	130	≤ 35543	194	≤ 1989774
3	≤ 12	67	≤ 677	131	≤ 37850	195	≤ 2118933
4	≤ 13	68	≤ 720	132	≤ 40307	196	≤ 2256475
5	≤ 14	69	≤ 767	133	≤ 42923	197	≤ 2402946
6	≤ 15	70	≤ 817	134	≤ 45709	198	≤ 2558924
7	≤ 16	71	≤ 870	135	≤ 48676	199	≤ 2725027
8	≤ 17	72	≤ 926	136	≤ 51836	200	≤ 2901912
9	≤ 18	73	≤ 987	137	≤ 55200	201	≤ 3090279
10	≤ 19	74	≤ 1051	138	≤ 58784	202	≤ 3290873
11	≤ 20	75	≤ 1119	139	≤ 62599	203	≤ 3504487
12	≤ 22	76	≤ 1191	140	≤ 66663	204	≤ 3731968
13	≤ 23	77	≤ 1269	141	≤ 70990	205	≤ 3974215
14	≤ 25	78	≤ 1351	142	≤ 75598	206	≤ 4232186
15	≤ 26	79	≤ 1439	143	≤ 80505	207	≤ 4506902
16	≤ 28	80	≤ 1532	144	≤ 85730	208	≤ 4799451
17	≤ 30	81	≤ 1631	145	≤ 91295	209	≤ 5110989
18	≤ 32	82	≤ 1737	146	≤ 97221	210	≤ 5442750
19	≤ 34	83	≤ 1850	147	≤ 103532	211	≤ 5796046
20	≤ 36	84	≤ 1970	148	≤ 110252	212	≤ 6172275
21	≤ 38	85	≤ 2098	149	≤ 117409	213	≤ 6572925
22	≤ 40	86	≤ 2234	150	≤ 125030	214	≤ 6999582
23	≤ 43	87	≤ 2379	151	≤ 133146	215	≤ 7453933
24	≤ 46	88	≤ 2533	152	≤ 141789	216	≤ 7937777
25	≤ 49	89	≤ 2698	153	≤ 150992	217	≤ 8453028
26	≤ 52	90	≤ 2873	154	≤ 160793	218	≤ 9001725
27	≤ 55	91	≤ 3059	155	≤ 171231	219	≤ 9586039
28	≤ 59	92	≤ 3258	156	≤ 182345	220	≤ 10208280

29	≤62	93	≤ 3469	157	≤ 194182	221	≤ 10870913
30	≤66	94	≤ 3694	158	≤ 206786	222	≤ 11576557
31	≤71	95	≤ 3934	159	≤ 220209	223	≤ 12328006
32	≤75	96	≤ 4189	160	≤ 234503	224	≤ 13128233
33	≤80	97	≤ 4461	161	≤ 249725	225	≤ 13980403
34	≤85	98	≤ 4751	162	≤ 265935	226	≤ 14887889
35	≤91	99	≤ 5059	163	≤ 283197	227	≤ 15854280
36	≤97	100	≤ 5387	164	≤ 301579	228	≤ 16883401
37	≤103	101	≤ 5737	165	≤ 321155	229	≤ 17979324
38	≤110	102	≤ 6109	166	≤ 342002	230	≤ 19146385
39	≤117	103	≤ 6506	167	≤ 364202	231	≤ 20389201
40	≤124	104	≤ 6928	168	≤ 387842	232	≤ 21712690
41	≤132	105	≤ 7378	169	≤ 413018	233	≤ 23122088
42	≤141	106	≤ 7857	170	≤ 439827	234	≤ 24622972
43	≤150	107	≤ 8367	171	≤ 468377	235	≤ 26221280
44	≤160	108	≤ 8910	172	≤ 498780	236	≤ 27923336
45	≤170	109	≤ 9488	173	≤ 531156	237	≤ 29735875
46	≤181	110	≤ 10104	174	≤ 565634	238	≤ 31666069
47	≤193	111	≤ 10760	175	≤ 602350	239	≤ 33721553
48	≤205	112	≤ 11458	176	≤ 641449	240	≤ 35910462
49	≤218	113	≤ 12202	177	≤ 683087	241	≤ 38241455
50	≤233	114	≤ 12994	178	≤ 727427	242	≤ 40723756
51	≤248	115	≤ 13838	179	≤ 774645	243	≤ 43367187
52	≤264	116	≤ 14736	180	≤ 824928	244	≤ 46182206
53	≤281	117	≤ 15692	181	≤ 878475	245	≤ 49179951
54	≤299	118	≤ 16711	182	≤ 935498	246	≤ 52372284
55	≤318	119	≤ 17795	183	≤ 996222	247	≤ 55771835
56	≤339	120	≤ 18951	184	≤ 1060888	248	≤ 59392055
57	≤361	121	≤ 20181	185	≤ 1129752	249	≤ 63247269
58	≤384	122	≤ 21491	186	≤ 1203085	250	≤ 67352729

59	≤ 409	123	≤ 22885	187	≤ 1281179	251	≤ 71724679
60	≤ 436	124	≤ 24371	188	≤ 1364342	252	≤ 76380419
61	≤ 464	125	≤ 25953	189	≤ 1452903	253	≤ 81338368
62	≤ 494	126	≤ 27638	190	≤ 1547213	254	> 81338368
63	≤ 526	127	≤ 29431	191	≤ 1647644	255	Reserved

[265]

[266] <Discontinuous reception (DRX) operations>

[267] Hereinafter, discontinuous reception (DRX) operations are described.

[268] The MAC entity may be configured by RRC with a DRX functionality that controls the UE's PDCCH monitoring activity for the MAC entity's C-RNTI, CI-RNTI, CS-RNTI, INT-RNTI, SFI-RNTI, SP-CSI-RNTI, TPC-PUCCH-RNTI, TPC-PUSCH-RNTI, TPC-SRS-RNTI, and AI-RNTI.

[269] When using DRX operation, the MAC entity shall also monitor PDCCH. When in RRC_CONNECTED, if DRX is configured, for all the activated Serving Cells, the MAC entity may monitor the PDCCH discontinuously using the DRX operation; otherwise, the MAC entity shall monitor the PDCCH.

[270] RRC controls DRX operation by configuring the following parameters in Table 14:

[271] [Table 14]

- drx-onDurationTimer: the duration at the beginning of a DRX cycle;
- drx-SlotOffset: the delay before starting the drx-onDurationTimer;
- drx-InactivityTimer: the duration after the PDCCH occasion in which a PDCCH indicates a new UL or DL transmission for the MAC entity;
- drx-RetransmissionTimerDL (per DL HARQ process except for the broadcast process): the maximum duration until a DL retransmission is received;
- drx-RetransmissionTimerUL (per UL HARQ process): the maximum duration until a grant for UL retransmission is received;
- drx-LongCycleStartOffset: the Long DRX cycle and drx-StartOffset which defines the subframe where the Long and Short DRX cycle starts;
- drx-ShortCycle (optional): the Short DRX cycle;
- drx-ShortCycleTimer (optional): the duration the UE shall follow the Short DRX cycle;
- drx-HARQ-RTT-TimerDL (per DL HARQ process except for the broadcast process): the minimum duration before a DL assignment for HARQ retransmission is expected by the MAC entity;
- drx-HARQ-RTT-TimerUL (per UL HARQ process): the minimum duration before a UL HARQ retransmission grant is expected by the MAC entity;

- [272] Serving Cells of a MAC entity may be configured by RRC in two DRX groups with separate DRX parameters. When RRC does not configure a secondary DRX group, there is only one DRX group and all Serving Cells belong to that one DRX group. When two DRX groups are configured, each Serving Cell is uniquely assigned to either of the two groups.
- [273] When DRX is configured, the Active Time for Serving Cells in a DRX group includes the time while:
- [274] - drx-onDurationTimer or drx-InactivityTimer configured for the DRX group is running; or
- [275] - drx-RetransmissionTimerDL or drx-RetransmissionTimerUL is running on any Serving Cell in the DRX group.
- [276] When DRX is configured, if a MAC PDU is received in a configured downlink assignment, the MAC entity shall start the drx-HARQ-RTT-TimerDL for the corresponding HARQ process in the first symbol after the end of the corresponding transmission carrying the DL HARQ feedback and stop the drx-RetransmissionTimerDL for the corresponding HARQ process.
- [277] If a MAC PDU is transmitted in a configured uplink grant and LBT failure indication is not received from lower layers, the MAC entity shall start the drx-HARQ-RTT-TimerUL for the corresponding HARQ process in the first symbol after the end of the first transmission (within a bundle) of the corresponding PUSCH transmission and stop the drx-RetransmissionTimerUL for the corresponding HARQ process at the first transmission (within a bundle) of the corresponding PUSCH transmission.
- [278] If a drx-HARQ-RTT-TimerDL expires, and if the data of the corresponding HARQ process was not successfully decoded, the MAC entity shall start the drx-RetransmissionTimerDL for the corresponding HARQ process in the first symbol after the expiry of drx-HARQ-RTT-TimerDL.
- [279] If a drx-HARQ-RTT-TimerUL expires, the MAC entity shall start the drx-RetransmissionTimerUL for the corresponding HARQ process in the first symbol after the expiry of drx-HARQ-RTT-TimerUL.
- [280] If a DRX group is in Active Time, the MAC entity shall monitor the PDCCH on the Serving Cells in this DRX group.
- [281] If the PDCCH indicates a DL transmission, the MAC entity shall start the drx-HARQ-RTT-TimerDL for the corresponding HARQ process in the first symbol after the end of the corresponding transmission carrying the DL HARQ feedback, and stop the drx-RetransmissionTimerDL for the corresponding HARQ process. Further, if the PDSCH-to-HARQ_feedback timing indicates a non-numerical k1 value, the MAC entity shall start the drx-RetransmissionTimerDL in the first symbol after the PDSCH transmission for the corresponding HARQ process.

- [282] If the PDCCH indicates a UL transmission, the MAC entity shall start the drx-HARQ-RTT-TimerUL for the corresponding HARQ process in the first symbol after the end of the first transmission (within a bundle) of the corresponding PUSCH transmission, and stop the drx-RetransmissionTimerUL for the corresponding HARQ process.
- [283] If the PDCCH indicates a new transmission (DL or UL) on a Serving Cell in this DRX group, the MAC entity shall start or restart drx-InactivityTimer for this DRX group in the first symbol after the end of the PDCCH reception.
- [284] If a HARQ process receives downlink feedback information and acknowledgement is indicated, the MAC entity shall stop the drx-RetransmissionTimerUL for the corresponding HARQ process.
- [285] Regardless of whether the MAC entity is monitoring PDCCH or not on the Serving Cells in a DRX group, the MAC entity transmits HARQ feedback, aperiodic CSI on PUSCH, and aperiodic SRS on the Serving Cells in the DRX group when such is expected.
- [286] The MAC entity needs not to monitor the PDCCH if it is not a complete PDCCH occasion (e.g., the Active Time starts or ends in the middle of a PDCCH occasion).
- [287]
- [288] <Data Burst Transmission>
- [289] FIG. 11 shows a concept of data burst transmissions in XR traffic transmission.
- [290] Referring to FIG. 11, the data burst is defined as a short period of time meaning the interval between the reception time of the first packet and the reception time of the last packet of the Data Burst at the destination in XR traffic. The data burst start time information and notification of changes in XR traffic parameters can be provided from a network.
- [291] The network receives the data burst quasi-periodically within the short period of time and there is no data between two successive data bursts. Then, from UE point of view, there is a significant power saving gain if the DRX is used to receive the data burst.
- [292] FIG. 12 shows an example of data burst transmissions in a conventional art.
- [293] Referring to FIG. 12, for uplink, the UE triggers the scheduling request when data burst is started. Then, the UE transmits the MAC PDUs during the data burst period. After that, the UE starts the drx-InactivityTimer after transmitting the last MAC PDU even if there is no more data to be transmitted.
- [294] The UE does not need to monitor the PDCCH while running the drx-InactivityTimer if the last MAC PDU is successfully transmitted. This is because the UE does not need to receive a new UL grant for new transmission. For this, the padding BSR can be used for an indication of the end of the data burst. This is because the padding BSR with zero BS information can be transmitted in the last MAC PDU.

- [295] However, there is a case where the padding BSR with zero Buffer Size (BS) information may not need to be transmitted. This is because the padding BSR with BS zero information can be transmitted when the large UL grant is received.
- [296] FIG. 13 shows an example of problems occurred in data burst transmissions in the conventional art.
- [297] Referring to FIG. 13, after starting the data burst, if a larger UL grant than the data stored in UE buffer is received, the UE generates a MAC PDU with padding BSR with zero BS information.
- [298] In FIG. 13, the network may misunderstand that the data burst is finished. Then, the network would transmit the DRX Command MAC CE to the UE in order to stop the drx-InactivityTimer. In this case, the scheduling of the data would be delayed.
- [299] Considering the above problematic scenario, the data during the data burst would be delayed. Thus, during data burst period, the padding BSR with BS zero information should not be transmitted. However, in order to efficiently use the radio resource, it would be better to indicate the useful information instead of the padding BSR with zero BS information.
- [300] In the present disclosure, the UE (or MAC entity at the UE) behavior is as follows. In the following description, a MAC entity related to a UE behavior refers to the UE itself or the MAC entity of the UE.
- [301] According to the present disclosure, it is suggested that when a UE does not have stored data to be transmitted but the UE expects that the additional data should be transmitted within a short period or a certain period time, the UE should contain a new BSR in a MAC PDU to indicate the expected data to be transmitted within a short period or a certain period time, instead of a padding BSR.
- [302] Hereinafter, detailed procedures of the present disclosure are described.
- [303] As mentioned above, The data burst period means that the UE receives a large amount of the data within a data burst period from the application layer. During the data burst period, the UE continuously transmits the data. It means that there is no data inactivity time during data burst period.
- [304] The UE can be configured with the data burst period using RRC signaling. In this case, the UE starts a Data Burst Timer (DBT) associated with a LCH or LCG. The DBT can be started when the UE transmits a MAC PDU containing a data associated with the LCH or LCG or when the UE receives a first data associated with the LCH or LCG. If the DBT expires, the UE considers the data burst period is finished.
- [305]
- [306] During data burst period, if the UE receives a UL grant, the UE generates a MAC PDU containing an expected BSR (hereinafter, eBSR) MAC CE.

- [307] The eBSR MAC CE indicates the rest of the data volume to be transmitted within the data burst period. Alternatively, the UE can generate the MAC PDU containing a pre-emptive BSR. The pre-emptive BSR is used to indicate the information about the amount of the data expected to arrive.
- [308] The UE can identify the rest of the data volume to be transmitted. The exact range of variation is not precisely quantifiable, but it can be assumed that it stays within the same order of magnitude.
- [309] The eBSR MAC CE can be contained when there is a room to contain the eBSR MAC CE after containing all buffered data. If the eBSR MAC CE is contained, the padding BSR may not be contained in the MAC PDU.
- [310] Additionally, the eBSR MAC CE can indicate the time information for the rest of the data volume to be transmitted. For example, if the UE expects the data volume to be transmitted = 3000 after 2ms, the UE inform the time information = 2ms in the eBSR MAC CE.
- [311]
- [312] The legacy short BSR MAC CE (i.e., the Short BSR MAC CE shown in FIG. 9) or the legacy long BSR MAC CE (i.e., the Long BSR MAC CE shown in FIG. 10) can be reused for the eBSR MAC CE format. Of course, the different LCID is used for the eBSR MAC CE with the legacy short BSR MAC CE or the legacy long BSR MAC CE.
- [313] The eBSR is triggered when the UE receives a new data associated with the specific LCH or LCG within the data burst period or when the UE accomodates all buffered data in the recevied UL grant and there is a room to contain the eBSR MAC CE within data burst period.
- [314] Further, the eBSR is cancelled, when the eBSR MAC CE is transmitted or when the data burst period is finished. If both a padding BSR and eBSR are triggered, the adding BSR is cancelled.
- [315] Alternatively, instead of the eBSR, a new indication can be used to indicate whether there may data to be transmitted within the data burst period. In this indication, the buffer size information is not indicated.
- [316] FIG. 14 shows an example of transmitting the MAC PDU with eBSR according to the present disclosure.
- [317] Referring to FIG. 14, it is assumed that the data burst is started at T0. In this case, the UE transmits the scheduling request to the network to get a UL grant.
- [318] Firstly, at T1, the UE stores the data = 1600 at reception of the UL grant = 1800. Then, the UE transmits the MAC PDU with eBSR having a value = 5000. Here, the value 5000 is the remaining data volume to be transmitted until the end of the data

burst, which is expected at T1. Alternatively, the eBSR may includes information indicating that there is data to be transmitted until the end of the data burst.

[319] Next, at T2, the UE stores the data = 2900 at reception of the UL grant = 3500. Then, the UE transmits the MAC PDU with eBSR having a value = 1900. Here, the value 1900 is the remaining data volume to be transmitted until the end of the data burst, which is expected at T2. Alternatively, the eBSR may includes information indicating that there is data to be transmitted until the end of the data burst.

[320] Next, at T3, the UE stores the data = 1900 at reception of the UL grant = 2000. Then, the UE transmits the MAC PDU with padding BSR with BS zero information, since there is not the remaining data volume to be transmitted until the end of the data burst.

[321] Finally, at T4, the UE starts the drx-InactivityTimer until receiving a DRX command MAC CE to stop the the drx-InactivityTimer in order to stop the PDCCH monitoring.

[322] In order to indicate the end of the data burst, the UE can transmit a new indication indicating the end of the data burst, instead of the padding BSR with BS zero information.

[323]

[324] FIG. 15 is a flow chart of performing operations for the UE according to the present disclosure.

[325] Referring to FIG. 15, the UE may start a data burst period, in A05. Here, the data burst period is a short period of time meaning the interval between the reception time of the first Medium Access Control (MAC) Protocol Data Unit (PDU) and the reception time of the last MAC PDU of the Data Burst at the network in XR traffic.

[326] If the UE receives an uplink (UL) grant in A10, the UE may generating a MAC PDU including at least one MAC Service Data Unit (SDU) based on the uplink grant in A15. Preferably, when the UE generates the MAC PDU, the UE determines whether there is expected data volume to be transmitted until an end of the data burst period.

[327] Especially, if the UE determines that there is expected data volume to be transmitted until the end of the data burst period, the data burst period is considered to be on-going.

[328] If there is no more SDU to be transmitted and if the data burst period is considered to be on-going, the UE may include zero Buffer Size (BS) information and information indicating that the data burst period is on-going into the MAC PDU. Preferably, the information indicating that the data burst period is on-going includes information on a size of at least one remaining MAC SDU within the data burst period.

[329] While, if the UE determines that there is not expected data volume to be transmitted until the end of the data burst period, the UE may include zero BS information and information indicating an end of the data burst into the MAC PDU, instead of the information indicating that the data burst period is on-going into the MAC PDU

[330] Finally, in A20, the UE transmits the MAC PDU on the UL grant.

[331]

[332] According to the present disclosure, the network can identify when to finish the data burst period. With this, the network indicates an indication to the UE in order to stop the PDCCH monitoring. With this, the power saving gain would be increased.

[333]

Claims

- [Claim 1] A method for performing operations by a user equipment (UE) in a wireless communication system, the method comprising:
starting a data burst period;
receiving an uplink (UL) grant; and
generating a Medium Access Control (MAC) Protocol Data Unit (PDU) including at least one MAC Service Data Unit (SDU) based on the uplink grant,
wherein, based on there being no more SDU to be transmitted and based on the data burst period being considered to be on-going, the MAC PDU includes zero Buffer Size (BS) information and information indicating that the data burst period is on-going; and
transmitting the MAC PDU on the UL grant.
- [Claim 2] The method of claim 1, wherein the information indicating that the data burst period is on-going includes information on a size of at least one remaining MAC SDU within the data burst period.
- [Claim 3] The method of claim 1, wherein generating the MAC PDU comprises determining whether there is expected data volume to be transmitted until an end of the data burst period.
- [Claim 4] The method of claim 3, wherein, based on determining that there is expected data volume to be transmitted until the end of the data burst period, the data burst period is considered to be on-going.
- [Claim 5] The method of claim 3, wherein, based on determining that there is not expected data volume to be transmitted until the end of the data burst period, the MAC PDU includes zero BS information and information indicating an end of the data burst.
- [Claim 6] A user equipment (UE) in a wireless communication system, the UE comprising:
at least one transceiver;
at least one processor; and
at least one computer memory operably connectable to the at least one processor and storing instructions that, when executed, cause the at least one processor to perform operations comprising:
starting a data burst period;
receiving an uplink (UL) grant;

generating a Medium Access Control (MAC) Protocol Data Unit (PDU) including at least one MAC Service Data Unit (SDU) based on the uplink grant,
wherein, based on there being no more SDU to be transmitted and based on the data burst period being considered to be on-going, the MAC PDU includes zero Buffer Size (BS) information and information indicating that the data burst period is on-going; and transmitting the MAC PDU on the UL grant.

[Claim 7] The UE of claim 6, wherein the information indicating that the data burst period is on-going includes information on a size of at least one remaining MAC SDU within the data burst period.

[Claim 8] The UE of claim 6, wherein generating the MAC PDU comprises determining whether there is expected data volume to be transmitted until an end of the data burst period.

[Claim 9] The UE of claim 8, wherein, based on determining that there is expected data volume to be transmitted until the end of the data burst period, the data burst period is considered to be on-going.


[Claim 10] The UE of claim 8, wherein, based on determining that there is not expected data volume to be transmitted until the end of the data burst period, the MAC PDU includes zero BS information and information indicating an end of the data burst.

[Claim 11] An apparatus for a user equipment (UE), the apparatus comprising:
at least one processor; and
at least one computer memory operably connectable to the at least one processor and storing instructions that, when executed, cause the at least one processor to perform operations comprising:
starting a data burst period;
receiving an uplink (UL) grant;
generating a Medium Access Control (MAC) Protocol Data Unit (PDU) including at least one MAC Service Data Unit (SDU) based on the uplink grant,
wherein, based on there being no more SDU to be transmitted and based on the data burst period being considered to be on-going, the MAC PDU includes zero Buffer Size (BS) information and information indicating that the data burst period is on-going; and transmitting the MAC PDU on the UL grant.


[Claim 12]

A computer readable storage medium storing at least one computer program comprising instructions that, when executed by at least one processor, cause the at least one processor to perform operations for a user equipment (UE), the operations comprising: starting a data burst period; receiving an uplink (UL) grant; generating a Medium Access Control (MAC) Protocol Data Unit (PDU) including at least one MAC Service Data Unit (SDU) based on the uplink grant, wherein, based on there being no more SDU to be transmitted and based on the data burst period being considered to be on-going, the MAC PDU includes zero Buffer Size (BS) information and information indicating that the data burst period is on-going; and transmitting the MAC PDU on the UL grant.


[Fig. 1]

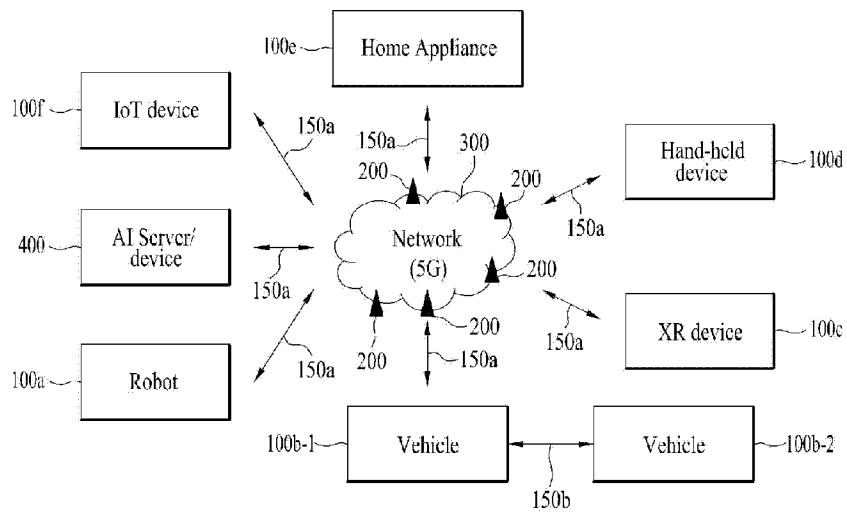


[Fig. 2]

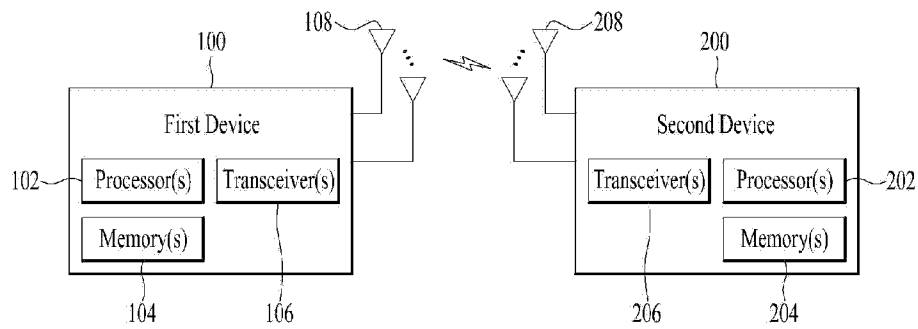


[Fig. 3]

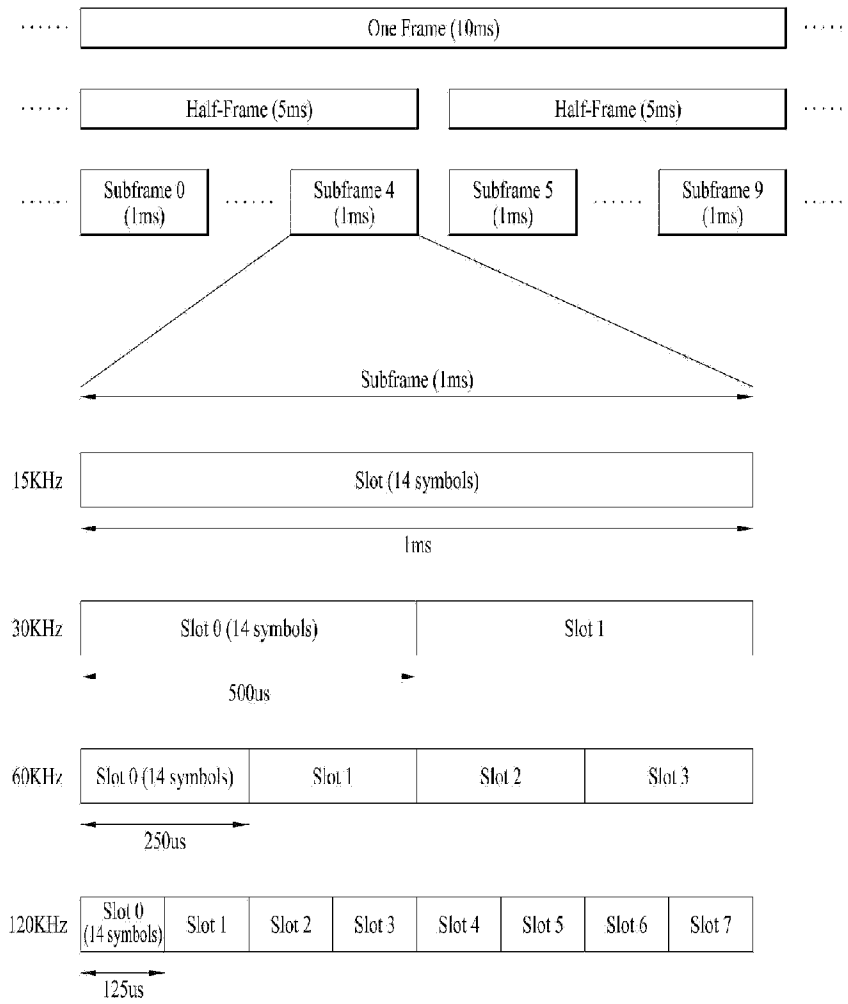

[Fig. 4]

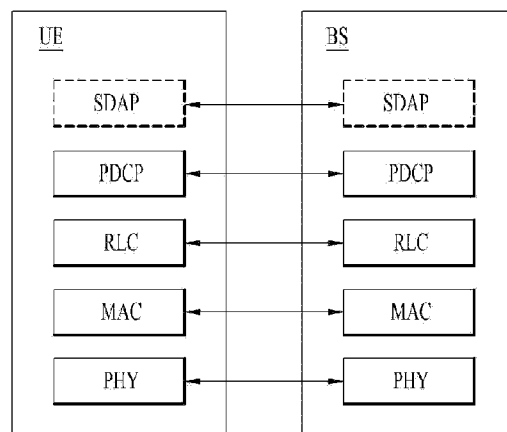


(a) User Plane Protocol Stack


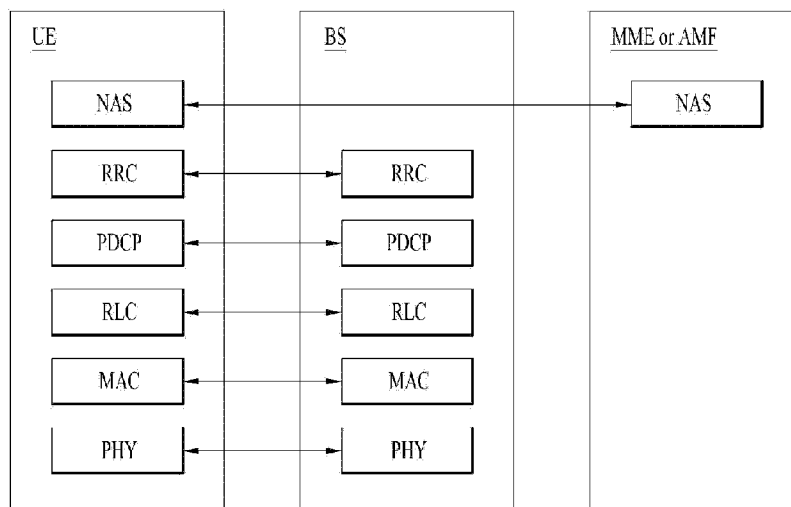


(b) Control Plane Protocol Stack


[Fig. 5]

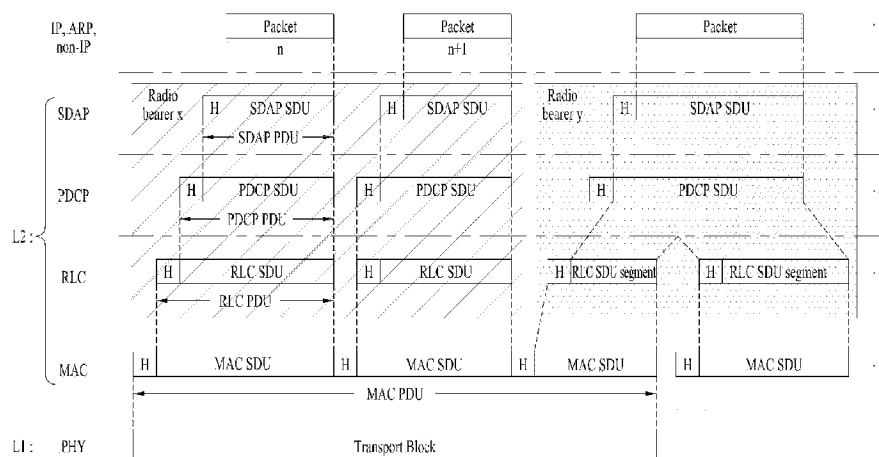


[Fig. 6]

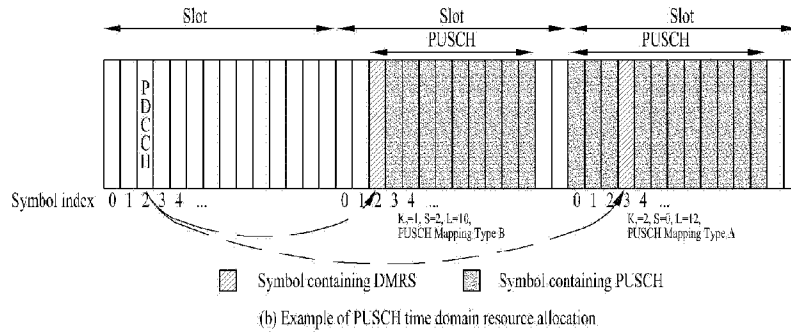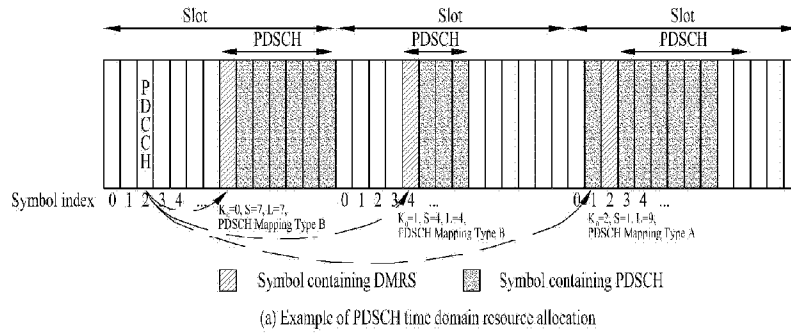


[Fig. 7]

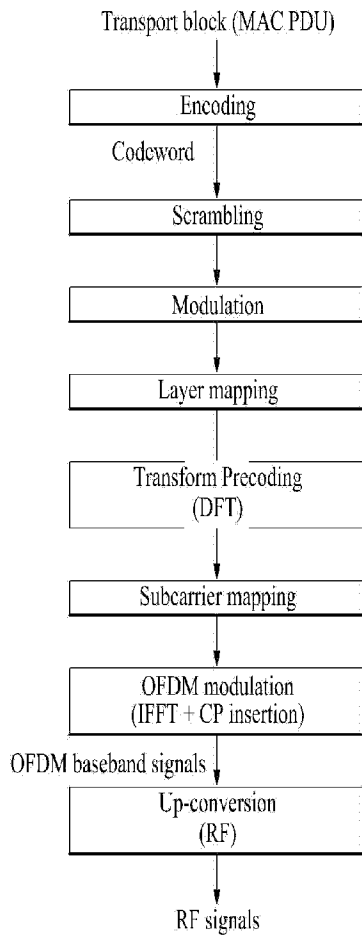


[Fig. 8]

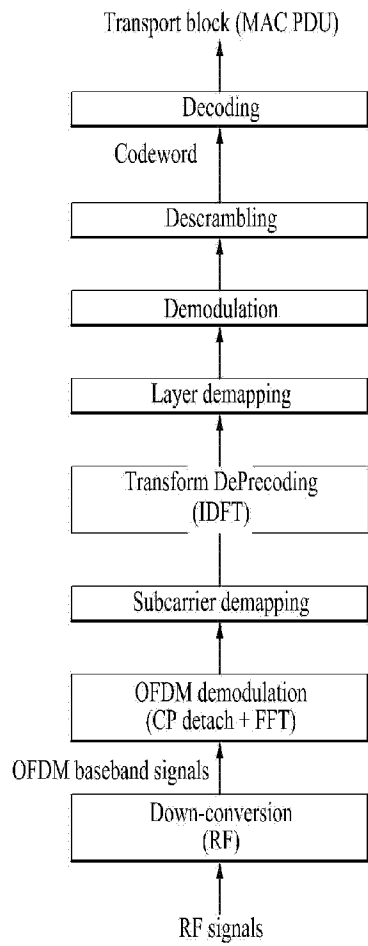


[Fig. 9]

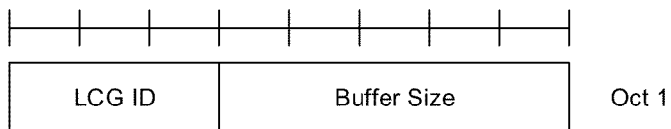


[Fig. 10]

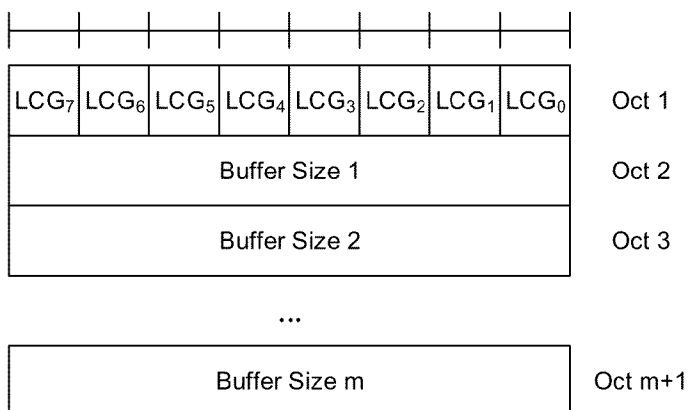


[Fig. 11]

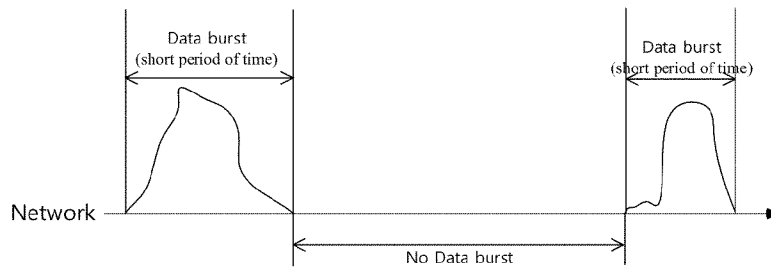


[Fig. 12]

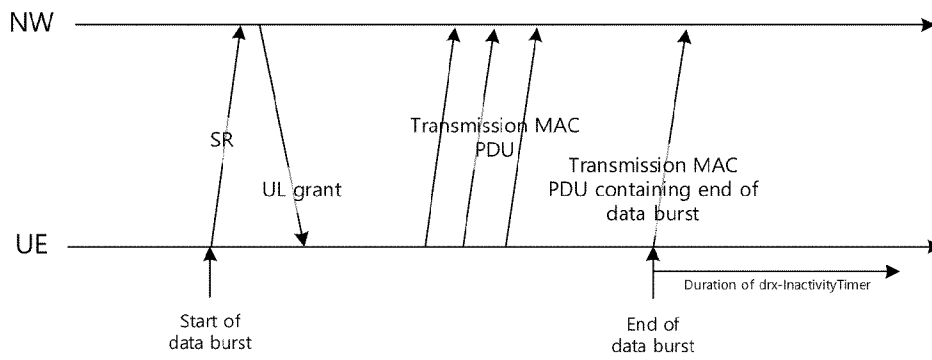


[Fig. 13]

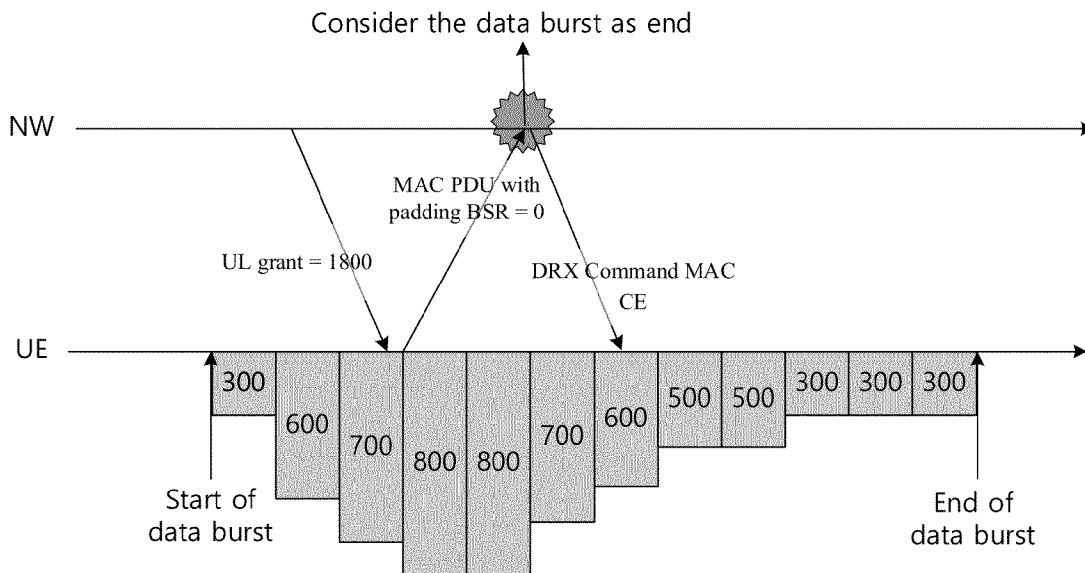

[Fig. 14]

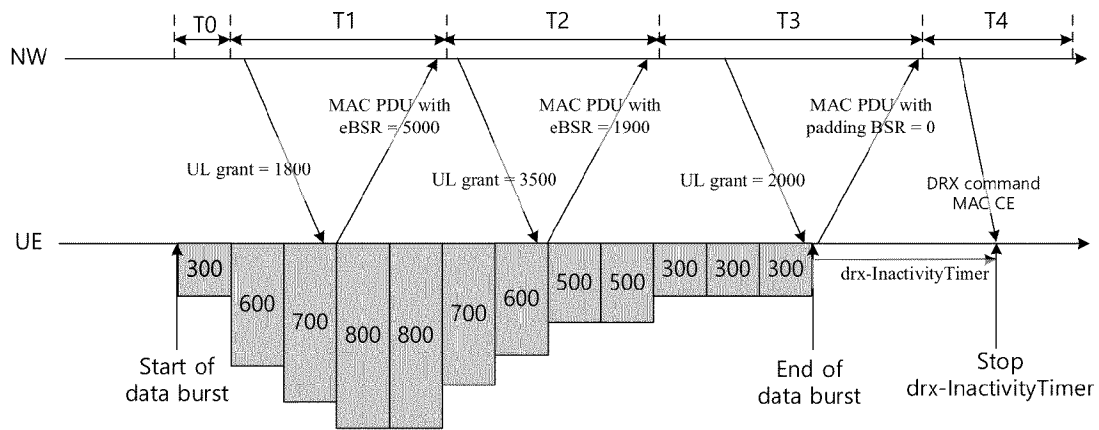

[Fig. 15]

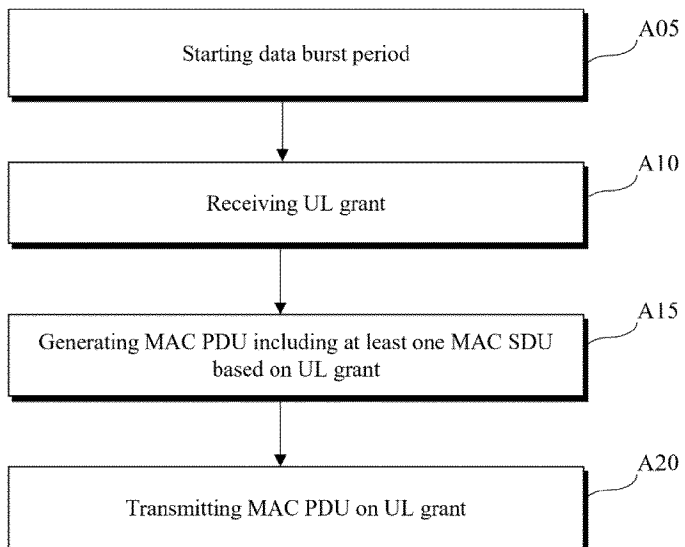

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR2024/006975

A. CLASSIFICATION OF SUBJECT MATTER**H04W 28/10(2009.01)i; H04W 28/02(2009.01)i; H04W 72/23(2023.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W 28/10(2009.01); H04L 12/26(2006.01); H04W 28/02(2009.01); H04W 36/20(2009.01); H04W 72/12(2009.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: UL grant(uplink grant), MAC PDU(medium access control protocol data unit), BSR(buffer status report), data burst, buffer size

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2017-0237643 A1 (LG ELECTRONICS INC.) 17 August 2017 (2017-08-17) paragraphs [0133]-[0220]	1-12
A	HUAWEI et al., 'Discussion on PDU set and data burst information', R2-2305808, 3GPP TSG-RAN WG2 Meeting #122, 12 May 2023 section 2.1.2	1-12
A	VIVO, 'Discussion on PDU set and data burst information', R2-2300320, 3GPP TSG-RAN WG2 Meeting #121, 17 February 2023 sections 2-2.2	1-12
A	INTEL CORPORATION, 'BSR enhancements for XR', R2-2302911, 3GPP TSG RAN WG2 Meeting #121bis-e, 07 April 2023 sections 2-2.3	1-12
A	US 2017-0367107 A1 (INTERDIGITAL PATENT HOLDINGS, INC.) 21 December 2017 (2017-12-21) paragraphs [0260]-[0264]	1-12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 September 2024

Date of mailing of the international search report

13 September 2024

Name and mailing address of the ISA/KR

**Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon
35208, Republic of Korea**

Facsimile No. +82-42-481-8578

Authorized officer

YANG, Jeong Rok

Telephone No. +82-42-481-5709

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR2024/006975

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2017-0237643	A1	17 August 2017	CN	103546908	A	29 January 2014
				CN	103546908	B	12 April 2017
				EP	2688334	A2	22 January 2014
				EP	2688334	A3	27 July 2016
				EP	2688334	B1	03 October 2018
				JP	2014-023155	A	03 February 2014
				JP	5670518	B2	18 February 2015
				KR	10-2014-0011270	A	28 January 2014
				KR	10-2044452	B1	13 November 2019
				US	2014-0022933	A1	23 January 2014
				US	2015-0201339	A1	16 July 2015
				US	2016-0173355	A1	16 June 2016
				US	9559930	B2	31 January 2017
				US	9629009	B2	18 April 2017
				US	9680725	B2	13 June 2017
				US	9973408	B2	15 May 2018
				WO	2014-014260	A1	23 January 2014
US	2017-0367107	A1	21 December 2017	CA	2808274	A1	16 February 2012
				CA	2808274	C	25 February 2020
				CA	3062662	A1	16 February 2012
				CN	103069911	A	24 April 2013
				CN	103069911	B	21 December 2016
				CN	107105511	A	29 August 2017
				CN	107105511	B	07 August 2020
				EP	2604085	A2	19 June 2013
				EP	2604085	B1	21 January 2015
				EP	2945452	A1	18 November 2015
				EP	2945453	A1	18 November 2015
				EP	2945453	B1	02 November 2016
				JP	2013-535938	A	12 September 2013
				JP	2016-187234	A	27 October 2016
				JP	2018-113714	A	19 July 2018
				JP	2019-205195	A	28 November 2019
				JP	5986084	B2	06 September 2016
				JP	6564090	B2	21 August 2019
				KR	10-1822688	B1	08 March 2018
				KR	10-2013-0108294	A	02 October 2013
				SG	10201506368	A	29 September 2015
				SG	187831	A1	28 March 2013
				TW	201216631	A	16 April 2012
				TW	I552537	B	01 October 2016
				US	2012-0207040	A1	16 August 2012
				US	9781735	B2	03 October 2017
				WO	2012-021879	A2	16 February 2012
				WO	2012-021879	A3	02 August 2012