



HU000025095T2

(19) **HU****MAGYARORSZÁG**
Szellemi Tulajdon Nemzeti Hivatala(11) Lajstromszám: **E 025 095**(13) **T2****EURÓPAI SZABADALOM**
SZÖVEGÉNEK FORDÍTÁSA(21) Magyar ügyszám: **E 11 785059**(22) A bejelentés napja: **2011. 11. 08.**

(96) Az európai bejelentés bejelentési száma:

EP 20110785059

(97) Az európai bejelentés közzétételi adatai:

EP 2637498 A1 **2012. 05. 18.**

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2637498 B1 **2015. 04. 29.**(51) Int. Cl.: **A01M 21/04** (2006.01)

(86) A nemzetközi (PCT) bejelentési szám:

PCT/GB 11/052174

(87) A nemzetközi közzétételi szám:

WO 12063060

(30) Elsőbbségi adatok:

201112956	2011. 07. 28.	GB
201018912	2010. 11. 09.	GB

(72) Feltaláló(k):

HOBBS, Richard, Cambridgeshire PE19 6YH (GB)
MOREHEN, Jason, Cambridgeshire PE19 6YH (GB)
MYERS, Malcolm, Cambridgeshire PE19 6YH (GB)

(73) Jogosult(ak):

Weeding Technologies Limited, London W4
1QP (GB)

(74) Képviselő:

dr. Harangozó Gábor, DANUBIA Szabadalmi
és Jogi Iroda Kft., Budapest


(54)

Gyomirtó eszköz

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.

(19)



(11)

EP 2 637 498 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
29.04.2015 Bulletin 2015/18

(21) Application number: **11785059.4**

(22) Date of filing: **08.11.2011**

(51) Int Cl.:
A01M 21/04 (2006.01)

(86) International application number:
PCT/GB2011/052174

(87) International publication number:
WO 2012/063060 (18.05.2012 Gazette 2012/20)

(54) **DEVICE FOR WEED CONTROL**

VORRICHTUNG ZUR UNKRAUTBEKÄMPFUNG

DISPOSITIF DE LUTTE CONTRE LES MAUVAISES HERBES

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **28.07.2011 GB 201112956**
09.11.2010 GB 201018912

(43) Date of publication of application:
18.09.2013 Bulletin 2013/38

(73) Proprietor: **Weeding Technologies Limited**
London W4 1QP (GB)

(72) Inventors:
• **HOBBS, Richard**
Cambridgeshire PE19 6YH (GB)

• **MOREHEN, Jason**
Cambridgeshire PE19 6YH (GB)
• **MYERS, Malcolm**
Cambridgeshire PE19 6YH (GB)

(74) Representative: **Mansfield, Peter Turquand**
Coller IP Management Limited
Fugro House
Hithercroft Road
Wallingford, Oxfordshire OX10 9RB (GB)

(56) References cited:
EP-A2- 2 022 329 WO-A1-02/07513
DE-A1- 10 106 895 US-A- 5 575 111
US-B1- 6 382 523

EP 2 637 498 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method of controlling vegetation and to an apparatus for performing the method.

[0002] Conventionally, vegetation, such as weeds, is typically controlled either by physical removal, such as hand weeding, or by the use of herbicides. Hand weeding can be very hard work. Plants are becoming increasingly resistant to herbicides. In addition, there is increasing public resistance to the use of chemicals in the environment, and legislative changes to reduce use of toxic chemicals as herbicides. Therefore, there is an interest in methods of controlling vegetation which do not use synthetic chemicals and avoid hand weeding.

[0003] Thermal methods have been suggested for weed control. A variety of methods have been used to provide heat to weeds, for example, hot water, steam, hot air, flames and hot foam. These methods can overcome some of the disadvantages of herbicides such as spray drift and soil or groundwater pollution. WO 02/07513 describes a way of controlling weeds using hot foam in the range 75°C to 100°C. Hot water is combined with low pressure air to make the foam, and the foam is ejected from a nozzle. EP 1 450 603 discloses a method of controlling vegetation including preparing a foam having a temperature of between 75°C and 100°C and consisting volumetrically of 60 to 75% aqueous solution of biodegradable foaming agent and 40 to 25% air and directing a stream of foam on the vegetation.

[0004] The present invention seeks to provide a mobile apparatus for use in controlling vegetation.

[0005] The present invention provides an apparatus suitable for controlling vegetation which apparatus comprises a reservoir for a hot liquid, release means connected to the reservoir, and a nozzle for applying a stream of foam containing steam, connected to the reservoir through the release means, the apparatus being mounted on a wheeled trolley or trailer which may be propelled by a vehicle, or the apparatus being mounted on a vehicle. The vehicle may be, for example, a tractor or quad bike. The apparatus is specified more precisely in claim 1.

[0006] The hot-liquid reservoir is a reservoir which comprises a heating means and the heating means is connected to a power source such as the mains electricity or a battery. The reservoir may therefore heat liquid only on demand, rather than storing heated liquid. The apparatus may comprise an input for mains power and heating elements suitable for connection to mains power. Where the reservoir is used in conjunction with a motor vehicle (such as a tractor), the electrical power may be generated by the vehicle. When the apparatus is connected to a source of power, the heating elements are arranged to heat the liquid until the pressure in the reservoir is above atmospheric pressure. The release means controls and restricts the outflow of liquid, while the pressure within the hot-liquid reservoir remains above atmospheric pressure. For example the pressure may be between 125

kPa and 300 kPa (absolute), preferably between 175 kPa and 275 kPa, for example about 200 kPa or 225 kPa.

[0007] The pressure in the hot-liquid reservoir may additionally be raised by a pump. For example the pressure may be up to 1.5 MPa (15 atmospheres), more preferably up to 1.2 MPa, for example 1000 kPa or 500 kPa.

[0008] Optionally the liquid in the hot-liquid reservoir may be heated by a burner system which may be powered by a fuel such as gas, diesel or biofuel. This is applicable where the apparatus is a wheeled apparatus or a vehicle or trailer-mounted apparatus.

[0009] The hot-liquid reservoir of the wheeled trolley apparatus or vehicle or trailer-mounted apparatus may be a container which can maintain a liquid at a temperature of from 96°C to 105°C for up to an hour without using mains or vehicle power. The reservoir may therefore be insulated. Power or heat may be provided by the vehicle or towing vehicle from the alternator in its engine to generate electrical power, or from a heat exchanger directly connected to the vehicle to extract thermal energy from the vehicle, to maintain the temperature of the liquid in the reservoir typically for an hour or more.

[0010] The apparatus includes a storage tank for liquid which may be at ambient temperature, and means to supply liquid from the storage tank to the reservoir, where it is heated. The hot-liquid reservoir need only contain the liquid required for immediate use, as it heats liquid only on demand, rather than storing heated liquid. The total liquid capacity for an apparatus placed in a trailer or on a vehicle will depend on the size and carrying capacity of the trailer or vehicle, but it may be more than 2000 litres, more typically up to 1000 litres, for example up to 600 litres for a vehicle such as a tractor, and for a smaller vehicle or trailer more preferably up to 350 litres, and is typically up to 150 litres, for example from 75 to 125 litres, such as about 100 litres.

[0011] The liquid supplied to the reservoir is typically water combined with a surfactant. The surfactant is typically used at a concentration of up to 2%, preferably 0.05% to 2%, more preferably from 0.1% to 1%, more preferably about 0.1%. The surfactant may be organic or inorganic. The surfactant is preferably a biodegradable foaming agent such as alkyl polyglycoside and is preferably a natural product. The surfactant may be mixed with the liquid in the reservoir, or it may be mixed with the hot liquid as it is dispensed from the reservoir.

[0012] The release means, for example, is a valve which allows liquid to exit from the reservoir when open. In one embodiment, the valve allows a limited pressure to build up in the reservoir so as to cause the liquid to exit from the nozzle when the valve is released. The apparatus may include a pressure sensor to prevent the pressure from becoming too high in the reservoir. However, as mentioned above, the pressure in the reservoir may be raised partly by heating the liquid and partly by a pump, so as to achieve a higher pressure.

[0013] The release means may be connected to the reservoir at the bottom, side or top of the reservoir. In a

preferred embodiment the release means is connected to the bottom of the reservoir.

[0014] The reservoir may also have an opening for the surfactant. This may be, for example, a bottle of surfactant with a drip feed or it may be a 'tablet holder', an opening into the reservoir where a grid separates the surfactant from the main section of the reservoir. In this embodiment a tablet could be placed on the grid and the cap closed. Water is then added to the reservoir and heated, which causes the tablet to dissolve through the grid and mix into the liquid in the reservoir.

[0015] The nozzle may have a single hole. The nozzle is typically a directional nozzle so that the hot foam produced by the apparatus can be directed accurately onto vegetation. Alternatively the apparatus may be provided with interchangeable nozzles to enable cleaning of the apparatus and in order to change nozzle geometry easily. In another embodiment, a nozzle with variable geometry may be provided such as a nozzle that can provide either a jet or a mist of foam. The nozzle may have multiple openings which enables foam to be directed at several points around the base of a weed simultaneously.

[0016] An embodiment suitable for use with a vehicle such as a tractor, or mounted on a vehicle, may include several nozzles, so that a wide area of ground can be treated in one pass of the vehicle.

[0017] Where the nozzle has a single hole, the hole in the nozzle is typically up to 2 mm or 3 mm in diameter, more preferably up to 1 mm. However, the size of the nozzle hole also depends on the configuration of the apparatus.

[0018] The apparatus may further comprise a shroud for the nozzle. Thus the nozzle may be mounted within or inside a shroud or may be enclosed on one side by a shroud. The nozzle and shroud may be a single item or may be made of separate components. Where the nozzle and shroud comprise separate components the shroud may be removable from the apparatus. The shroud may be of a size so as to cover a small weed, thus creating a steam/foam chamber, and providing a thermal blanket effect. Where the nozzle and shroud or a plurality of nozzles and shrouds are used while moving the associated vehicle, each shroud may be arranged to enclose respective nozzles at the front and sides, leaving an opening at the rear, relative to the direction of movement.

[0019] In one embodiment each nozzle is supported by a support bar that includes a hinge, so that if the nozzle collides with an obstruction as the apparatus is moved over the ground, the nozzle can swing back to clear the obstruction.

[0020] A preferred embodiment comprises several nozzles arranged in groups, the orientation of the group of nozzles being adjustable. Each group of nozzles may be associated with a respective shroud. For example a trailer carrying the nozzles may comprise a horizontal support element that carries the groups of the nozzles at positions that are spaced apart along the horizontal support element. By changing the orientation of the nozzles

within each group, the distribution of foam over the ground can be altered. For example the nozzles within each group may be aligned generally parallel to the direction of movement, for example to kill weeds growing in the gaps between rows of crop plants without affecting the crop plants. If each group of nozzles is turned so as to extend transverse to the direction of movement, this increases the width of ground treated by each group of nozzles. The spacing between the groups of nozzles may be such that in this orientation there are no gaps between the strips of ground treated by the groups of nozzles, so the entire surface area is treated.

[0021] Each heating element is typically connected to a thermostat or a thermocouple which is used to turn the heater off when the liquid reaches the required temperature. The apparatus includes a plurality of heating elements, arranged so that the liquid is heated successively by the heating elements. For example there might be three heating elements in the reservoir, each arranged to raise the temperature of the liquid by the same amount (e.g. 25° or 30°C), the liquid flowing past the three heating elements in series, in a reservoir in which the liquid is heated on demand.

[0022] The apparatus preferably comprises a steam pressure gauge and feedback loop connected to measure the pressure in the reservoir. When the apparatus is connected to a source of power, the relevant heating element may be arranged to heat the water until the pressure in the reservoir is above atmospheric pressure and then the feedback loop shuts off the power. The steam pressure gauge and feedback loop may control the heating to maintain the liquid at boiling point and the steam pressure above atmospheric as the liquid is used.

[0023] The apparatus of the present invention may be used to control pests such as pests on plants and/or pests on the ground. Pests on plants may include black fly and aphids. Pests on the ground may include woodlice, other pests with carapaces, slugs and snails.

[0024] The present invention also provides a method of controlling vegetation which method comprises preparing a hot foam mixture comprising water and a surfactant, which acts as a foaming agent, and directing the foam onto vegetation. The method is specified more precisely in claim 12. The hot foam mixture further comprises steam, for example up to 10% steam, or up to 5% steam (these being proportions by weight).

[0025] The method may comprise heating a liquid comprising water and a surfactant, which acts as a foaming agent, to a temperature of at least 102°C, and optionally up to 110°C, such as 107°C. The liquid may be heated using electric power. In one embodiment the liquid is heated initially using mains power. In addition, hot water may be provided to the reservoir before heating commences, for example from a domestic hot water tap.

[0026] In one embodiment the hot foam mixture further comprises a dye, and the foam is coloured or the residue left when the foam collapses is coloured.

[0027] As the liquid is heated to form steam, the steam

forces the liquid out of the nozzle of the apparatus whenever the releasing means is opened. The liquid combines with air as it leaves the nozzle forming hot foam which typically contains steam. Air dissolved in the water also comes out of solution as the water is heated and assists in forming foam. A low pressure may be used that is above atmospheric pressure, for example 120 kPa (18 psi) to 135 kPa (20 psi) (absolute pressures), but it may be up to 200 kPa or higher. The pressure may be significantly higher where a pump is also used to raise the pressure.

[0028] Foliage that is sprayed with the hot foam mixture typically dies within 1 day. This does depend on the type of plant and the amount of foam that contacts the plant. Plants that have a very waxy coating may require a larger amount of foam to impart sufficient heat to the plant. Some plants wilt and undergo a colour change within one hour.

[0029] The invention will now be further and more particularly described, by way of example only, and with reference to the accompanying drawings, in which:

Figure 1 shows a side view of a weed treating apparatus, also showing a tractor;

Figure 2 shows a perspective view of the weed treating apparatus of figure 1;

Figure 3 shows a rear view of the weed treating apparatus of figure 1 (but not showing the tractor);

Figure 4 shows a plan view of the foam dispensing machine of the weed treating apparatus of figure 1;

Figure 5 shows a front view in the direction of arrow A of figure 4;

Figure 6 shows a side view in the direction of arrow B of figure 4; and

Figure 7 shows a side view of a component of the foam dispensing machine of figure 4.

[0030] Referring to figure 1, there is shown a weed treating apparatus 10 and a tractor 5 (represented schematically). The weed treating apparatus 10 comprises a foam generating apparatus 12, which is intended to be mounted at the rear of the tractor 5, and a foam dispensing machine 14 which is intended to be mounted at the front of the tractor 5. It will be appreciated that the apparatus 10 might instead be mounted on a different agricultural vehicle, which may be a vehicle dedicated to this use. The foam dispensing machine 14 is envisaged as being mounted at the front of such a vehicle, as this enables the driver to align it accurately to kill weeds between rows of crops, but it will be appreciated that the two components of the weed treating apparatus 10 might instead both be mounted on a trailer to be towed behind such an agricultural vehicle.

[0031] The tractor 5 includes an engine 6, a cab 7, a three-point linkage 8 at the front, and a power takeoff 9 at the rear. Such features are conventional. The tractor 5 may also provide the facility for raising and lowering the three-point linkage 8.

[0032] Referring now to figure 2, the foam dispensing machine 14 and the foam generating apparatus 12 are shown separately, without the tractor 5. The foam generating apparatus 12 includes a steel frame 20 with a bracket 21 on the front side so it can be mounted onto the rear of the tractor 5. Within the lower part of the steel frame 20 is mounted a generator 24, which is adapted to be linked by a telescopic drive shaft with an overrun clutch to the power take off 9 from the tractor 5, so that the generator 24 is driven by the tractor's engine 6. In this embodiment the generator 24 is a three-phase 415 V generator, generating about 80 kVA. Supported by the steel frame 20 above the generator 24 is a water storage tank 26, which may for example have a capacity of 400 or 600 litres. The steel frame 20 also carries four boxes 28, 29, 30 and 31, which may be of glass fibre reinforced composite material, and which provide enclosures for electrical or electronic components.

[0033] Referring also to figure 3, the box 28 (which is shown partly broken away) encloses three electrical heaters 34 each provided with thermal insulation. The box 30 on the left side (as shown) of the generator 24 encloses control electronics 32 (shown schematically in broken lines), while the box 31 on the right side (as shown) of the generator 24 encloses a pump 36 (shown schematically in broken lines) and solenoid valves 38 (represented schematically). The box 29 above the heater box 28 may also contain electronic components. Each electrical heater 34 includes an electrical heating element and a cast aluminium block.

[0034] In operation of the foam generating apparatus 12 the water which is to be heated is pumped by the pump 36 from the water tank 26 through the three electrical heaters 34 in series. Each heater 34 may have a nominal power of 24 kW, and each may be powered by a different phase of the output from the generator 24. Each heater 34 is controlled by the control electronics 32 in accordance with the flow rate of the water, so that the water temperature is raised in stages, typically by between 20°C and 30°C at each stage, to a final temperature between 95°C and 105°C or up to 110°C, which may be above 102°C, for example 107°C. The control electronics 32 monitors the water temperature at each stage, and also the temperature of the heater 34, for example using thermocouples.

[0035] The hot water emerging from the heater box 28 is at an elevated pressure for example 120 kPa (18 psi) to 135 kPa (20 psi) (absolute pressures), but more typically a higher pressure such as 400 kPa, 500 kPa, or up to 1000 kPa or 1200 kPa because of the pressure created by the pump 36. The hot water does not boil, because of the elevated pressure, until it emerges from a nozzle. By way of example the water flow rate may be up to 10 litres/minute, in this example, which can supply several foam-dispensing nozzles; but if not all the foam-dispensing nozzles are in use, the flow rate of water to the electrical heaters 34 in the heater box 28 is reduced. This may utilise an electronically-controlled valve to divert

some of the water from the pump 36 back to the water tank 26.

[0036] Although the heater box 28 may be referred to as a reservoir of hot water, it contains only the water required for immediate use, as the water is heated only as it is being dispensed. That is to say, the water is heated on demand.

[0037] A surfactant such as an alkyl polyglycoside may be mixed with the liquid in the water tank 26, or it may be mixed with the water as it is passed into the heater box 28, or may be mixed with the hot water as it flows out of the heater box 28, or after it has emerged from the heater box 28. The quantity of surfactant may be about 0.1% by weight of water, typically between 0.05% and 0.5%, although it may be higher, for example 1%, 1.5% or 2%.

[0038] The solenoid valves 38 control the outflow of hot fluid through various outlet nozzles. For example hot fluid may be supplied to a hand-held spray lance with a nozzle at its end, so an operator walking alongside the tractor 5 can treat individual weeds; or hot fluid may be supplied to spray nozzles mounted behind the rear wheels of the tractor 5, so as to treat weeds growing in the wheel ruts. As the hot fluid emerges from the nozzle it forms a foam which contains steam, which blankets the surface of the weed, and kills the weed. The foam dispensing machine 14, described in more detail below, can carry several such dispensing nozzles and enables a large area to be treated easily.

[0039] Referring now to figure 4, the foam dispensing machine 14 consists of a support bar 40 supported at each end by a wheel 42. The rear face of the support bar 40 is connected by brackets 43 and hinged parallel plate linkages 44 to a crossbar 46. The crossbar 46 carries brackets 48 and an upwardly-extending link bar 41, which enable it to be connected to the three-point linkage 8 at the front of the tractor 5.

[0040] The front face of the crossbar 46 carries two header boxes 50 on thermally insulating mounts 49, each with an inlet 51 which is connected by a hose 52 (only one is represented, schematically) to one of the solenoid valves 38; such hoses 52 may extend along the underside of the tractor 5. Each header box 50, in this example, has four outlet ports 54 to which outlet hoses 55 (only one is represented, schematically) can be connected using dry break hydraulic connectors. Each header box 50 also has an outlet 53 which is connected by a hose equivalent to the hose 52 to carry any excess liquid back to the water tank 26. Each hose 52 that extends along the underside of the tractor 5 is provided with a dry break hydraulic connector.

[0041] Referring also to figure 5, along the front face of the support bar 40 is fixed a nylon runner 58, and a support tube 60 is fixed a short distance in front of the nylon runner 58, supported by a bracket 59 at the middle of the support bar 40 and by end plates 62 which are bolted onto the ends of the support bar 40. Several nozzle modules 64 can be mounted along this support tube 60,

six being shown in figures 2 to 5.

[0042] In figure 7 one such nozzle module 64 is shown in isolation. The module 64 includes an L-shaped clamping block 65 shaped to rest against the nylon runner 58 and against the underside of the support bar 40. This defines a transverse hole 66 through which the support tube 60 passes, and a clamp 67 to secure the block 65 to the support tube 60. It also defines vertical hole through which a support bar 68 can slide, and a clamp 69 to secure the support bar 68 to the block 65. The lower end of the support bar 68 is linked by a hinge 70 to a curved L-shaped bracket 72 to which a nozzle support plate 73 is connected. The nozzle support plate 73 supports three nozzles 74 spaced apart along a straight line, and arranged to spray the hot liquid below the nozzle support plate 73; in plan view, as shown in figure 4, the nozzle support plate 73 is lozenge-shaped, with rounded ends, but of length about five times its width. Below the nozzle support plate 73 is a flexible rubber curtain or skirt 75 which splays out. Considering the dimensions at the base of the curtain or skirt 75, the length may be 350 mm and the breadth 100 mm; it is desirable to have a ratio of length to breadth of at least 2.5 and preferably at least three, considering the region over which foam is being sprayed at any one time.

[0043] The curtain or skirt 75 may consist of a plurality of flexible rubber curtain portions each of which, along its top edge, can slide along one of two grooves adjacent to the periphery of the nozzle support plate 73, each being of length less than that of the periphery. By adjusting the positions of these curtain portions, and the extent to which they overlap each other, a gap in the skirt 75 may be provided at the rear side of the nozzle support plate 73. Consequently when the hot liquid from the foam generating apparatus 12 is dispensed through the nozzles 74, foam is generated below the nozzle support plate 73 in a space that is enclosed on the front and the sides, but is not enclosed at the rear. Each nozzle 74 generates a conical spray of foam (indicated as 74a in figure 7).

[0044] In addition the L-shaped bracket 72 also carries a liquid supply manifold 76, with an inlet 78 to communicate with a hose 55 from the header box 50 (see figure 4), and with three outlets 80 (only two of which are visible in figure 7) which are connected by hoses 82 (one of which is shown schematically) to the nozzles 74.

[0045] The orientation of the nozzle support plate 73 relative to the L-shaped bracket 72, and so relative to the direction of movement of the foam dispensing machine 14, can be adjusted, and can be fixed by a clamp 84.

[0046] As shown in figure 6, the wheels 42 are fixed to the ends of the support bar 40 by a clamp 86 which is clamped around the support bar 40 and by an inclined shaft 87 to ensure that the wheel 42 rides up over any ruts in the ground. The inclined shaft 87 includes a jack mechanism with a handle 88 so the position of the wheel 42 relative to the support bar 40 can be adjusted.

[0047] The nozzle modules 64 are hence supported by the support tube 60. By temporarily disconnecting one

end plate 62 and removing the wheel support clamp 86 some nozzle modules 64 may be removed, or additional nozzle modules 64 installed. The header boxes 50 provide a total of eight outlet ports 54, so there can be up to eight nozzle modules 64 mounted on the support tube 60. The transverse position of each nozzle module 64 can be adjusted by sliding it along the support tube 60, and then fixed with the clamp 67. The vertical height of the nozzle support plate 73 can be adjusted by raising or lowering the support bar 68, and fixed with the clamp 69. The hinge 70 ensures that the nozzle support plate 73 can swing back to clear any obstacle in its path, such as a stone.

[0048] With the nozzle support plates 73 in the orientation as shown, there are narrow gaps between the regions of the ground that are covered with foam. If the nozzle support plates 73 are adjusted so as to be aligned more closely with the direction of movement, then the gaps between the regions that are covered with foam become larger. On the other hand, if the nozzle support plates 73 are adjusted to extend at a larger angle to the direction of movement, they can be arranged so there are no gaps between the regions treated with foam. Hence the foam dispensing machine 14 can be adjusted either to treat weeds that are growing between rows of plants, or to treat an entire area.

[0049] Considering the effect of a single nozzle module 64, by adjusting the orientation of the nozzle support plate 73 the width of the ground that is treated may be varied between a minimum of about 100 mm (with the three nozzles 74 aligned with the direction of movement), up to a maximum of about 350 mm (with the three nozzles 74 aligned transverse to the direction of movement).

[0050] Typically operation of the weed treating apparatus 10 is controlled by the operator using a control panel in the cab 7. In operation the pump 36 supplies a stream of water from the water tank 26 to the electrical heaters 34 in the heater box 28, this water containing surfactant. The pump 36 controls both the pressure and the flow rate of the fluid stream. The flow rate is set in accordance with the number of nozzles 74 that are in use; the operator may for example actuate switches or touch-screen buttons within the control electronics 32 to indicate the number of operating nozzles 74. The resulting high pressure liquid stream is supplied through the solenoid valves 38 and the hoses 52 to the inlets 51 on the header boxes 50, and so through the hoses 55 to the nozzle modules 64. Any excess liquid in the header boxes 50 is recirculated back to the water tank 26.

[0051] As a desirable option the cab 7 may include a computer linked to or including a GPS aerial, and linked to the control electronics 32. Hence the computer can store data that indicates which areas have been treated, and when they were treated.

[0052] As a desirable option the foam dispensing machine 14 may include a pneumatic damper and control ram 90 which extends between the upwardly-extending link bar 41 and the support bar 40. The pneumatic damper

and control ram 90 is shown schematically in figure 6. This has two effects. When the foam dispensing machine 14 is being moved over bumpy ground, the ram 90 dampens the bouncing movement of the support bar 40 and the components fixed to it. If the driver of the tractor 5 raises the three-point linkage 8 with the foam dispensing machine 14 attached, the ram 90 limits the extent to which the support bar 40 can drop, restricting the movement of the parallel plate linkages 44, and so enabling the driver to lift the foam dispensing machine 14 clear of the ground, for example at the end of a row of crops.

[0053] The foam dispensing machine 14 may also be provided with adjustable legs or a jockey wheel 92, as indicated in broken lines in figure 6, so that the crossbar 46 does not rest on the ground when disconnected from the tractor 5.

[0054] It will be appreciated that a weed killing apparatus may differ from that described in relation to the figures. For example the weed killing apparatus 10 may be installed permanently as part of a dedicated vehicle, rather than being mounted on a general-purpose vehicle such as the tractor 5. The width of the foam dispensing machine 14 may differ from that described, and it may carry a smaller number or a larger number of nozzle modules 64. Where there are a larger number of nozzle modules 64 it may be appropriate to use a water tank 26 of greater capacity, to prolong the period for which the apparatus 10 can operate without refilling.

[0055] The control electronics 32 preferably includes indicators, visible by the operator, indicating the values of parameters such as temperatures, flow rates, and pressures. In one embodiment a touch-screen controller is provided in a portable box connected via a flexible cable or umbilical cord to the control electronics 32. Such a touch-screen controller may include controls such as an on/off switch for the screen itself, an indicator to show if the power takeoff 9 is at the correct speed, and an emergency stop button to disconnect the power to the heaters 34 and the pump 36. This touch-screen controller would normally be mounted in the cab 7, for example on a sucker pad, so the operator can use it when in the cab 7. Alternatively the operator can remove the touch-screen controller and attach it elsewhere, or hold it in his hand, for example when the operator is controlling weeds using a hand-held spray lance, so he can continue to control foam production without having to climb back into the cab 7.

Claims

1. An apparatus (12, 14) suitable for controlling vegetation which apparatus comprises a storage tank (26) for liquid comprising water which may be at ambient temperature; means (36) to supply liquid comprising water from the storage tank (26) to a reservoir (28), where it is to be heated; the reservoir (28) for hot liquid comprising a heating means to heat the liquid

- in the reservoir (28), the heating means being connectable to a power source (24), and being arranged to heat the liquid to a temperature of above 102°C such that the pressure in the reservoir (28) would be above atmospheric pressure, the heating means comprising a plurality of heaters (34) arranged in series, so the water is heated successively by the heaters (34) and the temperature is raised in a plurality of stages; release means (38) connected to the reservoir (28); and at least one nozzle (74) for applying a stream of foam that contains steam, connected to the reservoir (28) through the release means (38), arranged such that the water is at an elevated pressure, and does not boil until it emerges from a nozzle (74), and such that the liquid combines with air as it leaves the nozzle (74) to form the foam that contains steam; each nozzle (74) being connected to the release means (38) via a header box (50), the header box (50) being provided with an outflow means (53) to carry excess liquid back to the storage tank (26); the apparatus being mounted on a wheeled trolley (40, 42) or a trailer to be propelled by a vehicle (5) or being mounted on a vehicle.
2. An apparatus as claimed in claim 1, for use in conjunction with a vehicle (5), the apparatus being such that during use of the apparatus to control vegetation the vehicle (5) provides power (9) to the heating means (34).
 3. An apparatus as claimed in claim 2, the apparatus comprising a generator (24) which is driven by the vehicle (5), and which provides power to the heating means (34).
 4. An apparatus as claimed in claim 2 wherein liquid in the hot-liquid reservoir is heated by a burner system which is powered by a fuel carried by the vehicle (5).
 5. An apparatus as claimed in any one of the preceding claims also comprising means for introducing surfactant into liquid in or from the hot-liquid reservoir, before it reaches the nozzle (74).
 6. An apparatus as claimed in any one of the preceding claims also comprising a pump (36) to cause liquid to flow through the reservoir (28) as it is heated, the pump (36) controlling the pressure of the liquid in the reservoir (28).
 7. An apparatus as claimed in any one of the preceding claims also comprising a shroud (75) for the nozzle (74), such that the nozzle (74) is mounted within or inside a shroud (75) or is enclosed on at least one side by a shroud (75).
 8. An apparatus as claimed in claim 7 wherein each shroud (75) can be arranged to enclose respective nozzle or nozzles (74) at the front and sides, leaving an opening at the rear, relative to the direction of movement.
 9. An apparatus as claimed in any one of the preceding claims comprising support means for each nozzle (74), wherein each nozzle (74) is supported by a support bar (68) that includes a hinge (70), so that if the nozzle (74) collides with an obstruction as the apparatus is moved over the ground, the nozzle (74) can swing back to clear the obstruction.
 10. An apparatus as claimed in any one of the preceding claims comprising several nozzles (74) arranged in groups, each group being supported by a respective nozzle support plate (73), the orientation of the nozzle support plate (73) and so of the group of nozzles (74) being adjustable relative to the direction of movement.
 11. An apparatus as claimed in claim 10 wherein the ratio of width to breadth of the region treated by a group of nozzles (74) is greater than 3.
 12. A method of controlling vegetation, the method using an apparatus (12, 14) which comprises a storage tank (26) for liquid comprising water which may be at ambient temperature; means (36) to supply liquid comprising water from the storage tank (26) to a reservoir (28), where it is to be heated; the reservoir (28) for hot liquid comprising a heating means to heat liquid comprising water in the reservoir, the heating means being connectable to a power source (24), the heating means comprising a plurality of heaters (34) arranged in series, so the water is heated successively by the heaters (34) and the temperature is raised in a plurality of stages; release means (38) connected to the reservoir (28); at least one nozzle (74) for applying a stream of foam that contains steam, connected to the reservoir (28) through the release means (38); each nozzle (74) being connected to the release means (38) via a header box (50), the header box (50) being provided with an outflow means (53) to carry excess liquid back to the storage tank (26); the apparatus being mounted on a wheeled trolley (40, 42) or a trailer to be propelled by a vehicle (5) or being mounted on a vehicle (5); wherein the method comprises operating the heating means (34) to heat the liquid to a temperature of at least 102°C, and introducing a surfactant into the liquid, with the pressure in the reservoir (28) being above atmospheric pressure, so the liquid does not boil until it emerges from the nozzle (74), and as it emerges from the nozzle (74) the liquid forms a foam which contains steam; wherein the foam comprises up to 10% steam by weight.

Patentansprüche

1. Vorrichtung (12, 14), geeignet für das Bekämpfen von Vegetation, wobei die Vorrichtung Folgendes umfasst: einen Speichertank (26) für eine Flüssigkeit, die Wasser umfasst und Umgebungstemperatur haben kann; ein Mittel (36) zum Zuführen der Flüssigkeit, die Wasser umfasst, vom Speichertank (26) zu einem Vorratsbehälter (28), in dem sie erwärmt werden soll; wobei der Vorratsbehälter (28) für heiße Flüssigkeit ein Heizmittel zum Erwärmen der Flüssigkeit im Vorratsbehälter (28) umfasst, wobei das Heizmittel an eine Energiequelle (24) anschließbar ist und dafür angeordnet ist, die Flüssigkeit auf eine Temperatur von über 102 °C zu erwärmen, sodass der Druck im Vorratsbehälter (28) über dem atmosphärischen Druck liegt, wobei das Heizmittel eine Mehrzahl von Heizeinrichtungen (34) umfasst, die in einer Reihe angeordnet sind, sodass das Wasser nacheinander durch die Heizeinrichtungen (34) erwärmt wird und die Temperatur in einer Mehrzahl von Stufen gesteigert wird; ein Freigabemittel (38), das mit dem Vorratsbehälter (28) verbunden ist; und mindestens eine Düse (74) zum Aufbringen eines Stroms von Schaum, der Dampf enthält, die über das Freigabemittel (38) mit dem Vorratsbehälter (28) verbunden ist und derart angeordnet ist, dass das Wasser einen erhöhten Druck hat und nicht kocht, bis es aus einer Düse (74) austritt, und dass sich die Flüssigkeit mit Luft vereint, wenn sie aus der Düse (74) austritt, um den Schaum zu bilden, der Dampf enthält; wobei jede Düse (74) mit dem Freigabemittel (38) über eine Umlenkammer (50) verbunden ist, wobei die Umlenkammer (50) mit einem Auslaufmittel (53) versehen ist, um überschüssige Flüssigkeit zurück in den Speichertank (26) zu transportieren; wobei die Vorrichtung auf einem Wagen (40, 42) mit Rädern oder einem Anhänger befestigt ist, um von einem Fahrzeug (5) angetrieben zu werden, oder auf einem Fahrzeug befestigt ist.
2. Vorrichtung nach Anspruch 1, zur Verwendung in Verbindung mit einem Fahrzeug (5), wobei die Vorrichtung derart beschaffen ist, dass das Fahrzeug (5) während der Verwendung der Vorrichtung zum Bekämpfen von Vegetation das Heizmittel (34) mit Energie (9) versorgt.
3. Vorrichtung nach Anspruch 2, wobei die Vorrichtung einen Generator (24) umfasst, der durch das Fahrzeug (5) angetrieben wird und das Heizmittel (34) mit Energie versorgt.
4. Vorrichtung nach Anspruch 2, wobei Flüssigkeit im Vorratsbehälter für heiße Flüssigkeit durch ein Brennersystem erwärmt wird, das durch einen vom Fahrzeug (5) getragenen Brennstoff betrieben wird.
5. Vorrichtung nach einem der vorhergehenden Ansprüche, außerdem umfassend Mittel zum Einbringen eines Tensids in die Flüssigkeit im oder aus dem Vorratsbehälter für heiße Flüssigkeit, bevor sie die Düse (74) erreicht.
6. Vorrichtung nach einem der vorhergehenden Ansprüche, außerdem umfassend eine Pumpe (36), um Flüssigkeit dazu zu bringen, beim Erwärmen durch den Vorratsbehälter (28) zu fließen, wobei die Pumpe (36) den Druck der Flüssigkeit im Vorratsbehälter (28) reguliert.
7. Vorrichtung nach einem der vorhergehenden Ansprüche, außerdem umfassend eine Verkleidung (75) für die Düse (74), sodass die Düse (74) in oder innerhalb einer Verkleidung (75) befestigt ist oder auf mindestens einer Seite von einer Verkleidung (75) umschlossen ist.
8. Vorrichtung nach Anspruch 7, wobei jede Verkleidung (75) dafür angeordnet sein kann, die jeweilige Düse oder Düsen (74) an der Vorderseite und den Seiten zu umschließen, wobei an der Rückseite relativ zur Bewegungsrichtung eine Öffnung gelassen wird.
9. Vorrichtung nach einem der vorhergehenden Ansprüche, umfassend Stützmittel für jede Düse (74), wobei jede Düse (74) durch einen Stützbalken (68) gestützt wird, der ein Gelenk (70) aufweist, sodass die Düse (74), wenn die Düse (74) beim Bewegen der Vorrichtung über den Grund mit einem Hindernis kollidiert, nach hinten schwingen kann, um das Hindernis zu passieren.
10. Vorrichtung nach einem der vorhergehenden Ansprüche, umfassend mehrere Düsen (74), die in Gruppen angeordnet sind, wobei jede Gruppe durch eine jeweilige Düsenstützplatte (73) gestützt ist, wobei die Ausrichtung der Düsenstützplatte (73) und somit der Gruppe der Düsen (74) relativ zur Bewegungsrichtung einstellbar ist.
11. Vorrichtung nach Anspruch 10, wobei das Verhältnis zwischen Weite und Breite des von einer Gruppe von Düsen (74) behandelten Bereichs größer als 3 ist.
12. Verfahren für das Bekämpfen von Vegetation, wobei das Verfahren eine Vorrichtung (12, 14) verwendet, die Folgendes umfasst: einen Speichertank (26) für eine Flüssigkeit, die Wasser umfasst und Umgebungstemperatur haben kann; ein Mittel (36) zum Zuführen der Flüssigkeit, die Wasser umfasst, vom Speichertank (26) zu einem Vorratsbehälter (28), in dem sie erwärmt werden soll; wobei der Vorratsbehälter (28) für heiße Flüssigkeit ein Heizmittel zum

Erwärmen der Flüssigkeit, die Wasser umfasst, im Vorratsbehälter umfasst, wobei das Heizmittel an eine Energiequelle (24) anschließbar ist und das Heizmittel eine Mehrzahl von Heizeinrichtungen (34) umfasst, die in einer Reihe angeordnet sind, sodass das Wasser nacheinander durch die Heizeinrichtungen (34) erwärmt wird und die Temperatur in einer Mehrzahl von Stufen gesteigert wird; ein Freigabemittel (38), das mit dem Vorratsbehälter (28) verbunden ist; mindestens eine Düse (74) zum Aufbringen eines Stroms von Schaum, der Dampf enthält, die über das Freigabemittel (38) mit dem Vorratsbehälter (28) verbunden ist; wobei jede Düse (74) mit dem Freigabemittel (38) über eine Umlenkammer (50) verbunden ist, wobei die Umlenkammer (50) mit einem Auslaufmittel (53) versehen ist, um überschüssige Flüssigkeit zurück in den Speichertank (26) zu transportieren; wobei die Vorrichtung auf einem Wagen (40, 42) mit Rädern oder einem Anhänger befestigt ist, um von einem Fahrzeug (5) angetrieben zu werden, oder auf einem Fahrzeug (5) befestigt ist; wobei das Verfahren das Betreiben des Heizmittels (34) umfasst, um die Flüssigkeit auf eine Temperatur von mindestens 102 °C zu erwärmen, und das Einbringen eines Tensids in die Flüssigkeit, wobei der Druck im Vorratsbehälter (28) über dem atmosphärischen Druck liegt, sodass die Flüssigkeit nicht kocht, bis sie aus der Düse (74) austritt, und die Flüssigkeit einen Schaum bildet, der Dampf enthält, wenn sie aus der Düse (74) austritt; wobei der Schaum bis zu 10 Gewichts-% Dampf umfasst.

Revendications

- Appareil (12, 14) adapté au désherbage, lequel appareil comprend une citerne de stockage (26) destinée à un liquide contenant de l'eau qui peut être à la température ambiante ; des moyens (36) servant à amener un liquide contenant de l'eau de la citerne de stockage (26) à un réservoir (28) où il doit être chauffé ; le réservoir (28) destiné au liquide chaud comprenant un moyen de chauffage servant à chauffer le liquide dans le réservoir (28), le moyen de chauffage pouvant être raccordé à une source d'alimentation en énergie (24), et étant adapté pour chauffer le liquide à une température supérieure à 102°C de sorte que la pression à l'intérieur du réservoir (28) soit supérieure à la pression atmosphérique, le moyen de chauffage comprenant une pluralité d'éléments chauffants (34) disposés en série, de sorte que l'eau est chauffée successivement par les éléments chauffants (34) et la température est élevée en une pluralité d'étapes ; des moyens de libération (38) raccordés au réservoir (28) ; et au moins une buse (74) servant à appliquer un débit de mousse qui contient de la vapeur et raccordée au réservoir (28) par le biais des moyens de libération (38), dis-

posés de telle sorte que l'eau soit à une pression élevée, et ne bouille pas avant de sortir d'une buse (74), et de telle sorte que le liquide se combine à de l'air lorsqu'il sort de la buse (74) pour former la mousse qui contient de la vapeur, chaque buse (74) étant raccordée aux moyens de libération (38) par le biais d'une boîte de raccordement (50), la boîte de raccordement (50) étant munie d'un moyen d'évacuation (53) servant à ramener du liquide en excès à la citerne de stockage (26), l'appareil étant monté sur un chariot (40, 42) à roues ou sur une remorque entraînée par un véhicule (5) ou étant monté sur un véhicule.

- Appareil selon la revendication 1, destiné à être utilisé conjointement avec un véhicule (5), l'appareil étant tel que, pendant l'utilisation de l'appareil de désherbage, le véhicule (5) fournit de l'énergie (9) au moyen de chauffage (34).
- Appareil selon la revendication 2, l'appareil comprenant un générateur (24) qui est entraîné par le véhicule (5) et qui fournit de l'énergie au moyen de chauffage (34).
- Appareil selon la revendication 2, dans lequel le liquide se trouvant dans le réservoir de liquide chaud est chauffé par un système de brûleurs alimenté en combustible transporté par le véhicule (5).
- Appareil selon l'une quelconque des revendications précédentes, comprenant également des moyens d'introduction d'un tensio-actif dans le liquide se trouvant dans le réservoir de liquide chaud ou provenant de celui-ci, avant qu'il n'atteigne la buse (74).
- Appareil selon l'une quelconque des revendications précédentes, comprenant également une pompe (36) servant à faire passer du liquide à travers le réservoir (28) lorsqu'il est chauffé, la pompe (36) commandant la pression du liquide dans le réservoir (28).
- Appareil selon l'une quelconque des revendications précédentes, comprenant également une enveloppe de protection (75) destinée à la buse (74), de telle sorte que la buse (74) est montée au sein ou à l'intérieur d'une enveloppe de protection (75) ou est entourée sur au moins un côté par une enveloppe de protection (75).
- Appareil selon la revendication 7, dans lequel chaque enveloppe de protection (75) peut être disposée de manière à entourer la buse ou les buses (74) respectives à l'avant et sur les côtés, en ménageant une ouverture à l'arrière, par rapport à la direction de déplacement.

9. Appareil selon l'une quelconque des revendications précédentes, comprenant des moyens de support destinés à chaque buse (74), chaque buse (74) étant supportée par une barre de support (68) qui comprend une charnière (70), de sorte que si la buse (74) entre en collision avec un obstacle, lorsque l'appareil est déplacé sur le sol, la buse (74) peut basculer en arrière pour se dégager de l'obstacle. 5

10. Appareil selon l'une quelconque des revendications précédentes, comprenant plusieurs buses (74) disposées en groupes, chaque groupe étant supporté par une plaque de support de buse (73) respective, l'orientation de la plaque de support de buse (73) et donc du groupe de buses (74) étant réglable par rapport à la direction de déplacement. 10 15

11. Appareil selon la revendication 10, dans lequel le rapport de la largeur à l'étendue de la zone traitée par un groupe de buses (74) est supérieure à 3. 20

12. Procédé de désherbage, le procédé utilisant un appareil (12, 14) qui comprend une citerne de stockage (26) destiné à un liquide contenant de l'eau qui peut être à la température ambiante ; des moyens (36) servant à amener un liquide contenant de l'eau de la citerne de stockage (26) à un réservoir (28) où il doit être chauffé ; le réservoir (28) destiné au liquide chaud comprenant un moyen de chauffage servant à chauffer le liquide contenant de l'eau, le moyen de chauffage pouvant être raccordé à une source d'alimentation en énergie (24), le moyen de chauffage comprenant une pluralité d'éléments chauffants (34) disposés en série, de sorte que l'eau est chauffée successivement par les éléments chauffants (34) et la température est élevée en une pluralité d'étapes ; des moyens de libération (38) raccordés au réservoir (28) ; au moins une buse (74) servant à appliquer un débit de mousse qui contient de la vapeur et raccordée au réservoir (28) par le biais des moyens de libération (38) ; chaque buse (74) étant raccordée aux moyens de libération (38) par le biais d'une boîte de raccordement (50), la boîte de raccordement (50) étant munie d'un moyen d'évacuation (53) servant à ramener du liquide en excès à la citerne de stockage (26) ; l'appareil étant monté sur un chariot (40, 42) à roues ou sur une remorque entraînée par un véhicule (5), ou étant monté sur un véhicule ; le procédé comprenant les opérations consistant à commander le moyen de chauffage (34) pour chauffer le liquide à une température d'au moins 102°C, et à introduire un tensioactif dans le liquide, la pression dans le réservoir (28) étant supérieure à la pression atmosphérique, de sorte que le liquide ne bouille pas avant de sortir de la buse (74), et lorsqu'il sort de la buse (74) le liquide forme une mousse qui contient de la vapeur ; la mousse comprenant jusqu'à 10% en poids de vapeur. 25 30 35 40 45 50 55

Fig.1.

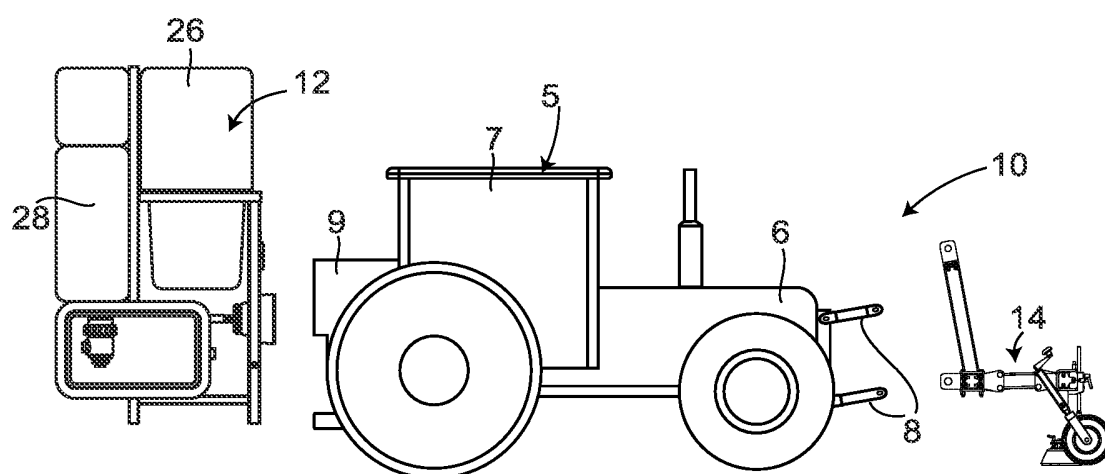


Fig.2.

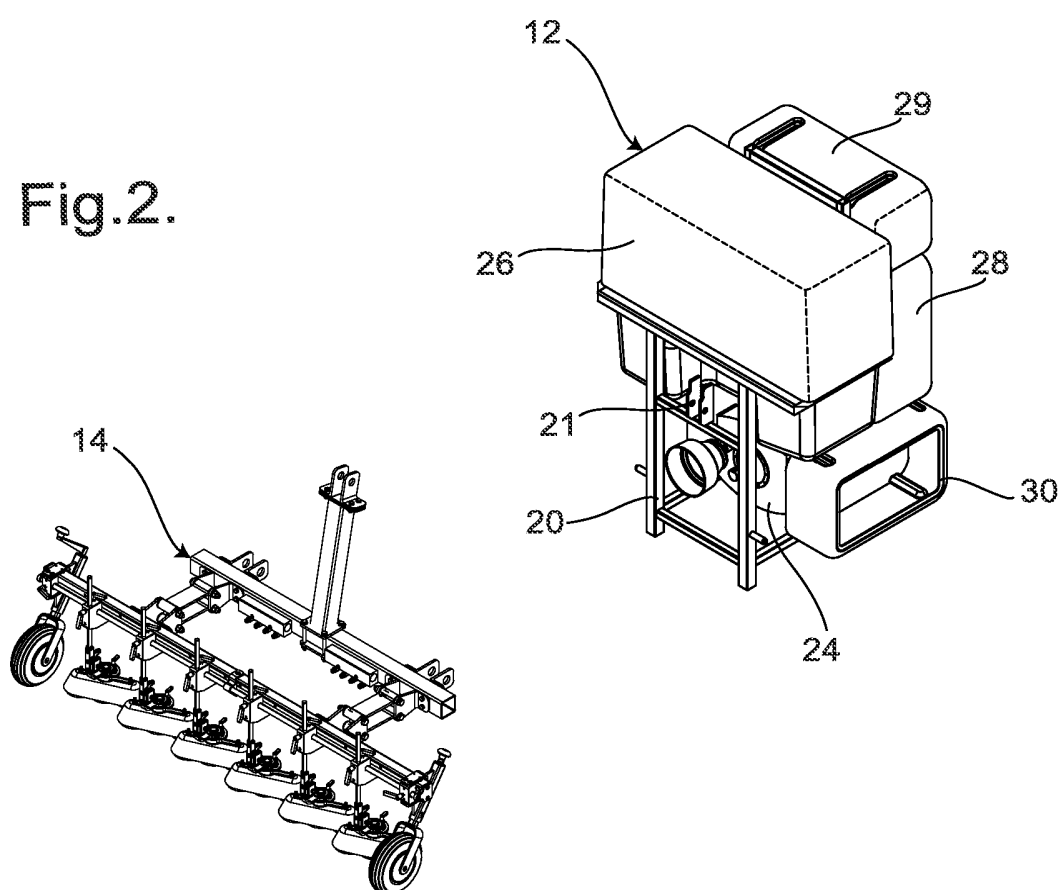


Fig.3.

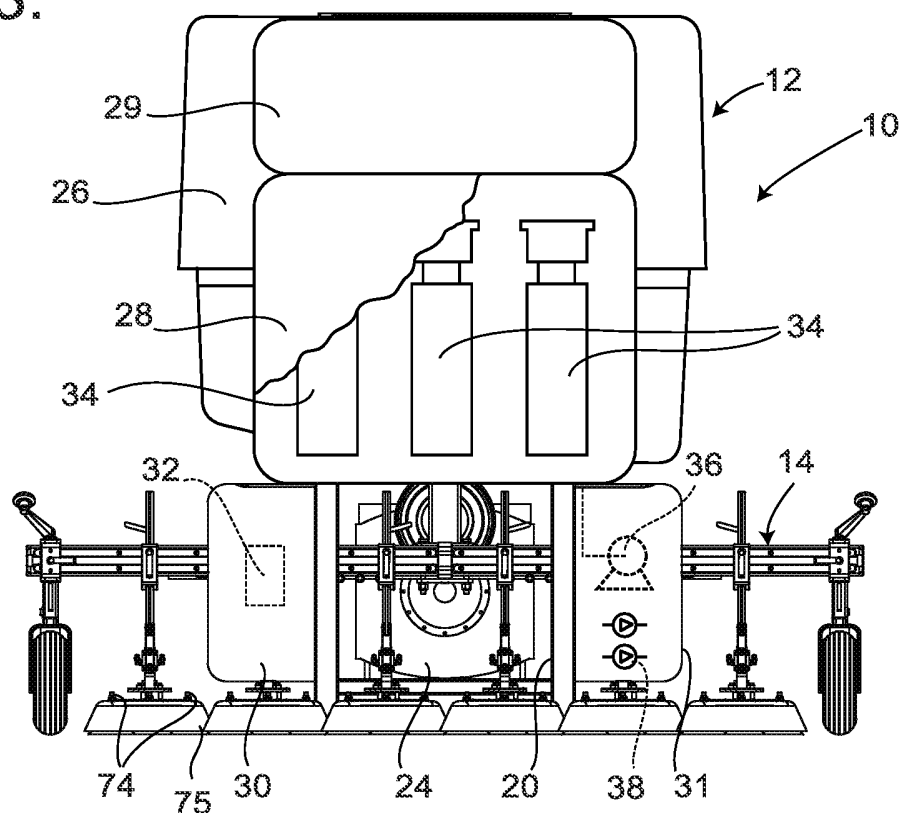


Fig.4.

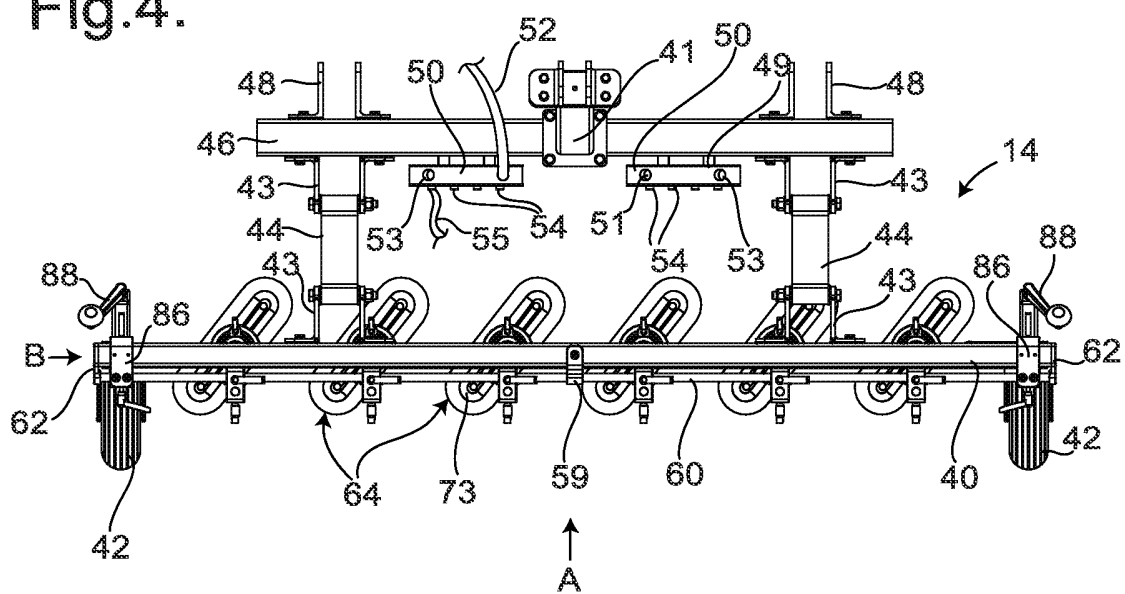


Fig.5.

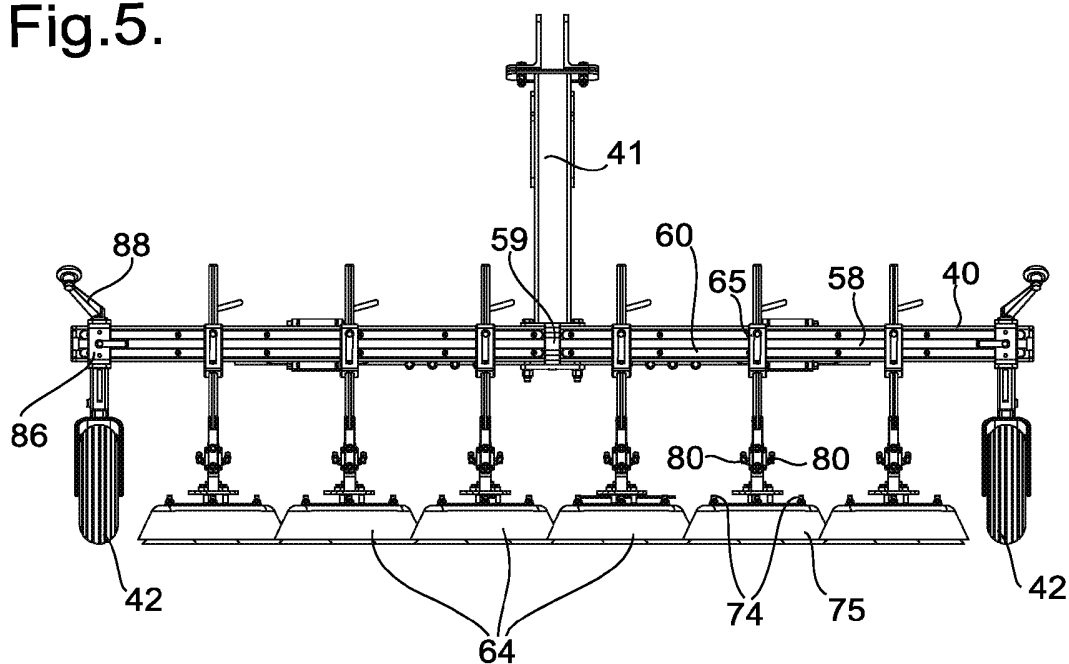


Fig.6.


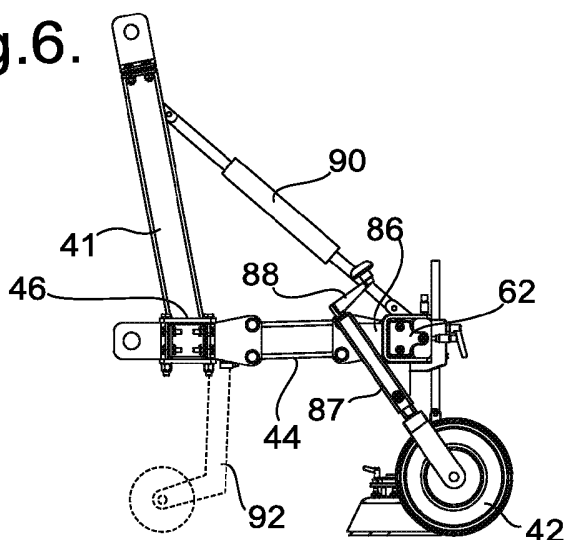


Fig.7.

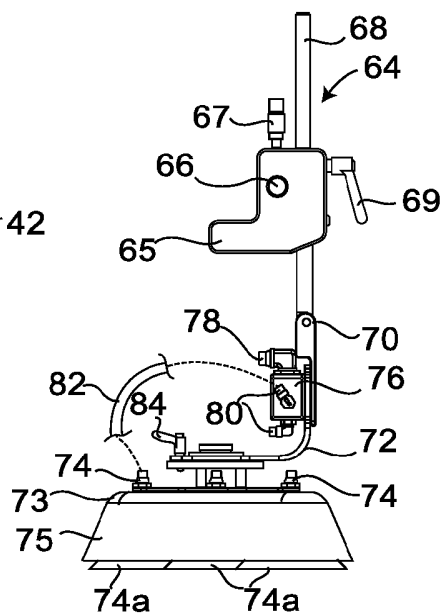

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 0207513 A [0003]
- EP 1450603 A [0003]

GYOMIRTÓ ESZKÖZ

SZABADALMI IGÉNYPONTOK

1. Berendezés (12, 14), amely alkalmas vegetáció szabályozására, amely berendezés tartalmaz egy tárolótartályt (26) folyadék számára, amely folyadék olyan vizet tartalmaz, amely környezeti hőmérsékletű lehet; eszközt (36) a víztartalmú folyadéknak a tárolótartályból (26) egy kezelőtartályba (28) történő továbbítására, amelyben a folyadékot fel kell melegíteni; ahol a forró folyadék tárolására szolgáló kezelőtartály (28) tartalmaz egy fűtőeszközt a kezelőtartályban (28) lévő folyadék felmelegítésére, amely fűtőeszköz egy energiaforráshoz (24) csatlakoztatható, és amely fűtőeszköz úgy van elrendezve, hogy a folyadékot 102 °C-nál magasabb hőmérsékletre melegíti oly módon, hogy a kezelőtartályban (28) uralkodó nyomás a légköri nyomásnál magasabb legyen, továbbá amely fűtőeszköz sorba kapcsolt fűtőelemeket (34) tartalmaz oly módon, hogy a vizet a fűtőelemek (34) fokozatosan melegítik föl és ezáltal a hőmérséklet több fokozatban emelkedik; egy kieresztő eszközt (38), amely a kezelőtartályhoz (28) csatlakozik; és legalább egy fűvókát (74) gőztartalmú habfolyam kibocsátására, amely fűvóka a kieresztő eszközön (38) keresztül a kezelőtartályhoz (28) csatlakozik és úgy van elrendezve, hogy a víz megnövelt nyomással rendelkezik és nem forr föl, amíg ki nem lép a fűvókából (74), továbbá a fűvóka kialakítása olyan, hogy a folyadék egyesül a levegővel, amikor az kilép a fűvókából (74) és ezáltal gőztartalmú habot képez; ahol mindegyik fűvóka (74) egy olyan elosztó dobozon (50) keresztül csatlakozik a kieresztő eszközhöz (38), amely elosztó doboz (50) olyan kivezető eszközzel (53) van ellátva, amely a felesleges folyadékot visszaszállítja a tárolótartályba (26); amely berendezés egy járművel (5) mozgatott kerekes kocsira (40, 42) vagy utánfutóra, vagy egy járműre van szerelve.
2. Az 1. igénypont szerinti berendezés egy járművel (5) együtt történő felhasználásra, amely berendezés olyan, hogy a berendezés vegetáció szabályozására történő felhasználása során a jármű (5) biztosítja az energiát (9) a fűtőelemek (34) számára.
3. A 2. igénypont szerinti berendezés, amely berendezés tartalmaz egy, a jármű (5) által meghajtott generátort (24), amely a fűtőelemek (34) számára az energiát biztosítja.
4. A 2. igénypont szerinti berendezés, ahol a forró folyadékot tartalmazó kezelőtartályban lévő folyadék egy égető rendszerrel van felmelegítve, melyet a jármű (5) által szállított üzemanyag táplál.
5. Az előző igénypontok bármelyike szerinti berendezés, amely tartalmaz továbbá egy olyan eszközt, amely felületaktív anyagot juttat a forró folyadékot tartalmazó kezelőtartályban lévő vagy abból távozó folyadékba, mielőtt az eléri a fűvókát (74).
6. Az előző igénypontok bármelyike szerinti berendezés, amely tartalmaz továbbá egy olyan szivattyút (36), amely a folyadékot átáramoltatja a kezelőtartályon (28) keresztül, miután az fel lett melegítve, és amely szivattyú (36) a kezelőtartályban (28) lévő folyadék nyomását szabályozza.
7. Az előző igénypontok bármelyike szerinti berendezés, amely tartalmaz továbbá egy burkolatot (75) a fűvóka (74) számára, ahol a fűvóka (74) a burkolaton (75) belül vagy annak belsejében van rögzítve vagy a burkolat (75) legalább egy oldalához van csatlakoztatva.

8. A 7. igénypont szerinti berendezés, ahol mindegyik burkolat (75) elrendezhető úgy, hogy a haladási irányt tekintve elől és az oldalain tartalmazza a megfelelő fűvókát vagy fűvókákat (74), hátul pedig nyitott.
9. Az előző igénypontok bármelyike szerinti berendezés, amely tartalmaz egy tartóeszközt az egyes fűvókák (74) számára, ahol mindegyik fűvókát (74) egy olyan tartórúd (68) tartja, amely tartalmaz egy csuklópántot (70), ahol amennyiben a fűvóka (74) nekiütközik egy akadálnak, miközben a berendezés a talajon mozog, a fűvóka (74) hátrafelé ki tud térni az akadály kikerülése céljából.
10. Az előző igénypontok bármelyike szerinti berendezés, amely több fűvókát (74) tartalmaz csoportokba rendezve, ahol mindegyik csoportot egy megfelelő fűvókátartó lap (73) tart, ahol a fűvókátartó lap (73) orientációja, valamint a fűvókák (74) csoportjának orientációja a haladási irányhoz viszonyítva változtatható.
11. A 10. igénypont szerinti berendezés, ahol a fűvókák (74) egy csoportja által kezelt terület szélessége több, mint háromszorosa a fűvókacsoport szélességének.
12. Eljárás vegetáció szabályozására, amely eljáráshoz egy olyan berendezést (12, 14) használunk, amely berendezés tartalmaz egy tárolótartályt (26) folyadék számára, amely folyadék olyan vizet tartalmaz, amely környezeti hőmérsékletű lehet; eszközt (36) a víztartalmú folyadéknak a tárolótartályból (26) egy kezelőtartályba (28) történő továbbítására, amelyben a folyadékot fel kell melegíteni; ahol a forró folyadék tárolására szolgáló kezelőtartály (28) tartalmaz egy fűtőeszközt a kezelőtartályban (28) lévő folyadék felmelegítésére, amely fűtőeszköz egy energiaforráshoz (24) csatlakoztatható, és amely fűtőeszköz sorba kapcsolt fűtőelemeket (34) tartalmaz, melyek oly módon vannak elrendezve, hogy a vizet a fűtőelemek (34) fokozatosan melegítik föl és ezáltal a hőmérséklet több fokozatban emelkedik; egy kieresztő eszközt (38), amely a kezelőtartályhoz (28) csatlakozik; és legalább egy fűvókát (74) gőztartalmú habfolyam kibocsátására, amely fűvóka a kieresztő eszközön (38) keresztül a kezelőtartályhoz (28) csatlakozik; ahol mindegyik fűvóka (74) egy olyan elosztó dobozon (50) keresztül csatlakozik a kieresztő eszközhöz (38), amely elosztó doboz (50) olyan kivezető eszközzel (53) van ellátva, amely a felesleges folyadékot visszaszállítja a tárolótartályba (26); amely berendezés egy járművel (5) mozgatott kerek kocsira (40, 42) vagy utánfutóra, vagy egy járműre van szerelve; ahol az eljárás során a fűtő eszközt (34) úgy működtetjük, hogy a folyadékot legalább 102 °C hőmérsékletre melegítjük, és felületaktív anyagot juttatunk a folyadékba, ahol a kezelőtartályban (28) uralkodó nyomás a légköri nyomásnál magasabb, és ahol a folyadék nem forr föl mindaddig, amíg ki nem lép a fűvókából (74), és amikor a folyadék kilép a fűvókából (74), akkor gőztartalmú habot képez; ahol a hab legfeljebb 10 tömeg% gőzt tartalmaz.