

(51) International Patent Classification:
H05B 33/08 (2006.01)(21) International Application Number:
PCT/US2012/035924(22) International Filing Date:
1 May 2012 (01.05.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/482,116 3 May 2011 (03.05.2011) US(71) Applicant (for all designated States except US): **MI-CROSEMI CORPORATION** [US/US]; One Enterprise, Aliso Viejo, California 92656 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JIN, Xiaoping** [SG/US]; 6984 E. Villanueva Dr., Orange, California 92867 (US).(74) Agent: **KAHN, Simon**; Microsemi Corporation, c/o LandonIP, Inc., 1725 Jamieson Avenue, Alexandria, Virginia 22314 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: HIGH EFFICIENCY LED DRIVING METHOD

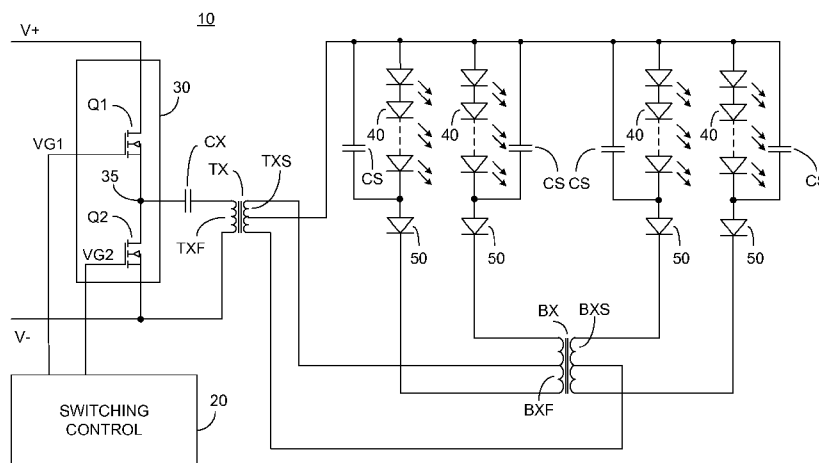


FIG. 1

(57) **Abstract:** An arrangement wherein a plurality of LED strings are driven with a balanced drive signal, i.e. a drive signal wherein the positive side and negative side are of equal energy over time, is provided. In a preferred embodiment, the drive signal is balanced responsive to a capacitor provided between a switching network and a driving transformer. Balance of current between various LED strings is provided by a balancing transformer.

HIGH EFFICIENCY LED DRIVING METHOD

FIELD OF THE INVENTION

[0001] The present invention relates to the field of solid state lighting, and in particular to an LED driving arrangement with a balancer and a capacitively coupled driving signal.

BACKGROUND OF THE INVENTION

[0002] Light emitting diodes (LEDs) have become very popular for use as lighting devices due to their advantages of high efficiency, long life, mechanical compactness and robustness, and low voltage operation, without limitation. Application areas include liquid crystal display (LCD) backlight, general lighting, and signage display. LEDs exhibit similar electrical characteristics to diodes, i.e. LEDs only conduct current when the forward voltage across the device reaches its conduction threshold, denoted V_F , and when the forward voltage increases above V_F the current flowing through the device increases sharply. As a result a particular drive circuit has to be furnished in order to control the LED current stably.

[0003] The existing approach in today's market normally uses a switching type DC to DC converter, typically in a current control mode, to drive the LED lighting device. Because of the limited power capacity of a single LED device, in most applications multiple LED's are connected in series to form a LED string, and multiple such LED strings work together, typically in parallel, to produce the desired light intensity. In multiple LED string applications a DC to DC converter is normally employed to supply a DC voltage sufficient for the LED operation, however because the operating voltage of LEDs have a wide tolerance (+/-5% to +/-10%), an individual control circuit has to be deployed with each LED string to regulate its current. For simplicity, such a current regulator typically employs a linear regulation technique, wherein a power regulation device is connected in series with the LED string and the LED current is controlled by adjusting the voltage drop across the power regulating device. Unfortunately, such an approach consumes excessive power and generates excessive heat because of the power dissipation of the linear regulation devices. In some approaches a switching type DC to DC converter is provided for each LED

string. Such an approach yields a high efficiency operation but the associated costs also increase dramatically.

[0004] What is needed, and not provided by the prior art, is an LED drive method with high operating efficiency and a low system cost, which provides a balancing function between the various LED strings of a multiple LED string luminaire.

SUMMARY OF THE INVENTION

[0005] Accordingly, it is a principal object of the present invention to overcome at least some of the disadvantages of the prior art. This is provided in certain embodiments by an arrangement wherein a plurality of LED strings are driven with a balanced drive signal, i.e. a drive signal wherein the positive side and negative side are forced to be of equal energy over time. In a preferred embodiment, the drive signal is balanced responsive to a capacitor provided between a switching network and a driving transformer. Balance of current between various LED strings is provided by a balancing transformer.

[0006] Certain embodiments enable a driving arrangement for light emitting diode (LED) based luminaire comprising: a driving transformer having a first winding and a second winding, the second winding magnetically coupled to the first winding; a switching control circuit; a switching bridge comprising a pair of electronically controlled switches coupled to a common node, each of the pair of electronically controlled switches responsive to an output of the switching control circuit; a direct current (DC) blocking capacitor coupled between the common node of the switching bridge and a first end of the primary winding of the driving transformer; a balancing transformer having a first winding and a second winding, the second winding magnetically coupled to the first winding; a first LED string; and a second LED string, a first end of each of the first LED string and the second LED string coupled to the second winding of the driving transformer, and arranged to receive electrical energy there from; and a second end of the first LED string coupled to a first winding of the balancing transformer, and a second end of the second LED string coupled to a second winding of the balancing transformer, the switching control circuit arranged to provide a switching cycle comprising a first period wherein electrical energy is output from the second winding of the driving transformer with a first polarity, and a second

period wherein electrical energy is output from the second winding of the driving transformer with a second polarity, the second polarity opposite the first polarity, the DC blocking capacitor arranged such that the total electrical energy output from the second winding during the first period of the switching cycle is equal to the total electrical energy output from the second winding during the second period of the switching cycle, and the balancing transformer arranged such that the current through the first LED string is equal to the current through the second LED string.

[0007] In one further embodiment, the first end of each of the first LED string and the second LED string are commonly coupled to a center tap of the second winding of the driving transformer; the second end of the first LED string coupled to a center tap of the first winding of the balancing transformer; and the second end of the second LED string coupled to a center tap of the second winding of the balancing transformer. In one yet further embodiment: a first end of the first winding of the balancing transformer is coupled to a first end of the second winding of the driving transformer; a second end of the first winding of the balancing transformer is coupled to a second end of the second winding of the driving transformer; a first end of the second winding of the balancing transformer is coupled to the second end of the second winding of the driving transformer; and a second end of the second winding of the balancing transformer is coupled to the first end of the second winding of the driving transformer. In another yet further embodiment the driving arrangement further comprises: a first, second, third and fourth unidirectional electronic valve, wherein: a first end of the first winding of the balancing transformer is coupled to a first end of the second winding of the driving transformer via the first unidirectional electronic valve; a second end of the first winding of the balancing transformer is coupled to a second end of the second winding of the driving transformer via the second unidirectional electronic valve; a first end of the second winding of the balancing transformer is coupled to the second end of the second winding of the driving transformer via the third unidirectional electronic valve; and a second end of the second winding of the balancing transformer is coupled to the first end of the second winding of the driving transformer via the fourth unidirectional electronic valve.

[0008] In another further embodiment the driving arrangement further comprises: a third LED string; and a fourth LED string, wherein: a first end of each of

the third LED string and the fourth LED string are coupled to the second winding of the driving transformer, and arranged to receive electrical energy there from; a second end of the third LED string is coupled to the first winding of the balancing transformer; and a second end of the fourth LED string is coupled to the second winding of the balancing transformer, the first winding of the balancing transformer arranged such that the current through the first LED string is equal to the current through the third LED string, and the second winding of the balancing transformer arranged such that the current through the second LED string is equal to the current through the fourth LED string.

[0009] In one yet further embodiment: the first end of each of the first LED string, the second LED string, the third LED string and the fourth LED string are commonly coupled a center tap of the second winding of the driving transformer; the second end of the first LED string is coupled to a first end of the first winding of the balancing transformer; the second end of the second LED string is coupled to a first end of the second winding of the balancing transformer; the second end of the third LED string is coupled to a second end of the first winding of the balancing transformer; the second end of the fourth LED string is coupled to a second end of the second winding of the balancing transformer; a first end of the second winding of the driving transformer is coupled to a center tap of the first winding of the balancing transformer; and a second end of the second winding of the driving transformer is coupled to a center tap of the second winding of the balancing transformer.

[00010] In another yet further embodiment, the driving arrangement further comprises: a first, a second, a third and a fourth unidirectional electronic valve, wherein: the second end of the first LED string is coupled to the first end of the first winding of the balancing transformer via the first unidirectional electronic valve; the second end of the second LED string is coupled to the first end of the second winding of the balancing transformer via the second unidirectional electronic valve; the second end of the third LED string is coupled to the second end of the first winding of the balancing transformer via the third unidirectional electronic valve; and the second end of the fourth LED string is coupled to the second end of the second winding of the balancing transformer via the fourth unidirectional electronic valve.

[00011] In another yet further embodiment, the driving arrangement further comprises: a first and a second unidirectional electronic valve, wherein: the first end

of the second winding of the driving transformer is coupled to the center tap of the first winding of the balancing transformer via the first unidirectional electronic valve; and the second end of the second winding of the driving transformer is coupled to the center tap of the second winding of the balancing transformer via the second unidirectional electronic valve.

[00012] In another further embodiment: the first end of each of the first LED string and the third LED string are coupled to a first end of the second winding of the driving transformer; the first end of each of the second LED string and the fourth LED string are coupled to the second end of the second winding of the driving transformer; the second end of the first LED string coupled to a first end of the first winding of the balancing transformer; the second end of the second LED string coupled to a first end of the second winding of the balancing transformer; the second end of the third LED string coupled to a second end of the first winding of the balancing transformer; and the second end of the fourth LED string coupled to a second end of the second winding of the balancing transformer. In one yet further embodiment the driving arrangement further comprises: a first and a second unidirectional electronic valve, wherein: the first end of the first and third LED strings are coupled to the first end of the second winding of the driving transformer via the first unidirectional electronic valve; and the first end of the second and fourth LED strings are coupled to the second end of the second winding of the driving transformer via the second unidirectional electronic valve.

[00013] Independently, certain embodiments enable a driving arrangement for light emitting diode (LED) based luminaire comprising: a means for driving having a first winding and a second winding, the second winding magnetically coupled to the first winding; a means for switching; a switching bridge comprising a pair of electronically controlled switches coupled to a common node, each of the pair of electronically controlled switches responsive to an output of the means for switching; a direct current (DC) blocking capacitor coupled between the common node of the switching bridge and a first end of the primary winding of the means for driving; a balancing transformer having a first winding and a second winding, the second winding magnetically coupled to the first winding; a first LED string; and a second LED string, a first end of each of the first LED string and the second LED string coupled to the second winding of the means for driving, and arranged to receive

electrical energy there from; and a second end of the first LED string coupled to a first winding of the balancing transformer, and a second end of the second LED string coupled to a second winding of the balancing transformer, the means for switching arranged to provide a switching cycle comprising a first period wherein electrical energy is output from the second winding of the means for driving with a first polarity, and a second period wherein electrical energy is output from the second winding of the means for driving with a second polarity, the second polarity opposite the first polarity, the DC blocking capacitor arranged such that the total electrical energy output from the second winding during the first period of the switching cycle is equal to the total electrical energy output from the second winding during the second period of the switching cycle, and the balancing transformer arranged such that the current through the first LED string is equal to the current through the second LED string.

[00014] In one further embodiment: the first end of each of the first LED string and the second LED string are commonly coupled to a center tap of the second winding of the means for driving; the second end of the first LED string coupled to a center tap of the first winding of the balancing transformer; and the second end of the second LED string coupled to a center tap of the second winding of the balancing transformer. In one yet further embodiment: a first end of the first winding of the balancing transformer is coupled to a first end of the second winding of the means for driving; a second end of the first winding of the balancing transformer is coupled to a second end of the second winding of the means for driving; a first end of the second winding of the balancing transformer is coupled to the second end of the second winding of the means for driving; and a second end of the second winding of the balancing transformer is coupled to the first end of the second winding of the means for driving. In another yet further embodiment the driving arrangement further comprises: a first, second, third and fourth unidirectional electronic valve, wherein: a first end of the first winding of the balancing transformer is coupled to a first end of the second winding of the means for driving via the first unidirectional electronic valve; a second end of the first winding of the balancing transformer is coupled to a second end of the second winding of the means for driving via the second unidirectional electronic valve; a first end of the second winding of the balancing transformer is coupled to the second end of the second winding of the means for

driving via the third unidirectional electronic valve; and a second end of the second winding of the balancing transformer is coupled to the first end of the second winding of the means for driving via the fourth unidirectional electronic valve.

[00015] In another further embodiment the driving arrangement further comprises: a third LED string; and a fourth LED string, wherein: a first end of each of the third LED string and the fourth LED string are coupled to the second winding of the means for driving, and arranged to receive electrical energy there from; a second end of the third LED string is coupled to the first winding of the balancing transformer; and a second end of the fourth LED string is coupled to the second winding of the balancing transformer, the first winding of the balancing transformer arranged such that the current through the first LED string is equal to the current through the third LED string, and the second winding of the balancing transformer arranged such that the current through the second LED string is equal to the current through the fourth LED string.

[00016] In one yet further embodiment: the first end of each of the first LED string, the second LED string, the third LED string and the fourth LED string are commonly coupled a center tap of the second winding of the means for driving; the second end of the first LED string is coupled to a first end of the first winding of the balancing transformer; the second end of the second LED string is coupled to a first end of the second winding of the balancing transformer; the second end of the third LED string is coupled to a second end of the first winding of the balancing transformer; the second end of the fourth LED string is coupled to a second end of the second winding of the balancing transformer; a first end of the second winding of the means for driving is coupled to a center tap of the first winding of the balancing transformer; and a second end of the second winding of the means for driving is coupled to a center tap of the second winding of the balancing transformer.

[00017] In one yet further embodiment the driving arrangement further comprises: a first, a second, a third and a fourth unidirectional electronic valve, wherein: the second end of the first LED string is coupled to the first end of the first winding of the balancing transformer via the first unidirectional electronic valve; the second end of the second LED string is coupled to the first end of the second winding of the balancing transformer via the second unidirectional electronic valve; the second end of the third LED string is coupled to the second end of the first winding of the

balancing transformer via the third unidirectional electronic valve; and the second end of the fourth LED string is coupled to the second end of the second winding of the balancing transformer via the fourth unidirectional electronic valve.

[00018] In another yet further embodiment, the driving arrangement further comprises: a first and a second unidirectional electronic valve, wherein: the first end of the second winding of the means for driving is coupled to the center tap of the first winding of the balancing transformer via the first unidirectional electronic valve; and the second end of the second winding of the means for driving is coupled to the center tap of the second winding of the balancing transformer via the second unidirectional electronic valve.

[00019] In another yet further embodiment: the first end of each of the first LED string and the third LED string are coupled to a first end of the second winding of the means for driving; the first end of each of the second LED string and the fourth LED string are coupled to the second end of the second winding of the means for driving; the second end of the first LED string coupled to a first end of the first winding of the balancing transformer; the second end of the second LED string coupled to a first end of the second winding of the balancing transformer; the second end of the third LED string coupled to a second end of the first winding of the balancing transformer; and the second end of the fourth LED string coupled to a second end of the second winding of the balancing transformer. Further optionally, the driving arrangement further comprises: a first and a second unidirectional electronic valve, wherein: the first end of the first and third LED strings are coupled to the first end of the second winding of the means for driving via the first unidirectional electronic valve; and the first end of the second and fourth LED strings are coupled to the second end of the second winding of the means for driving via the second unidirectional electronic valve.

[00020] Additional features and advantages of the invention will become apparent from the following drawings and description.

BRIEF DESCRIPTION OF THE DRAWINGS

[00021] For a better understanding of the invention and to show how the same may be carried into effect, reference will now be made, purely by way of example, to the accompanying drawings in which like numerals designate corresponding elements or sections throughout.

[00022] With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of the preferred embodiments of the present invention only, and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the invention. In this regard, no attempt is made to show structural details of the invention in more detail than is necessary for a fundamental understanding of the invention, the description taken with the drawings making apparent to those skilled in the art how the several forms of the invention may be embodied in practice. In the accompanying drawings:

[00023] FIG. 1 illustrates a high level schematic diagram of an embodiment of a driving arrangement for four LED strings wherein the anode end of each of the LED strings are commonly coupled to the center tap of a driving transformer, and wherein the cathode ends of the LED strings are each coupled to respective ends of windings of a balancing transformer via respective unidirectional electronic valves;

[00024] FIG. 2 illustrates a high level schematic diagram of an embodiment of a driving arrangement for four LED strings wherein the anode end of each of the LED strings are commonly coupled to the center tap of a driving transformer, the cathode ends are each coupled to respective ends of windings of a balancing transformer, and the center taps of the balancing transformer windings are coupled to the driving transformer second winding ends via respective unidirectional electronic valves;

[00025] FIG. 3 illustrates a high level schematic diagram of an embodiment of a driving arrangement for two LED strings wherein the anode end of each of the LED strings are commonly coupled to the center tap of a driving transformer, the cathode ends of the LED strings are each coupled to a center tap of respective windings of a balancing transformer, and the balancing transformer winding ends are coupled to the

driving transformer second winding ends via respective unidirectional electronic valves;

[00026] FIG. 4 illustrates a high level schematic diagram of an embodiment of a driving arrangement for four LED strings wherein the cathode ends of a first two of the LED strings are commonly coupled to a first end of the second winding of a driving transformer, the cathode ends of a second two of the LED strings are commonly coupled to a second end of the second winding of the driving transformer, and the anode ends of the LED strings are each coupled to respective ends of windings of a balancing transformer; and

[00027] FIG. 5 illustrates a high level schematic diagram of an embodiment of a driving arrangement for two LED strings wherein the cathode end of each of the LED strings are commonly coupled to the center tap of a driving transformer, the anode ends of the LED strings are each coupled to a center tap of respective windings of a balancing transformer, and the balancing transformer winding ends are coupled to the driving transformer second winding ends via respective unidirectional electronic valves.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[00028] Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of the components set forth in the following description or illustrated in the drawings. The invention is applicable to other embodiments or of being practiced or carried out in various ways. Also, it is to be understood that the phraseology and terminology employed herein is for the purpose of description and should not be regarded as limiting.

[00029] FIG. 1 illustrates a high level schematic diagram of an embodiment of a driving arrangement 10 comprising: a switching control circuit 20; a switching bridge 30 comprising a first electronically controlled switch Q1 and a second electronically controlled switch Q2; a DC blocking capacitor CX; a driving transformer TX comprising a first winding TXF magnetically coupled to a second winding TXS; first, second, third and fourth LED strings 40; a balancing transformer BX comprising a first winding BXF magnetically coupled to a second winding BXS; a first, second, third and fourth smoothing capacitors CS; and a first, second, third and

fourth unidirectional electronic valve 50. First and second electronically controlled switches Q1, Q2 are illustrated without limitation as NMOSFETs, however this is not meant to be limiting in any way. Switching bridge 30 is illustrated as a half bridge, however this is not meant to be limiting in any way, and in particular embodiment a full bridge is implemented without exceeding the scope.

[00030] A first output of switching control circuit 20, denoted VG1, is coupled to the control input of first electronically controlled switch Q1 of switching bridge 30, and a second output of switching control circuit 20, denoted VG2, is coupled to the control input of second electronically controlled switch Q2 of switching bridge 30. The drain of first electronically controlled switch Q1 is coupled to a source of electrical power, denoted V+, and the source of first electronically controlled switch Q1 is coupled to drain of second electronically controlled switch Q2 and to a first end of DC blocking capacitor CX. The common node of the source of first electronically controlled switch Q1, the drain of second electronically controlled switch Q2, and the first end of DC blocking capacitor CX is denoted node 35. The second end of DC blocking capacitor CX is coupled to a first end of first winding TXF, and a second end of first winding TXF is coupled to the source of second electronically controlled switch Q2, and to the return of the source of electrical power, denoted V-.

[00031] A center tap of second winding TXS is coupled to the anode end of each of the LED strings 40 and to a first end of each of the smoothing capacitors CS. The cathode end of each of the LED strings 40 is coupled to a second end of a respective smoothing capacitor CS and to the anode of a respective unidirectional electronic valve 50. The cathode of a first unidirectional electronic valve is coupled to a first end of first winding BXF, the cathode of a second unidirectional electronic valve 50 is coupled to a second end of first winding BXF, the cathode of a third unidirectional electronic valve 50 is coupled to a first end of second winding BXS, and the cathode of a fourth unidirectional electronic valve 50 is coupled to a second end of second winding BXS. A center tap of first winding BXF is coupled to a first end of second winding TXS, and a center tap of second winding BXS is coupled to a second end of second winding TXS.

[00032] In operation, and as will be described further below, driving arrangement 10 provides a balanced current for 4 LED strings 40 with a single balancing transformer BX. The 4 LED strings 40 are configured with a common

anode structure. The balancing transformer BX has two center tapped windings, each of the two windings BXF and BXS having the same number of turns. The center taps of BXF, BXS and TXS are each preferably arranged such that an equal number of turns are exhibited between the center tap and the respective opposing ends of the winding.

[00033] Switching control circuit 20 is arranged to alternately close first electronically controlled switch Q1 and second electronically controlled switch Q2 so as to provide a switching cycle having a first period during which electrical energy is output from second winding TXS with a first polarity and a second period during which electrical energy is output from second winding TXS with a second polarity, the second polarity opposite the first polarity.

[00034] During the first period, when the end of second winding TXS coupled to the center tap of first winding BXF is positive in relation to the center tap of second winding TXS, current flows through the two LED strings 40 coupled to the respective ends of first winding BXF. During the second period, when the end of second winding TXS coupled to the center tap of second winding BXS is positive in relation to the center tap of second winding TXS, current flows through the two LED strings 40 coupled to the respective ends of second winding BXS. The current through the two LED strings 40 conducting during the first period are forced to be equal by the balancing effect of the two winding halves of first winding BXF, and current through the two LED strings 40 conducting during the second period are forced to be equal by the balancing effect of the two winding halves of second winding BXS. DC blocking capacitor CX ensures that the current flowing through first winding TXF, and hence transferred to second winding TXS, during each of the two periods is equal, because DC blocking capacitor CX does not couple DC current in steady state. In the event that the average operating voltage of the two LED strings 40 coupled to first winding BXF is different than the average operating voltage of the two LED strings 40 coupled to second winding BXS, a DC bias will automatically develop across DC blocking capacitor CX to offset the average operating voltage difference. The DC bias acts to maintain an equal total current for each of the two string groups, i.e. the first group comprising two LED strings 40 coupled to first winding BXF and the second group comprising two LED strings 40 coupled to second winding BXS.

[00035] To further clarify and illustrate this relationship, we denote the current through the two LED strings 40 coupled to first winding BXF, respectively, as I_{LED1} and I_{LED2} . We further denote the current through the two LED strings 40 coupled to second winding BXS, respectively, as I_{LED3} and I_{LED4} . This results in the following relations.

$$I_{LED1} + I_{LED2} = I_{LED3} + I_{LED4} \quad (\text{Responsive to CX}) \quad \text{EQ. 1}$$

$$I_{LED1} = I_{LED2}, \quad I_{LED3} = I_{LED4} \quad (\text{Responsive to BX}) \quad \text{EQ. 2}$$

And as result of EQ. 1 and EQ. 2: $I_{LED1} = I_{LED2} = I_{LED3} = I_{LED4}$

[00036] Smoothing capacitors CS are each connected in parallel with a respective one of LED strings 40 to smooth out any ripple current and maintain the associated LED current to be nearly a constant direct current. Unidirectional electronic valves 50 are arranged to block any reverse voltage to LED strings 40 and further prevent bleeding of current between respective smoothing capacitors CS.

[00037] FIG. 2 illustrates a high level schematic diagram of an embodiment of a driving arrangement 100 for four LED strings 40, wherein the anode end of each LED string 40 is commonly coupled to the center tap of second winding TXS of driving transformer TX, the cathode ends of the various LED strings 40 are each coupled to respective ends of windings of balancing transformer BX, and the center taps of the balancing transformer windings, BXS and BXF, are coupled to driving transformer second winding TXS via respective unidirectional electronic valves 50. Driving arrangement 100 is a simplified version of driving arrangement 10, wherein LED strings 40 are allowed to operate with a rippled current, and thus smoothing capacitors CS are not supplied and only a single unidirectional electronic valve 50 is required for each two LED strings 40.

[00038] In some further detail, the center tap of second winding TXS is commonly coupled to the anode end of each of the four LED strings 40. The cathode end of first LED string 40 is coupled to a first end of first winding BXF; the cathode end of second LED string 40 is coupled to a second end of first winding BXF; the cathode end of third LED string 40 is coupled to a first end of second winding BXS; and the cathode end of fourth LED string 40 is coupled to a second end of second winding BXS. The center tap of first winding BXF is coupled via a respective unidirectional electronic valve 50 to a first end of second winding TXS and the center

tap of second winding BXS is coupled via a respective unidirectional electronic valve 50 to a second end of second winding TXS. Switching control circuit 20 is not shown for simplicity, and the connections of switching bridge 30, DC blocking capacitor CX and first winding TXF are as described above in relation to driving arrangement 10.

[00039] The operation of driving arrangement 100 is in all respects similar to the operation of driving arrangement 10, and thus in the interest of brevity will not be further detailed.

[00040] FIG. 3 illustrates a high level schematic diagram of an embodiment of a driving arrangement 200 having two LED strings 40. Switching control circuit 20 is not shown for simplicity, and the connections of switching bridge 30, DC blocking capacitor CX and first winding TXF are as described above in relation to driving arrangement 10. The anode end of each of the LED strings 40 are commonly coupled to the center tap of second winding TXS of driving transformer TX. The cathode end of a first LED string 40 is coupled to a center tap of first winding BXF of balancing transformer BX, and the cathode end of a second LED string 40 is coupled to a center tap of second winding BXS of balancing transformer BX. The ends of first winding BXF are each coupled via a respective unidirectional electronic valve 50 to respective ends of second winding TXS of driving transformer TX and respective ends of second winding BXS are each coupled via a respective unidirectional electronic valve 50 to respective ends of second winding TXS of driving transformer TX.

[00041] Each winding of balancing transformer BX thus drives a single LED string 40. The LED strings 40 each conduct in both half cycles and therefore the ripple current frequency is twice that of the switching frequency of Q1 and Q2. Opposing halves of first winding BXF conduct during the respective first and second periods generated by switching control circuit 20 and opposing halves of second winding BXS conduct during the respective first and second periods generated by switching control circuit 20 (not shown). Therefore the core of balancer transformer BX experiences an AC excitation. The connection polarity of balancer windings BXF and BXS is such so as to always keep the magnetization force generated by the current of the two LED strings 40 in opposite directions, and by such magnetization force the current of the two LED strings 40 are forced to be equal.

[00042] Driving arrangements 10, 100 and 200 illustrate a common anode structure for LED strings 40, however this is not meant to be limiting in any way, as will be further illustrated below.

[00043] FIG. 4 illustrates a high level schematic diagram of an embodiment of a driving arrangement 300 exhibiting four LED strings 40. Switching control circuit 20 is not shown for simplicity, and the connections of switching bridge 30, DC blocking capacitor CX and first winding TXF are as described above in relation to driving arrangement 10. The cathode ends of a first two LED strings 40 are commonly coupled to a first end of second winding TXS of driving transformer TX via a common respective unidirectional electronic valve 50 and the cathode ends of a second two LED strings 40 are commonly coupled to a second end of second winding TXS of driving transformer TX via a common respective unidirectional electronic valve 50. The anode end of first LED string 40 is coupled to a first end of first winding BXF of balancing transformer BS; the anode end of second LED string 40 is coupled to a second end of first winding BXF of balancing transformer BS; the anode end of third LED string 40 is coupled to a first end of second winding BXS of balancing transformer BS; and the anode end of fourth LED string 40 is coupled to a second end of second winding BXS of balancing transformer BS. The center taps of each of first winding BXF and second winding BXS are commonly coupled to the center tap of second winding TXS of driving transformer TX.

[00044] The operation of driving arrangement 300 is in all respects similar to the operation of driving arrangement 100, with first and second LED 40 providing illumination during one of the first and second periods, and the third and fourth LED 40 providing illumination during the other of the first and second periods, and in the interest of brevity will not be detailed further.

[00045] FIG. 5 illustrates a high level schematic diagram of an embodiment of a driving arrangement 400 for two LED strings 40 wherein the cathode end of each of the LED strings 40 are commonly coupled to the center tap of second winding TXS of driving transformer TX. Switching control circuit 20 is not shown for simplicity, and the connections of switching bridge 30, DC blocking capacitor CX and first winding TXF are as described above in relation to driving arrangement 10. The anode end of first LED string 40 is coupled to the center tap of first winding BXF of balancing transformer BX and the anode end of second LED string 40 is coupled to the center

tap of second winding BXS of balancing transformer BX. A first end of first winding BXF is coupled via a respective unidirectional electronic valve 50 to a first end of second winding TXS of driving transformer TX; a second end of first winding BXF is coupled via a respective unidirectional electronic valve 50 to a second end of second winding TXS of driving transformer TX; a first end of second winding BXS is coupled via a respective unidirectional electronic valve 50 to a first end of second winding TXS of driving transformer TX; and a second end of second winding BXS is coupled via a respective unidirectional electronic valve 50 to a second end of second winding TXS of driving transformer TX.

[00046] The operation of driving arrangement 400 are in all respects identical with the operation of driving arrangement 200, with the appropriate changes in polarity as required, and thus in the interest of brevity will not be further detailed.

[00047] It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable sub-combination.

[00048] Unless otherwise defined, all technical and scientific terms used herein have the same meanings as are commonly understood by one of ordinary skill in the art to which this invention belongs. Although methods similar or equivalent to those described herein can be used in the practice or testing of the present invention, suitable methods are described herein.

[00049] All publications, patent applications, patents, and other references mentioned herein are incorporated by reference in their entirety. In case of conflict, the patent specification, including definitions, will prevail. In addition, the materials, methods, and examples are illustrative only and not intended to be limiting.

[00050] It will be appreciated by persons skilled in the art that the present invention is not limited to what has been particularly shown and described herein above. Rather the scope of the present invention is defined by the appended claims and includes both combinations and sub-combinations of the various features described hereinabove as well as variations and modifications thereof which would occur to persons skilled in the art upon reading the foregoing description and which are not in the prior art.

CLAIMS

I claim:

1. A driving arrangement for light emitting diode (LED) based luminaire comprising:

a driving transformer having a first winding and a second winding, the second winding magnetically coupled to the first winding;

a switching control circuit;

a switching bridge comprising a pair of electronically controlled switches coupled to a common node, each of the pair of electronically controlled switches responsive to an output of the switching control circuit;

a direct current (DC) blocking capacitor coupled between the common node of said switching bridge and a first end of the primary winding of the driving transformer;

a balancing transformer having a first winding and a second winding, the second winding magnetically coupled to the first winding;

a first LED string; and

a second LED string,

a first end of each of said first LED string and said second LED string coupled to the second winding of said driving transformer, and arranged to receive electrical energy there from; and

a second end of said first LED string coupled to a first winding of said balancing transformer, and a second end of said second LED string coupled to a second winding of said balancing transformer,

said switching control circuit arranged to provide a switching cycle comprising a first period wherein electrical energy is output from the second winding of said driving transformer with a first polarity, and a second period wherein electrical energy is output from the second winding of said driving transformer with a second polarity, the second polarity opposite the first polarity,

said DC blocking capacitor arranged such that the total electrical energy output from the second winding during the first period of the switching cycle is equal to the total electrical energy output from the second winding during the second period of the switching cycle, and

said balancing transformer arranged such that the current through said first LED string is equal to the current through said second LED string.

2. The driving arrangement according to claim 1, wherein:

the first end of each of said first LED string and said second LED string are commonly coupled to a center tap of the second winding of said driving transformer;

the second end of said first LED string coupled to a center tap of said first winding of the balancing transformer; and

the second end of said second LED string coupled to a center tap of said second winding of the balancing transformer.

3. The driving arranged according to claim 2, wherein:

a first end of the first winding of the balancing transformer is coupled to a first end of the second winding of the driving transformer;

a second end of the first winding of the balancing transformer is coupled to a second end of the second winding of the driving transformer;

a first end of the second winding of the balancing transformer is coupled to the second end of the second winding of the driving transformer; and

a second end of the second winding of the balancing transformer is coupled to the first end of the second winding of the driving transformer.

4. The driving arrangement according to claim 2, further comprising:

a first, second, third and fourth unidirectional electronic valve,
wherein:

a first end of the first winding of the balancing transformer is coupled to a first end of the second winding of the driving transformer via said first unidirectional electronic valve;

a second end of the first winding of the balancing transformer is coupled to a second end of the second winding of the driving transformer via said second unidirectional electronic valve;

a first end of the second winding of the balancing transformer is coupled to the second end of the second winding of the driving transformer via said third unidirectional electronic valve; and

a second end of the second winding of the balancing transformer is coupled to the first end of the second winding of the driving transformer via said fourth unidirectional electronic valve.

5. The driving arrangement according to claim 1, further comprising:

a third LED string; and

a fourth LED string,

wherein:

a first end of each of said third LED string and said fourth LED string are coupled to the second winding of said driving transformer, and arranged to receive electrical energy there from;

a second end of said third LED string is coupled to the first winding of said balancing transformer; and

a second end of said fourth LED string is coupled to the second winding of said balancing transformer,

said first winding of said balancing transformer arranged such that the current through said first LED string is equal to the current through said third LED string, and

said second winding of said balancing transformer arranged such that the current through said second LED string is equal to the current through said fourth LED string.

6. The driving arrangement according to claim 5, wherein:

the first end of each of the first LED string, the second LED string, the third LED string and the fourth LED string are commonly coupled a center tap of the second winding of said driving transformer;

the second end of said first LED string is coupled to a first end of the first winding of said balancing transformer;

the second end of said second LED string is coupled to a first end of the second winding of said balancing transformer;

the second end of said third LED string is coupled to a second end of the first winding of said balancing transformer;

the second end of said fourth LED string is coupled to a second end of the second winding of said balancing transformer;

a first end of the second winding of said driving transformer is coupled to a center tap of the first winding of the balancing transformer; and

a second end of the second winding of said driving transformer is coupled to a center tap of the second winding of the balancing transformer.

7. The driving arrangement according to claim 6, further comprising:

a first, a second, a third and a fourth unidirectional electronic valve,
wherein:

the second end of said first LED string is coupled to the first end of the first winding of said balancing transformer via said first unidirectional electronic valve;

the second end of said second LED string is coupled to the first end of the second winding of said balancing transformer via said second unidirectional electronic valve;

the second end of said third LED string is coupled to the second end of the first winding of said balancing transformer via said third unidirectional electronic valve; and

the second end of said fourth LED string is coupled to the second end of the second winding of said balancing transformer via said fourth unidirectional electronic valve.

8. The driving arrangement according to claim 6, further comprising:

a first and a second unidirectional electronic valve,
wherein:

the first end of the second winding of said driving transformer is coupled to the center tap of the first winding of the balancing transformer via said first unidirectional electronic valve; and

the second end of the second winding of said driving transformer is coupled to the center tap of the second winding of the balancing transformer via said second unidirectional electronic valve.

9. The driving arrangement according to claim 5, wherein:

the first end of each of the first LED string and the third LED string are coupled to a first end of the second winding of the driving transformer;

the first end of each of the second LED string and the fourth LED string are coupled to the second of the second winding of the driving transformer;

the second end of the first LED string coupled to a first end of the first winding of the balancing transformer;

the second end of the second LED string coupled to a first end of the second winding of the balancing transformer;

the second end of the third LED string coupled to a second end of the first winding of the balancing transformer; and

the second end of the fourth LED string coupled to a second end of the second winding of the balancing transformer.

10. The driving arrangement of claim 9, further comprising:

a first and a second unidirectional electronic valve,

wherein:

the first end of the first and third LED strings are coupled to the first end of the second winding of the driving transformer via said first unidirectional electronic valve; and

the first end of the second and fourth LED strings are coupled to the second end of the second winding of the driving transformer via said second unidirectional electronic valve.

11. A driving arrangement for light emitting diode (LED) based luminaire comprising:

a means for driving having a first winding and a second winding, the second winding magnetically coupled to the first winding;

a means for switching;

a switching bridge comprising a pair of electronically controlled switches coupled to a common node, each of the pair of electronically controlled switches responsive to an output of the means for switching;

a direct current (DC) blocking capacitor coupled between the common node of said switching bridge and a first end of the primary winding of the means for driving;

a balancing transformer having a first winding and a second winding, the second winding magnetically coupled to the first winding;

a first LED string; and

a second LED string,

a first end of each of said first LED string and said second LED string coupled to the second winding of said means for driving, and arranged to receive electrical energy there from; and

a second end of said first LED string coupled to a first winding of said balancing transformer, and a second end of said second LED string coupled to a second winding of said balancing transformer,

said means for switching arranged to provide a switching cycle comprising a first period wherein electrical energy is output from the second winding of said means for driving with a first polarity, and a second period wherein electrical energy is output from the second winding of said means for driving with a second polarity, the second polarity opposite the first polarity,

said DC blocking capacitor arranged such that the total electrical energy output from the second winding during the first period of the switching cycle is equal to the total electrical energy output from the second winding during the second period of the switching cycle, and

said balancing transformer arranged such that the current through said first LED string is equal to the current through said second LED string.

12. The driving arrangement according to claim 11, wherein:

the first end of each of said first LED string and said second LED string are commonly coupled to a center tap of the second winding of said means for driving;

the second end of said first LED string coupled to a center tap of said first winding of the balancing transformer; and

the second end of said second LED string coupled to a center tap of said second winding of the balancing transformer.

13. The driving arranged according to claim 12, wherein:

a first end of the first winding of the balancing transformer is coupled to a first end of the second winding of the means for driving;

a second end of the first winding of the balancing transformer is coupled to a second end of the second winding of the means for driving;

a first end of the second winding of the balancing transformer is coupled to the second end of the second winding of the means for driving; and

a second end of the second winding of the balancing transformer is coupled to the first end of the second winding of the means for driving.

14. The driving arrangement according to claim 12, further comprising:

a first, second, third and fourth unidirectional electronic valve,
wherein:

a first end of the first winding of the balancing transformer is coupled to a first end of the second winding of the means for driving via said first unidirectional electronic valve;

a second end of the first winding of the balancing transformer is coupled to a second end of the second winding of the means for driving via said second unidirectional electronic valve;

a first end of the second winding of the balancing transformer is coupled to the second end of the second winding of the means for driving via said third unidirectional electronic valve; and

a second end of the second winding of the balancing transformer is coupled to the first end of the second winding of the means for driving via said fourth unidirectional electronic valve.

15. The driving arrangement according to claim 11, further comprising:

a third LED string; and
a fourth LED string,
wherein:

a first end of each of said third LED string and said fourth LED string are coupled to the second winding of said means for driving, and arranged to receive electrical energy there from;

a second end of said third LED string is coupled to the first winding of said balancing transformer; and

a second end of said fourth LED string is coupled to the second winding of said balancing transformer,

said first winding of said balancing transformer arranged such that the current

through said first LED string is equal to the current through said third LED string, and
said second winding of said balancing transformer arranged such that the
current through said second LED string is equal to the current through said fourth
LED string.

16. The driving arrangement according to claim 15, wherein:

the first end of each of the first LED string, the second LED string, the third
LED string and the fourth LED string are commonly coupled a center tap of the
second winding of said means for driving;

the second end of said first LED string is coupled to a first end of the first
winding of said balancing transformer;

the second end of said second LED string is coupled to a first end of the
second winding of said balancing transformer;

the second end of said third LED string is coupled to a second end of the first
winding of said balancing transformer;

the second end of said fourth LED string is coupled to a second end of the
second winding of said balancing transformer;

a first end of the second winding of said means for driving is coupled to a
center tap of the first winding of the balancing transformer; and

a second end of the second winding of said means for driving is coupled to a
center tap of the second winding of the balancing transformer.

17. The driving arrangement according to claim 16, further comprising:

a first, a second, a third and a fourth unidirectional electronic valve,
wherein:

the second end of said first LED string is coupled to the first end of the first
winding of said balancing transformer via said first unidirectional electronic valve;

the second end of said second LED string is coupled to the first end of the
second winding of said balancing transformer via said second unidirectional
electronic valve;

the second end of said third LED string is coupled to the second end of the
first winding of said balancing transformer via said third unidirectional electronic
valve; and

the second end of said fourth LED string is coupled to the second end of the second winding of said balancing transformer via said fourth unidirectional electronic valve.

18. The driving arrangement according to claim 16, further comprising:

a first and a second unidirectional electronic valve,

wherein:

the first end of the second winding of said means for driving is coupled to the center tap of the first winding of the balancing transformer via said first unidirectional electronic valve; and

the second end of the second winding of said means for driving is coupled to the center tap of the second winding of the balancing transformer via said second unidirectional electronic valve.

19. The driving arrangement according to claim 15, wherein:

the first end of each of the first LED string and the third LED string are coupled to a first end of the second winding of the means for driving;

the first end of each of the second LED string and the fourth LED string are coupled to the second of the second winding of the means for driving;

the second end of the first LED string coupled to a first end of the first winding of the balancing transformer;

the second end of the second LED string coupled to a first end of the second winding of the balancing transformer;

the second end of the third LED string coupled to a second end of the first winding of the balancing transformer; and

the second end of the fourth LED string coupled to a second end of the second winding of the balancing transformer.

20. The driving arrangement of claim 19, further comprising:

a first and a second unidirectional electronic valve,


wherein:

the first end of the first and third LED strings are coupled to the first end of the second winding of the means for driving via said first unidirectional electronic

valve; and

the first end of the second and fourth LED strings are coupled to the second end of the second winding of the means for driving via said second unidirectional electronic valve.

1/5

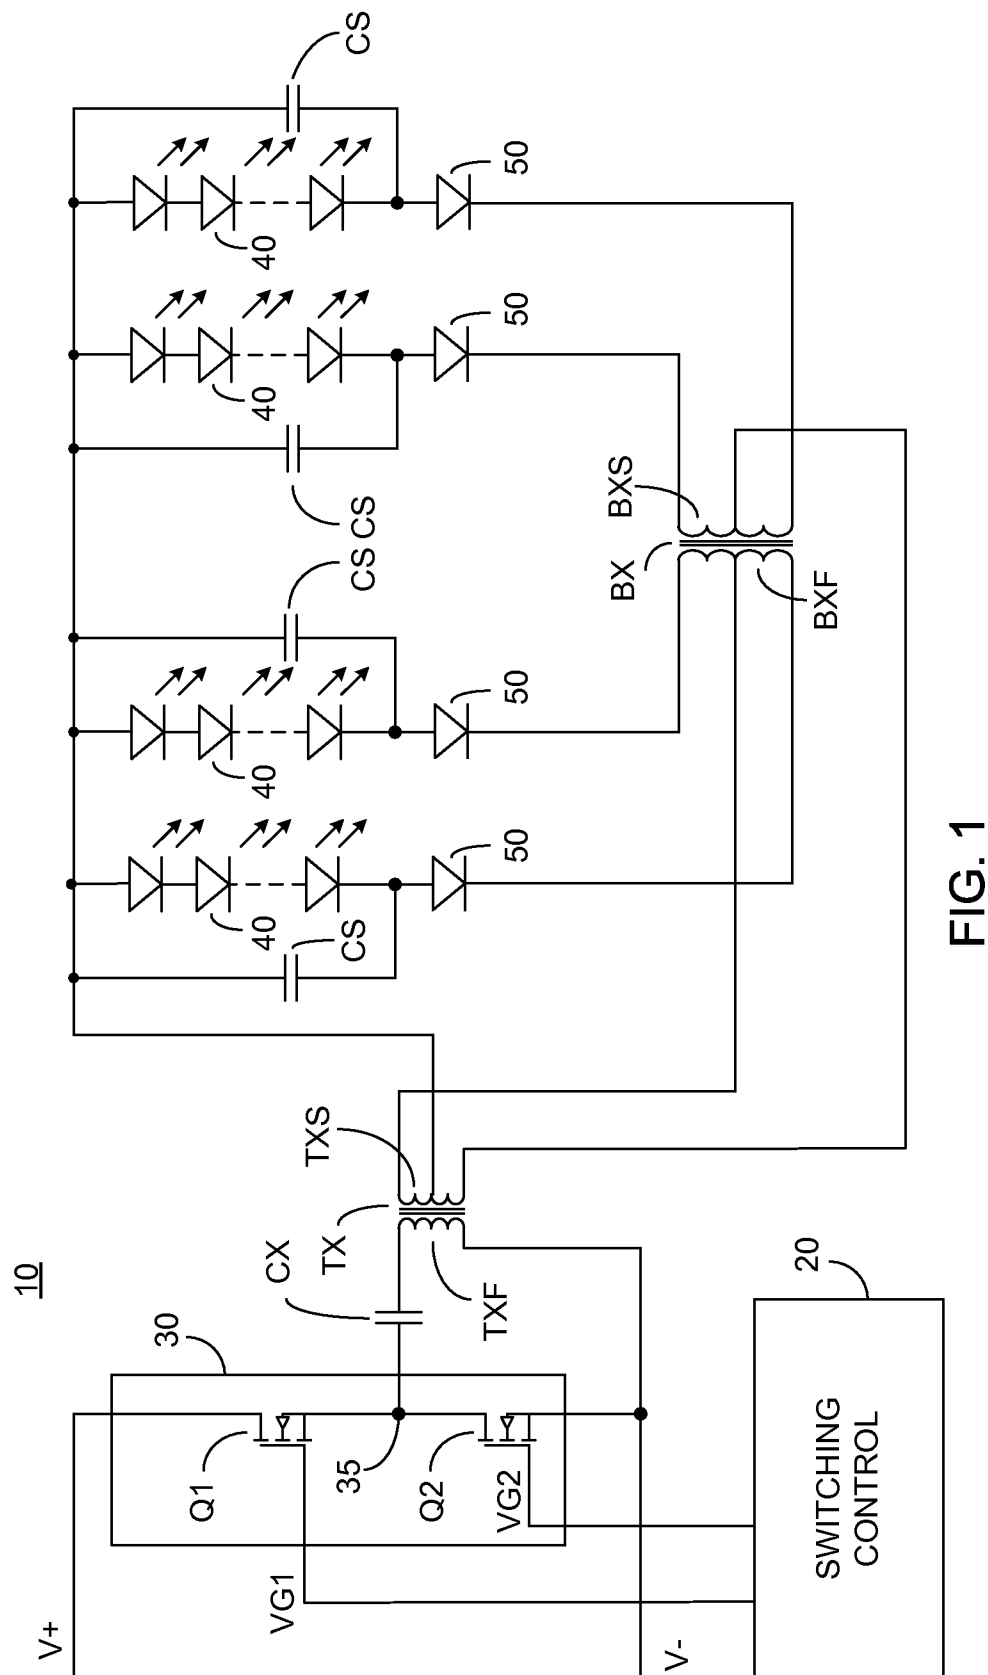

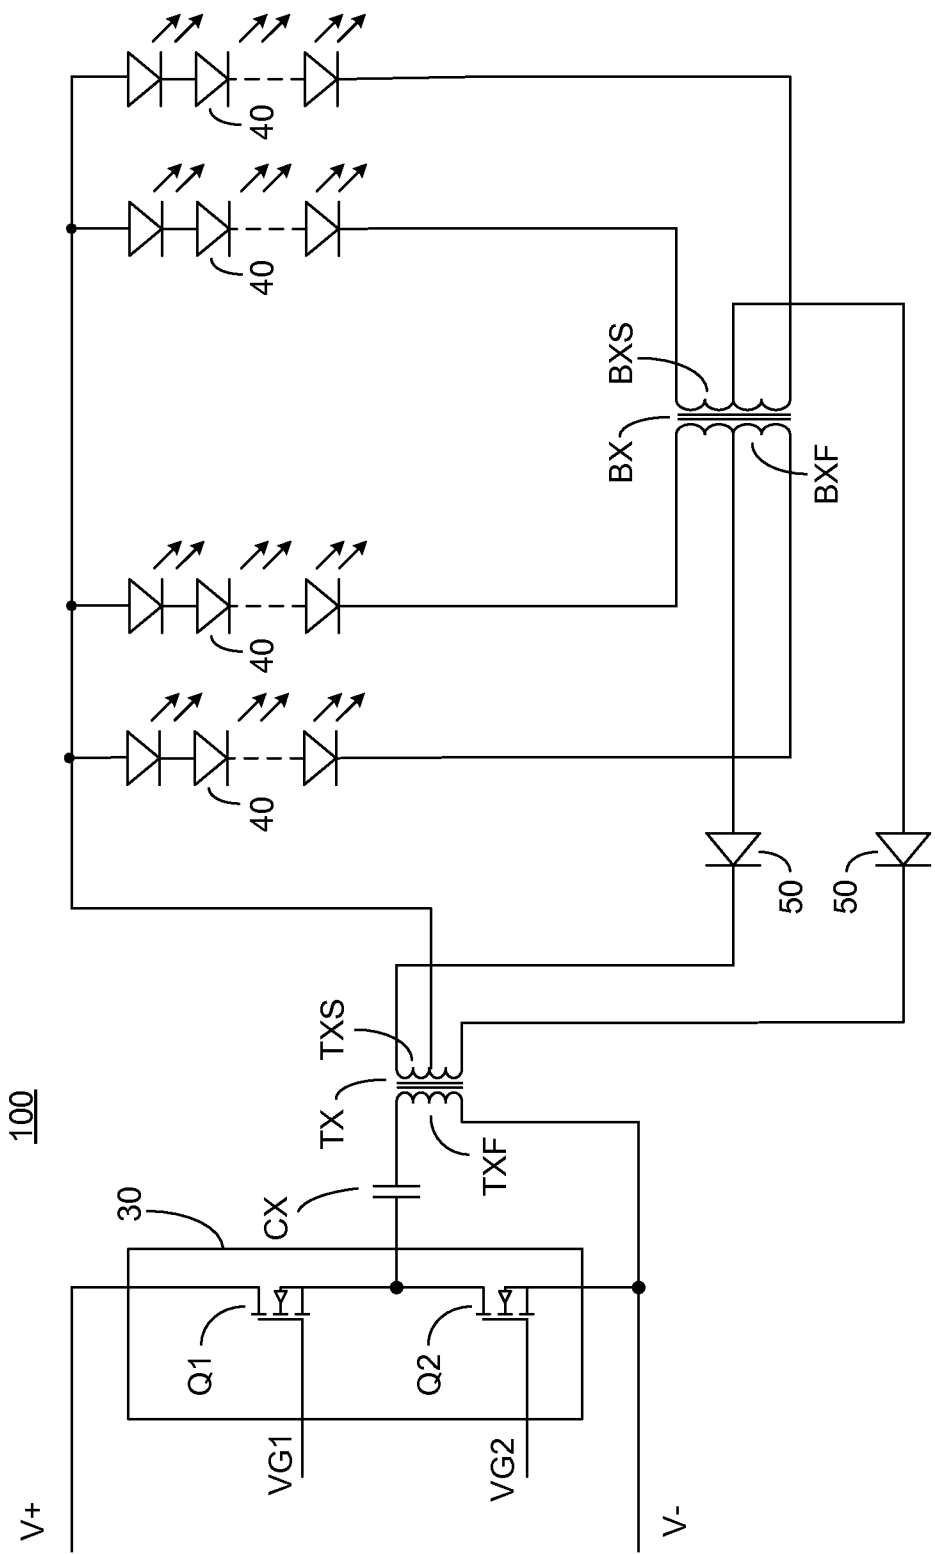


FIG. 2

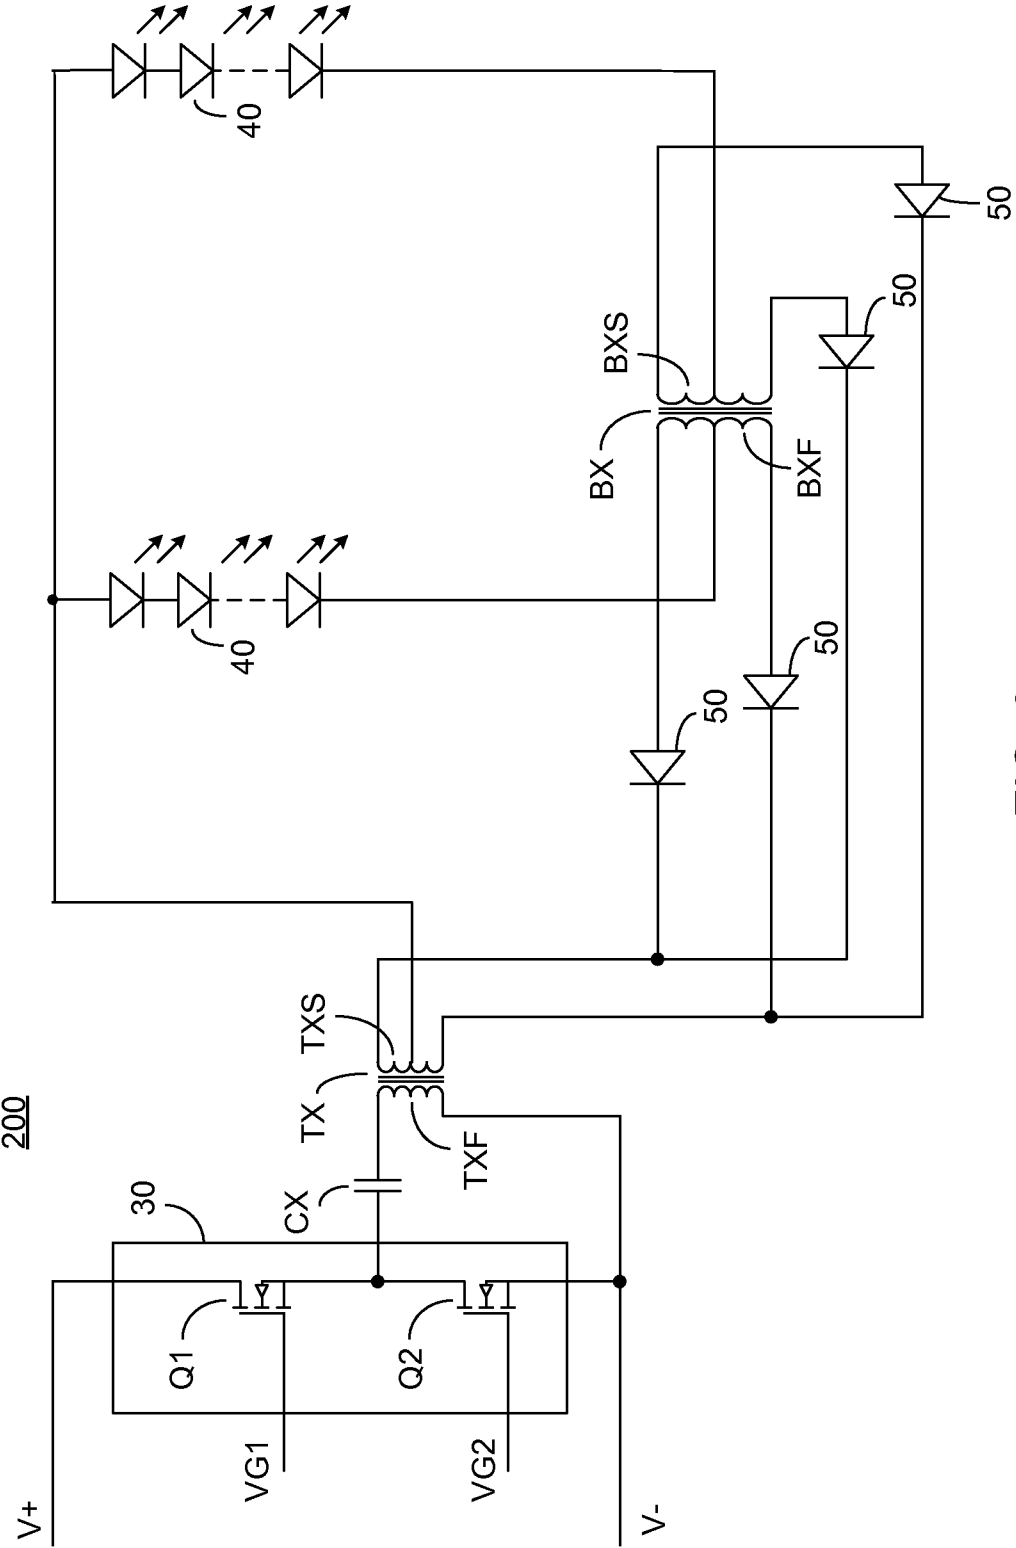


FIG. 3

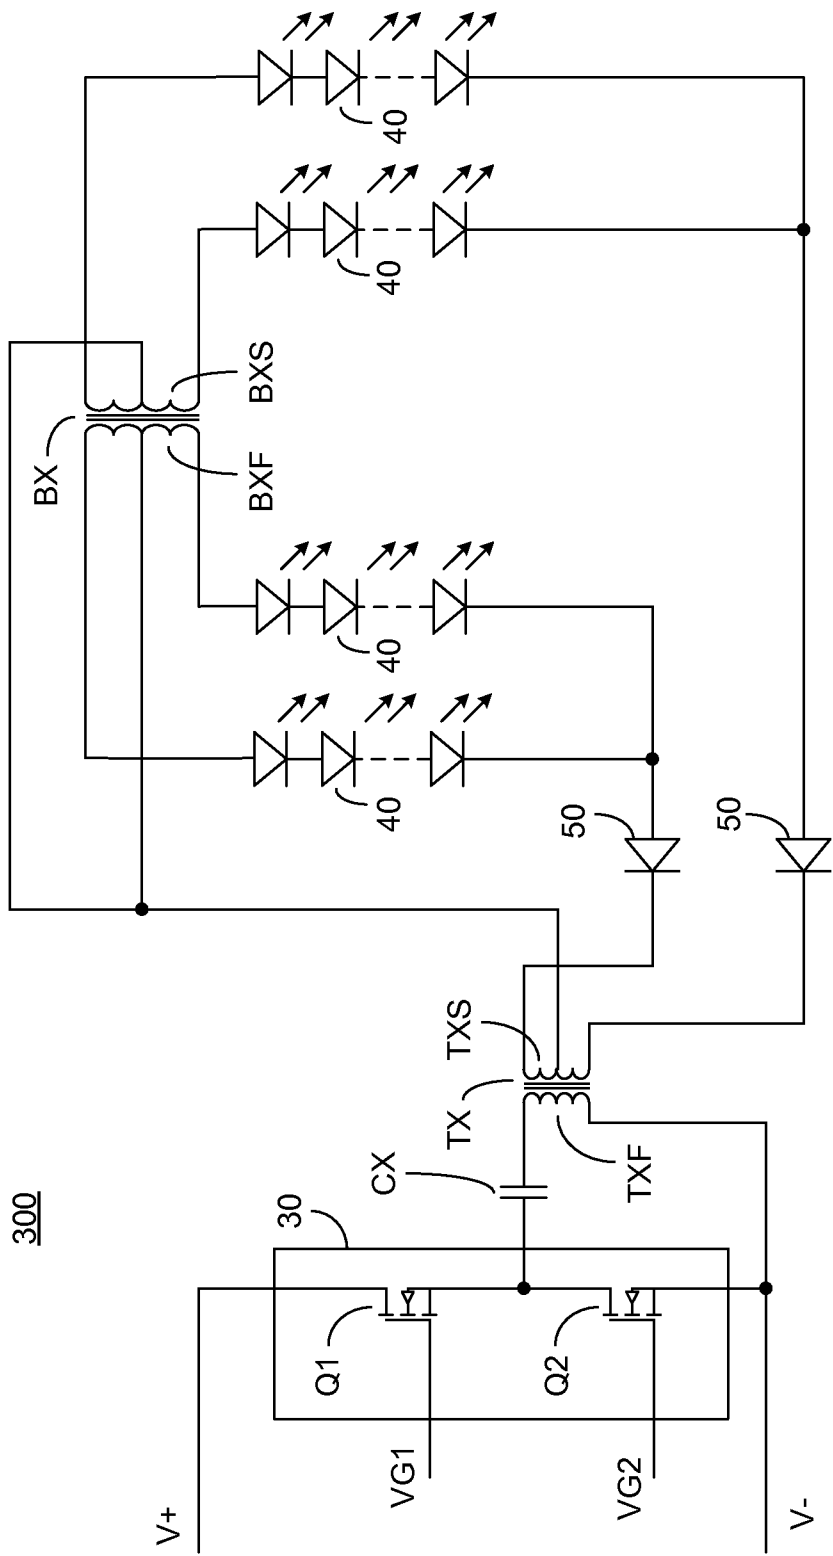


FIG. 4

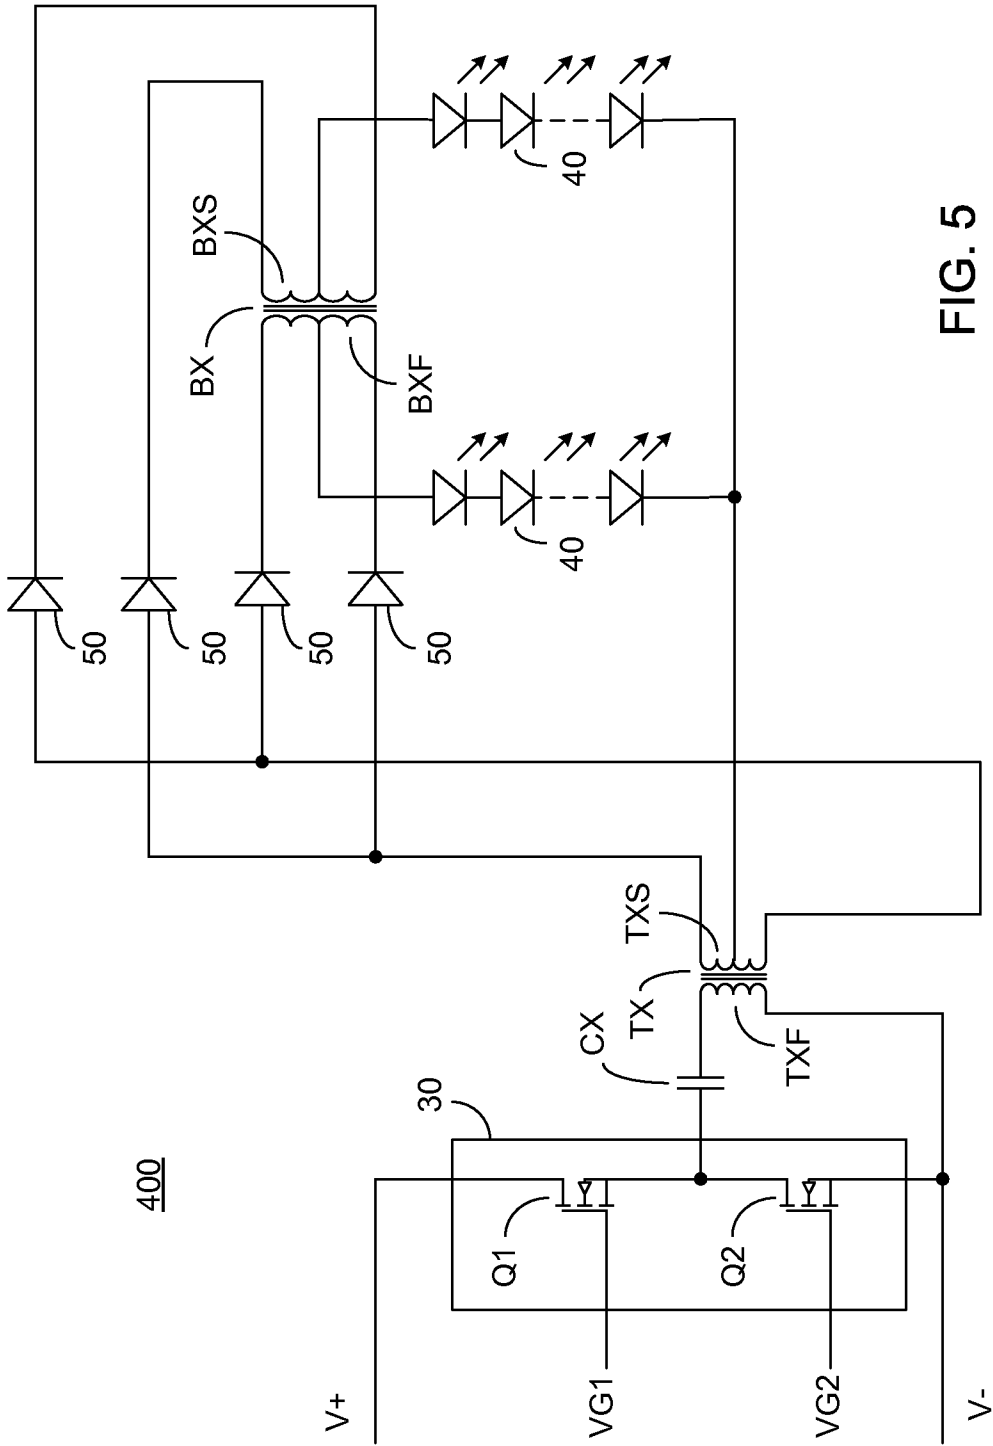


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/035924

A. CLASSIFICATION OF SUBJECT MATTER
INV. H05B33/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/237802 A1 (ASO SHINJI [JP] ET AL) 23 September 2010 (2010-09-23) figures -----	1-3,5,6, 9,11,15, 16,19
X	EP 2 278 857 A2 (SAMSUNG ELECTRONICS CO LTD [KR]) 26 January 2011 (2011-01-26) figures -----	1-3,5,6, 9,11,15, 16,19
X	US 2011/068700 A1 (FAN JIANPING [US]) 24 March 2011 (2011-03-24) figures 3, 4, 7, 8, 9, 10, -----	1-3,5,6, 9,11,15, 16,19



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

18 September 2012

Date of mailing of the international search report

23/10/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Maicas, Jesús

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/035924

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010237802 A1	23-09-2010	CN 101841953 A	22-09-2010
		JP 2010218949 A	30-09-2010
		KR 20100105368 A	29-09-2010
		US 2010237802 A1	23-09-2010

EP 2278857 A2	26-01-2011	EP 2278857 A2	26-01-2011
		KR 20110007738 A	25-01-2011
		US 2011012936 A1	20-01-2011

US 2011068700 A1	24-03-2011	NONE	
