

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number  
**WO 2004/098971 A2**

(51) International Patent Classification<sup>7</sup>: **B61D**

PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(21) International Application Number:  
PCT/US2004/012996

(22) International Filing Date: 4 May 2004 (04.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/249,753 5 May 2003 (05.05.2003) US

(71) Applicant and

(72) Inventor: WU, Hengning [CN/US]; 11627 North Shore  
Dr. 2B, Reston, VA 20190 (US).

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**


- as to applicant's entitlement to apply for and be granted a  
patent (Rule 4.17(ii)) for all designations
- as to the applicant's entitlement to claim the priority of the  
earlier application (Rule 4.17(iii)) for all designations

**Published:**

- without international search report and to be republished  
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: PERSONAL TRANSPORTATION SYSTEM

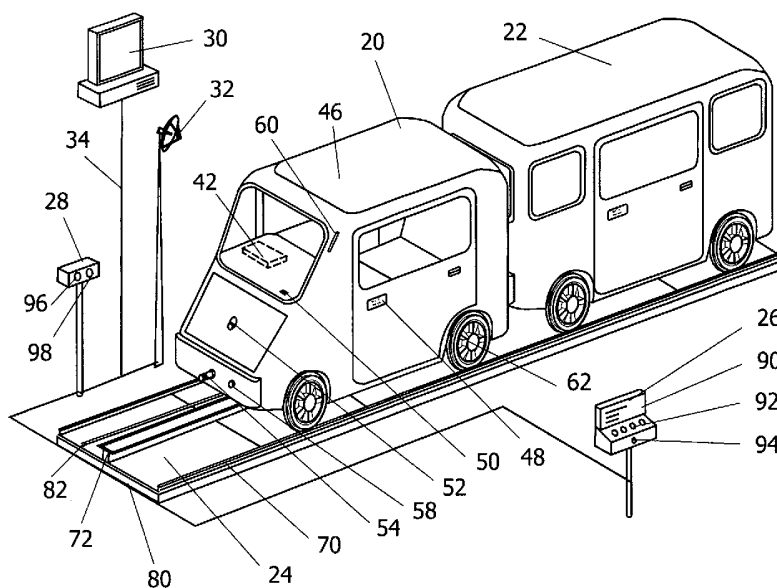

(57) Abstract: An automated personal transportation system for moving passengers and light freights is constructed with a track network and small vehicles on the track network. There are a number of stations and stops for loading and unloading on side tracks off the mainline of the track network. The vehicle width is limited to a dimension for one seat. The vehicles can be coupled statically or dynamically to form a train. The track has side rails for the rigid wheels of the vehicle and a central rail for centering the vehicle on the guideway and providing additional acceleration and braking capability. The control system for the movement of vehicles is divided into three levels: the central control system, the wayside control system and the vehicle control system.

## PERSONAL TRANSPORTATION SYSTEM

### Background of Invention

The present invention relates to a personal transportation system. In particular, it relates to an automatic transportation system for people and light freight.

Transportation plays an important role in civilization. Nowadays, many cities around the world are facing serious transportation problems, in particular, traffic gridlock and air pollution from automobile use. There are many studies on the traffic problems and potential solutions, for example, Stuck In Traffic: Coping With Peak-hour Traffic Congestion by Anthony Downs, The Brookings Institution, 1992, and Breaking Gridlock by Jim Motavalli, Sierra club books, 2001. A salient feature of today's city traffic is that travel origins and destinations have become increasingly dispersed, varied and distant. Accordingly, automobile becomes the dominant form of transportation due to its convenience. In the United States, automobile accounts for 90% of passenger transportation and 90% of people drive alone. The heavy dependence on automobile also leads to traffic gridlock, air pollution, traffic accidents, and the dependence on fossil energy. Although there are progress in fuel efficiency, efforts to increase the highway capacity seem to be difficult. In areas experiencing traffic congestion, it is very expensive to construct new highways and purchase the rights-of-way. The National Automated Highway System or Intelligent transportation systems in the United States attempts to increase highway capacity by embedding sensors on the roadway and automated control of vehicles in short following distances on dedicated lanes. However, considerable infrastructure cost and liability issues pose serious doubts on this approach (Transportation Research Board Special Report 253, National Academy of Sciences, 1998). In addition, automobile is not readily accessible to school children and the elderly, a large fraction of the population. On the other hand, existing public mass transportation systems such as subway, monorail, light rail and bus systems are less favored than automobile in terms of convenience and comfort. They are more suitable for intercity traffic and group activities. As urban and suburban traffic becomes more dispersed, it is difficult to maintain the high volume necessary to justify the high construction and operation cost. The frequent stops of the vehicles and the transfers needed for many destinations make trips lengthy and uncomfortable, even for cities with well-developed public transportation systems.

The limitations of existing transportation systems and the need for new ideas have long been recognized. In 1968, US Department of Housing and Urban Development published a report Tomorrow's Transportation: New Systems for the Urban Future. One concept to provide accessibility and service to the profusion of origins and destinations in metropolitan areas is "personal rapid transit", automated small personal vehicles on a network of exclusive guideways. It is originally proposed as a public transit system for areas of medium to low population density. The origin of the concept can even trace back to inventors as early as 1953 (See J.E. Anderson, Some Lessons From the History of Personal Rapid Transit, 1996). A demonstration project at Morgantown, West Virginia was funded, completed, and has been in continuous operation since 1975. Except for the vehicle size larger than current definition, the project demonstrated the basic features of a personal rapid transit system: 1) Fully automated vehicles capable

of operation without human drivers. 2) Exclusive guideway. 3) Small vehicles. 4) Small guideways that can be located above ground, at ground level or underground. 5) Vehicles able to use all guideways and stations on a fully coupled network. 6) Direct origin to destination service, without a necessity to transfer or stop at intervening stations. 7) Service available on demand rather than on fixed schedules. Activities in other countries include Cabtrack in the United Kingdom, CVS in Japan, Cabinentaxi in Germany, Aramis in France. There are some recent systems, such as Taxi 2000 and its modification PRT 2000, and SkyTran in the United States, ULTRA in the United Kingdom, and RUF in Denmark.

The personal rapid transit concept offers some desirable features, but these systems have not been accepted for widespread implementation. Critical questions have been raised about the economical feasibility of the concept. See, for example, V.R. Vuchic, Personal Rapid Transit: An Unrealistic System, Urban Transport International (Paris), No 7, 1996, page 35. It seems to be mutually incompatible between the small size vehicles for low density travel and the substantial infrastructure investment for guideways, stations and sophisticated automation justifiable only for heavy traffic volumes. This is a reasonable argument in consideration of the costs of existing guideway systems such as subway, rail and monorail, and some previous personal rapid transit systems suffered from the dilemma. Attempts to increase the capacity by short headways of less than one second may face safety concerns similar to those of the automated highway system.

The criteria for the practical feasibility of a new transportation system may include: 1) Convenience and comfort. 2) Appropriate capacity. 3) Cost-effective. 4) Fuel efficiency, additional emphasis due to energy shortage. 5) Environment-friendly, air pollution, noise, aesthetic structure. 6) Safety, accident, theft, disease, weather. The traffic problems in urban and suburban areas cannot be adequately addressed by addition and improvement of existing transportation systems alone. New transportation systems are needed, and the new systems must demonstrate their feasibility against the above criteria.

## Summary of Invention

Therefore, it is an object of the present invention to provide an automated personal transportation system for moving passengers and light cargo. This new mode of surface transportation, termed "autoway", is complementary to existing surface transportation modes of highway and railway. It can provide the advantages of personal transportation to a large number of people whose access to personal transportation (automobile) is previously limited. For example, school children are too young to drive a car, some senior citizens may be no longer able to drive a car but are otherwise socially active, and still other people are uncomfortable with the anxiety of driving. For autoway, the only thing a driver needs to know is the destination. Both private and public transportation can be operated on autoway. As for light cargo transportation, autoway can be an ideal delivery system in connection with electronic commerce for small items with dispersed destinations.

It is another object of the present invention to provide high speed and high volume transportation with competitive infrastructure cost. Autoway can provide a cost-effective solution to traffic congestions in many cities where it is very expensive to build additional highway or subway. When a portion of the

traffic is moved to autoway, automobile users also get benefits of more pleasant driving experience without traffic congestions.

Still another object of the present invention is to provide a safe and environment-friendly transportation mode. A majority of automobile accidents are caused by human errors. This is essentially eliminated in the personal transportation system of autoway. The energy consumption of vehicles on autoway will also be significantly reduced. This will significantly reduce the air pollution in cities.

According to one aspect of the invention, small size vehicle, termed "autocar", is used on a railway-like track network. The vehicle width is limited to a dimension for one seat. The present invention maintains the advantages of both steel rail and personal transportation like automobile. Steel rail is an efficient, safe, and high speed transportation system. Modern railroad vehicles can be easily switched in a short time of 0.6 s, and a speed of about 300 km/hr can be achieved for high speed trains such as Shinkansen in Japan and TGV in France. The significant decreases in the vehicle size and weight open possibilities unavailable to ordinary railroads. This leads to small, light guideways and supporting structures. The guideways can be pre-manufactured with a high precision and at a low cost. This will significantly reduce the cost related to guideways and stations and the noise level during operation.

According to another aspect of the invention, a central rail is provided with a horizontal high-traction surface and vertical surfaces for guiding wheels. While the rigid wheels on side rails offer the advantages of low rolling drag and high speed reliability of conventional rail, a wheel on the high-traction central rail can be activated to provide acceleration and deceleration over  $1 \text{ m/s}^2$  when necessary. The guiding wheels can reduce noises associated with lateral vibration of the vehicle.

According to another aspect of the invention, the vehicles can be statically and dynamically coupled to form a train. Although most people drive alone on highway, a significant number of automobiles actually share the same direction at least for some segments of the trip. Since the destinations of vehicles are known to the system of autoway at the beginning, some vehicles can be properly coupled to form a train. Therefore, high traffic capacity can be achieved at a conservative headway.

According to another aspect of the invention, the control system of autoway is divided into three levels: central control system, wayside control-point control system, and vehicle control system. The central control system is responsible for functions related to the whole autoway system, such as vehicle registration, user registration, and traffic control. The wayside control system is related to the operations of stations and stops, diverging, and merging. The vehicle control system is related to the operations at the vehicle level, such as speed, braking, coupling and decoupling procedures, and collision avoidance. The communication requirements will be less demanding than a completely centralized system. The automation infrastructure will cost less than the fixed block and moving block control methods normally used in railway. The system will be more error-tolerant. Since part of the control system cost scales up with the capacity, the system can be also economically viable for relatively low traffic density.

## Brief Description of Drawings

FIG. 1 shows the components of the personal transportation system.

FIG. 2 shows the communication relationship in the personal transportation system.

FIG. 3 illustrates the relationship of the vehicle and the track.

FIGS. 4A and 4B show the structure of the coupling components.

FIGS. 5A and 5B show diverging and merging tracks respectively.

5 FIGS. 6A-6D show arrangements of stops and stations of autoway.

FIGS. 7A and 7B show parking facilities with random access and sequential access respectively.

FIG. 8 shows a semi-underground construction of the track.

FIG. 9 shows an arrangement of 4 tracks.

FIG. 10 shows an overhead construction of the autoway with 4 tracks.

10 FIG. 11 illustrates the relationship between the capacity and the number of entrained vehicles in a single lane.

## Detailed Description

FIG. 1 shows an autocar **20** and a trailer **22** on a section of the track network **24** of autoway.

15 The track **24** has two side rails **70** for rigid wheels **62** of the autocar **20** and a central rail **72** for additional acceleration and deceleration. The track **24** is preferably pre-manufactured in factory with high precisions and supported on an open frame structure **80**. The track network connects a number of stops and stations (not shown) for people to get on and get off an autocar. The difference between a stop and a station is that a station normally have empty autocars available immediately for service but a autocar  
20 will be dispatched to a stop upon request. In practice, many other services and amenities will also be available at stations, such as maintenance, restaurants, shops, and restrooms. The access notification device **26** installed at stops and stations informs the autoway system the demand for service. The  
wayside control-point control system **28** is used for the operation of switching actions at diverging, merging, and stops and stations. The access notification device **26** and the wayside control system **28**  
25 are connected to the central control system **30** by a communication network **36**, preferably a wired communication network **34** such as copper wire or optical fiber. The communication to the autocars is provided by wireless communication means **32**, and preferably a cellular structure is used to cover the track network.

The autocar **20** has its vehicle identification that can be read by a scanning device. In a preferred  
30 embodiment, an identification plate with printed vehicle identification number and corresponding bar code **48** is provided at the door. The printed identification number is for the human eyes and the bar code **48** is for the optical scanning device **96** at the wayside control system **28**. For redundancy as a safety consideration, a smart card **50** with the identification information can also be installed in the vehicle and the identification information can be read by a smart card reader **98** at the wayside control  
35 system **28**. The autocar has a distance sensor device **52** for the measurement of the distance and speed of an object in front of the vehicle. This can be a laser device, a radar device, or an ultrasonic device. The distance and speed data are fed to the vehicle control system **42**, or a computer in the vehicle, for collision avoidance and dynamically coupling of vehicles to form a train. The couplers (front coupler **54** at vehicle front and rear coupler **56** at vehicle back) are used to connect two vehicles mechanically and

electrically. An additional communication device **58** is provided for inter-vehicle communication. This is a point-to-point short distance communication device, such as an infrared transceiver or a high frequency radio device like blue-tooth device. The vehicle **20** communicates with the wayside control system **28** and the central control system **30** through a wireless means by the antenna **60**.

5 An important feature of the autoway is the small size of the autocar **20**. The width of the autocar body **46** should be as small as possible so that weight is distributed longitudinally to reduce the size of the guideway. The smallest width is for one seat. As the dimension for a comfortably seated person is 66 cm by 82 cm, the width of the autocar can be chosen as about 85 cm. A typical vehicle size for one seat can be 85 cm in width, 140 cm in height, and 200 cm in length. The track gauge, or the distance  
10 between the central lines of the side rails, can be about 80 cm. For conventional railroad, the vehicle width is much greater than the rail gauge. Because the small size and light weight of the autocar, the relative magnitude of the side force due to wind can be significant. To increase the stability of the autocar, the track gauge is increased to a maximum value appropriate for the vehicle width. Since the average occupancy of automobile is 1.1 person in the United States, the choice of one seat per vehicle is  
15 reasonable. The personal nature of autocar provides people with comfort and privacy. Audio, video, and climate control can also be adjusted at individual's choice. For people traveling in a group, the autocars can be statically coupled to move together. A trailer **22** is also provided for more travel options. A trailer **22** is similar to an autocar **20** but does not have its own power and driving system. It is always statically connected to an autocar to either add cargo volume or provide additional seats. A trailer with a  
20 typical size of autocar can provide two seats or a cargo space of about 1.2 m<sup>3</sup>. For example, a mother and a very small child can choose to travel together in a trailer with the front autocar empty.

Other components of autocar are not shown but are obvious to those skilled in the art for the proper operation of the vehicle. The autocar must have a power source like an engine, or fuel cell, or battery, or electricity provided by a collection shoe from a power line. The autocar must have the  
25 necessary driving and braking means. In a preferred embodiment, the autocar **20** has a small battery but get its power mainly from the power line **82** by an electricity collection shoe. The battery will provide power to drive the autocar to a nearby station when there is a power outage, and to provide power to go through areas without power line such as stops, stations and parking facilities where power line may be terminated due to safety considerations. The battery can be rated for the driving distance, and a  
30 capacity of 4 km will be sufficient for most urban areas. The autocar also has a driving and braking system. Electric motors are used to drive the wheels and regenerating brakes are preferred for normal operations.

The communication relationship of the components of the personal transportation system is illustrated in FIG. 2. The central control system **30**, the wayside control system **28**, the access  
35 notification device **26**, and the autocar **20** are connected by a communication network **36**. Each autocar **20** is registered with the central control system **30** for a unique vehicle identification number. For example, a combination of 5 digits and capital letters can be used for vehicle identification number. With the exclusion of easily confused letters of I and O, this combination can handle more than 24 million vehicles. Each stop or station is also assigned an identification number. The station (stop) identification

can use a five-digit plus two-digit system. The five digits can have a maximum number of stations and stops of 100,000. The two optional digits can identify more detailed station locations within a general destination. For example, station identification number 12345 is given to airport x, with default station as 12345-00 and 12345-00 can be for general entrance, 12345-01 for terminal 1, 12345-02 for terminal 2, and so on. A list of station and stop identifications can be provided in a booklet, or a map, or the computer in the vehicle. Voice input of station identification can also be provided. Although existing station ticket systems can be adapted for use in the present invention, a preferred method is issuance of an access device **38** for each user account. The access device **38** has an "open" button **106**, a "close button" **107**, a LCD display **104** for vehicle identification number, and a wireless communication means -

10 **102** such as infrared or radio transceiver for communication with the corresponding to transceivers of the access notification system and the autocar. The access device **38** has a memory for storage of the user account number.

The vehicles on autoway can be private-owned or public-owned. For public-owned vehicles, the user **40** can have exclusive use like a rental car or shared use like a bus. When an user **40** push the "open" button **106** of the access device **38** in front of the access notification system **26** with its wireless transceiver **94**, the access device **38** provides a signal of the user account number. The default option for an account with a private car is to use his private car. Generally, the user **40** can choose an exclusive use or shared use from the access notification system **26** for a public vehicle. The user can also make other choices such as trailer and statically coupled vehicles in a group, using the function buttons **92** and the display **90** of the access notification system **26**. For people in a group of statically coupled vehicles, each user in the group will then check in with the access notification system. The central control system -

20 **30** will assign a vehicle to serve the station. Then the vehicle identification number will be sent to the access device **38** and shown on the LCD display **104**. The user **40** then proceed to find the autocar **20** with the identification number shown on the LCD display **104**, and open the door of the autocar with the access device **38**. The autocar **20** further verifies the user account information and the door is opened. The user **40** can then input the destination identification number from a communication panel **44** in the autocar **20**. The communication panel **44** has a LCD display **110**, keypads **112** for input, and function keys **114**. When the user pushes the "car" key, he is able to input the destination identification number. When he pushes the "phone" key, he is able to make a phone call. The LCD display **110** on the panel -

30 **44** will show information such as the destination, the current location and the time remaining for the trip. The system will get the user to the destination without any stops or transfers at other stations. At the destination, the user **40** can use the "close" button **108** to lock the vehicle or the system will automatically lock the vehicle after a predetermined time or before moving. A user **40** can also change his destination using the communication panel **44** during the trip.

35 The operation of the vehicle **20** on the track **24** is further illustrated in FIG. 3. The side rails **70** and the central rail **72** are connected by cross bars **78** to form a track **24**. The flanged rigid wheels **62** run on the side rails **70** with a low friction surface, like a conventional railway system. Preferably the wheels **62** and the side rails **70** are made of steel. The side rails **70** offer the advantages of low rolling drag and reliable high speed operation. Therefore, it is possible to have a speed about 50 km/hr in local

areas, a speed of about 100 km/hr on major routes, and even higher speed for certain long distance routes. Pneumatic rubber tires are not used because of their unpredictable failure mode. However, it is known that steel wheel on rail has very low wheel adhesion and it is difficult to maintain consistent acceleration and deceleration over about  $1 \text{ m/s}^2$ . Therefore, an additional central rail **72** is provided with a substantially horizontal surface **74** of high traction and substantially vertical surfaces **76** of low friction for guiding wheels. The vertical surfaces **76** are symmetric to the central vertical plane of the track **24**, and the guiding wheels **84** will center the vehicle **20** on the track **24**. Slight curvature may be introduced for the surfaces of the central rail, or other shapes may be used for the same functions. For example, the horizontal surface **74** may have a small convex curvature to avoid accumulation of water.

The high friction surface can be accomplished by a rough surface with patterns, or a polymer layer on the metal similar to a deck surface for an aircraft carrier. The low friction surface can be obtained by polishing, lubrication, and special coatings like teflon. A rubber tire **87** with a high traction surface **89** can be pushed by a mechanical or hydraulic means **86** onto the horizontal surface **74**. This additional tire can be actuated by the vehicle control system to provide acceleration and deceleration over  $1 \text{ m/s}^2$  when necessary or when slippery is detected from the loss of power on the rigid wheels **62**. The force on the tire can be adjusted and can even be increased beyond the weight supported by the back wheels since a rail gripping condition can be created by the tire **87** and the lower wheels **88**. This is useful for emergency braking, and the traction force is not limited by the weight of the vehicle. The vertical guiding wheels **84** mounted on the chassis of the vehicle reduce the noise related to the lateral vibration of the vehicle **20**. At places where the central rail **72** starts or ends, the two vertical surfaces **76** gradually converge to facilitate the engagement of the guiding wheels **84**. The central rail **72** is terminated at parking facilities for easy automatic parking operation. The central rail **72** also adds structural integrity to the track and prevents derailling of the vehicles. It should be noted that linear induction motors are often recommended for use in personal rapid transit systems in the literature. The advantage of the linear induction motors is more accurate control of vehicles for short headways. However, linear induction motors have the disadvantages of more expensive guideways and vehicles and lower energy efficiency than electric motors. Therefore, linear induction motors are justifiable only for a very heavy traffic volume.

The coupling components of autocar consists of a rear coupler **56** (FIG. 4A) and a front coupler **54** ( FIG. 4B). They are installed on the vehicle body **46** through holes **126** and **144** provided in the components. At least one of the couplers should be installed on a suspension with some freedom for movement to accommodate the misalignment of the vehicles during motion. The rear coupler **56** has a pair of keys **122** that are pushed toward the center line by springs **120** attached to them respectively. Once the instruction of coupling is given by the central control system **30**, the vehicle control system **42** can get the distance and speed between the two vehicles from the distance sensor device **52**, and then the following vehicle can be controlled to approach the leading vehicle slowly. The cylinder **130** of the front coupler **54** can push through the keys **122** until the keys **122** get into the opening **132** in the cylinder **130**. The electrical contacts **134** in the cylinder **130** get in touch with corresponding contacts **124** in the rear coupler **56**, and electrical connection is established between the two vehicles. To

uncouple the vehicles, a motorized device **136** with proper electrical connections **138** can follow the instruction from the vehicle control system **42** and turn the cylinder **130** by 90 degrees. This can be done either electronically by control of the motor rotation or mechanically by a gear structure with teeth on a quarter of the cylinder circumference. A force sensor **140**, for example, a strain sensor, is used to measure the force between the two vehicles. Although the vehicles are set to the same speed when coupled, difference in speed controls will lead to a force of tension or compression. The signal from the force sensor **140** is provided to the vehicle control system **42** by proper electrical connection **142**, and the signal is used to adjust the speed so that the force is below a certain noise level.

The vehicles can be statically coupled or dynamically coupled. Static coupling is initiated by the user for people traveling in a group or for adding cargo and passenger space. Static coupling is accomplished before the vehicles leaving a station. A trailer is always coupled with an autocar, and the coupling can be accomplished by backing the autocar towards a trailer. Voice communication can be easily provided to vehicles in a statically coupled group. Dynamical coupling and decoupling are initiated by the central control system to improve the capacity of autoway. Vehicles that share some segments in their traveling routes are coupled together to form a train. The inter-vehicle communication in a train enables the vehicles to brake simultaneously during emergency. Coupled vehicles are much safer since malfunctioned vehicles can be pulled by the train.

There are two types of switches in the track network: diverging **152** (FIG. 5A) and merging **158** (FIG. 5B). For diverging **152**, the mainline **150** is divided into a tangent side **154** and a turnout side **156**. For merging **158**, a turnout side track **156** is merged with the mainline **150**. The arrows indicate the directions of traffic flow. When the wayside control system **28** detects the identification of the approaching vehicle **20**, the appropriate switch position at **152** and **158** will be set and verified according to the traffic flow instruction from the central control system **30**. The speed instruction is also given to the vehicle **20** for this segment of the track. The central control system **30** will plan the traffic flow so that collision will not happen, and the wayside control system **28** will detect the vehicle movement and operate the switch accordingly to avoid two vehicles running into a merging track at the same time. In case of violation, a stop instruction will be given to the vehicle immediately. Further, the distance sensor **52** of the vehicle **20** offers the safety of collision avoidance at the vehicle level. Since there are only a limited number of switch points, railroad switch can be a reasonable choice. Railroad switch is a reliable technology with a short switch time of 0.6 s for modern switches. For even shorter headways, wayside actuated vehicle switch can also be considered.

The stops and stations can have many variations. The simplest form of station **25** is just a side track **164** off the mainline **150**(FIG. 6A). The station **25** on the side track **164** is divided into an unloading area **160** and a loading area **162**, each having a length for a number of vehicles appropriate for the traffic condition. At a station **25**, there are empty vehicles on the track. At a stop **27**, empty vehicles will move to a station or a parking facility immediately. Normally, a vehicle is immediately available at a station, and a user may wait for a short time, say less than 1 minute, for his vehicle at a stop. An approximate guideline is to have a stop for every major building and a station every 1000 m in urban areas. The arrangement of stops and stations on autoway is similar to the parking facilities of a

personal transportation system like automobiles but quite different from mass transit systems. For a personal transportation system, the stations are close to business or residential buildings, and there are no stations on a major traffic route. For a mass transit system, the stations are located along the traffic route. In FIG. 6B, a stop **27** with a parking track **166** and a parking facility **168** is shown. This is a likely arrangement for a stop **27** in front of an office building. When there are many vehicles involved in a station such as a connection point to a mass transit system like an airport and a railway station, the well-known ladder tracks **170** can be used (FIG. 6C). In FIG. 6D, a track **164** on the side street between two mainlines **150** is used as a station.

The major difference in the parking facility of autoway to conventional parking facility for automobiles is that all parking are varlet parking by the autoway system. The autoway system will automatically move the autocar to a nearest parking facility, saving people the trouble to find a parking lot and then walk back from the parking lot. The system keeps track of the locations of all vehicles and transfer a particular vehicle to the location of demand. This can be very convenient when the available parking lot is far away or when people get into a large shopping mall from one entrance and get out from another entrance. According to the types of access mode, the parking facility can be of two types: the random access type (FIG. 7A) and the sequential access type ( FIG. 7B). The random access parking is for private vehicles and exclusive rental vehicles, and each vehicle can be accessed independently. A carrier **172** residing on the parking track **166** can move along a carrier track **174** perpendicular to the autocar track **166** to put the autocar **20** into a parking position. The sequential access parking is for public shared vehicles. A carrier **172** at the entrance **174** move the vehicle **20** to a specific parking track to park sequentially. At the exit **176**, a carrier **172** can move vehicles **20** out sequentially. This creates a first-in first-out sequential access. If the entrance is also used as exit, a first-in last-out sequence is created. Multilevel parking is possible and even more efficient when the carrier can move vertically at the entrance and exit point. In this case, multiple carriers can be used to move in a vertically circular form to improve parking speed. Depending on the parking arrangement, a parking lot can handle 6-12 times more autocars than automobiles. Put it another way, a previous 8-story parking lot for automobiles can become an office building with only the basement for autocar parking.

The autoway track can be built above the ground, at the ground level or underground. Preferably it can be built above the ground or underground to save the expenses for right-of -ways. One lane is normally used for street traffic, and two or four lanes are used for major traffic routes. FIG. 8 shows a semi-underground construction appropriate for residential areas. The track **24** and its supporting structure **80** are located inside a shallow concrete passage **184** below the ground level and a concrete cover **180** with a width of a sidewalk road is supported by metal bars **182**. The tunnel is open at the window level of the autocar **20** for people to see the natural light. This structure costs less than a complete underground construction, and can easily go underground for road crossing. The stations are easily accessible. It does not obstruct the views of automobile drivers on the road and residents in the houses. Grass can be planted on the top concrete to further improve the environment appeals.

FIG. 9 shows a 4-lane construction of autoway for a major traffic route. A second level is constructed on the first level with open frame supporting structures **186**. Due to the small size of

autocars, the four-lane construction occupies less space than one standard lane on the highway or space of one track on the railway. It will be shown that its capacity for moving people is equivalent to four 6-lane highways. This structure can be built either underground or overhead at the median line of existing highway. FIG. 10 shows a side view of an overhead construction of a 4-lane autoway. Open frame structure **188** is built on small foundations **190** to support the tracks **24** of autoway. The light weight structure offers more opportunities for aesthetic considerations. It is also less susceptible to wind, rain, snow, and earthquake. As many components can be pre-manufactured, a significant shorter construction period and a lower construction cost are possible as compared with other road construction.

The control system of autoway is divided into three levels: central control system **30**, wayside control-point control system **28**, and vehicle control system **42**. The central control system is responsible for functions related to the whole autoway system, such as vehicle registration, user registration, and traffic control. At any moment, the central control system knows the locations of all parked vehicles, the destinations of all moving vehicles, and the approximate locations of all moving vehicles within a known track segment. The central control system also knows the working conditions of all the tracks, stations, stops, and parking facilities. With the knowledge of the locations of parked vehicles, the central control system can dispatch a vehicle to the location on demand. With the destination information, the central control system can arrange dynamic coupling of vehicles. Preferably, a map of the autoway is displayed on the monitor of the computer of the central control system with all the vehicles simulated on the map. Various traffic statistics are also displayed. Manual intervention can be implemented when necessary. In practice, a series of computers are used for reliability and scalability. In case of failure of a computer, a backup computer will automatically take over. More computers can be added in response to an increase in the traffic volume.

The central control system plans the traffic flow of each vehicle on a segment basis before a control point. The traffic flow instruction includes the direction and the speed profile for the next segment. A control point is like the traffic light on the street. Control points are set up before diverging, merging, stops and stations. with enough distance for emergency braking. The control points divide the autoway track network into segments. The exact location of a vehicle is only known to the central control system at a control point when the wayside control system detects the identity of a moving vehicle. At this point, the wayside control system operates the switch for the desired direction, and the vehicle is informed of the location of the control point and then follows the speed profile. The location information is displayed to the user for psychological reasons just as the floor number is normally shown on an elevator. The central control system can use the speed profile to calculate the approximate location of the vehicle for planning purpose. Delegating the implementation of traffic flow to the wayside control system and the vehicle control system is cost-effective in comparison with the high guideway cost of the fixed block system and the demanding communication requirements of the moving block system used in conventional railways. In the fixed block scheme, the guideway is divided into segments called blocks and apparatus is provided in each block to detect the presence of a vehicle. The minimum separation between vehicles is at least one block. When a short headway is desired, the infrastructure cost becomes excessive. In the moving block scheme, each vehicle transmits its location to the central

control system and receives instructions from the central control system on a periodic basis. The headway is related to the communication rate. When a short headway is desired, the communication load becomes excessive. The control method in the present invention is feasible due to the collision avoidance system of the vehicle and the ability of the autocar to stop in a short distance like an automobile.

The wayside control system **28** is a computer system related to the operations of stations and stops, diverging, and merging. The central control system informs the wayside control system before each control point the sequence of arriving vehicles, directions of travel, and the status of entraining. The wayside control system then implements the direction control by turning the proper switch position. The issue of merging involves two control points, and the wayside control systems are connected and their actions are set to be exclusive, that is, only one is open for traffic at a time.

The vehicle control system **42** is a computer system related to the operations at the vehicle level, such as access control, speed, braking, coupling and decoupling procedures, and collision avoidance. Before each control point, a speed profile is provided to the vehicle control system from the central control system. The speed profile is designed for the specific segment of the track. It consists of a series of speed and distance instructions. For example, an autocar from a turnout side at a merging point may get a speed profile: 50 km/hr to 30 km/hr in a distance of 20 m, 30 km/hr for a distance of 30 m (the turning part), 30 km/hr to 100 km/hr in a distance of 35 m (the additional rubber tire will be activated by the vehicle control system for the necessary acceleration), and 100 km/hr for 500 m. In this case, the autocar is assumed to take care of the transition of speed by a predetermined procedure, but maintain the end results of time and distance. Other forms of speed profiles may also be used. Since the speed meter and distance meter of the vehicle are used, small errors may occur but the errors are eliminated at each control point. The actual physical implementation of the speed control can use currently available technologies for automobiles and trains. As the cost of the vehicle control system scales up with the capacity, the system can be also economically viable for relatively low traffic density.

The central control system assumes that the wayside control system and the vehicle control system perform the functions as instructed. Eventually some errors will happen. There are redundancies to reduce the effect of malfunctions in devices. At each level, procedures are established to catch potential errors and correct the errors if possible, and then the errors are reported to the central control system. A warning will be issued to the central control system if an error cannot be fixed and potentially dangerous. The central control system will respond immediately to any warning messages. The central control system will use the error messages to make maintenance and improve operation procedures. At the vehicle level, the distance sensor device will be used to avoid collision. Besides, the error reports can be used for improvements in new versions of the control software.

Although autoway is offered as a solution to urban traffic congestion and air pollution, it can also be very useful in other places. For example, autoway can be used on a company campus, a university campus, and a military base, for internal transportation. In a national park, autoway can provide a high volume of traffic with minimum impacts on the environment due to its small size and easy of construction. The autoway can also provide some preliminary access control to certain parts of the track

network. In rural areas with many rivers or mountain areas with a difficult terrain, it may be costly to build a highway but an autoway can be built at a low cost. The automatic nature of the autoway and the open frame structure of an overhead construction make the autoway more reliable in bad conditions such as fog, rain, wind, snow, flood, and falling rocks. The communication network of the autoway can also provide rural and mountain areas with access to broadband communication and help social and economical developments in these areas.

As for light cargo transportation, autoway can be an ideal delivery system in connection with electronic commerce for small items with dispersed destinations. A sender can set the destination and the receiver for the autocar, and the receiver can be notified in advance the time of arrival, and then the designated receiver can open the autocar with his access device. It can be set up to transport goods between factories, users, warehouses, and stores with specifically designated stations and the delivery can be performed at light traffic periods.

Autoway provides a mode of surface transportation for both private and public transportation with convenience and comfort. As a form of public transportation, autoway retains all the features of the concept of personal rapid transit. As a form of private transportation, autocar is safer, more comfortable, and more affordable than automobile. A person sitting comfortably in an autocar can make phone calls, play DVD video, read a newspaper, or browse the internet, at his own privacy. Since autocar goes directly to the destinations without any stops and transfers, considerable time will be saved for commuters. A tourist no longer needs to worry about driving directions or transfers at stations. As a public transportation, it is available 24 hours a day and 7 days a week and offers the convenience, comfort and privacy of a personal transportation system. Driving an autocar is as easy as using an elevator. The only thing a passenger needs to know is his destination. This offers the advantages of personal transportation to many people such as school children and senior citizens who cannot use an automobile on their own.

Table 1 lists the operational capacities of existing urban transportation systems and autoway. A conservative headway of 2 seconds is used for both automobile and autocar. It should be noted that all the capacities can be increased significantly at the expense of comfort and safety. For example, the average occupancy of automobile is 1.1 and a capacity of 2200 vehicles/hr is possible at a shorter headway. If a car can always operate at full occupancy of 4 people, the capacity will be quadrupled. The capacity of bus and subway can be easily doubled during rush hours with half of the passengers standing. The headways of bus and subway can be technically much shorter but are mainly limited by the feeding mechanisms for stations. The capacity values of Table 1 are typical numbers in some medium-density metropolitan areas in the United States at comparable safety and comfort. As shown in FIG. 11, the capacity of autoway increases with the number of entrained vehicles. The minimum capacity of an autoway lane is equivalent to a highway lane when there is no entraining. Although most people drive alone on highway, a significant number of automobiles actually share the same direction at least for some segments of the trip. Dynamic coupling on autoway is like virtual car-pool. If the traffic conditions in an area is known, the capacity of autoway can be better estimated by computer simulation. A simple estimation is given by analysis of the capacity of subway. The line capacity of 7,812 persons per hour is

equivalent to 2.17 persons per second. It takes only 3.6 seconds to have 8 people to share the same direction. Therefore, the choice of 8 cars per train seems to be reasonable. When the subway capacity is doubled during rush hours, the capacity of autoway can also be doubled. In a sense, autoway has certain elasticity in capacity to accommodate an increase in the traffic flow. Roughly speaking, one lane of autoway is equivalent to one subway line or one 6-lane highway. Since four lanes of autoway can be accommodated in the space of one highway lane, a 4-lane autoway may have a capacity of four subway lines or four 6-lane highways.

Table 1 Traffic capacity estimates (Speed = 100 km/hr)

Vehicle type	Capacity (persons/hr)	Ratio	Remark
Automobile	1,673	1	Single occupant, headway = 2 s, car length = 4.2 m.
Bus	798	0.5	40 occupants, headway = 180 s, bus length = 12 m.
Automobile+Bus	2,442	1.5	Same conditions as above.
Subway	7,812	4.7	5-car train, 400 occupants, headway = 180 s, car length = 24 m.
Autocar (1 lane)	11,180	6.7	8-car train, 8 occupants, 1 lane, headway = 2 s, car length = 2 m.
Autocar (4 lanes)	44,720	26.7	8-car train, 8 occupants, 4 lanes, headway = 2 s, car length = 2 m.

The cost of construction, operation and maintenance of autoway will be significantly less than existing guideway systems. The autocar will cost much less than an average automobile. The small size of autocar results in light guideway structures. Construction of the guideway is mostly an efficient assembly process since the guideway can be pre-manufactured in a factory, for example, as welded structures. The autoway stops and stations are simple and small. Stops and stations can normally be constructed to connect to the basement, ground floor, or second floor of an existing building. This both adds convenience to the users, and saves the costs of adding additional elevators. The three-level control system reduces the cost of automation. In addition, computers and communication devices are reliable and widely available at low cost nowadays. Snow removal of the guideway can be accomplished automatically by a specially designed snow-removing vehicle. Since error reporting procedures are used in the control systems, maintenance can be easily performed by replacing faulty modules. Only a small number of staff are needed to operate and maintain the software and hardware of the autoway system. Therefore, the advantages of personal transportation can be provided at a competitive cost.

The fuel efficiency of autocar will be significantly higher than automobile. The weight of an autocar will be less than 25% of the weight of an average automobile. The front area of an autocar is about 50% of an automobile. The low drag of steel rail will offer an energy saving of about 25%. The high efficiency of the electric motor and electricity generation will offer an energy saving of about 50%. It is estimated the fuel consumption of the autocar is about 5% of an average automobile. If we assume the gas mileage of an average automobile is 10 km/liter (25 mile/gallon), the autocar can achieve a gas mileage of about 200 km/liter (500 mile/gallon). There may be some departure from the estimate, but the improvement in fuel efficiency is significant.

The high fuel efficiency of autocar will significantly reduce air pollution in urban areas. In rural areas, autoway can reduce the environment problem of soil erosion related to highway construction, and the overhead construction of autoway reduces interference with wild life. The noise level of modern railway has been significantly reduced due to high rail precision and maintenance. The noise level of autocar will be even lower due to the small weight and the lower speed. The light guideway will also provide opportunities for aesthetic structures.

Autoway will be a safe and reliable transportation mode. Since 90% of accidents on highway are caused by human errors, autoway essentially eliminates this accident source. Redundancy and error-checking in the system will make system-related accidents rare. For example, vehicle identifications can be obtained from both the bar code and the smart card. Both wired and wireless inter-vehicle communications are provided. The network structure of communication and track will ensure proper operations even if some segments have failed. Procedures for collision avoidance are implemented at all the three levels of control systems. Other safety issues such as theft, robbery, and contagious diseases, are also significantly reduced. Autoway is also less susceptible to wind, rain, snow, fog, and earthquake. The central control system can be linked to an earthquake warning system, and emergency procedures can be initiated during an earthquake.

Other embodiments of the invention will be apparent to those skilled in the art from a consideration of this specification or practice of the invention disclosed herein. For example, the length of autocar can be increased to have more than one seat in places with a higher average occupancy. Special vehicles can be designed for people with disabilities. A hook can be provided to pull the autocar for steep grades. Noise barriers can be set up near the sources of noises. Weight sensors can be installed at stations and stops or on the track to avoid overloading. Surface modification of the wheels and rails can be performed for better performance. Other coupling devices can be used. For the central rail, the horizontal surface can be physically in several sections but functionally as one similar to some monorail designs, and the vertical surface can be in the form of a bar or tubing. Other existing methods for centering the vehicle and providing additional driving and braking ability can also be adapted for the system. At seaside, the tracks can be made of polymer-based composite materials instead of steel to avoid corrosion. Data encryption and verification can be used for communication security. It is intended that the specification and examples shall be interpreted as illustrative and not in a limiting sense, with the true scope and spirit of the invention being indicated by the following claims.

## Claims

1. A transportation system for moving passengers and freight, comprising:

a track network, said track comprising a pair of side rails and a central rail with a substantially horizontal surface of high traction and substantially vertical surfaces symmetric with the central vertical plane of said track;

a plurality of vehicles, each said vehicle having a body with a width for one passenger seat, a plurality of rigid wheels engaged on said side rails for supporting and moving the vehicle, a plurality of guiding wheels engaged on said vertical surfaces of said central rail for centering the vehicle on the track, additional driving wheel with a high traction surface, an identification means for providing vehicle identification information, a distance sensor for measuring distance and speed of an object in front of the vehicle, a wireless communication means, driving and braking means for said rigid wheels and said additional driving wheel, and a vehicle control system connected with said distance sensor and said driving and braking means for controlling the driving and braking of the vehicle, an actuating mechanism being adapted for movement of said additional driving wheel between an unengaged position and an engaged position on said horizontal surface of said central rail for extra acceleration and braking capability in response to a signal from said vehicle control system;

a plurality of stops and stations on the side tracks off the main lines of said track network for loading and unloading, each stop and each station having an access notification device;

a plurality of wayside control systems, each having a computer system, a means for detecting said vehicle identification information of said identification means of the vehicle, and a means for controlling switches on said track network;

a central control system having a computer system for user registration, vehicle registration, and controlling the traffic flow;

a communication network connecting said central control system, said wayside control system, said vehicle control system, and said access notification system;

whereby a passenger can enter said vehicle at a station or stop and move directly from origin to destination.

2. The transportation system according to claim 1, wherein said vehicle further comprises a coupling means for mechanically and electrically coupling the vehicles to form a train, said coupling means being adapted for movement between a coupled position and an uncoupled position in response to a signal from said vehicle control system;

whereby said central control system gives instruction to said vehicle control system for performing static and dynamic coupling of the vehicles;

whereby the capacity of said transportation system is increased by entraining.

3. The transportation system according to claim 2, wherein said coupling means further comprises a sensor means for measuring the force between said coupled vehicles and sending said force information to said vehicle control system to adjust the driving means.

4. The transportation system of claim 1, wherein said vehicle further comprises an input panel for inputting destination information;

whereby said passenger can change his destination during a trip.

5

5. The transportation system of claim 1, further comprising a plurality of automatic parking facilities, each having a plurality of carriers for moving said vehicles to a parking position, and retracting said vehicles from a parking position.

10

6. The transportation system of claim 1, further comprising a plurality of trailers, each said trailer having a body with a width for one passenger seat, a plurality of rigid wheels engaged on said side rails for supporting the vehicle, a plurality of guiding wheels engaged on said vertical surfaces of said central rail for centering the vehicle on the track, an identification means for providing vehicle identification information, and a coupling means for mechanically and electrically coupling said trailer to a said vehicle.

15

7. The transportation system of claim 1, further comprising a plurality of access devices, each access device having a memory for the user account information, a LCD display for said vehicle identification number, an open button, a close button, and a wireless communication means for communicating with the vehicle control system and the access notification device;

20

whereby a said user can use said access device to communicate with said access notification device and operate said vehicle.

8. A transportation system for moving passengers and freight, comprising:

a track network, said track comprising a pair of side rails and a central rail;

25

a plurality of vehicles, each said vehicle having a body with a width for one passenger seat, a plurality of rigid wheels engaged on said side rails for supporting and moving the vehicle, a plurality of guiding wheels engaged on said central rail for centering the vehicle on the track, an identification means for providing vehicle identification information, a distance sensor for measuring distance and speed of an object in front of the vehicle, a wireless communication means, driving and braking means, and a vehicle control system connected with said distance sensor and said driving and braking means for controlling the driving and braking of the vehicle;

30

a plurality of stops and stations on the side tracks off the main lines of said track network for loading and unloading, each stop and each station having an access notification device;

a plurality of wayside control systems, each having a computer system, a means for detecting said

35

vehicle identification information of said identification means of the vehicle, and a means for controlling switch action;

a central control system having a computer system for user registration, vehicle registration, and controlling the traffic flow;

a communication network connecting said central control system, said wayside control system, said vehicle control system, and said access notification system.

9. The transportation system according to claim 8, wherein said vehicle further comprises a coupling means for mechanically and electrically coupling the vehicles to form a train, said coupling means being adapted for movement between a coupled position and an uncoupled position in response to a signal from said vehicle control system;

whereby said central control system gives instruction to said vehicle control system for performing static and dynamic coupling of the vehicles;

whereby the capacity of said transportation system is increased by entraining.

10. A method of controlling movement of a vehicle through a track network having a plurality of merging points, diverging points, stations and stops, from an origin to a destination, comprising assigning a vehicle identification number to said vehicle;

providing means for storing said vehicle identification number in said vehicle;

providing a distance sensor means to said vehicle for avoiding collisions;

setting up a plurality of control points, each before said merging point, diverging point, station and stop;

dividing said track network into a plurality of segments between said control points;

providing a wayside control system at each said control point, each said wayside control system has a

means for detecting said vehicle identification number and a means for switch operation;

providing a vehicle control system to said vehicle for controlling the operation of said vehicle, said vehicle control system operatively connected to said distance sensor means;

providing a communication network for connecting said central control system with a plurality of said wayside control system and said vehicle control system;

planning the direction and speed profile of said vehicles before said control points by said central control system;

informing the direction of said vehicle to said wayside control system and informing the speed profile information to said vehicle control system through said communication network;

detecting said vehicle identification number of said vehicle by said wayside control system;

implementing said direction of said vehicle by said wayside control system;

implementing said speed profile for said segment of said track network and avoiding collision according to information from said distance sensor means by said vehicle control system;

whereby the infrastructure cost of said track network and the communication demand in said communication network are reduced.

1/4

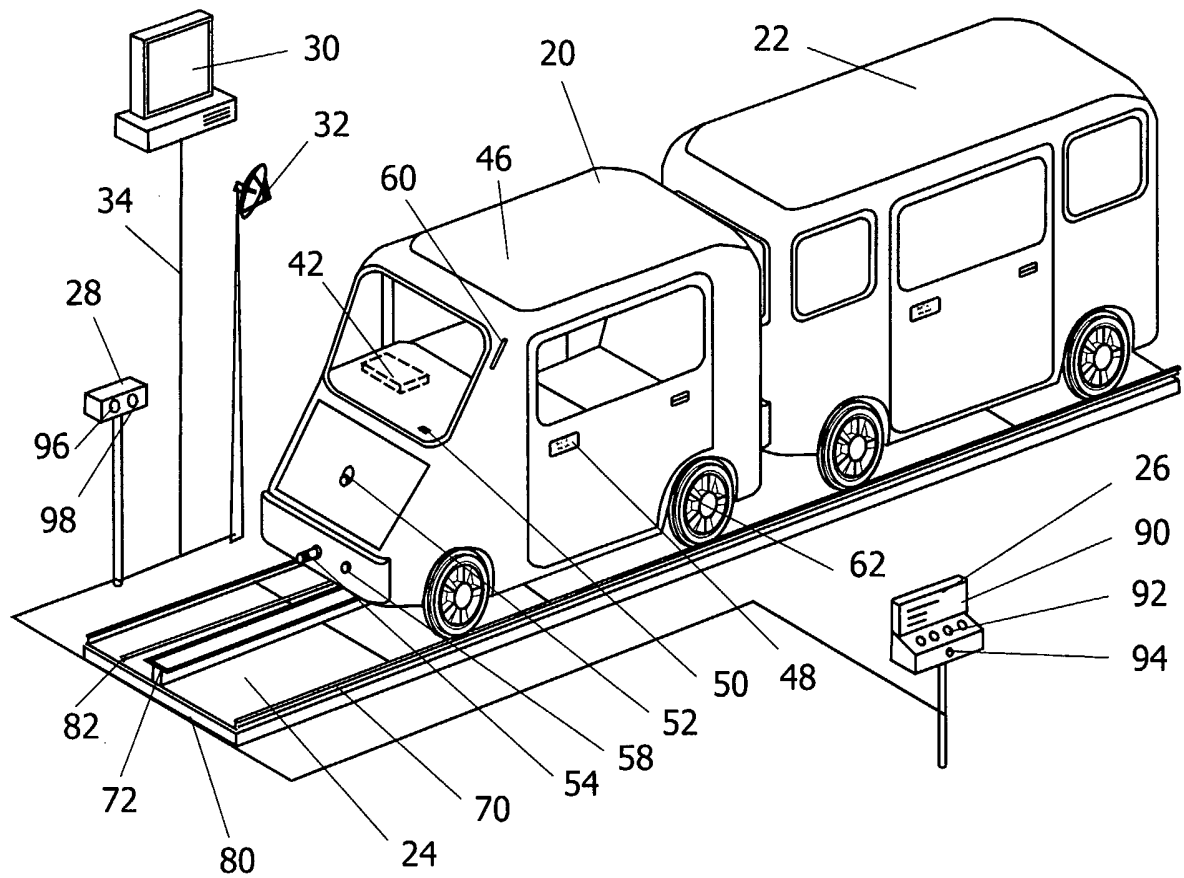


FIG. 1

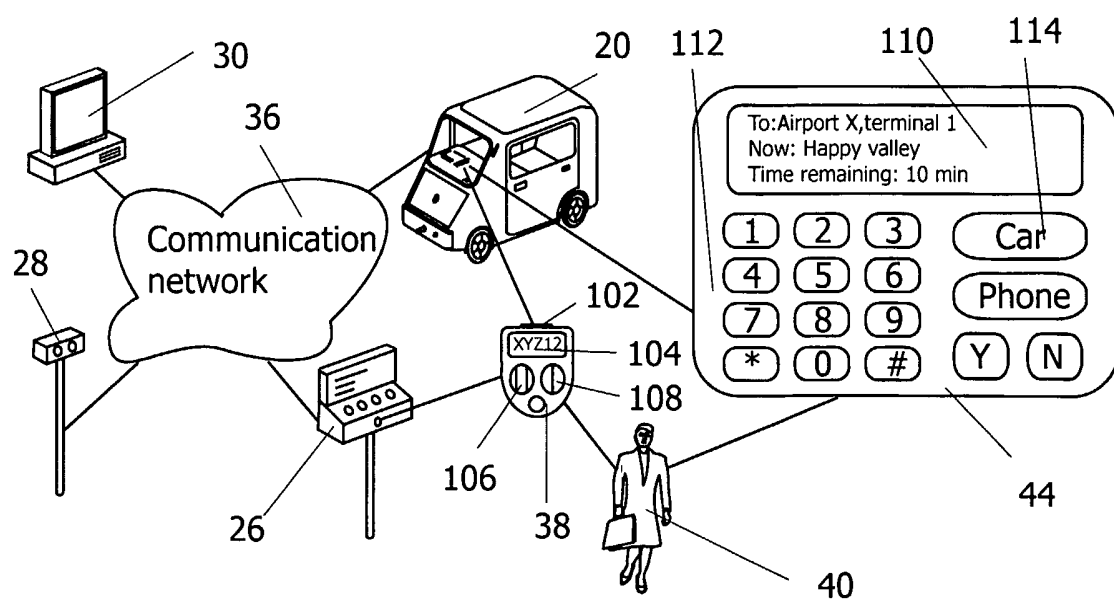


FIG. 2

2/4

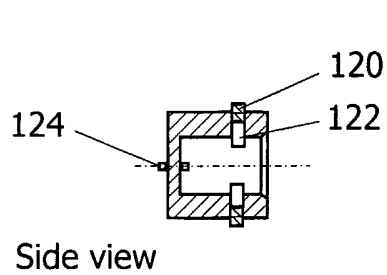
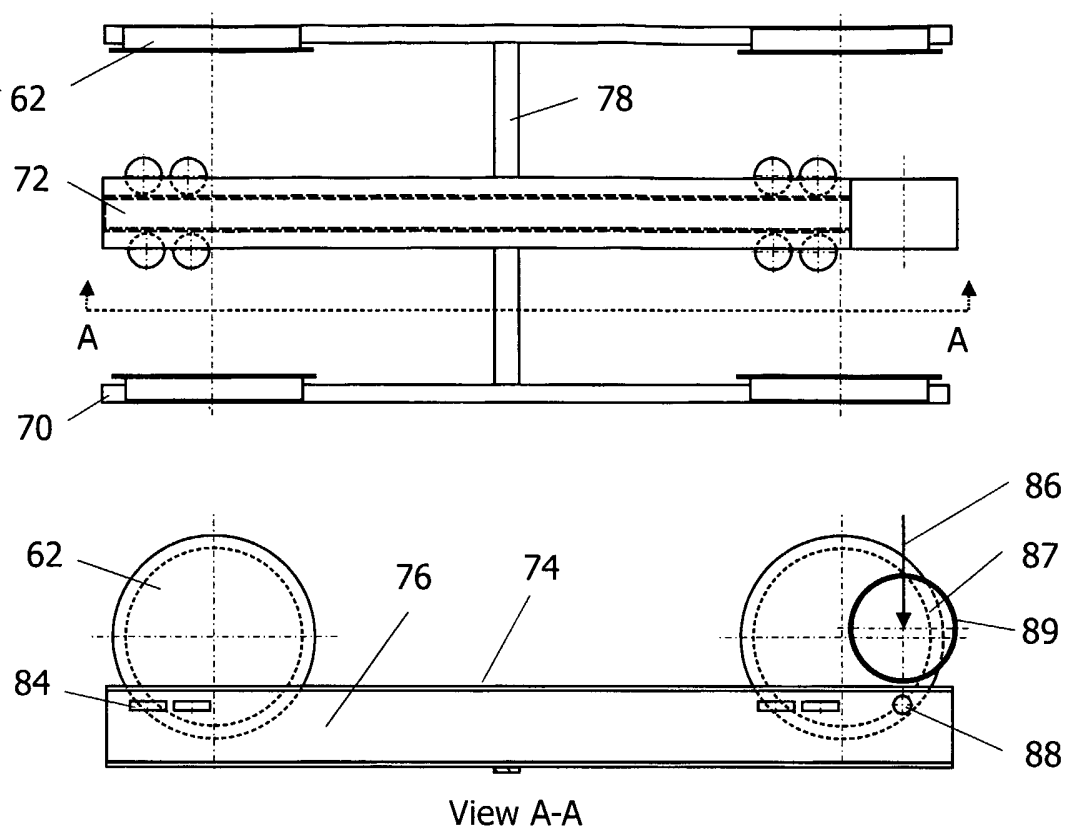


FIG. 4A

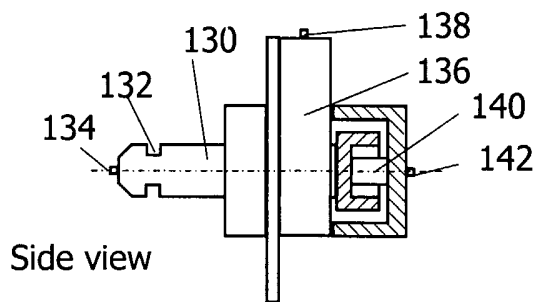


FIG. 4B

3/4

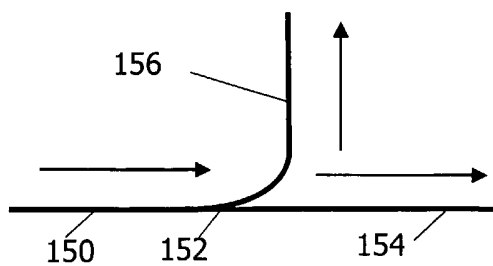


FIG. 5A

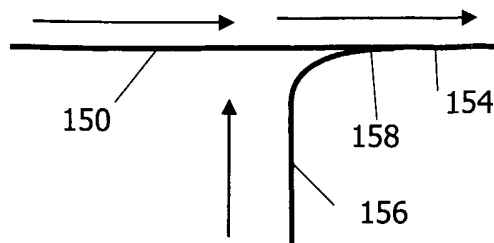


FIG. 5B

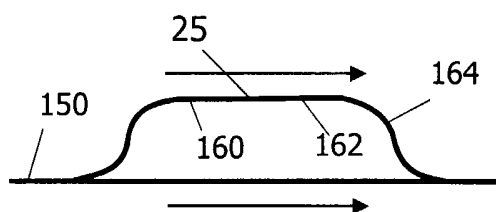


FIG. 6A

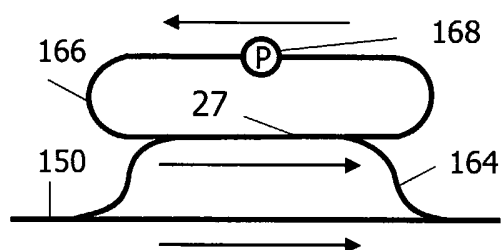


FIG. 6B

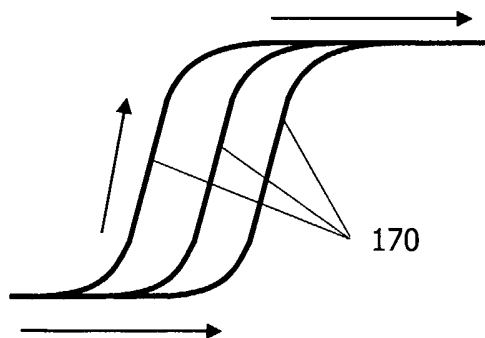


FIG. 6C

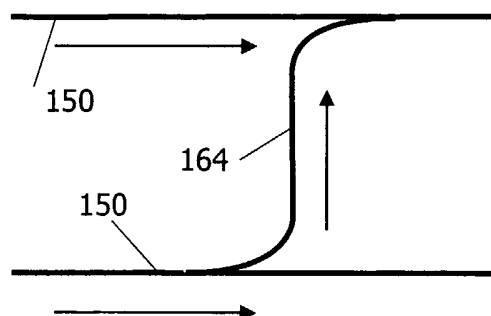


FIG. 6D

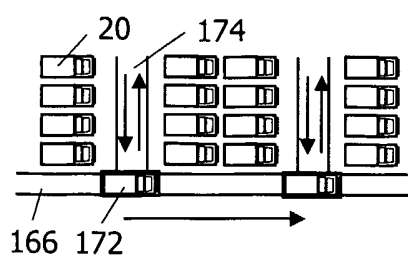


FIG. 7A

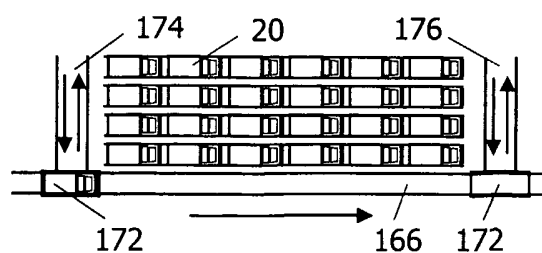


FIG. 7B

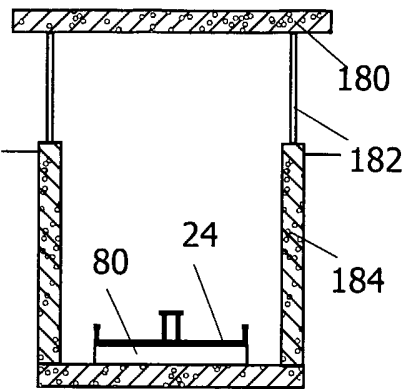


FIG. 8

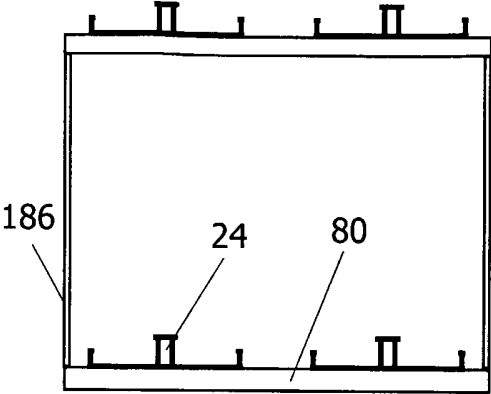


FIG. 9

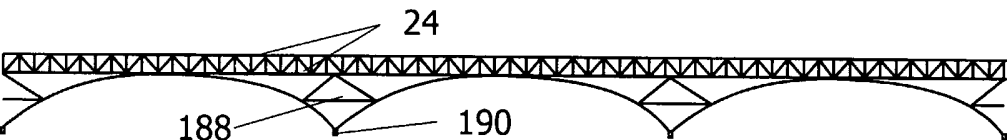


FIG. 10

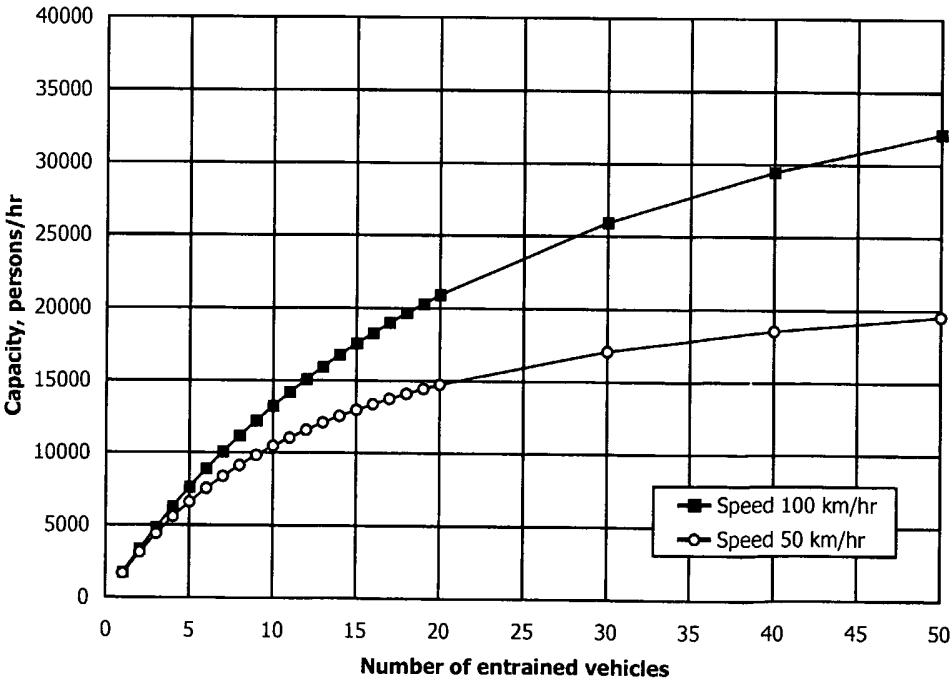


FIG. 11