



(86) Date de dépôt PCT/PCT Filing Date: 2003/11/04

(87) Date publication PCT/PCT Publication Date: 2004/06/10

(85) Entrée phase nationale/National Entry: 2005/05/18

(86) N° demande PCT/PCT Application No.: US 2003/035095

(87) N° publication PCT/PCT Publication No.: 2004/048634

(30) Priorités/Priorities: 2002/11/26 (60/429,853) US;
2003/01/15 (10/342,510) US

(51) Cl.Int.⁷/Int.Cl.⁷ C23C 2/06, C21D 9/46, C21D 6/00


(71) Demandeur/Applicant:
UEC TECHNOLOGIES, LLC, US

(72) Inventeur/Inventor:
HOYDICK, DAVID P., US

(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : PROCEDE DE PRODUCTION DE TOLE BIPHASEE

(54) Title: METHOD FOR THE PRODUCTION OF DUAL PHASE SHEET STEEL

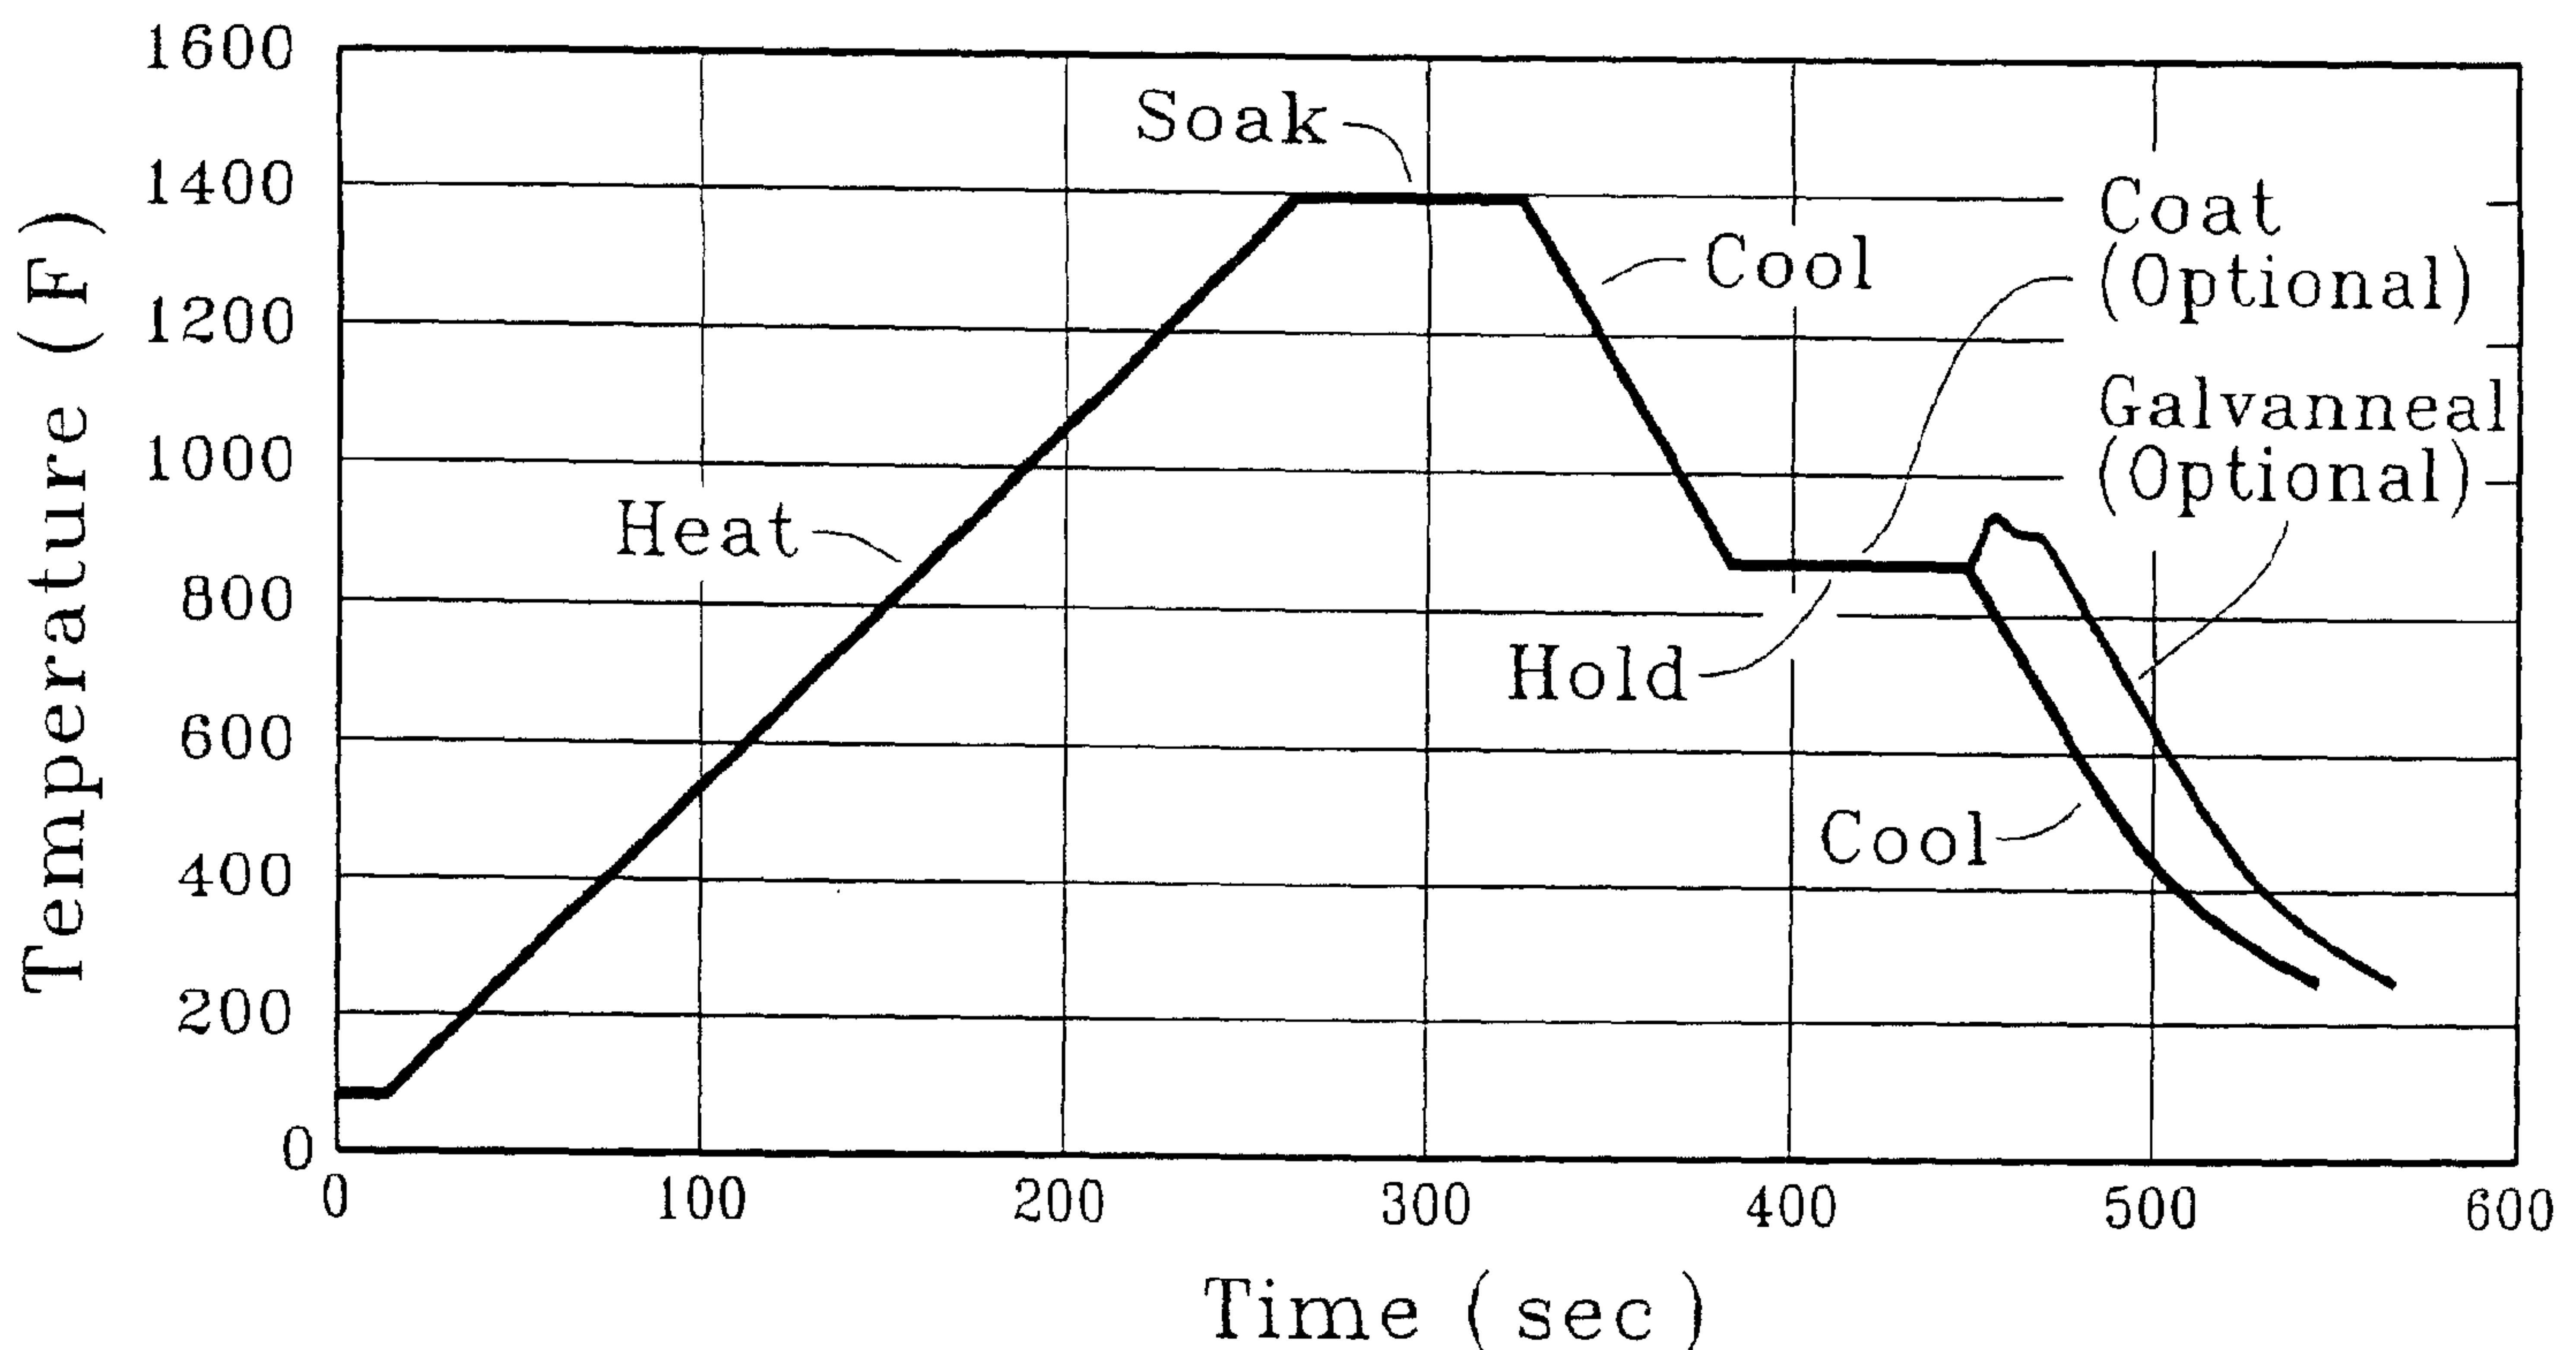

(57) Abrégé/Abstract:

Dual phase steel sheet is made using a time/temperature cycle including a soak at about 1340-1425F and a hold at 850-920F, where the steel has the composition in weight percent, carbon: 0.02-0.20; aluminum: 0.010-0.150; titanium: 0.01 max; silicon: 0.5 max; phosphorous: 0.060 max; sulfur: 0.030 max; manganese: 1.5- 2.40; chromium: 0.03-1.50; molybdenum: 0.03-1.50; with the provisos that the amounts of manganese, chromium and molybdenum have the relationship: $(Mn + 6Cr + 10 Mo) = \text{at least } 3.5\%$. The sheet is preferably in the form of a strip treated in a continuous galvanizing or galvannealing line, and the product is predominantly ferrite and martensite.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 June 2004 (10.06.2004)

PCT

(10) International Publication Number
WO 2004/048634 A1

(51) International Patent Classification⁷: **C23C 2/06**,
C21D 9/46, 6/00

(21) International Application Number:
PCT/US2003/035095

(22) International Filing Date:
4 November 2003 (04.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/429,853 26 November 2002 (26.11.2002) US
10/342,510 15 January 2003 (15.01.2003) US

(71) Applicant: **UEC TECHNOLOGIES, LLC** [US/US]; 600
Grant Street, Pittsburgh, PA 15219 (US).

(72) Inventor: **HOYDICK, David, P.**; 1740 Malor Drive, Pitts-
burgh, PA 15227 (US).

(74) Agent: **KRAYER, William, L.**; William L. Krayer, 1771
Helen Drive, Pittsburgh, PA 15216 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR THE PRODUCTION OF DUAL PHASE SHEET STEEL

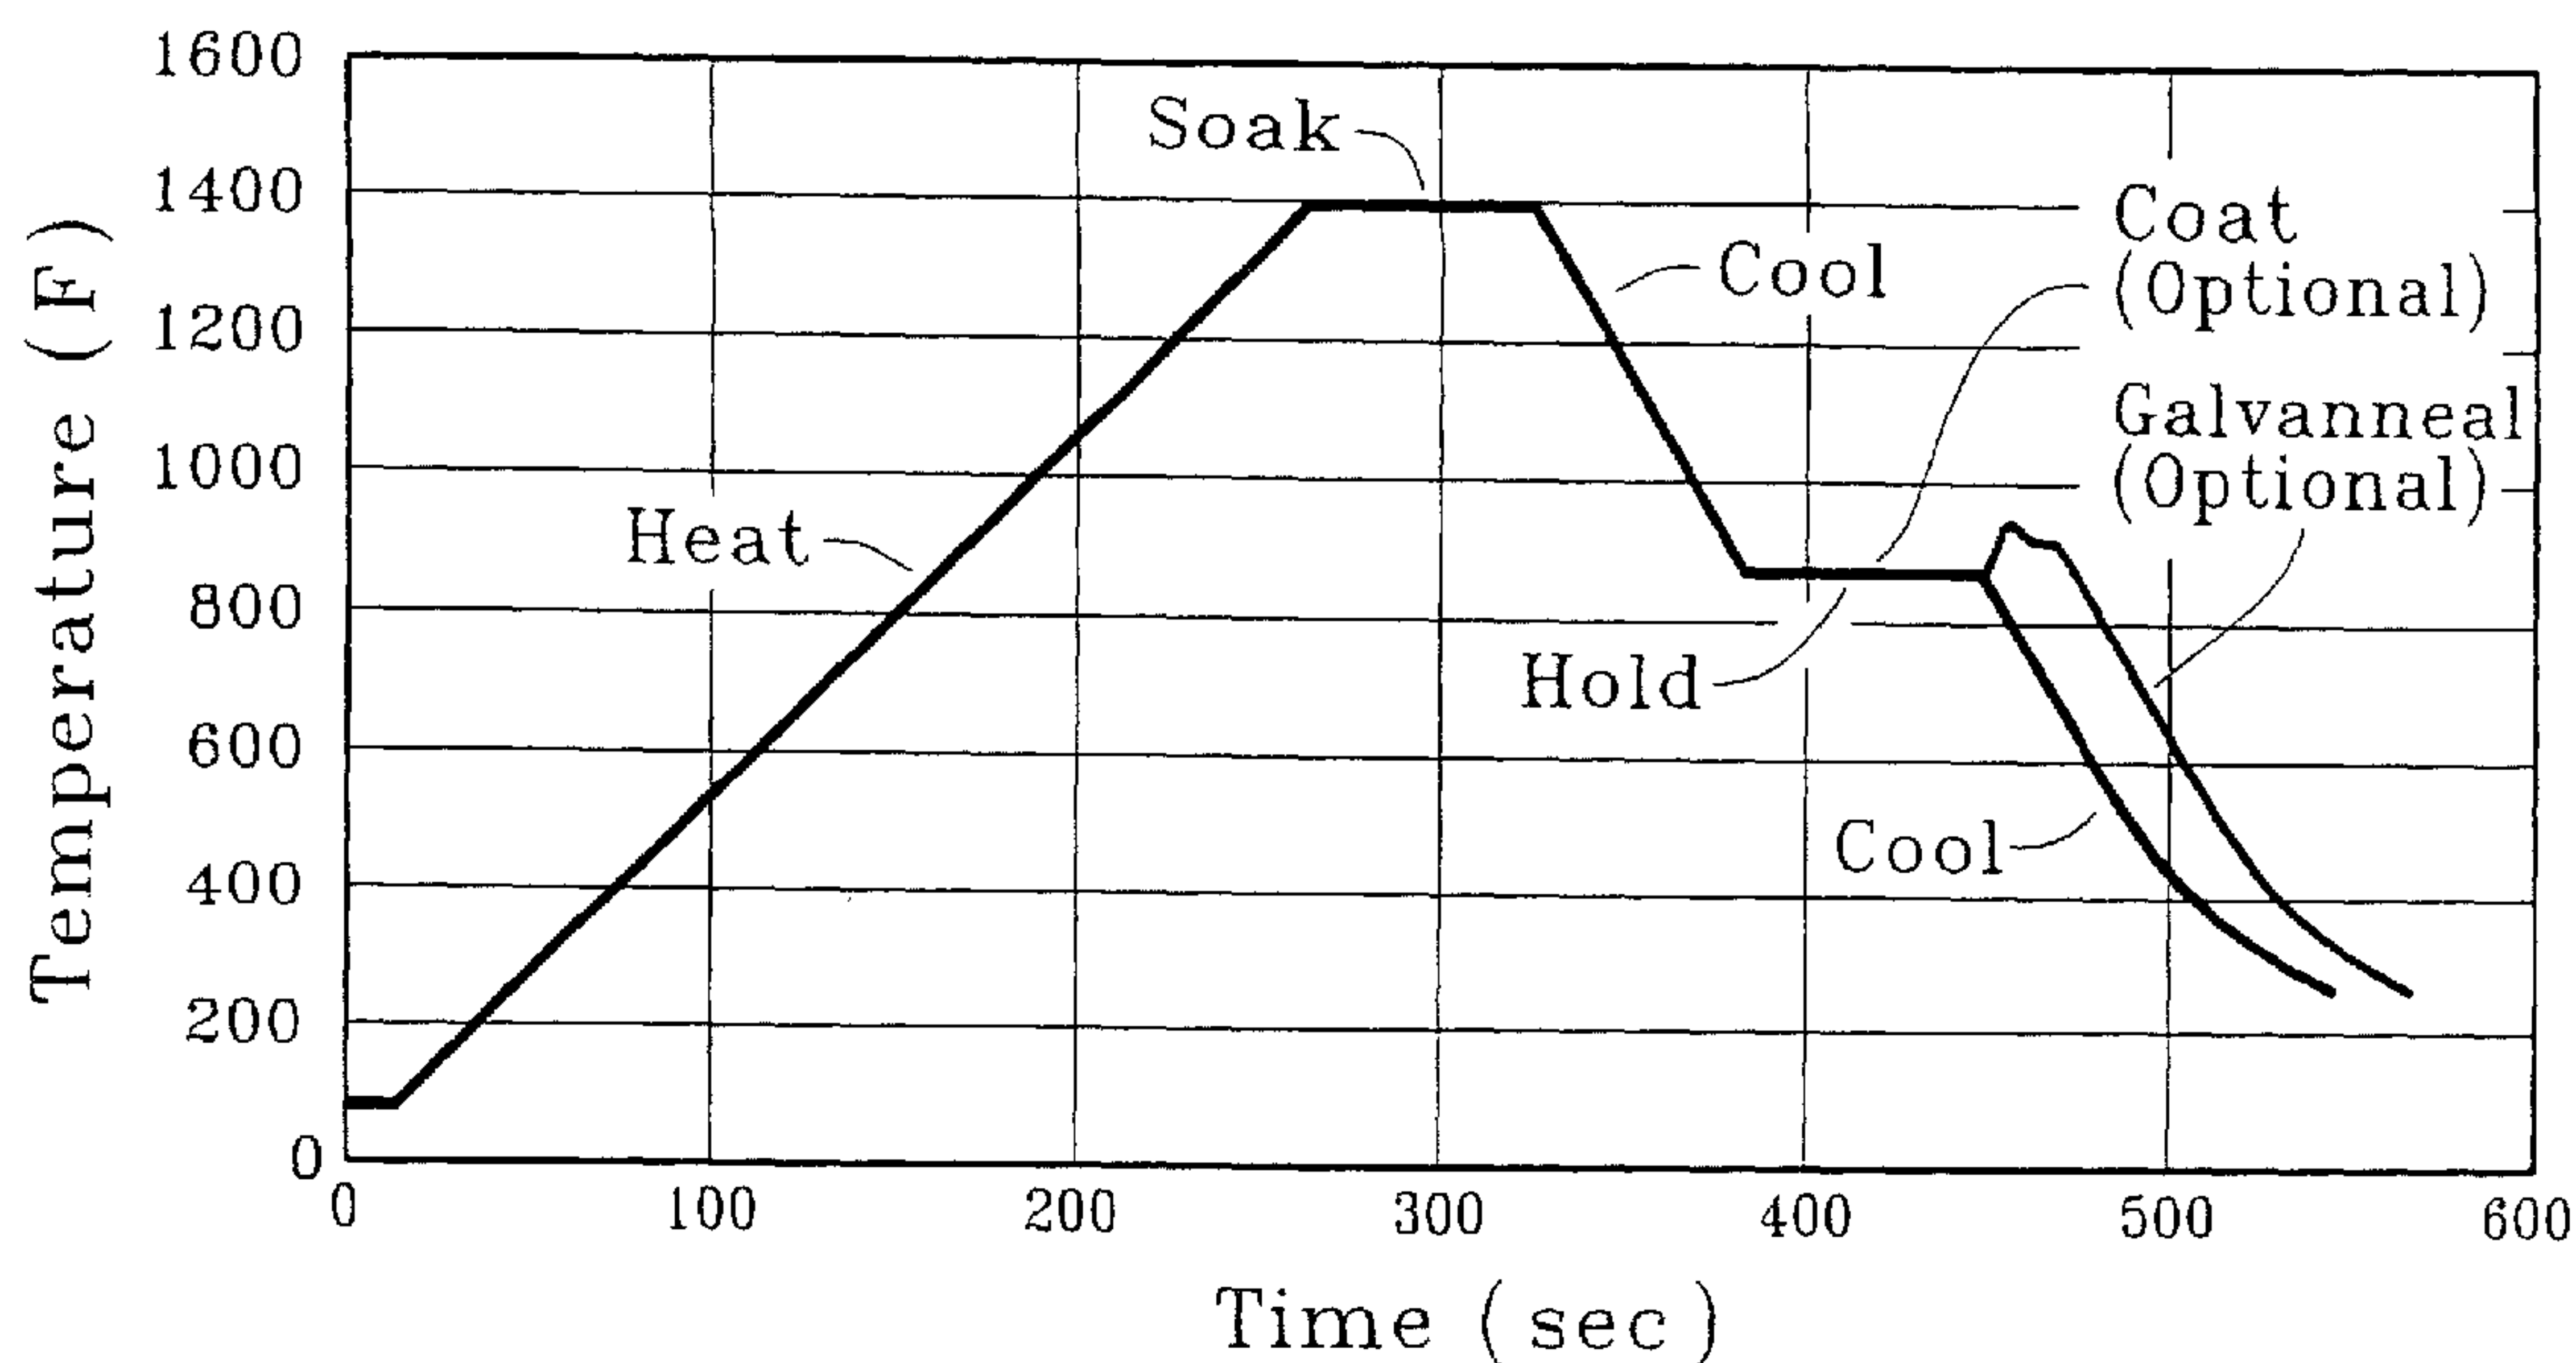

(57) Abstract: Dual phase steel sheet is made using a time/temperature cycle including a soak at about 1340-1425F and a hold at 850-920F, where the steel has the composition in weight percent, carbon: 0.02-0.20; aluminum: 0.010-0.150; titanium: 0.01 max; silicon: 0.5 max; phosphorous: 0.060 max; sulfur: 0.030 max; manganese: 1.5- 2.40; chromium: 0.03-1.50; molybdenum: 0.03-1.50; with the provisos that the amounts of manganese, chromium and molybdenum have the relationship: $(Mn + 6Cr + 10Mo) = \text{at least } 3.5\%$. The sheet is preferably in the form of a strip treated in a continuous galvanizing or galvannealing line, and the product is predominantly ferrite and martensite.

WO 2004/048634 A1

-1-

Method for the Production of Dual Phase Sheet Steel

5

Technical Field

10 Dual phase galvanized steel strip is made utilizing a thermal profile involving a two-tiered isothermal soaking and holding sequence. The strip is at a temperature close to that of the molten metal when it enters the coating bath.

Background of the Invention

15

Prior to the present invention, the galvanizing procedure whereby steel strip is both heat treated and metal coated has become well known and highly developed. Generally a cold rolled steel sheet is heated into the intercritical regime (between Ac_1 and Ac_3) to form some austenite and then cooled in a manner that some of the
20 austenite is transformed into martensite, resulting in a microstructure of ferrite and martensite. Alloying elements such as Mn, Si, Cr and Mo are in the steel to aid in martensite formation. Various particular procedures have been followed to accomplish this, one of which is described in **Omiya et al** US Patent **6,312,536**. In the Omiya et al patent, a cold rolled steel sheet is used as the base for hot dip
25 galvanizing, the steel sheet having a particular composition which is said to be beneficial for the formation, under the conditions of the process, of a microstructure composed mainly of ferrite and martensite. The Omiya et al patent describes a galvanized dual phase product.

30 According to the Omiya et al patent, a dual phase galvanized steel sheet is made by soaking the cold rolled steel sheet at a temperature of 780°C (1436°F) or

-2-

above, typically for 10 to 40 seconds, and then cooling it at a rate of at least 5°C per second, more commonly 20-40°C per second, before entering the galvanizing bath, which is at a temperature of 460°C (860°F). The steel, according to the Omiya et al patent, should have a composition as follows, in weight percent:

5

Carbon: 0.02-0.20 Aluminum: 0.010-0.150

Titanium: 0.01 max Silicon: 0.04 max

Phosphorous: 0.060 max Sulfur: 0.030 max

Manganese: 1.5-2.40 Chromium: 0.03-1.50

10

Molybdenum: 0.03-1.50 with the provisos that the amounts of manganese, chromium and molybdenum should have the relationship:

$3\text{Mn} + 6\text{Cr} + \text{Mo}$: 8.1% max, and

$\text{Mn} + 6\text{Cr} + 10 \text{Mo}$: at least 3.5%

15 The Omiya et al patent is very clear that an initial heat-treating (soaking) step is conducted at a temperature of at least 780°C (1436°F). See column 5, lines 64-67; col 6, lines 2-4: "In order to obtain the desired microstructure and achieve stable formability, it is necessary to heat the steel sheet at 780°C or above, which is higher than the A_{C1} point by about 50°C. ... Heating should be continued for

20 more than 10 seconds so as to obtain the desired microstructure of ferrite + austenite." The process description then goes on to say the steel sheet is cooled to the plating bath temperature (usually 440-470°C, or 824-878°F) at an average cooling rate greater than 1°C/second, and run through the plating bath. After plating, cooling at a rate of at least 5°C/second will achieve the desired

25 microstructure of predominantly ferrite and martensite. Optionally, the plated sheet may be heated prior to cooling, in an alloying procedure (often called galvannealing) after metal coating but prior to the final cooling.

Omiya et al clearly do not appreciate that it is possible to achieve a dual phase

30 product without the high temperatures of their soaking step, or that a particular

-3-

holding step following a lower temperature soak can facilitate the desired microstructure formation.

Summary of the Invention

5

I have found, contrary to the above quoted recitation in the Omiya et al patent, that not only is it not necessary to maintain the initial heat treatment temperature at 780°C (1436°F) or higher, but that the desired dual phase microstructure can be achieved by maintaining the temperature during an initial heat treatment (soaking) in the range from $A_{C1}+45^{\circ}\text{F}$, but at least 1340°F (727°C), to $A_{C1}+135^{\circ}\text{F}$, but no more than 1425°F (775°C). One does not need to maintain the temperature at 780°C or higher, contrary to the Omiya et al patent, provided the rest of my procedure is followed. For convenience hereafter, my initial heat treatment will be referred to as the "soak." However, my process does not rely only on a lower temperature for the soak as compared to Omiya et al; rather, the soak temperature of ($A_{C1}+45^{\circ}\text{F}$) to 1425°F, usually 1340-1420°F, must be coupled with a subsequent substantially isothermal heat treatment, termed the holding step, in the range of 850-920°F (454-493°C). In the holding step, the sheet is maintained at 850-920°F (454-493°C), sometimes herein expressed as $885^{\circ}\text{F}\pm 35^{\circ}\text{F}$, for a period of 20 to 100 seconds, before cooling to room (ambient) temperature. Cooling to ambient temperature should be conducted at a rate of at least 5°C per second. It is important to note, once again, that the Omiya et al patent says nothing about a holding step at any temperature or for any time in their thermal process. Furthermore, my work has shown that if a steel as defined in the Omiya et al patent is soaked within Omiya's defined, higher, soaking range (for example 1475°F) and further processed through a thermal cycle including a holding step as described herein (850-920°F), the resultant steel will not achieve the desired predominantly ferrite-martensite microstructure but will contain a significant amount of bainite and/or pearlite.

30

-4-

I express the lower temperature limit of the soak step as " $A_{C1}+45^{\circ}\text{F}$, but at least 1340°F (727°C)", because virtually all steels of Composition A will have an A_{C1} of at least 1295°F .

- 5 The steel sheet should have a composition similar to that of the Ochiya et al patent:

	Carbon:	0.02-0.20	Aluminum:	0.010-0.150
	Titanium:	0.01 max	Silicon:	0.04 max
	Phosphorous:	0.060 max	Sulfur:	0.030 max
10	Manganese:	1.5-2.40	Chromium:	0.03-1.50
	Molybdenum:	0.03-1.50	with the provisos that the amounts of manganese, chromium and molybdenum should have the relationship:	

$$\text{Mn} + 6\text{Cr} + 10\text{Mo}: \text{ at least } 3.5\%$$

- For my purposes, the silicon content may be as much as 0.5%, and, preferably,
 15 carbon content is 0.03-0.12% although the Omiya et al carbon range may also be used. This composition, as modified, may be referred to hereafter as Composition A.

- Thus my invention is a method of making a dual phase steel sheet comprising
 20 soaking a steel sheet at a temperature of in the range from $A_{C1}+45^{\circ}\text{F}$, but at least 1340°F (727°C), to $A_{C1}+135^{\circ}\text{F}$, but no more than 1425°F (775°C), for a period of 20 to 90 seconds, cooling the sheet at a rate no lower than $1^{\circ}\text{C}/\text{second}$ to a temperature of $454-493^{\circ}\text{C}$, and holding the sheet at temperatures in the range of $850-920^{\circ}\text{F}$ ($454-493^{\circ}\text{C}$) for a period of 20 to 100 seconds. The holding step may
 25 be prior to the hot dip or may begin with the hot dip, as the galvanizing pot will be at a temperature also in the range $454-493^{\circ}\text{C}$ ($850-920^{\circ}\text{F}$). Immediately after the holding step, whether or not the sheet is galvanized, the sheet can be cooled to ambient temperature at a rate of at least $5^{\circ}\text{C}/\text{second}$. Alternatively, after the sheet is coated, the sheet may be galvanized in the conventional manner – that is, the
 30 sheet is heated for about 5-20 seconds to a temperature usually no higher than

-5-

about 960°F and then cooled at a rate of at least 5°C/second. My galvanized and galvanized thermal cycles are shown for comparison in **Figure 6**.

5 The actual hot dip step is conducted more or less conventionally – that is, the steel is contacted with the molten galvanizing metal for about 5 seconds; while a shorter time may suffice in some cases, a considerably longer time may be used but may not be expected to result in an improved result. The steel strip is generally about 0.7 mm thick to about 2.5 mm thick, and the coating will typically be about 10µm. After the holding and coating step, the coated steel may be either
10 cooled to ambient temperature as described elsewhere herein or conventionally galvanized, as described above. When the above protocol is followed, a product having a microstructure comprising mainly ferrite and martensite will be obtained.

15 Commercially, it is common to perform hot dip galvanizing substantially continuously by using coils of steel strip, typically from 1000 to 6000 feet long. My invention permits more convenient control over the process not only because the soak step takes place at a lower temperature, but also because the strip may be more readily kept at the same temperature as the hot dip vessel entering and
20 leaving it, with little concern about significant heat transfer occurring between steel strip and zinc pot that could heat up the molten zinc and limit production.

As applied specifically to a continuous steel strip galvanizing line, which includes a strip feeding facility and a galvanizing bath, my invention comprises feeding a
25 cold rolled coil of steel strip of Composition A to a heating zone in the galvanizing line, passing the strip through a heating zone continuously to heat the strip to within the range of $A_{C1}+45^{\circ}\text{F}$, but at least 1340°F (727°C), to $A_{C1}+135^{\circ}\text{F}$, but no more than 1425°F (775°C), passing the strip through a soaking zone to maintain the strip within the range of $A_{C1}+45^{\circ}\text{F}$, but at least 1340°F (727°C), to
30 $A_{C1}+135^{\circ}\text{F}$, but no more than 1425°F (775°C), for a period of 20 to 90 seconds, passing the strip through a cooling zone to cool the strip at a rate greater than

-6-

1°C/second, discontinuing cooling the strip when the temperature of the strip has been reduced to a temperature in the range 885°F±35°F, but also ± 30 degrees F of the temperature of the galvanizing bath, (preferably within 20 degrees F ± the temperature of the bath, and more preferably within 10 degrees F ± the temperature of the bath), holding the strip within 30 degrees F of the temperature of the galvanizing bath (again preferably within 20 degrees F ± the temperature of the bath, and more preferably within 10 degrees F ± the temperature of the bath) for a period of 20 to 100 seconds, passing the strip through the galvanizing bath, optionally galvannealing the coated strip, and cooling the strip to ambient temperature. The galvanizing bath is typically at about 870°F (850-920°F), and may be located at the beginning of the holding zone, or near the end of the hold zone, or anywhere else in the holding zone, or immediately after it. Residence time in the bath is normally 3-6 seconds, but may vary somewhat, particularly on the high side, perhaps up to 10 seconds. As indicated above, after the steel is dipped into and removed from the zinc bath, the sheet can be heated in the conventional way prior to cooling to room temperature to form a galvanneal coating, if desired.

Brief Description of the Drawings

Figure 1 shows the general thermal cycle of the invention.

Figure 2 shows ultimate tensile strength as a function of soak temperature and hold time in connection with the discussion of Example 1.

Figure 3 shows the yield ratio as a function of soak temperature.

In Figure 4, the effect is shown of soak temperature on yield ratio under the conditions described in Example 2.

-7-

Another graph of yield ratio is shown in **Figure 5**, pertaining to the conditions described in Example 3.

A paradigm of the thermal cycle of my invention is shown in **Figure 6**.

5

Detailed Description of the Invention

Example 1

- 10 Samples of steel sheet were processed, with various “soak” temperatures according to the general thermal cycle depicted in **Figure 1** – one set of samples followed the illustrated curve with a 35 second “hold” at 880°F and the other set of samples were held at 880°F for 70 seconds. The samples were cold rolled steel of composition A as described above – in particular, the carbon was 0.67,
- 15 Mn was 1.81, Cr was 0.18 and Mo was 0.19, all in weight percent. The other elemental ingredients were typical of low carbon, Al killed steel. Soak temperatures were varied in increments of 20°F within the range of 1330 to 1510°F. After cooling, the mechanical properties and microstructures of the modified samples were determined. Ultimate tensile strength (“UTS”) of the
- 20 resulting products as a function of soak temperature and hold time is shown in **Figure 2**. For this particular material, a minimum UTS of 600 MPa was the target and was achieved over a range of soak temperatures from about 1350°F to 1450°F for both hold times.
- 25 A goal of Example 1 was to achieve a predominantly ferrite-martensite microstructure. The yield ratio, i.e. the ratio of yield strength to ultimate tensile strength, is an indication whether or not a dual phase ferrite-martensite microstructure is present. When processed as in Example 1, a ferrite-martensite microstructure is indicated when the yield ratio is 0.5 or less. If the yield ratio is
- 30 greater than about 0.5, a significant volume fraction of other deleterious constituents such as bainite, pearlite, and/or Fe₃C may be expected in the microstructure. **Figure 3** shows the yield ratio as a function of soak temperature

-8-

for both the 35 and 70 second holding zones for the samples. Note that a very low yield ratio of about 0.45 is achieved over a range of temperatures for both curves from about 1350-1430°F, indicating optimum dual phase properties over this soak temperature range. Metallographic analyses of the samples performed on steels soaked within this 1350-1430°F soak range confirmed a ferrite-martensite microstructure. Quantitative metallography using point counting techniques revealed martensite contents of 14.5 and 13.5% respectively, for the steel soaked at 1390 and held at 880°F for 70 and 35 seconds, respectively, with no other constituents observed in the microstructure. (The images were constructed using the Lepera etching technique for which ferrite appears light gray, martensite white, and such as pearlite and bainite appearing black). For soak temperatures below about 1350°F, as expected, iron carbide (Fe_3C) remains in the microstructure due to insufficient carbide dissolution which results in limited martensite formation during cooling.

Unexpected, however, is the appearance of bainite in the microstructure when soak temperatures get above about 1430°F. For example, metallographic analyses reveal a bainite content of 8.5% for the steel soaked at 1510°F and held at 880°F for 70 seconds. These results contrast strongly with Omiya. According to Omiya, it is in this soak temperature range, i.e. necessarily above 1436°F, that a ferrite-martensite microstructure should be expected. My work indicates that a significant amount of bainite is present in the microstructure when the annealing soak temperature is in the Omiya recommended range and a hold zone in the vicinity of 880°F is present in the thermal process. For the particular steel used in this example, the necessary annealing range for ferrite-martensite microstructures is from about 1350 to 1430°F. Table 1 summarizes the relationships between the thermal process, yield ratio and microstructural constituents for this example at the different soak temperature regimes.

Table 1

Soak Temp °F	Hold Temp °F	Hold Time (sec)	Yield Ratio	Percent Martensite	Percent Bainite
1330	880	35	0.50	<3	<1
1330	880	70	0.52	<3	<1
1390	880	35	0.45	14.5	<1
1390	880	70	0.44	13.5	<1
1510	880	35	0.52	4.5	11
1510	880	70	0.56	4.5	8.5

Example 2

5

A different cold rolled sheet steel of Composition A was subjected to the same set of thermal cycles as described in Example 1 and shown in **Figure 1**. This steel also lay within the stated composition range, in this case specifically containing the following, in weight percent: 0.12%C, 1.96%Mn, 0.24%Cr, and 0.18%Mo, and the balance of the composition typical for a low carbon Al-killed steel. Once again, the mechanical properties of the material were measured. The effect of soak temperature on yield ratio for this steel for the 70 second holding sequence at 880°F is shown in **Figure 4**. This curve exhibits a shape similar to the curves in **Figure 3**, with metallographic analyses revealing identical metallogical phenomena occurring at the different soak temperature regimes as in the previous example. Also as demonstrated in the previous example, the annealing soak temperature range necessary for a predominantly ferrite-martensite microstructure to be obtained is from about 1350 to 1425°F when a hold step is conducted at about 880°F.

15
20

Example 3

As in the previous two examples, a third cold-rolled steel of Composition A was processed according to the set of thermal cycles shown in **Figure 1**. This steel contained, in weight percent, 0.076C, 1.89 Mn, 0.10Cr, 0.094 Mo, and 0.34 Si, the balance of which is typical for a low carbon steel. After annealing as in the other examples, the mechanical properties and resultant microstructures were again

25

-10-

determined. **Figure 5** shows the yield ratio of this material as a function of soak temperature for the holding time of 70 seconds. Once again, a curve having a shape similar to the previous examples is observed, with a precise annealing range over which the dual phase ferrite-martensite microstructure is achieved.

- 5 However, note that the curve appears to be shifted to the right about 30°F as compared to the previous examples. This is due to the fact that the A_{c1} temperature is higher for this steel as compared to the steels in the previous two examples due to the higher silicon. Table 2 shows the necessary soak temperature range for ferrite-martensite formation for each of the steels along with their
- 10 respective A_{c1} temperature according to Andrews. The preferred annealing range appears to be a function of the A_{c1} temperature as shown. Generically, based on this information, the soak temperature range necessary for dual phase production depends on the specific steel composition – that is, it should lie within the range from $A_{c1}+45^{\circ}\text{F}$, but at least 1340°F (727°C), to $A_{c1}+135^{\circ}\text{F}$, but no more than
- 15 1425°F (775°C) when a holding step in the vicinity of 880° ($885^{\circ}\text{F}\pm 35^{\circ}\text{F}$) is present in the thermal cycle.

Table 2

C (wt%)	Mn (wt%)	Cr (wt%)	Mo (wt%)	Si (wt%)	A_{c1} (°F)	AR for FM(°F)*	Necessary AR for DP Steel re A_{c1} **
.067	1.81	.18	.19	.006	1304	1350-1430	$A_{c1}+46$ to $A_{c1}+126$
.12	1.96	.24	.18	.006	1303	1350-1420	$A_{c1}+47$ to $A_{c1}+117$
.076	1.89	.1	.094	.34	1318	1380-1450	$A_{c1}+62$ to $A_{c1}+132$

20 *Annealing Range for Ferrite-Martensite (degrees Fahrenheit)

** Necessary Annealing Range for Dual Phase Steel with respect to A_{c1} .

Example 4

- 25 Table 3 shows the resultant mechanical properties of two additional steels having carbon contents lower than shown previously. They were processed as described in **Figure 1** utilizing the individual soak temperatures of 1365, 1400, and 1475°F, respectively and a hold time of 70 seconds at 880°F. Also shown within the table are the expected necessary soak temperature ranges for dual phase steel
- 30 production for each steel as calculated from A_{c1} as described in Example 3. Note

-11-

that for the 1365 and 1400°F soak temperatures, which reside within the desired soak temperature range for both respective steels, low yield ratios characteristic of ferrite-martensite microstructures are observed. Furthermore, for the steels soaked at 1475°F, which is outside the range present invention, the yield ratio is

5 significantly higher due to the presence of bainite in the microstructure.

Table 3

C (wt%)	Mn (wt%)	Mo (wt%)	Cr (wt%)	A _{c1}	A _{c1} +45 to A _{c1} +135 (°F)	Soak Temp	Yield Strgth (MPa)	UTS (MPa)	Yield Ratio
.032	1.81	.2	.2	1305	1350 to 1435	1365	223	473	0.47
.032	1.81	.2	.2	1305	1350 to 1435	1400	226	474	0.48
.032	1.81	.2	.2	1305	1350 to 1435	1475	261	462	0.56
.044	1.86	.2	.2	1304	1349 to 1434	1365	244	559	0.44
.044	1.86	.2	.2	1304	1349 to 1434	1400	239	548	0.44
.044	1.86	.2	.2	1304	1349 to 1434	1475	265	519	0.51

Example 5

10

The previous examples were based on laboratory work, but mill trials have also taken place that have verified the aforementioned thermal processing scheme for the production of both hot-dipped galvanized and galvanized dual phase steel product. Table 4 shows the results of mill trials for galvanized steel. Note that

15 the steels shown in the table have virtually the same composition and thus similar A_{c1} temperatures. From the A_{c1} temperature, the expected soak temperature range for dual phase formation is calculated to be about 1350 to 1440°F. Furthermore, in terms of processing, hold temperatures and times are fairly consistent among the steels and the annealing (soak) temperature is the main processing variable

20 difference between the materials. The mechanical properties are also shown in the table along with corresponding yield ratios. Note that steels 1 through 4 were soaked within the soaking range of the invention and exhibited the expected yield ratio of less than 0.5. Metallographic examination revealed the presence of ferrite martensite microstructures for steels 1 through 4 with martensite contents of about

25 15%. Steel 5 was processed outside of the preferred soaking range and exhibited a relatively high yield ratio of about 0.61. Metallographic analysis showed a

-12-

bainite content of 11% in this material. Similar results have been shown for galvanize as well as galvanneal processing.

Table 4

Steel	1	2	3	4	5
Carbon	.067	.067	.067	.067	0.77
Mn	1.81	1.81	1.81	1.81	1.71
Cr	.18	.18	.18	.18	.19
Mo	.19	.19	.19	.19	.17
A _{c1}	1304	1304	1304	1304	1306
A _{c1} +45 to A _{c1} +135 (°F)	1349- 1439	1349- 1439	1349- 1439	1349- 1439	1351- 1441
Soak Temp	1370	1383	1401	1421	1475
Hold Temp	878	881	885	888	890
Hold Time	70	70	70	70	64
Yield Strength	292	299	294	296	327
UTS	606	610	614	618	538
Yield Ratio	.48	.49	.48	.48	.61

-13-

Claims

1. Method of making an incipient dual phase steel sheet, wherein said steel
5 sheet has the composition, in weight percent, carbon: 0.02-0.20;
aluminum: 0.010-0.150; titanium: 0.01 max; silicon: 0.5 max;
phosphorous: 0.060 max; sulfur: 0.030 max; manganese: 1.5-2.40;
chromium: 0.03-1.50; molybdenum: 0.03-1.50; with the provisos that the
10 amounts of manganese, chromium and molybdenum have the relationship:
(Mn + 6Cr + 10 Mo) = at least 3.5%, comprising soaking said steel sheet
for 20 to 90 seconds at a temperature within the range of $A_{C1}+45^{\circ}\text{F}$, but at
least 1340°F (727°C), to $A_{C1}+135^{\circ}\text{F}$, but no more than 1425°F (775°C),
cooling said steel sheet at a rate of at least 1°C per second to a temperature
15 in the range $850-920^{\circ}\text{F}$, and holding said steel sheet in the range $850-920^{\circ}\text{F}$ for 20 to 100 seconds.
2. Method of claim 1 wherein said steel sheet is a steel strip and said method
is conducted continuously on a steel strip of at least 1000 feet.
3. Method of claim 1 including coating said steel sheet in a vessel of molten
galvanizing metal at a temperature in the range $850-920^{\circ}\text{F}$ before, during, or
20 immediately after said holding.
4. Method of claim 3 wherein the temperature of said steel sheet during said
coating is maintained within $\pm 20^{\circ}\text{F}$ of the molten metal temperature to
minimize heat transfer between said steel strip and said molten metal.
5. Method of claim 1 followed by cooling said steel sheet to ambient temperature
25 at a rate of at least 5°C per second, and wherein said dual phase is manifested
thereafter in a microstructure predominantly of ferrite and martensite.
6. Method of claim 1 including galvannealing said steel sheet and cooling the
steel sheet coated thereby at a rate of at least 5°C per second, and wherein said
dual phase is manifested thereafter in a microstructure predominantly of ferrite
30 and martensite.
7. Method of claim 1 wherein the carbon content of said steel is 0.03-0.12%.


-14-

8. Method of substantially continuously galvanizing steel strip in a galvanizing line including a galvanizing bath, comprising feeding a coil of steel strip having the composition carbon: 0.02-0.20; aluminum: 0.010-0.150; titanium: 0.01 max; silicon: 0.5 max; phosphorous: 0.060 max; sulfur: 0.030 max; manganese: 1.5-2.40; chromium: 0.03-1.50; molybdenum: 0.03-1.50; with the provisos that the amounts of manganese, chromium and molybdenum have the relationship $(\text{Mn} + 6\text{Cr} + 10 \text{ Mo})$ at least 3.5%, to a heating zone in said galvanizing line, passing said strip through a heating zone continuously to heat said strip to 1340-1425°F, passing said strip through a soaking zone to maintain said strip within the range of 1340-1420°F for a period of 20 to 90 seconds, passing said strip through a cooling zone to cool said strip at a rate greater than 1°C per second, discontinuing cooling said strip when the temperature of said strip has been reduced to a temperature ± 30 degrees F of the temperature of said galvanizing bath, holding said strip at a temperature between 850-920°F and within 30 degrees F of the temperature of said galvanizing bath for a period of 20 to 100 seconds, passing said strip through said galvanizing bath, and cooling said strip to ambient temperature.
9. Method of claim 8 wherein the residence time of said strip in said galvanizing bath is 3-6 seconds.
10. Method of claim 8 wherein said cooling in said cooling zone is conducted at 5 to 40 degrees F per second.
11. Method of claim 8 wherein said strip enters said galvanizing bath at a temperature within 10 degrees F of the temperature of said galvanizing bath.
12. Method of claim 8 wherein said strip is passed into said galvanizing bath immediately on discontinuing said cooling.
13. Method of claim 8 wherein said strip is passed into said galvanizing bath near the end of said period of 20 to 100 seconds.
14. Method of claim 8 whereby the galvanized steel strip so made has a predominantly ferrite-martensite microstructure containing less than 5% other morphological constituents.

-15-


15. Method of claim 8 wherein the carbon content of said steel strip is 0.03-0.12 weight percent.
16. Method of claim 8 wherein said steel strip is galvanized prior to cooling to ambient temperature.
- 5 17. Method of making a galvanized steel strip having a predominantly martensite and ferrite microstructure, wherein said steel has the ingredients, in weight percent, carbon: 0.02-0.20; aluminum: 0.010-0.150; titanium: 0.01 max; silicon: 0.5 max; phosphorous: 0.060 max; sulfur: 0.030 max; manganese: 1.5-
10 steel strip at $A_{C1}+45^{\circ}\text{F}$, but at least 1340°F , to $A_{C1}+135^{\circ}\text{F}$, but no more than 1425°F , for at least 20 seconds, cooling said strip at a rate of at least 1°C per second, passing said strip through a galvanizing vessel for a residence time therein of 2-9 seconds to coat said strip at any time while holding said strip at $885^{\circ}\text{F} \pm 35^{\circ}\text{F}$ for 20 to 100 seconds, and cooling the strip so coated to ambient
15 temperature.
18. Method of claim 17 including galvanizing said strip prior to cooling to ambient temperature.
19. Method of claim 17 wherein said strip is within 20°F of the temperature of the galvanizing vessel during said residence time therein.
- 20 20. Method of claim 17 wherein said strip is within 10°F of the temperature of the galvanizing vessel during said residence time therein.

1/6

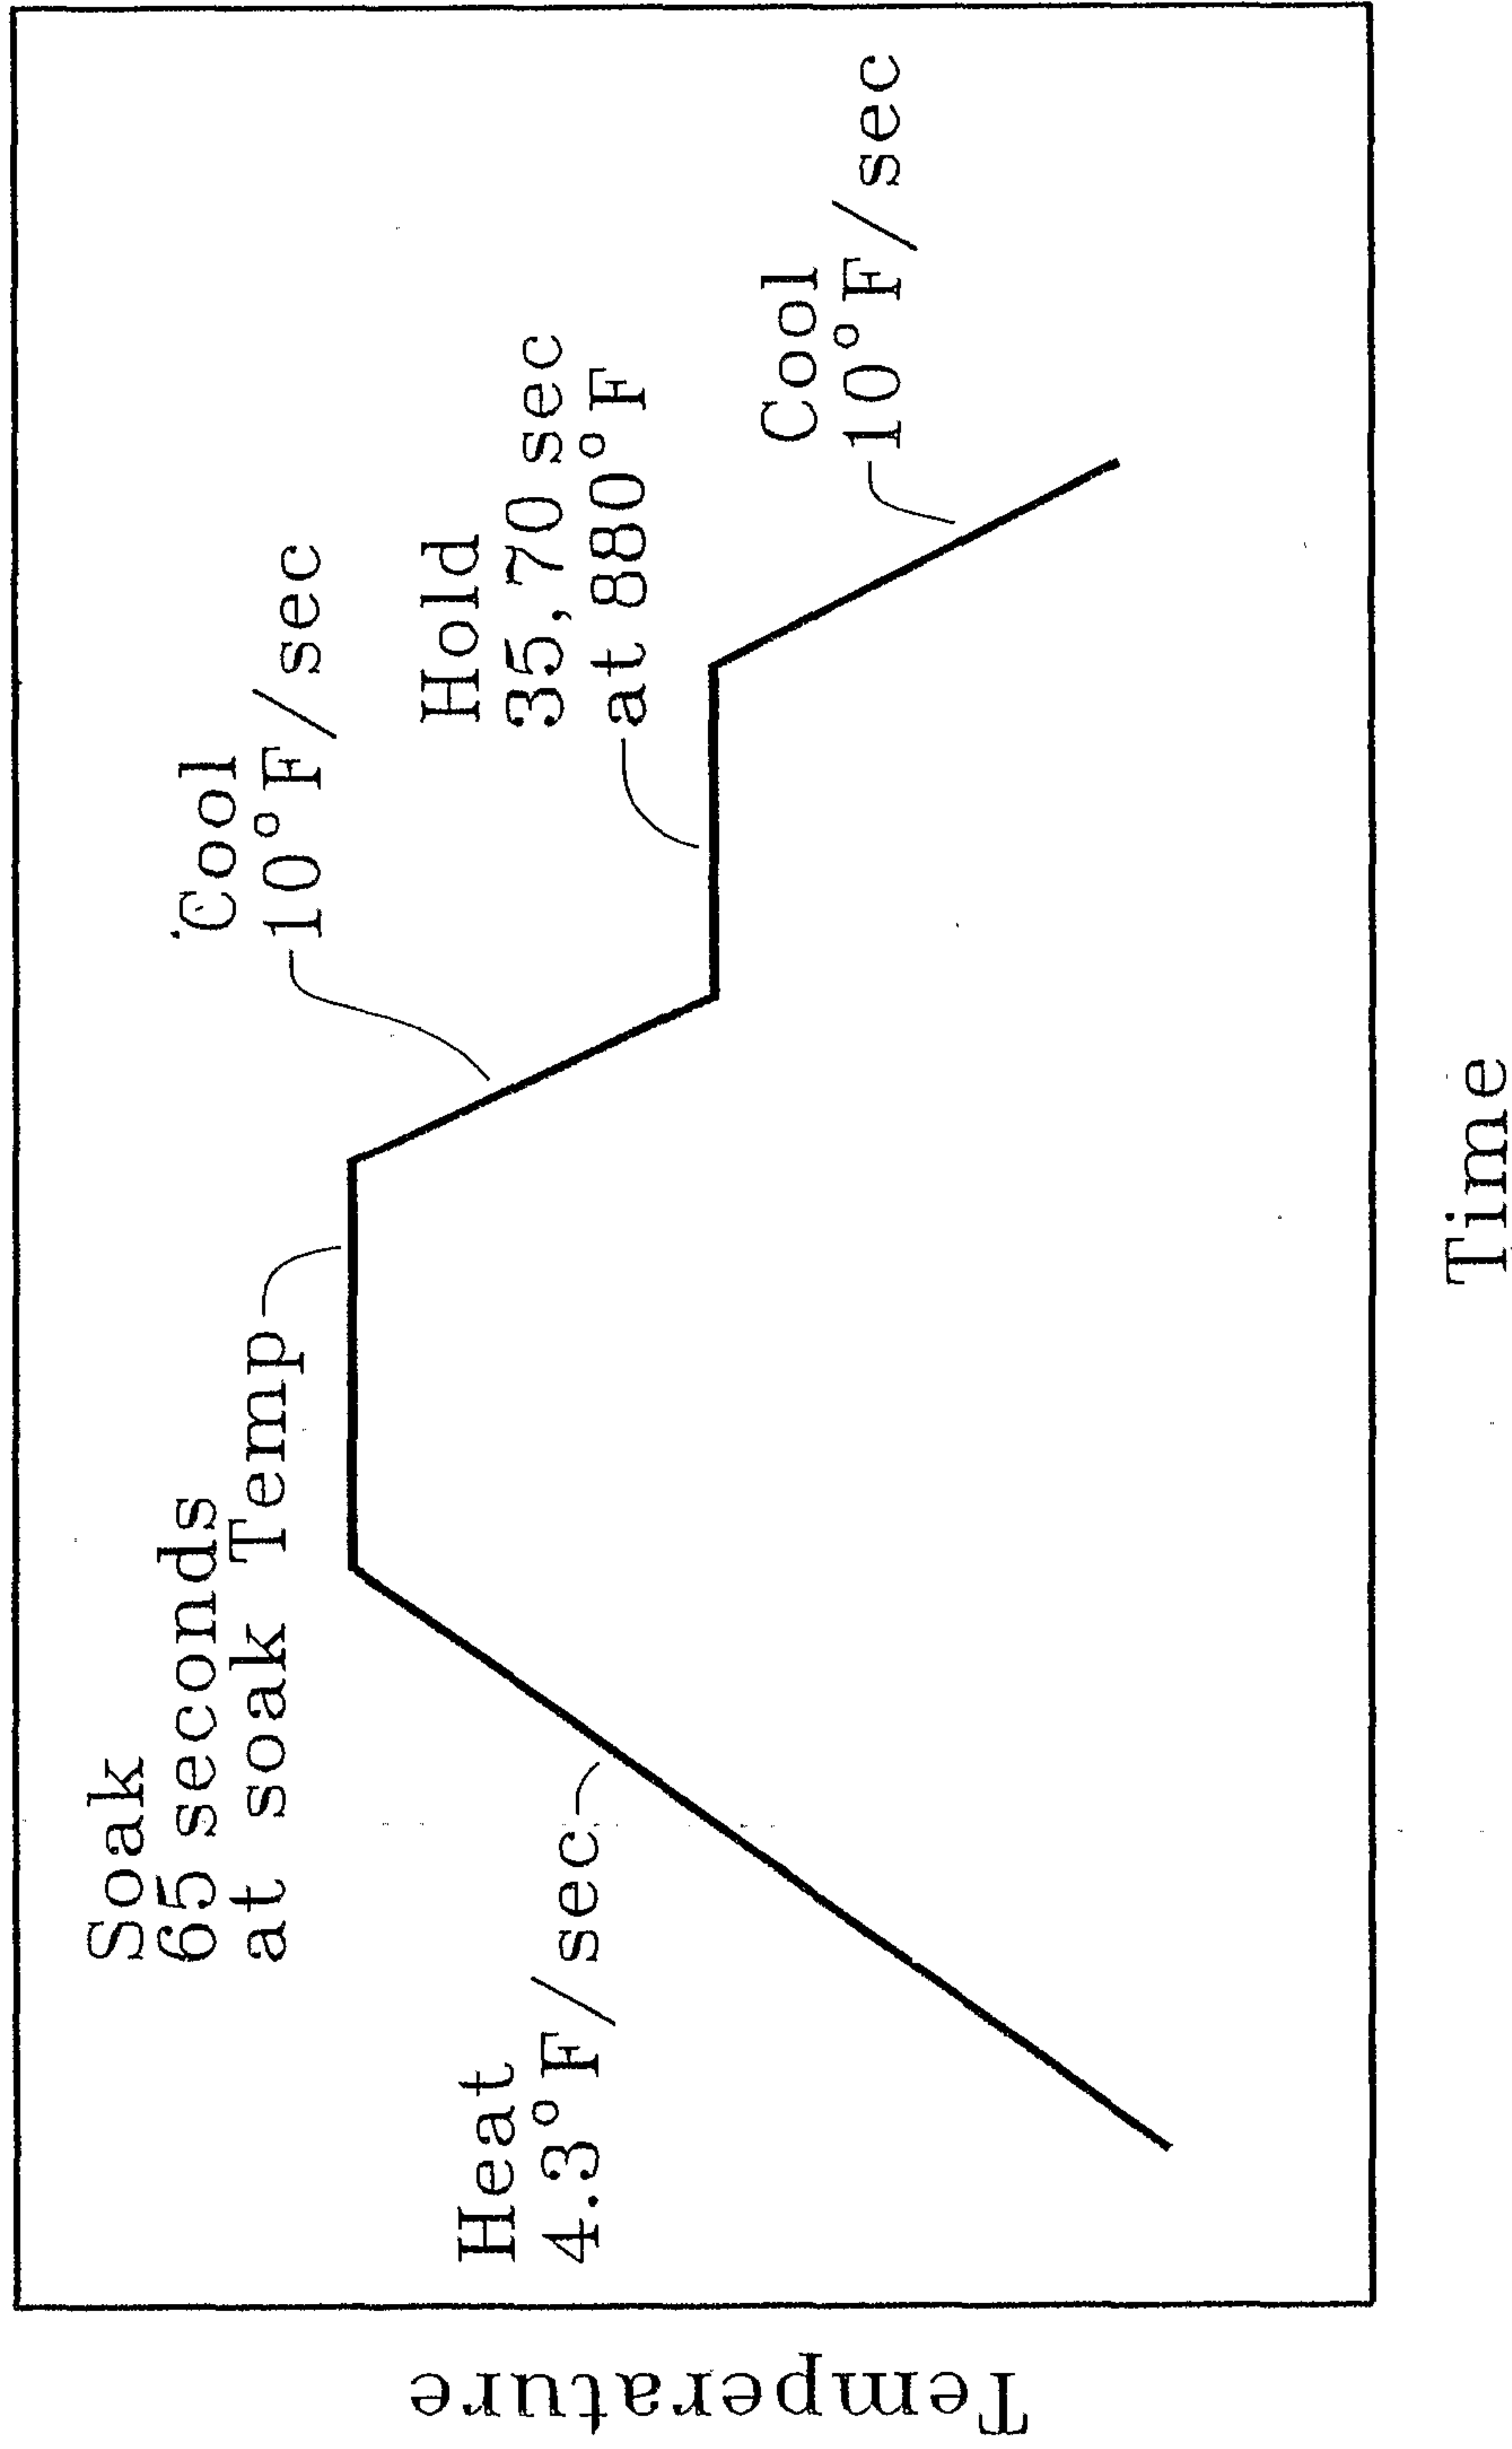


Laboratory Gleeble Investigations
C=0.067, Mn=1.81, Cr=1.81, Mo=0.19

Fig. 1

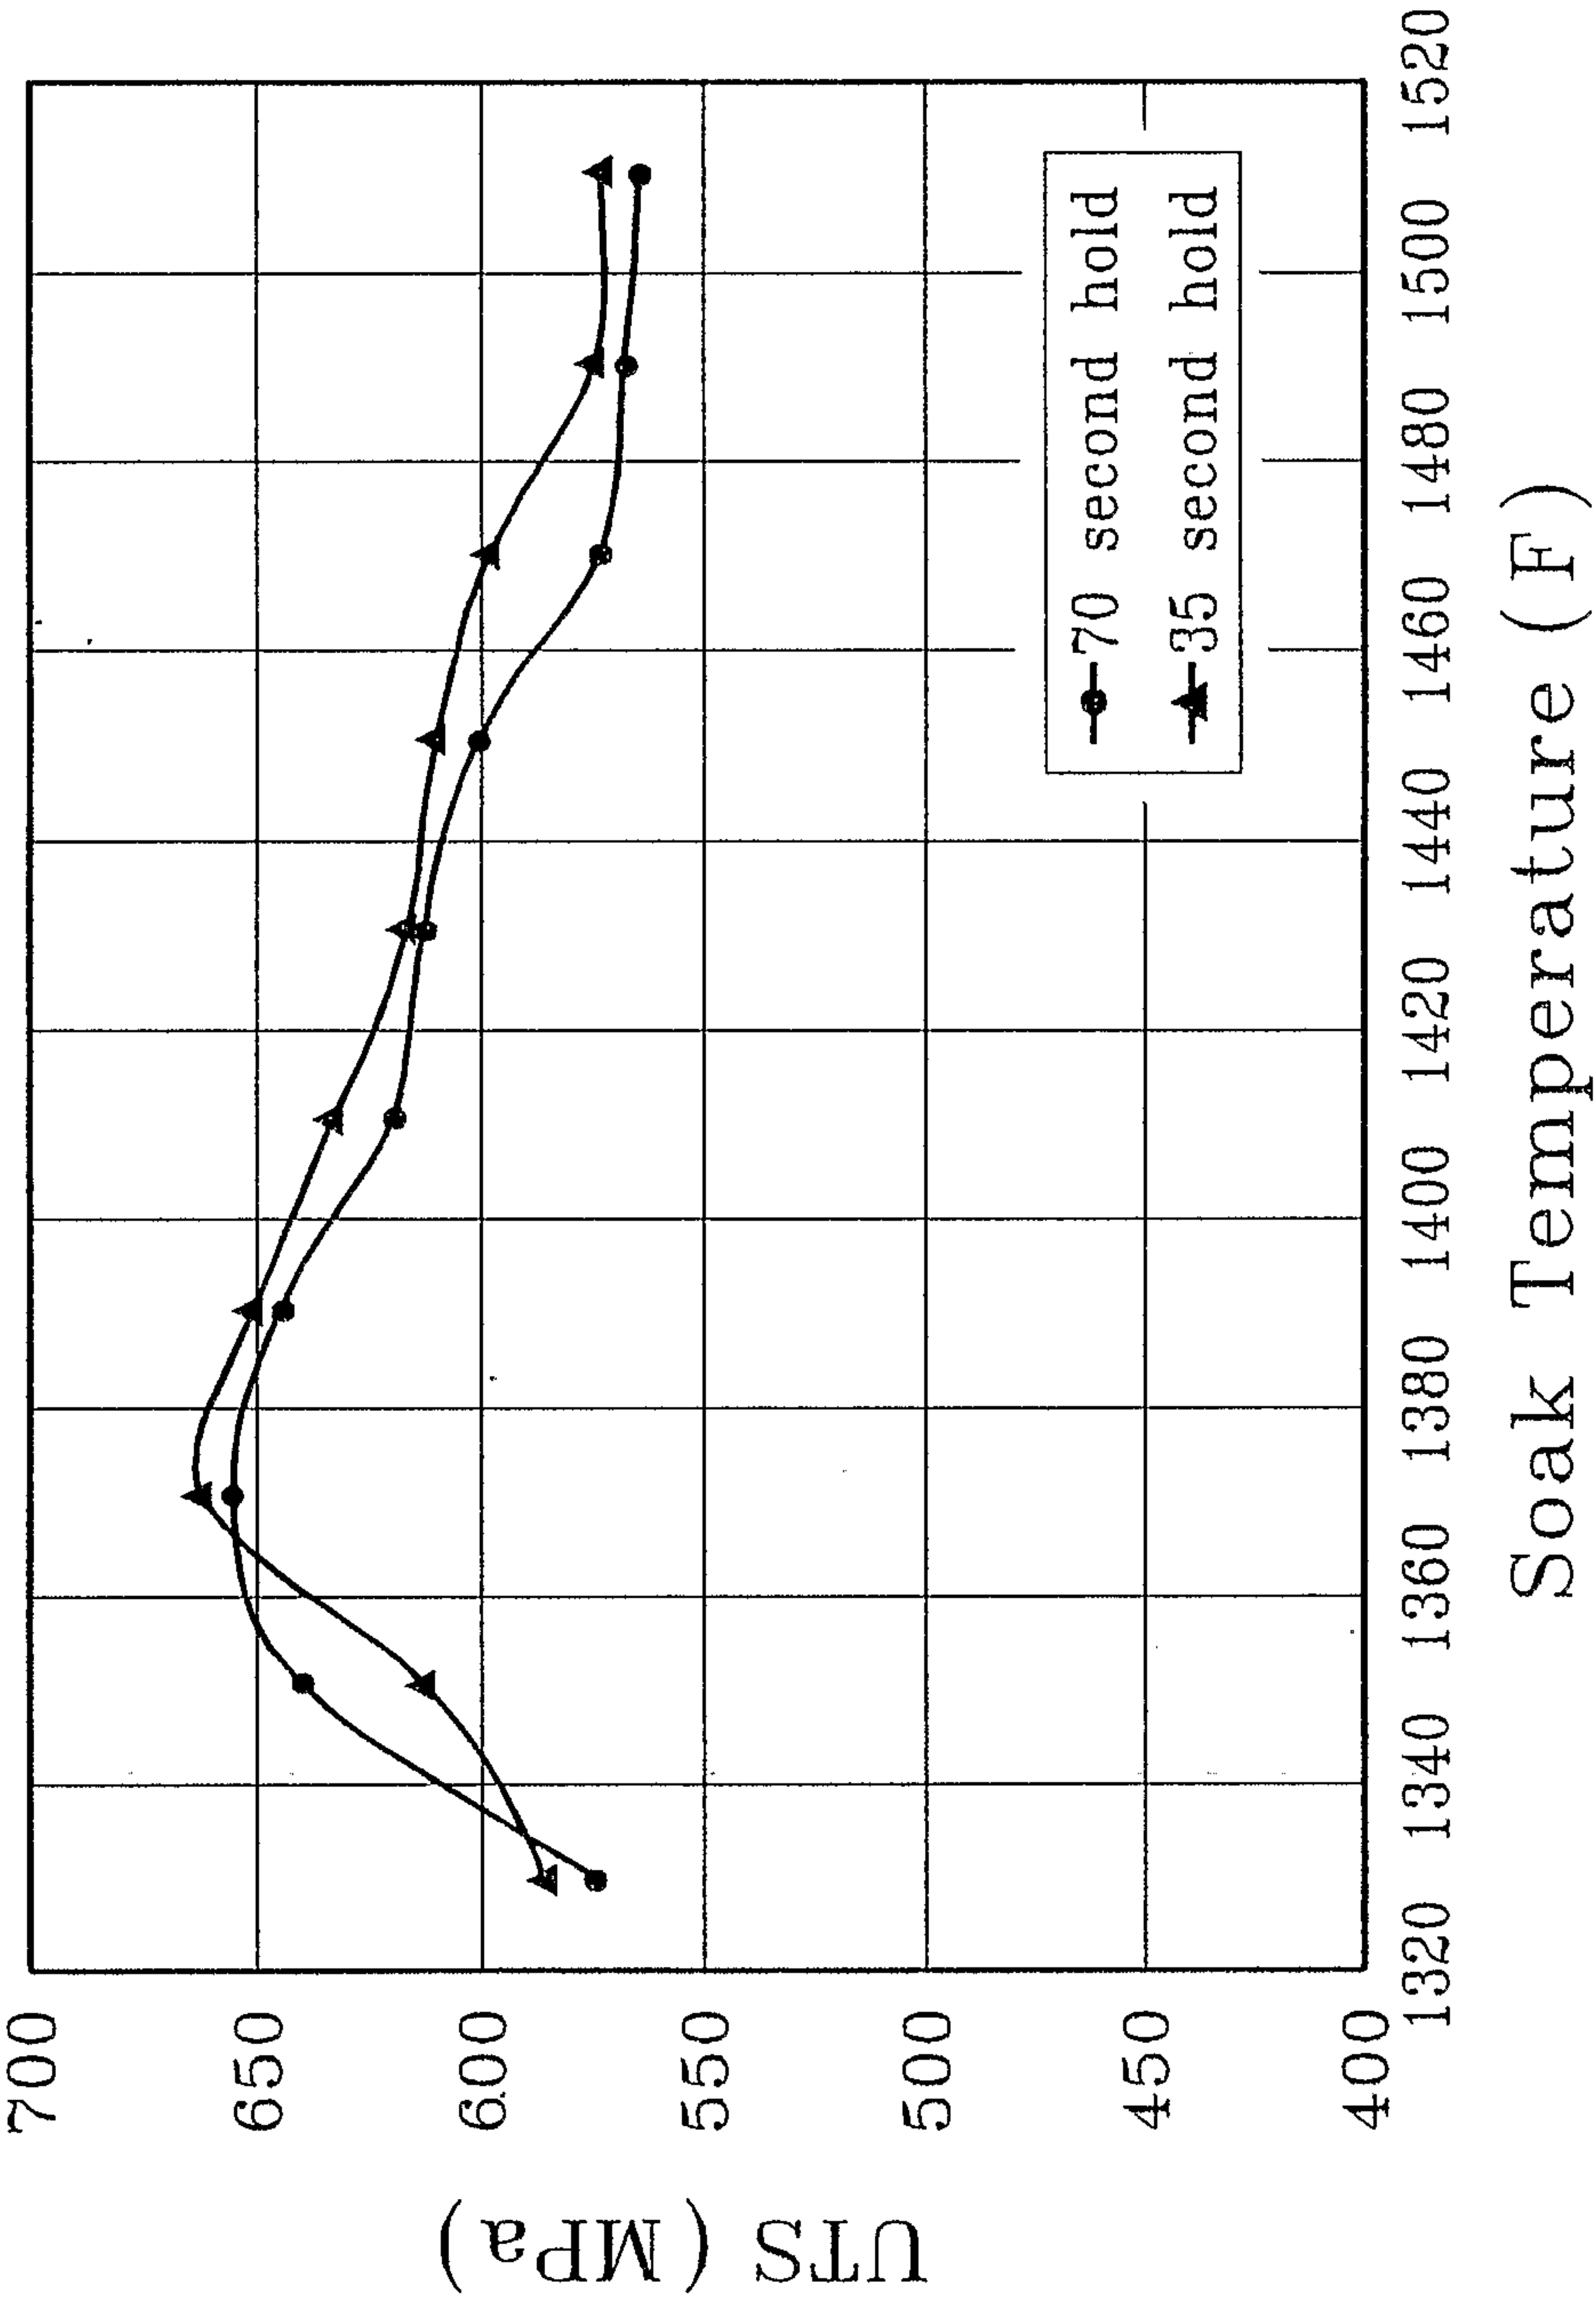

UTS as a Function of Soak Temperature

Fig. 2

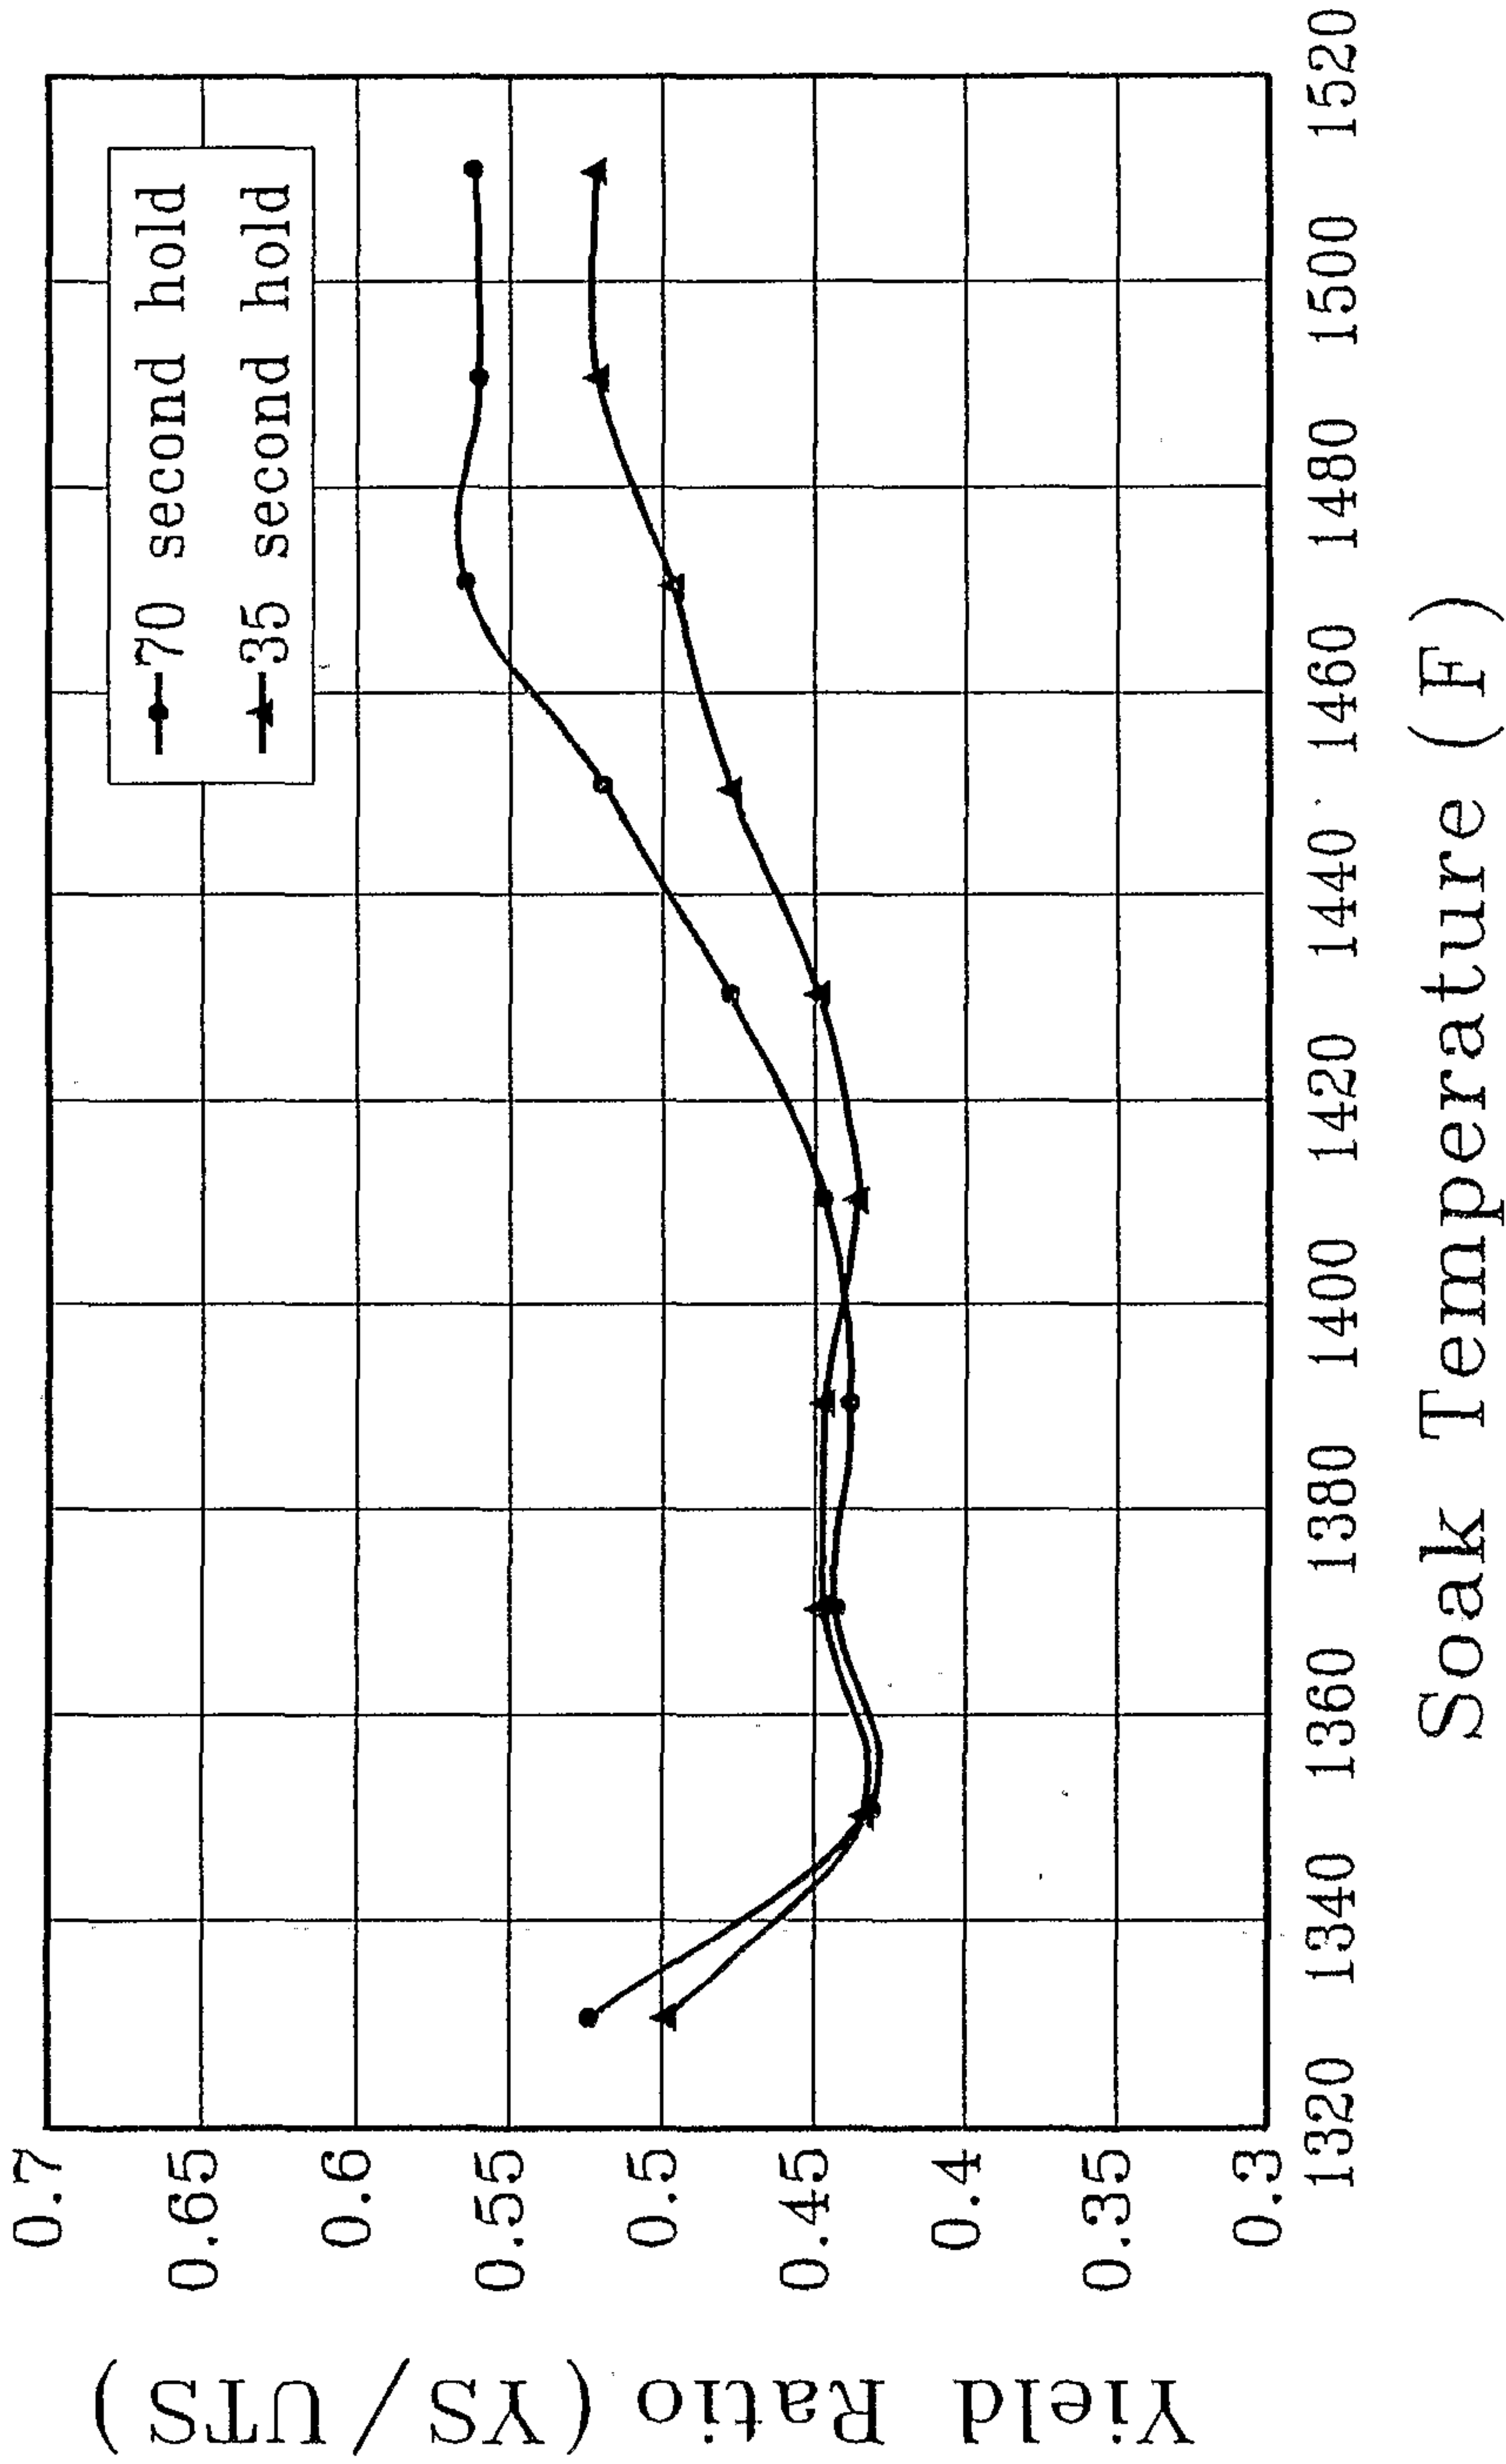

Yield Ratio as a Function of Soak Temperature

Fig.3

4/6

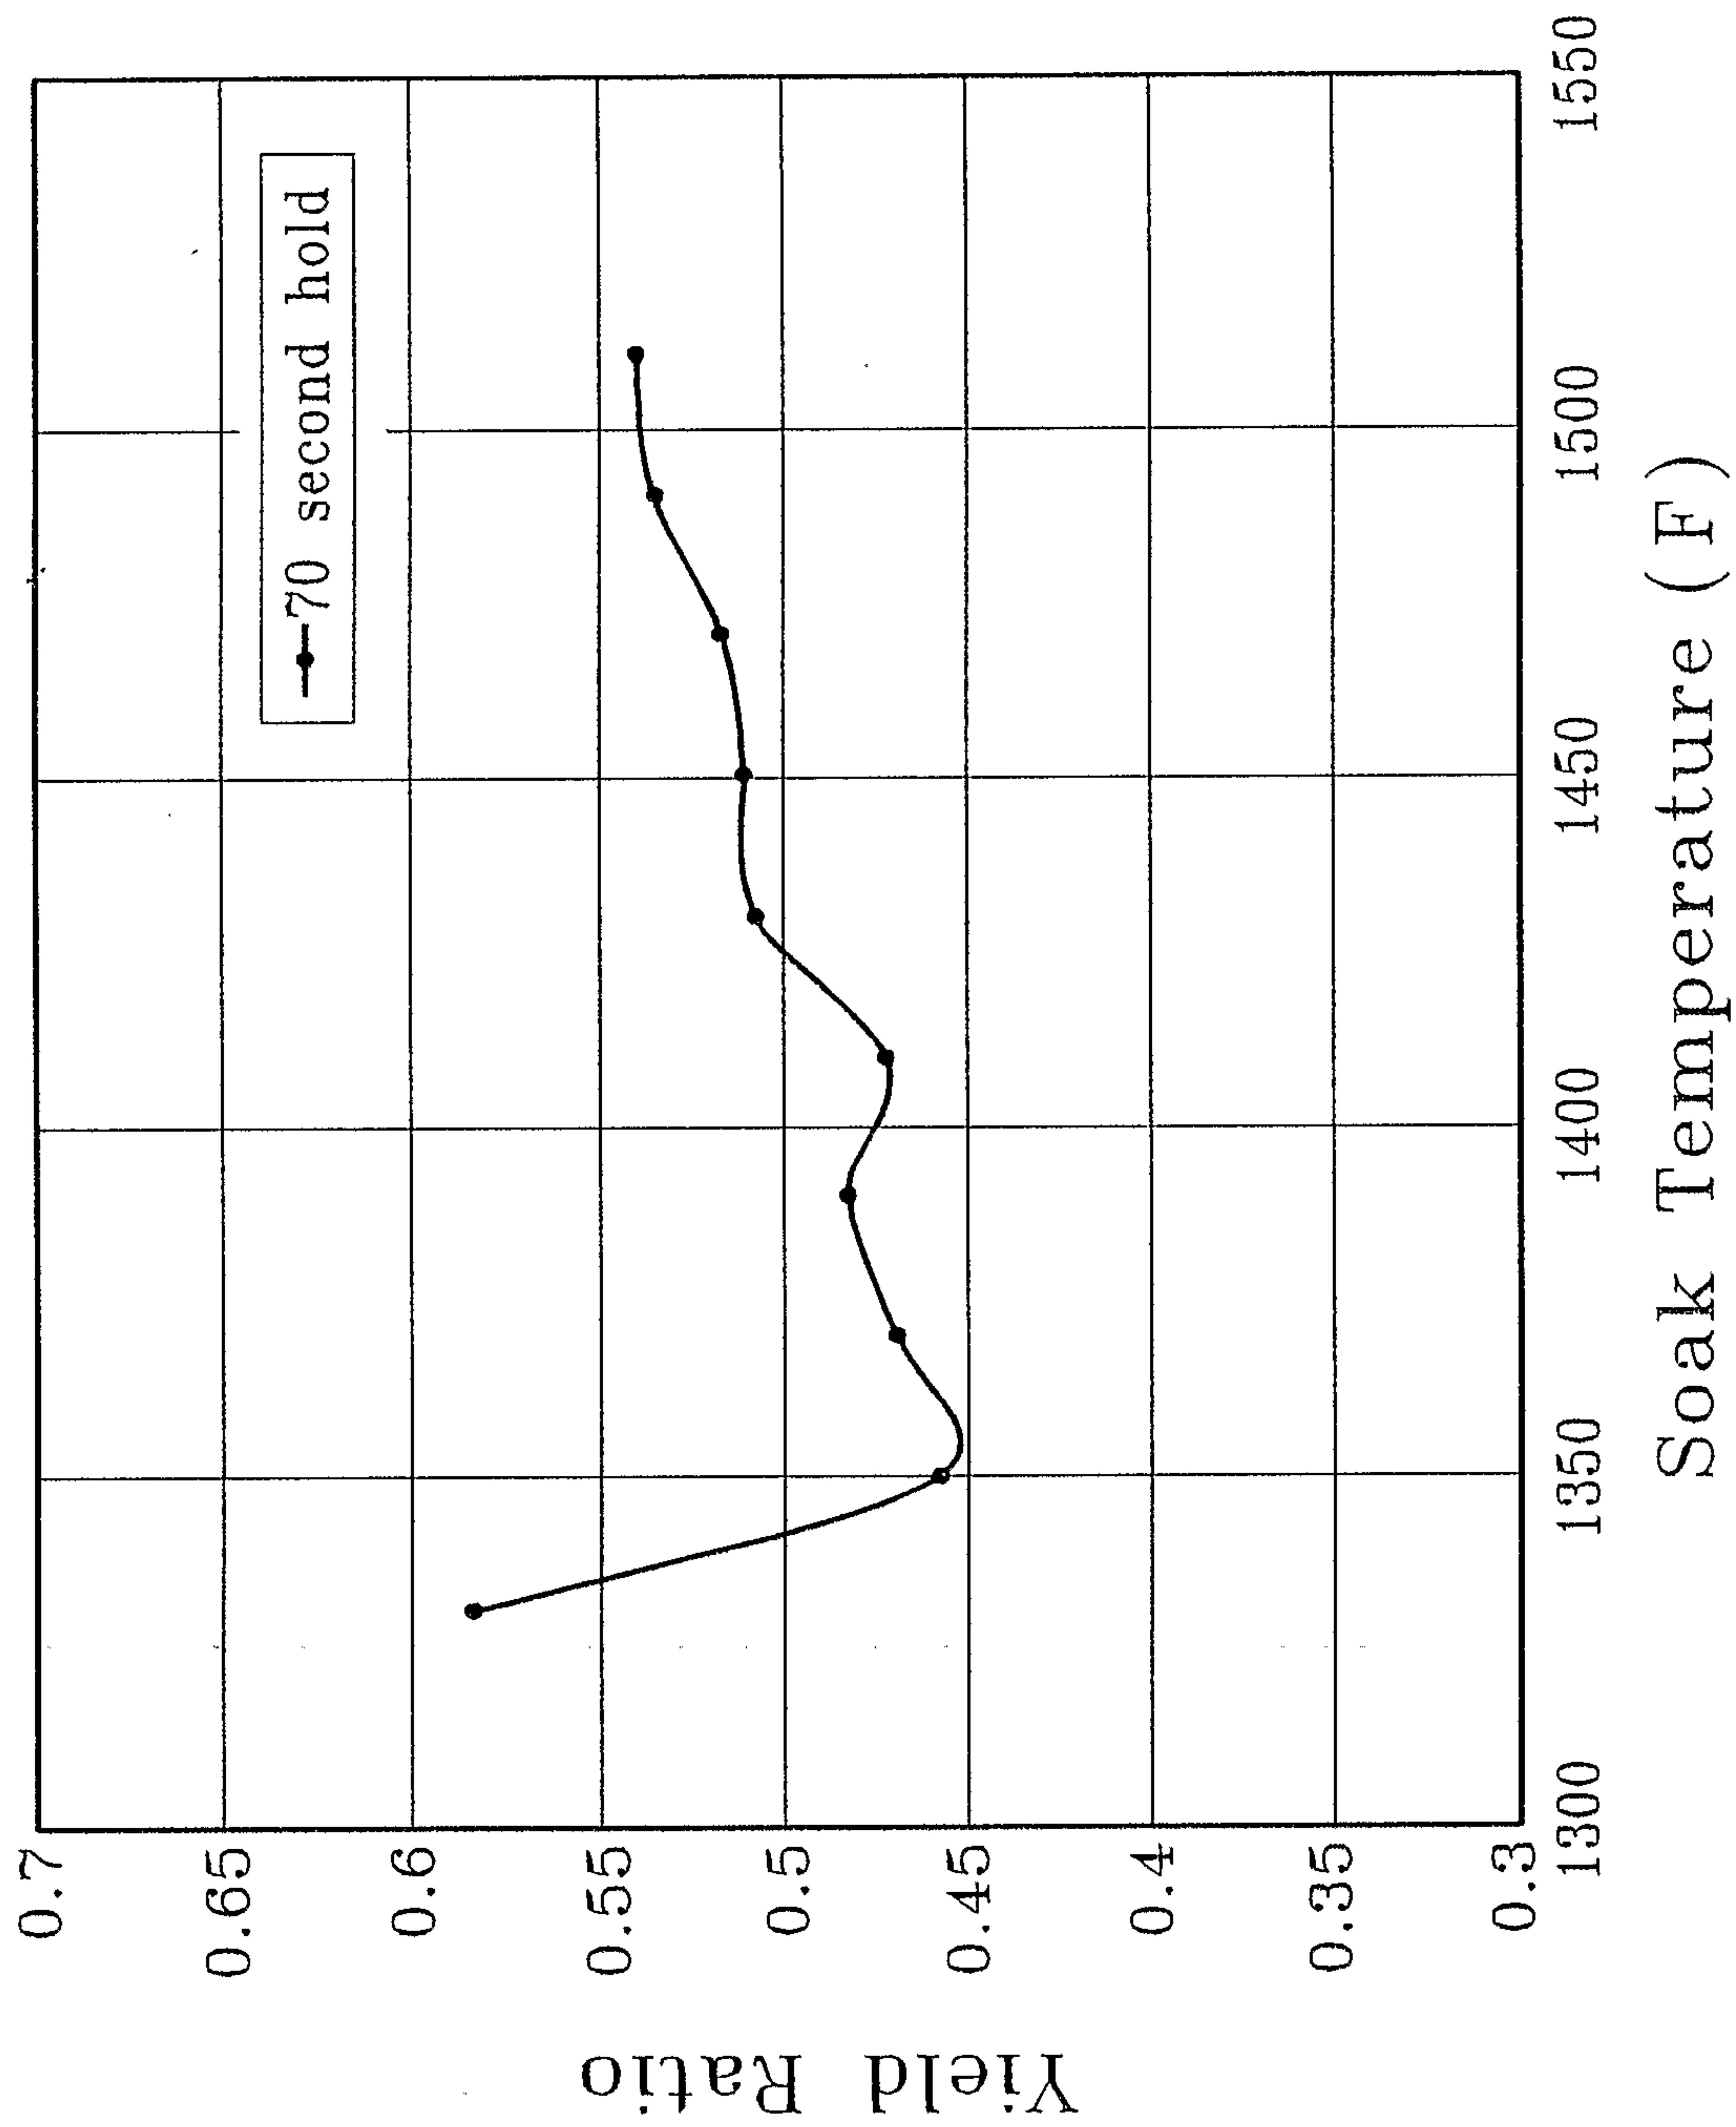


Fig. 4

5/6

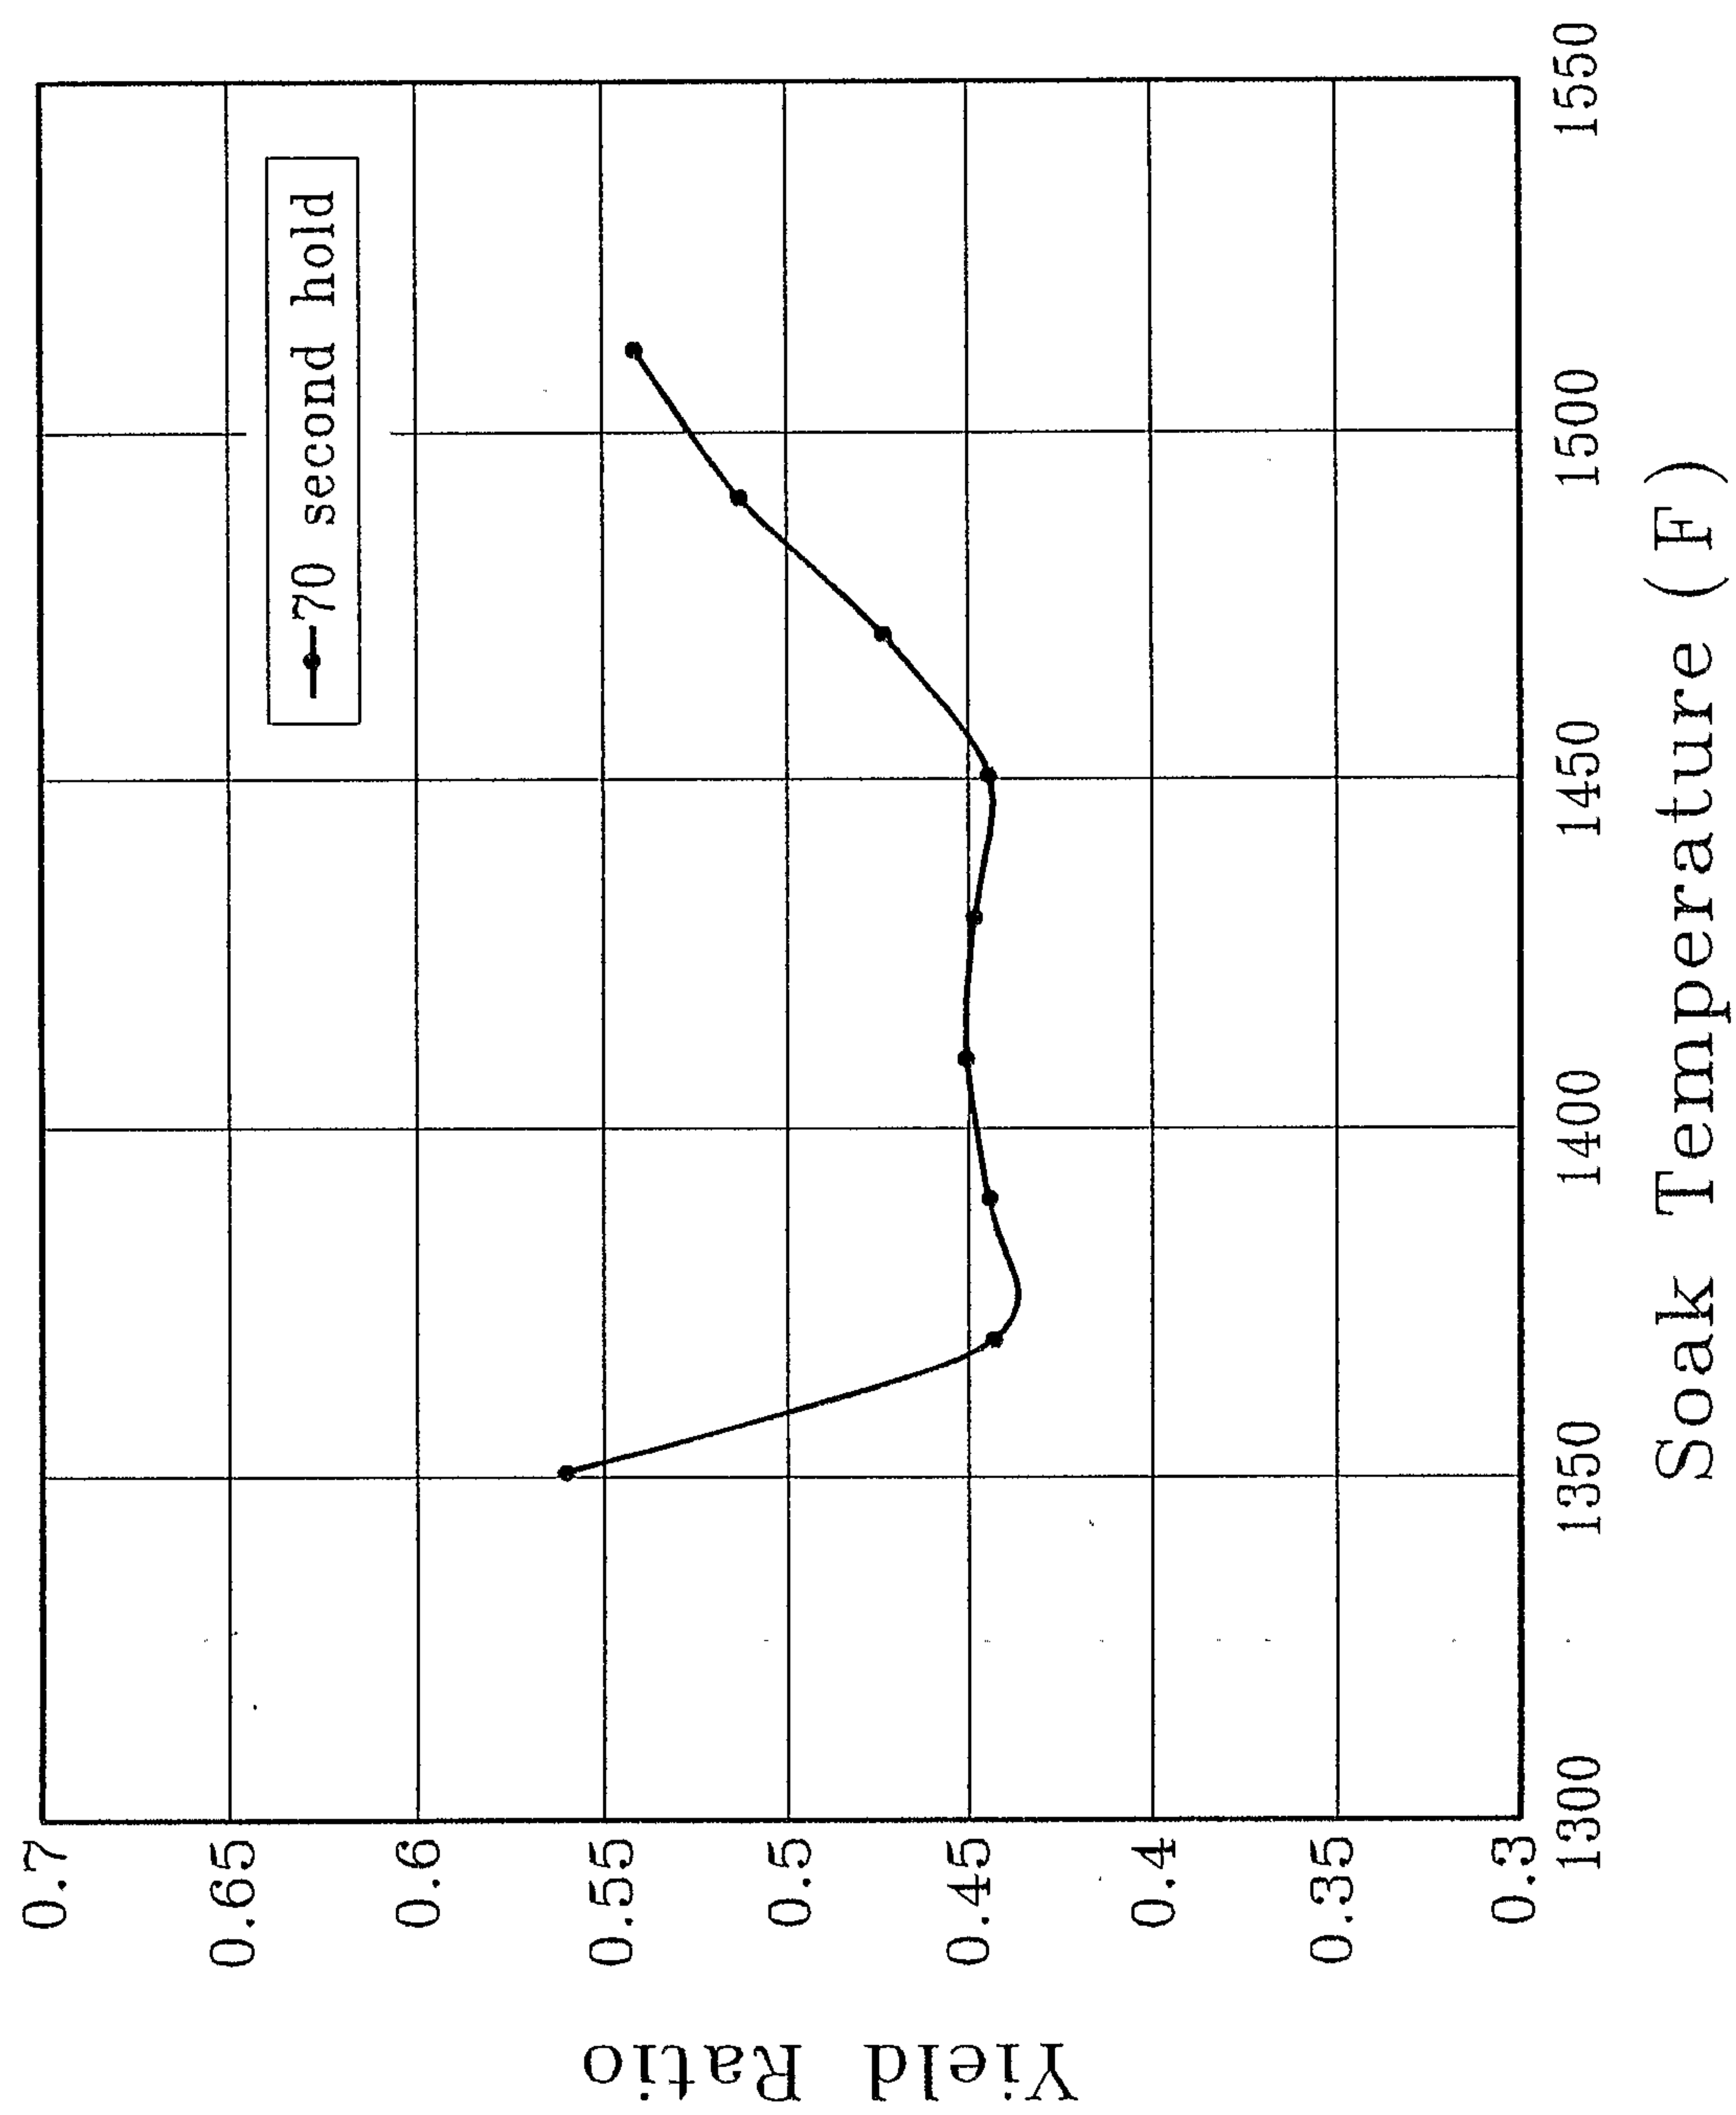


Fig. 5

6/6

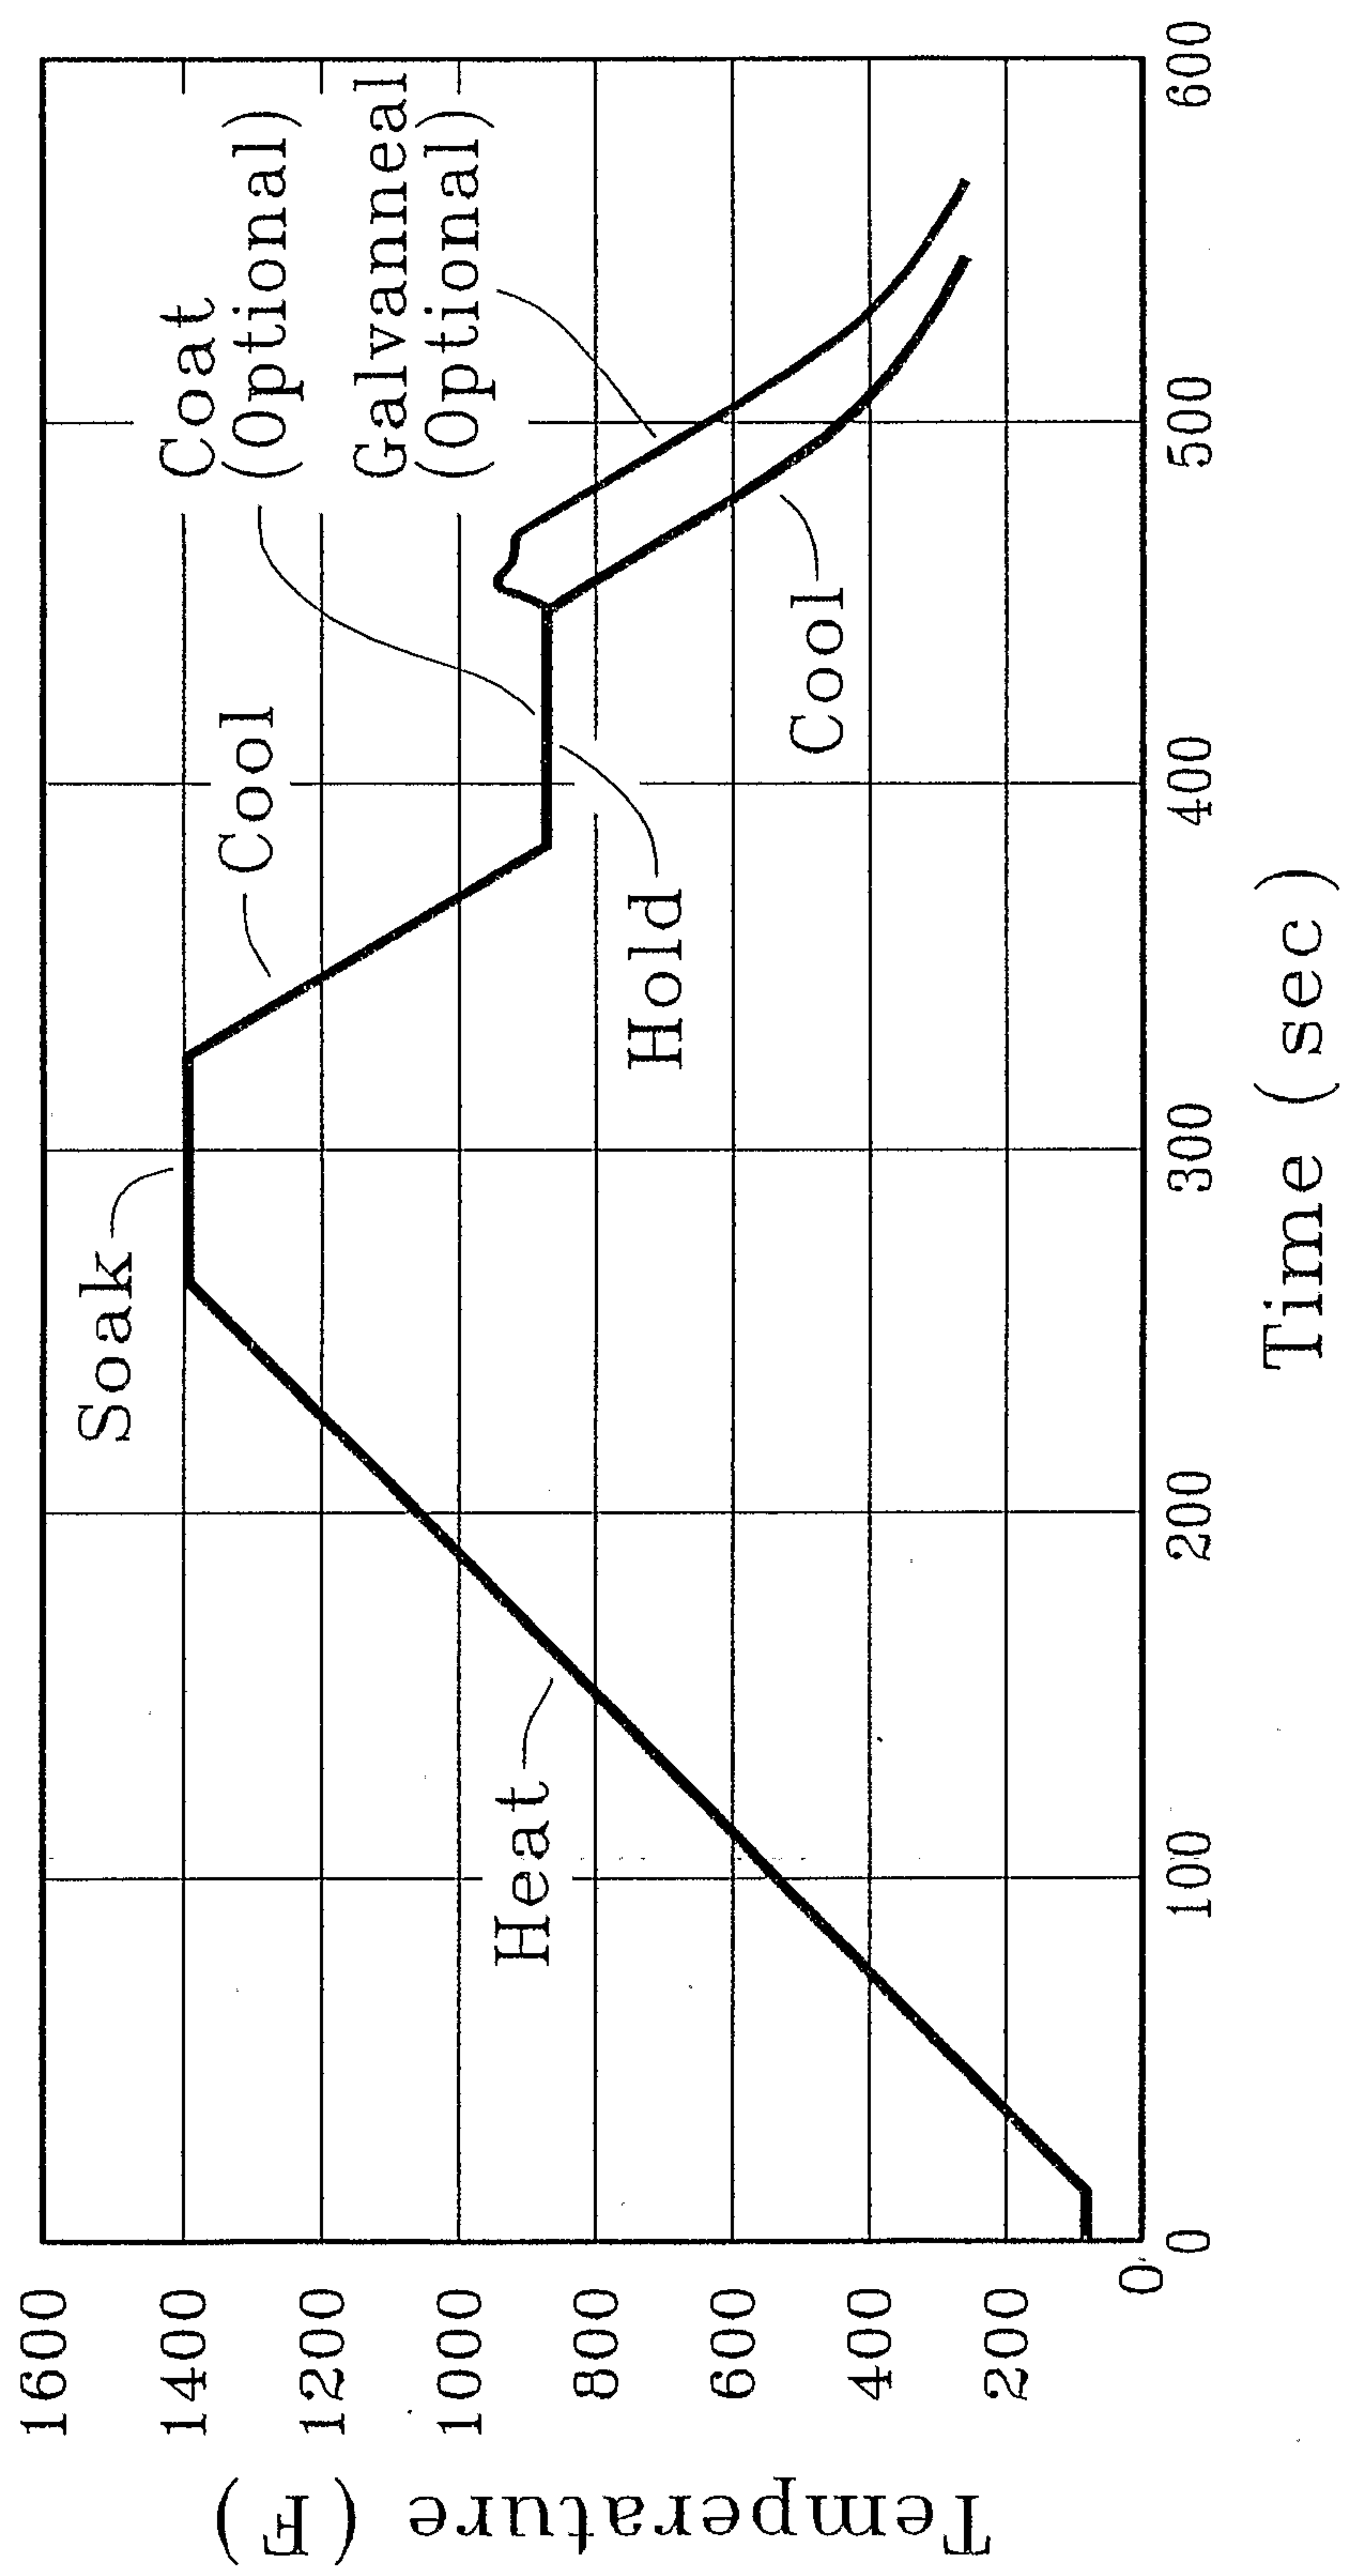


Fig. 6

