

(51) International Patent Classification:
H04B 7/04 (2006.01)

(21) International Application Number:

PCT/IB2011/001777

(22) International Filing Date:

24 June 2011 (24.06.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

201010208384.8 24 June 2010 (24.06.2010) CN

(71) Applicant (for all designated States except US): **ALCATEL LUCENT** [FR/FR]; 3, avenue Octave Gréard, F-75007 Paris (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WU, Lu** [CN/CN]; 388# Ningqiao RD, Shanghai, Shanghai 201206 (CN). **SONG, Yang** [CN/CN]; 388# Ningqiao RD, Shanghai, Shanghai 201206 (CN). **CHEN, Jinhui** [CN/CN]; 388# Ningqiao RD, Shanghai, Shanghai 201206 (CN). **YANG, Hongwei** [CN/CN]; 388# Ningqiao RD, Shanghai, Shanghai 201206 (CN). **LV, Di** [CN/CN]; 388# Ningqiao RD, Shanghai, Shanghai 201206 (CN).(74) Agent: **WANG, Maohua**; King & Wood, 20th Floor, East Tower, World Financial Centre, 1 Dongsanhuan Zhonglu, Chaoyang District Beijing 100020 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A METHOD AND DEVICE FOR OBTAINING PRECODING MATRIX

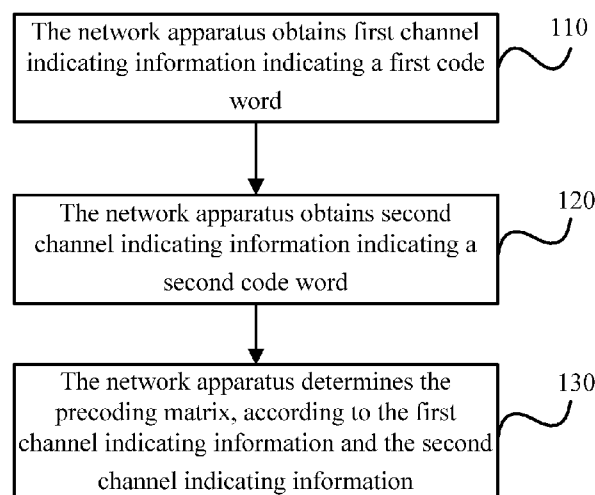


Fig.1

(57) Abstract: The present invention provides a method and device for obtaining precoding matrix. A network apparatus comprises a plurality of groups of cross-polarized linear array antennas. The method comprises: obtaining first channel indicating information indicating a first code word; obtaining second channel indicating information indicating a second code word; determining the precoding matrix, according to the first channel indicating information and the second channel indicating information, the first code word and/or the second code word comprises phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas. Since the first code word and the second code word for determining the precoding matrix by the network apparatus comprise phase shifts and amplitude differences among cross-polarized linear array antennas, the phase shifts and amplitude differences among cross-polarized linear array antennas are considered when the network apparatus sends downlink data according to the precoding matrix, so as to be able to improve the receiving quality of the sent data, thereby improving the system performance effectively.



Published:

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

A METHOD AND DEVICE FOR OBTAINING PRECODING MATRIX

FIELD OF THE INVENTION

The present invention relates to wireless communication, especially to
5 method and device for obtaining precoding matrix.

BACKGROUND OF THE INVENTION

In closed-loop Multiple Input Multiple Output (MIMO) system, receiver
needs to feed channel information back to transmitter for the transmitting data signal
10 during communication.

Considering a MIMO system with N_t transmitting antennas and N_r receiving
antennas, M_t denotes the number of space multiplex data flows to be sent, vector x of
 $M_t \times 1$ denotes the signal carried by the data flows, the precoding matrix W is a $N_t \times M_t$
dimensional matrix, which transforms vector x into $N_t \times 1$ dimensional vector z :

$$15 \quad z = Wx$$

Vector z is actual signal transmitted by transmitting antenna. The signal received by
receiving antenna is denoted as:

$$r = HWx + n$$

Wherein, H denotes channel matrix, n denotes Gaussian white noise vector.

20 If feedback overhead is not considered, the optimal choice of W is right
singular vector of Matrix H . However, the cost of feedback of these singular vectors is
great. Therefore, a solution of closed-loop MIMO precoding with limited feedback is
proposed. A group of precoding matrixes or vectors are structured for each
transmitting antenna dimension, and this group of precoding matrixes or vectors
25 (called as matrix below) are called as "codebook". Both base station and mobile
station are enabled to know this codebook, which is denoted as $P = \{P_1, \dots, P_L\}$, in
which each matrix is called as a "code word". If $L = 2^q$ denotes the size of
codebook, q is the required bit number for indexing the codebook. Take an 4×2
MIMO system as an example, for a codebook with size $L=64$, only 6 bits information
30 is needed to feed back for the transmitter to select precoding matrix. After the
codebook of a MIMO system is determined, the receiver detects the channel and
selects the optimal code word (precoding matrix) for the present moment, and then the
index of the code word is fed back to the transmitter. The MIMO system may save a
plenty of feedback overhead by means of such limited codebook index feedback.

35 The MIMO system may also use a limited feedback solution of feeding
back quantized channel matrix codebook index, that is: quantized channel matrix
codebook is structured in advance and stored at the transmitter and receiver; the
receiver detects the channel and selects the optimal code word for the present moment

from the quantized channel matrix codebook and feeds back the index of the code word; the transmitter determines present channel transmission matrix according to the code word corresponding to the index, and then calculates the optimal precoding matrix for data transmission according to present channel transmission matrix.

5 In 3GPP RAN1 discussion, it has been agreed about the feedback of channel information in LTE-A (Long Term Evolution system-Advanced) system that: two code words may be respectively selected from two separate codebooks and reported to the base station, when the mobile terminal feeds the precoding matrix back to the base station. In the two code words, one is used for representing wideband and/or
10 long-term channel properties; the other is used for representing frequency-selective (such as a sub-band) and/or short-term channel properties. The base station obtains the precoding matrix according to the product of the two code words. The user terminal may determine the code word for representing wideband and/or long-term channel properties according to capacity maximization principle or the principle of minimum
15 distance of eigenvector of channel correlation matrix, and then determine the code word for representing frequency selective (such as a sub-band) and/or short-term channel properties according to real-time channel condition.

In practice, cross-polarized linear array (CLA) is a typical manner of antenna configuration. Antenna polarization represents the direction of electric field strength
20 formed during antenna radiation. The electrical wave is called as vertically polarized wave if the direction of electric field strength is perpendicular to ground; the electrical wave is called as horizontal polarized wave if the direction of electric field strength is parallel to ground. Cross-polarized antenna is one kind of dual-polarized antenna.

25 SUMMARY OF THE INVENTION

The inventor of the present invention is aware that all of present codebooks do not consider polarization performance of cross-polarized linear array antenna, that is, due to relative phase shifts and amplitude differences among different polarized antennas, big error may possibly exist in feedback of channel information, so as to
30 influence the system performance. For cross-polarized linear array antenna, when the mobile terminal feeds precoding matrix back to the base station, if polarization performance of cross-polarized linear array antenna is considered in the transmitting of code word, the precoding matrix determined by the base station may reflect downlink channel information more accurately so as to improve system performance
35 effectively.

In order to better address the aforesaid technical problem, a method, in a network apparatus, of obtaining precoding matrix is provided according to one embodiment of the first aspect of the present invention. The network apparatus

comprises a plurality of groups of cross-polarized linear array antennas. The method comprises following steps:

- obtaining first channel indicating information indicating a first code word;
 - obtaining second channel indicating information indicating a second code word; and
 - determining the precoding matrix, according to the first channel indicating information and the second channel indicating information,
- wherein the first code word and/or the second code word comprises phase shifts and amplitude differences among the plurality of groups of cross-polarized linear array antennas.

Since the first code word and the second code word for determining the precoding matrix by the network apparatus comprise phase shifts and amplitude differences among cross-polarized linear array antennas, the phase shifts and amplitude differences among cross-polarized linear array antennas are considered when the network apparatus sends downlink data according to the precoding matrix, so as to be able to improve the receiving quality of the sent data to improve the system performance effectively.

A method, in a user terminal equipment, of providing a network apparatus with a precoding matrix is provided according to one embodiment of the second aspect of the present invention. The precoding matrix is obtained according to a first code word and a second code word, the network apparatus comprises a plurality of groups of cross-polarized linear array antennas, the method comprises following steps:

- sending first channel indicating information indicating a first code word;
 - sending second channel indicating information indicating a second code word;
- wherein the first code word and/or the second code word comprises phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas.

Since the first code word and the second code word sent by the user terminal equipment comprise phase shifts and amplitude differences among cross-polarized linear array antennas, the phase shifts and amplitude differences among cross-polarized linear array antennas are considered when the network apparatus determines downlink data according to the first code word and the second code word. Therefore, the phase shifts and amplitude differences among cross-polarized linear array antennas are considered when the network apparatus sends downlink data according to the precoding matrix, so as to be able to improve the receiving quality of the sent data, thereby improving the system performance effectively.

An obtaining device, in a network apparatus, for obtaining a precoding matrix is provided according to one embodiment of the third aspect of the present invention. The network apparatus comprises a plurality of groups of cross-polarized linear array antennas. The obtaining device comprises:

5 a first means, for obtaining first channel indicating information indicating a first code word;

a second means, for obtaining second channel indicating information indicating a second code word; and

10 a third means, for determining the precoding matrix, according to the first channel indicating information and the second channel indicating information,

wherein the first code word and/or the second code word comprises phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas.

15 A providing device, in a user terminal equipment, for providing a network apparatus with a precoding matrix is provided according to one embodiment of the fourth aspect of the present invention. The precoding matrix is obtained according to a first code word and a second code word, the network apparatus comprises a plurality of groups of cross-polarized linear array antennas, the providing device comprises:

20 a fourth means, for sending first channel indicating information indicating the first code word; and

a fifth means, for sending second channel indicating information indicating the second code word;

25 wherein, the first code word and/or the second code word comprises phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas.

Each aspect of the present invention will become more apparent from description of the following detailed embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

30 Aforesaid and other features of the present invention will become more apparent from reading the following detailed description of non-limiting exemplary embodiments taken in conjunction with the accompanying drawings:

Fig.1 is a flow chart of the method, in a network apparatus, of obtaining precoding matrix, according to one embodiment of the present invention;

35 Fig.2 is a flow chart of the method, in a user terminal equipment, of providing a network apparatus with a precoding matrix, according to one embodiment of the present invention;

Fig.3 is a schematic diagram of an obtaining device for obtaining a precoding

matrix, according to embodiment of one aspect of the present invention; and

Fig.4 is a schematic diagram of a providing device for providing a precoding matrix, according to one embodiment of one aspect of the present invention.

5 In drawings, same or similar reference signs refer to the same or similar component.

DETAILED DESCRIPTION OF EMBODIMENTS

In the followings, the present invention is described in detail with reference to the drawings.

10 Fig.1 is a flow chart of the method, in a network apparatus, of obtaining precoding matrix, according to one embodiment of the present invention.

A method, in a network apparatus, of obtaining precoding matrix is provided according to one embodiment of the first aspect of the present invention. The network apparatus comprises a plurality of groups of cross-polarized linear array antennas.

15 The network apparatus may be implemented via a plurality of ways, such as base station, relay station, radio network controller, etc. Downlink channel refers to the channel for receiving signals by user terminals.

Referring to Fig.1, the method comprises step 110, the network apparatus obtains first channel indicating information indicating a first code word.

20 The network apparatus may obtain first channel indicating information via a plurality of ways. For example, the network apparatus directly receives first channel indicating information from user terminal equipment. Or the network apparatus receives first channel indicating information from other network apparatuses.

25 The first channel indicating information may indicate a first code word via a plurality of ways. In one embodiment, bit number of the first channel indicating information decides the number of code words that may be indicated. For example, there are four code words in a codebook, and the first channel indicating information needs two bits to indicate first code word.

30 The method further comprises step 120, the network apparatus obtains second channel indicating information indicating a second code word.

35 The network apparatus may obtain the second channel indicating information via a plurality of ways. For example, the network apparatus directly receives second channel indicating information from the user terminal equipment. Or the network apparatus receives second channel indicating information from other network apparatuses.

The second channel indicating information may indicate the second code word via a plurality of ways. In one embodiment, bit number of second channel indicating information decides the number of code words that may be indicated. For

example, there are eight code words in a codebook, and the second channel indicating information needs three bits to indicate the second code word.

The method further comprises step 130, the network apparatus determines the precoding matrix, according to the first channel indicating information and the second channel indicating information.

The network apparatus may determine the precoding matrix via a plurality of ways. In one embodiment, the network apparatus takes the product of the first code word and the second code word as the precoding matrix.

The first code word and/or the second code word comprises phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, that is, the first code word and/or the second code word considers phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas. Since the first code word and the second code word for determining the precoding matrix by the network apparatus comprise phase shifts and amplitude differences among cross-polarized linear array antennas, the phase shifts and amplitude differences among cross-polarized linear array antennas are considered when the network apparatus sends downlink data according to the precoding matrix, so as to be able to improve the receiving quality of the sent data, to improve the system performance effectively.

The first code word and the second code word may comprise phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas via a plurality of ways.

In one embodiment, the plurality of groups of cross-polarized linear array antennas are two groups of single stream antennas, the first code word is obtained via formula 1 and the matrix d_1 , and the second code word is obtained via formula 2 and the matrix d_2 . Single stream antenna denotes the antenna only sending one data stream.

$$w_1 = d_1 w_3 \quad \text{formula 1}$$

$$d_1 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_1, \dots, a_1}_N \right]$$

$$w_2 = d_2 w_4 \quad \text{formula 2}$$

$$d_2 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_2, \dots, a_2}_N \right]$$

In aforesaid formulas and matrixes, w_1 is the first code word, w_3 is a third code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, w_2 is the

second code word, w_4 is a fourth code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, N is antenna number of each group of antennas, a_1 and a_2 are the phase shifts and/or amplitude differences between two groups of cross-polarized linear array antennas. $diag$ denotes a diagonal matrix.

Both the third code word and the fourth code word do not consider the phase shifts and/or amplitude differences between two groups of cross-polarized linear array antennas, for example code words in codebook in 3GPP TS 36.211 V8.8.0.

Which code word comprises phase shifts and amplitude differences may be determined according to sending frequency of the first code word and the second code word and signaling load of system. Detailed value of phase shifts and amplitude differences may be determined according to detailed wireless application environment. For example, the values of phase shifts and amplitude differences which may make the system performance better are determined via simulating the system performance under wireless application environment, and all of those skilled in the art should know corresponding simulation methods, which is not repeated here.

In one embodiment, $a_1 = 1$, $a_2 \in \left\{1, -1, e^{j\frac{\pi}{4}}, e^{-j\frac{\pi}{4}}\right\}$. Supposing w_3 needs

four bits of information to indicate, and w_4 needs two bits of information to indicate, then w_1 still needs four bits of information to indicate, w_2 comprises phase shift and needs four bits of information to indicate. In contrast with the known method, the signaling load of information indicating the second code word will increase.

In another embodiment, $a_1 \in \{re^{j\theta} \mid r \in \{0.2, 0.5, 1, 2\}, \theta \in \{0, \pi, \pi/4, -\pi/4\}\}$, $a_2 = 1$. Supposing w_3 needs four bits of information to indicate, and w_4 needs two bits of information to indicate, then w_1 comprises phase shifts and amplitude differences and needs eight bits of information to indicate, w_2 still needs two bits of information to indicate. In contrast with the known method, the signaling load of information indicating the first code word will increase.

In still another embodiment, $a_1 \in \{0.2, 0.5, 1, 2\}$, $a_2 \in \left\{1, -1, e^{j\frac{\pi}{4}}, e^{-j\frac{\pi}{4}}\right\}$.

Supposing w_3 needs four bits of information to indicate, and w_4 needs two bits of information to indicate, then w_1 comprises amplitude differences and needs six bits

of information to indicate, w_2 comprises phase shifts and needs four bits of information to indicate. In contrast with the known method, the signaling load of both information indicating the first code word and the second code word will increase.

In still another embodiment, $a_1 = 1$, $a_2 \in \{re^{j\theta} \mid r \in \{0.2, 0.5, 1, 2\}, \theta \in \{0, \pi, \pi/4, -\pi/4\}\}$.

- 5 Supposing w_3 needs four bits of information to indicate, and w_4 needs two bits of information to indicate, then w_1 still needs four bits of information to indicate, w_2 comprises phase shifts and amplitude differences and needs six bits of information to indicate. In contrast with the known method, the signaling load of information indicating the second code word will increase.

- 10 In one embodiment, the plurality of groups of cross-polarized linear array antennas are two groups of two-stream antennas, the first code word is obtained via formula 3, matrix d_{11} and matrix d_{12} , the second code word is obtained via formula 4 and matrix d_2 . Two-stream antenna denotes the antenna sending two data streams synchronously.

15
$$w_1 = [d_{11} w_{31}, d_{12} w_{32}] \quad \text{formula 3}$$

$$d_{11} = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_1, \dots, a_1}_N \right], \quad d_{12} = \text{diag} \left[\underbrace{a_1^*, \dots, a_1^*}_N, \underbrace{1, \dots, 1}_N \right]$$

$$w_2 = d_2 w_4 \quad \text{formula 4}$$

$$d_2 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_2, \dots, a_2}_N \right],$$

- In aforesaid formulas and matrixes, w_1 is the first code word, $[w_{31}, w_{32}]$ is a
 20 third code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, w_2 is the second code word, w_4 is a fourth code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, N is antenna number of each group of
 25 antennas, a_1 and a_2 are the phase shifts and/or amplitude differences between two groups of cross-polarized linear array antennas. diag denotes a diagonal matrix. $*$ denotes conjugation.

Both the third code word and the fourth code word do not consider the phase shifts and/or amplitude differences between two groups of cross-polarized linear array antennas.

5 In aforesaid plurality of embodiments, the first code word may be code word for representing wideband and/or long-term channel properties, and the second code word may be code word for representing frequency selective (such as a sub-band) and/or short-term channel properties; or, the second code word may be code word for representing wideband and/or long-term channel properties, the first code word may be code word for representing frequency selective (such as a sub-band) and/or
10 short-term channel properties.

In addition, other code words in a codebook may also use aforesaid method to comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas.

15 Fig.2 is a flow chart of the method, in a user terminal equipment, of providing a network apparatus with a precoding matrix, according to one embodiment of the present invention.

A method, in a user terminal equipment, of providing a network apparatus with a precoding matrix is provided according to one embodiment of the second aspect of the present invention. The precoding matrix is obtained according to a first
20 code word and a second code word, the network apparatus comprises a plurality of groups of cross-polarized linear array antennas. A user terminal equipment may be implemented via a plurality of ways, such as handset, notebook computer, etc.

Referring to Fig.2, the method comprises step 210, the user terminal equipment sends first channel indicating information indicating a first code word.

25 The method further comprises step 220, the user terminal equipment sends second channel indicating information indicating a second code word.

Both the first code word and the second code word are respectively selected from two separate codebooks by the user terminal equipment. The user terminal may determine the code word for representing wideband and/or long-term channel properties according to capacity maximization principle or the principle of minimum distance of eigenvector of channel correlation matrix, and then determine the code
30 word for representing frequency selective (such as a sub-band) and/or short-term channel properties according to real-time channel condition. Those skilled in the art know the detailed selection method, which is not repeated here.

35 The first code word and/or the second code word comprises phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, that is, the first code word and/or the second code word considers phase shifts and/or amplitude differences among the plurality of groups of

cross-polarized linear array antennas. Since the first code word and the second code word sent by the user terminal equipment comprise phase shifts and amplitude differences among cross-polarized linear array antennas, the phase shifts and amplitude differences among cross-polarized linear array antennas are considered when the network apparatus determines the precoding matrix according to the first code word and the second code word. Therefore, the phase shifts and amplitude differences among cross-polarized linear array antennas are considered when the network apparatus sends downlink data according to the precoding matrix, so as to be able to improve the receiving quality of the sent data, thereby improving the system performance effectively.

The first code word and the second code word may comprise phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas via a plurality of ways.

In one embodiment, the plurality of groups of cross-polarized linear array antennas are two groups of single stream antennas, the first code word is obtained via aforesaid formula 1 and the matrix d_1 , and the second code word is obtained via aforesaid formula 2 and the matrix d_2 .

In another embodiment, the plurality of groups of cross-polarized linear array antennas are two groups of two-stream antennas, the first code word is obtained via formula 3, matrix d_{11} and matrix d_{12} , and the second code word is obtained via formula 4 and matrix d_2 .

Fig.3 is a schematic diagram of an obtaining device for obtaining a precoding matrix, according to embodiment of one aspect of the present invention.

An obtaining device, in a network apparatus, for obtaining a precoding matrix is provided according to one embodiment of the third aspect of the present invention. The network apparatus comprises a plurality of groups of cross-polarized linear array antennas.

Referring to Fig.3, the obtaining device 300 comprises a first means 310, a second means 320 and a third means 330.

The first means 310 is used for obtaining first channel indicating information indicating a first code word.

The second means 320 is used for obtaining second channel indicating information indicating a second code word; and

The third means 330 is used for determining the precoding matrix, according to the first channel indicating information and the second channel indicating information.

The first code word and/or the second code word comprise phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear

array antennas.

The first code word and the second code word may comprise phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas via a plurality of ways.

5 In one embodiment, the plurality of groups of cross-polarized linear array antennas are two groups of single stream antennas, the first code word is obtained via aforesaid formula 1 and the matrix d_1 , the second code word is obtained via aforesaid formula 2 and the matrix d_2 .

10 In another embodiment, the plurality of groups of cross-polarized linear array antennas are two groups of two-stream antennas, the first code word is obtained via formula 3, matrix d_{11} and matrix d_{12} , the second code word is obtained via formula 4 and matrix d_2 .

Fig.4 is a schematic diagram of a providing device for providing a precoding matrix, according to one embodiment of one aspect of the present invention.

15 A providing device, in a user terminal equipment, for providing a network apparatus with a precoding matrix is provided according to one embodiment of the fourth aspect of the present invention. The precoding matrix is obtained according to a first code word and a second code word, the network apparatus comprises a plurality of groups of cross-polarized linear array antennas.

20 Referring to Fig.4, the providing device 400 comprises a fourth means 410 and a fifth means 420.

The fourth means 410 is used for sending first channel indicating information indicating a first code word.

25 The fifth means 420 is used for sending second channel indicating information indicating a second code word.

The first code word and/or the second code word comprises phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas.

30 The first code word and the second code word may comprise phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas via a plurality of ways.

35 In one embodiment, the plurality of groups of cross-polarized linear array antennas are two groups of single stream antennas, the first code word is obtained via aforesaid formula 1 and the matrix d_1 , and the second code word is obtained via aforesaid formula 2 and the matrix d_2 .

In another embodiment, the plurality of groups of cross-polarized linear array antennas are two groups of two-stream antennas, the first code word is obtained via formula 3, matrix d_{11} and matrix d_{12} , the second code word is obtained via formula 4

and matrix d_2 .

For the skilled in the art, it is obvious that the present invention is not limited to the details of the above exemplary embodiments, and the present invention can be realized in other specific forms without departing from the spirit or basic features of the present invention. Therefore, in whatever aspects, the embodiments should be regarded as illustrative and non-limiting, any reference signs in the claims should not be regarded as limiting the involved claims. Further, it is obvious that the term “comprise” does not exclude other elements or steps, the term “a/an” preceding an element does not exclude a plurality of such elements. The plurality of elements described in product claims may be implemented by an element via hardware or software. The terms such as “first”, “second” are used to represent the name rather than any specific order.

15

CLAIMS

1. A method, in a network apparatus, of obtaining a precoding matrix, the network apparatus comprising a plurality of groups of cross-polarized linear array antennas, wherein the method comprises following steps:

- obtaining first channel indicating information indicating a first code word;
 - obtaining second channel indicating information indicating a second code word;
- and

- determining the precoding matrix, according to the first channel indicating information and the second channel indicating information,

wherein the first code word and/or the second code word comprises phase shifts and amplitude differences among the plurality of groups of cross-polarized linear array antennas.

2. The method according to claim 1, characterized in that the plurality of groups of cross-polarized linear array antennas are two groups of single stream antennas, the first code word and the second code word are obtained via following formulas:

$$w_1 = d_1 w_3, \quad d_1 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_1, \dots, a_1}_N \right]; \text{and}$$

$$w_2 = d_2 w_4, \quad d_2 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_2, \dots, a_2}_N \right],$$

wherein, w_1 is the first code word, w_3 is a third code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, w_2 is the second code word, w_4 is a fourth code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, N is antenna number of each group of antennas, a_1 and a_2 are the phase shifts and/or amplitude differences.

3. The method according to claim 1, characterized in that the plurality of groups of cross-polarized linear array antennas are two groups of two-stream antennas, the first code word and the second code word are obtained via following formulas:

$$w_1 = [d_{11} w_{31}, d_{12} w_{32}] \quad , \quad d_{11} = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_1, \dots, a_1}_N \right] \quad ,$$

$$d_{12} = \text{diag} \left[\underbrace{a_1^*, \dots, a_1^*}_N, \underbrace{1, \dots, 1}_N \right]; \text{ and}$$

$$w_2 = d_2 w_4, \quad d_2 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_2, \dots, a_2}_N \right],$$

wherein, w_1 is the first code word, $[w_{31}, w_{32}]$ is a third code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, w_2 is the second code word, w_4 is a fourth code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, N is antenna number of each group of antennas, a_1 and a_2 are the phase shifts and/or amplitude differences.

4. A method, in a user terminal equipment, of providing a network apparatus with a precoding matrix, wherein the precoding matrix is obtained according to a first code word and a second code word, the network apparatus comprises a plurality of groups of cross-polarized linear array antennas, the method comprises following steps:

- sending first channel indicating information indicating a first code word;
- sending second channel indicating information indicating a second code word;

and

wherein the first code word and/or the second code word comprises phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas.

5. The method according to claim 4, characterized in that the plurality of groups of cross-polarized linear array antennas are two groups of single stream antennas, the first code word and the second code word are obtained via following formulas:

$$w_1 = d_1 w_3, \quad d_1 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_1, \dots, a_1}_N \right]; \text{ and}$$

$$w_2 = d_2 w_4, \quad d_2 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_2, \dots, a_2}_N \right],$$

wherein w_1 is the first code word, w_3 is a third code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups

of cross-polarized linear array antennas, w_2 is the second code word, w_4 is a fourth code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, N is antenna number of each group of antennas, a_1 and a_2 are the phase shifts and/or amplitude differences.

6. The method according to claim 4, characterized in that the plurality of groups of cross-polarized linear array antennas are two groups of two-stream antennas, the first code word and the second code word are obtained via following formulas:

$$w_1 = [d_{11} w_{31}, d_{12} w_{32}] \quad , \quad d_{11} = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_1, \dots, a_1}_N \right] \quad ,$$

$$d_{12} = \text{diag} \left[\underbrace{a_1^*, \dots, a_1^*}_N, \underbrace{1, \dots, 1}_N \right] ; \quad \text{and}$$

$$w_2 = d_2 w_4 \quad , \quad d_2 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_2, \dots, a_2}_N \right] ,$$

wherein, w_1 is the first code word, $[w_{31}, w_{32}]$ is a third code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, w_2 is the second code word, w_4 is a fourth code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, N is antenna number of each group of antennas, a_1 and a_2 are the phase shifts and/or amplitude differences.

7. An obtaining device, in a network apparatus, for obtaining a precoding matrix, the network apparatus comprising a plurality of groups of cross-polarized linear array antennas, the obtaining device comprises:

a first means, for obtaining first channel indicating information indicating a first code word;

a second means, for obtaining second channel indicating information indicating a second code word; and

a third means, for determining the precoding matrix, according to the first channel indicating information and the second channel indicating information,

wherein the first code word and/or the second code word comprises phase shifts and amplitude differences among the plurality of groups of cross-polarized linear array antennas.

8. The obtaining device according to claim 7, characterized in that the plurality of groups of cross-polarized linear array antennas are two groups of single stream antennas, the first code word and the second code word are obtained via following formulas:

$$w_1 = d_1 w_3, \quad d_1 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_1, \dots, a_1}_N \right]; \text{ and}$$

$$w_2 = d_2 w_4, \quad d_2 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_2, \dots, a_2}_N \right],$$

wherein, w_1 is the first code word, w_3 is a third code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, w_2 is the second code word, w_4 is a fourth code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, N is antenna number of each group of antennas, a_1 and a_2 are the phase shifts and/or amplitude differences.

9. The obtaining device according to claim 7, characterized in that the plurality of groups of cross-polarized linear array antennas are two groups of two-stream antennas, the first code word and the second code word are obtained via following formulas:

$$w_1 = [d_{11} w_{31}, d_{12} w_{32}] \quad , \quad d_{11} = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_1, \dots, a_1}_N \right] \quad ,$$

$$d_{12} = \text{diag} \left[\underbrace{a_1^*, \dots, a_1^*}_N, \underbrace{1, \dots, 1}_N \right]; \quad \text{and}$$

$$w_2 = d_2 w_4, \quad d_2 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_2, \dots, a_2}_N \right],$$

wherein, w_1 is the first code word, $[w_{31}, w_{32}]$ is a third code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, w_2 is the second code word, w_4 is a

fourth code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, N is antenna number of each group of antennas, a_1 and a_2 are the phase shifts and/or amplitude differences.

10. A providing device, in a user terminal equipment, for providing a network apparatus with a precoding matrix, wherein the precoding matrix is obtained according to a first code word and a second code word, the network apparatus comprises a plurality of groups of cross-polarized linear array antennas, the providing device comprises:

a fourth means, for sending first channel indicating information indicating the first code word; and

a fifth means, for sending second channel indicating information indicating the second code word;

wherein, the first code word and/or the second code word comprises phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas.

11. The providing device according to claim 10, characterized in that the plurality of groups of cross-polarized linear array antennas are two groups of single stream antennas, the first code word and the second code word are obtained via following formulas:

$$w_1 = d_1 w_3, \quad d_1 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_1, \dots, a_1}_N \right]; \text{and}$$

$$w_2 = d_2 w_4, \quad d_2 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_2, \dots, a_2}_N \right],$$

wherein w_1 is the first code word, w_3 is a third code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, w_2 is the second code word, w_4 is a fourth code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, N is antenna number of each group of antennas, a_1 and a_2 are the phase shifts and/or amplitude differences.

12. The providing device according to claim 10, characterized in that the plurality of groups of cross-polarized linear array antennas are two groups of two-stream antennas, the first code word and the second code word are obtained via following formulas:

$$w_1 = [d_{11} w_{31}, d_{12} w_{32}] \quad , \quad d_{11} = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_1, \dots, a_1}_N \right] \quad ,$$

$$d_{12} = \text{diag} \left[\underbrace{a_1^*, \dots, a_1^*}_N, \underbrace{1, \dots, 1}_N \right] ; \quad \text{and}$$

$$w_2 = d_2 w_4 \quad , \quad d_2 = \text{diag} \left[\underbrace{1, \dots, 1}_N, \underbrace{a_2, \dots, a_2}_N \right] ,$$

wherein, w_1 is the first code word, $[w_{31}, w_{32}]$ is a third code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, w_2 is the second code word, w_4 is a fourth code word which does not comprise the phase shifts and/or amplitude differences among the plurality of groups of cross-polarized linear array antennas, N is antenna number of each group of antennas, a_1 and a_2 are the phase shifts and/or amplitude differences.

DRAWINGS

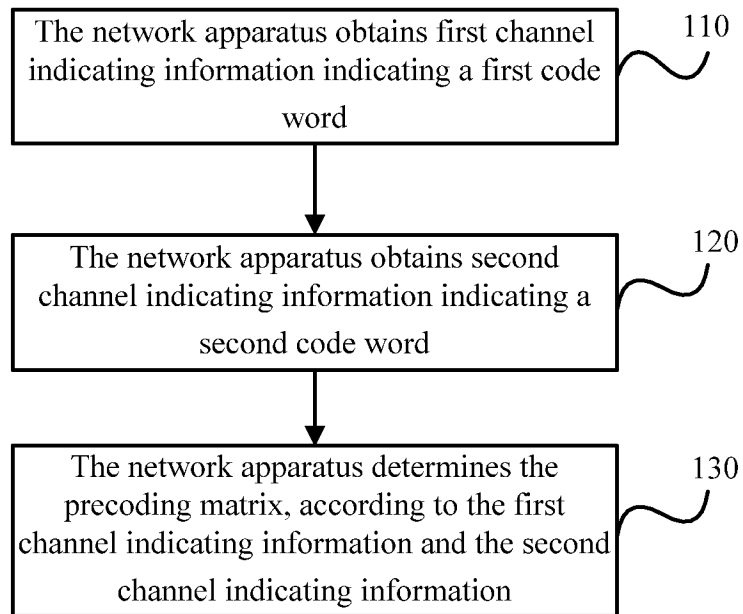


Fig. 1

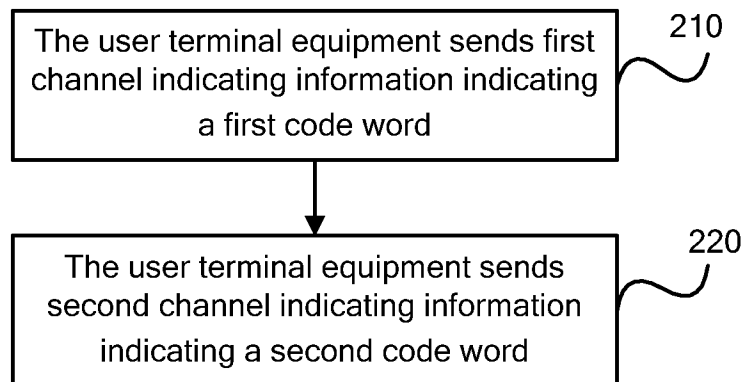


Fig. 2

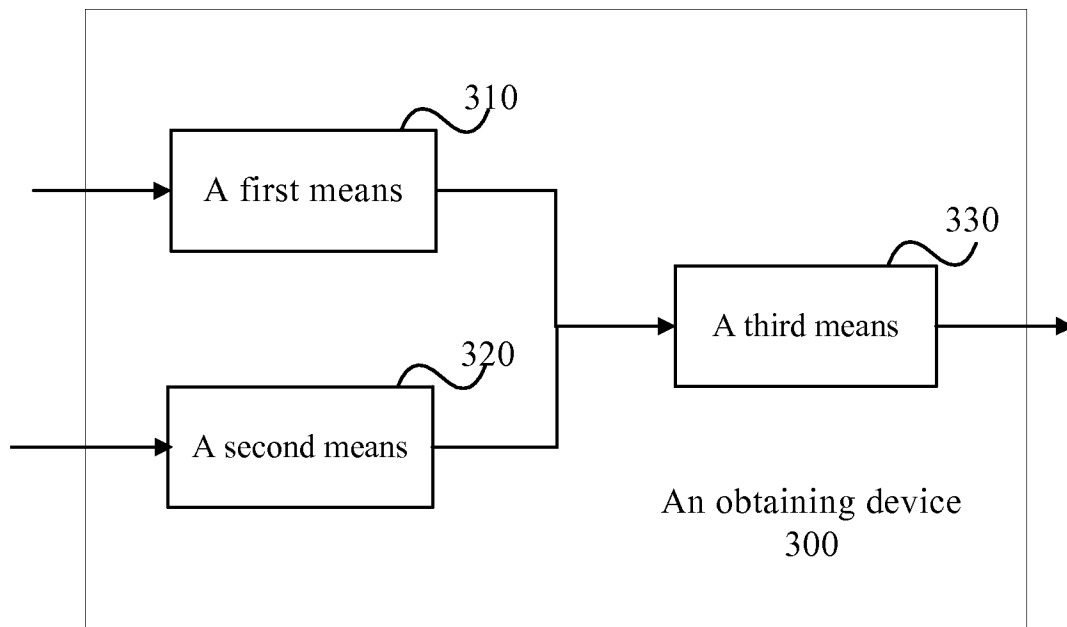


Fig. 3

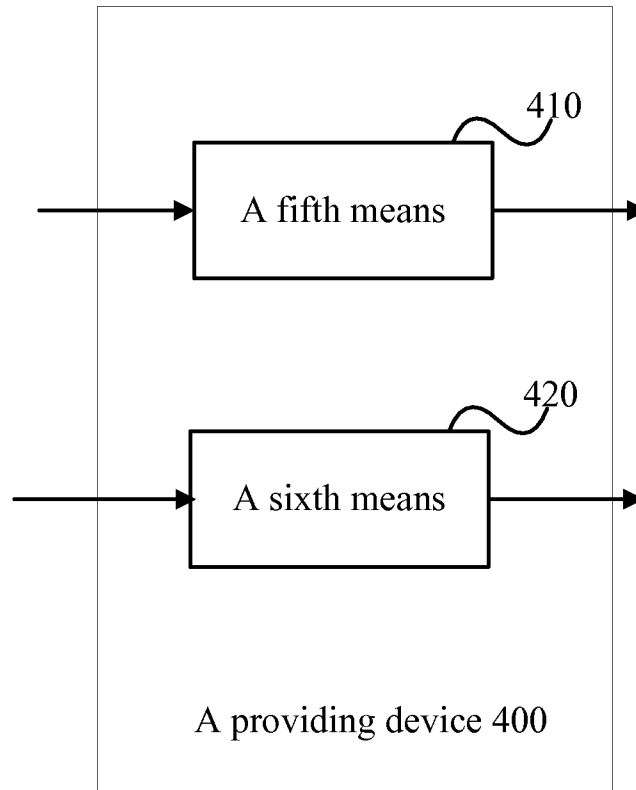


Fig. 4