

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 February 2007 (01.02.2007)

PCT

(10) International Publication Number
WO 2007/013069 A1

(51) International Patent Classification:
G01S 13/87 (2006.01) *G01S 3/48* (2006.01)

(21) International Application Number:
PCT/IL2006/000861

(22) International Filing Date: 25 July 2006 (25.07.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
169854 25 July 2005 (25.07.2005) IL

(71) Applicant (for all designated States except US): **ELTA SYSTEMS LTD.** [IL/IL]; 100 Sderot Itzhak Hanasie, P.o.b. 330, 77102 Ashdod (IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FIEREIZEN, Moshe** [IL/IL]; Neve Zuff, 71945 Halamish (IL).

(74) Agent: **REINHOLD COHN AND PARTNERS**; P.o.b. 4060, 61040 Tel-aviv (IL).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A SYSTEM AND METHOD FOR POSITIONING A TRANSPONDER

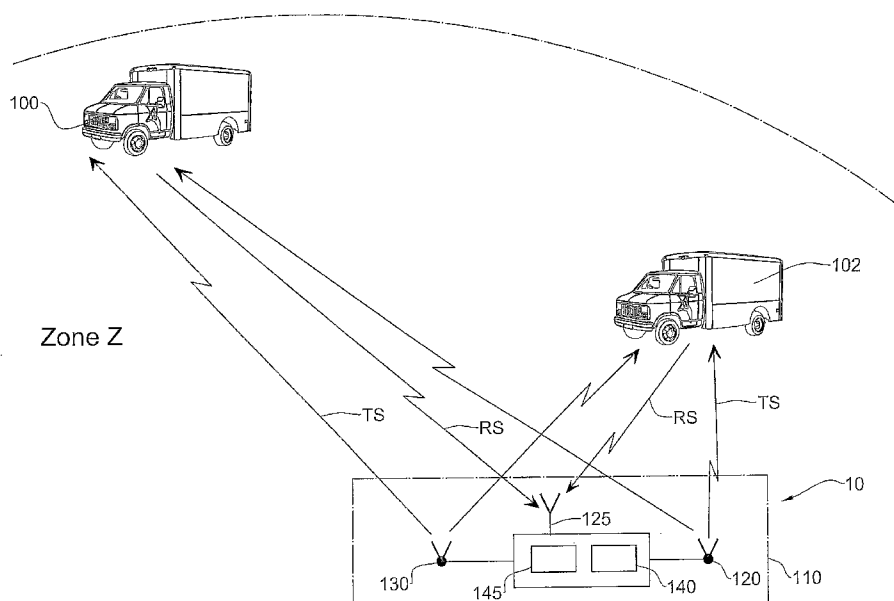

(57) Abstract: There is provided a method and system for positioning a transponder, the system comprising an antenna array of at least two spaced-apart antennas coupled to a common generating and switching unit. The generating and switching unit is configured for generating a periodic signal and switching the signal between said at least two antennas, constituting a positioning signal transmitted to the transponder. The system comprises a receiver for receiving a returned signal and a phase difference estimator coupled to the receiver and operable to measure phase differences between portions of the returned signal. The system further comprises a positioning utility coupled to said phase difference estimator and configured to determine the position of the transponder relative to the positioning system.

- 1. -

A System and Method for Positioning a Transponder

FIELD OF THE INVENTION

This invention relates to transmitting/receiving systems and methods and more specifically, to positioning systems and methods.

BACKGROUND OF THE INVENTION

5 The following patent publications relate to positioning of transponders: US Patent No. 6,876,326 discloses a high accuracy search and tracking system that uses a round-trip messaging scheme in which the Time of Arrival (TOA) of ranging signals is accurately determined to yield the range estimates between a target communications device and one or more search communications devices.

10 Successive ranging estimates are used by a search device to home in upon the target device. The physical location pinpoint communications system can be used alone, or in combination with other location estimation systems that can be used initially, or throughout the search and tracking process to pinpoint the physical location of the target device. The search radio(s) transmits ranging signals to the

15 target radio which responds by transmitting reply ranging signals. Upon reception of the reply ranging signal, the search radio determines the range to the reference radio from the signal propagation time. Errors in TOA estimates can be minimized using advanced processing techniques, if required.

US Patent No. 6,270,433 discloses a system for locating players on a field

20 including first and second directional scanning antennas located adjacent the field. A transponder carried by the players detects the radiation from each antenna and transmits timing signals. The timing signals are received at a central station and compared to reference timing signals synchronized with the scanning of the

- 2 -

antennas to provide an indication of the angular position of each player from the scanning antenna locations. The actual field position of the players can then be computed. The system can also locate the position of a playing object, such as a ball.

- 5 The following patent publications relate to positioning systems and methods and are not limited to positioning of a transponder: US Patent No. 3,981,015 discloses a phase comparison radio navigation system in which a prime transmitting station and one or more secondary transmitting stations radiate phase-locked signals of the same frequency in a time-shared sequence.
- 10 Phase locking at the secondary station or stations is effected by using a common phase comparator both for locking a phase memory oscillator to the receiving prime signals and for locking the secondary signals at the antenna with the phase memory oscillator.

- US Patent No. 4,975,710 discloses methods, algorithms and apparatus for
- 15 Direction of Arrival (DOA) measurement/computation based on long-baseline, phase-difference, paired-antenna interferometry and on DOA-computing array processing algorithms. Specifically, methods and algorithms based on direct, cyclically unambiguous estimation of the cosine of the DOA are described for resolving the cyclic ambiguities in long-baseline, phase-difference paired-
- 20 antenna interferometers, and for steering the computations to the vicinities of the solutions in computation-intensive array processing algorithms, thereby reducing computation load and time.

- US Patent No. 4,197,542 discloses an electronic navigation system ground station, which may be either an omni-range beacon (such as VOR) or a passive
- 25 direction finder. A circular array of antenna elements has a feed arrangement which includes switched programming of at least one discrete set of phase shifters to effect successively changed phase-rotation fields for minimizing the adverse effects of multipath signals between the ground station and a remote station, aboard an aircraft for example.

- 3 -

US Patent Nos. 6,573,865 and 5,084,709 disclose a multi-element antenna clusters or arrays for the reception and transmission of radio waves for direction-finding, navigation aid and emitter and/or receiver location purposes. In particular, it relates to arrangements of multiple antennas whereby the direction
5 of propagation (arrival or departure) of a wavefront is determined from a combination of the amplitudes of phasor (or total individual antenna output) differences between pairs of antennas, said arrangements being along certain geometrical patterns, such as a circle, an ellipse, a polygon, an open straight line, etc., with at least one longest dimension measuring more than one wavelength of
10 the incident or departing wave.

US Patent No. 3,967,277 discloses a radio navigation system which includes a first pair of fixed transmitting stations, a second pair of fixed transmitting stations and a mobile station. The mobile station includes a receiver having first means for deriving a first signal indicative of the difference in the
15 distances between the mobile station and each of the first pair of fixed stations and second means for deriving a second signal indicative of the difference in the distances between the mobile station and each of the second pair of fixed stations. Summing means are provided for adding the first and second signals to obtain a third signal indicative of a first line of position on which the mobile
20 station is located, and difference means are provided for subtracting one of the first and second signals from the other to obtain a fourth signal indicative of a second line of position on which the mobile station is located.

There is a need in the art for a positioning system and method that allows the positioning of an object equipped with a transponder and one antenna. There
25 is also a need in the art for a positioning system and method which cannot be easily jammed. There is a further need in the art for a positioning system capable of providing update rate of more than 50-100Hz.

- 4 -

SUMMARY OF THE INVENTION

According to one embodiment of the invention, there is provided a system for positioning a transponder, the system comprising an antenna array of at least two spaced-apart antennas coupled to a common generating and switching unit, 5 said generating and switching unit is configured for generating a periodic signal and switching the signal between said at least two antennas, constituting a positioning signal transmitted to the transponder; the system comprises a receiver for receiving a returned signal and a phase difference estimator coupled to the receiver and operable to measure phase differences between portions of the 10 returned signal; the system further comprising a positioning utility coupled to said phase difference estimator and configured to determine the position of the transponder relative to the positioning system.

According to one embodiment of the invention, the determination of the position of the transponder includes determination of the orientation of the 15 transponder relative to the positioning system. According to another embodiment, the determination of the position of the transponder includes determination of the range of the transponder relative to the positioning system, based on TOA (Time of Arrival) comparison between the positioning signal transmitted by the system and the signal returned by the transponder. According 20 to yet another embodiment of the invention, the determination of the position of the transponder includes determination of the range of the transponder relative to the positioning system, based on information received from a source external to the system, about the range of the transponder relative to the system. According to yet another embodiment of the invention, the positioning system is further 25 configured, based on the determination of the position of the transponder, to transmit the transponder position related information (e.g. navigation instructions).

According to another embodiment of the invention there is provided a system for determining the orientation of a transponder relative to the system, the

- 5 -

system comprising an antenna array of at least two spaced-apart antennas coupled to a common generating and switching unit, said generating and switching unit is configured for generating a periodic signal and switching the signal between said at least two antennas, constituting a positioning signal transmitted to the transponder; the system comprises a receiver for receiving a returned signal and a phase difference estimator coupled to the receiver and operable to measure phase differences between portions of the returned signal; the system further comprising a positioning utility coupled to said phase difference estimator and configured to determine the orientation of the transponder relative to the position of the system.

According to another embodiment of the invention, there is provided a method for positioning a transponder, the method comprising:

- generating a periodic signal and switching the periodic signal between an antenna array of at least two spaced-apart antennas of known locations coupled to a common generating and switching unit;
 - transmitting the signal to the transponder and receiving a returned signal;
 - based on measurements of phase differences between portions of the returned signal, determining the orientation of the transponder relative to the system,
- thereby allowing the determination of the position of the receiver relative to the positioning system.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to understand the invention and to see how it may be carried out in practice, specific embodiments will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

Fig. 1 is a schematic illustration of a simplified architecture of a positioning system according to an embodiment of the invention;

- 6 -

Fig. 2 is another illustration of the positioning system according to the embodiment of the invention shown in Fig. 1;

Fig. 3 is a simplified architecture of a positioning system according to another embodiment of the invention;

5 Figs. 4a-4c schematically illustrate antenna array configurations according to various embodiments of the invention;

Fig. 5 is a flow chart showing a sequence of operations carried out by a receiver receiving a positioning signal transmitted in accordance with one embodiment of the invention;

10 Fig. 6 illustrates a signal generated by a positioning system according to an embodiment of the invention;

Fig. 7 is a block diagram showing a positioning system according to one embodiment of the invention; and

15 Fig. 8 is a flow chart showing a sequence of operations carried out by a positioning system according to an embodiment of the invention.

20 DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS OF THE INVENTION

Fig. 1 is a schematic illustration of a simplified architecture of a positioning system 10 according to an embodiment of the invention. The positioning system 10 includes a base station 110 of a known position, having an array of two spaced-apart RF transmit antennas 120 and 130, and a common
25 generating and switching unit 140 coupled to the antennas. System 10 further comprises a receive antenna 125 and a time and phase difference estimator 145. System 10 radiates (transmits) a positioning signal TS, which can be received at a certain local zone Z. An object 100 of an unknown position (a ground platform in this non-limiting example), equipped with an RF receiver/transmitter

- 7 -

(transponder) and one antenna (not shown in Fig. 1), receives signal **TS** and returns it (signal **RS**) to the base station **140**, through receive antenna **125**. The returned signal **RS** carries information about the relative position of the object **100** with respect to the base station **140**. The returned signal is analyzed for the purpose of positioning the transponder. Also shown in Fig. 1 is another object **102** (another ground vehicle) travelling within zone **Z**, receiving positioning signal **TS** from base station **140** and returning a signal that carries information about the position of vehicle **102**.

Positioning Signal **TS** is a periodic signal (e.g. a 1GHz sinusoidal signal) generated by unit **140** and switched between antenna **120** and antenna **130**. In other words, signal **TS** includes signal portions emitted by antenna **120** which alternates with signal portions emitted by antenna **130** (see discussion below referring to Figs. 5-6). The returned signal **RS** carries information about the orientation and the ranging of the object **100** relative to the base station: Using the time and phase difference estimator for estimating the frequency and phase of the received signal, the base station is able to estimate the phase differences ϕ between portions of the positioning signal emitted by antennas **120** and **130** as received by the object **100**. Phase differences detected at one point within zone **Z** (e.g., by object **100**) differ from those detected at another point (e.g., by object **102**), and correspond to the geometrical disposition of the receiver relative to antennas **120** and **130**. Using time and phase difference estimator for estimating the time delay between the transmitted signal **TS** and the returned signal **RS**, the base station is able to determine the range to the object.

The concept of the present invention, according to certain embodiments, will now be explained in greater detail with reference to **Figs. 2-3** and **Figs. 4a-4c**, in which the same elements are marked by the same reference numbers. Reverting now to **Fig. 2**, there is presented another illustration of the positioning system **10**, showing the geometrical disposition of the positioning system operating in zone **Z** (zone **Z** is not shown in Fig. 2) and an object **100** located within zone **Z**.

- 8 -

The portions of signal TS that are emitted by antenna 120 travels a slant distance R_1 , which is longer by ΔR comparing those portions emitted by antenna 130, that travel a distance R_2 .

By measuring f and ϕ , ΔR could be determined using the following
5 known relations (1) and (2):

$$(1) 2\pi N + \phi = 2\pi f \Delta t$$

$$(2) \Delta R = c \Delta t$$

therefore,

$$(3) \Delta R = c(2\pi N + \phi)/2\pi f$$

10 wherein:

f is the frequency of signal TS;

ϕ is the phase difference between portions of the positioning signal transmitted by antennas 120 and 130, as detected at point 100 (see also Fig. 3 and text below);

15 Δt is the time delay between portions of the positioning signal emitted by the spaced-apart antennas 120 and 130, as received at point 100 (note that for simplicity, a delay D that characterized the operation of the phase difference estimator, and is a predefined and known parameter, is not included in relation (1));

20 N is an integer indicating the number of cycles of signal TS along ΔR (for simplicity, the discussion relating to Fig. 2 will continue based on the assumption that N is known. The ambiguity of N is discussed further below, with reference to Fig. 5); and

c is the speed of light.

25 As the distance R_3 between antennas 120 and 130 is known, and assuming that N is also known (solving of the ambiguity relating to N is discussed below with reference to Fig. 5), it is now possible to calculate spatial angle α , as follows:

$$(4) \cos \alpha = \Delta R / R_3$$

- 9 -

Thus, by measuring parameters f and ϕ which characterized a signal TS transmitted from known points (points 120 and 130) in a switched manner as described above, as received at an unknown point (e.g. point 100 shown in Figs. 1 and 2), a surface CS is defined, which is the surface of a cone generated by angle α , onto which points 100, 120 and 130 are located. This provides information indicating the orientation of point 100 relative to points 120 and 130. The orientation of point 100 relative to points 120 and 130 could be determined using additional information, e.g. information gathered in a manner detailed below with reference to Fig. 3, or elimination procedures known per-se in the field of interferometry (including, but not limited to the use of the assumed or measured height of point 100).

Turning now to Fig. 3, there is illustrated the geometric disposition of a point 100 relative to a positioning system according to another embodiment of the invention, in which a system 110 further includes a third antenna 150, located at a distance R_4 away from antenna 120. According to this embodiment, signal TS is generated by the common unit 140 and switched between the three spaced-apart antennas 120, 130 and 150. In other words, the positioning signal TS includes signal portions that are alternately transmitted by antennas 120, 130 and 150.

In a manner similar to the one described above with reference to Figs. 1 and 2, two spatial angles, α_1 and α_2 are determined: α_1 is determined with respect to antennas 120, 130 and 100; and α_2 is determined with respect to antennas 120, 150 (the other antenna) and 100. Consequently, two Surfaces, CS_1 (representing the surface of a cone onto which points 100, 120 and 130 are located) and CS_2 (representing the surface of a cone onto which points 100, 120 and 150 are located) are defined. CS_1 and CS_2 intersect with each other, and the intersection line represents the pointing vector PV (orientation) between antenna 120 and the unknown point 100. In other words, by measuring parameters f and ϕ of the returned signal, which indicate the phase differences between portions of the

- 10 -

positioning signal as received by the transponder, the orientation of the transponder could be determined.

To summarize the discussion above relating to **Figs. 2-3**: the positioning signal **TS**, transmitted by the base station **140** (switched between antennas 120 and 130), as picked up at point **100**, carries information about the direction of point **100** relative to the base station. Object **100** is configured to return the positioning signal (signal **RS**) to the base station and therefore the position information carried by signal **RS** is now available to the base station, allowing it to determine the orientation of the object relative thereto. In order to simplify uplink/downlink signal analysis, **RS** may have a different frequency than signal **TS**. Additionally, according to TOA/DTOA (Time of Arrival/Time Difference of Arrival) methods known *per-se*, the range of point **100** relative to the base station could be determined by comparing signal **TS** to signal **RS**.

Figs. 4a-4c schematically illustrate antenna array configurations according to various embodiments of the invention. **Fig. 4a** schematically illustrates an antenna array **400** according to the embodiment of the invention illustrated in **Fig. 2**. The antenna array **400** comprises two spaced-apart transmit antennas, (namely antennas **120** and **130**, shown in **Fig. 2**). Antennas **120** and **130** are coupled to a common signal generating and switching unit **140**. Unit **140** generates a periodic signal (e.g. a sinusoidal signal) and switches the signal between antennas **120** and **130**. The antennas are coupled to the switching unit **140** via substantially identical feed lines (note that non-identical feed lines could also be used, with appropriate means for compensation for consequent delays), such that the output of unit **140** feeds the antennas in a switched manner, thereby giving rise to a positioning signal which includes portions of signal transmitted alternately from the antennas.

The configuration shown in **Fig. 4a** allows for the determination of the orientation of point **100** relative to the positioning system in two dimensions only. This is most suitable for planar applications (e.g. when object **100**, shown in **Fig. 1**, travels a substantially planar path). If the altitude of object **100** is

- 11 -

known. e.g. using other devices (e.g. an altimeter), then its three-dimensional orientation could be defined in a manner known *per-se* using the determination of the pointing vector **PV** between the platform and antenna **120** (shown in Fig. 2), in combination with the readings of the altimeter at point 100.

5 An antenna array **410** according to another embodiment of the invention is shown in **Fig. 4b**. Array 410 comprises three antennas, **120**, **130** and **150** which are coupled to a common generating and switching unit **145**. This configuration relates to the embodiment of the invention shown in Fig. 3, which allows the determination of the orientation of the object (pointing vector **PV**) in three
10 dimensions.

Another antenna array **420** according to yet another embodiment of the invention, is illustrated in **Fig. 4c**. Array **420** comprises four antennas (**120**, **130**, **150** and **170**), coupled to a common generating and switching unit **145**. The antenna array **420** is arranged in a tetrahedron form, in which antennas **120**, **130**
15 and **150** are located onto the same plane, and antenna **170** is located outside that plane. Note that the three-dimensional arrangement of the antenna array affect the directivity and shape of Zone **Z** (the zone in which the positioning signal **TS** can be received). In case full symmetry is substantially maintained, (i.e. an antenna arrangement of a tetrahedron form) the resultant positioning system is
20 substantially omni-directional. Note that the discussion above relating to Figs. 4a-4c focuses in the antenna array for transmission. For receiving the returned signal, another antenna (e.g. element **125** shown in Fig. 1) could be dedicated, or be integrated with at least one of the transmit antennas.

As noted above with reference to Fig. 2, for simplicity, the discussion
25 above did not include discussion regarding the ambiguity relating to the determination of parameter **N**, indicating the integer number of cycles of signal **TS** along ΔR . There are known in the art, several methods for solving the ambiguity of **N** and the invention is not limited to any one of them. According to an embodiment of the invention, the ambiguity of **N** is solved in the following
30 manner, discussed with reference to **Figs. 5** and **6** together with Fig. 2:

- 12 -

In order to determine N , the positioning signal TS may include signal portions having a first frequency f_1 , and signal portions having a second frequency, f_2 . The signal portions having the frequency f_1 are switched between, and emitted by all the antennas at the antenna array (two antennas 120 and 130 in the example shown in Fig. 2), as well as those having the frequency f_2 . Therefore, a first phase difference ϕ_1 corresponding to the first frequency f_1 , and a second phase difference ϕ_2 , corresponding to the second frequency f_2 , could be measured. The difference between the detected values of ϕ_1 and ϕ_2 is used for determining N , in the following manner:

10 Frequencies f_1 and f_2 are selected such that N_1 and N_2 , indicating the integer number of cycles of signal TS along ΔR , will follow the relation:

(5) $N_1 = N_2 + k$, wherein k is an integer having low values from a limited set of values (e.g. 1, 2, ...n)

For example, if $f_1=1\text{GHz}$ and $f_2=1.1\text{GHz}$, then k would have a value from a predefined and limited set of values, e.g. $k = 1, 2$ or 3 . Note that $k > 0$ if $f_1 < f_2$.

According to the known relation (1) $2\pi N + \phi = 2\pi f \Delta t$

and by dividing:

(6) $(2\pi N_1 + \phi_1) / (2\pi N_2 + \phi_2) = 2\pi f_1 \Delta t / 2\pi f_2 \Delta t$

and following simple arithmetic procedures, $N_1(k)$ is determined as:

20 (7) $N_1(k) = (f_1 \phi_1 + f_2 \phi_2) / 2\pi(f_2 - f_1) + f_1 k / (f_2 - f_1)$

Using relation (7) with the measured values of f_1 , f_2 , ϕ_1 and ϕ_2 together with the predefined and limited set of values for k (e.g. $k = 1, 2$ or 3), N_1 is determined as the optimal solution of relation (7) (e.g. when the minimum of a $\text{trunc}N_1$ or $(1 - \text{trunc}N_1)$ is achieved). In other words, in order to solve the ambiguity of N , the periodic signal includes two frequencies of a predefined difference (e.g. 1MHz); the predefined difference gives rise to a limited set of values for k , and therefore the value of N could easily be determined by measuring parameters f and ϕ of signal portions of both frequencies (that is, f_1 , f_2 , ϕ_1 and ϕ_2).

- 13 -

Fig. 5 is a flow chart showing a sequence of operations **500** carried out for the determination of parameter N :

In operation **510**: receive measured parameters f_1 , f_2 , ϕ_1 and ϕ_2 ;

In operation **520**: provide a set of values for parameter k . for example, k could be provided from a reference table according to the difference between f_1 and f_2 (e.g., for a 100MHz difference, the set of values for k includes the values 1, 2 and 3);

In operation **530**: the set of values of $N_1(k)$ is determined, using relation (7) above for the various values of k provided at operation 520;

10 In operation **540**, the optimal $N_1(k)$ is selected, and

In operation **550**, the selected $N_1(k)$ is determined as parameter N .

Following the above description regarding the definition of parameter N , it should be noted that the positioning signal TS as discussed above with reference to Figs. 1-3 and 4a-4c, may include signal portions having a first frequency f_1 , and signal portions having a second frequency, f_2 . A schematic illustration of a positioning signal TS as generated, for example, by the positioning system 410 shown in Fig. 4b, is illustrated in **Fig. 6**: The signal portions having the frequency f_1 are switched between and emitted by all the antennas at the antenna array, as well as those having the frequency f_2 .

20 It should be noted that the portions transmitted by one antenna need not be identical in length to those transmitted by the other antenna/s. The timing and duration of the switching of the signal between the transmitting antennas can be changed along the transmission of the positioning signal. Furthermore, there is no need to sequence f_2 portions after each f_1 portion of signal, and other combinations are possible. Furthermore, additional signal portions carrying additional information (e.g. the identity of the base station, and more) could be embedded in the periodic signal. The periodic signal needs to be transmitted while being alternately switched between the antennas, thereby constituting the positioning signal.

- 14 -

It should be understood that the phase difference between portions of positioning signal alternately transmitted by the different antennas (according to the various architectures as described above), is affected by the geometrical arrangement of the antennas. Furthermore, the phase difference detected for positioning is derived by comparing a portion of the returned positioning signal RS with a delayed portion of the same returned positioning signal.

Fig. 7 is a block diagram showing a positioning system 700 according to one embodiment of the invention. For simplicity, system 700 is presented as having a 'transmit' part – comprising an antenna array (e.g. antenna array of two antennas 120 and 130, as shown in Fig. 4a) and a common generating and switching unit 140, all responsible for the transmission of the positioning signal TS; and a 'receive' part – comprising a receive antenna 125, a time and phase difference estimator 145 and a positioning utility 180, which is a processing hardware/software utility, responsible for receiving and analyzing the returned positioning signal RS.

The phase difference estimator 145 can be realized based on any devices and methods known in the art for estimating phase differences. For example, phase difference estimator 145 may include a digital comparator for comparing a currently received portion of signal with a previously received portion of the same signal (a portion fed via a delay component, e.g. a FIFO (First In First Out) buffer providing a 0.5 μ sec. delay). For example, the phase difference estimator 145 can be realized based on a Modulation-on-Pulse device, known in the art.

Positioning utility 180 comprises, *inter-alia*, an f/ϕ determination module 185 for determining the frequency f and phase ϕ of various portions of the received signal, N determination module 190 for determination of parameter N (see discussion above with reference to Fig. 5), and position determination module 195 for calculating the position of the transponder. Not shown in Fig. 7 are Analog-to Digital converters, which may be required. Positioning system 700 could also comprise a ranging utility (not shown in Fig. 7) operable for determining the range of the transponder relative to the system based on

- 15 -

TOA/DTOA measurements and comparisons of the transmitted and returned signals, or for receiving range information from an external source (e.g. external unit performing TOA/DTOA analysis). Position determination module 195 may also be configured for determining the position of the transponder based on the
5 orientation and range of the transponder relative to the system.

It should be noted that the receive antenna 125 could be integrated with one of the transmit antennas. Furthermore, all elements could be integrated to form a positioning device compact in size and weight. In addition, the operation of the generating and switching unit 145 could be controlled by the processing
10 utility 180. System 700 is illustrated in Fig. 7 in a non-limiting manner as a stand-alone system. However, it should be understood that the system can be integrated with additional hardware and software without departing from the scope of the invention. For example, according to one embodiment, the positioning system is integrated with a system for providing the object to be
15 positioned with position-based information, e.g. navigation information.

Fig. 8 illustrates a positioning method according to an embodiment of the invention, showing a sequence of operations 800 carried out by a positioning system in order to determine the position of an unknown transponder. The positioning method comprises the following operation:

20 In operation 810:

Generating a periodic signal and switching the periodic signal between at least two spaced-apart antennas of known locations coupled to a common generating and switching unit. The periodic signal may include one frequency (parameter f as discussed with reference to Figs. 2 and 3), or may have portions
25 having a first frequency and portions having a second frequency (parameters f_1 and f_2 , as discussed above with reference to Figs. 5 and 6).

In operation 820:

Transmitting the signal to the transponder and receiving a returned signal. As detailed above, the transponder receives a positioning signal that has portions
30 of signal transmitted alternately by each of the spaced-apart antennas (two, three

- 16 -

or more, as the case may be). The transponder returns the signal at the same – or at a different frequency, and the return signal carries phase differences between portions of signal transmitted by different antennas as received by the transponder (this is discussed above mainly with reference to Fig. 2).

5 In case the periodic signal includes two frequencies (or more) such that portions having the same frequency are switched between the antennas, the positioning signal transmitted to the transponder includes portions of the first frequency alternately transmitted by all of the antennas, and portions of the second frequency alternately transmitted by all of the antennas (this is illustrated
10 in Fig. 6). The returned signal, therefore, carries phase differences corresponding to the first and second frequencies.

In operation 830:

Based on measurements of phase differences between portions of the returned signal, determining the orientation of the transponder relative to the
15 system. The phase difference estimator (element 145 shown in Fig. 7) measures the above mentioned phase differences (parameters f and φ - or $f_1, f_2, \varphi_1, \varphi_2$ are measured, as discussed with reference to Figs. 2, 3, 5 and 6). The positioning utility (element 180 shown in Fig. 7) determines the orientation of the transponder relative to the system. In case information about the range of the
20 transponder relative to the positioning system is available (e.g. by TOA/DTOA comparison of the transmitted signal and returned signal, or from an external source), the position of the transponder can be easily determined based on methods known *per-se*.

Sequence of operations 800 may also comprise one or all of the following
25 operations:

- based on TOA (Time of Arrival) comparison between the signal transmitted by the system and the signal returned by the transponder, determining the range of the transponder relative to the positioning system.

- 17 -

- receiving from an external source information about the range of the transponder relative to the positioning system, and determining the position of the transponder.
- comparing the position of the transponder with position information of the position of the transponder established using PGS (Global Positioning System) and/or INS (Inertial Navigation System) systems, thereby allowing assessing the accuracy of said position information.

The invention was described mainly with reference to a ground platform. It should be noted that the invention is also applicable for airborne and sea-borne vehicles, with the required alterations and modifications. The invention could also be realized as a hand-held mobile device.

The present invention could be integrated with a cellular communication network, e.g. for supporting geographically-based services. Typically, a cellular communication network is formed as a grid of cells covering a service area. In each cell there are provided network components (e.g. cell site or base station, including transmitting/receiving equipment), serving the mobile communication devices currently located within the cell and communicating with other network components (e.g. other cell sites, central components, etc.). Each mobile communication device communicates in a timely manner with its cell site, receiving and returning a control signal, thereby providing the network with information indicating the current range between the mobile device and the serving cell site. However, typically the specific position (orientation) of the mobile device within a cell is unknown to the network. For example, as is clear, in light of the detailed discussion above, by providing a cell site having two antennas and switching the control signal therebetween, information about the direction of the mobile device relative to the cell site can be established.

The present invention could be integrated with other positioning systems (e.g. GPS (Global Positioning system) or INS (Inertial Navigation System), in order to validate the readings of those other positioning systems and assess their accuracy. For example, by comparing the position of an object determined

- 18 -

according to the invention with a GPS-based position, it is possible to determine if the GPS signal is jammed or deceived. By providing accurate positioning information, the present invention could also be used for correlating timed information between different and remote systems, and for calibrating INS
5 devices.

The positioning system, according to the various configurations described above, provides high precision position measurements. The precision is affected by the range of frequencies, and it is clear that at higher frequencies, better precision is yielded. However, in order to provide greater system range, lower
10 frequencies are required. Note that while at the frequency range of about 1GHz, Line of Site (LOS) transmission is required; this limitation is decreased at lower frequencies. The precision is further affected by the geometry of the array of the antennas which are coupled to a common switch. Additional precision is achieved by averaging phase measurements over a period of time (e.g. over 1
15 msec.). System errors are minimal as there is no need to compensate for receiver errors and to correlate readings from different receivers.

The positioning system, according to the various configurations described above, provides high update rate. The update rate is affected by the width of the periodic signal as well as by the length of the switching cycle (i.e. the length of
20 time needed for transmission of the periodic signal by all antennas in the antenna array). For example, by setting the width of a 1GHz periodic signal to 1 msec, and the length of the switching cycle to 4 msec, a 100KHz update rate is maintained. Note that high update rate provides better navigation precision and better signal-to-noise ratio, and consequently, larger coverage area.

25 The positioning system according to the present invention is better protected against jamming. The positioning signal available to transponders located within the coverage area of the positioning system is stronger than the GPS signal available in most areas covered by the GPS system, and therefore stronger signal is required for jamming.

- 19 -

The invention was described with reference to RF radiation, and mainly to RF radiation of frequencies of about 1Ghz. It should be noted that the invention is not limited by the exemplified frequencies, and could be employed along other portions of the radio spectrum as well as other electromagnetic radiation spectra.

5 Furthermore, the invention is not limited to electromagnetic radiation and is applicable to any other form of propagating wave-borne energy, such as acoustic, ultrasonic, etc.

For simplicity, the positioning systems, according to various embodiments of the invention, were described as stand-alone systems. It should be noted that a
10 positioning system, according to the invention, could be integrated with other systems, e.g. other positioning systems, direction-finders, radar systems and many more, with the required alterations and modifications.

- 20 -

CLAIMS:

1. A system for positioning a transponder, the system comprising an antenna array of at least two spaced-apart antennas coupled to a common generating and switching unit, said generating and switching unit is configured
5 for generating a periodic signal and switching the signal between said at least two antennas, constituting a positioning signal transmitted to the transponder; the system comprises a receiver for receiving a returned signal and a phase difference estimator coupled to the receiver and operable to measure phase differences between portions of the returned signal; the system further
10 comprising a positioning utility coupled to said phase difference estimator and configured to determine the position of the transponder relative to the positioning system.
2. A system according to Claim 1 wherein the determination of the position of the transponder includes determination of the orientation of the transponder
15 relative to the positioning system.
3. A system according to Claim 1 wherein the determination of the position of the transponder includes determination of the range of the transponder relative to the positioning system, based on TOA (Time of Arrival) comparison between the positioning signal transmitted by the system and the signal returned by the
20 transponder.
4. A system according to Claim 1 wherein the determination of the position of the transponder includes determination of the range of the transponder relative to the positioning system, based on information received from a source external to the system, about the range of the transponder relative to the system.
- 25 5. A system according to Claim 1 wherein said periodic signal includes portions having a first frequency and portions having a second frequency;

- 21 -

portions having the same frequency are switched between said at least two spaced-apart antennas.

6. A system according to Claim 5 wherein said first frequency is in the range of about 1GHz or more and the second frequency differ from the first
5 frequency by about 1MHz.

7. A system according to any one of the preceding claims, wherein said spaced-apart antennas are coupled to said generating and switching unit via substantially identical feed lines.

8. A system according to any one of the preceding claims, wherein said
10 antenna array comprises four antennas in a tetrahedron form.

9. A system according to Claim 1 further configured, based on the determination of the position of the transponder, to transmit the transponder position related information.

10. A system for determining the orientation of a transponder relative to the
15 system, the system comprising an antenna array of at least two spaced-apart antennas coupled to a common generating and switching unit, said generating and switching unit is configured for generating a periodic signal and switching the signal between said at least two antennas, constituting a positioning signal transmitted to the transponder; the system comprises a receiver for receiving a
20 returned signal and a phase difference estimator coupled to the receiver and operable to measure phase differences between portions of the returned signal; the system further comprising a positioning utility coupled to said phase difference estimator and configured to determine the orientation of the transponder relative to the position of the system.

25 11. A system according to Claim 10 wherein said periodic signal includes portions having a first frequency and portions having a second frequency;

- 22 -

portions having the same frequency are switched between said at least two spaced-apart antennas.

12. A system according to Claim 11 wherein said first frequency is in the range of about 1GHz or more and said second frequency differs from the first
5 frequency by about 1MHz .

13. A system according to Claim 10, wherein said spaced-apart antennas are coupled to said generating and switching unit via substantially identical feed lines.

14. A system according to Claim 10, wherein said antenna array comprises
10 four antennas in a tetrahedron form.

15. A method for positioning a transponder, the method comprising:
- generating a periodic signal and switching the periodic signal between an antenna array of at least two spaced-apart antennas of known locations coupled to a common generating and switching unit;
15 - transmitting the signal to the transponder and receiving a returned signal;
- based on measurements of phase differences between portions of the returned signal, determining the orientation of the transponder relative to the system,
20 thereby allowing the determination of the position of the receiver relative to the positioning system.

16. The method according to Claim 15 further comprising:
- based on TOA (Time of Arrival) comparison between the signal transmitted by the system and the signal returned by the transponder,
25 determining the range of the transponder relative to the positioning system.

- 23 -

17. The method according to Claim 15 further comprising:
- receiving from an external source information about the range of the transponder relative to the positioning system, and determining the position of the transponder.
- 5 18. A method according to Claim 14 or 15, further comprising:
- comparing the position of the transponder with position information of the position of the transponder established using PGS (Global Positioning System) and/or INS (Inertial Navigation System) systems, thereby allowing assessing the accuracy of said position information.
- 10 19. A method according to any one of Claims 15 to 18, wherein said periodic signal includes portions having a first frequency and portions having a second frequency; portions having the same frequency are switched between said at least two spaced-apart antennas.
20. A method according to any one of Claims 15 to 19 wherein said first
15 frequency is in the range of about 1GHz or more and the second frequency differ from the first frequency by about 1MHz.
21. A method according to any one of Claims 14 to 20, wherein said antenna array comprises four antennas in a tetrahedron form.
22. A positioning system as described in the appended text and drawings.

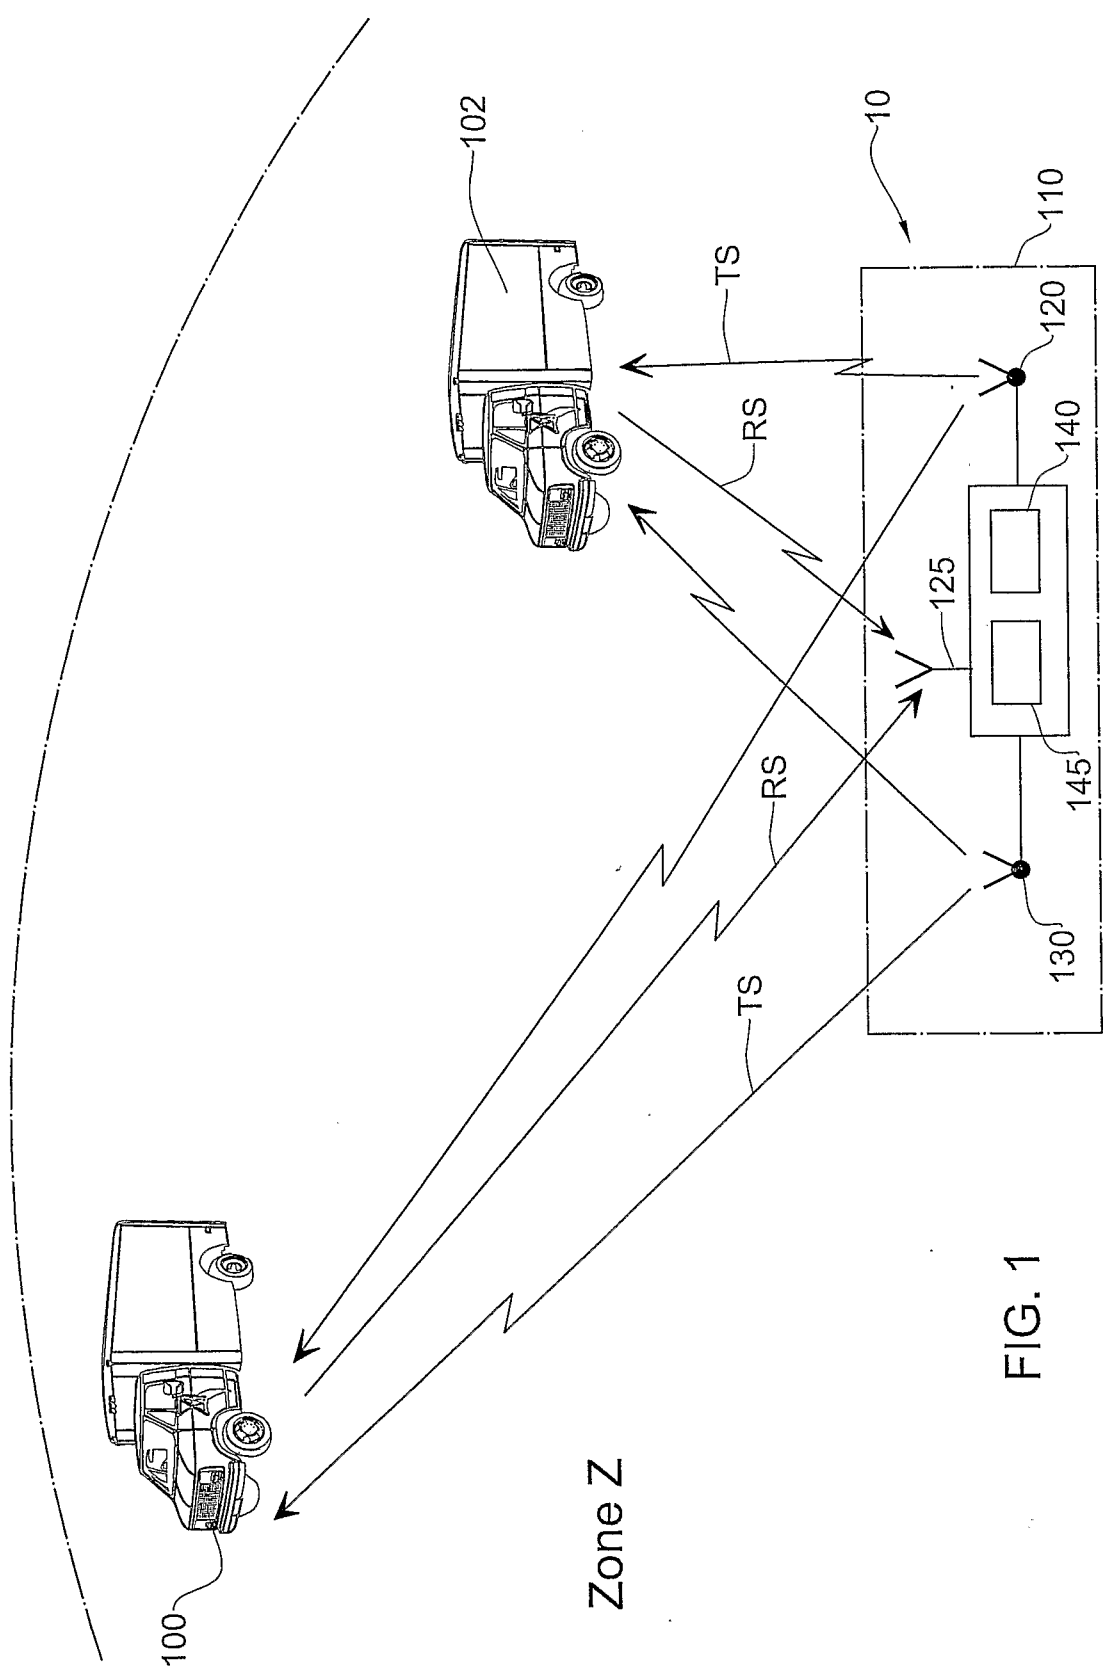
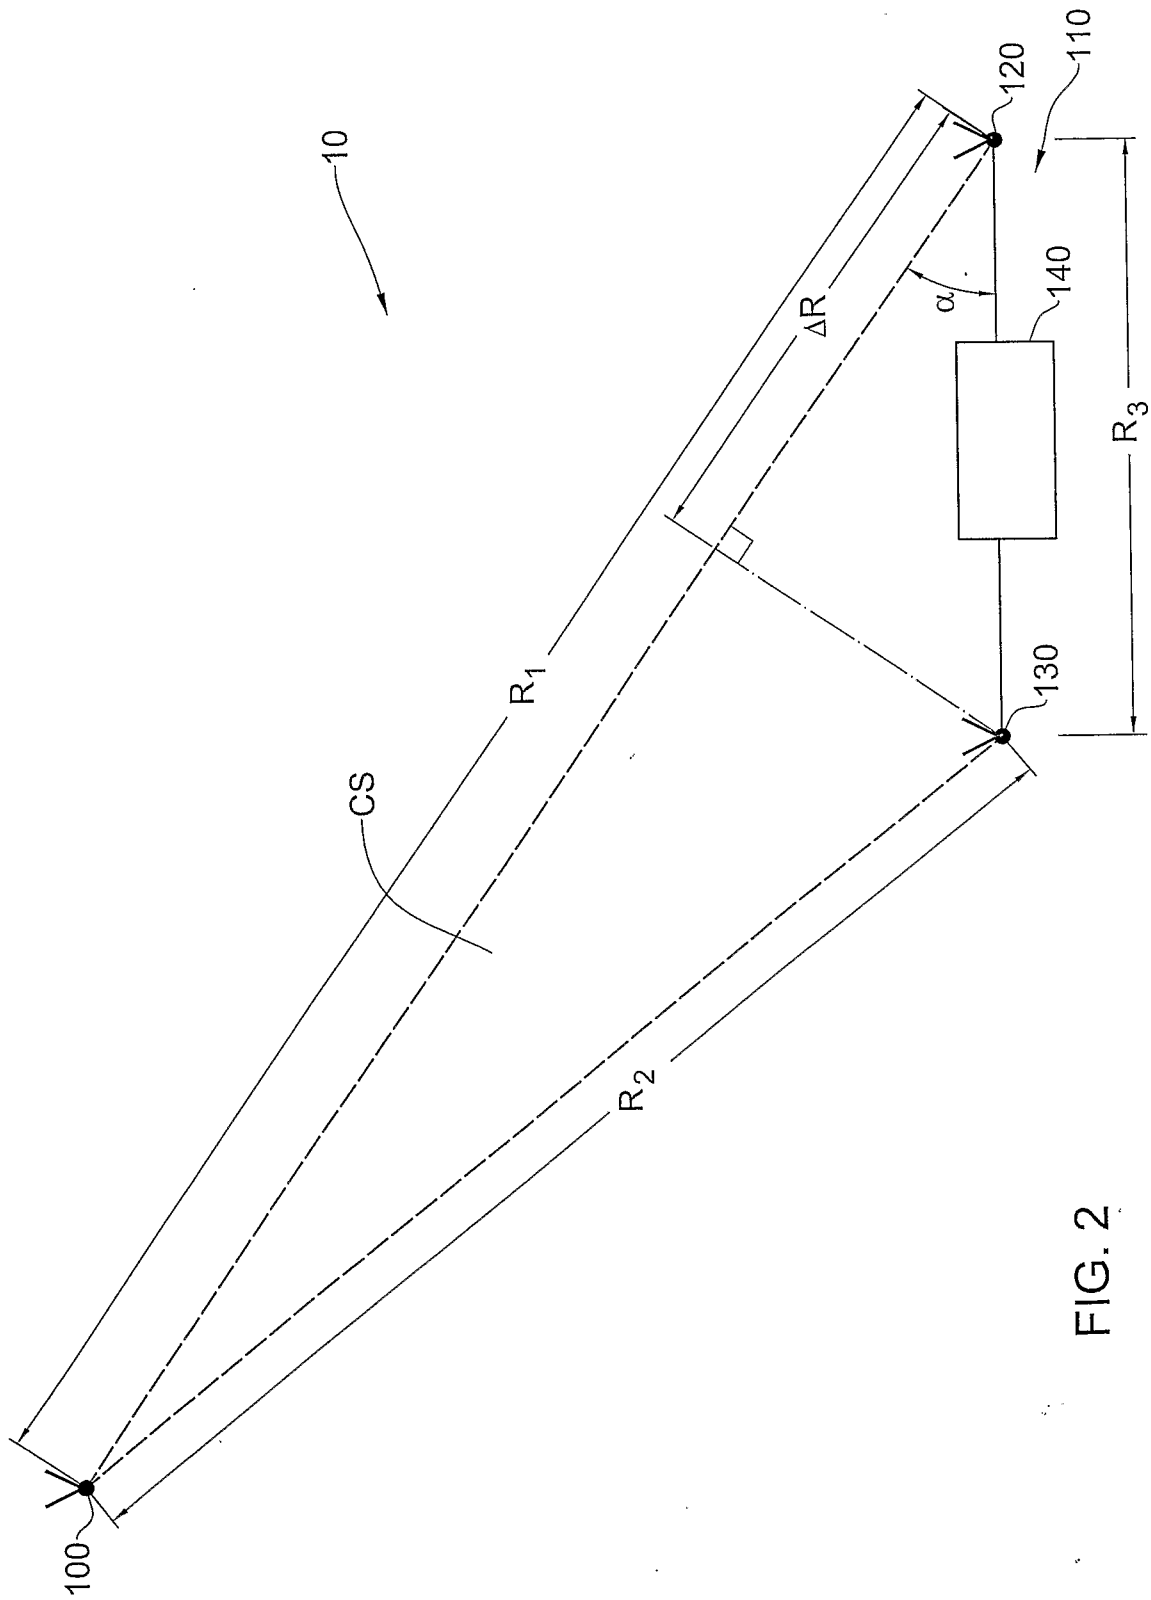


FIG. 1



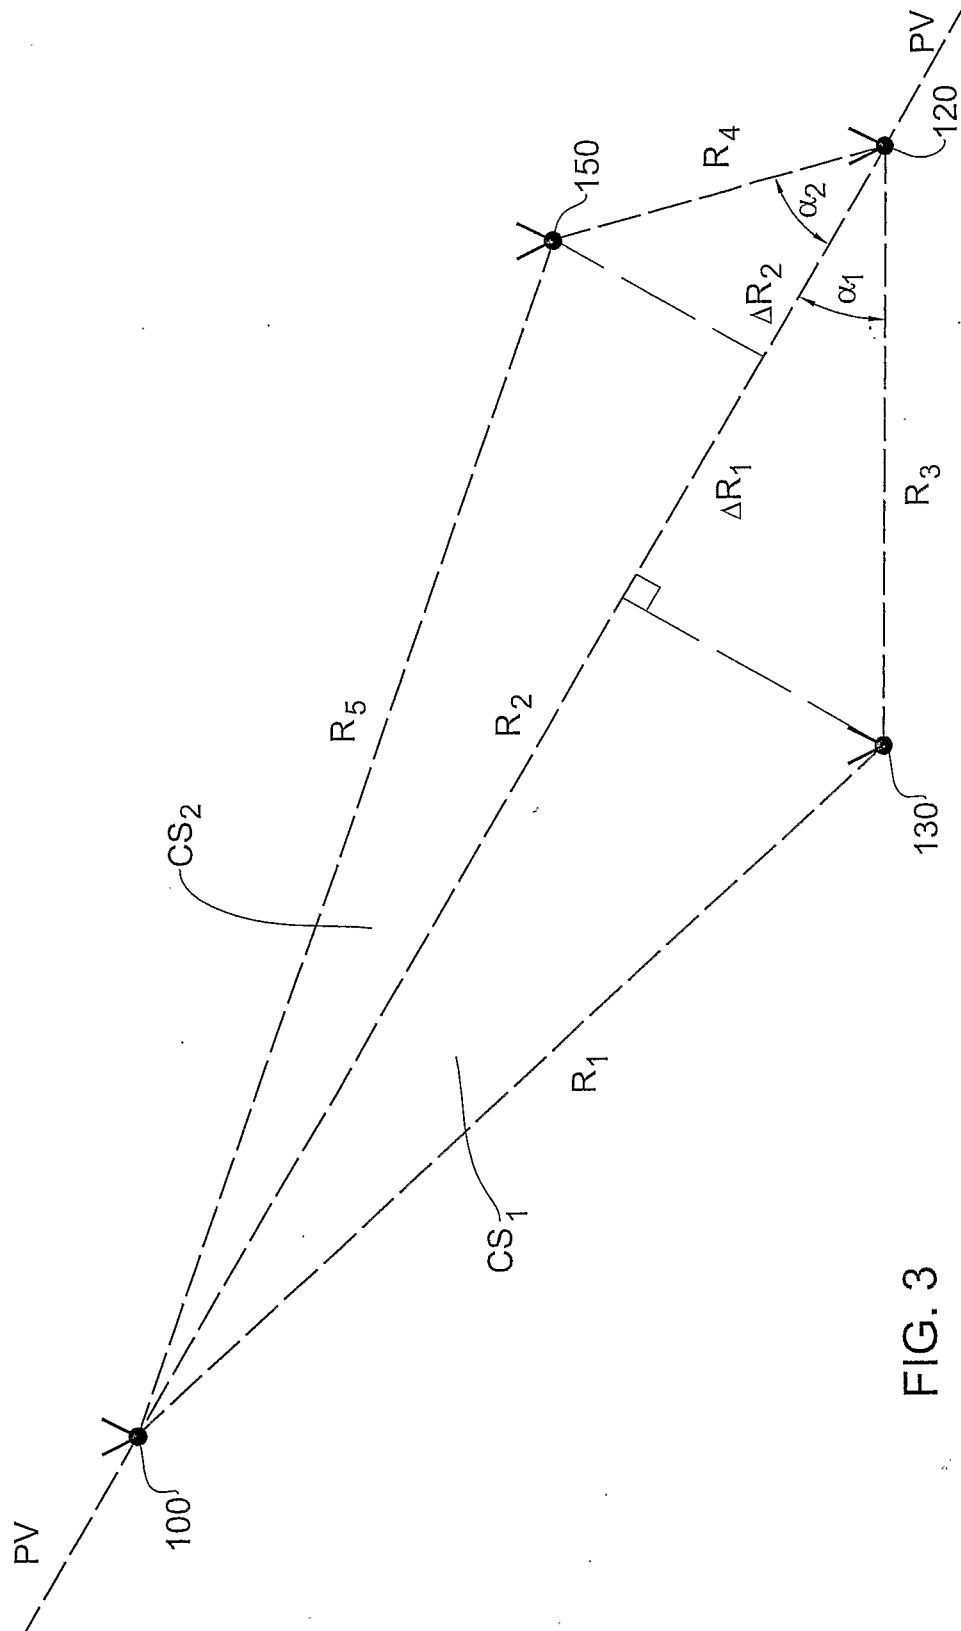


FIG. 3

4/8

400


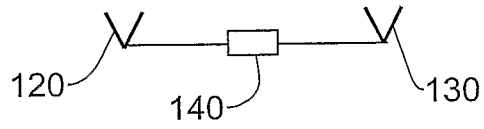



FIG. 4a

410

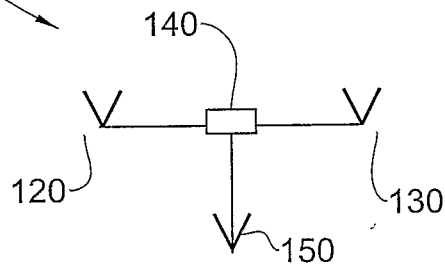



FIG. 4b

420


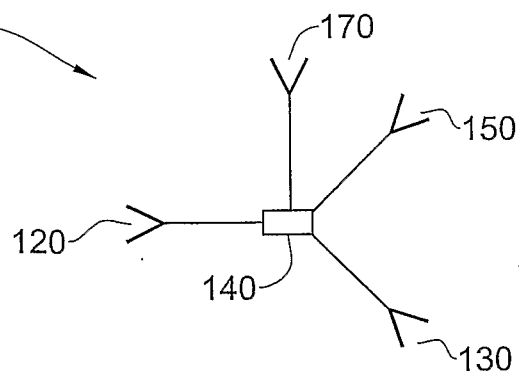



FIG. 4c

5/8

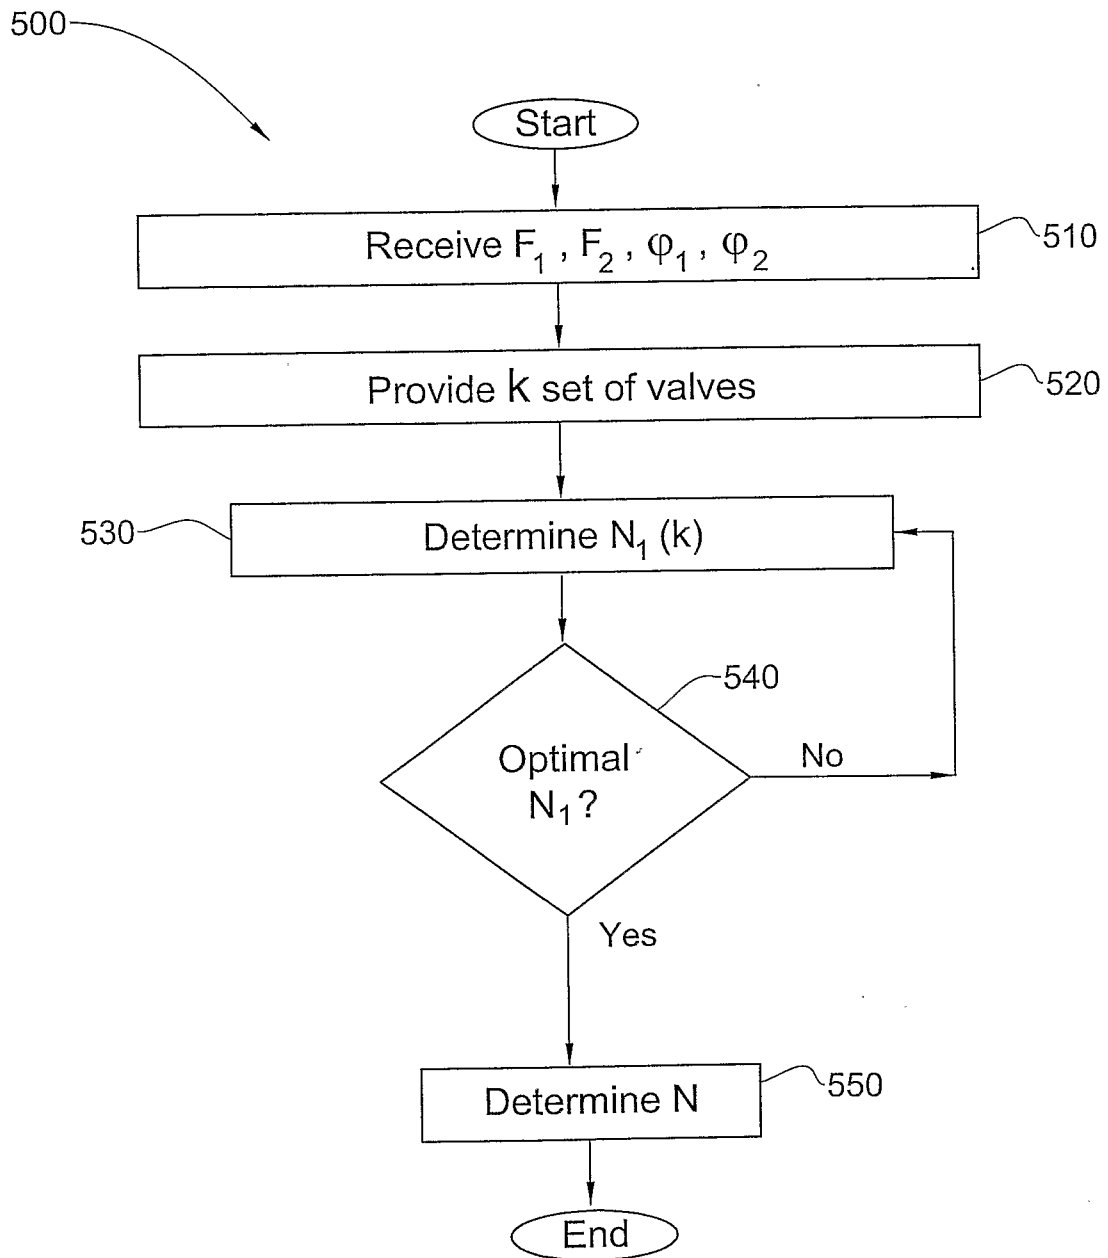


FIG. 5

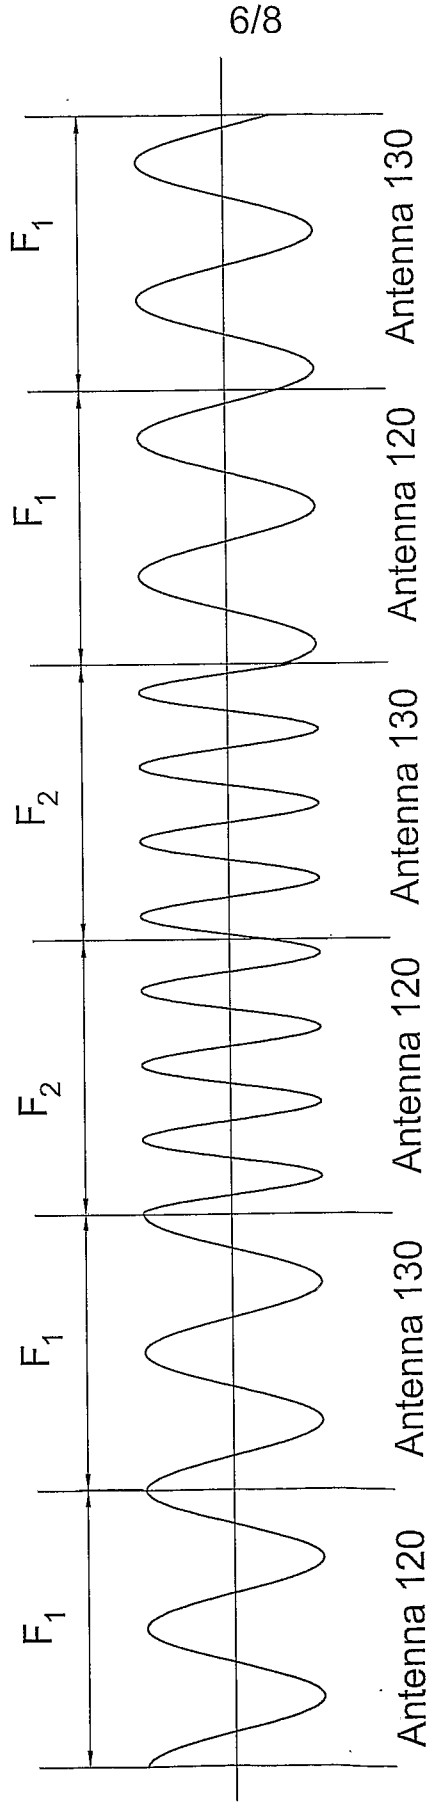


FIG. 6

7/8

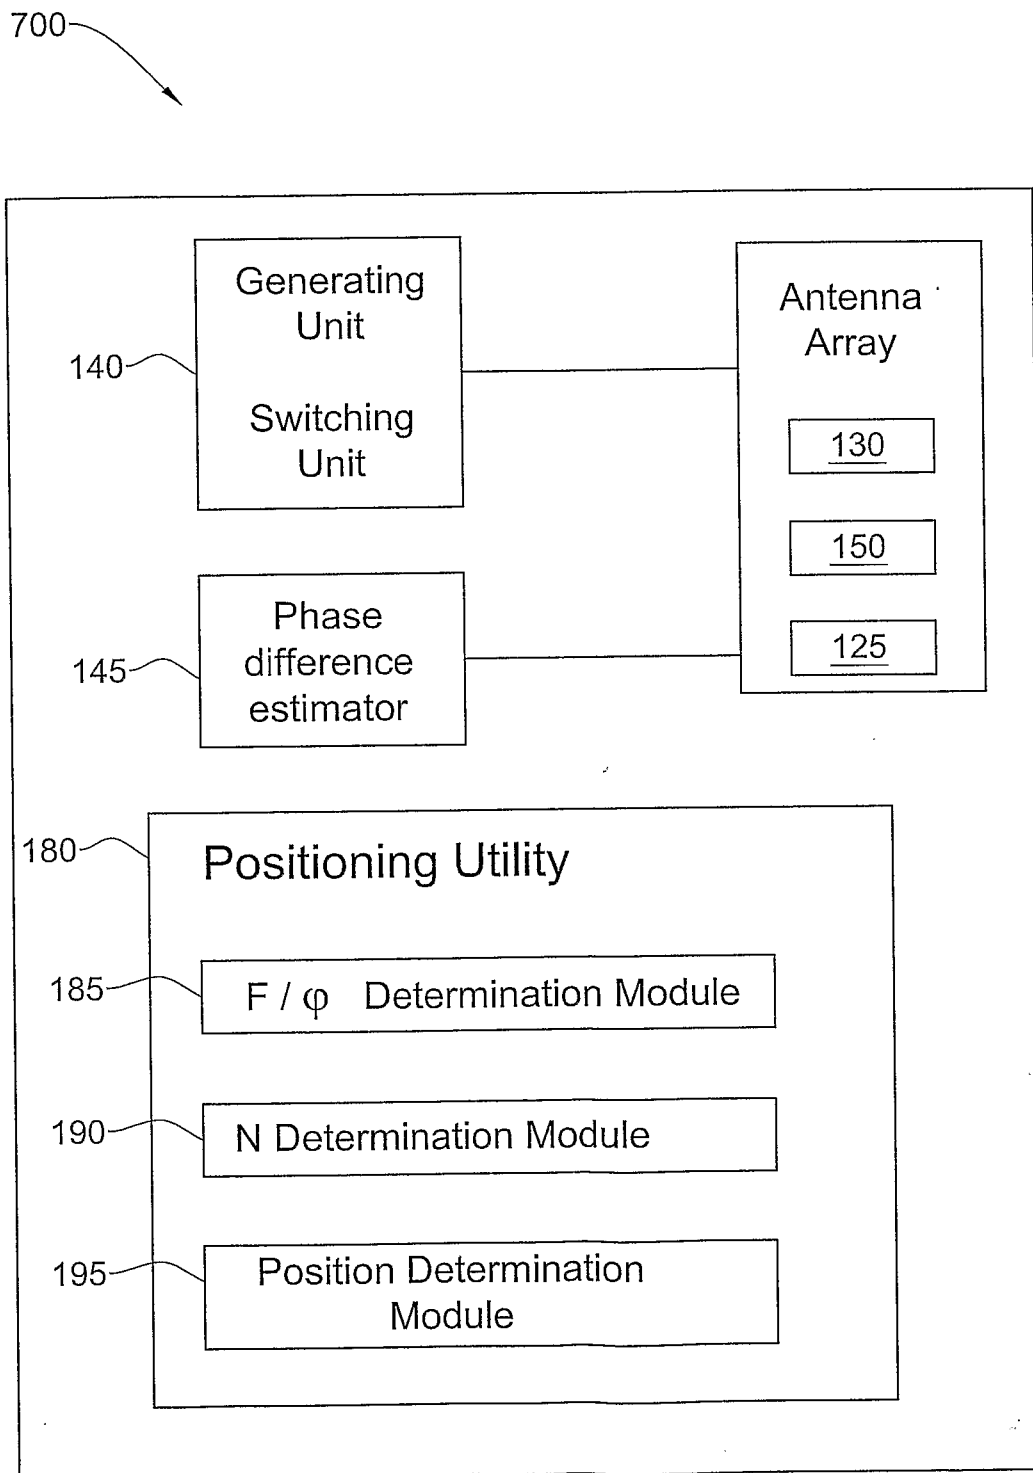


FIG. 7

8/8

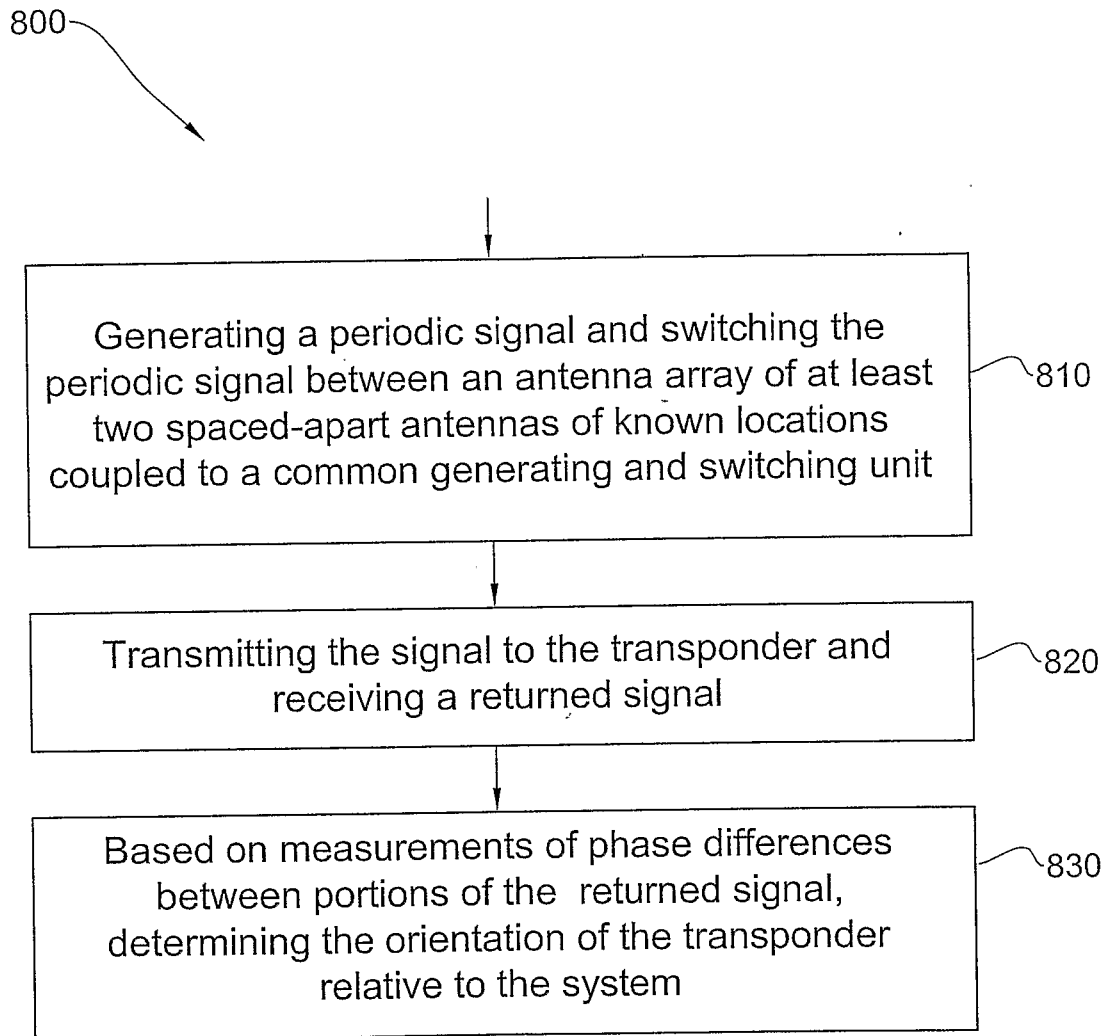


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No

PCT/IL2006/000861

A. CLASSIFICATION OF SUBJECT MATTER

INV. G01S13/87 G01S3/48

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 28 43 253 A1 (STANDARD ELEKTRIK LORENZ AG) 17 April 1980 (1980-04-17) the whole document	1-21
A	WO 86/00716 A (STIFTELSEN INST MIKROVAGS [SE]) 30 January 1986 (1986-01-30) the whole document	1-21
A	US 4 464 662 A (TOMASI JEAN-PIERRE [FR]) 7 August 1984 (1984-08-07) the whole document	1-21
A	US 2002/008656 A1 (LANDT JEREMY A [US]) 24 January 2002 (2002-01-24) the whole document	1-21



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

23 October 2006

Date of mailing of the international search report

06/11/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Johansson, Roland

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IL2006/000861

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 22
because they relate to subject matter not required to be searched by this Authority, namely:
Claim 22 contains a reference to the description and/or the drawings.
According to Rule 6.2(a) PCT, claims should not contain such references except where absolutely necessary, which is not the case here.
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IL2006/000861

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 2843253	A1	17-04-1980	NONE	
WO 8600716	A	30-01-1986	AU 567826 B2	03-12-1987
			AU 4600885 A	10-02-1986
			DE 3583131 D1	11-07-1991
			EP 0187809 A1	23-07-1986
			JP 4026715 B	08-05-1992
			JP 61502633 T	13-11-1986
			SE 442348 B	16-12-1985
			US 4728955 A	01-03-1988
US 4464662	A	07-08-1984	DE 3115678 A1	21-01-1982
			FR 2481465 A1	30-10-1981
			GB 2075301 A	11-11-1981
			JP 56168574 A	24-12-1981
US 2002008656	A1	24-01-2002	US 2003058155 A1	27-03-2003