

CHARGING DEVICE FOR ELECTROMOTIVE VEHICLE

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 **[0001]** The invention relates to a charging device for an electromotive vehicle and, more particularly, to charging control for charging an electrical storage device, equipped for an electromotive vehicle, by a power supply outside the vehicle.

2. Description of Related Art

10 **[0002]** An electric vehicle, a hybrid vehicle, a fuel cell vehicle, and the like, are known as electromotive vehicles that are configured to be able to generate vehicle driving force using electric power from an in-vehicle electrical storage device, typically, a secondary battery. There has been suggested an electromotive vehicle that is configured to charge an in-vehicle electrical storage device by a power supply outside the vehicle
15 (hereinafter, also simply referred to as "external power supply"). Hereinafter, charging the electrical storage device by the external power supply is also simply referred to as "external charging".

[0003] Japanese Patent Application Publication No. 2007-318970 (JP-A-2007-318970) describes that a charging device that converts electric power,
20 supplied from an external power supply, to electric power for charging an electrical storage device is formed of two alternating-current motors equipped for a hybrid vehicle and inverters and step-up converter for driving these alternating-current motors. The charging device described in JP-A-2007-318970 is configured to receive electric power from the external power supply via respective neutral points of the two
25 alternating-current motors.

[0004] In addition, Japanese Patent Application Publication No. 2009-33785 (JP-A-2009-33785) describes charging control in a power supply system of an electromotive vehicle, in which a plurality of pairs of electrical storage device and

converter are arranged in parallel with each other. Specifically, JP-A-2009-33785 describes control for charging each electrical storage device by keeping an upper arm element of a corresponding step-up chopper DC-DC converter circuit (converter) in an on state.

5 **[0005]** In the charging device described in JP-A-2007-318970, when electric power supplied from the external power supply is converted to electric power for charging the electrical storage device, there is a limit for increasing the charging efficiency because of a power loss in switching elements resulting from DC-DC conversion operation or an iron loss and copper loss of a smoothing inductor.

10 **[0006]** JP-A-2009-33785 describes that the electrical storage device is charged with the increased efficiency of each chopper DC-DC converter circuit in such a manner that the upper arm element of any one of the DC-DC converter circuits is kept in an on state, but JP-A-2009-33785 does not specifically describe under what condition such charging control should be applied. However, depending on the state of external
15 charging, when the upper arm element of any one of the DC-DC converter circuits is kept in an on state, there may occur a case where efficiency in elements other than the DC-DC converter circuit decreases or a case where excessive current occurs.

SUMMARY OF THE INVENTION

20 **[0007]** The invention provides an electrical storage device that is equipped for an electromotive vehicle and that may be charged with electric power from an external power supply with high efficiency.

[0008] An aspect of the invention relates to a charging device for an electromotive vehicle equipped with an electrical storage device. The charging device
25 includes a first electric power converter, a second electric power converter, and a control device that is used to control the first and second electric power converters. The first electric power converter converts an alternating-current voltage, supplied from an external power supply, to a direct-current voltage higher than a peak voltage of the alternating-current voltage, and outputs the direct-current voltage to a first power supply

line. The second electric power converter, during external charging for charging the electrical storage device by the external power supply, is used to convert a direct-current electric power between the first power supply line and a second power supply line that is electrically connected to a positive electrode of the electrical storage device. The second electric power converter includes a first switching element that is electrically connected between a first node and the first power supply line and a first inductor that is electrically connected between the first node and the second power supply line. During the external charging, the control device selects any one of a first control mode in which the electrical storage device is charged through on/off control over the first switching element and a second control mode in which the electrical storage device is charged while the first switching element is kept in an on state, on the basis of a state of the external charging.

[0009] The control device may select the second control mode when a voltage of the electrical storage device is higher than the peak voltage of the alternating-current voltage.

[0010] In addition, the control device may select the second control mode when a charging electric power for charging the electrical storage device is lower than a predetermined level.

[0011] Furthermore, the first electric power converter may include a rectifier, a second inductor, a first diode and a second switching element. The rectifier may rectify the alternating-current voltage supplied from the external power supply and then output the rectified voltage to a third power supply line. The second inductor may be electrically connected between the third power supply line and a second node. The first diode may be electrically connected between the second node and the first power supply line so that a direction from the second node to the first power supply line is set as a forward direction. The second switching element may be electrically connected between the second node and a fourth power supply line that is electrically connected to a negative electrode of the electrical storage device. The control device may control on/off states of the second switching element so that a current that passes through the

second inductor coincides with a target current. The target current is an absolute value of an alternating current of which a phase coincides with a phase of the alternating-current voltage. Furthermore, the control device may control an amplitude of the target current on the basis of a voltage of the first power supply line in the first control mode, and may keep the amplitude of the target current constant irrespective of the voltage of the first power supply line in the second control mode.

[0012] In addition, in the first control mode, the control device may control a duty ratio of on/off states of the first switching element on the basis of a difference between a charging current for charging the electrical storage device and a target charging current.

[0013] Alternatively, when the state of the external charging satisfies a predetermined condition that the second control mode is applicable while the first control mode is selected, the control device may change from the first control mode to the second control mode after a voltage of the first power supply line has decreased to a voltage of the electrical storage device.

[0014] In the above described configuration, when the state of the external charging satisfies the predetermined condition, the control device may stop the first and second electric power converters and decrease the voltage of the first power supply line by discharging using a discharging resistor. Alternatively, when the state of the external charging satisfies the predetermined condition, the control device may decrease a target voltage of the voltage of the first power supply line, supplied to the second electric power converter, to the voltage of the electrical storage device.

[0015] According to the aspect of the invention, by appropriately applying charging control that keeps on/off states of a DC-DC conversion switching element on the basis of a state of external charging, it is possible to charge with high efficiency an electrical storage device equipped for an electromotive vehicle with electric power from an external power supply.

[0016] Features, advantages, and technical and industrial significance of exemplary embodiments of the invention will be described below with reference to the accompanying drawings, in which like numerals denote like elements, and wherein:

FIG. 1 is a circuit diagram for illustrating a configuration example of a charging device for an electromotive vehicle according to an embodiment;

FIG. 2 is a flowchart that illustrates external charging control executed by the charging device for an electromotive vehicle according to the embodiment;

FIG. 3 is a first waveform chart for illustrating external charging operation in a normal control mode;

FIG. 4 is a second waveform chart for illustrating external charging operation in the normal control mode;

FIG. 5 is a first waveform chart for illustrating external charging operation in an upper arm ON control mode;

FIG. 6 is a second waveform chart for illustrating external charging operation in the upper arm ON control mode;

FIG. 7 is a functional block diagram for illustrating the control configuration of external charging control executed by the charging device for an electromotive vehicle according to the embodiment;

FIG. 8 is a first waveform chart for illustrating an example of a change from the normal control mode to the upper arm ON control mode;

FIG. 9 is a second waveform chart for illustrating an example of a change from the normal control mode to the upper arm ON control mode;

FIG. 10 is a waveform chart for illustrating a first example of control operation at the time of a change from the normal control mode to the upper arm ON control mode; and

FIG. 11 is a waveform chart for illustrating a second example of control operation at the time of a change from the normal control mode to the upper arm ON control mode.

DETAILED DESCRIPTION OF EMBODIMENTS

[0017] Hereinafter, an embodiment of the invention will be described in detail with reference to the accompanying drawings. Note that like reference numerals denote the same or corresponding components in the drawings and the description thereof will not be repeated basically.

5 [0018] FIG. 1 is a circuit diagram for illustrating a configuration example of a charging device for an electromotive vehicle according to the embodiment of the invention.

[0019] As shown in FIG. 1, an electromotive vehicle 100 includes a main battery 10, a current sensor 12, a battery sensor 15, a battery monitoring unit 20, a system main
10 relay 30, a DC-DC converter 40, an auxiliary battery 45 and a driving device 50. As described above, the electromotive vehicle 100 is configured to be able to generate vehicle driving force using electric power from the main battery 10. The electromotive vehicle 100 includes an electric vehicle, a hybrid vehicle and a fuel cell vehicle.

[0020] The main battery 10 is illustrated as a typical example of an "electrical
15 storage device". The main battery 10 is typically formed of a secondary battery, such as a lithium ion battery and a nickel metal hydride battery. For example, the output voltage of the main battery 10 is about 200 V. Alternatively, the "electrical storage device" may be, for example, formed of an electric double layer capacitor or may be formed of a combination of a secondary battery and a capacitor.

20 [0021] The current sensor 12 detects the output current (hereinafter, also referred to as battery current) IB of the main battery 10, and transmits the detected battery current IB to the battery monitoring unit 20. Hereinafter, the battery current IB during charging is indicated by positive value. The battery sensor 15 is attached to the main battery 10, and detects a battery voltage VB and a battery temperature TB. The battery
25 voltage VB and the battery temperature TB detected by the battery sensor 15 are transmitted to the battery monitoring unit 20.

[0022] The battery monitoring unit 20 monitors the state of the main battery 10 on the basis of the battery current IB, the battery voltage VB and the battery temperature TB. Typically, the battery monitoring unit 20 calculates a state of charge (SOC) that is

indicated by the ratio (0 to 100%) of a current amount of charge to a full charge capacity in the main battery 10. In addition, the battery monitoring unit 20 sets the charging electric power upper limit value and discharging electric power upper limit value of the main battery 10 on the basis of the state of the main battery 10.

5 **[0023]** The driving device 50 includes a motor generator (MG) (not shown) and an electric power converter (inverter/converter) (not shown). The motor generator (MG) is used to generate vehicle driving force using electric power from the main battery 10. The electric power converter (inverter/converter) is used to drive the motor generator. In addition, the motor generator (MG) operates as a generator that converts
10 deceleration energy to electric energy during regenerative braking of the electromotive vehicle 100. Regenerated electric power is converted to electric power for charging the main battery 10 by the electric power converter (inverter/converter).

[0024] The system main relay 30 is connected in a current-carrying path between the main battery 10 and the driving device 50. The system main relay 30 is
15 basically turned on while the vehicle is traveling; whereas the system main relay 30 is turned off during external charging. However, during external charging, when it is required to operate an auxiliary system, the system main relay 30 may be turned on through user's operation, or the like.

[0025] The DC-DC converter 40 is connected to the system main relay 30 in
20 parallel with the driving device 50. The DC-DC converter 40 steps down the output voltage of the main battery 10 to the power supply voltage of the auxiliary system (for example, about 12 V). The DC-DC converter 40 is typically a switching regulator that includes semiconductor switching elements (not shown). A selected known circuit configuration may be applied to the DC-DC converter 40.

25 **[0026]** The auxiliary battery 45 is charged with the output voltage of the DC-DC converter 40. An auxiliary load (not shown) is connected to the auxiliary battery 45. The auxiliary load includes an audio device, compact motors, an electronic control unit (ECU), and the like, that operate on electric power supplied from the auxiliary battery 45.

[0027] When the system main relay 30 is turned on, the electric power of the

main battery 10 is supplied to the driving device 50 and the DC-DC converter 40. On the other hand, when the system main relay 30 is turned off, the auxiliary system, including the DC-DC converter 40, and the driving device 50 are electrically isolated from the main battery 10.

5 **[0028]** Next, a configuration for external charging will be described in detail. The electromotive vehicle 100 further includes an external charging relay 60 and a charging device 200. The charging device 200 has an inlet 205 for external charging.

10 **[0029]** The external charging relay 60 is turned off while the electromotive vehicle 100 is traveling; whereas the external charging relay 60 is turned on during external charging. The inlet 205 is electrically connected to an external power supply 500 via a charging cable 400. The external power supply 500 is typically a commercial system power supply.

15 **[0030]** The charging device 200 converts alternating-current electric power, supplied from the external power supply 500, to direct-current electric power for charging the main battery 10.

[0031] The charging device 200 includes a DC-DC converter 210, a smoothing capacitor 220, an AC-DC converter 250, a control device 300, voltage sensors 302 and 307 and a current sensor 305.

20 **[0032]** The control device 300 is formed of an electronic control unit (ECU) that incorporates a central processing unit (CPU) (not shown) and a memory. The control device 300 is configured to execute operations using values detected by the sensors on the basis of maps and programs stored in the memory. Alternatively, at least part of the ECU may be configured to execute predetermined numerical/logical operations by hardware, such as an electronic circuit.

25 **[0033]** The voltage sensor 302 detects an alternating-current voltage *vac* input from the external power supply 500 via the inlet 205.

[0034] The AC-DC converter 250 is formed of a non-isolated electric power converter. The AC-DC converter 250 converts the alternating-current voltage *vac* (hereinafter, also referred to as power supply voltage *vac*), supplied from the external

power supply 500, to direct-current voltage and then outputs the direct-current voltage to a power supply line PL1. The smoothing capacitor 220 is electrically connected between the power supply line PL1 and a ground line GL. The voltage sensor 307 detects the voltage of the power supply line PL1, that is, the direct-current voltage vdc of the smoothing capacitor 220.

[0035] The DC-DC converter 210 is formed of a non-isolated electric power converter, and converts direct-current electric power between the power supply line PL1 and a power supply line PL2. The power supply line PL2 is electrically connected to the positive electrode of the main battery 10 when the external charging relay 60 is turned on. Similarly, the ground line GL is electrically connected to the negative electrode of the main battery 10 when the external charging relay 60 is turned on.

[0036] The DC-DC converter 210 has a so-called step-up chopper configuration. Specifically, the DC-DC converter 210 includes power semiconductor switching elements Q1 and Q2, an inductor LI and a capacitor CI. Each power semiconductor switching element (hereinafter, also simply referred to as "switching element") may be an insulated gate bipolar transistor (IGBT), a power metal oxide semiconductor (MOS) transistor, a power bipolar transistor, or the like. Antiparallel diodes D1 and D2 are respectively connected to the switching elements Q1 and Q2.

[0037] The switching element Q1 is electrically connected between the power supply line PL1 and a node N1. The switching element Q2 is electrically connected between the node N1 and the ground line GL. The on/off states of each of the switching elements Q1 and Q2 are controlled by a control signal from the control device 300.

[0038] The inductor LI is electrically connected between the node N1 and the power supply line PL2. Hereinafter, the passing current of the inductor LI is referred to as current IL. The capacitor CI is connected between the power supply line PL2 and the ground line GL. The capacitor CI removes a high-frequency component included in the current IL.

[0039] It may be considered that the DC-DC converter 210 corresponds to a "second electric power converter", the switching element Q1 corresponds to a "first

switching element" and the inductor LI corresponds to a "first inductor".

[0040] The AC-DC converter 250 includes a capacitor CO, an inductor L2, a switching element Q3, an antiparallel diode D3, a diode D4 and diodes D5 to D8. The diodes D5 to D8 constitute a diode bridge.

5 [0041] The capacitor CO removes the high-frequency component of a power supply current i_{ac} supplied from the external power supply 500. The diodes D5 to D8 constitute the diode bridge, rectify the power supply voltage v_{ac} supplied from the external power supply 500, and outputs the rectified power supply voltage v_{ac} to a power supply line PL3. The inductor L2 is electrically connected between the power supply
10 line PL3 and the node N2. The current sensor 305 detects the passing current i_L of the inductor L2.

[0042] The switching element Q3 is electrically connected between the node N2 and the ground line GL. The antiparallel diode D3 is connected to the switching element Q3. The diode D4 is connected between the node N2 and the power supply line
15 PL1 so that the direction from the node N2 toward the power supply line PL1 is set as a forward direction.

[0043] It may be considered that the AC-DC converter 250 corresponds to a "first electric power converter". It may be considered that the switching element Q3 corresponds to a "second switching element" and the diode D4 corresponds to a "first
20 diode". In addition, it may be considered that the diode bridge formed of the diodes D5 to D8 corresponds to a "rectifier".

[0044] The control device 300 controls external charging using the AC-DC converter 250 and the DC-DC converter 210 on the basis of the battery current I_B and the battery voltage V_B (or/and the SOC) from the battery monitoring unit 20, the power
25 supply voltage v_{ac} from the voltage sensor 302, the current i_L from the current sensor 305 and the direct-current voltage v_{dc} from the voltage sensor 307. Specifically, the control device 300 acquires the state of external charging through the above described voltages and currents, and generates control signals for the switching elements Q1 to Q3 so as to appropriately control external charging of the main battery 10.

[0045] FIG. 2 is a flowchart that illustrates external charging control executed by the charging device for an electromotive vehicle according to the embodiment.

[0046] As shown in FIG 2, the control device 300 determines in step SI00 whether a condition for starting external charging is satisfied. For example, when the charging cable 400 is properly connected to the inlet 205 and external charging is instructed by user's instructions, or the like, affirmative determination is made in step S100.

[0047] When the condition for starting external charging is satisfied (YES in S100), the control device 300 starts external charging in step S200. In step S200, for example, the external charging relay 60 is turned on.

[0048] During external charging, the control device 300 determines in step S300 whether a condition that upper arm ON control, which will be described in detail later, is applicable is satisfied on the basis of the state of external charging. Then, when the condition is not satisfied (negative determination is made in S300), the control device 300 proceeds with the process to step S400, and then controls the charging device 200 in a normal control mode. On the other hand, when the condition is satisfied (affirmative determination is made in S300), the control device 300 proceeds with the process to step S450, and then controls the charging device 200 in an upper arm ON control mode. The control device 300 determines in step S500 whether the charging of the main battery 10 through external charging, to which the normal control mode (S400) or the upper arm ON control mode (S450) is applied, has been completed. For example, when the SOC of the main battery 10 has reached a predetermined level or when the charging end time specified by the user has come, affirmative determination is made in step S500.

[0049] Until completion of charging (while negative determination is made in S500), the control device 300 repeats the processes of steps S300 to S500 to continue external charging of the main battery 10. On the other hand, when charging has been completed (when affirmative determination is made in S500), the control device 300 proceeds with the process to step S510 and then ends external charging. In step S510, for example, the external charging relay 60 is turned off.

[0050] In this way, in the charging device for an electromotive vehicle according to the present embodiment, normal control or upper arm ON control is selectively applied on the basis of the state of external charging. Next, the details of normal control and upper arm ON control will be described.

5 [0051] FIG. 3 is a waveform chart for illustrating the operation of the charging device 200 in the normal control mode.

[0052] As shown in FIG. 3, the power supply voltage v_{ac} supplied from the external power supply 500 is an alternating-current voltage of a predetermined frequency (hereinafter, referred to as "power supply frequency"). In the AC-DC converter 250, the
10 current i_L of the inductor L2 increases during an on period of the switching element Q3; whereas the current i_L of the inductor L2 reduces during an off period of the switching element Q3. Through on/off control over the switching element Q3, the current i_L of the inductor L2 may be brought into coincidence with a target current i_L^* . Furthermore, direct current supplied to the power supply line PL1 via the diode D4 may be controlled
15 on the basis of the magnitude of the target current i_L^* . That is, the AC-DC converter 250 controls AC-DC conversion from the power supply voltage v_{ac} , supplied from the external power supply 500, to the direct-current voltage v_{dc} of the power supply line PL1.

[0053] Here, when the target current i_L^* is set to the absolute value of
20 alternating current having the same phase as the power supply voltage v_{ac} , the power supply current i_{ac} and the power supply voltage v_{ac} have the same phase, so the power factor of electric power supplied from the external power supply 500 may be approximated to 1. By so doing, an instantaneous electric power V_A expressed by the product of the power supply current i_{ac} and the power supply voltage v_{ac} is constantly a
25 positive value, so an effective electric power P_e that is the average value of the instantaneous electric power V_A increases. That is, the AC-DC converter 250 is able to not only carry out AC-DC conversion but also operate as a power factor correction (PFC) circuit.

[0054] The smoothing capacitor 220 is charged with current supplied from the

AC-DC converter 250 via the diode D4. In addition, current discharged from the smoothing capacitor 220 is supplied to the main battery 10 via the DC-DC converter 210 to charge the main battery 10.

[0055] Through these charging and discharging, the voltage of the smoothing capacitor 220, that is, the direct-current voltage v_{dc} , fluctuates at a frequency that is twice as high as the power supply frequency. The electric power P_c charged into or discharged from the smoothing capacitor 220 fluctuates at a frequency that is twice as high as the power supply frequency, as in the case of the direct-current voltage v_{dc} .

[0056] Note that, as will be described in detail later, the magnitude (amplitude) of the target current i_L^* in the AC-DC converter 250 is controlled so as to bring the direct-current voltage v_{dc} into coincidence with a target voltage v_{dc}^* . The target voltage v_{dc}^* during external charging is set so as to be at least higher than the peak value of the power supply voltage v_{ac} (for example, about 300 to 400 V).

[0057] As shown in FIG. 4, the DC-DC converter 210 controls the current I_L and, by extension, the battery current I_B through on/off control over the switching element Q1. Note that, in the DC-DC converter 210, the switching elements Q1 and Q2 are turned on or off complementarily. That is, the switching element Q2 is turned off during an on period of the switching element Q1, and the switching element Q2 is turned on during an off period of the switching element Q1.

[0058] As shown in FIG. 4, the current I_L increases during an on period of the switching element Q1, and the current I_L decreases during an off period of the switching element Q1. Thus, the average value of the current I_L may be controlled by the duty ratio of the switching element Q1.

[0059] Referring back to FIG 3, the main battery 10 is charged with the battery current I_B that is obtained in such a manner that a ripple component is removed by the capacitor C1 from the current I_L controlled by the DC-DC converter 210. The battery current I_B corresponds to the average value of the current I_L . The DC-DC converter 210 controls the duty ratio of the switching element Q1 so as to bring the current I_L into coincidence with a target charging current I_B^* .

[0060] Referring back to FIG. 1, the DC-DC converter 210 does not necessarily include the switching element Q2 in order to handle current control only in one direction to charge the main battery 10 from the external power supply 500. That is, only the diode D2 just needs to be present in the lower arm. However, by providing the
5 switching element Q2, the output voltage of the main battery 10 may be increased to charge the smoothing capacitor 220. That is, the flexibility of control over external charging (particularly, at the time of a start of charging) improves.

[0061] As shown in FIG. 3 and FIG. 4, in the normal control mode, the AC-DC converter 250 converts the power supply voltage v_{ac} from the external power supply 500
10 to the direct-current voltage (v_{dc}) higher than the peak value of the power supply voltage v_{ac} , and then outputs the direct-current voltage (v_{dc}) to the power supply line PL1. Then, the DC-DC converter 210 adjusts the battery current I_B of the main battery 10 to the target charging current I_B^* in such a manner that direct-current electric power between the power supply lines PL1 and PL2 is converted through on/off control over the
15 switching element Q1.

[0062] Next, the operation of the charging device 200 during upper arm ON control will be described with reference to FIG. 5 and FIG. 6.

[0063] As shown in FIG. 5, in the upper arm ON control mode, the DC-DC converter 210 keeps the switching element Q1 in an on state. On the other hand, the
20 switching element Q2 is kept in an off state. Thus, the power supply lines PL1 and PL2 are constantly electrically connected.

[0064] As a result, current and voltage are not controlled in the DC-DC converter 210, and the current $I(Q1)$ that passes through the switching element Q1 and the current I_L of the inductor LI each include a fluctuating component of a frequency that
25 is twice as high as the power supply frequency. The fluctuating component is generated when AC-DC conversion is performed in the AC-DC converter 250.

[0065] As shown in FIG. 6, the AC-DC converter 250 operates as in the case of the normal control mode, and converts the power supply voltage v_{ac} , supplied from the external power supply 500, to the direct-current voltage (v_{dc}) that is higher than the peak

value of the power supply voltage v_{ac} .

[0066] In the upper arm ON control mode, the main battery 10 is connected to the smoothing capacitor 220 via the switching element Q1 that is kept in an on state, so the direct-current voltage v_{dc} is equal to the battery voltage V_B . Then, the smoothing capacitor 220 does not function as an electric power buffer, but the current supplied from the AC-DC converter 250 directly becomes the battery current I_B for charging the main battery 10. Thus, in the AC-DC converter 250, the magnitude (amplitude) of the target current i_L^* (FIG. 3) is not controlled on the basis of the direct-current voltage v_{dc} but is set as a constant corresponding to the target charging current I_B^* .

[0067] Current supplied from the AC-DC converter 250 to the power supply line PL1 includes a ripple component of a frequency that is twice as high as the power supply frequency, as in the case of the normal control mode. The ripple component is directly superimposed on the current I_L of the DC-DC converter 210, the current $I(Q1)$ of the switching element Q1 shown in FIG 5 and the battery current I_B of the main battery 10.

[0068] FIG. 7 is a block diagram for illustrating the control configuration of external charging control. Note that the functional blocks shown in FIG. 7 may be formed of a circuit (hardware) that has functions corresponding to the blocks or may be implemented in such a manner that the ECU executes software processing in accordance with preset programs.

[0069] As shown in FIG 7, the control device 300 includes a control unit 320 for controlling the AC-DC converter 250, a control mode selecting unit 340 and a control unit 350 for controlling the DC-DC converter 210.

[0070] The control unit 320 includes subtraction units 322, 328 and 334, PI operation units 324 and 332, a control switch 330, a multiplication unit 326 and a PWM control unit 336.

[0071] The subtraction unit 322 subtracts the direct-current voltage v_{dc} detected by the voltage sensor 307 from the target voltage v_{dc}^* of the direct-current voltage v_{dc} . The PI operation unit 324 executes proportional integral operation based on a voltage difference Δv_{dc} computed by the subtraction unit 322. It may be considered that a

control operation value derived from the PI operation unit 324 corresponds to a feedback operation value for bringing the direct-current voltage v_{dc} into coincidence with the target voltage v_{dc}^* .

[0072] The control switch 330 is controlled in accordance with a control signal S_m from the control mode selecting unit 340. When the normal control mode is instructed by the control signal S_m , the control switch 330 is controlled to the "a" side and sets a control operation value, derived from the PI operation unit 324, to a target current amplitude i_{LA}^* . On the other hand, when the upper arm ON control mode is instructed by the control signal S_m , the control switch 330 is controlled to the "b" side and sets a constant I_{const} , which is determined in correspondence with the target charging current I_B^* and is not dependent on feedback operation, to the target current amplitude i_{LA}^* .

[0073] The multiplication unit 326 multiplies the target current amplitude i_{LA}^* , selected by the control switch 330, by a sine function $|\sin \omega t|$ to calculate the target current i_L^* . ω corresponds to the power supply frequency of the external power supply 500.

[0074] The subtraction unit 328 computes a current difference A_{iL} between the target current i_L^* calculated by the multiplication unit 326 and the current i_L detected by the current sensor 305. The PI operation unit 332 executes proportional integral operation based on the current difference A_{iL} computed by the subtraction unit 328. The subtraction unit 334 subtracts the control operation value, derived from the PI operation unit 332, from the absolute value $|v_{ac}|$ of the power supply voltage to set a control command value.

[0075] The PWM control unit 336 generates an on/off control signal for the switching element Q3 on the basis of a comparison between a carrier signal 337 of a predetermined frequency and the control command value 338 from the subtraction unit 334. Specifically, in accordance with general pulse width modulation (PWM) control, the switching element Q3 is turned on when the control command value 338 is higher than the voltage of the carrier signal 337; whereas the switching element Q3 is turned off when the control command value 338 is lower than the voltage of the carrier signal 337.

[0076] The control unit 350 includes a subtraction unit 352, a PI operation unit 354, a PWM control unit 356, a control switch 360 and a reverser 362.

[0077] The subtraction unit 352 subtracts the battery current IB from the target charging current IB* of the main battery 10. The PI operation unit 354 generates a control command value by proportional integral operation based on the current difference ΔIB computed by the subtraction unit 352. It may be considered that the control command value generated by the PI operation unit 354 corresponds to a feedback operation value for bringing the battery current IB into coincidence with the target charging current IB*.

[0078] The PWM control unit 356 generates a control pulse CP on the basis of a comparison between a carrier signal 357 of a predetermined frequency and the control command value 358 from the PI operation unit 354. The control pulse CP is a pulse-like signal having a duty ratio DT of 0 to 1.0.

[0079] The control switch 360 is controlled in accordance with the control signal Sm from the control mode selecting unit 340. When the normal control mode is instructed by the control signal Sm, the control switch 360 is controlled to the "a" side, and outputs the control pulse CP, supplied from the PWM control unit 356, as an on/off control signal for the switching element Q1.

[0080] On the other hand, when the upper arm ON control mode is instructed by the control signal Sm, the control switch 360 is controlled to the "b" side. At this time, the control switch 360 outputs a signal that is kept at a logical high level (that is, DT = 1.0) as an on/off control signal for the switching element Q1 in order to keep the switching element Q1 in an on state.

[0081] The reverser 362 inverts the logical level of the on/off control signal for the switching element Q1 to generate an on/off control signal for the switching element Q2.

[0082] The control mode selecting unit 340 determines whether upper arm ON control is applicable on the basis of the state of external charging of the main battery 10. When the condition that upper arm ON control is applicable is satisfied, the control mode

selecting unit 340 generates the control signal S_m so as to select the upper arm ON control mode. On the other hand, when the condition that upper arm ON control is applicable is not satisfied, the control signal S_m is set so as to select the normal control mode.

5 **[0083]** For example, the control mode selecting unit 340 determines whether upper arm ON control is applicable on the basis of a comparison between the battery voltage V_B and the peak value (amplitude value) of the power supply voltage v_{ac} from the external power supply 500.

10 **[0084]** In the upper arm ON control mode, the main battery 10 and the power supply line PL1 are kept connected by the switching element Q1, so the battery voltage V_B is equal to the direct-current voltage v_{dc} . Therefore, in the non-isolated AC-DC converter 250, when the battery voltage V_B is lower than the peak value (amplitude value) of the power supply voltage v_{ac} , the power supply current i_{ac} from the external power supply 500 cannot be accurately controlled. As a result, there is a concern that
15 current that flows through the charging device 200 and charging current (battery current I_B) become excessive or the efficiency decreases because the power factor cannot be improved by the AC-DC converter 250.

20 **[0085]** Thus, when the battery voltage V_B is higher than the peak value of the power supply voltage v_{ac} , the control mode selecting unit 340 determines that upper arm ON control is applicable, and selects the upper arm ON control mode. On the other hand, when the battery voltage V_B is lower than the peak value of the power supply voltage v_{ac} , the control mode selecting unit 340 determines that upper arm ON control is not applicable, and selects the normal control mode.

25 **[0086]** FIG. 8 shows a first example of a change from the normal control mode to the upper arm ON control mode. As shown in FIG 8, at time t_0 at which external charging is started, the battery voltage V_B is lower than the peak value of the power supply voltage v_{ac} . Therefore, upper arm ON control is not activated, and the main battery 10 is externally charged in the normal control mode.

[0087] Owing to external charging in the normal control mode, the battery

voltage V_B gradually increases. Then, at time t_1 , the battery voltage V_B is higher than the peak value of the power supply voltage v_{ac} . As a result, upper arm ON control is activated, so, after time t_1 , the main battery 10 is externally charged in the upper arm ON control mode.

5 **[0088]** Then, at time t_2 , the charging of the main battery 10 is completed to end external charging.

[0089] By so doing, it is possible to apply upper arm ON control for increasing the efficiency of the DC-DC converter 210 while avoiding a charging state where there is a concern about excessive current or a decrease in power factor when upper arm ON
10 control is applied. In addition, the AC-DC converter 250 is able to operate as a PFC circuit through the normal control mode and the upper arm ON control mode, so the efficiency of external charging increases.

[0090] Note that, at the time of the start of external charging (time t_0), if the battery voltage V_B is already higher than the peak value of the power supply voltage v_{ac} ,
15 it is possible to conduct external charging by applying only the upper arm ON control mode.

[0091] Alternatively, the control mode selecting unit 340 determines whether upper arm ON control is applicable on the basis of a charging electric power for charging the main battery 10 through external charging.

20 **[0092]** As shown in FIG 5, in the upper arm ON control mode, ripple current of a frequency that is twice as high as the power supply frequency occurs in the passing current i_{Q1} of the switching element Q_1 . As a result, the peak value of the current $I(Q_1)$ increases, so, it is necessary to limit the application of the upper arm ON control only in a condition that the passing current $I(Q_1)$ falls within a range that does not exceed
25 the current rating of the switching element Q_1 even when such ripple current flows.

[0093] FIG. 9 is a second example of a change from the normal control mode to the upper arm ON control mode. As shown in FIG. 9, at the time of the start of external charging (time t_0), the target charging current I_B^* is set to a predetermined value in correspondence with a normal value of charging electric power P_{ch} . At a normal

charging electric power, upper arm ON control is not activated, and the normal control mode is applied.

[0094] Owing to external charging in the normal control mode, the SOC of the main battery 10 gradually increases. Then, when the SOC reaches a predetermined value and it is detected that charging has proceeded to a certain degree (time t_{l1}), the target charging current IB^* is decreased so as to reduce the charging electric power P_{ch} . Then, when the charging electric power P_{ch} or the target charging current IB^* decreases to a predetermined threshold (time t_{l2}), it is determined that the condition that upper arm ON control is applicable is satisfied. By so doing, after time t_{l2} , the main battery 10 is externally charged in the upper arm ON control mode.

[0095] In a state where the charging electric power P_{ch} is low, that is, the target charging current IB^* is low, a peak current is suppressed to a low value even when the upper arm ON control mode is applied and ripple current is superimposed on the current $I(Q1)$ of the switching element $Q1$. In other words, it is possible to predetermine the threshold of the target charging current IB^* (or the charging electric power P_{ch}) for determining whether the upper arm ON control mode is applicable on the basis of the correlation among the peak value of the current $I(Q1)$ that includes the ripple current at the time when upper arm ON control is applied, the target charging current IB^* and the current rating of the switching element $Q1$.

[0096] Then, at time t_2 , the charging of the main battery 10 is completed to end external charging.

[0097] By so doing, it is possible to implement high-efficiency external charging to which upper arm ON control is applied while avoiding a charging state where there is a concern that excessive current flows through the switching element when upper arm ON control is applied.

[0098] Note that, in the charging device 200 that is able to handle the 200 VAC external power supply 500, when external charging is performed at an electric power lower than a rated value, such as when external charging is performed using the 100 VAC external power supply 500, it is possible to conduct external charging by applying only

the upper arm ON control mode from the start of external charging (time t_0) to the completion of charging (time t_2).

[0099] In this way, with the charging device for an electromotive vehicle according to the present embodiment, it is possible to appropriately apply upper arm ON control on the basis of the state of external charging. That is, upper arm ON control is applied to prevent excessive current or a decrease in power factor, and then it is possible to implement high-efficiency external charging by applying upper arm ON control.

[0100] Next, preferred change control at the time of a change from the normal control mode to the upper arm ON control mode will be further described.

[0101] FIG 10 shows a first waveform chart for illustrating control operation at the time of a change from normal control to upper arm ON control.

[0102] As shown in FIG 10, until time t_a , the condition that upper arm ON control is applicable, as illustrated in FIG 8 or FIG. 9, is not satisfied, and the normal control mode is applied. Therefore, the control switches 330 and 360 shown in FIG 7 each are connected to the "a" side.

[0103] As a result, the direct-current voltage v_{dc} is controlled to the target voltage v_{dc}^* by on/off control over the switching element Q3 of the AC-DC converter 250. As described above, the target voltage v_{dc}^* is set in a range higher than the output voltage of the main battery 10. Then, the switching element Q1 of the DC-DC converter 210 is subjected to on/off control to thereby step down the direct-current voltage v_{dc} and charge the main battery 10.

[0104] At time t_a , when the condition that upper arm ON control is applicable is satisfied, a standby period T_0 during which the AC-DC converter 250 and the DC-DC converter 210 are once stopped is provided. During the standby period T_0 , the smoothing capacitor 220 is discharged using a discharging resistor (not shown), so the direct-current voltage v_{dc} gradually decreases. In the configuration of FIG 1, the discharging resistor may be connected between the power supply line PL1 and the ground line GL in parallel with the smoothing capacitor 220.

[0105] During the standby period T_0 , the direct-current voltage v_{dc} decreases to

the battery voltage V_B . After the direct-current voltage v_{dc} has reached the battery voltage V_B , current is supplied from the main battery 10 to the smoothing capacitor 220 via the diode D1, so the voltage of the main battery 10 and the voltage of the smoothing capacitor 220 are kept equal.

5 **[0106]** When the standby period T_O ends at time t_b , the AC-DC converter 250 and the DC-DC converter 210 are activated again, and the upper arm ON control mode is applied. By so doing, the control switches 330 and 360 shown in FIG. 7 each are connected to the "b" side. In the DC-DC converter 210, the switching element Q1 is kept in an on state.

10 **[0107]** On the other hand, the AC-DC converter 250 generates charging current for charging the main battery 10 by converting the power supply voltage v_{ac} to direct-current voltage through on/off control over the switching element Q3.

[0108] By applying control for a change from the normal control mode to the upper arm ON control mode as shown in FIG. 10, inrush current that instantaneously
15 occurs when the switching element Q1 is turned on may be suppressed at the time of a start of upper arm ON control. As a result, it is possible to further smoothly apply upper arm ON control.

[0109] FIG. 11 is a waveform chart for illustrating a second example of control operation at the time of a change from the normal control mode to the upper arm ON
20 control mode.

[0110] As shown in FIG. 11, as in the case of FIG. 10, until time t_a at which the condition that upper arm ON control is applicable is satisfied, the normal control mode is applied. Furthermore, the standby period T_O is provided from time t_a to time t_b .

[0111] During the standby period T_O , the AC-DC converter 250 and the DC-DC
25 converter 210 are kept activated, and the normal control mode is applied. Then, the target voltage v_{dc}^* of the smoothing capacitor 220 gradually decreases to the battery voltage V_B at that time. In the AC-DC converter 250, the on/off duty of the switching element Q3 is controlled so that the direct-current voltage v_{dc} decreases with the target voltage v_{dc}^* . By so doing, by the time when the standby period T_O terminates, the

direct-current voltage v_{dc} decreases to the battery voltage V_B .

[0112] From time t_b , as in the case of FIG. 10, the upper arm ON control mode is applied. By so doing, the control switches 330 and 360 shown in FIG. 7 each are connected to the "b" side. Then, in the DC-DC converter 210, the switching element Q1
5 is kept in an on state. On the other hand, the AC-DC converter 250 generates charging current for charging the main battery 10 by converting the power supply voltage v_{ac} to direct-current voltage through on/off control over the switching element Q3.

[0113] By applying control for a change from the normal control mode to the upper arm ON control mode as shown in FIG. 11, as in the case of FIG. 10, inrush current
10 that instantaneously occurs when the switching element Q1 is turned on may be suppressed at the time of a start of upper arm ON control. Furthermore, different from the change control shown in FIG. 10, it is not necessary to provide a discharging resistor for the smoothing capacitor 220, so the efficiency may be further improved.

[0114] Note that the standby period T_O shown in FIG. 10 and FIG. 11 may be
15 terminated after a lapse of a constant period of time on the basis of a timer value, or the like, or may be terminated in response to the fact that it is detected that the direct-current voltage v_{dc} has decreased to the battery voltage V_B on the basis of a comparison of detected voltages.

[0115] In addition, the configuration of the charging device 200, particularly, the
20 configuration of the AC-DC converter 250 and the configuration of the DC-DC converter 210, are not limited to the illustrated present embodiment. That is, as long as the AC-DC converter 250 is a non-isolated electric power converter that is able to convert the power supply voltage v_{ac} , supplied from the external power supply 500, to a direct-current voltage that is higher than the peak voltage of the power supply voltage, a
25 circuit configuration different from the configuration of FIG. 1 may be applied to the AC-DC converter 250. In addition, as long as the DC-DC converter 210 is a non-isolated configuration that includes a switching element that is arranged so as to form a path that directly supplies current from the AC-DC converter 250 to the main battery 10 when the switching element is kept in an on state and is able to control

charging current for charging the main battery 10 when the switching element is subjected to on/off control, a circuit configuration different from the configuration of FIG. 1 may be applied to the DC-DC converter 210.

5 **[0116]** The embodiment described above is illustrative and not restrictive in all respects. The scope of the invention is defined by the appended claims. The scope of the invention is intended to encompass all modifications within the scope of the appended claims and equivalents thereof.

10 **[0117]** The aspect of the invention may be applied to charging control when an electrical storage device equipped for an electromotive vehicle is charged by a power supply outside the vehicle.

CLAIMS:

1. A charging device for an electromotive vehicle equipped with an electrical storage device, the charging device including: a first electric power converter that converts an alternating-current voltage, supplied from an external power supply, to a direct-current voltage higher than a peak voltage of the alternating-current voltage and outputs the direct-current voltage to a first power supply line; and a second electric power converter that, during external charging for charging the electrical storage device by the external power supply, converts a direct-current electric power between the first power supply line and a second power supply line that is electrically connected to a positive electrode of the electrical storage device, characterized in that:

the second electric power converter includes a first switching element that is electrically connected between a first node and the first power supply line, and a first inductor that is electrically connected between the first node and the second power supply line;

the charging device further includes a control device that controls the first and second electric power converters; and

during the external charging, the control device selects any one of a first control mode in which the electrical storage device is charged through on/off control over the first switching element and a second control mode in which the electrical storage device is charged while the first switching element is kept in an on state, on the basis of a state of the external charging.

2. The charging device according to claim 1, wherein the control device selects the second control mode when a voltage of the electrical storage device is higher than the peak voltage of the alternating-current voltage.

3. The charging device according to claim 1, wherein the control device selects the second control mode when a charging electric power for charging the electrical storage

device is lower than a predetermined level.

4. The charging device according to any one of claims 1 to 3, wherein

the first electric power converter includes:

a rectifier that rectifies the alternating-current voltage supplied from the external power supply and then outputs the rectified voltage to a third power supply line;

a second inductor that is electrically connected between the third power supply line and a second node;

a first diode that is electrically connected between the second node and the first power supply line so that a direction from the second node to the first power supply line is set as a forward direction; and

a second switching element that is electrically connected between the second node and a fourth power supply line that is electrically connected to a negative electrode of the electrical storage device, and wherein

the control device controls on/off states of the second switching element so that a current that passes through the second inductor coincides with a target current that is an absolute value of an alternating current of which a phase coincides with a phase of the alternating-current voltage, and the control device controls an amplitude of the target current on the basis of a voltage of the first power supply line in the first control mode; whereas the control device keeps the amplitude of the target current constant irrespective of the voltage of the first power supply line in the second control mode.

5. The charging device according to any one of claims 1 to 4, wherein, in the first control mode, the control device controls a duty ratio of on/off states of the first switching element on the basis of a difference between a charging current for charging the electrical storage device and a target charging current.

6. The charging device according to any one of claims 1 to 5, wherein, when the state of the external charging satisfies a predetermined condition that the second control mode is

applicable while the first control mode is selected, the control device changes from the first control mode to the second control mode after a voltage of the first power supply line has decreased to a voltage of the electrical storage device.

7. The charging device according to claim 6, wherein, when the state of the external charging satisfies the predetermined condition, the control device stops the first and second electric power converters and decreases the voltage of the first power supply line through discharging using a discharging resistor.

8. The charging device according to claim 6, wherein, when the state of the external charging satisfies the predetermined condition, the control device decreases a target voltage of the voltage of the first power supply line, supplied to the second electric power converter, to the voltage of the electrical storage device.

FIGURE

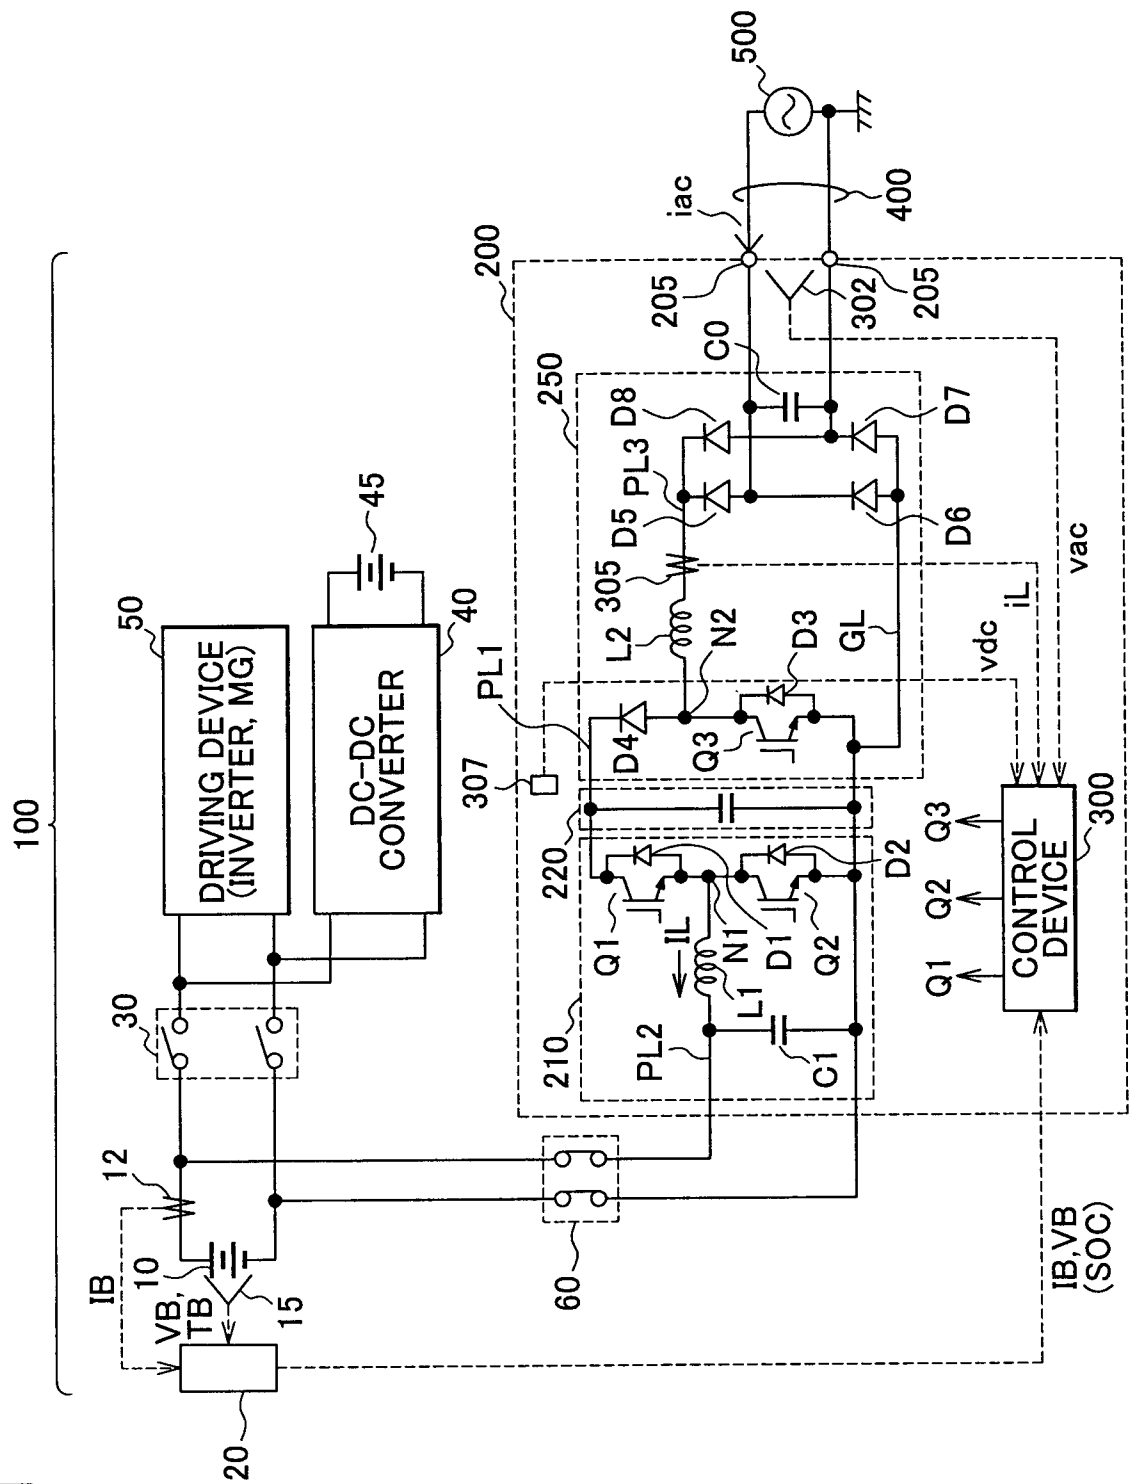


FIG. 2

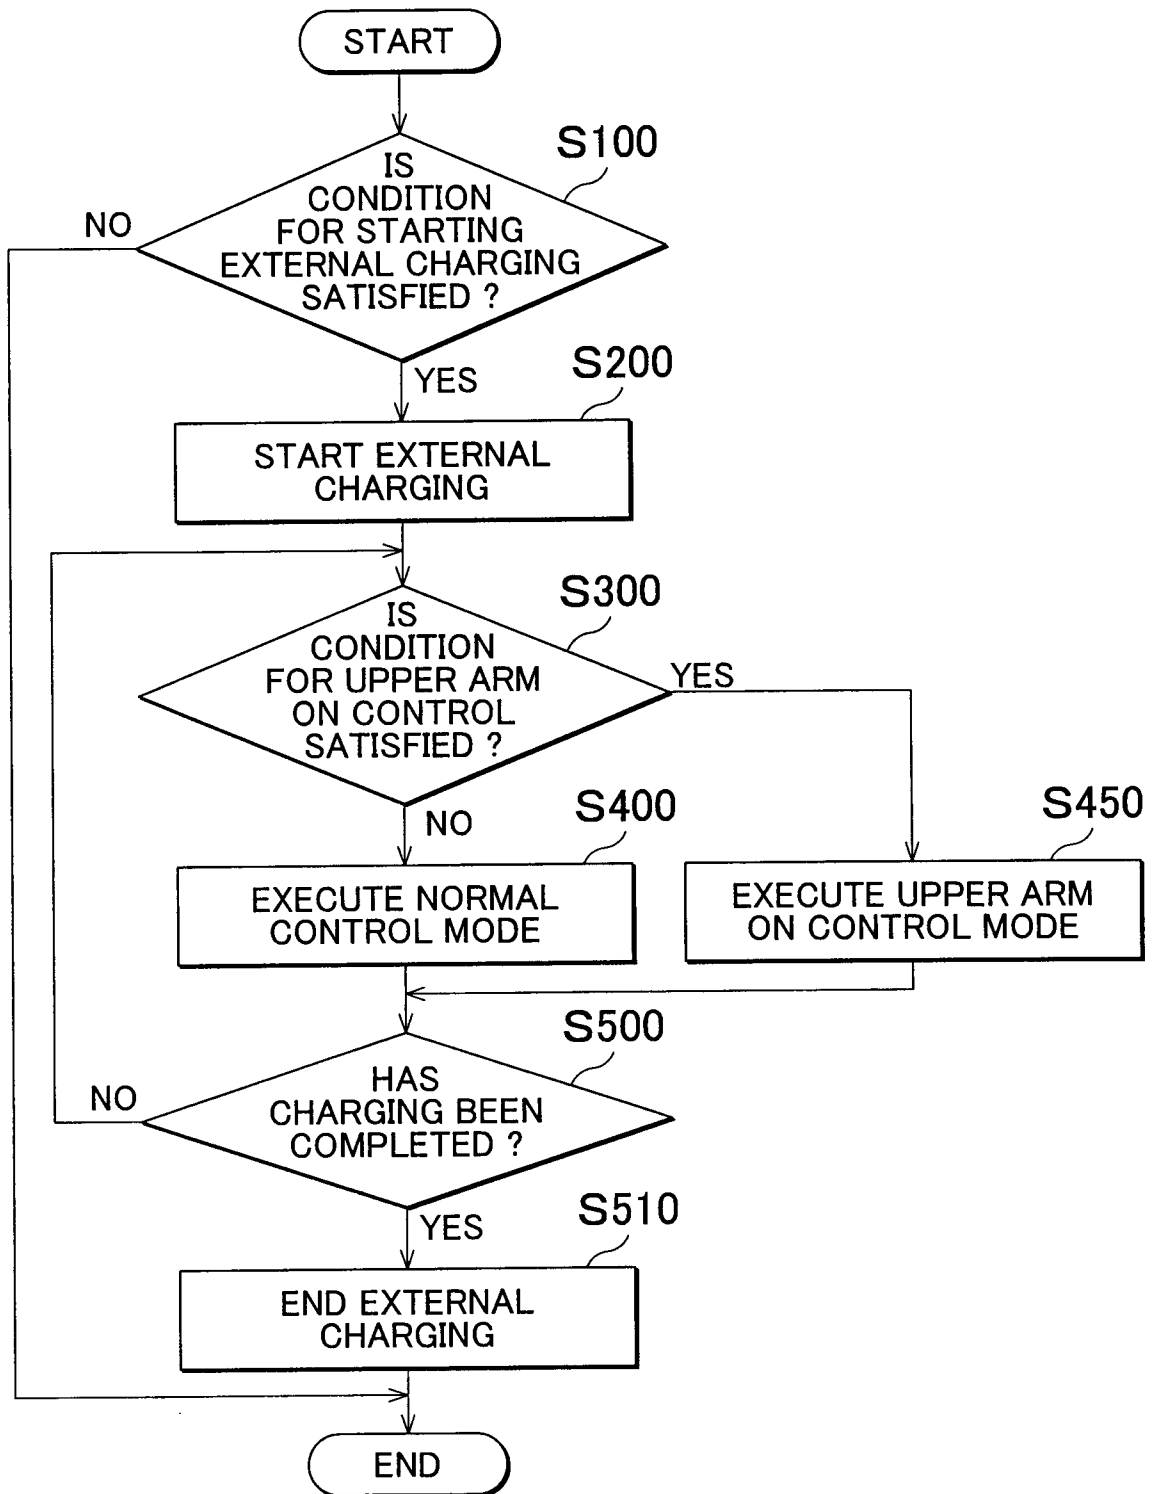


FIG. 3

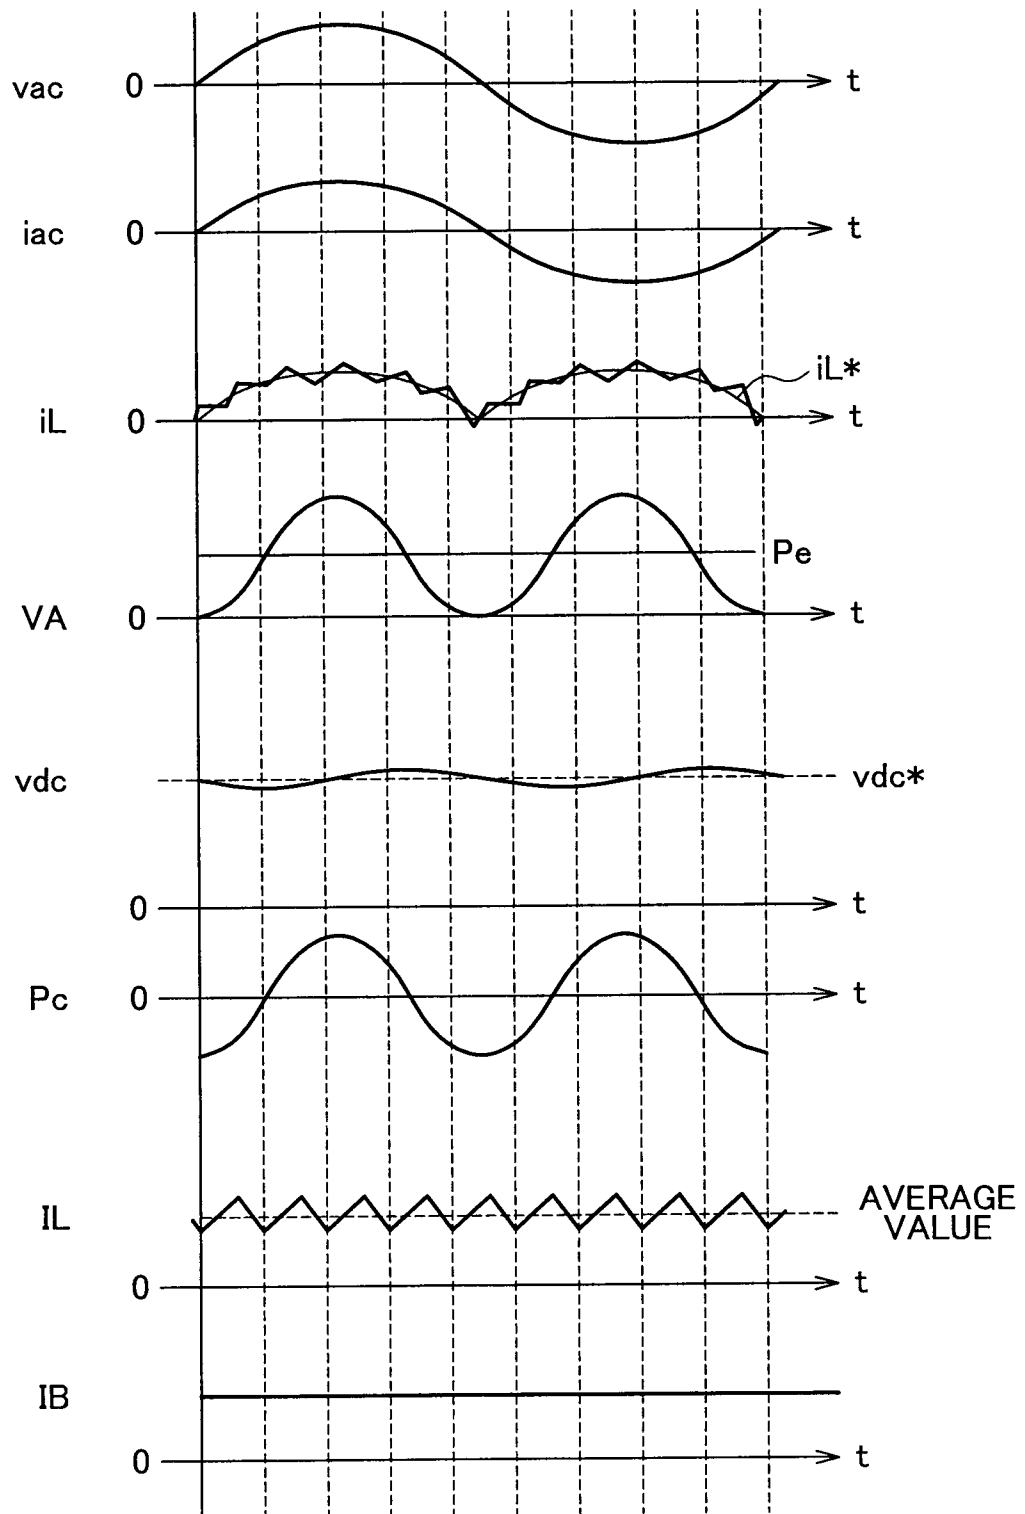


FIG. 4

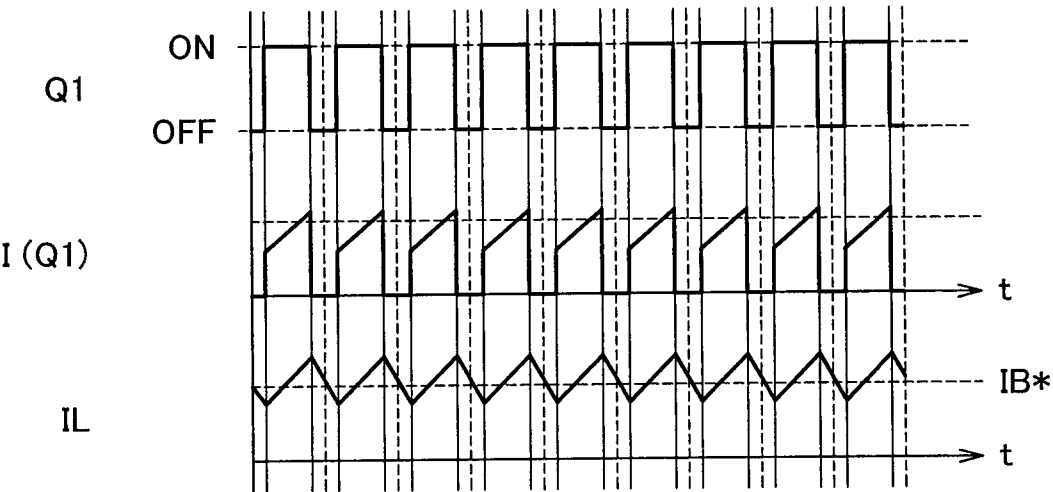


FIG. 5

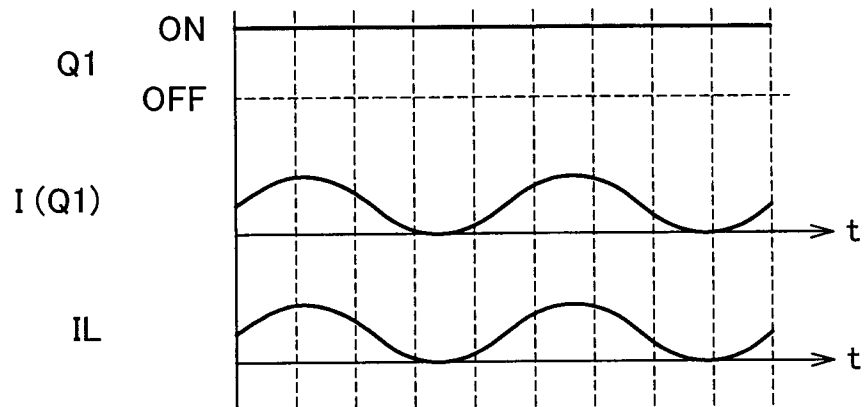


FIG. 6

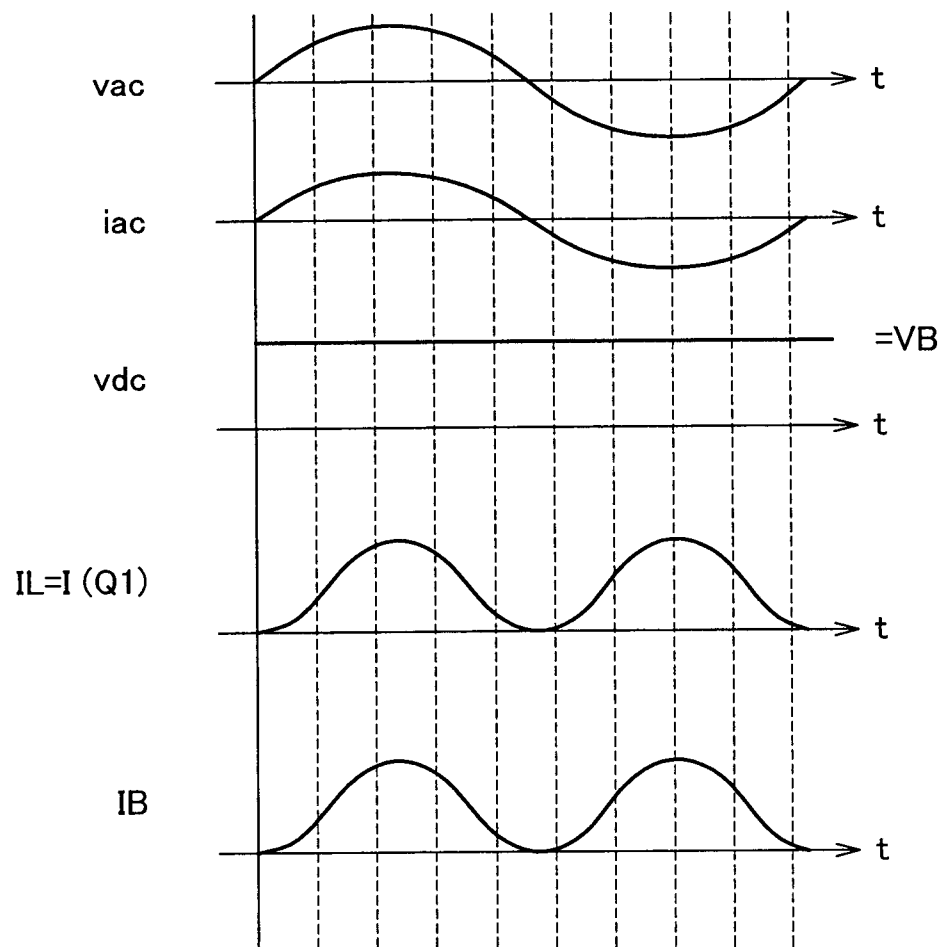


FIG. 7

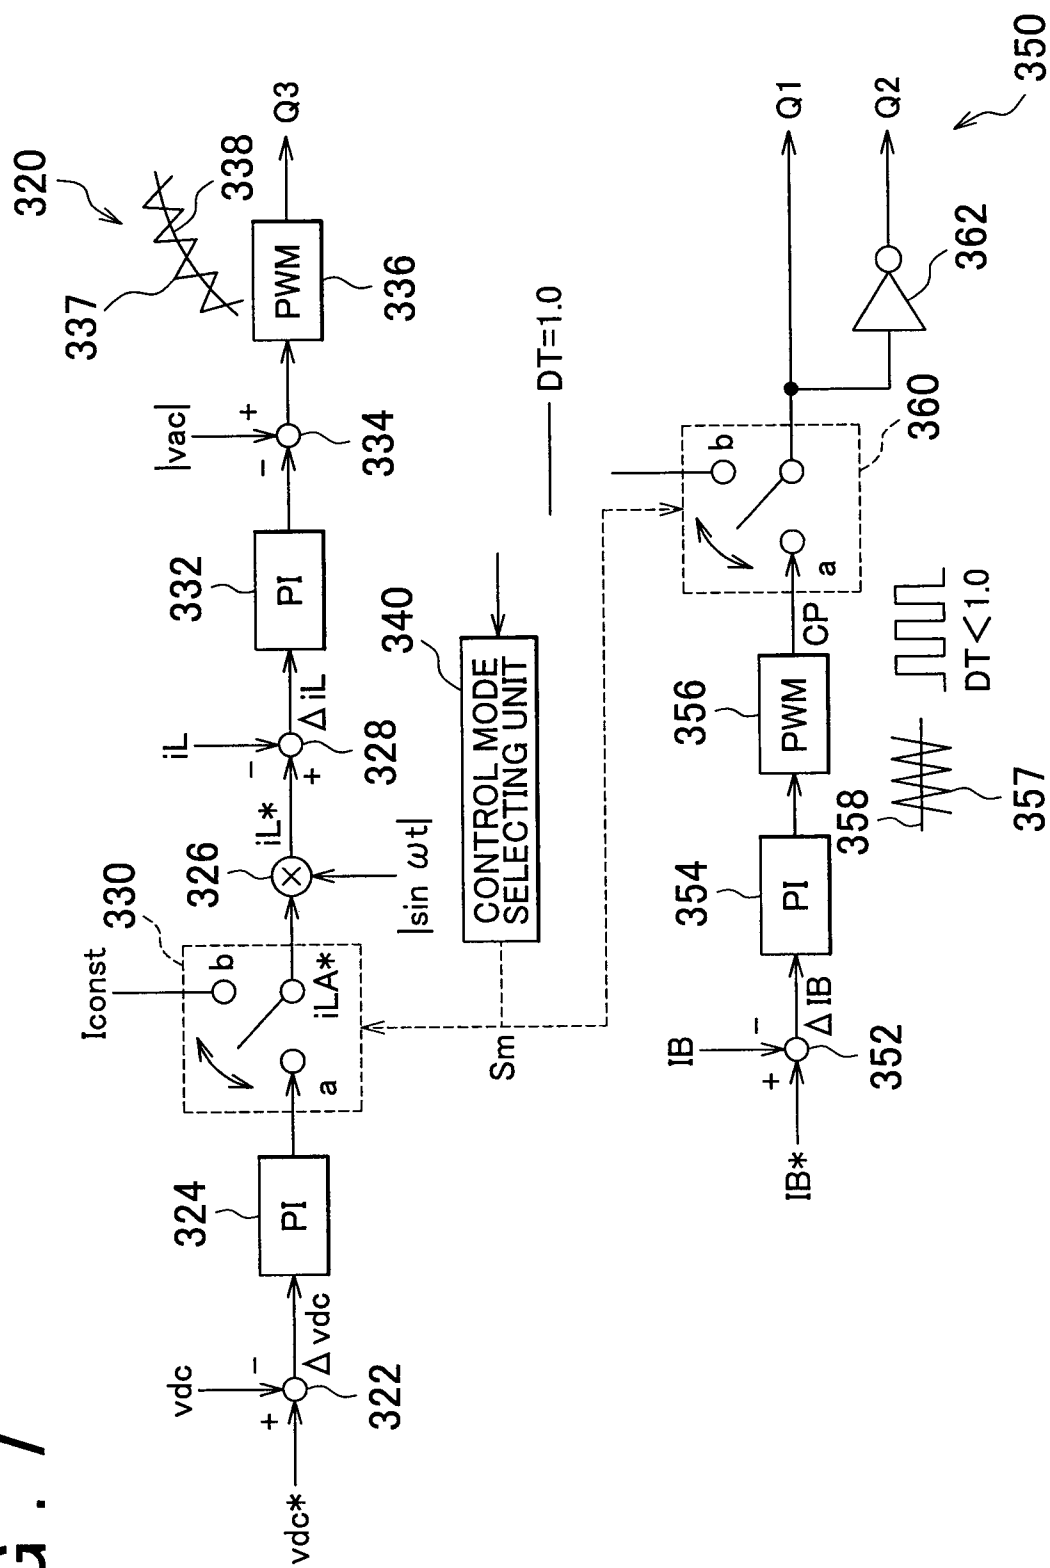


FIG. 8

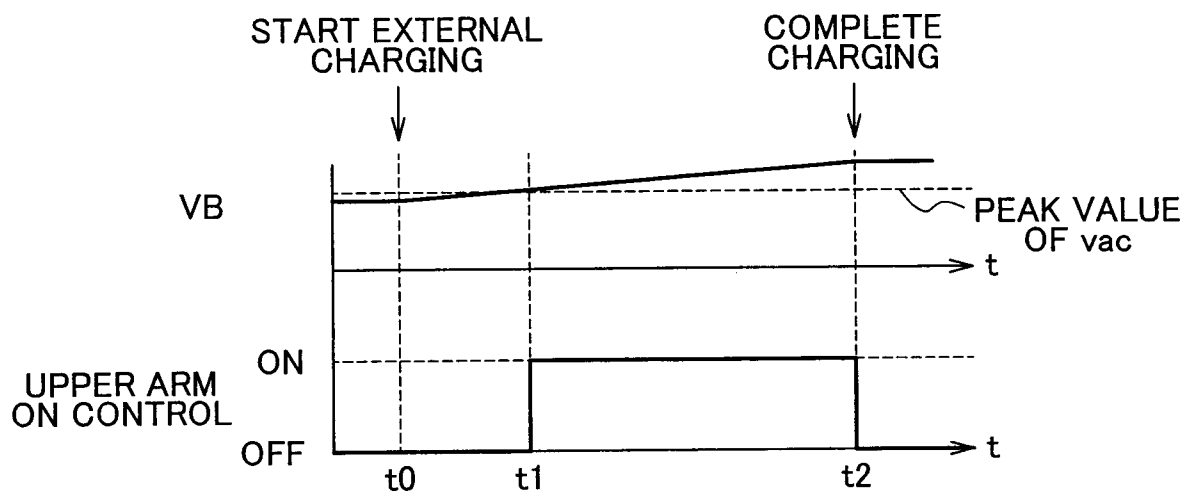


FIG. 9

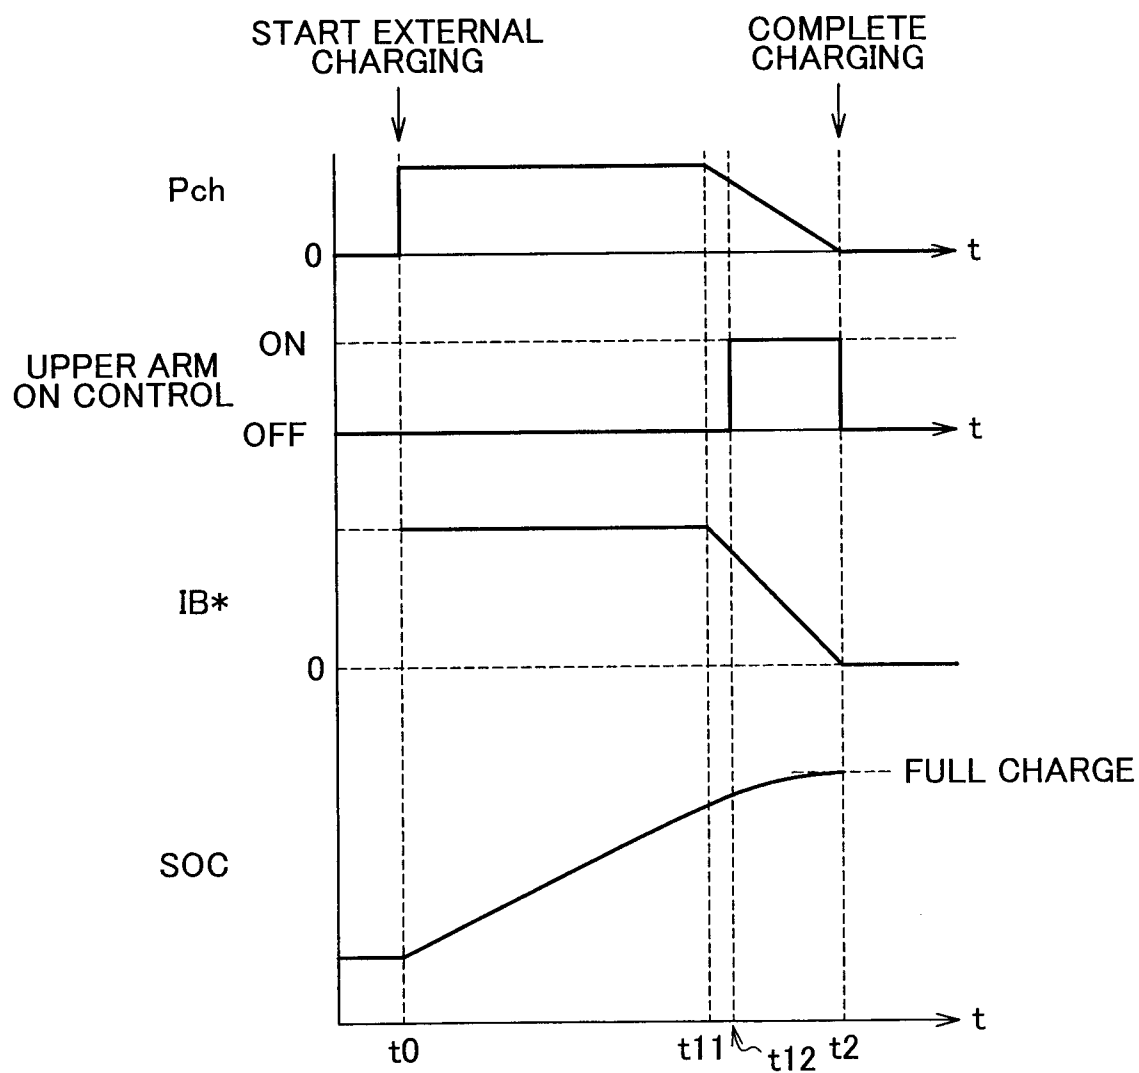


FIG. 10

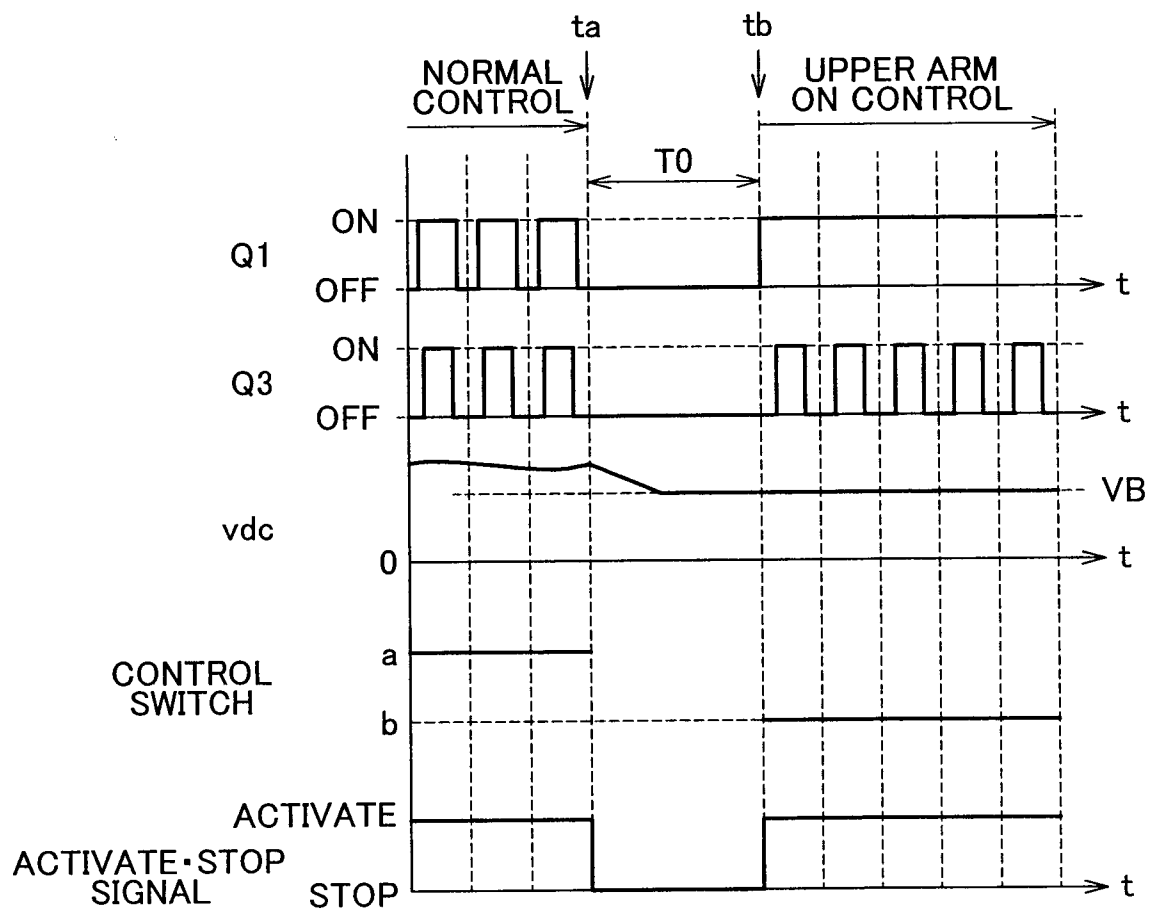


FIG. 11

