




US 20100080514A1

(19) **United States**(12) **Patent Application Publication****Lu et al.**(10) **Pub. No.: US 2010/0080514 A1**(43) **Pub. Date: Apr. 1, 2010**(54) **FIBER OPTIC CABLE BREAKOUT
CONFIGURATION WITH RETENTION
BLOCK**tinuation of application No. 11/491,336, filed on Jul.
21, 2006, now Pat. No. 7,317,863.(75) Inventors: **Yu Lu**, Eden Prairie, MN (US);
Keith Millea, Sutton, MA (US);
Jeff Gniadek, Northbridge, MA
(US)(60) Provisional application No. 60/781,280, filed on Mar.
9, 2006.**Publication Classification**(51) **Int. Cl.**
G02B 6/36 (2006.01)(52) **U.S. Cl.** **385/76; 385/94**

Correspondence Address:

MERCHANT & GOULD PC**P.O. BOX 2903****MINNEAPOLIS, MN 55402-0903 (US)**(73) Assignee: **ADC Telecommunications, Inc.**,
Eden Prairie, MN (US)(21) Appl. No.: **12/612,182**(22) Filed: **Nov. 4, 2009****Related U.S. Application Data**(63) Continuation of application No. 12/008,092, filed on
Jan. 7, 2008, now Pat. No. 7,630,606, which is a con-(57) **ABSTRACT**

A telecommunications cable includes a distribution cable, a tether that branches from the distribution cable, and a tether retention block affixed to the distribution cable. The tether retention block includes a first portion and a second portion that is configured to cooperate with the first portion to secure a tether buffer tube and a strength member of the tether. Each of the first and second portions defines at least a first half-channel configured to cooperate with the first half-channel of the other portion to receive the strength member of the tether.

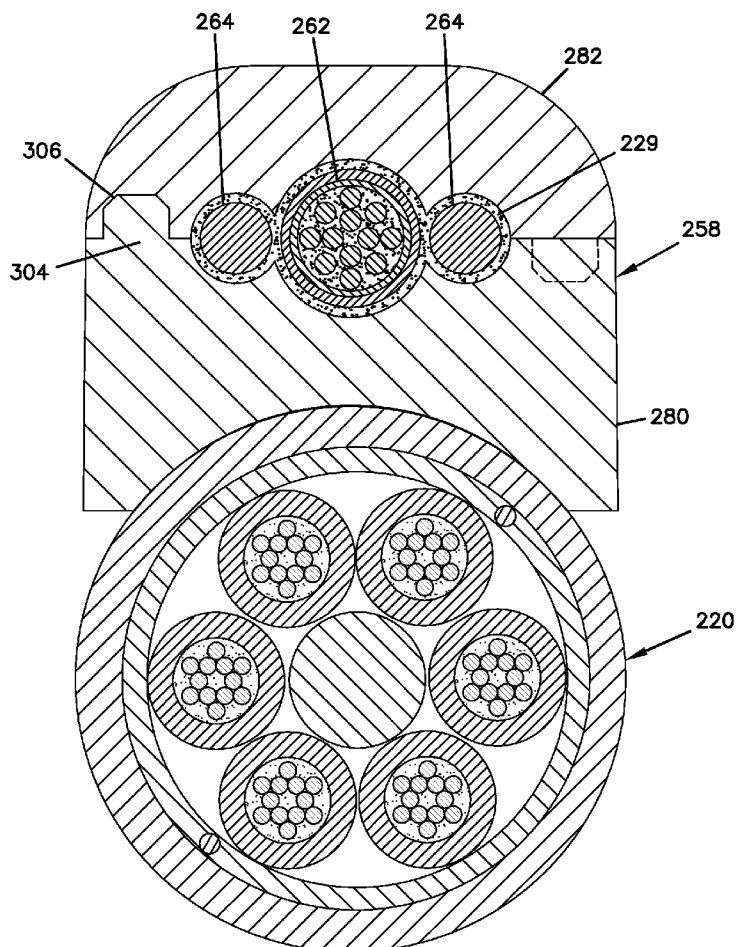

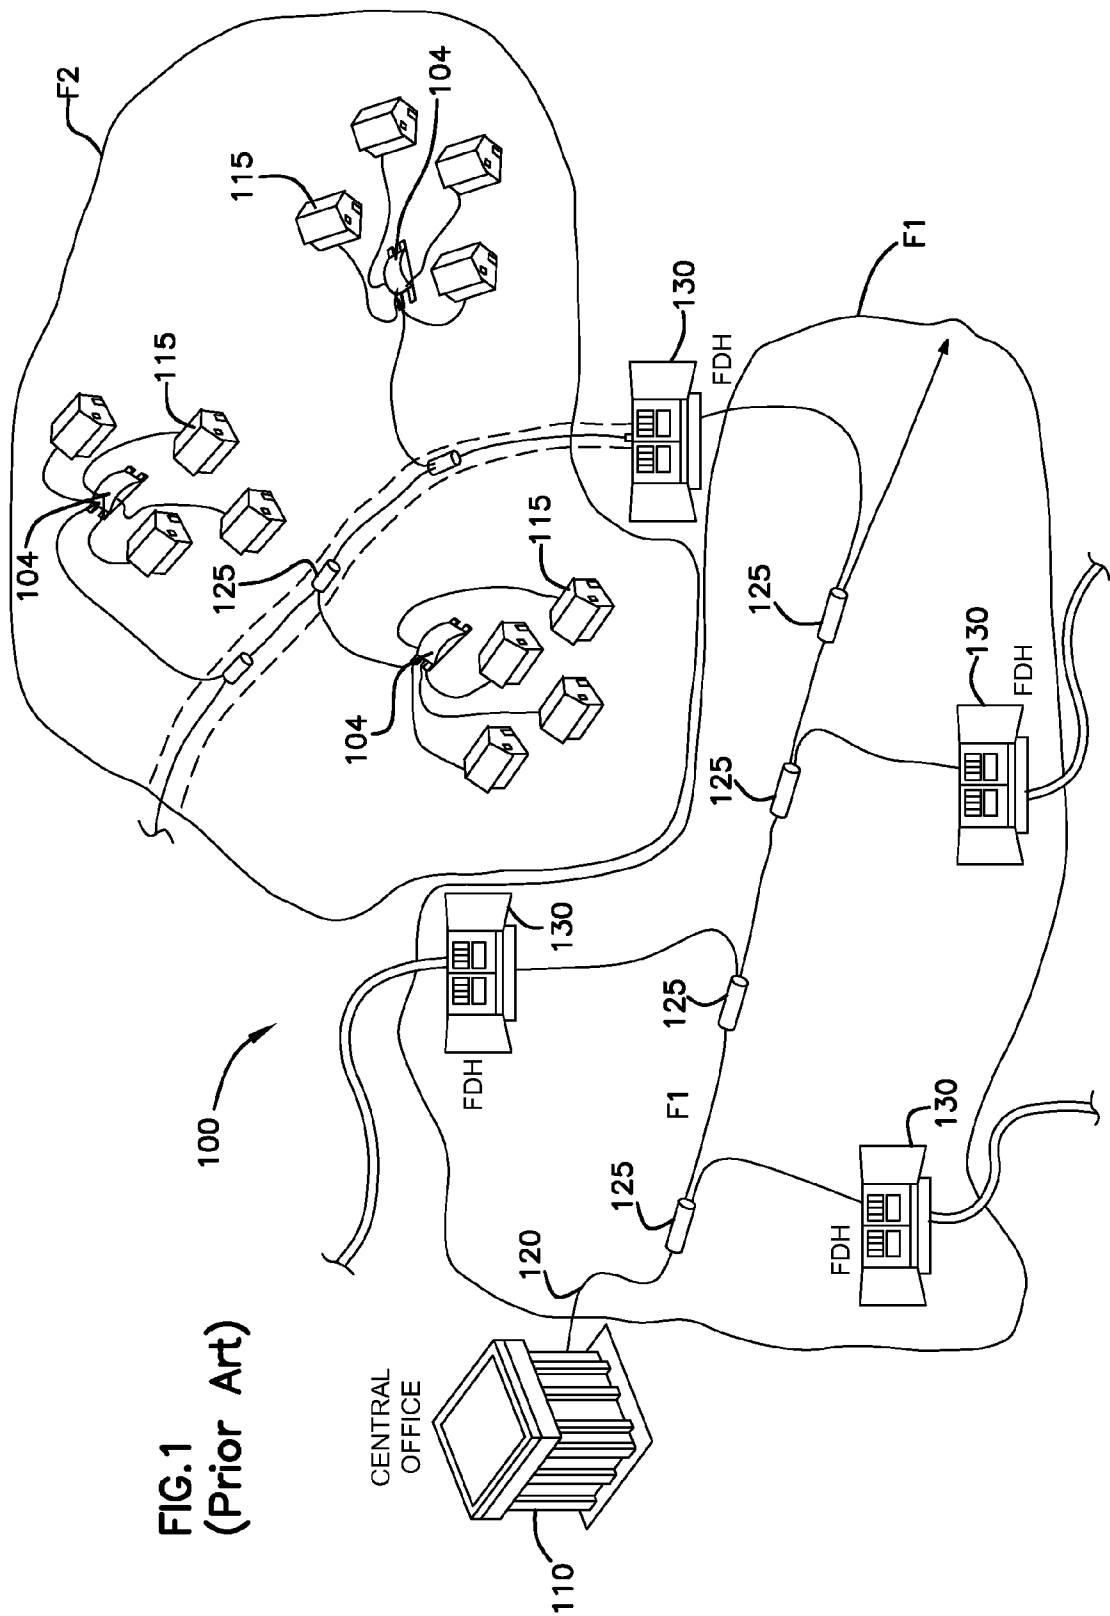
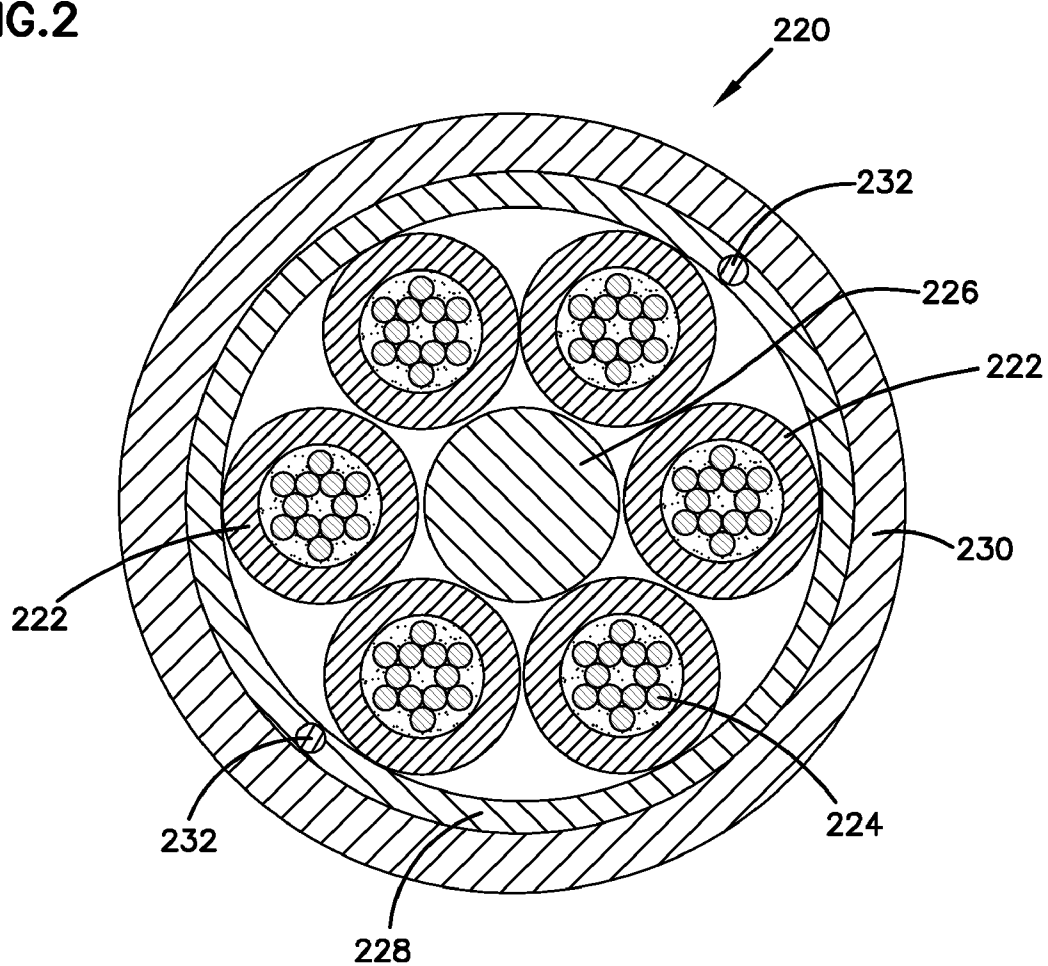
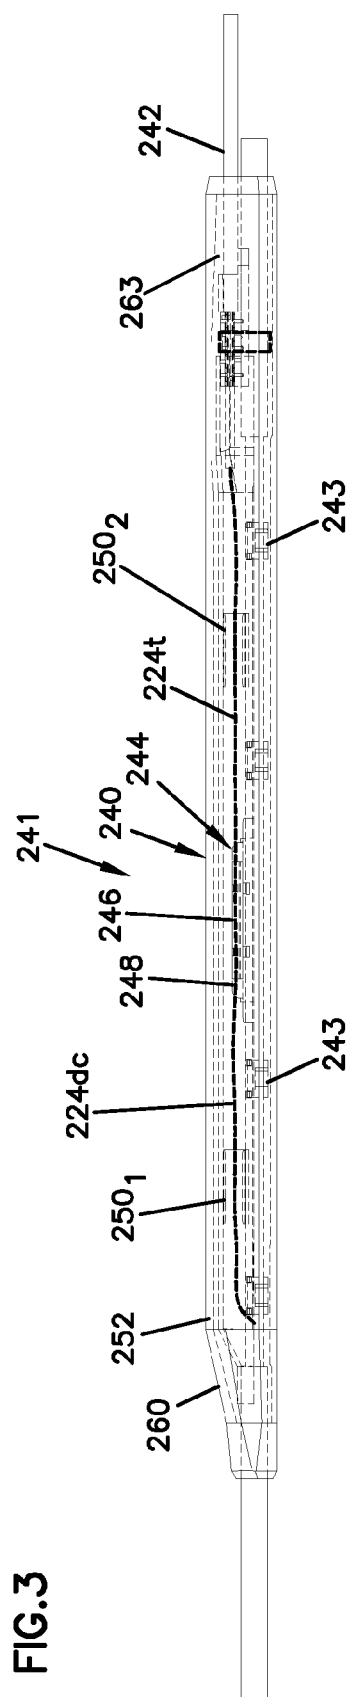


FIG.2





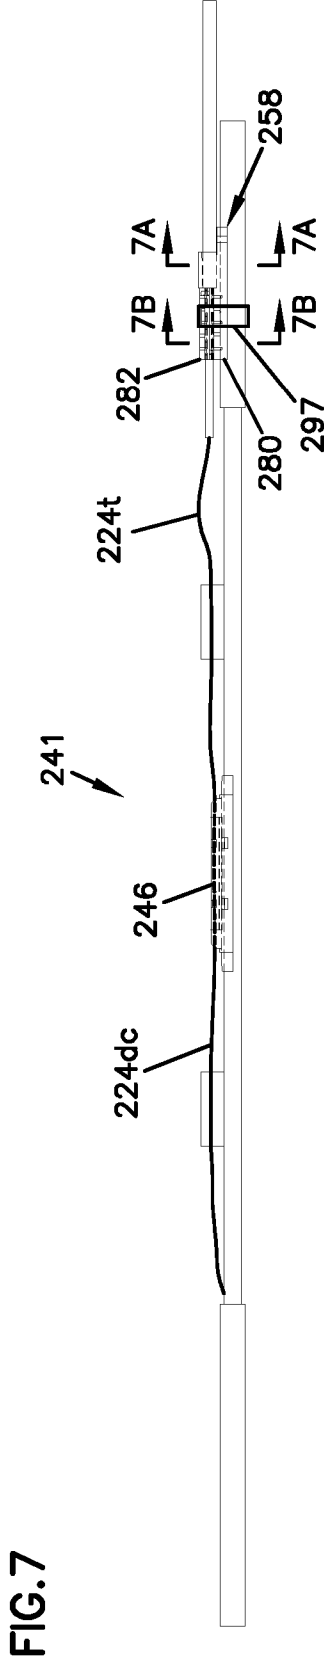
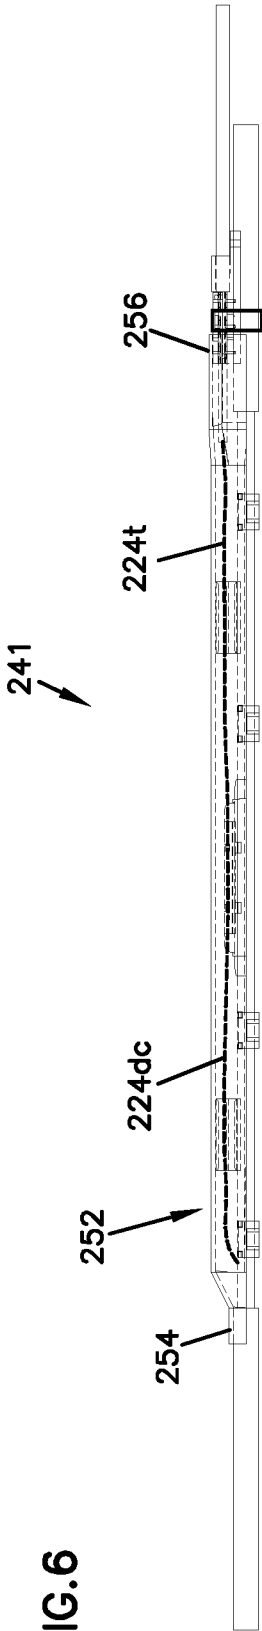


FIG. 7A

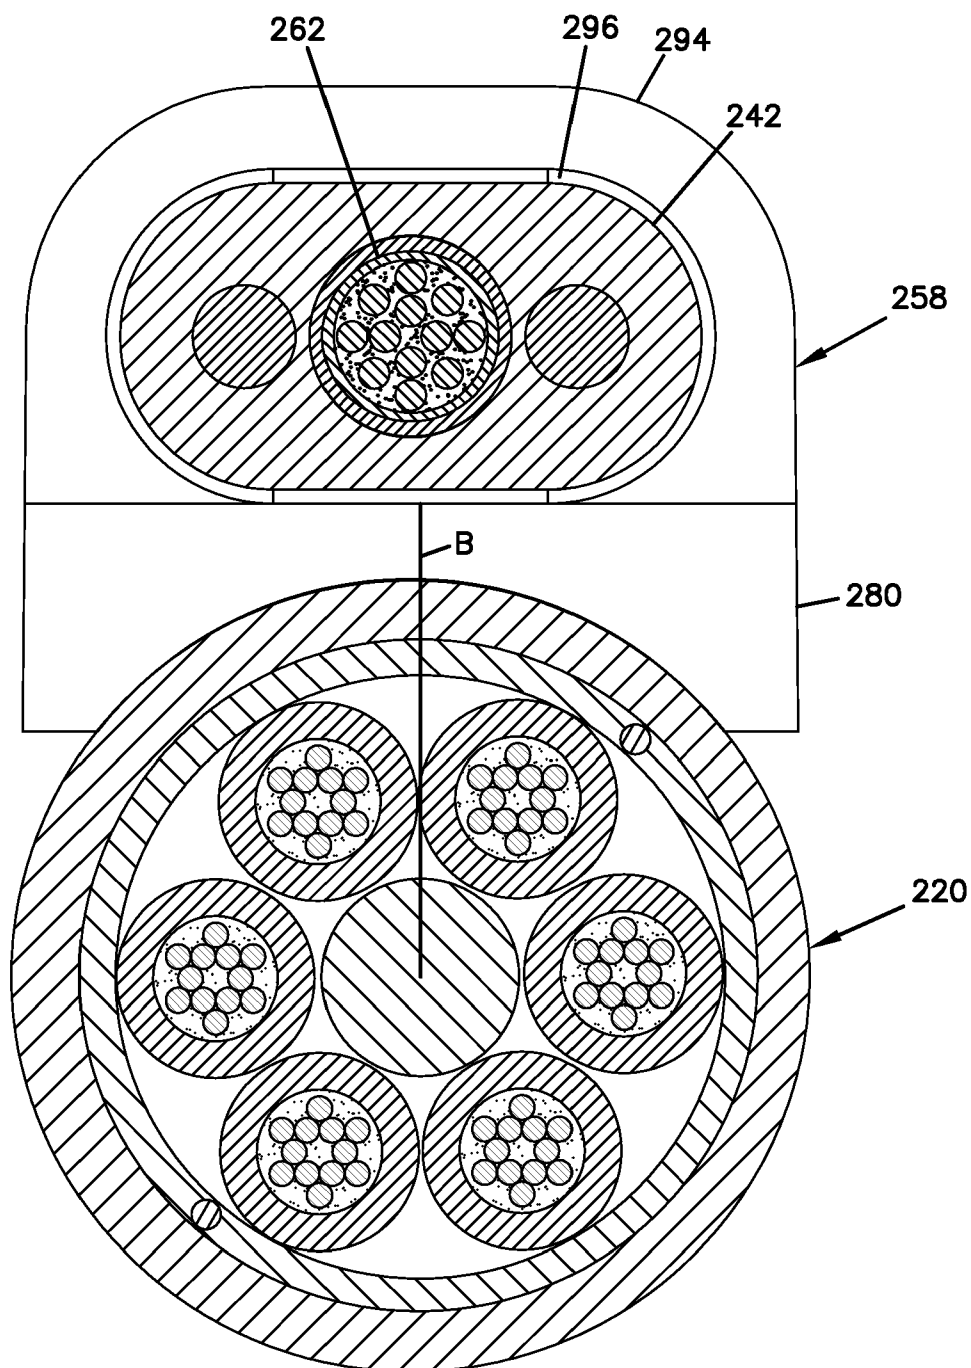


FIG. 7B

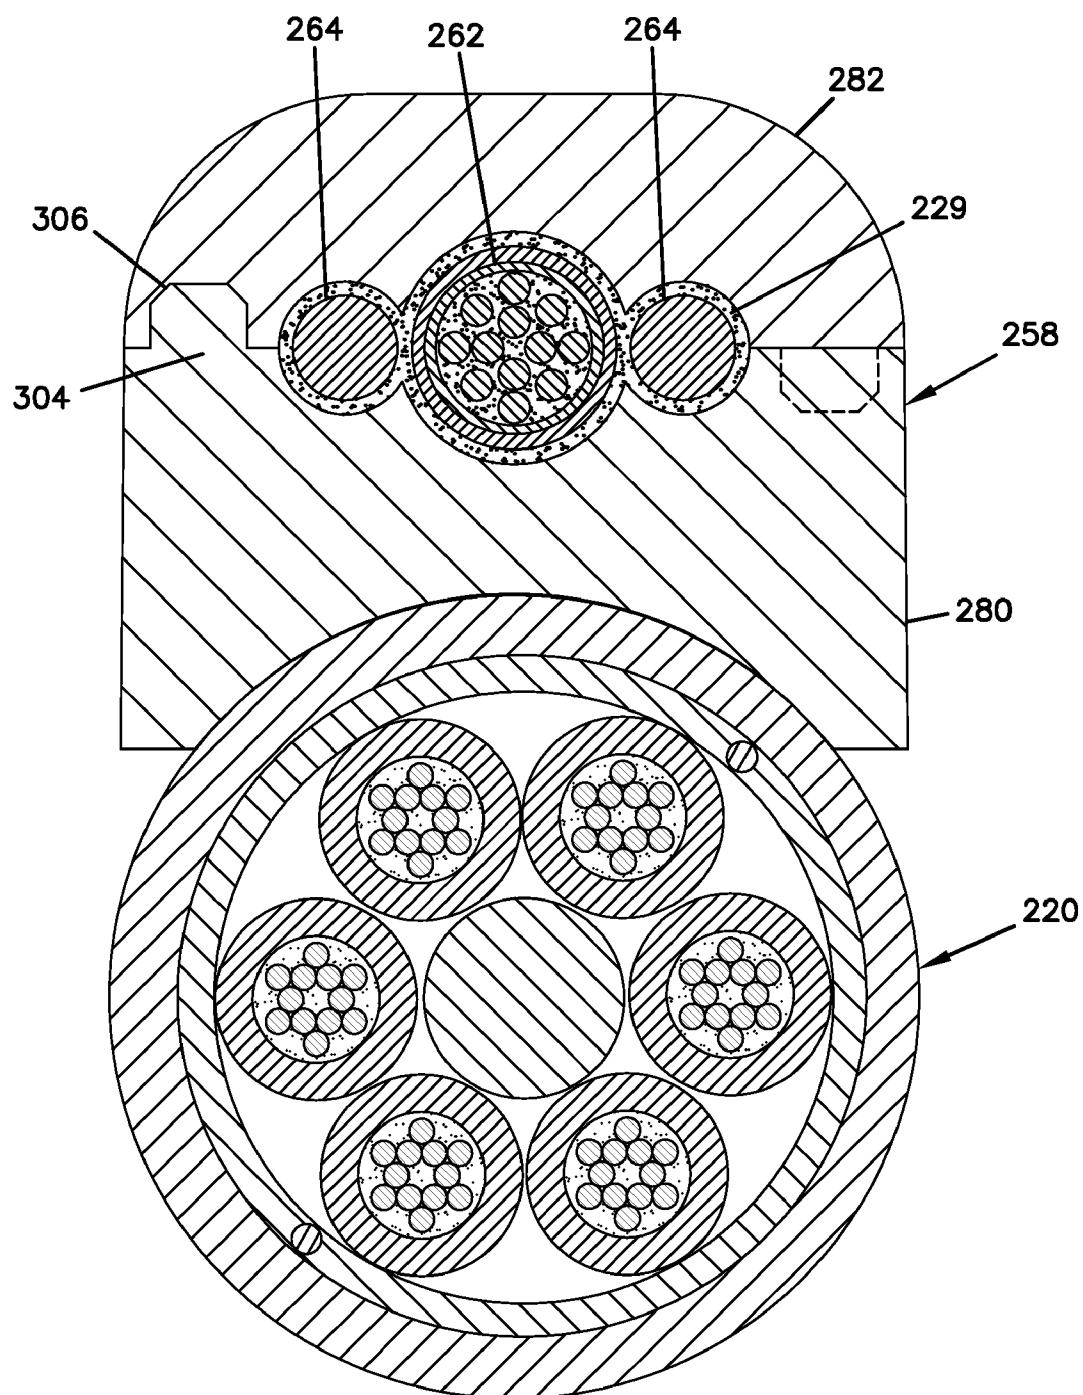


FIG. 8

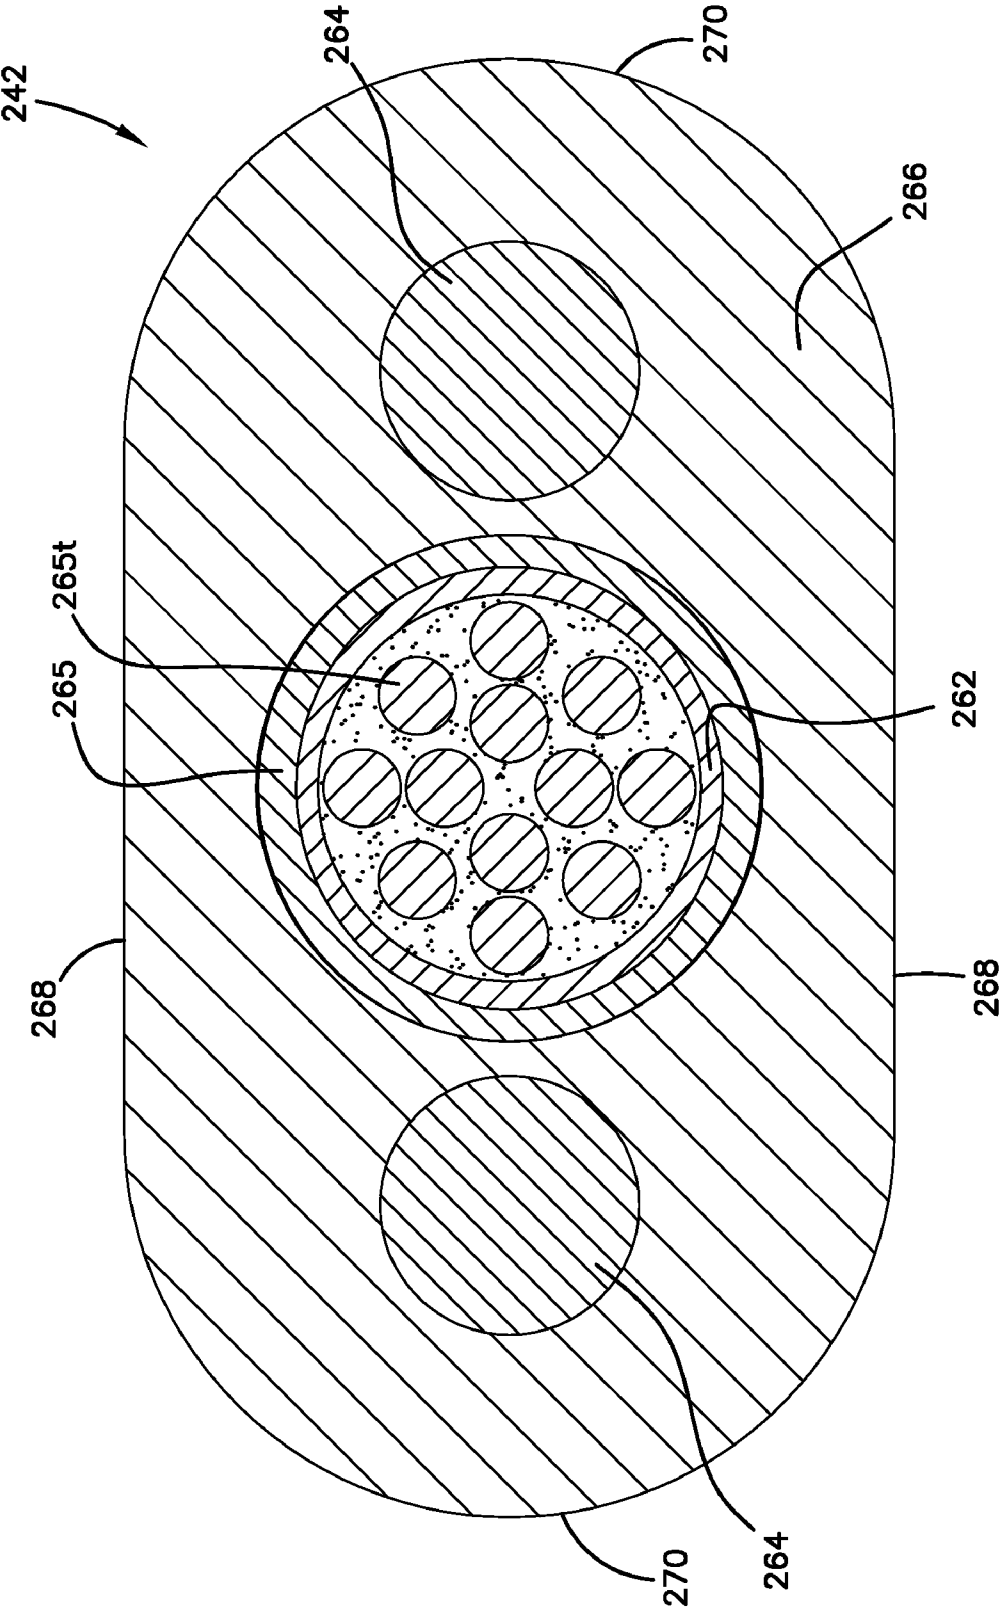


FIG.9

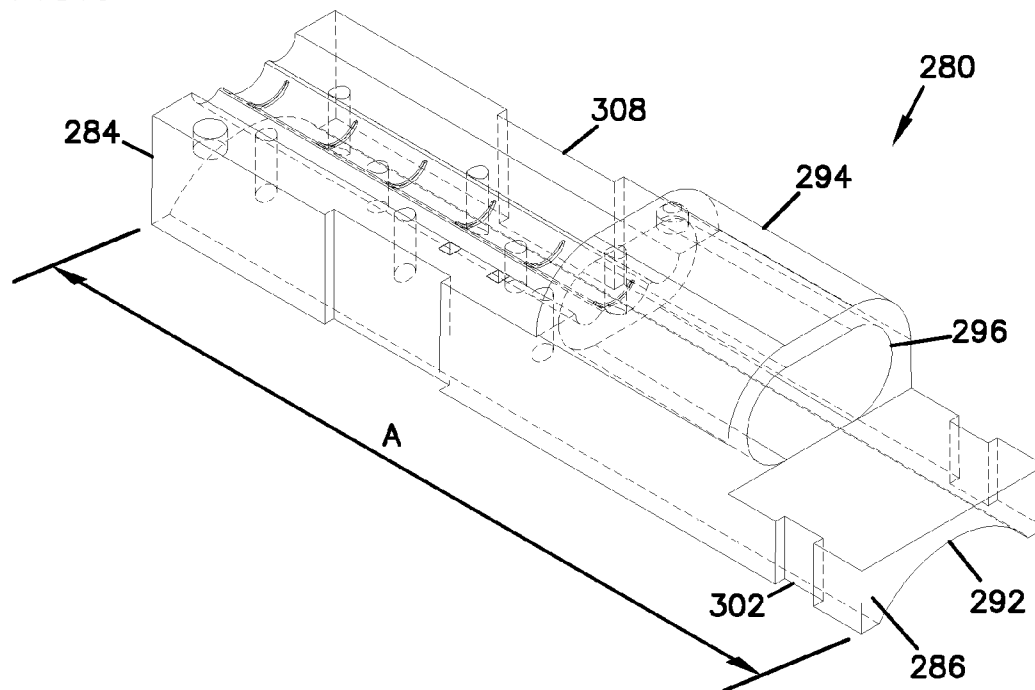


FIG.10

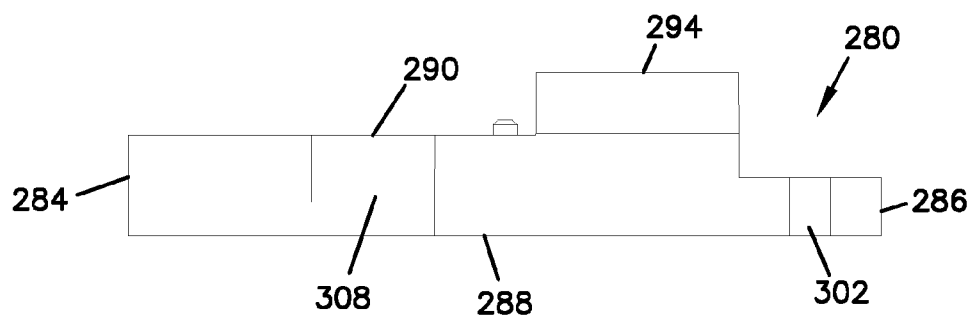


FIG.11

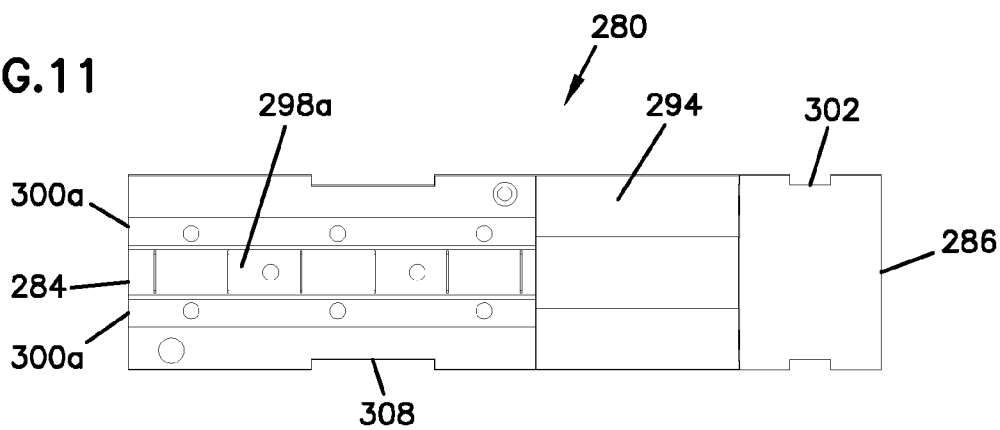


FIG.12

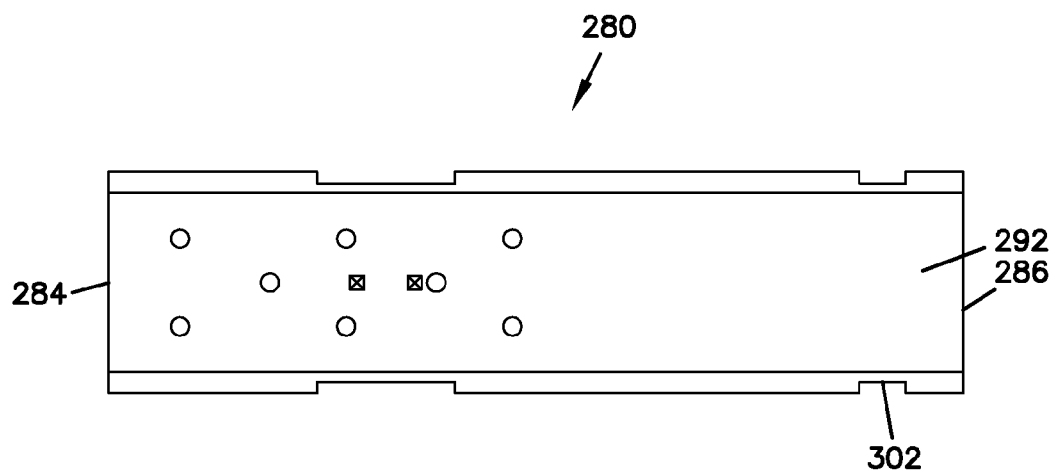


FIG.13

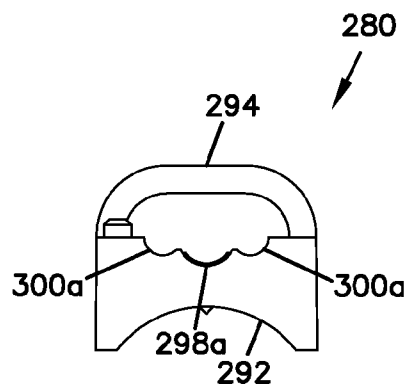


FIG.14

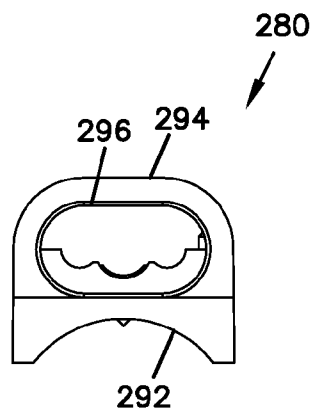


FIG.15

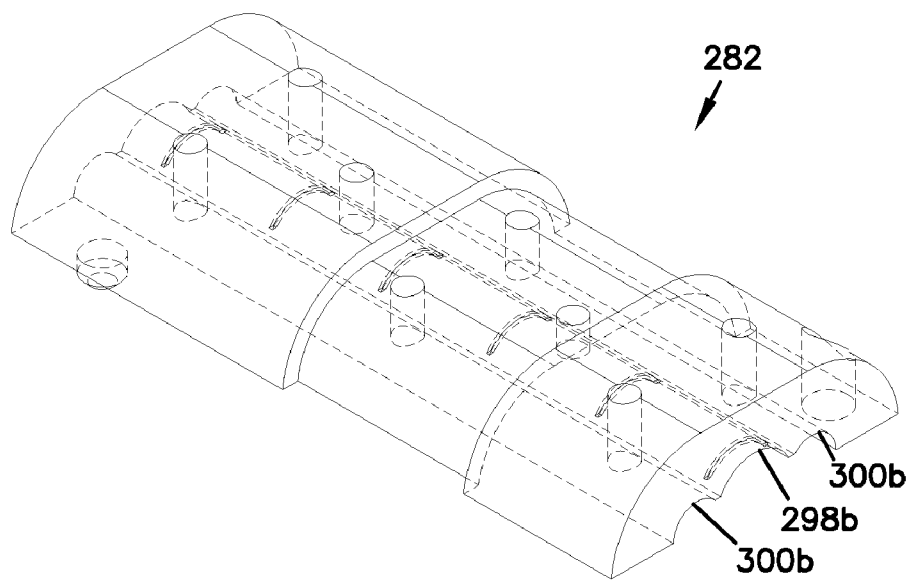


FIG.16

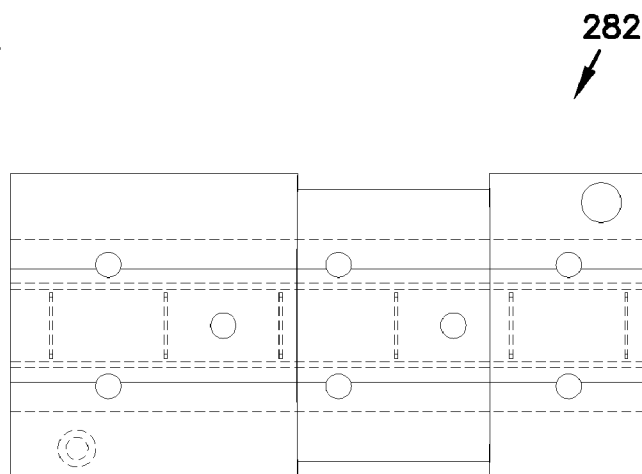


FIG.17

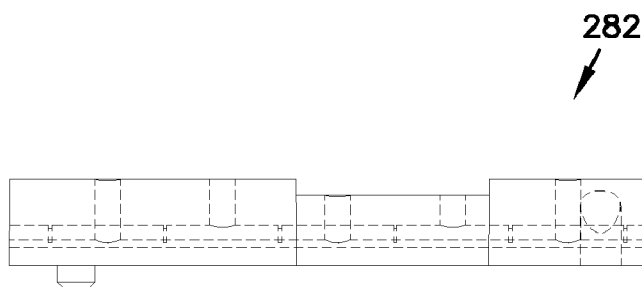


FIG.18

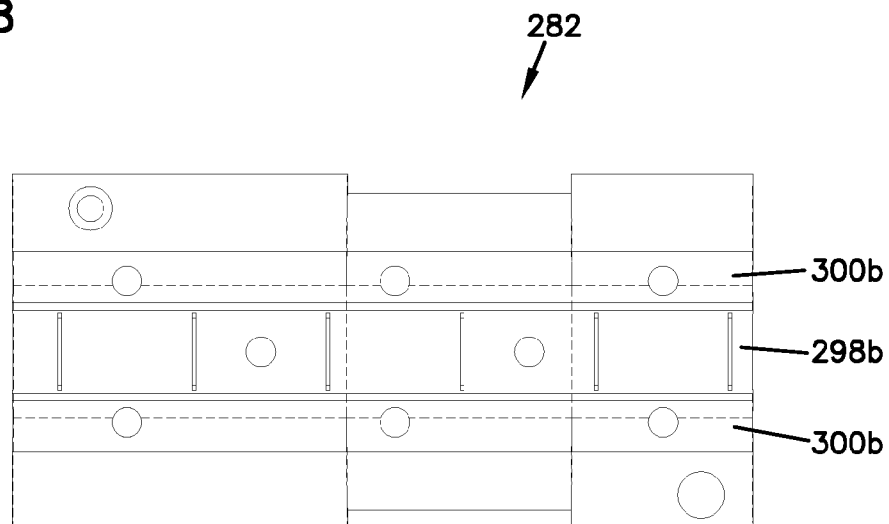


FIG.19

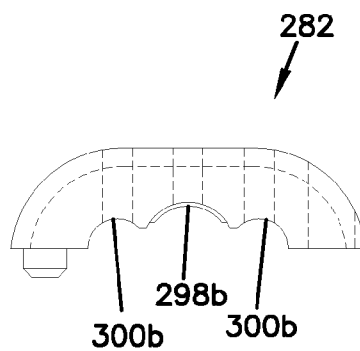


FIG.20

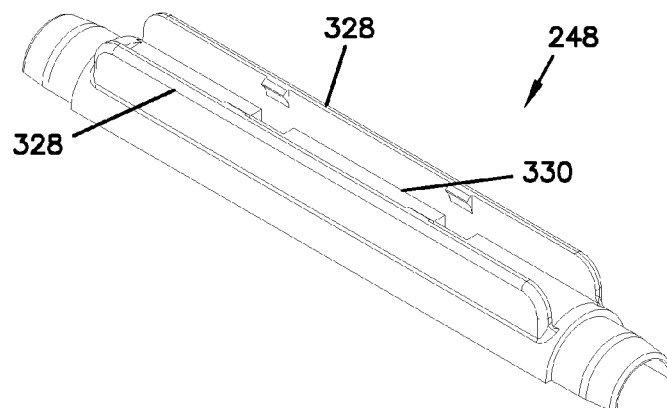


FIG.21

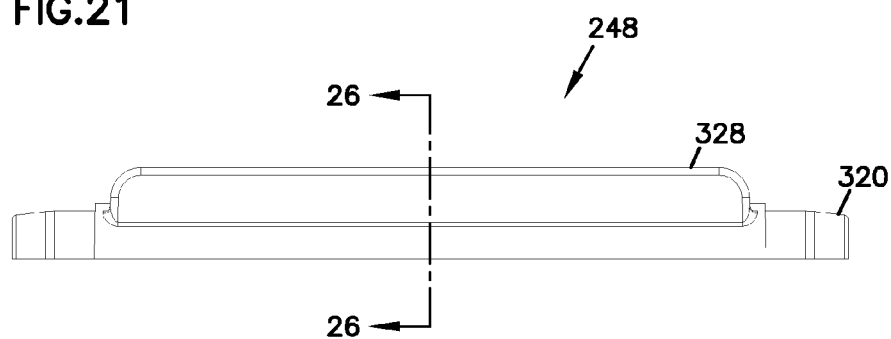


FIG.22

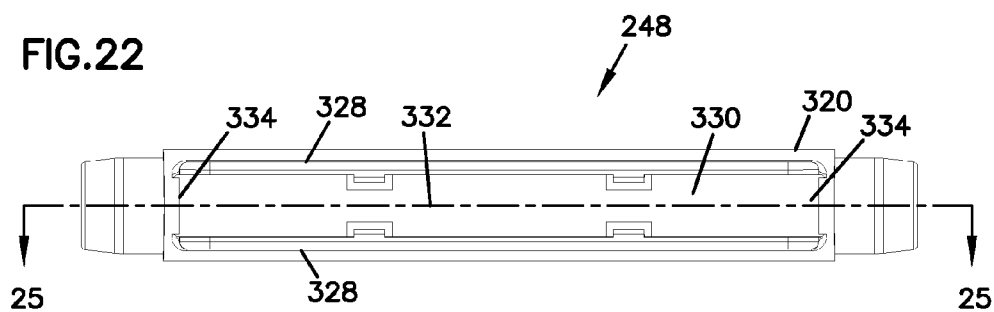


FIG.23

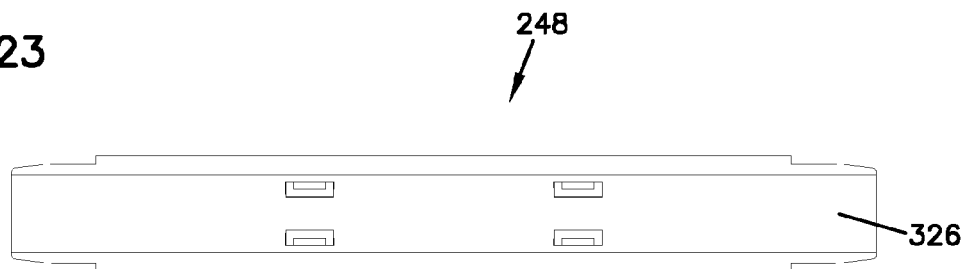


FIG.24




FIG.25

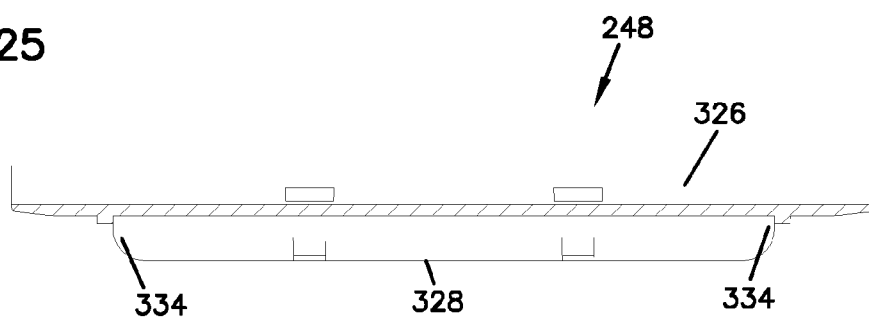


FIG.26

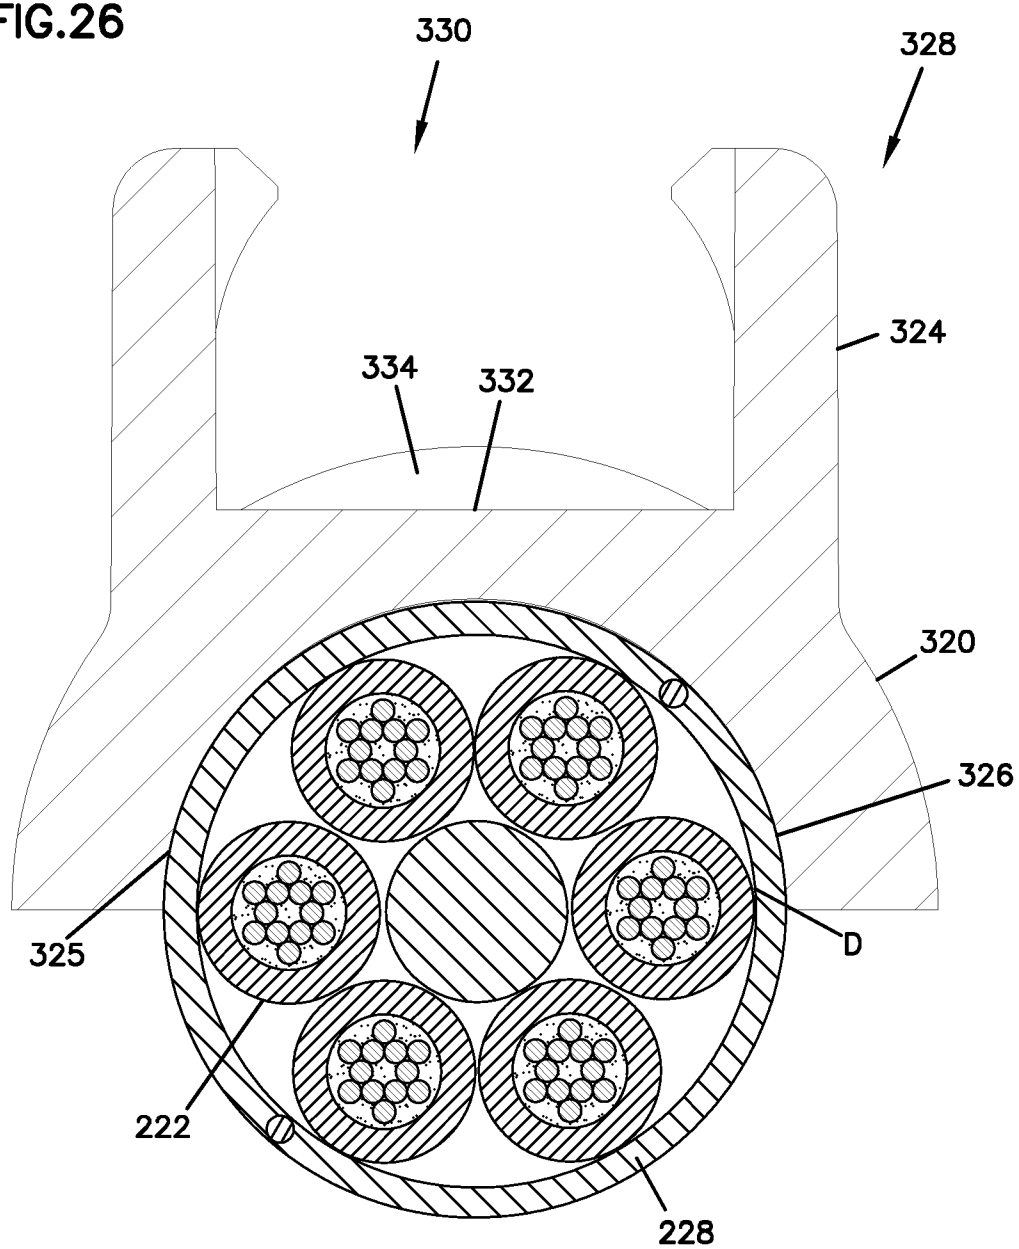


FIG.27

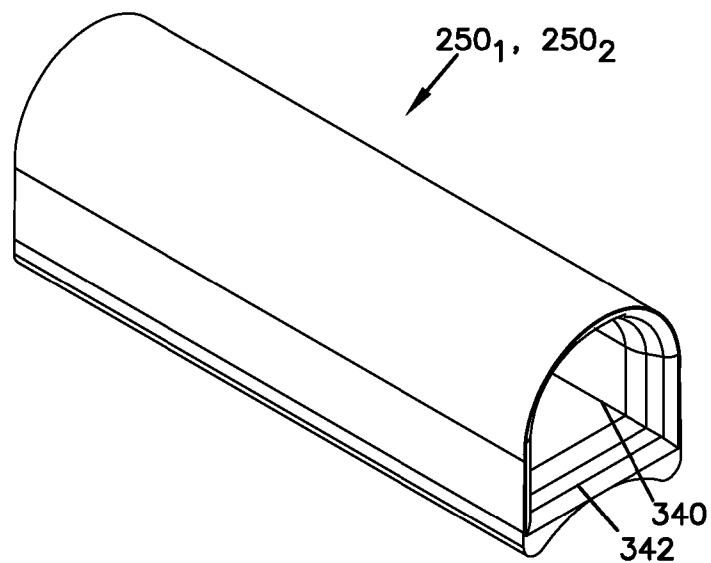


FIG.28

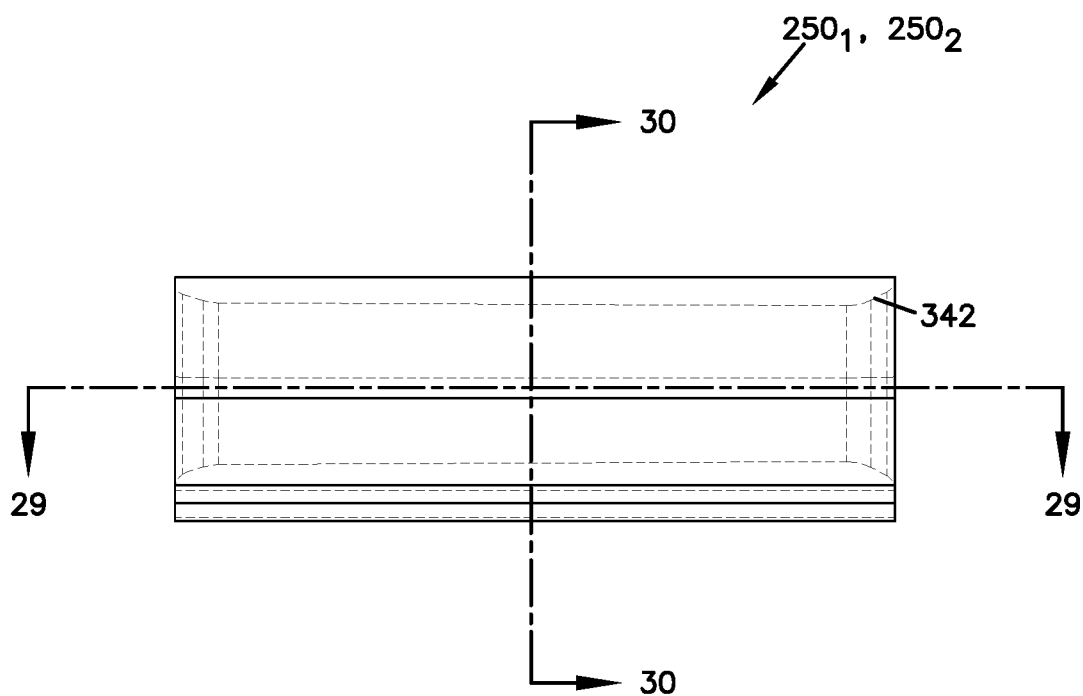


FIG.29

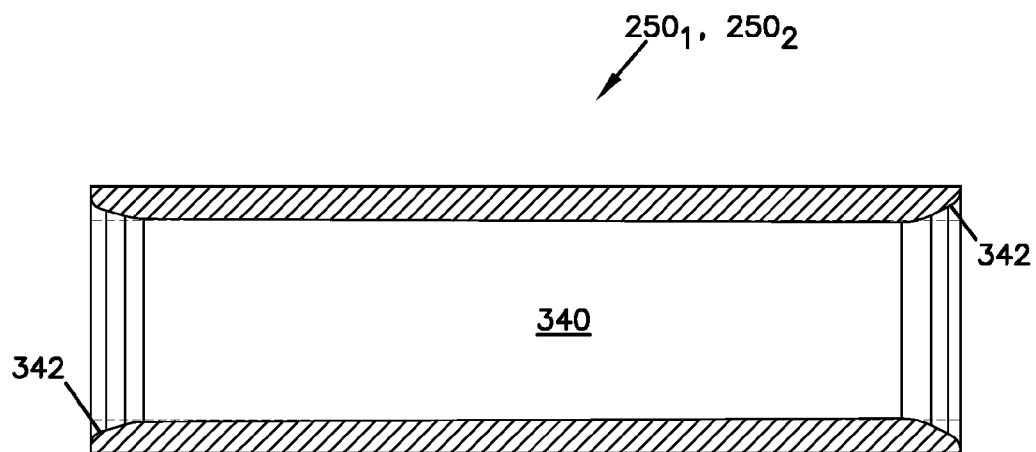
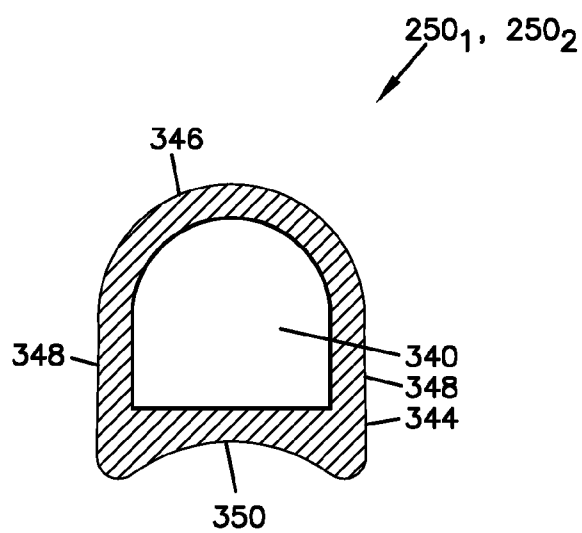


FIG.30



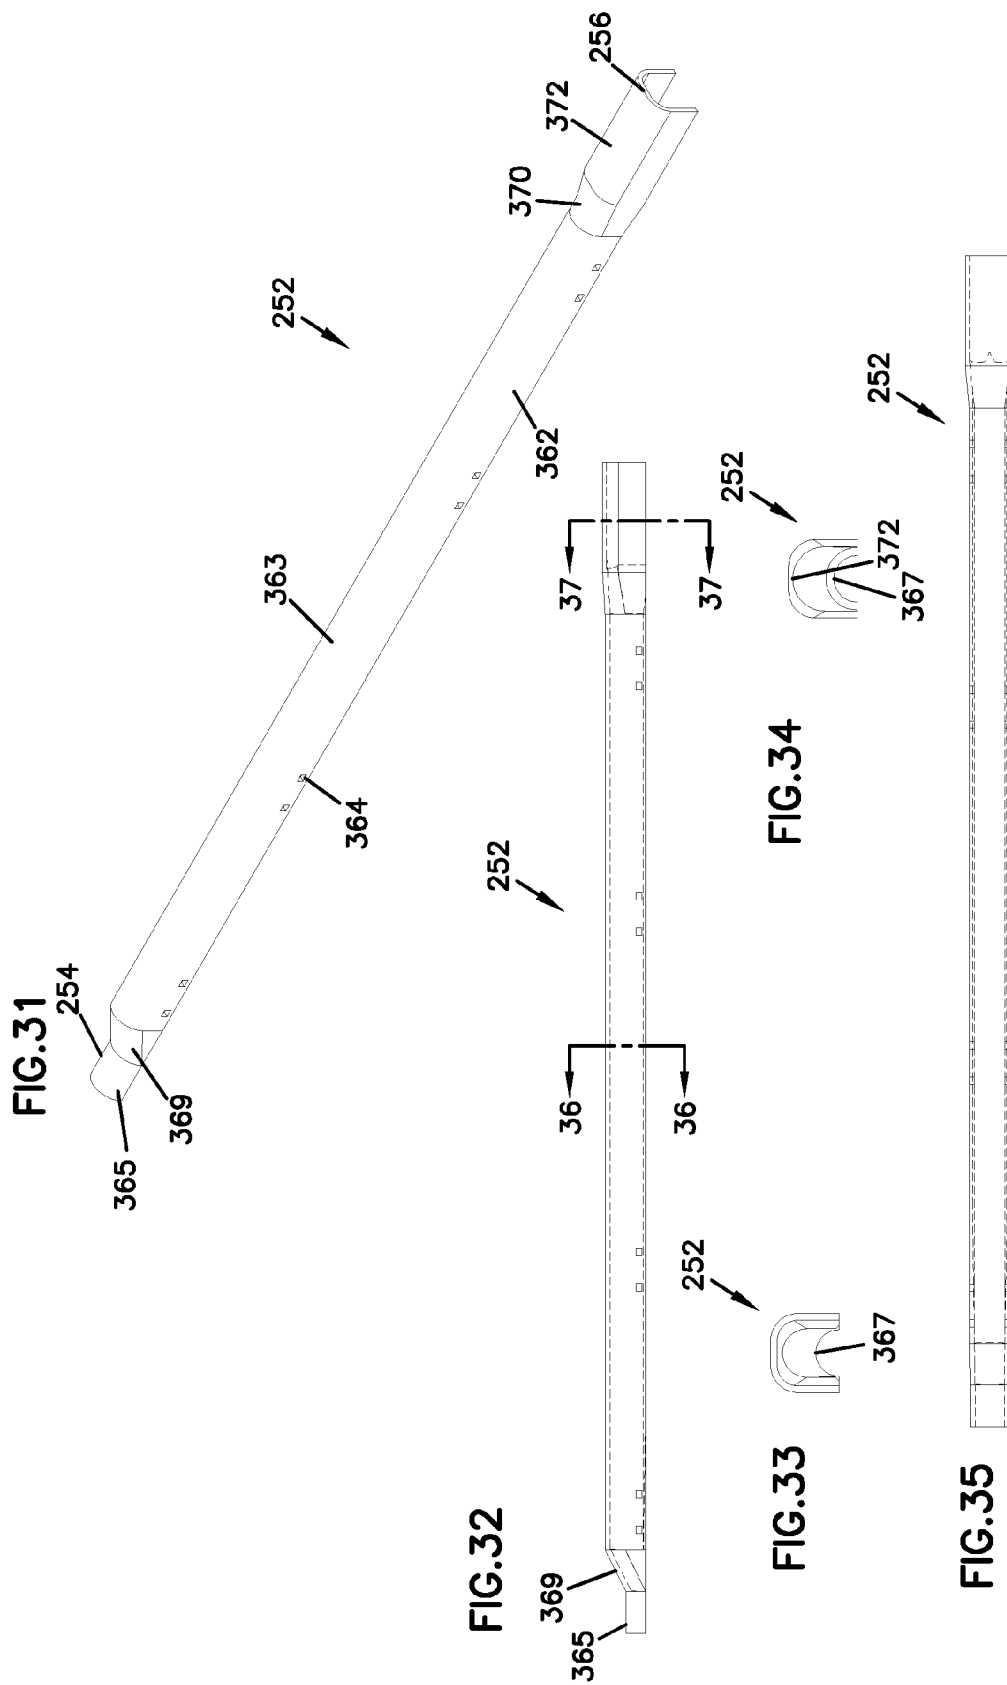


FIG.36

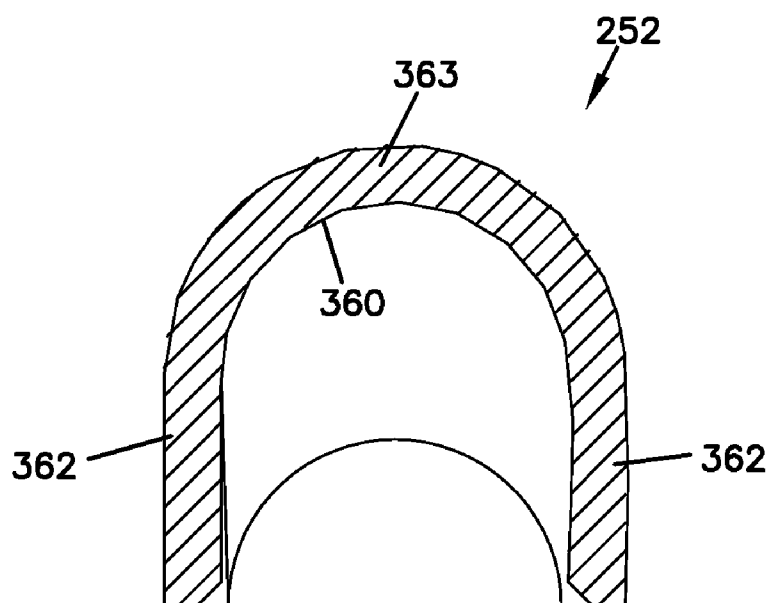


FIG.37

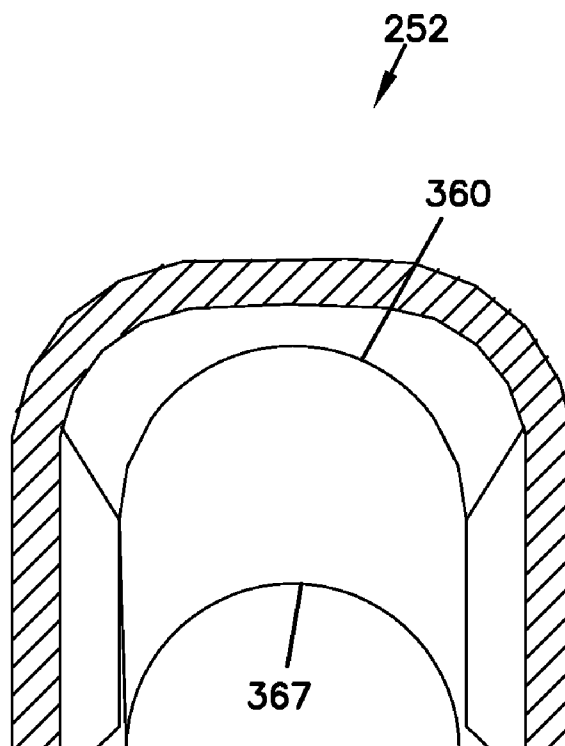


FIG.38

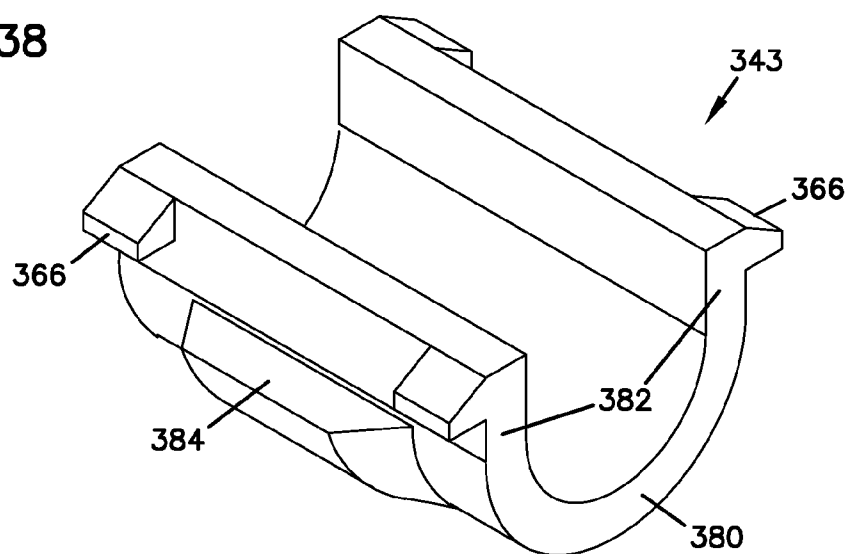


FIG.39

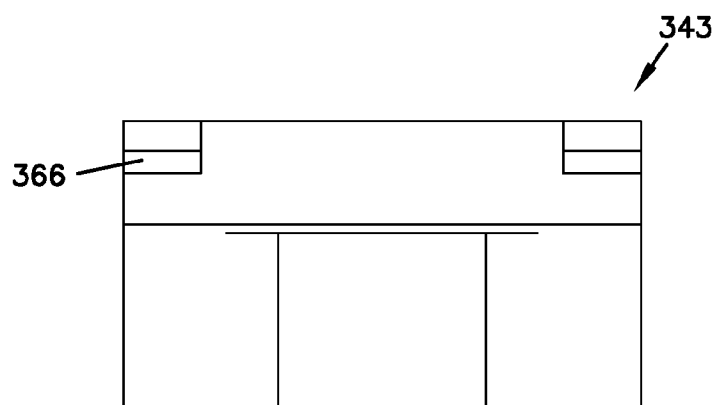


FIG.40

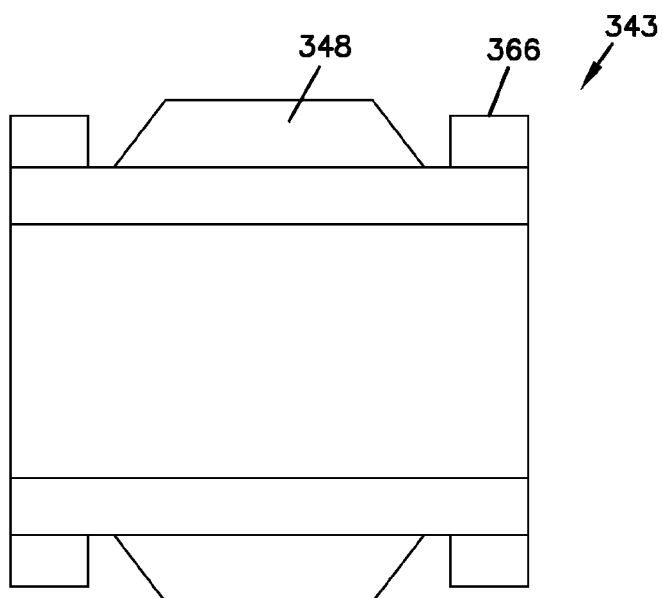


FIG.41

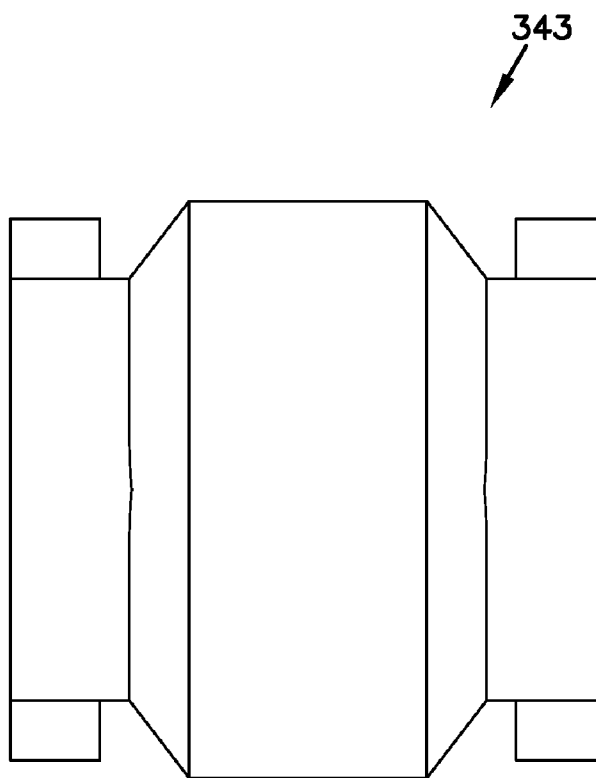
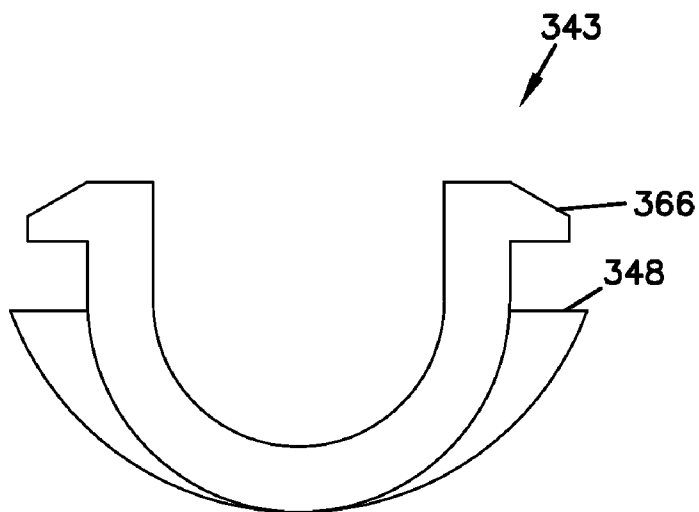


FIG.42



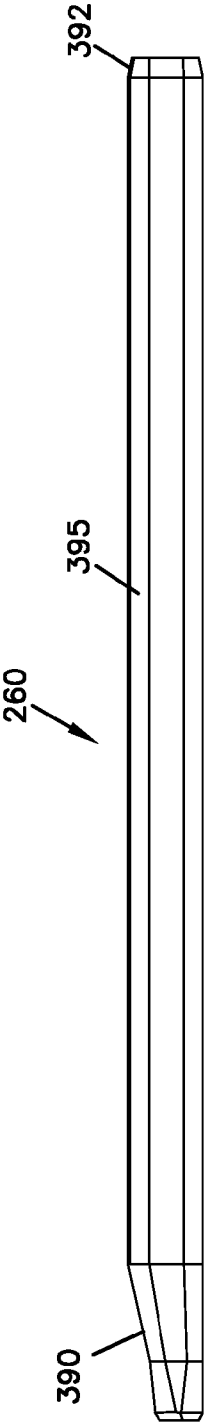


FIG. 43

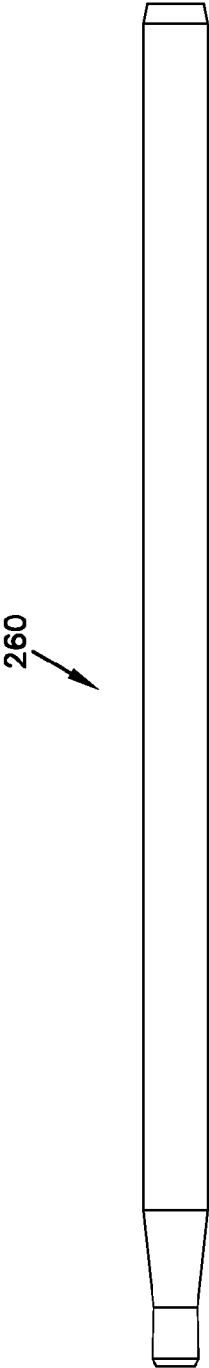


FIG. 44

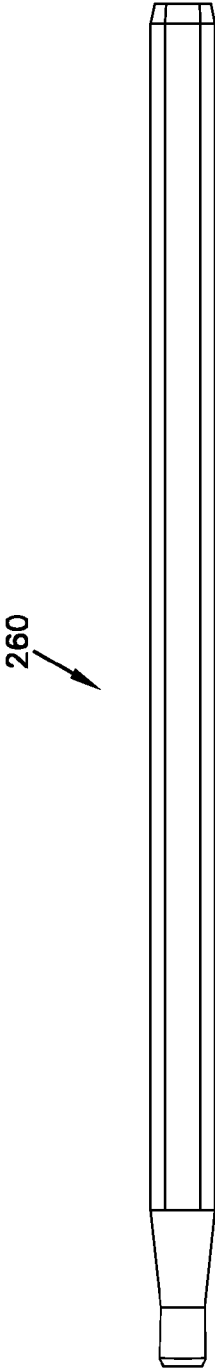


FIG. 45

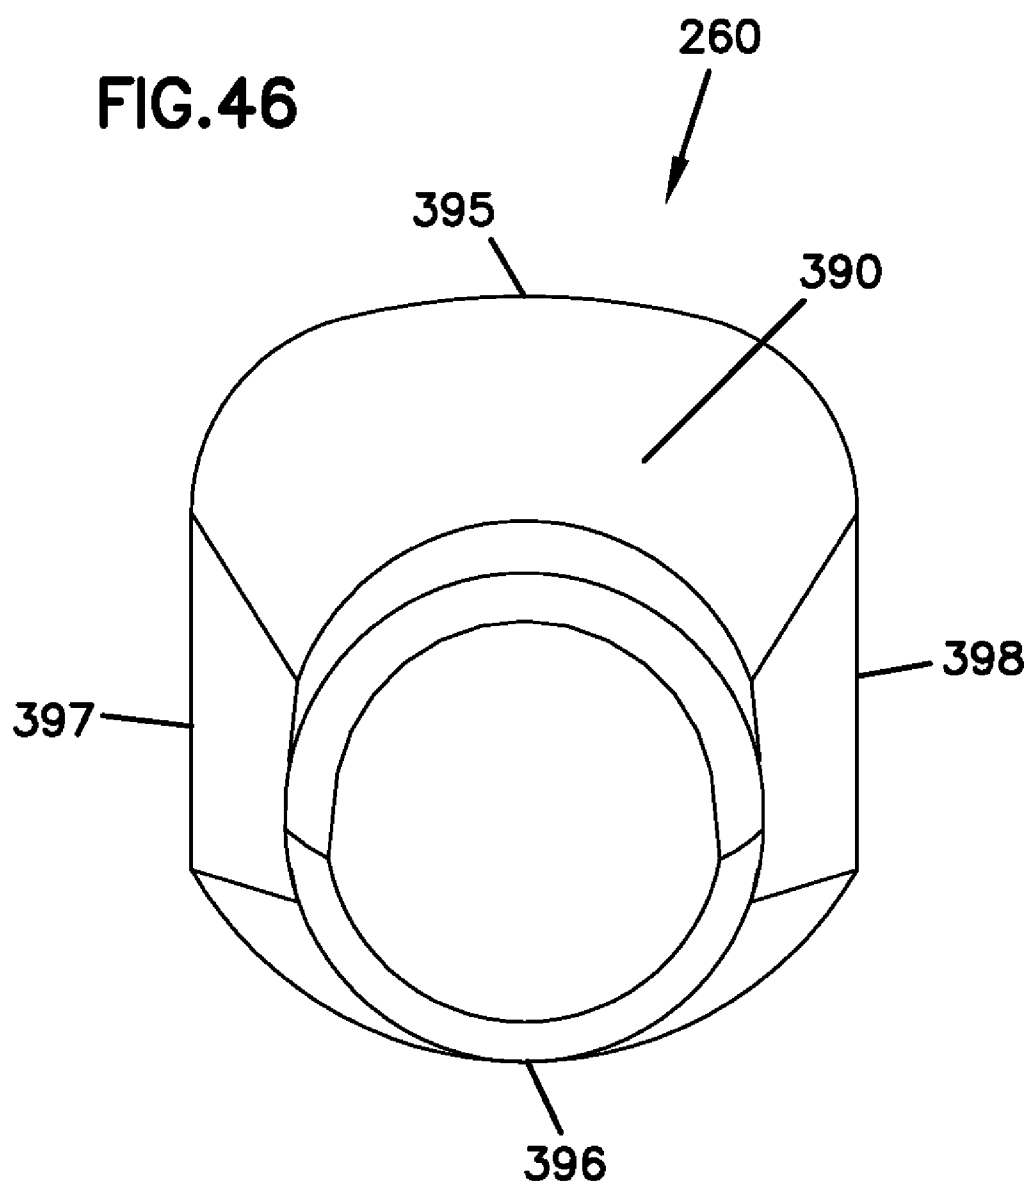


FIG.47

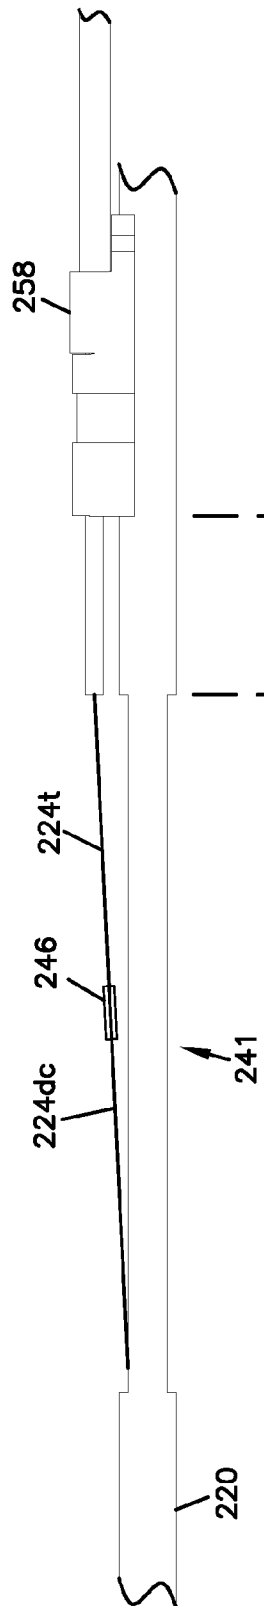


FIG.48

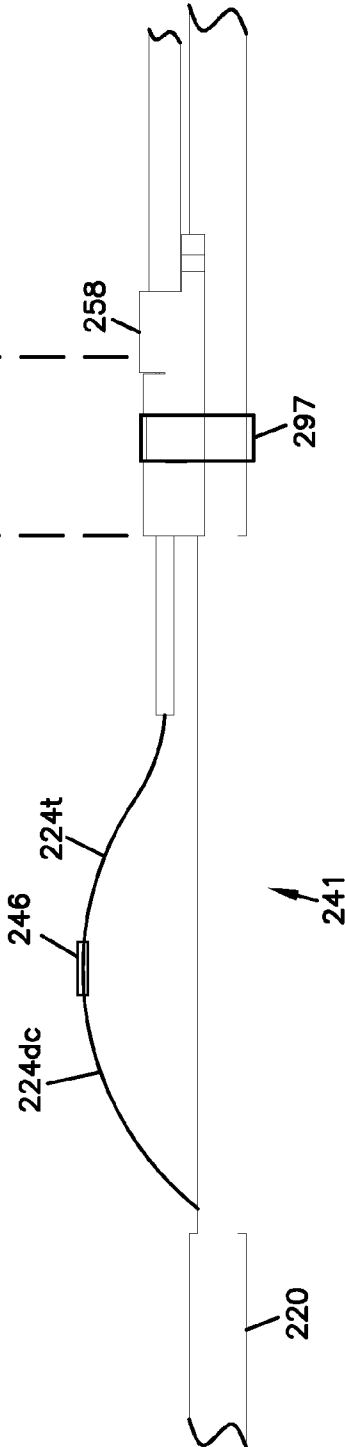


FIG.49

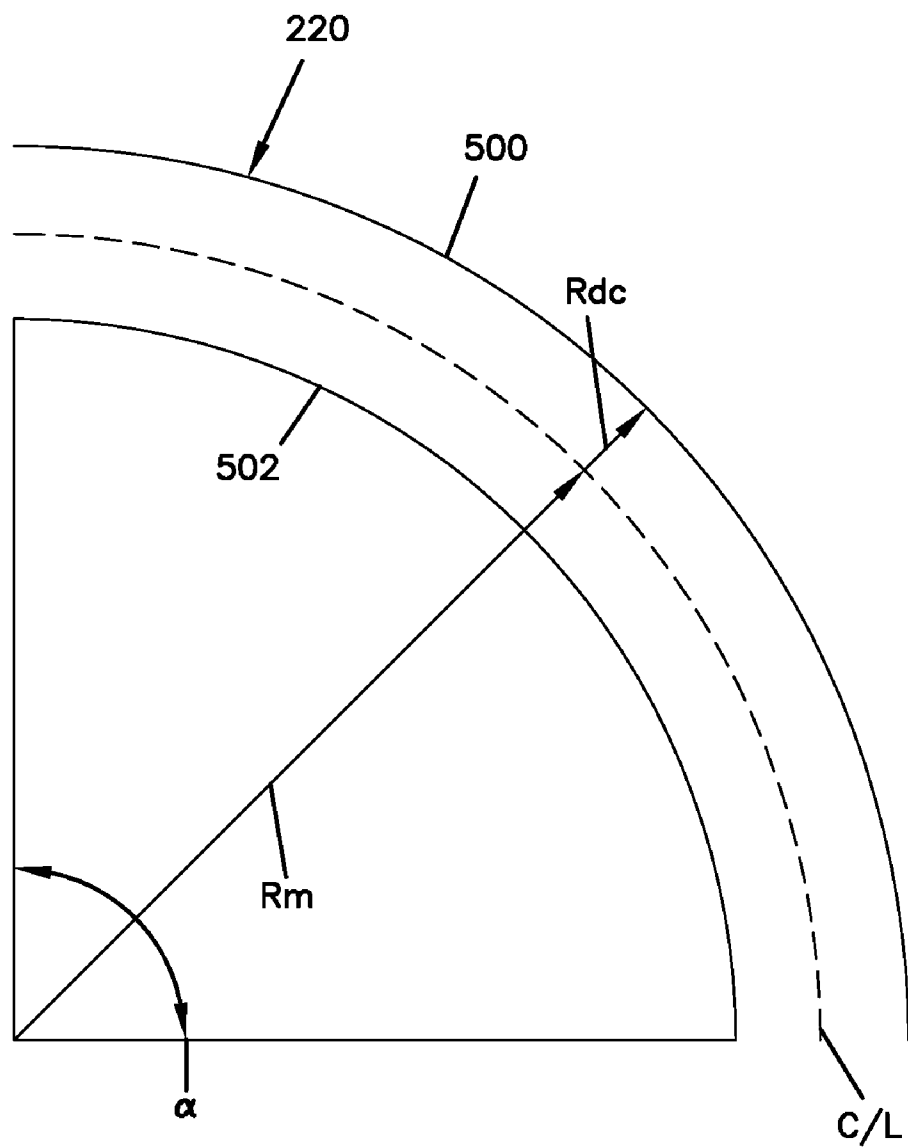


FIG.52

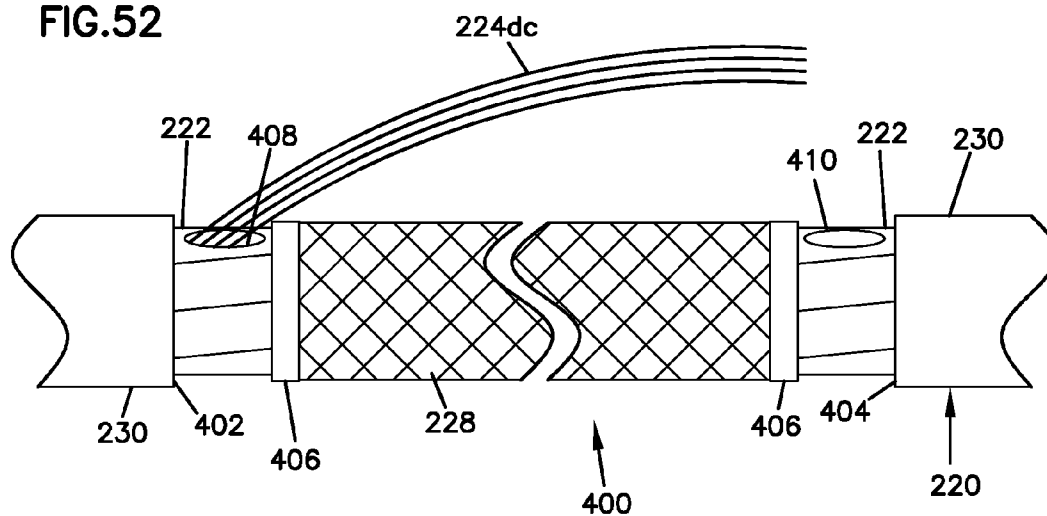


FIG.50

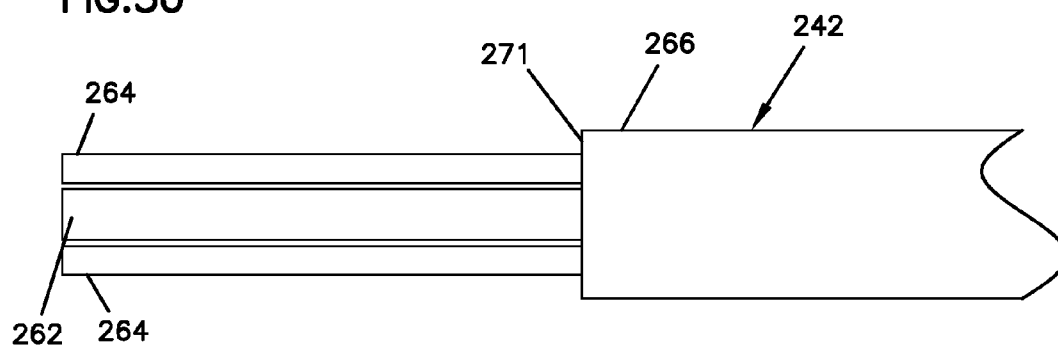


FIG.51

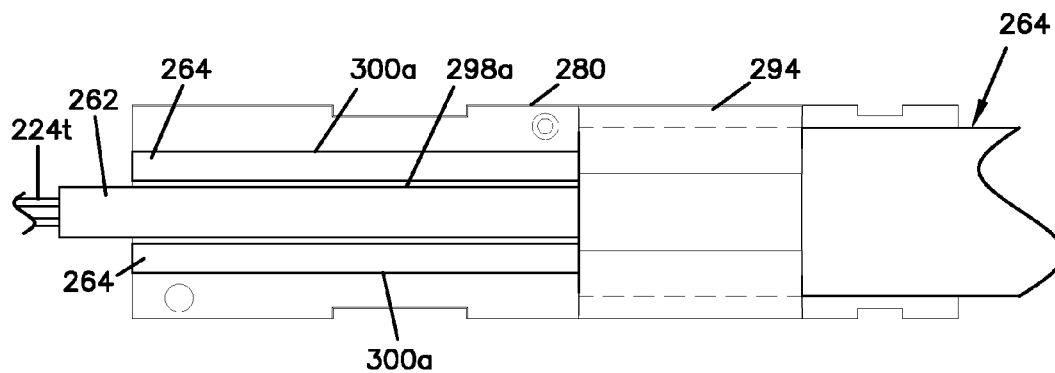


FIG. 53

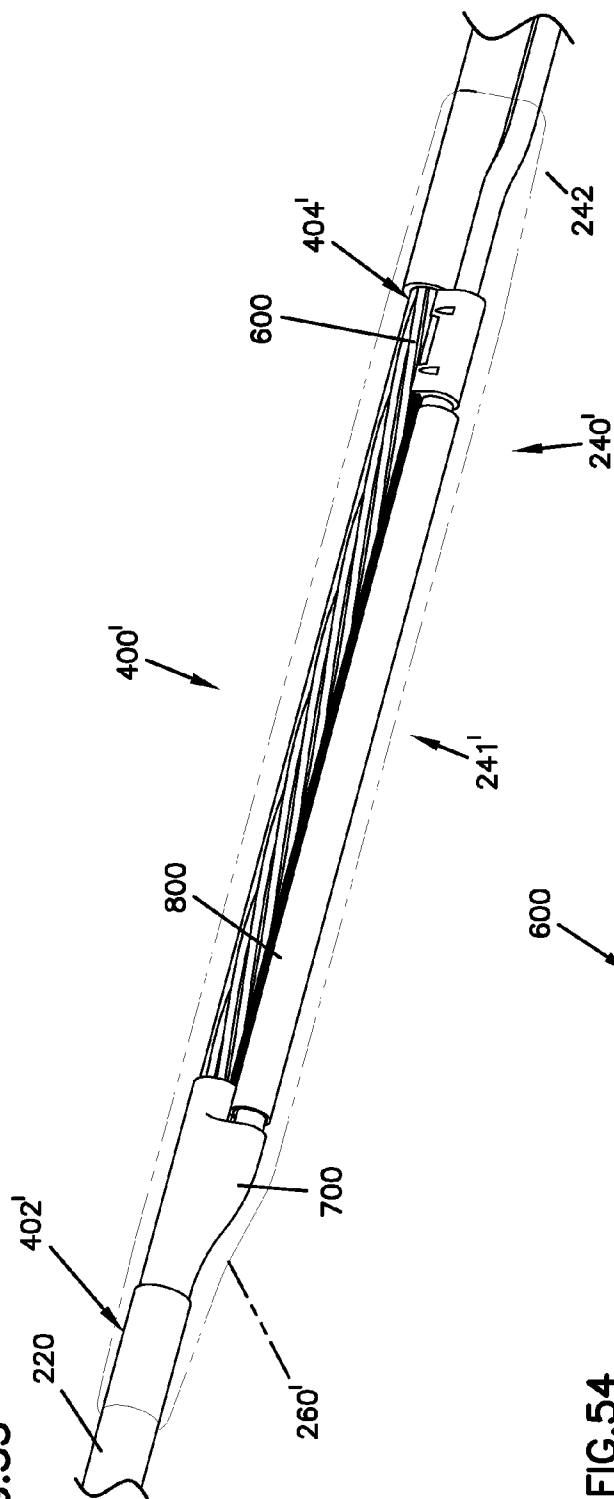


FIG. 54

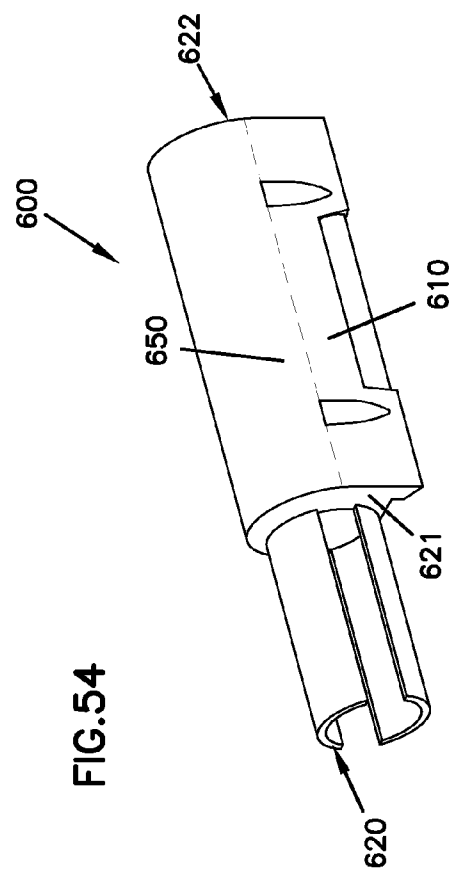


FIG.55

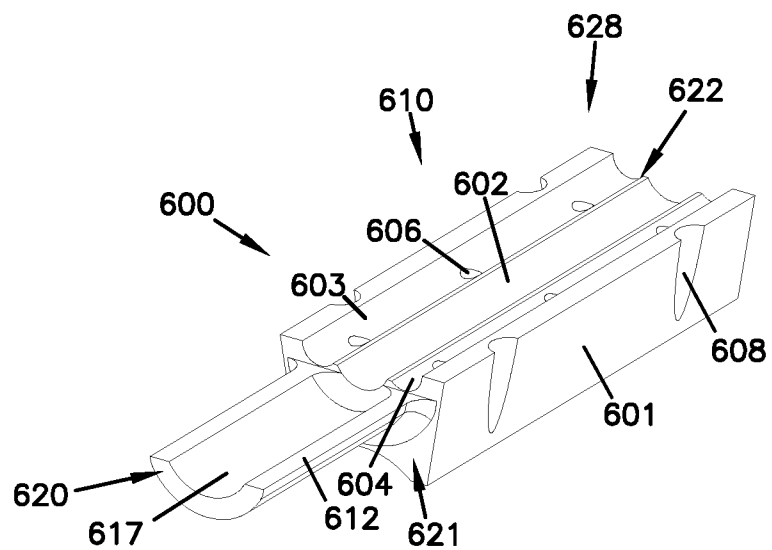


FIG.56

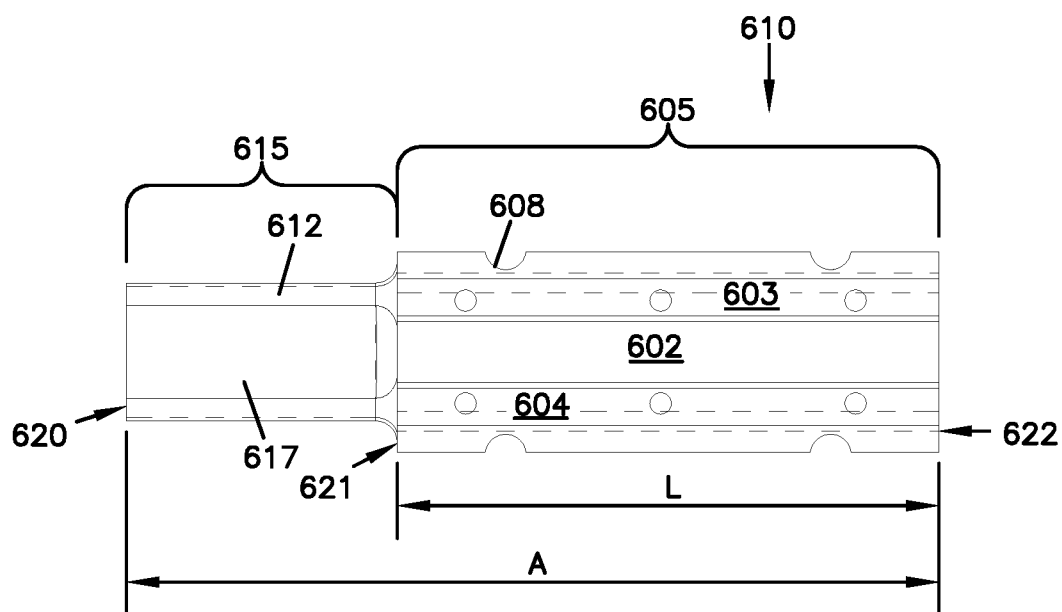


FIG.57

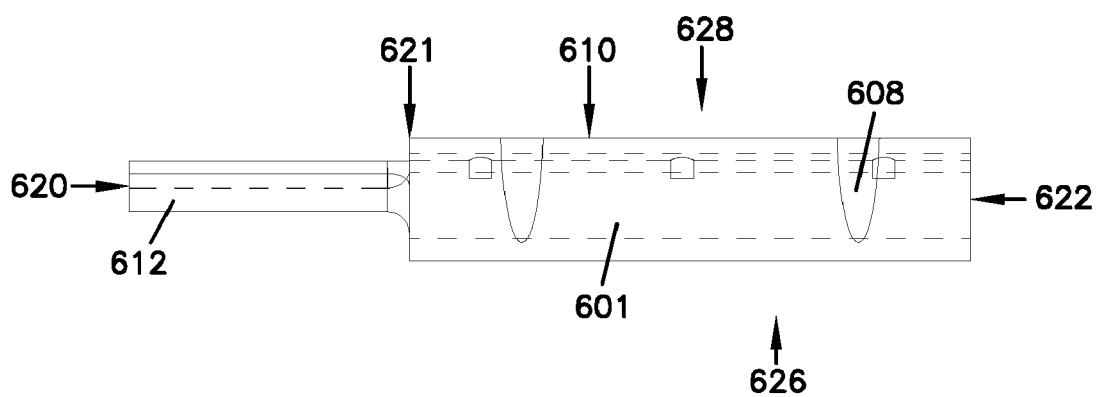


FIG.58

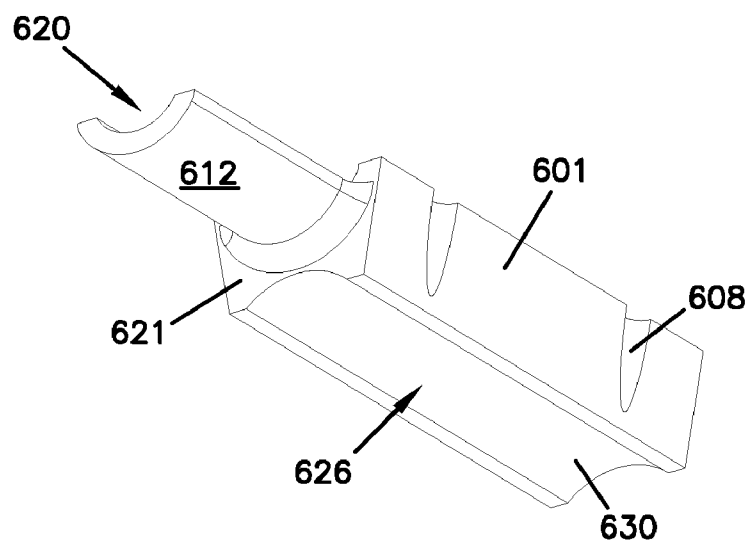


FIG.59





FIG.60



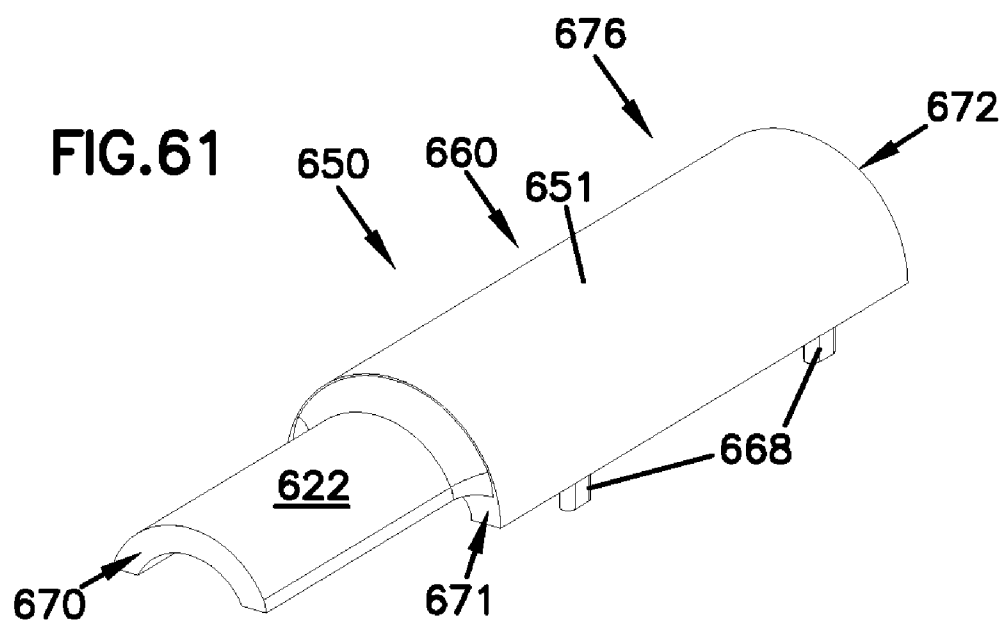


FIG.62

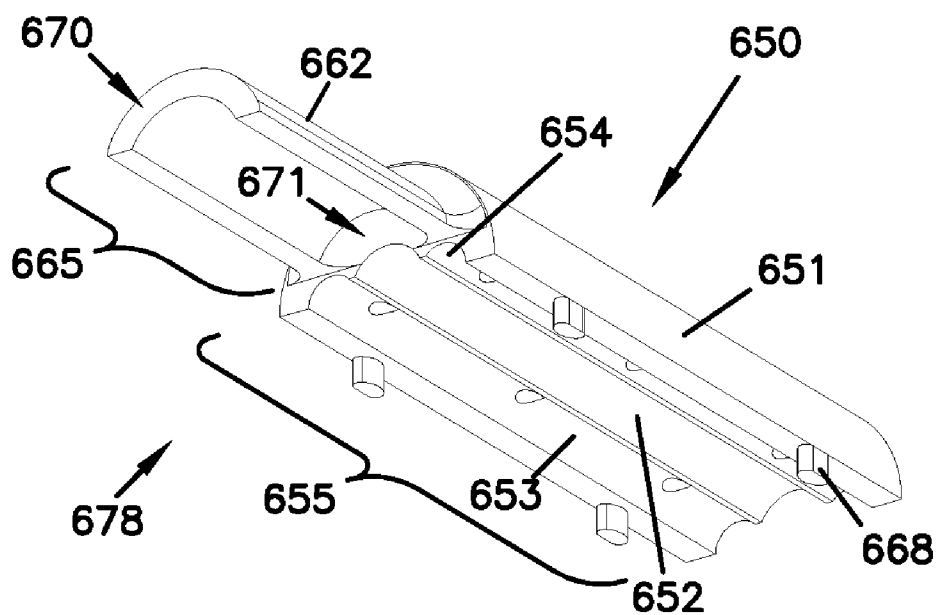


FIG.63

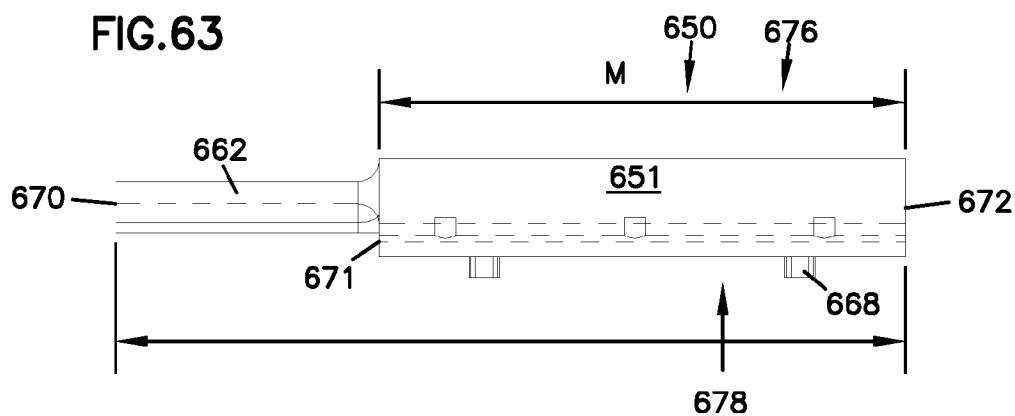


FIG.64

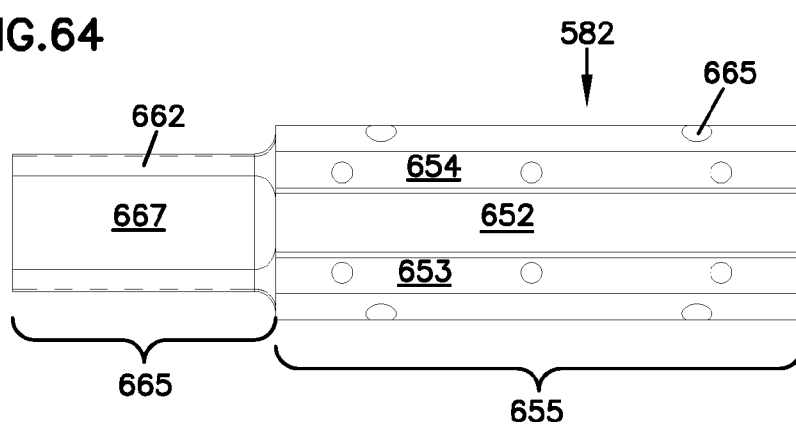


FIG.65




FIG.66




FIG.67

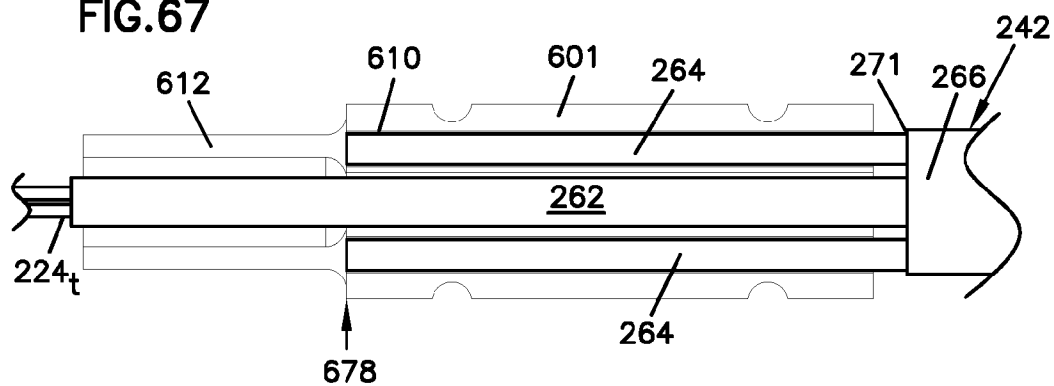


FIG.68

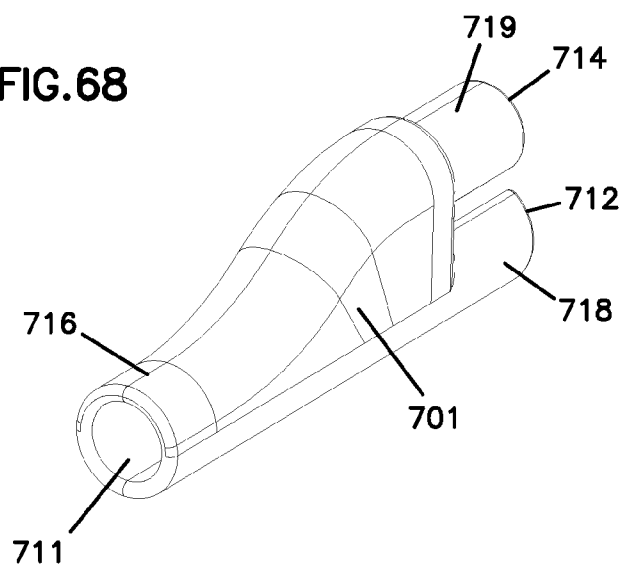


FIG.69

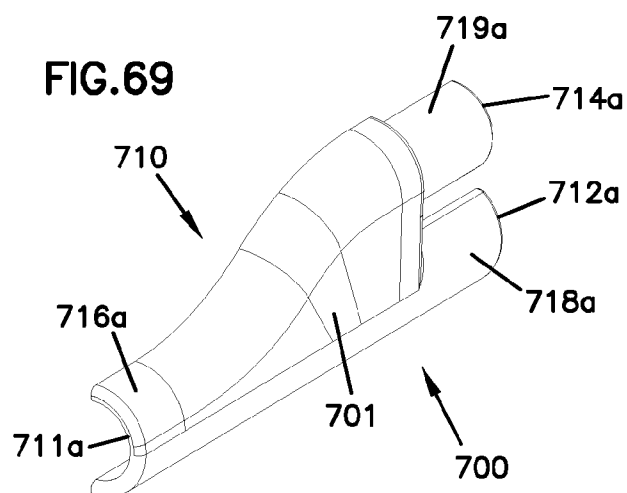


FIG.70

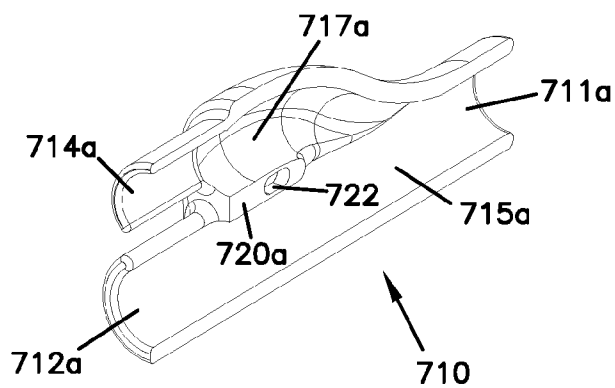


FIG.71

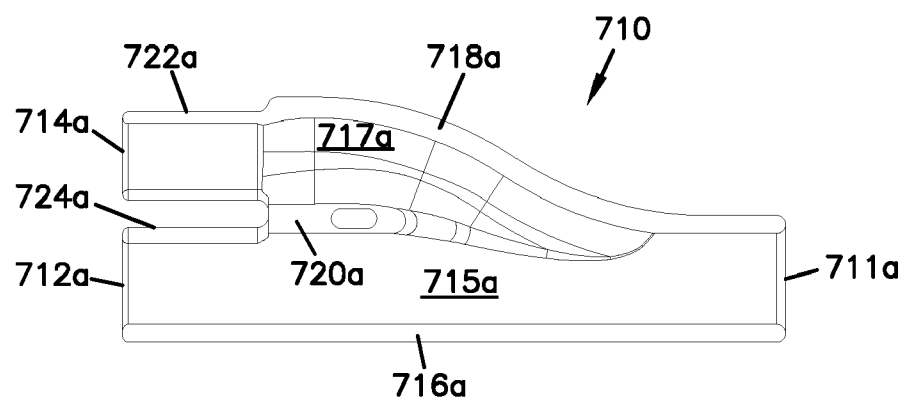


FIG.72



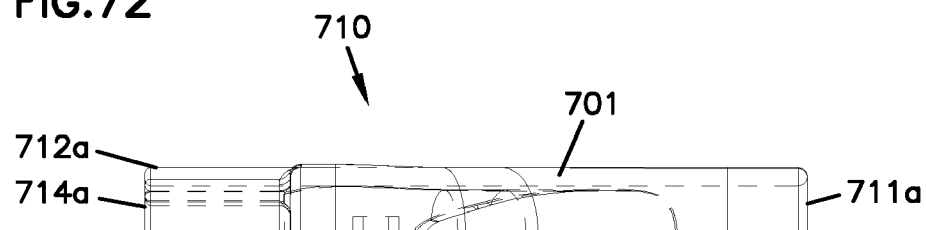


FIG.73

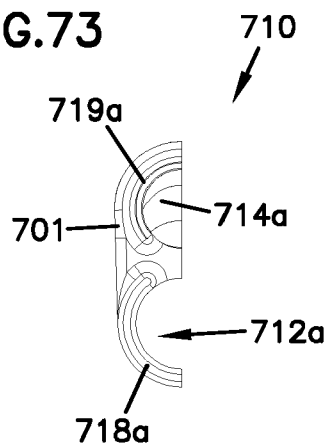

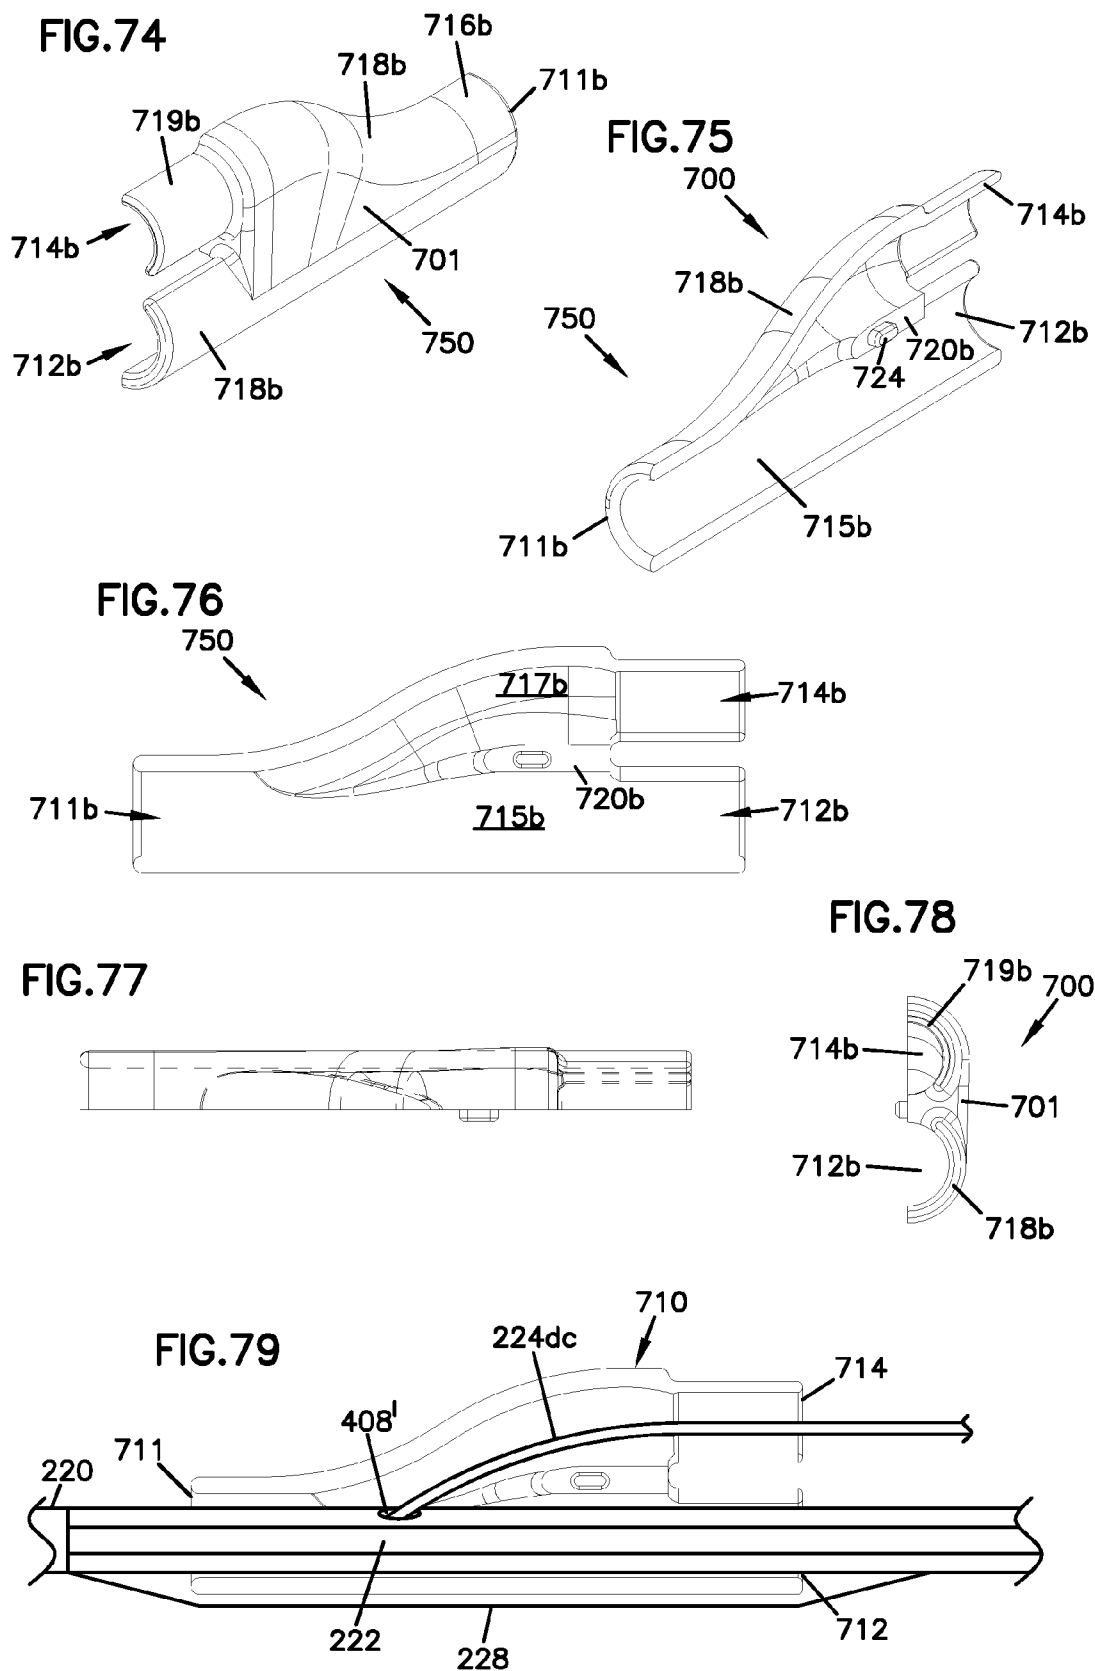

FIBER OPTIC CABLE BREAKOUT CONFIGURATION WITH RETENTION BLOCK

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of application Ser. No. 12/008,092, filed Jan. 7, 2008, which is a continuation of application Ser. No. 11/491,336, filed Jul. 21, 2006, now U.S. Pat. No. 7,317,863, which claims priority from provisional application Ser. No. 60/781,280, entitled FIBER OPTIC CABLE BREAKOUT CONFIGURATION, filed Mar. 9, 2006, which applications are incorporated herein by reference in their entirety.

TECHNICAL FIELD

[0002] The principles disclosed herein relate to fiber optic cable systems. More particularly, the present disclosure relates to fiber optic cable systems having main cables and branch cables.

BACKGROUND

[0003] Passive optical networks are becoming prevalent in part because service providers want to deliver high bandwidth communication capabilities to customers. Passive optical networks are a desirable choice for delivering high-speed communication data because they may not employ active electronic devices, such as amplifiers and repeaters, between a central office and a subscriber termination. The absence of active electronic devices may decrease network complexity and/or cost and may increase network reliability.

[0004] FIG. 1 illustrates a network 100 deploying passive fiber optic lines. As shown in FIG. 1, the network 100 may include a central office 110 that connects a number of end subscribers 115 (also called end users 115 herein) in a network. The central office 110 may additionally connect to a larger network such as the Internet (not shown) and a public switched telephone network (PSTN). The network 100 may also include fiber distribution hubs (FDHs) 130 having one or more optical splitters (e.g., 1-to-8 splitters, 1-to-16 splitters, or 1-to-32 splitters) that generate a number of individual fibers that may lead to the premises of an end user 115. The various lines of the network can be aerial or housed within underground conduits (e.g., see conduit 105).

[0005] The portion of network 100 that is closest to central office 110 is generally referred to as the F1 region, where F1 is the "feeder fiber" from the central office. The F1 portion of the network may include a distribution cable having on the order of 12 to 48 fibers; however, alternative implementations may include fewer or more fibers. The portion of network 100 that includes an FDH 130 and a number of end users 115 may be referred to as an F2 portion of network 100. Splitters used in an FDH 130 may accept a feeder cable having a number of fibers and may split those incoming fibers into, for example, 216 to 432 individual distribution fibers that may be associated with a like number of end user locations.

[0006] Referring to FIG. 1, the network 100 includes a plurality of breakout locations 125 at which branch cables (e.g., drop cables, stub cables, etc.) are separated out from main cables (e.g., distribution cables). Breakout locations can also be referred to as tap locations or branch locations and branch cables can also be referred to as breakout cables. At a breakout location, fibers of the branch cables are typically

spliced to selected fibers of the main cable. However, for certain applications, the interface between the fibers of the main cable and the fibers of the branch cables can be connectorized.

[0007] Stub cables are typically branch cables that are routed from breakout locations to intermediate access locations such as pedestals, drop terminals or hubs. Intermediate access locations can provide connector interfaces located between breakout locations and subscriber locations. A drop cable is a cable that typically forms the last leg to a subscriber location. For example, drop cables are routed from intermediate access locations to subscriber locations. Drop cables can also be routed directly from breakout locations to subscriber locations hereby bypassing any intermediate access locations

[0008] Branch cables can manually be separated out from a main cable in the field using field splices. Field splices are typically housed within sealed splice enclosures. Manual splicing in the field is time consuming and expensive.

[0009] As an alternative to manual splicing in the field, pre-terminated cable systems have been developed. Pre-terminated cable systems include factory integrated breakout locations manufactured at predetermined positions along the length of a main cable (e.g., see U.S. Pat. Nos. 4,961,623; 5,125,060; and 5,210,812). However, the installation of pre-terminated cables can be difficult. For example, for underground applications, pre-terminations can complicate passing pre-terminated cable through the underground conduit typically used to hold fiber optic cable (e.g., 1.25 inch inner diameter conduit). Similarly, for aerial applications, pre-terminations can complicate passing pre-terminated cable through aerial cable retention loops.

SUMMARY

[0010] Certain aspects of the disclosure relate to mid-span breakout configurations for pre-terminated fiber optic distribution cables.

[0011] A variety of additional inventive aspects will be set forth in the description that follows. The inventive aspects can relate to individual features and to combinations of features. It is to be understood that both the forgoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the broad inventive concepts upon which the embodiments disclosed herein are based.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1 shows a prior art passive fiber optic network;

[0013] FIG. 2 is a cross sectional view of an example distribution cable;

[0014] FIG. 3 is a side view of a mid-span breakout location having features that are examples of inventive aspects in accordance with the principles of the present disclosure;

[0015] FIG. 4 is a left end view of the mid-span breakout location of FIG. 3;

[0016] FIG. 5 is a right end view of the mid-span breakout location of FIG. 3;

[0017] FIG. 6 is a side view of the mid-span breakout location of FIG. 3 with the overmold removed;

[0018] FIG. 7 is a side view of the mid-span breakout location of FIG. 3 with the overmold and protective sleeve removed;

[0019] FIG. 7A is a cross sectional view taken along section line 7A-7A of FIG. 7;

[0020] FIG. 7B is a cross sectional view taken along section line 7B-7B of FIG. 7;

[0021] FIG. 8 is a cross sectional view of the tether taken along section line 8-8 of FIG. 7;

[0022] FIG. 9 is a perspective view of a base of a retention block used at the mid-span breakout location of FIG. 3;

[0023] FIG. 10 is a front side view of the base of FIG. 9;

[0024] FIG. 11 is a top view of the base of FIG. 9;

[0025] FIG. 12 is a bottom view of the base of FIG. 9;

[0026] FIG. 13 is a left end view of the base of FIG. 9;

[0027] FIG. 14 is a right end view of the base of FIG. 9;

[0028] FIG. 15 is a perspective view of a cover adapted to mount to the base of FIG. 9;

[0029] FIG. 16 is a top view of the cover of FIG. 15;

[0030] FIG. 17 is a front side view of the cover of FIG. 15;

[0031] FIG. 18 is an underside view of the cover of FIG. 15;

[0032] FIG. 19 is a right end view of the cover of FIG. 15;

[0033] FIG. 20 is a perspective view of a splice stiffener used at the mid-span breakout location of FIG. 3;

[0034] FIG. 21 is a front side view of the splice stiffener of FIG. 20;

[0035] FIG. 22 is a top view of the splice stiffener of FIG. 20;

[0036] FIG. 23 is a bottom view of the splice stiffener of FIG. 20;

[0037] FIG. 24 is a right end view of the splice stiffener of FIG. 20;

[0038] FIG. 25 is a cross sectional view taken along section line 25-25 of FIG. 22;

[0039] FIG. 26 is a cross sectional view taken along section line 26-26 of FIG. 21, the splice stiffener is shown mounted on a distribution cable;

[0040] FIG. 27 is a perspective view of a stiffener used at the mid-span breakout location of FIG. 3;

[0041] FIG. 28 is a front side view of the stiffener of FIG. 27;

[0042] FIG. 29 is a cross sectional view taken along section line 29-29 of FIG. 28;

[0043] FIG. 30 is a cross sectional view taken along section line 30-30 of FIG. 28;

[0044] FIG. 31 is a perspective view of a protective sleeve used at the mid-span breakout location of FIG. 3;

[0045] FIG. 32 is a front side view of the protective sleeve of FIG. 31;

[0046] FIG. 33 is a right end view of the protective sleeve of FIG. 31;

[0047] FIG. 34 is a left end view of the protective sleeve of FIG. 31;

[0048] FIG. 35 is a top view of the protective sleeve of FIG. 31;

[0049] FIG. 36 is a cross sectional view taken along section line 36-36 of FIG. 32;

[0050] FIG. 37 is a cross sectional view taken along section line 37-37 of FIG. 32;

[0051] FIG. 38 is a perspective view of a retention clip used to retain the protective sleeve of FIG. 31 at the mid-span breakout location of FIG. 3;

[0052] FIG. 39 is a front side view of the retention clip of FIG. 38;

[0053] FIG. 40 is a top view of the retention clip of FIG. 38;

[0054] FIG. 41 is a bottom view of the retention clip of FIG. 38;

[0055] FIG. 42 is a right end view of the retention clip of FIG. 38;

[0056] FIG. 43 is a side view of an overmold used at the mid-span breakout location of FIG. 3;

[0057] FIG. 44 is a top view of the overmold of FIG. 43;

[0058] FIG. 45 is a bottom view of the overmold of FIG. 43;

[0059] FIG. 46 is a left end view of the overmold of FIG. 43;

[0060] FIGS. 47 and 48 are schematic views showing a method for providing excess fiber length at the mid-span breakout location of FIG. 3;

[0061] FIG. 49 is a schematic view showing a distribution cable bent along a 90 degree curve at a maximum bend radius;

[0062] FIG. 50 shows a first preparation step for a tether used at the mid-span breakout location of FIG. 3;

[0063] FIG. 51 shows a subsequent preparation step of the tether of FIG. 50; and

[0064] FIG. 52 shows an initial preparation of the distribution cable at the mid-span breakout location;

[0065] FIG. 53 is a perspective view of an example mid-span breakout assembly;

[0066] FIG. 54 is a perspective view of an example retention block;

[0067] FIG. 55 is a perspective view of a base of the retention block of FIG. 54;

[0068] FIG. 56 is a top view of the base of FIG. 55;

[0069] FIG. 57 is a bottom perspective view of the base of FIG. 55;

[0070] FIG. 58 is a side view of the base of FIG. 55;

[0071] FIG. 59 is a transverse cross-sectional view of the base of FIG. 55;

[0072] FIG. 60 is a front view of the base of FIG. 55;

[0073] FIG. 61 is a top perspective view of a cover of the retention block of FIG. 54;

[0074] FIG. 62 is a bottom perspective view of the cover of FIG. 61;

[0075] FIG. 63 is a side view of the cover of FIG. 61;

[0076] FIG. 64 is a top view of the cover of FIG. 61;

[0077] FIG. 65 is a transverse cross-sectional view of the cover of FIG. 61;

[0078] FIG. 66 is a front view of the cover of FIG. 61;

[0079] FIG. 67 is a top view of the cover of FIG. 61 showing preparation of a tether cable at an example mid-span breakout location;

[0080] FIG. 68 is a front perspective view of an example separation block;

[0081] FIG. 69 is a front perspective view of an example first section of the separation block of FIG. 68;

[0082] FIG. 70 is a rear perspective view of the first section of FIG. 69;

[0083] FIG. 71 is a side view of the first section of FIG. 69;

[0084] FIG. 72 is a top view of the first section of FIG. 69;

[0085] FIG. 73 is a rear view of the first section of FIG. 69;

[0086] FIG. 74 is a rear perspective view of an example second section of the separation block of FIG. 68;

[0087] FIG. 75 is a front perspective view of the second section of FIG. 74;

[0088] FIG. 76 is a side view of the second section of FIG. 74;

[0089] FIG. 77 is a top view of the second section of FIG. 74;

[0090] FIG. 78 is a cross-sectional view of the first section of FIG. 74; and

[0091] FIG. 79 is a side view of the second section of FIG. 74 showing preparation of a distribution cable at an example mid-span breakout location.

DETAILED DESCRIPTION

[0092] The present disclosure relates to mid-span breakout arrangements provided on distribution cables. A typical distribution cable includes a relatively large number of fibers (e.g., 72, 144 or more fibers). The fibers are typically segregated into separate groups with each group contained within a separate buffer tube. The fibers within each buffer tube can include either ribbon fibers or loose fibers.

[0093] For example, FIG. 2 shows an example distribution cable 220 including six separate buffer tubes 222 each containing twelve fibers 224. The buffer tubes 222 may be gel filled. The distribution cable 220 also includes a central strength member 226 for reinforcing the cable 220, and an outer strength member 228 such as Kevlar for also reinforcing the cable. The distribution cable 220 further includes an outer jacket 230 that encloses the buffer tubes 222. Ripcords 232 can be provided for facilitating tearing away portions of the jacket 230 to access the fibers 224 within the jacket 230.

[0094] While distribution cables typically have a large number of fibers, the various aspects of the present disclosure are also applicable to distribution cables having fewer numbers of fibers (e.g., 2 or more fibers). For example, the distribution cable can include an outer jacket enclosing a single buffer tube and at least two strength members extending on opposite sides of the single buffer tube. An outer strength member such as Kevlar can surround the single buffer tube within the jacket. The single buffer tube can enclose loose fibers or ribbon fibers.

[0095] A typical mid-span breakout location is provided at an intermediate point along the length of a distribution cable. Commonly a tether (e.g., a drop cable or a stub cable) branches out from the distribution cable at the breakout location. The tether most commonly has a fewer number of fibers as compared to the number of fibers provided within the distribution cable. In an example embodiment, the tether has no more than twelve fibers. The tether includes fibers that extend between first and second ends. The first ends of the tether fibers are preferably spliced to selected fibers of the distribution cable at the breakout location. The second ends of the tether fibers can either be connectorized or unconnectorized.

[0096] FIGS. 3-7 illustrate a mid-span breakout assembly 240 having features that are examples of inventive aspects in accordance with the principles of the present disclosure. The breakout assembly is positioned at a mid-span breakout location 241. As shown at FIGS. 3, 6 and 7, a tether 242 branches outwardly from a main distribution cable 220 at the mid-span breakout location 241. The breakout location 241 is shown including a splice location 244 where selected fibers 224_{dc} of the main distribution cable 220 (e.g., typically less than twelve fibers) are spliced to corresponding fibers 224_t of the tether 242. The breakout assembly includes a splice sleeve 246 positioned over the splices, and a splice stiffener 248 for holding the splice sleeve 246. The breakout assembly 240 also includes stiffeners 250₁, 250₂ between which the splice stiffener 248 is positioned. The fibers 224_{dc} from the distribution cable 220 pass through the stiffener 250₁ to reach the splice location 244. The fibers 224_t from the tether 242 pass through the stiffener 250₂ to reach the splice location 244. The breakout assembly 240 further includes a protective sleeve

252 (e.g., a shell) that covers the breakout location 241. The stiffeners 250₁, 250₂ and the splice stiffener 248 are all enclosed within the sleeve 252. A first end 254 of the sleeve 252 forms a tapered nose, and a second end 256 of the sleeve 252 overlaps a retention block 258 through which the fibers 224_t of the tether 242 pass. Retention clips 243 are used to secure the protective sleeve 252 to the distribution cable 220. The breakout assembly 240 also includes an over-mold (i.e., a flexible closure) 260 that encloses and seals the protective sleeve 252, the clips 243 and the retention block 258. In certain embodiments, a wrap of heat resistant tape 263 can provide an intermediate layer between the protective sleeve 252 and the over-mold 260.

[0097] Referring to FIG. 8, the tether 242 joined to the distribution cable 220 at the breakout location 241 is depicted as having a flat cable configuration. The flat cable configuration includes a central buffer tube 262 containing a plurality of fibers 224_t (e.g., typically one to twelve loose or ribbonized fibers). Strength members 264 (e.g., flexible rods formed by glass fiber reinforced epoxy) are positioned on opposite sides of the central buffer tube 262. An outer jacket 266 surrounds the strength members 264 and the buffer tube 262. The outer jacket 266 includes an outer perimeter having an elongated transverse cross-sectional shape. An additional strength layer 265 (e.g., Kevlar) can be positioned between the buffer tube 262 and the outer jacket 266. As shown at FIG. 8, the transverse cross-sectional shape includes oppositely positioned, generally parallel sides 268 interconnected by rounded ends 270.

[0098] When the tether 242 is secured to the distribution cable 220, the tether 242 should preferably be able to withstand a pullout force of at least 100 pounds. To meet this pullout force requirement, the retention block 258 is used to strengthen the mechanical interface between the tether 242 and the distribution cable 220. As shown at FIG. 7, the retention block 258 includes a base 280 (i.e., or first portion) and a cover 282 (i.e., or second portion) between which the tether 242 extends. In one embodiment, the retention block 258 has a plastic construction.

[0099] Referring to FIGS. 9-14, the base 280 of the retention block 258 includes a first end 284 positioned opposite from a second end 286. The base 280 is elongated along a length A that extends between the first and second ends 284, 286. The base also includes a first side 288 adapted to engage the outer surface of the distribution cable jacket, and a second side 290 adapted to engage the tether 242. The first side 288 has a channel 292 that extends along the length L of the base 280. The channel 292 has a transverse cross-sectional shape that is curved to match the outer diameter of the distribution cable jacket 230. Thus, when the retention block 258 is mounted to the distribution cable 220, the distribution cable 220 nests within the channel 292 as shown at FIGS. 7A and 7B. The second side 290 of the base 280 includes a retention sleeve 294 defining an elongate opening 296 having a transverse cross-sectional shape that matches the transverse cross-sectional shape of the outer perimeter of the tether cable jacket 266. When the tether 242 is secured to the retention block 258, a jacketed portion of the tether 242 fits within the sleeve 294 (see FIG. 7A). When the base is mounted on the distribution cable 220, the opening 296 is elongated in a direction generally perpendicular to a radial line B that extends outwardly from the center of the distribution cable 220. The second side 290 of the base 280 also includes a central groove 298a and two side grooves 300a. The grooves

298a, 300a are generally parallel and extend along the length of the retention block **258**. The central groove **298a** is sized to receive the buffer tube **262** of the tether **242**. The side grooves **300a** are sized to receive the strength members **264** of the tether **242**.

[0100] The base **280** also includes structures for resisting axial movement between the retention block **258** and the over-mold **260**. For example, as shown at FIGS. 9-12, surface depressions **302** are provided adjacent the second end **286** of the base **280**. The surface depressions **302** (e.g., grooves, slots, cuts, notches, indentations) provide void regions for allowing over-mold material to fill-in during the over-molding process to provide a more secure connection between the retention block **258** and the outer over-mold **260**. In this way, a mechanical interlock is formed that resists axial movement between the retention block **258** and the over-mold **260**. In other embodiments, the base **280** can include outwardly projecting structures (e.g., flanges, bumps, ribs) that are embedded in the over-mold to further resist axial movement between the over-mold and the retention block.

[0101] The cover **282** of the retention block **258** mounts over the second side **290** of the base **280** adjacent the first end **284** of the base **280**. As shown at FIGS. 15-19, the cover **282** includes a central groove **298b** and two side grooves **300b**. When the cover **282** is mounted on the base **280**, the central groove **298b** aligns with the central groove **298a** of the base **280**, and the side grooves **300b** align with the side grooves **300a** of the base **280**. Thus, when the retention block **258** is assembled, the buffer tube **262** of the tether **242** is captured within the central grooves **298a, 298b**, and the strength members **264** of the tether **242** are captured within the side grooves **300a, 300b** (see FIG. 7B). An adhesive **299** (see FIG. 7B) can be applied between the cover **282** and the base **280** to securely affix the tether **242** to the retention block **258**. In one embodiment, the adhesive **299** is applied to the second side **290** of the base **280**, the grooved side of the cover **282**, the buffer tube **262** of the tether **242**, and the strength members **264** of the tether **242**.

[0102] The retention block **258** also includes structures for facilitating aligning the cover **282** on the base **280**. For example, as shown at FIG. 7B, the retention block **258** can include mating posts **304** and holes **306** provided on the cover **282** and the base **280**. The posts **304** fit within the holes **306** to maintain alignment between the base **280** and the cover **282** during assembly.

[0103] The retention block **258** further includes an outer band groove **308** (see FIGS. 9 and 15) that extends around at least a portion of the perimeter of the retention block **258**. The band groove **308** is sized to receive a strap or band **297** (see FIG. 7) that is wrapped around the retention block **258** and the distribution cable **220** to secure the retention block **258** to the distribution cable **220**. The band can also function to assist in holding the cover **282** on the base **280**.

[0104] The splice stiffener **248** of the breakout assembly **240** preferably has a crush-resistant construction adapted to prevent the splices of the breakout location **241** from being damaged. In one embodiment, the splice stiffener **248** is made of a plastic material. As shown at FIGS. 20-26, the splice stiffener **248** includes an elongated base portion **320** having a generally half-cylinder shape. The base portion **320** includes first and second sides **322, 324** that face in opposite directions. The first side **322** of the base portion **320** includes a concave surface **325** defining a channel **326** having an open side. When the splice stiffener **248** is mounted at the breakout

location **241**, the concave surface **325** is adapted to face toward the buffer tubes **222** of the distribution cable **220**. As shown in the cross-sectional view of FIG. 26, the concave surface **325** has a semi-circular shape having a curvature that generally matches an outer diameter **D** circumscribing the buffer tubes **322** of the distribution cable **320**. The concave surface **325** is shown covering approximately one half the diameter **D**, and a plurality of the buffer tubes **222** are shown positioned within the channel **326**. Depending upon how the break-out location is prepared (i.e., whether or not the outer strength members **228** of the distribution cable **220** have been removed), the layer formed by the strength members **228** may be positioned between the surface **325** and the buffer tubes **222**.

[0105] The splice stiffener **248** also includes a pair of parallel retaining members **328** that project outwardly from the second side **324** of the base portion **320**. A splice retention channel **330** having an open side is defined between the retaining members **328**. A bed **332** of the channel **330** is generally planar. Splice sleeve retention ridges or shoulders **334** project outwardly from the bed **332** adjacent opposite ends of the channel **330**. Snap fit tabs **336** project laterally into the channel **330** from the retaining members **328**. In use, the splice sleeve **246** is snap fit between the tabs **336** and into the channel **330**. Once the splice sleeve **246** is in the splice retention channel **330**, the tabs **336** prevent the splice sleeve **246** from unintentionally exiting the splice retention channel **330** through the open side. Also, the retention shoulders **334** prevent the splice sleeve **246** from sliding out of the splice retention channel **330** through the ends of the splice retention channel **330**. Preferably, the splice sleeve **246** is free to slide back and forth between the shoulders **334** within the channel **330**.

[0106] The stiffeners **250₁, 250₂** of the breakout assembly **240** are preferably configured to provide increased crush resistance to the protective sleeve **252**. In certain embodiments, the stiffeners **250₁, 250₂** have a stiffer construction than the protective sleeve **252** and are made of a plastic material. Referring to FIGS. 27-30, the stiffeners **250₁, 250₂** have a generally tubular configuration and each define a through-passage **340** for receiving their respective fibers **224_{dc}** and **224_r**. The through-passages **340** preferably have large enough cross-sectional areas to allow the fibers **224_{dc}, 224_r** to freely slide therein when the breakout location **241** is bent. Ends **342** of the passages **340** preferably include contours that extend around the perimeter of the passages **340** for preventing the fibers from being bent beyond acceptable bend radius requirements.

[0107] Referring to FIG. 30, the stiffeners **250₁, 250₂** each include a base portion **344** spaced from an arcuate dome portion **346**. The stiffeners **250₁, 250₂** each also include a pair of planar, generally parallel side walls **348** that connect the base portion **344** to the dome portion **346**. The base portions **344** define concave channels **350** adapted to receive buffer tubes **222** of the distribution cable **220** when the stiffeners **250₁, 250₂** are positioned at the breakout location **241**. The sidewalls **348** and the dome portion **346** define an exterior shape that generally matches the interior shape of the protective sleeve **252**.

[0108] The protective sleeve **252** of the mid-span breakout assembly **240** is adapted to form a protective shell over the breakout location **241**. The protective sleeve **252** is preferably sufficiently flexible to allow the pre-terminated cable (i.e., the distribution cable **220** with the tethers terminated **242** thereto)

to be readily stored on a spool. The stiffeners **248**, **250₁**, **250₂** provide regions/segments of increased crush resistance separated by regions/segments of increased flexibility.

[0109] Referring to FIGS. **31-37**, the protective sleeve **252** is elongated along a length that extends between the first end **254** and the second end **256** and has a generally U-shaped transverse cross section forming a channel **360** (see FIG. **36**) with an open side sized to be inserted over the distribution cable. The channel **360** has a cross sectional shape sized to conform generally with the outer cross sectional shape of the stiffeners **250₁**, **250₂**. Preferably, the internal transverse cross sectional shape of the channel **360** is sized to accommodate sufficient slack or excess fiber length to allow the breakout location **241** to be bent without negatively affecting performance or damaging the fibers of the breakout location. The channel **360** of the protective sleeve **252** is defined between opposing sidewalls **362** defining openings **364** for receiving snap-fit tabs **366** of the retention clips **243**. The sidewalls **362** are interconnected by a curved portion **363**.

[0110] The first end **254** of the protective sleeve **252** includes a low profile portion **365** that fits closely to the distribution cable **220**. The low profile portion **365** includes a channel **367** that receives the outer jacket **230** of the distribution cable **220**. The channel **367** has a diameter that generally matches the outer diameter of the distribution cable **220**. The first end **254** also includes a transition portion **369** that provides a smooth taper/contour between the low profile portion **365** and a main body of the protective sleeve **252**. The low profile portion **365** and the transition portion **369** cooperate to provide a smooth transition from the distribution cable **220** to the main outer surface of the protective sleeve **252**. The smooth taper provided by the first end (i.e., the leading end/nose) of the protective sleeve **252** assists in pulling the cable through underground conduit without snagging the breakout location **241**. The second end **256** of the protective sleeve **252** forms an enlarged receptacle **372** sized sufficiently large to receive the retention block **258**. A tapered transition portion **370** is provided between the main body of the protective sleeve **252** and the enlarged receptacle **372**. When the sleeve **252** is mounted on the distribution cable **220**, the low profile portion **365** overlaps the jacket **230** at the upstream end of the breakout location and the enlarged receptacle **372** overlaps the retention block adjacent the downstream end of the breakout location.

[0111] As shown at FIGS. **38-42**, the retention clips **243** of the mid-span breakout assembly **240** include curved portions **380** that receive the distribution cable **220** on the opposite side of the protective sleeve **252** such that the distribution cable **220** is captured between the clips **243** and the protective sleeve **252**. The clips **243** also include straight extensions **382** that project upwardly from the curved portion **380**. The extensions **382** of the clips **243** fit inside the protective sleeve **252** and assist in preventing fibers **224_{dc}**, **224_r** from being pinched between the protective sleeve **252** and the distribution cable **220** or the clips **243**. The extensions **382** include snap-fit tabs **366** that fit within the openings **364** of the protective sleeve **252**. The clips **243** also include discrete stops **384** for engaging bottom edges of the protection sleeve **252**. The stops **384** are located at the exteriors of the clips **343** and project outwardly from the curved portions **380**.

[0112] The over-mold **260** of the mid-span breakout assembly **240** is preferably made of a polymer plastic material. As shown at FIGS. **43-46**, the over-mold **260** has a primary contour **390** at a leading edge configured to coincide gener-

ally with the contour of the leading end of the protective sleeve **252**. A trailing end **392** of the over-mold **260** is also slightly contoured. The transverse cross sectional shape of the over-mold includes first and second curved portions **395**, **396** interconnected by generally planar portions **397**, **398**.

[0113] It is preferred for the over-mold **360** to be sized with a cross sectional shape sufficient to allow the breakout location to be readily passed through a one and one-half inch inner diameter conduit or a one and one-quarter inch diameter conduit. In certain embodiments, the breakout location has a cross sectional area that can be passed through a one inch inner diameter conduit.

[0114] The mid-span breakout location **241** is preferably configured to allow the mid-span breakout location to be bent/flexed in any orientation without damaging the fibers **224_{dc}**, **224_r**, and without significantly negatively affecting cable performance. In one embodiment, this flexibility is provided by making sure that the fibers **224_{dc}**, **224_r** have sufficient excess fiber length (i.e., slack) to allow the breakout location to be bent/flexed the requisite amount. In one embodiment, the fibers **224_{dc}**, **224_r** that extend along the mid-span breakout location **241** are provided with at least 2% excess fiber length. In other embodiments, the fibers **224_{dc}**, **224_r** are provided with at least 3% excess fiber length. In still other embodiments, the fibers **224_{dc}**, **224_r** are provided with an excess fiber length in the range of 1 to 5% or in the range of 2 to 5%. In one example embodiment, the length of the mid-span breakout location **241** is about 32 centimeters and about 1 centimeter of excess fiber length is provided to the fibers **224_{dc}**, **224_r**, as they extend along the mid-span breakout location **241**.

[0115] When the mid-span breakout assembly **240** is assembled, measures are taken to provide the fibers **224_{dc}**, **224_r** with excess fiber length. For example, after the fibers **224_{dc}**, **224_r** have been fused together, the fibers **224_{dc}**, **224_r** are pulled taut and the retention block **258** is positioned against the outer jacket **230** of the distribution cable **220** (see FIG. **47**). The retention block **258** is then slid a distance **X** along the distribution cable **220** to the position of FIG. **48**. With the retention block **258** in the position of FIG. **48**, and adequate amount of excess slack/excess fiber length has been provided to the fibers **224_{dc}**, **224_r**. Once the retention block **258** is in the position of FIG. **48**, a securement structure **297** (e.g., a band, strap, clamp or other type of structure) is used to fix the retention block **258** in position relative to the distribution cable **220**. Thereafter, the remainder of the mid-span breakout assembly **240** can be assembled over the mid-span breakout location **241**.

[0116] In determining the amount of excess fiber length to be provided at the mid-span breakout location **241**, it is desirable for the distribution cable **220** to be able to be bent in a minimum bend radius R_m in any orientation without compromising the mid-span breakout assembly **240**. In one embodiment, an example minimum bend radius R_m is ten times the outer diameter of the distribution cable **220**. When the distribution cable is flexed to a bend having a radius R_m as shown at FIG. **49**, a portion **500** of the distribution cable **220** at the outside of the curve elongates and a portion **501** of the distribution cable at the inside of the curve shortens. The centerline of the distribution cable does not change in length. Taking the above factors into consideration, the amount of slack fiber length required to accommodate the elongation at the outer portion **500** of the bend can be calculated by the following formula:

$$\alpha \frac{\pi}{180^\circ} (R_m + R_{dc}) - \alpha \frac{\pi}{180^\circ} R_m = \alpha \frac{\pi}{180^\circ} R_{dc}$$

[0117] In the above formula, where R_{dc} equals the outer radius of the distribution cable measured from the centerline to the outer surface of the outer jacket. R_{dc} provides a value that is representative of the distance between the fibers 224_{dc} , 224_t , and the centerline of the distribution cable. The angle of the bend is represented in a in degrees. For a 90° bend, the excess fiber length equals at least $\pi R_{dc}/2$. For a 180° bend, the excess fiber length equals πR_{dc} .

[0118] To prepare the tether **242** to be incorporated into the mid-span breakout assembly **240**, a portion of the outer jacket **266** is stripped away to expose the central buffer tube **262** and the strength members **264** (see FIG. 50). As shown at FIG. 50, the central buffer tube **262** is removed to expose the fibers 224_t . The tether **242** is then mounted to the base **280** of the retention block **258**. For example, as shown at FIG. 51, the jacketed end **271** of the tether **242** is inserted into the retention sleeve **294**. Also, the strength members **264** are positioned within the side grooves **300a** of the base **280**, and the central buffer tube **262** is inserted within the central groove **298a** of the base **280**. As shown in FIG. 51, the central buffer tube **262** has a length that extends beyond the first end **284** of the base **280**, and the strength members **264** have lengths that terminate generally at the first end of the base **280**.

[0119] To prepare the mid-span breakout location on the distribution cable **220**, a portion of the outer jacket **230** is first stripped away to provide a stripped region **400** having an upstream end **402** and a downstream end **404**. Portions of a cable netting can then be removed adjacent the upstream and downstream ends **402**, **404** so that the buffer tubes **222** are exposed. The outer strength member **228** can also be displaced (e.g., bunched at the bottom side of the cable) adjacent the ends **402**, **404** to facilitate accessing the buffer tubes **222**. Tape **406** can be used to prevent the intermediate length of netting that remains at the mid-span breakout location **241** from unraveling. One of the buffer tubes **222** is then selected and a first window **408** is cut into the buffer tube adjacent the upstream end **402** of the stripped region **400** and a second window **410** is cut into the buffer tube **220** adjacent the downstream end **404** of the stripped region **400**. The fibers 224_{dc} desired to be broken out are then accessed and severed at the second window **410**. After the fibers 224_{dc} have been severed, the fibers 224_{dc} are pulled from the buffer tube **222** through the first window **408** (see FIG. 52). With the distribution cable **220** prepared as shown in FIG. 52, the fibers 224_{dc} are ready to be terminated to the prepared tether **242** of FIG. 51.

[0120] To connect the tether **242** to the fibers 224_{dc} , the splice sleeve **246** and the two stiffeners 250_1 , 250_2 are first slid over the fibers 224_t of the tether and up against the retention block **258**. In certain embodiments, the stiffeners 250_1 , 250_2 and splice sleeve **246** can be configured to nest inside one another to minimize the space occupied by such components during the fusion process. In certain embodi-

ments, the components can be slid up over the buffer tube **262** of the tether **242**. With the stiffeners 250_1 , 250_2 and the splice sleeve **246** mounted on the tether **242**, the fibers 224_t of the tether are fused to the fibers 224_{dc} of the distribution cable **220**. After the fusion process is complete, the splice sleeve **246** can be slid over the fusion location to protect the splice. The fibers are then tested to confirm that the fibers meet minimum insertion loss requirements. After verifying insertion loss, the cover **282** can be adhesively bonded to the base **280** of the retention block **258** to complete the assembly of the retention block.

[0121] Once the retention block **258** has been assembled, the retention block **258** is used to pull the fibers 224_{dc} , 224_t , generally taut. With the fibers 224_{dc} , 224_t pulled taut, the splice stiffener **248** is positioned beneath the location of the splice sleeve **246** to ensure that the splice sleeve **246** is generally centered relative to the splice stiffener **248**. The splice stiffener **248** can then be secured to the distribution cable **220** with tape. Preferably, the splice stiffener **248** is generally centrally located between the ends **402**, **404** of the stripped region **400** of the distribution cable **220**.

[0122] After the positioning of the splice stiffener **248** has been determined, the retention block **258** is slid back along the distribution cable **220** to provide the fibers 224_{dc} , 224_t with sufficient excess fiber length to allow bending of the mid-span access location. The retention block **258** is then affixed to the distribution cable **220**.

[0123] Once the retention block **258** has been affixed to the distribution cable **220**, the stiffeners 250_1 , 250_2 are preferably slid along the fibers 224_{dc} , 224_t to their appropriate stiffening positions. In a preferred embodiment, the stiffener 250_1 is placed generally at a midpoint between the upstream end **402** of the stripped region **400** and the splice stiffener **248**, and the stiffener 250_2 is positioned generally at a midpoint between the splice stiffener **248** and the downstream end **404** of the stripped region **400**. Once the stiffeners 250_1 , 250_2 are in position, the splice sleeve **246** can be snapped within the splice stiffener **248**.

[0124] To finalize the assembly process, the protective sleeve **252** is secured over the stripped region **400** by the retention clips **243**, and the heat resistant tape **263** is wrapped around the mid-span breakout location **241**. Thereafter, the process is completed by applying the over mold **260** over the taped mid-span breakout location. The over mold layer functions to seal and protect the underlying components of the mid-span breakout assembly **240**. Thereafter, the distribution cable **220** can be spooled. It is preferred for the fibers 224_t of the tether to be pre-terminated to the fibers 224_{dc} of the distribution cable. "Pre-terminated" means that the fibers 224_t are fused or otherwise connected to the fibers 224_{dc} of the distribution cable **220** at the factory as part of the cable manufacturing process rather than being field terminated. The remainder of the mid-span breakout assembly is also preferably factory installed.

[0125] Referring now to FIGS. 53-79, another example embodiment a mid-span breakout assembly **240'** is shown having features that are examples of inventive aspects in accordance with the principles of the present disclosure. The mid-span breakout assembly **240'** includes a separation block **700** located on an upstream end **402'** of a breakout location **241'** and a retention block **600** located on a downstream end **404'** of the breakout location **241'**. The retention block **600** strengthens the mechanical interface between the tether cable **242** and the distribution cable **220**. The separation block **700**

routes the optical fibers 224_{dc} accessed from the buffer tube 222 of the distribution cable 220 to the splice point with the tether cable 242 . A tube 800 extends from the separation block 700 to the retention block 600 . The tube 800 protects the spliced optical fibers 224_{dc} , 224_t along the length of the breakout location $241'$.

[0126] As shown in FIG. 54, the retention block 600 includes a base 610 and a cover 650 between which the tether 242 extends. In one embodiment, the retention block 600 has a plastic construction. Referring to FIGS. 55-60, the base 610 of the retention block 600 extends along a length A (FIG. 56) from a first end 620 to a second end 622 . The base 610 also includes a first side 626 (FIG. 57) adapted to engage the outer strength member 228 of the distribution cable 220 , and a second side 628 (FIG. 55) adapted to engage the tether 242 . The base 610 includes a first section 605 and a second section 615 (FIG. 56). The first section 605 of the base 610 includes side surfaces 601 , elongated along a length L , that extend from one end 622 of the base 610 to an intermediate end 621 of the base 610 . The second section 615 protrudes outwardly from the intermediate end 621 to the end 620 of the base 610 .

[0127] The first side 626 of the base 610 has a channel 630 that extends along the length L of the first section 605 (FIG. 57). In some embodiments, the channel 630 has a transverse cross-sectional shape (FIG. 59) that is curved to generally match the inner diameter of the distribution cable jacket 230 . The channel 630 of the base 610 is configured to couple to a stripped region of the distribution cable 220 (FIG. 53). In some embodiments, the channel 630 couples to the outer strength member 228 of the distribution cable. In one example embodiment, the outer strength member 228 includes multiple loose strands of Kevlar positioned around the buffer tubes 222 . Thus, when the retention block 600 is mounted to the outer strength member 228 , the outer strength member 228 and the buffer tubes 222 of the distribution cable 220 nest within the channel 630 .

[0128] The second side 628 of the first section 605 of the base 610 includes a central groove 602 and two side grooves 603 , 604 . The grooves 602 - 604 are generally parallel and extend along the length L of the first section 605 of the base 610 . A transverse cross-section of the first section 605 is shown in FIG. 59. The central groove 602 is sized to receive the buffer tube 262 of the tether 242 . The side grooves 603 , 604 are sized to receive the strength members 264 of the tether 242 .

[0129] The second section 615 of the base 610 includes a transition flange 612 that extends outwardly from the intermediate end 621 of the base 610 . In some embodiments, the transition flange 612 has a generally U-shaped transverse cross-section. In one embodiment, the transition flange 612 defines a groove 617 (FIG. 55).

[0130] The cover 650 of the retention block 600 mounts over the second side 628 of the base 610 . As shown at FIG. 64, the cover 650 includes a first section 655 and a second section 665 . The cover 650 also includes a first side 676 (FIG. 61) and a grooved side 678 (FIG. 62). The first side 676 of the first section 655 includes a curved top surface 651 extending from the intermediate end 671 to the first end 672 . A transition flange 662 having a generally U-shaped transverse cross-section extends outwardly from the intermediate end 671 to a second end 670 . The grooved side 678 of the first section 655 of the cover 650 includes a central groove 652 and two side grooves 653 , 654 .

[0131] In use, the cover 650 is mounted onto the base 610 to align the central groove 652 of the cover 650 with the central groove 602 of the base 610 , and to align the side grooves 653 , 654 of the cover 650 with the side grooves 603 , 604 of the base 610 . Thus, when the retention block 600 is assembled, the buffer tube 262 of the tether 242 is captured within the central grooves 602 , 652 , and the strength members 264 of the tether 242 are captured within the side grooves 603 , 653 , 604 , 654 (FIG. 67). An adhesive can be applied between the cover 650 and the base 610 to securely affix the tether 242 to the retention block 600 . In one embodiment, the adhesive is applied to the second side 628 of the base 610 , the grooved side 678 of the cover 650 , the buffer tube 262 of the tether 242 , and the strength members 264 of the tether 242 .

[0132] In some embodiments, the retention block 600 also includes structures for facilitating aligning the cover 650 on the base 610 . For example, as shown at FIGS. 55 and 62, the retention block 600 can include mating posts 668 and surface depressions (e.g., grooves, slots, cuts, notches, indentations) 608 provided on the cover 650 and the base 610 . The posts 668 fit within the notches 608 to maintain alignment between the base 610 and the cover 650 during assembly. For example, in the embodiment shown, mating posts 668 protrude downwardly from the cover 650 to engage with slots 608 on the side surfaces 601 of the base 610 . In other embodiments, however, other suitable alignment members could also be used.

[0133] Referring now to FIG. 67, to prepare the tether 242 to be incorporated into the mid-span breakout assembly $240'$, a portion of the outer jacket 266 of the tether cable 242 is stripped away to expose the central buffer tube 262 and the strength members 264 . As shown at FIG. 67, the central buffer tube 262 and the strength members 264 project outwardly beyond an end 271 of the outer jacket 266 . The strength layer 265 has been displaced from around the buffer tube 262 . After removing the end portion of the outer jacket 266 , the strength members 264 are trimmed as shown at FIG. 67, and an end portion of the central buffer tube 262 is removed to expose the fibers 224_t .

[0134] The tether 242 is then mounted to the base 610 of the retention block 600 . For example, as shown at FIG. 67, the strength members 264 are positioned within the side grooves 603 , 604 of the base 610 , and the central buffer tube 262 is inserted within the central groove 602 of the base 610 . The central buffer tube 262 has a length that extends beyond the intermediate end 621 of the base 610 , and the strength members 264 have lengths that terminate generally at the intermediate end 621 of the base 610 . In some embodiments, the central buffer tube 262 extends beyond the end 620 of the retention block 600 . In other embodiments, however, the central buffer tube 262 terminates between the intermediate end 621 and end 620 .

[0135] Referring now to FIGS. 68-80, a separation block 700 provides support for transitioning fibers 224_t from the distribution cable 220 to a fusion location. As shown in FIG. 68, the separation block 700 includes a Y-shaped housing 701 defining a first opening 711 on an upstream end of the separation block 700 , a second opening 712 on a downstream end of the separation block, and a third opening 714 also located on the downstream end. A generally tubular section 716 of the housing 701 forms the first opening 711 and generally tubular sections 718 , 719 of the housing 701 form the second and third openings 712 , 714 .

[0136] The second opening 712 is generally aligned with the first opening 711 to form a first channel 715 (FIGS. 71 and

76). The third opening 714 leads to a second channel 717 (see FIGS. 71 and 76) that joins with the first channel 715 at the tubular section 716 of the housing 701. Tubular sections 716, 718 forming the first channel 715 are sized and shaped to enclose the buffer tubes 222 and central strength member 226 of the distribution cable 220. Tubular section 719 forming the second channel 717 is sized and shaped to fit within the tube 800 and to enclose the fibers 224_{dc} accessed from the distribution cable 220 for splicing with the fibers 224_t of the tether cable 242.

[0137] In some embodiments, the separation block 700 is formed from a first section 710 and a second section 750. In the example shown, the first and second sections 710, 750 each include grooves 715a, 715b that align and combine to form the channel 715. Similarly, aligning and combining grooves 717a, 717b forms the channel 717. A protruding section 720a defines the grooves 715a, 717a and a protruding section 720b defines the grooves 715b, 717b.

[0138] In some embodiments, the first and second sections 710, 750 are fastened together with complementary surface depressions 722 and protrusions 724 (FIGS. 70 and 75). In one example embodiment, the protruding section 720a on the first section 710 defines a hole 722 and the protruding section 720b on the second section 750 includes a protrusion 724 sized to fit within the hole 722. Adhesive can also be used to secure the first section 710 to the second section 750.

[0139] The mid-span breakout location on the distribution cable 220 can be prepared in a similar manner to the preparation discussed above with respect to FIG. 52. A portion of the outer jacket 230 of the distribution cable 220 is first stripped away to provide a stripped region 400' (FIG. 53). One of the buffer tubes 222 is selected and a first window 408' and a second window are cut into the selected buffer tube 222. The fibers 224_{dc} desired to be broken out are then accessed, severed, and pulled from the buffer tube 222 through the first window 408'. With the distribution cable 220 prepared as shown in FIG. 80, the severed fibers 224_{dc} are ready to be fused with the tether fibers 224_t.

[0140] To connect the tether 242 to the fibers 224_{dc}, the splice sleeve 246 and the tube 800 (FIG. 53) are first slid over the fibers 224_t of the tether 242, and the tube 800 is further slid up over the tether jacket 266. With the splice sleeve 246 and tube 800 mounted on the tether 242, the fibers 224_t of the tether are fused to the fibers 224_{dc} of the distribution cable 220. The fibers are then tested to confirm that the fibers meet minimum insertion loss requirements.

[0141] After the fusion process is complete, the splice sleeve 246 can be slid over the fusion location to protect the splice. In some embodiments, the splice sleeve 246 has a length of less than 40 mm. Preferably, the splice sleeve 246 has a length of less than 35 mm. In one example embodiment, the splice sleeve 246 has a length of about 30 mm. Decreasing the length of the splice sleeve 246 increases the degree to which the mid-span breakout assembly can bend. Increasing the flexibility of the breakout assembly 240, 240' facilitates wrapping the distribution cable 220 having the breakout assembly 240, 240' around a spool.

[0142] After verifying the insertion loss, the tube 800 can be slid over the splice sleeve 246 and the fusion location to protect the spliced fibers 224_{dc}, 224_t. The separation block 700 can then be added to the upstream location 402' of the stripped portion 400' of the distribution cable 220. The buffer tubes 222 are routed through the first channel 715 of the separation block 700 and the severed fibers 224_{dc} are routed through the second channel 717 of the separation block 700 (FIG. 80). To route the fibers, in some embodiments, the buffer tubes 222 are laid within the first groove 715a of the

first section 710 of the separation block 700 and the fibers 224_{dc} are laid within the second groove 717a of the first section 710 as shown in FIG. 79. The second section 750 of the separation block 700 can be secured to the first section as discussed above.

[0143] Typically, the separation block 700 does not enclose the outer strength member 228. In some embodiments, the outer strength member 228 can be redistributed uniformly about the buffer tubes 222 of the distribution cable 220 at the upstream and downstream ends 402', 404' after installing the separation block 700. In such embodiments, the outer strength member 228 extends across the breakout location 241'.

[0144] After installing the separation block 700, the tube 800 can be slid onto section 719 of the separation block 700. In some embodiments, the tube 800 can optionally be taped or otherwise temporarily secured to the separation block 700. In other embodiments, the tube 800 is permanently secured to the separation block 700 with adhesive. In still other embodiments, the tube 800 is not secured to the separation block 700.

[0145] The retention block 600 is then mounted to the tether cable 242. The retention block 600 is preferably positioned so that one end of the tube 800 is slid over the transition flanges 612, 662 of the retention block 600 and the other end of the tube 800 remains over section 719 of the separation block 700. In general, the tube 800 has an appropriate length to provide the fibers 224_{dc}, 224_t with sufficient excess fiber length to allow bending of the mid-span access location 241'. The retention block 600 is then affixed to the distribution cable 220. In some embodiments, the groove 630 of the base 610 of the retention block is affixed (e.g., with adhesive) to the outer strength member 228 wrapped around the distribution cable 220.

[0146] To finalize the assembly process, the heat resistant tape/foil can be wrapped around the mid-span breakout location 241'. Thereafter, the process is completed by applying an over mold 260' over the mid-span breakout location 241'. The over mold layer 260' functions to seal and protect the underlying components of the mid-span breakout assembly 240'. Thereafter, the distribution cable 220 can be spooled. It is preferred for the fibers 224_t of the tether to be pre-terminated to the fibers 224_{dc} of the distribution cable. The remainder of the mid-span breakout assembly 240' is also preferably factory installed.

[0147] As used herein, with respect to buffer tubes, the term "fiber access location" can be any type of location where a fiber can be routed out of a buffer tube. Example fiber access locations include windows, ring cut regions, or other openings in a buffer tube. Additionally, when the fibers 224_{dc}, 224_t have been spliced together, the fibers 224_{dc}, 224_t can collectively be referred to as an optical fiber structure. In such a case, the optical fiber structure includes a first length of optical fiber within the distribution cable, a second length of optical fiber that extends through the breakout location and a third length of optical fiber that extends through the tether. The first, second and third lengths are in optical communication with one another so as to define a signal path that extends from the distribution cable, through the breakout location, to the end of the tether. The term optical fiber structure also includes lengths of optical fibers that do not include intermediate splices. As used herein, the term "breakout portions" of optical fiber include portions of optical fiber that extend along the length of a breakout location.

[0148] From the forgoing detailed description, it will be evident that modifications and variations can be made in the devices of the disclosure without departing from the spirit or scope of the invention.

What is claimed is:

1. A telecommunications cable comprising:
 - a distribution cable including a cable jacket and at least a first buffer tube positioned within the cable jacket, the first buffer tube enclosing a first optical fiber, the distribution cable including a mid-span location where a portion of the cable jacket has been removed and where at least the first buffer tube includes a fiber access location through which the first optical fiber is routed out of the first buffer tube;
 - a tether that branches from the distribution cable at the mid-span location, the tether including a tether jacket, at least one strength member positioned within the jacket, a tether buffer tube positioned within the jacket, and a second optical fiber that extends through the tether buffer tube, the second optical fiber being spliced to the first optical fiber at a splice location; and
 - a tether retention block affixed to the distribution cable, the tether retention block including a first portion and a second portion that is configured to cooperate with the first portion to secure the tether buffer tube and at least the strength member of the tether, each of the first and second portions defining at least a first half-channel configured to cooperate with the first half-channel of the other portion to receive the strength member of the tether.
2. The telecommunications cable of claim 1, wherein each of the first and second portions defines at least a second half-channel configured to cooperate with the second half-channel of the other portion to receive a second strength member of the tether.
3. The telecommunications cable of claim 1, the tether retention block defines a passage through which the tether buffer tube extends, the passage being defined by the first and second portions.
4. The telecommunications cable of claim 1, wherein the retention block defines a groove along which the distribution cable extends when the retention block is affixed to the distribution cable.
5. The telecommunications cable of claim 4, wherein the first portion of the tether retention block defines the groove on a first side and defines the first half-channel on a second, opposite side.
6. The telecommunications cable of claim 1, further comprising a flexible closure that surrounds the distribution cable and covers the mid-span location, the closure being factory installed, the closure being elongated along a length that extends along the distribution cable.
7. The telecommunications cable of claim 1, further comprising:
 - a separation block coupled to the distribution cable at an opposite side of the mid-span location from the tether retention block, the separation block at least partially enclosing the first optical fiber;
 - a tube extending from the separation block to the tether retention block, wherein the second optical fiber splices to the first optical fiber within the tube.
8. The telecommunications cable of claim 7, wherein each portion of the tether retention block includes a U-shaped flange configured to be inserted into one end of the tube.
9. The telecommunications cable of claim 1, wherein at least a portion of the tether retention block is positioned within the closure.
10. The telecommunications cable of claim 1, wherein the closure includes overmolding.
11. A method of securing a tether cable to a tether retention block having a cover and a base, the method comprising:
 - preparing the tether cable to expose a buffer tube and at least a first strength member;
 - positioning and securing the first strength member within a first side groove of the base;
 - positioning and securing the buffer tube within a central groove of the base; and
 - arranging the cover over the base including aligning a first side groove of the cover with the first side groove of the base to form a side passage through which the strength member at least partially extends and aligning a central groove of the cover with the central groove of the base to form a central passage through which the tether buffer tube at least partially extends.
12. The method of claim 11, wherein preparing the tether cable to expose a buffer tube and at least a first strength member comprises:
 - stripping a portion of an outer jacket of a tether cable; and
 - removing an end portion of the buffer tube to expose the optical fiber within the buffer tube.
13. The method of claim 11, wherein positioning the first strength member comprises positioning the first strength member having a length that is less than a length of the base; and wherein positioning the buffer tube comprises positioning the buffer tube having a length that is shorter than the length of the base and longer than the length of the first strength member.
14. The method of claim 11, wherein arranging the cover over the base comprises:
 - aligning mating posts on one of the cover and the base with depressions provided on the other of the cover and the base; and
 - pressing the mating posts into the depressions.
15. The method of claim 14, wherein aligning the mating posts with the depressions comprises aligning mating posts extending downwardly from the cover with depressions defined in a top of the base.
16. The method of claim 11, further comprising applying an adhesive between the cover and the base to securely affix the tether cable to the retention block.
17. A tether retention block for securing a tether cable to a distribution cable, the tether retention block comprising:
 - a first portion having a first side and an opposite, second side, the first side of the first portion defining at least a first groove;
 - a second portion having a first side and an opposite, second side, the first side of the second portion defining at least a first groove configured to cooperate with the first groove of the first portion to define a passageway configured to receive a strength member and a tether buffer tube of the tether cable;
 wherein the first portion defines a third groove configured to receive the distribution cable to secure the tether cable to the distribution cable, the groove being separate from the passageway.
18. The tether retention block of claim 17, wherein the first groove of the second portion is configured to align with the first groove of the first portion to form a first tunnel in which the strength member of the tether cable is secured.
19. The tether retention block of claim 17, wherein the second groove of the second portion is configured to align with the second groove of the first portion to form a second tunnel in which the tether buffer tube of the tether cable is secured.
20. The tether retention block of claim 17, wherein the third groove is provided on the second side of the first portion.