



- (51) International Patent Classification:  
*H01H 85/25* (2006.01) *H01H 33/46* (2006.01)
- (21) International Application Number:  
PCT/US2017/049741
- (22) International Filing Date:  
31 August 2017 (31.08.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
62/382,974 02 September 2016 (02.09.2016) US
- (71) Applicant: **COOPER TECHNOLOGIES COMPANY**  
[US/US]; 600 Travis St, Suite 5400, Houston, Texas 77002 (US).
- (72) Inventors: **MANAHAN, Joseph Michael**; 4598 Brookhill Drive N, Manlius, New York 13104 (US). **FREER, Benjamin Avery**; 606 S. Terry Road, Syracuse, New York 13219 (US).
- (74) Agent: **BRUESS, Steven C.**; **MERCHANT & GOULD P.C.**, P.O. Box 2903, Minneapolis, Minnesota 55402-0903 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,


CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report (Art. 21(3))

(54) Title: REPLACEABLE ELECTRICAL PROTECTION SYSTEM FOR EQUIPMENT UNDER LOAD

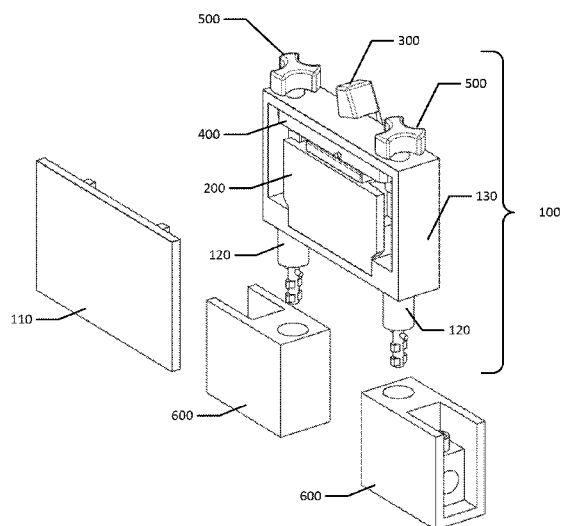

**Fig. 1**

(57) Abstract: The present disclosure relates to an electrical protection system, including a breaker enclosure and associated terminals, and the methods of use therefor that allow for a circuit breaker or other electrical protection device to be safely added or removed from a circuit while power is supplied to at least one of the terminals. The disclosed enclosure and terminals include a series of interrelated safety features that prevent a user from accidentally completing the circuit from one terminal to another when the electrical protection system would be in an unsafe state. The combination of features described herein allow for a replaceable electrical protection device for equipment under load to be realized, thus improving user safety.



## REPLACEABLE ELECTRICAL PROTECTION SYSTEM FOR EQUIPMENT UNDER LOAD

### CROSS-REFERENCE TO RELATED APPLICATION

This application is being filed on August 31, 2017 as a PCT International Patent  
5 Application and claims the benefit of U.S. Patent Application Serial No. 62/382,974, filed  
on September 2, 2016, the disclosure of which is incorporated herein by reference in its  
entirety.

### TECHNICAL FIELD

The present technology is related generally to electrical protection devices, such as  
10 circuit breakers, contactors, starters, switches, fuse blocks, etc., and the safer construction,  
installation, and usage thereof.

### BACKGROUND

A circuit breaker is an electrical device used in circuits to protect the components  
downstream from the circuit breaker from overloading due to excessive voltage or  
15 amperage. When an overload condition is detected, the circuit breaker will trip, causing  
the circuit to open at the breaker and for the downstream components to be cut off from  
the flow of electricity from upstream. Circuit breakers can also be used as switches, where  
a user manually opens or closes the breaker so that equipment downstream from the  
breaker may be safely inspected, replaced, or added to the circuit. To safely inspect,  
20 replace, or add a circuit breaker or other electrical protection device to a circuit, however,  
the circuit will typically be de-energized (e.g., the electrical current is turned off or cut off  
from upstream and downstream power sources, and capacitors are given time to  
discharge), such that the electrical protection device is not under load.

### SUMMARY

25 The present disclosure provides details for an improved electrical protection device  
system (and methods for the use thereof) that may be safely added to or removed from a  
circuit while that circuit is under load. By using a series of interlocks, detents, and poka-  
yokes, the improved system allows for a user to remove and/or install the protection  
device into the circuit with greater safety than prior protection devices and without

needing to ensure that all power sources (upstream or downstream) leading to the terminals have been cut off.

Aspects of the present disclosure relate to cost-effective methods, devices and systems for making circuit breakers, switches, contactors, starters, fuse blocks, and other electrical protection devices more reliable and safe, while improving the ability for those devices to be inspected, removed, or installed. Certain examples of the present disclosure relate to a single phase circuit breaker, but the present disclosure is equally applicable to multiphase circuit breakers and other electrical protection devices.

A variety of additional inventive aspects will be set in the description that follows. The inventive aspects can relate to individual features and to combinations of features. It is to be understood that both the forgoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the broad inventive concepts upon which the examples disclosed herein are based.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**FIGURE 1** is a cut-away view of an installed circuit breaker in the open state;  
**FIGURE 2** is a cut-away view of an installed circuit breaker in the closed state;  
**FIGURE 3** is an orthographic view of the contact assembly for the circuit breaker;  
**FIGURE 4** is an orthographic cut-away view of the terminal for the circuit breaker;  
**FIGURE 5** is an overhead view of the terminal for the circuit breaker showing detail of the installation collar;  
**FIGURE 6** is a lateral cut-away view of the terminal for the circuit breaker showing the contact blocks as transparencies;  
**FIGURE 7** is an orthographic view of a contact block;  
**FIGURE 8** illustrates a series of different breaker states;  
**FIGURE 9** illustrates an additional safety circuit for use in a trip unit; and  
**FIGURE 10** is a flow chart showing the general stages in an example method to install the improved circuit breaker described herein.

#### DETAILED DESCRIPTION

Various examples will be described in detail with reference to the drawings, wherein like reference numerals represent like parts and assemblies throughout the several views. Any examples set forth in this disclosure are not intended to be limiting and merely

set forth some of the many possible ways for implementing the broad inventive aspects disclosed herein.

The present disclosure relates to an electrical protection device system with multiple interdependent safety features (e.g., keying features, mechanical locks, mechanical interlock, mechanical blocks, etc.) that cooperate to require assembly and disassembly of the electrical protection device system in a particular sequence. A first set of safety features relates to the mechanical interface between rotatable contacts and their corresponding electrical terminals. A second set of safety features relates to the mechanical interface between the rotatable contacts and a trip unit that opens and closes an electrical connection between the rotatable contacts. The rotatable contacts can only be inserted into the system when in a first rotational state. The trip unit blocks insertion of the rotatable contacts into the system when closed and allows insertion of the rotatable contacts into the system when open. When the trip unit is open, the rotatable contacts can be inserted into the system while in the first rotational state. As so inserted, the rotatable contacts do not electrically connect to their corresponding terminals and also block the trip unit from being closed. The inserted contacts can be electrically connected to their corresponding terminals by rotating the contacts from the first rotational states to second rotational states. In one example, the first and second rotational states are offset 90 degrees from one another. When the contacts are inserted in the system and rotated to the second rotational state, the contacts are prevented from being removed from the system and allow the trip unit to be closed. The contacts can only be removed from the system when in the first rotational state. The trip unit prevents the loaded contacts from being moved from the second rotational state to the first rotational state when the trip unit is closed and allows the loaded circuit to be moved from the second rotational state to the first rotational state when the trip unit is open.

**FIGURE 1** is a cut-away view of an installed circuit breaker system (as an example electrical protection device system) in the open state and **FIGURE 2** is a cut-away view of the installed circuit breaker system in the closed state. As illustrated, the circuit breaker system is installed by attaching a breaker enclosure **100** via contact assemblies **500** (individually, first contact assembly **500a** and second contact assembly **500b**) to terminals **600** (individually, first terminal **600a** and second terminal **600b**). Although shown as a single-phase breaker, in alternative aspects the circuit breaker system may be a multi-phase breaker with additional pairs of contacts assemblies **500** and associated pairs of terminals **600** for each phase. In yet other aspects, the electrical

protection device may be a device other than a circuit breaker, such as, for example, a switch, contactor, or a starter. One of ordinary skill in the art will be able to use the example of the single phase circuit breaker and apply the present disclosure to the use of other electrical protection devices.

5 In various aspects, the breaker enclosure **100** may include a cover **110** that may be selectively removed and reattached to an enclosure body **130** allow a user to install or replace a trip unit **200** or other internal feature of the circuit breaker. As will be appreciated, various markings may be made on or in the breaker enclosure **100** that indicate the load rating for which the circuit breaker is intended, manufacturer's  
10 information, installation instructions, safety information, and the like.

The breaker enclosure **100** may also include one or more cowls **120** that extend along a portion of the length of the contact assemblies **500** to protect and to guide the contact assemblies **500** during insertion or removal from the terminals **600**. In various aspects, the cowls **120** may be a fixed length less than the exposed length of the contact  
15 assemblies **500**, while in other aspects, the cowls **120** may extend along the entire length (or past the length) of the contact assemblies **500** exposed from the enclosure body **130** when the breaker enclosure **100** is not installed in the terminals **600**, but partially retract into the enclosure body **130** during installation in the terminals **600**.

In various aspects, the cowls **120** may fully wrap around the contact assemblies  
20 **500** or may act as a guide that does not completely wrap around an associated contact assembly **500**. Although the illustrated cowls **120** are shown as circular, other shapes are possible (e.g., ovoid, triangular, rectangular, pentagonal, etc.). Additionally, the cowls **120** may act as a poka-yoke to prevent a user from attempting to install the breaker enclosure **100** into terminal **600** that lacks safety features designed to work with the circuit breaker  
25 system described herein or at an improper orientation into a terminal **600**. The cowl **120** may act as a poka-yoke either due to its cross section being too large to allow for insertion of the breaker enclosure **100** into the terminal **600**, or its height being too great to allow for the contact assembly **500** to make electrical contact in the terminal **600**. In various aspects, the installed length of the cowl **120** may be sized so that an air gap is defined  
30 between the bottom of the contact assembly **500** and the terminal **600**. The cowl **120** also serves as a flame-path to prevent combustion due to arcing in the terminal **600** and/or the presence of combustible gas in a hazardous environment.

The breaker enclosure **100** houses a trip unit **200** in the enclosure body **130** that is operable to detect an overload condition and automatically move the circuit breaker

system from the closed state to the open state. The trip unit **200** may be actuated by an actuator lever **300** to move the circuit breaker system from opened to closed states and *vice versa*. The actuator lever **300** actuates an interlock toggle **400** to interfere with or allow the rotation of the contact assemblies **500** depending on the state of the trip unit **200**.

5 The breaker enclosure **100**, actuator lever **300**, and interlock toggle **400** are preferably constructed from a heat-resistant, non-conductive material.

In various aspects, the trip unit **200** may be magnetically, thermally, thermo-magnetically signaled to an overload condition in the circuit to which the circuit breaker system is attached. Different trip units **200** may be rated for different loads (e.g., the  
10 amounts of current, voltage, or associated magnetic flux or thermal buildup designated as an overload condition) and one of ordinary skill in the art will know how to select a trip unit **200** appropriate for the intended load. The trip unit **200** may contain internal contacts or an assembly to move external contacts located in the breaker enclosure **100**, wherein the contacts move in and out of electrical communication and thereby close and open the  
15 circuit in response to the overload condition being detected or a user manually actuating the circuit breaker system by the actuator lever **300**. In various aspects, the trip unit **200** may contain calibrators (e.g., set screws), overload condition adjusters, and arc suppressors.

When the trip unit **200** moves between the open state illustrated in **FIGURE 1** and  
20 the closed state illustrated in **FIGURE 2**, the actuator lever **300** also moves. The actuator lever **300** moves in an arc between at least two stable positions corresponding to the open and closed state of the circuit breaker system. In some aspects, additional stable positions may be possible for the actuator lever **300** to indicate additional information to a user (e.g., open – manual, open – tripped, open – ground fault, closed). The actuator lever **300** is in  
25 physical contact with the trip unit **200** and the interlock toggle **400**, and will move in response to the trip unit **200** tripping the circuit breaker system or an outside force (e.g., a user) opening or closing the circuit breaker system to set the state of the trip unit **200**. In various aspects, the actuator lever **300** may be a separate component connected to a state switch of the trip unit **200** or may be the state switch (or extension thereof) that protrudes  
30 from the enclosure body **300**.

The interlock toggle **400** moves (primarily) laterally across the length of the trip unit **200** to interfere with the rotation of the contact assemblies **500** when the trip unit **200** is in the closed state; preventing the contact assemblies **500** from rotating when the circuit breaker system could carry current (i.e., when the trip unit **200** is in a closed state). Stated

differently, when the trip unit **200** is in the closed state, the interlock toggle **400** is positioned such that the contact assemblies **500** are locked to remain rotated in their conductible state (i.e., the state in which the contact assemblies **500** may be installed to conduct current when the trip unit **200** is closed) so that the contact assemblies **500** cannot  
5 be removed from the terminals **600** until the trip unit **200** enters the open state and disengages the interlock toggle **400** to allow for the contact assemblies **500** to be rotated to the insertion state to enable a user to insert or remove the contact assemblies **500** from the terminals **600** safely.

The interlock toggle **400** includes an interlock body **420** with two arms **440** on  
10 either end of the interlock body **420** to engage with the interlock tabs **540** defined on the contact assemblies **500** (discussed in greater detail in regard to **FIGURE 3**) when the trip unit **200** is in the closed state. The arms **440** protrude from the interlock body **420** in a different plane from the primary plane of the interlock body **420** and its travel so that the interlock body **420** does not engage with the contact assembly **500**. In various aspects, the  
15 length of the body **420** is such that when the trip unit **200** is in the open state the arms **440** are moved out of physical contact (or potential contact) with the contact assemblies **500**, thus allowing the free rotation of the contact assemblies **500** between the installation and insertion states. In various aspects, the interlock toggle **400** may be part of the trip unit **200** or actuator lever **300** or may be a separate component connected to the trip unit **200** or  
20 actuator lever **300** (e.g., via slots and tabs) that moves when the state of the breaker changes. The states of the trip unit **200** and resultant position of the interlock toggle **400** and the states of the contact assemblies **500** are discussed in greater detail in regard to **FIGURE 8**.

In various aspects, a detent **700**, an example of which is shown in relation to  
25 **FIGURE 3**, is associated with each contact assembly **500**. The detent **700** prevents the over rotation of the contact assembly **500**, such that the contact assembly **500** may rotate between the installation and insertion states, but not beyond, even when the contact assembly **500** is not engaged with the toggle interlock **400**. In various aspects, the detent **700** may engage with one or more features on the breaker enclosure **100**, the trip unit **200**,  
30 or the terminal **600** and one or more features on the contact assembly **500** to prevent over rotation. The detent **700** may be a separate component in communication with the contact assembly that rotates with the contact assembly **500** as it rotates, and makes contact with the breaker enclosure **100**, the trip unit **200**, or the terminal **600** when full rotation is achieved or may be an extension of the contact assembly **500** that prevents rotation of the

assembly by engaging with another component once full rotation is achieved; several varieties of detents **700** are possible.

In aspects where the circuit breaker system is designed for protecting more than one phase (which may include a ground phase) the internal components of the breaker enclosure **100** may be designed to handle multiple phases, or individual components designed for one phase may be multiplied within the breaker enclosure **100**. For example, when the circuit breaker system is designed for protecting one phase, one trip unit **200**, one interlock toggle **400**, and two contact assemblies **500** may be enclosed by the breaker enclosure **100**. In another example, when the circuit breaker system is designed for protecting two phases, two single-phase trip units **200**, two interlock toggles **400**, and four contact assemblies **500** may be enclosed by the breaker enclosure **100** or one two-phase trip unit **200**, one or two interlock toggles **400**, and four contact assemblies **500** may be enclosed by the breaker enclosure **100**. In aspects where more than two contact assemblies **500** are present, contact assemblies **500** on a given side of the trip unit **200** (e.g., anode or cathode) may share a knob **520** and may be mechanically communicated to the knob **520** (via interlocking gears, sprocket and chain, three bar linkage, etc.) so that an operator may rotate a single knob **520** to rotate multiple contact assemblies **500**.

**FIGURE 3** is an orthographic view of a contact assembly **500** showing various details and sub-components. The contact assembly **500**, when installed in the circuit breaker system, is in electrical communication with the trip unit **200** so that current may flow from a first terminal **600a**, through a first contact assembly **500a**, through the contacts (if closed), through a second contact assembly **500b**, and to a second terminal **600b**. The contact assembly **500** is partially housed within the breaker enclosure **100**, but protrudes so that when the circuit breaker system is fully installed into the terminals **600**, the contact assembly **500** will be installed into the contact cavity **640** of the terminal **600** (shown in greater detail in regard to **FIGURES 4, 5, and 6**).

The contact assembly **500** comprises a shaft **510** that is electrically conductive, but various portions of the contact assembly **500** may not be electrically conductive. For example, a knob **520** disposed of at the end of the contact assembly **500**, by which a user may rotate the contact assembly **500**, may be made of an electrically non-conductive material, and the shaft **510** may be clad (at least partially) with an electrically non-conductive material for greater safety during installation/removal while under load.

The shaft **510** is electrically communicated to the terminals **600** when installed via contact leads **530**. A contact lead **530** may be a protrusion from the shaft **510** (such that



the shaft **510** and one or more contact leads **530** are milled from a single piece) or may be a separate component connected to the shaft **510**. For example, the contact leads **530** may be connected via wiring and springs (i.e., are spring-loaded) to ensure solid electrical contact between the shaft **510** and the terminal **600**. In another example, the contact leads

5 **530** may be brazed or welded to the shaft **510**. The contact leads **530** are made of a conductive material and may be coated with another conductive material (e.g., electroplated) for preventing corrosion, reducing wear, or lowering surface electrical resistance. For example, a copper contact lead **530** may be plated with gold or a higher grade of copper along its contact surfaces.

10 The shaft **510** defines a depression, referred to as an interlock tab **540**, on the contact assembly **500** that enables the free movement of the interlock toggle **400** when the contact assembly **500** is rotated to not make electrical contact with the terminals **600** and to disable the interlock toggle **400** from moving freely when the contact assembly **500** is rotated to make electrical contact with the terminals **600**. When all of the contact

15 assemblies **500** are rotated to make contact with the terminals **600**, the interlock toggle **400** can freely move and the state of the circuit breaker **500** may change (e.g., a user may open or close the circuit breaker system). When at least one of the contact assemblies **500** are rotated to not make contact with the terminals **600**, the depression defining the interlock tab **540** rotates to block the free motion of the interlock toggle **400**, which in turn prevents

20 the trip unit **200** (via the actuator **300**) from opening or closing the contacts. In various aspects, the interconnect toggle **400** may be connected to one or more interlock tabs **540** via a hinge or joint to push the trip unit **200** into an open state when the associated contact assembly **500** is rotated to allow for insertion into the terminal **600**. The states of the trip unit **200** and resultant position of the interlock toggle **400** and the states of the contact

25 assemblies **500** are discussed in greater detail in regard to **FIGURE 8**.

To prevent the user from inserting the contact assemblies **500** into the terminals **600** when the contact assemblies **500** can make electrical contact or removing the contact assemblies **500** from the terminals **600** while they are in electrical contact with the terminals **600**, the contact assemblies **500** include insertion tabs **550**. The insertion tabs

30 **550** interact with the installation collar **650** of the terminals **600** (shown in greater detail in regard to **FIGURES 4** and **5**) to prevent electrical contact being established or broken via the contact assembly **500** being inserted or removed from the terminals **600**. The gap defined by installation collar **650** is wide enough for the free travel of the contact leads **530** throughout the area defined by the installation collar **650**, but only wide enough to

allow the insertion of the insertion tabs **550** past the installation collar **650** when the contact assembly **500** is in a single orientation. The insertion orientation is such that the interlock tab **540** would prevent the free movement of the interlock toggle **400** so that the trip unit **400** cannot have its state changed while the contact assemblies **500** can be  
5 inserted into the terminals **600**.

The contact assembly **500** as illustrated include a collar **560**, protruding with a greater diameter than the shaft **510**. In various aspects, the collar **560** is oblong and acts as a detent **700** that engages with breaker enclosure **100** or the trip unit **200** when the contact assembly **500** has been fully rotated. In other aspects, the collar **560** may be circular but  
10 defines a capture **570** that engages with a detent **700** that is a separate component that engages with the contact assembly **500** and the breaker enclosure **100**, the trip unit **200**, or a feature in the terminal **600** to prevent over-rotation. In various aspects, the detent **700** may be spring-loaded, such that it engages with the capture **570** to interfere with the rotation to the contact assembly **500** when the breaker enclosure **100** is not installed into  
15 the terminals **600**, but is pushed out of engagement with the capture **570** when the breaker enclosure **100** is installed into the terminals **600** (e.g., via contact with the installation collar **650**); allowing the rotation of the contact assemblies **500** only when installed into the terminals **600**.

In some examples, the contact assembly **500** may include one or more status  
20 indicators **502**. The status indicator **502** provides local communication of the status of contact assembly. For example, the status indicator **502** could include one or more LED lights, such as red and green LEDs that visually indicate successful or unsuccessful installation of the contact assembly **500** into the terminal **600**.

**FIGURES 4-7** relate to the terminal **600**. **FIGURE 4** is a cut-away view of the  
25 terminal **600** for the circuit breaker system described herein. **FIGURES 5** and **6** show alternative views of the terminal **600** that highlight an overhead view of the terminal for the circuit breaker showing detail of the installation collar **650** and a lateral cut-away view of the terminal **600** for the circuit breaker showing the contact blocks **630** as transparencies, respectively. **FIGURE 7** is an orthographic view of a contact block **630**,  
30 showing details thereof.

The terminal **600** is operable to physically secure the breaker enclosure **100** and the contact assemblies **500** to the circuit which the breaker will protect and to enable the flow of current through the circuit breaker system when in the closed state to supply power to the load downstream from the circuit breaker system.

The terminal **600** includes a terminal body **610**, defining a cowl cavity **620**, a contact cavity **640**, and a lead cavity **660**. The terminal body **610** is comprised of a conductive material, but may include coatings to reduce or increase the surface resistance, increase the wear resistance, or increase the corrosion resistance of various portions of the terminal body **610**.

The cowl cavity **620** and contact cavity **640** are collinearly defined in the terminal body **610** and are separated by the installation collar **650**. Contact blocks **630** are disposed of within the contact cavity **640** to establish electrical communication between the terminal **600** and the contact assembly **500** via the contact leads **530**.

The cowl cavity **620** is defined superficially to the contact cavity **640** and is sized to accept the cowls **200**. Although illustrated as having a circular cross sectional area, the cowl cavity **620** may have different shapes for its cross sectional area in different aspects to match differently shaped cowls **200** and thereby act as a poka-yoke or go/no-go safety feature. In various aspects, the surface of the terminal body **610** that defines the cowl cavity **620** may be coated with a non-conductive material to prevent accidental contact being established during installation/extraction of the contact assemblies **500**. The cowl cavity **620** may be defined with a greater cross sectional area than the contact cavity **640**.

The contact cavity **640** is defined deeper in the terminal body **610** than the cowl cavity **620** and is sized to accept the insertion tabs **550** of the contact assemblies **500**, but so that the contact leads **540** do not make electrical contact (or allow a spark to cross the gap to establish contact when the breaker is used according to its rating) with the terminal body **610**. Although illustrated with a mostly-circular cross-sectional area with two insertion channels **642** on opposing poles, so long as the contact cavity **640** allows for the rotation of the insertion tabs **550** along with the contact assembly **500** between the conductible state and the insertion state, other cross-sectional shapes are possible. In various aspects, the contact cavity **640** may be coated or treated to increase its electrical resistivity, or improve its wear or corrosion characteristics.

The insertion channels **642** may run the length of the contact cavity **640** and define a space in which the contact block **630** may be installed. Rotation channels **644** may be defined deep to the installation collar **650** to accept the insertion tabs **550** and allow for the rotation of the insertion tabs **550** but to act as a detent **700** to arrest the rotation of the contact assembly **500** beyond the insertion and conductible states. The rotation channels **644** lead from the insertion channels **642** and run along the terminal body **610** defining the contact cavity **640**. When the insertion tabs **550** have been rotated into the insertion

channels **642** (the contact assembly **500** is fully or partially in the installed state), the insertion channels **642** prevent the removal of the contact assembly **500** from the terminal **600** until the insertion tabs **550** have been rotated out of the rotation channels **644** and into the insertion channels **642** (the contact assembly **500** is in the insertion state). In various aspects, the height in the contact cavity **640** at which the rotation channels **644** are defined may define an additional safety feature that prevents the contact assembly **500** from rotating into the conductible state when the contact assembly **500** (and thereby the insertion tabs **550**) are not at the correct depth of insertion for safe installation.

The installation collar **650** separates the contact cavity **640** from the cowl cavity **620**. In various aspects, the contact cavity **640** may be defined in the terminal body **610** as a differently sized or shaped cavity from the cowl cavity **620**, wherein the installation collar **650** is affixed to a wall defining the cavities or a ledge/rabbet/shoulder leading from a larger superficial cavity to a smaller deeper cavity. Alternatively, the installation collar **650** may be a separate piece inserted and affixed to the terminal body **610** walls or floor deep in the cowl cavity **620** to define the contact cavity **640**. The installation collar **650** may be affixed via brazing, welding, tension, etc. or may be an aspect that was milled from the terminal body **610**.

In various aspects, the installation collar **650** may define installation gaps **652**, aligned with the insertion channels **642** of the contact cavity **640** sized to allow the insertion tabs **550** to enter the insertion channels **642**, and may define a through-channel **654**, sized to allow the insertion of the contact leads **530** into the contact cavity **640**, but prevent the insertion of the insertion tabs **550** of the contact assembly **500** into the contact cavity except through the insertion gaps **652** and insertion channels **642**. The installation collar **650** may be coated with or constructed from a non-conductive material or may be conductive in different aspects.

The lead cavity **660** defined in the terminal body **610** accepts electrical leads from the circuit that the circuit breaker system will protect and ensures electrical contact between the terminal **600** and the circuit by pressing the electrical lead into the terminal body **610** with the lead lug **670**. In various aspects, the lead lug **670** is a screw having threads mated to the terminal body **610** that a user may tighten or loosen to secure or release the electrical contact. In other aspects, the lead lug **670** is an alligator clip or other spring actuated device to secure the electrical lead in the lead cavity **660**. As will be appreciated, the above are given as non-limiting examples, and other devices and connectors may be used to ensure the physical and electrical connection between the

circuit and the circuit breaker system. As will also be appreciated, although shown in a perpendicularly tangential arrangement with the other cavities defined in the terminal body **610**, in other aspects the lead cavity **660** may be collinear or parallel to the other cavities or may be tangential at an angle other than 90 degrees.

5           Turning now to **FIGURE 7**, additional details regarding the contact block **630** are discussed. The contact blocks **630** is disposed of in the contact cavity **640** in opposition to one another to make electrical contact with a set of contact leads **530** on an inserted contact assembly **500** that has been rotated into the conductible state. The contact block **630** may be sized to be deep to where the interlock tabs **550** enter the contact cavity **640** so  
10 as to not interfere with the insertion of the contact assemblies.

In various aspects, the contact block may be a protrusion from the walls of the terminal body **610** or may be a separate component. In aspects where the contact block **630** is a separate component, it may be mounted to the wall of the terminal body **610** defining the contact cavity **640** or the floor of the contact cavity **640** and may be mounted  
15 by affixing (e.g., brazing, welding) the contact block **630** or a surface of the terminal body **610** or attaching the contact block **630** to a compression spring affixed to a surface of the terminal body **610** to push the contact block **630** into contact with the contact leads **530**. In various aspects, the contact block **630** may be connected to a spring via a prong **632** facing the surface to which the spring is affixed, or may use the prong **632** itself as a simple  
20 spring.

The contact block **630** includes a contact surface **634** that makes electrical contact with the contact leads **530**. In various aspects, the contact surface **634** (or the entire contact block **630**) is treated to improve its conductivity, wear resistance, or corrosion resistance. In one example, the contact surface **624** may act as a detent **700** that the contact leads **530**  
25 will make contact with and restrict the further rotation of the contact assembly **500** via a stop (e.g., via an “L” shaped contact surface **624**). In another example, the contact surface **624** may define an arced surface that the contact leads **530** may rotate across to make electrical contact, wherein the contact leads **530** include a similarly arced surface to mate with the contact surface **624** as at least a portion of a concentric arc to that defined by the  
30 contact surface **624**.

**FIGURE 8** illustrates a series of different breaker states **801-4** based on the states for the trip unit **200** and resultant position of the interlock toggle **400** and the states of the contact assemblies **500** in relation to one another. As illustrated, the contact assemblies **500** are cut away to provide a top-down (or bottom-up) view showing the interactions

between the interlock tabs **540** and the interlock toggle **400**. Also illustrated is the rotational axis **805** of the contact assemblies and the travel path **806** of the interlock toggle **400**, which are not physical components, but are provided as an aid in describing the breaker states **801-4**.

5           As mentioned above, the contact assemblies **500** rotate between an insertion state (allowing the breaker assembly **100** to be installed or removed from the terminals) and an conductible state (allowing the contact assemblies **500** to carry current from the terminals **160**), but if one contact assembly **500** is in the conductible state, the breaker is considered to be in the conductible state and any state between the full insertion state and the full  
10   conductible state may be treated as the conductible state. As illustrated, the contact assemblies rotate a quarter turn (e.g., 90 degrees of arc) between each state, but other rotational travel distances are possible in different aspects.

          Similarly, the state of the trip unit **200** is reflected in the position of the interlock toggle **400**, thus the state of open or closed for the trip unit **200** may be described in terms  
15   of the toggle interlock **400** sharing that state. Although several positions are possible for the toggle interlock **400** (e.g., when moving from one state to another, a different position for trip-open versus manual-open), any position that is not related to the closed state may be treated as part of the open state.

          A first breaker state **801** corresponds to when the contact assemblies **500** are in the  
20   insertion state and the trip unit **200** is in the open state. When the trip unit **200** is in the open state, it cannot carry current, and it is safe to insert the breaker enclosure **100** into the terminals **600**. To prevent the trip unit **200** from entering the closed state, the contact assemblies **500** in the insertion state prevent the toggle interlock from moving along its travel path **806** to the closed state.

25           A second breaker state **802** corresponds to when the contact assemblies **500** are in the conductible state and the trip unit **200** is in the open state. When the contact assemblies **500** are in the conductible state, the contact assemblies **500** cannot be inserted into or removed from the terminals **600** due to the insertion tabs **550** interfering with the installation collar **650**.

30           A third breaker state **803** corresponds to when the contact assemblies **500** are in the installation state and the trip unit **200** is in the closed state. Because when the contact assemblies are in the conductible state the interlock tab **540** is rotated to allow the free movement of the interlock toggle **400**, the circuit breaker may freely switch from second

breaker state **802** to the third breaker state **803** and vice versa, allowing a user or the trip unit **200** to change the state of the circuit breaker.

A fourth breaker state **804** is illustrated, but shows an impossible state for the breaker given its construction. The hypothetical fourth breaker state **804** corresponds to when the contact assemblies **500** are in the insertion state and the trip unit **200** is in the closed state. As shown, the arms **440** of the interlock toggle **400** would interfere with the contact assemblies **500**, thus preventing the circuit breaker from being in the fourth breaker state **804**. Instead, when the trip unit **200** moves from the open state to the closed state and the contact assemblies **500** are in the insertion state, the interlock toggle **400** would either be prevented from moving to the closed state (keeping the trip unit **200** in the open state and the first breaker state **801**) or would move the contact assemblies **500** to the installed state and the third breaker state **803** (preventing the breaker enclosure **100** from being inserted to or removed from the terminals **600**). Alternatively, when the trip unit **200** starts in the closed state, by rotating one or more contact assemblies **500** from the conductible state to the insertion state, the interlock tab **540** would interface with the arms **440** of the interlock toggle **400** to move the interlock toggle **400** (and thus the trip unit **200**) into the open state and the breaker into the first breaker state **801** or would be prevented from rotating, and would remain in the third breaker state **803**. As will be appreciated, the interlock tab **540** and/or the arms **440** may include bevels, catches or other devices intended to improve the interface between the two sub-components or to reduce the durability of the components.

**FIGURE 9** illustrates an additional safety circuit for use in a trip unit **200** to incorporate an electric interlock circuit **900** so that the trip unit **200** may be moved automatically from the closed state to the open state when a permanent magnet (or mechanical relay) associated with a locking pin used to secure the trip unit **200** in the breaker enclosure **100**, the interlock toggle **400**, or one or more contact assemblies **500** moves across a reed switch **943** (or a solid-state switch) to simulate a short circuit. In the illustrated interlock circuit **900**, the power source **910** (e.g., supplying the line current) is illustrated in electrical communication with the short-circuit winding **920** of the trip unit **200**, but as will be appreciated, may be omitted or presented without electrical communication when the trip unit **200** is in the open state or is not installed in the circuit between the line and the load.

The short-circuit winding **920** is an electromagnetic coil that is operable to move, via electromagnetic forces, a short-circuit switch **930** when the trip unit **200** detects a short

circuit. The short-circuit switch **930** may be either pulled or pushed by the short-circuit winding **920** or make or break contact when sufficient current flows through the short-circuit winding **920** (producing a sufficiently strong magnetic field), which the trip unit **200** will interpret to mean that a short circuit has occurred in the load or the electrical protection device and thereby open the contacts, moving the trip unit **200** to the open state.

The short-circuit winding **920** is in electromagnetic communication with the energy storage circuit **940** via an inductive winding **941** that is affected by the magnetic field produced by the short-circuit winding **920** to induce a current in the energy storage circuit **940** when the short-circuit winding **920** carries current from the power source **910**. When a current is induced in the energy storage circuit **940**, energy is stored in a capacitor **942** to allow for the current normally present in the trip unit **200** during operation to charge the energy storage circuit **940**. A diode **944** is disposed of between the inductive winding **941** and the capacitor **942**, and is biased to allow the flow of current from the inductive winding **941** to the capacitor **942**. The reed switch **943** is disposed of in parallel to the diode **944** and is open while the energy storage circuit **940** is charging (or is charged), and when the reed switch **943** is in the closed state, the capacitor **942** discharges and energizes the inductive winding **941**. The energy stored in the capacitor **942** is fed back through the inductive winding **941** when the reed switch **943** is closed to produce a magnetic field that activates the short-circuit switch **930**, causing the trip unit **200** to move to the open state.

**FIGURE 10** is a flow chart showing the general stages in an example method **1000** to install the improved circuit breaker system described herein. As will be appreciated, the operations of method **1000** may be executed in reverse to uninstall the circuit breaker system from the circuit and may omit OPERATION **1010** when the terminals **600** are already installed or are to remain installed.

When installing a circuit breaker system, method **1000** begins at OPERATION **1010**, where the terminals **600** are connected to the circuit. An operator may strip conductive leads from the circuit and insert them into the lead cavities **660** of the terminals **600** and ensure the solid contact between the terminal **600** and the circuit by clamping the circuit's lead to the terminal **600** via a terminal lug **670**. In various aspects, the terminals **600** are connected to a surface, such as, for example, in a breaker box, and are spaced apart from one another to allow the breaker enclosure **100** to be connected to the terminals **600**. As will be appreciated, for each phase that the circuit breaker system will protect in the circuit, a pair of terminals **600** will be connected to the circuit; one upstream to the



breaker enclosure **110** and one downstream, such that a single phase breaker will use one pair of terminals **600** and a three-phase breaker will employ six terminals **600** in pairs of two. Similarly, for each phase protected by the circuit breaker system, one pair of contact assemblies **500** (one in communication on the anode/upstream side of the trip unit **200** and  
5 the other in communication on the cathode/downstream side of the trip unit **200**) will be used to mate with the associated terminals **600**.

At OPERATION **1020** the circuit breaker is ensured to be in the first breaker state **801**, where the trip unit **200** is in an open state and all of the contact assemblies **500** are in the insertion state. In the first breaker state **801** the trip unit **200** will holds the electrical  
10 contacts of the circuit breaker apart so that they are not in electrical communication with one another and the contact assemblies **500** are rotated so that they may pass the interlock collar **650** and not hold the contact leads **530** in electrical communication with the contact blocks **630**. The circuit breaker may be safely inserted or removed from the terminals when in the first breaker state **801**, even when the circuit is under load.

15 Proceeding to OPERATION **1030**, the breaker enclosure **110** is inserted into the terminals and the contact assemblies are rotated into the installed state from the insertion state at OPERATION **1040** to make an electrical connection between the contacts leads **530** and the contact blocks **630**. This corresponds to the second breaker state **802**. The trip unit **200** may then be safely moved to the closed state, establishing electrical  
20 communication for the circuit through the circuit breaker and corresponding to the third breaker state **803**. As will be appreciated, the state of the circuit breaker once installed may vary between the second breaker state **802** and third breaker state **803** during the course of normal, and a user may return the circuit breaker to the first breaker state **801** to remove the breaker enclosure **110** from the terminals **600**. Method **1000** may then  
25 conclude.

In accordance with further aspects, the disclosed circuit breaker system may be employed as part of a sensing system in which sensors are included to detect various states of the circuit breaker system. Further, such detected states may be sent to a remote monitoring system by a transmitter configured to communicate with the remote  
30 monitoring system by any suitable wired or wireless communication arrangement. Moreover, a plurality of the circuit breaker systems may communicate with such a monitoring system via a network architecture, allowing central monitoring of the sensors associated with respective circuit breaker systems. For example, various sensors may be configured to detect current flow between the terminals **600**, voltage differences between

the terminals 600, whether the trip unit 200 is in the open or closed state, whether the breaker enclosure 100 is installed into the terminals 600, etc.

In accordance with still further aspects, disclosed examples include an electrical protection device that operable to be safely installed and removed with equipment under  
5 load. The electrical detection device includes an enclosure made of a non-conductive material, with an enclosure body, a cover, and cowls. Contact assemblies extend vertically through the enclosure through the cowls. Each contact assembly includes a shaft having a top and a bottom about which the contact assembly rotates between an insertion state and a conductible state, a knob on the top of the shaft and positioned outside of the enclosure,  
10 contact leads extending perpendicularly from the shaft and located proximate to the bottom of the shaft, installation tabs extending perpendicularly from the shaft and located topward from the contact leads and at right angles from the contact leads, and an interlock tab that is defined as a depression on the shaft bottomward from the knob and topward from the installation tabs. A trip unit, which is located centrally to the contact assemblies  
15 within the enclosure, is in electrical communication with the contact assemblies. The trip unit is operable to carry current from an anode to a cathode when in a closed state and to not carry current when in an open state. A toggle interlock is in communication with the trip unit, and is operable to move horizontally within the enclosure to a first position when the trip unit is in the closed state and to move to a second position when the trip unit is in  
20 the open state. The toggle interlock is positioned vertically in the enclosure relative to interlock tabs of the contact assemblies such that the first position coincides with the installation tab of at least one contact assembly so that when the at least one contact assembly is in the conductible state, the installation tab of the at least one contact assembly prevents the trip unit from being in the closed state by blocking the toggle  
25 interlock from moving to the first position.

The electrical protection device may further include an actuator lever positioned outside of the enclosure and in communication with the trip unit, and operable to move the trip unit between the closed state and the open state. The installation tabs may be non-conductive. The contact leads may define arced contact surfaces. In further examples,  
30 when a given contact assembly is rotated to the insertion state and the interlock tab is in the first position, the interlock tab is moved to the second position and the trip unit is changed to the open state. When a given contact assembly is in the insertion state, the trip unit may be prevented from entering the closed state by the toggle interlock being blocked from moving to the first position by the interlock tab of the given contact assembly. The

installation tabs may extend further from the shaft than the contact leads extend from the shaft. The protection device may act as one of, for example, a circuit breaker, a switch, a contactor, a fuse block, or a starter.

5 The trip unit may also include an energy storage circuit in magnetic communication with a short-circuit winding of the trip unit. The energy storage circuit includes, for example, an inductive winding in magnetic communication with the short-circuit winding and in electrical communication with a first node and a second node of the energy storage circuit, a capacitor in electrical communication with the second node and a third node of the energy storage circuit, a switch in electrical communication with the first  
10 node and the third node when in a closed state, and a diode in electrical communication with the first node and the third node, and biased for current flow from the first node to the third node. The short-circuit winding induces a current in the inductive winding when the switch is open to provide a charge to the capacitor, and wherein the capacitor discharges the charge when the switch is closed to induce additional flux in the short-circuit winding  
15 via the inductive winding. The switch may be operable to be closed in response to a lock pin of the trip unit being unlocked, and the switch may be in magnetic communication with a permanent magnet associated with the lock pin to close in response to the lock pin being unlocked, and/or switch may be in mechanical communication with the lock pin to close in response to the lock pin being unlocked. The switch may be, for example, a reed  
20 switch or a solid-state switch.

Various modifications and alterations of this disclosure will become apparent to those skilled in the art without departing from the scope and spirit of this disclosure, and it should be understood that the scope of this disclosure is not to be unduly limited to the illustrative examples set forth herein.

25

What is claimed is:

1. A electrical protection system operable to be safety installed and removed with equipment under load, comprising:

a protection device enclosure including:

a trip unit, operable to move the electrical protection system between an open state to a closed state;

a toggle interlock, in physical communication with the trip unit and operable to move laterally in response to the electrical protection system moving between the open state and the closed state;

a first contact assembly in electrical communication the trip unit on an anode side of the trip unit and protruding from the protection device enclosure;

a second contact assembly in electrical communication with the trip unit on a cathode side of the trip unit and protruding from the protection device enclosure;

wherein the first contact assembly and second contact assembly are operable to rotate between an insertion state and an conductible state;

wherein the first contact assembly and second contact assembly each define interlock tabs as depressions along the length of the contact assembly, the interlock tabs allowing the toggle interlock to move freely when all contact assemblies are in the conductible state and mechanically preventing the trip unit from being in the closed state via the toggle interlock when at least one of the contact assemblies is in the insertion state;

a first terminal, in electrical communication with the first contact assembly and an upstream portion of a circuit which the electrical protection system is to protect;

a second terminal, in electrical communication with the second contact assembly and a downstream portion of the circuit which the electrical protection system is to protect;

wherein the first terminal and the second terminal each include installation collars, the installation collars preventing insertion or removal of an associated contact assembly in the conductible state; and

wherein the first terminal and the second terminal each include contact blocks, the contact blocks establishing electrical communication between the circuit and the associated contact assembly when the associated contact assembly is in the conductible state.

2. The electrical protection system of claim 1, wherein the protection device enclosure further includes:

a first cowl, through which the first contact assembly protrudes;

a second cowl, through which the second contact assembly protrudes;

a first cowl cavity defined in the first terminal superficial to the contact collar, shaped to accept the first cowl and into which the first cowl extends;

a second cowl cavity defined in the second terminal superficial to the contact collar, shaped to accept the second cowl and into which the second cowl extends; and

wherein the first cowl and the second cowl are constructed of a non-conductive material.

3. The electrical protection system of claim 2, wherein the first cowl and the second cowl are partially retracted into the protection device enclosure when the first cowl and the second cowl are accepted into the first cowl cavity and the second cowl cavity.

4. The electrical protection system of claim 1, wherein the first contact assembly and second contact assembly each define non-conductive insertion tabs extending perpendicularly from a shaft of the associated contact assembly, wherein the insertion tabs are cooperatively sized and shaped with an insertion channel defined in an associated terminal and its installation collar for allowing insertion or removal of the associated contact assembly while in the insertion state.

5. The electrical protection system of claim 4, wherein the first terminal defines a cowl cavity superficial to the contact collar and defines a contact cavity deep to the contact collar in the first terminal, wherein the contact cavity defines a rotation channel sized to allow free rotation of the insertion tabs and thereby the associated contact assembly between the insertion state and the conductible state.

6. The electrical protection system of claim 1, wherein the protection device enclosure further includes:

a first detent in communication with the first contact assembly, operable to prevent the first contact assembly from over rotating between the insertion state and the conductible state; and

a second detent in communication with the second contact assembly, operable to prevent the second contact assembly from over rotating between the insertion state and the conductible state.

7. The electrical protection system of claim 6, wherein the first detent prevents the first contact assembly from over rotating between the insertion state and the conductible state by making contact with the protection device enclosure or the trip unit when the first contact assembly is in the insertion state or the conductible state, and wherein the second detent prevents the second contact assembly from over rotating between the insertion state and the conductible state by making contact with the protection device enclosure or the trip unit when the first contact assembly is in the insertion state or the conductible state.

8. The electrical protection system of claim 6, wherein the first detent and the second detent are defined on the contact blocks, wherein the contact blocks prevent the over rotation of the first contact assembly and the second contact assembly by providing a stop to engage contact leads of the first contact assembly and the second contact assembly.

9. The electrical protection system of claim 6, wherein the first detent is a rotation channel defined in the first terminal cooperatively sized and positioned to prevent over rotation of the first contact assembly via installation tabs extending perpendicularly from a shaft of the first contact assembly, and wherein the second detent is a rotation channel defined in the second terminal cooperatively sized and positioned to prevent over rotation of the second contact assembly via installation tabs extending perpendicularly from a shaft of the second contact assembly.

10. The electrical protection system of claim 1, wherein the installation collar is non-conductive.

11. The electrical protection system of claim 1, wherein the contact blocks define arced contact surfaces, operable to engage and establish electrical communication with arced contact leads extending perpendicularly from the first contact assembly and the second contact assembly when in the conductible state.

12. The electrical protection system of claim 1, further comprising:  
a sensor configured to detect a state of the electrical protection system; and  
a transmitter configured to send the detected state to a remote monitoring system.

13. A method for assembling an electrical protection system, the electrical protection system including a first contact and a second contact rotatable between first and second rotational states, the first contact and second contact electrically connecting to corresponding terminals when in the second rotational state and not electrically connecting to the corresponding terminals when in the first rotational state, and a trip unit for opening and closing an electrical connection between the first contact and the second contact, the method comprising:

mechanically preventing the first contact and the second contact from being loaded into the electrical protection system unless the trip unit is open and the first second contact and the second contact are in the first rotational state;

inserting the first contact and the second contact into the electrical protection system while the trip unit is open and the first contact and the second contact are in the first rotational state;

mechanically preventing the trip unit from being closed while the first contact and the second contact are inserted and are in the first rotational state;

rotating the inserted first contact and the second contact from the first rotational state to the second rotational state;

closing the trip unit while the inserted first contact and the second contact are in the second rotational state;

mechanically preventing the inserted first contact and the second contact from being moved from the second rotational state to the first rotational state while the trip unit is closed; and

mechanically preventing the inserted first contact and the second contact from being removed from the electrical protection system while in the second rotational state.

14. The method of claim 13, wherein rotating the inserted first contact or the second contact from the second rotational state to the first rotational state mechanically opens the trip unit.

15. An electrical protection device operable to be safety installed and removed with equipment under load, comprising:



an enclosure, made of a non-conductive material, having an enclosure body, a cover, and cowls;

contact assemblies, extending vertically through the enclosure through the cowls, each contact assembly having:

a shaft having a top and a bottom about which the contact assembly rotates between an insertion state and a conductible state;

a knob on the top of the shaft, positioned outside of the enclosure;

contact leads extending perpendicularly from the shaft, located proximate to the bottom of the shaft;


installation tabs extending perpendicularly from the shaft, located topward from the contact leads and at right angles from the contact leads; and

an interlock tab, defined as a depression on the shaft bottomward from the knob and topward from the installation tabs;


a trip unit, located centrally to the contact assemblies within the enclosure, in electrical communication with the contact assemblies, operable to carry current from an anode to a cathode when in a closed state and to not carry current when in an open state;

a toggle interlock, in communication with the trip unit, operable to move horizontally within the enclosure to a first position when the trip unit is in the closed state and to move to a second position when the trip unit is in the open state; and


wherein the toggle interlock is positioned vertically in the enclosure relative to interlock tabs of the contact assemblies such that the first position coincides with the installation tab of at least one contact assembly so that when the at least one contact assembly is in the conductible state, the installation tab of the at least one contact assembly prevents the trip unit from being in the closed state by blocking the toggle interlock from moving to the first position.

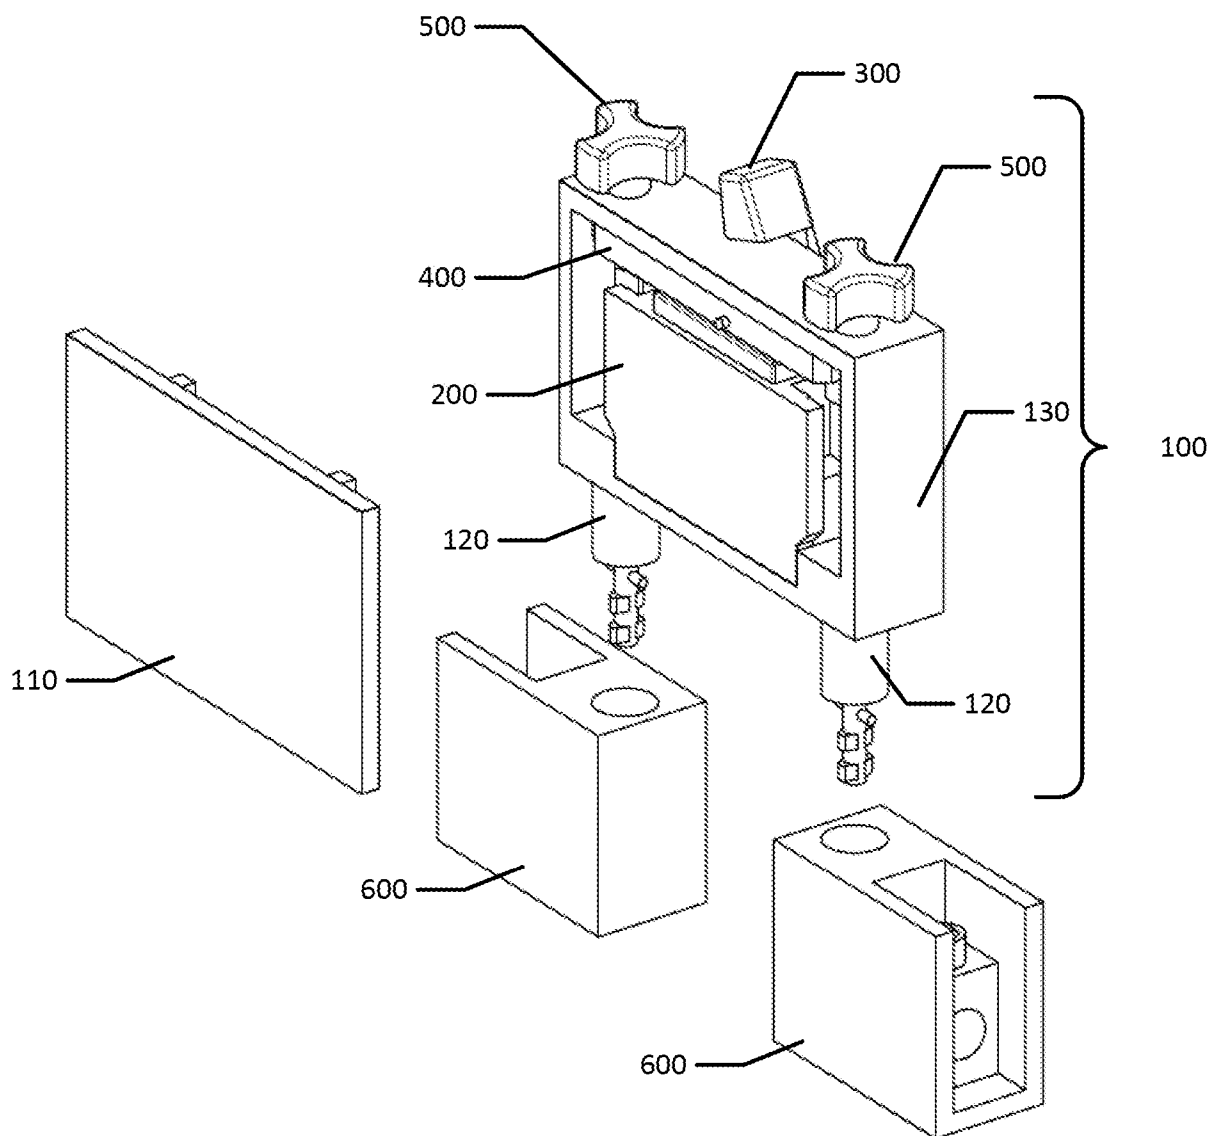

**Fig. 1**

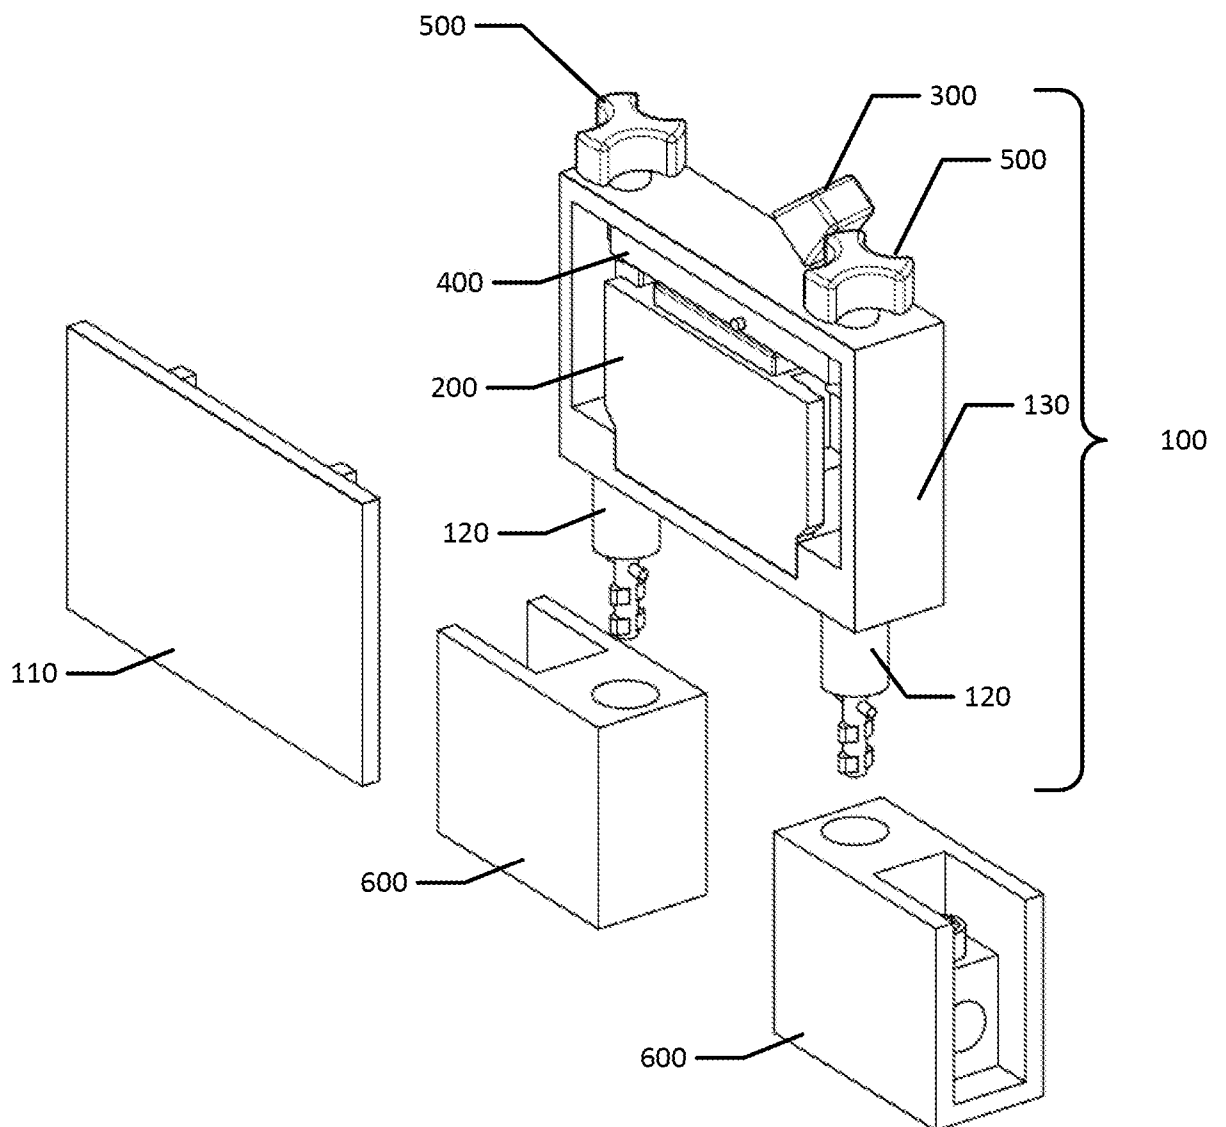

**Fig. 2**

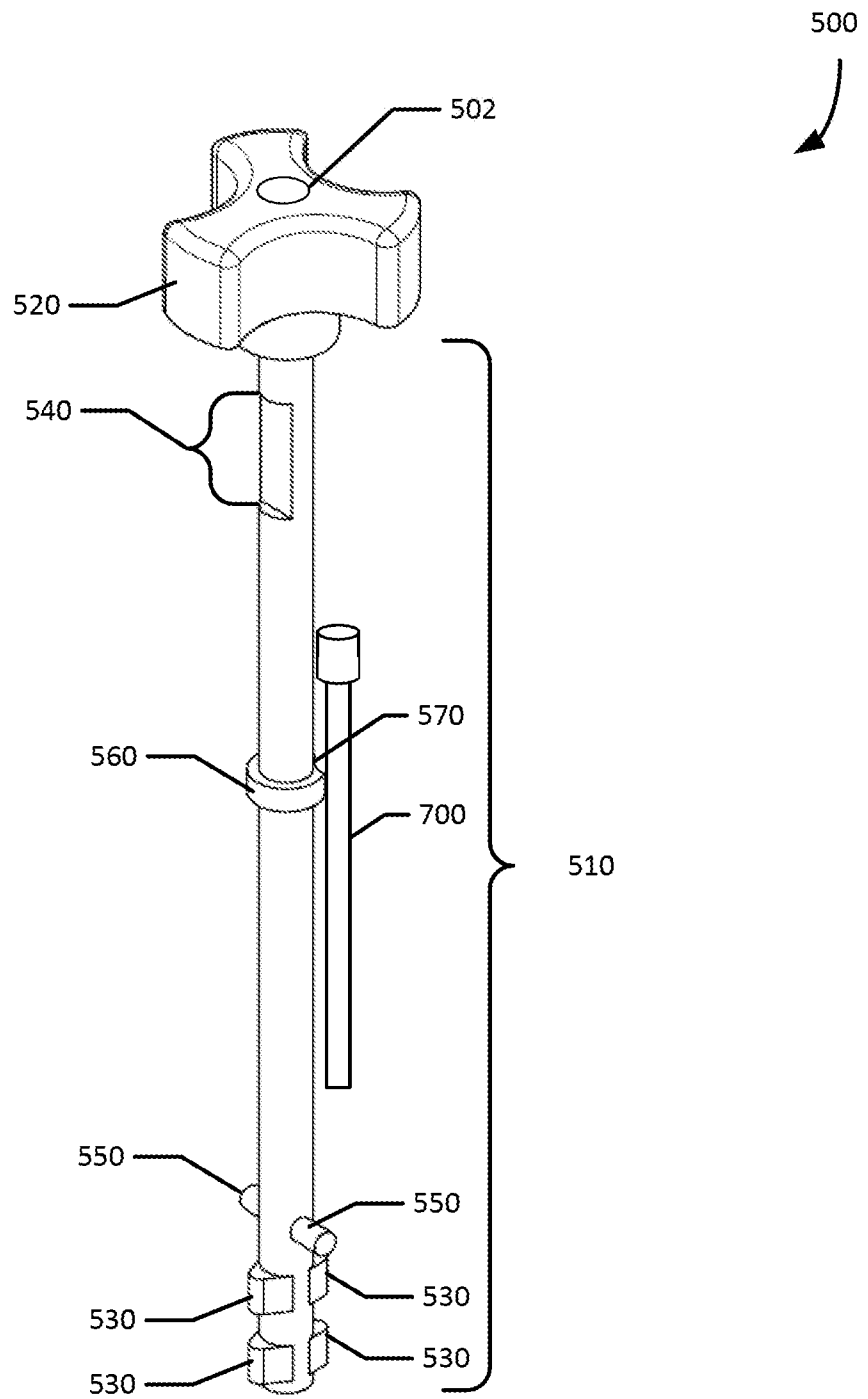

**Fig. 3**

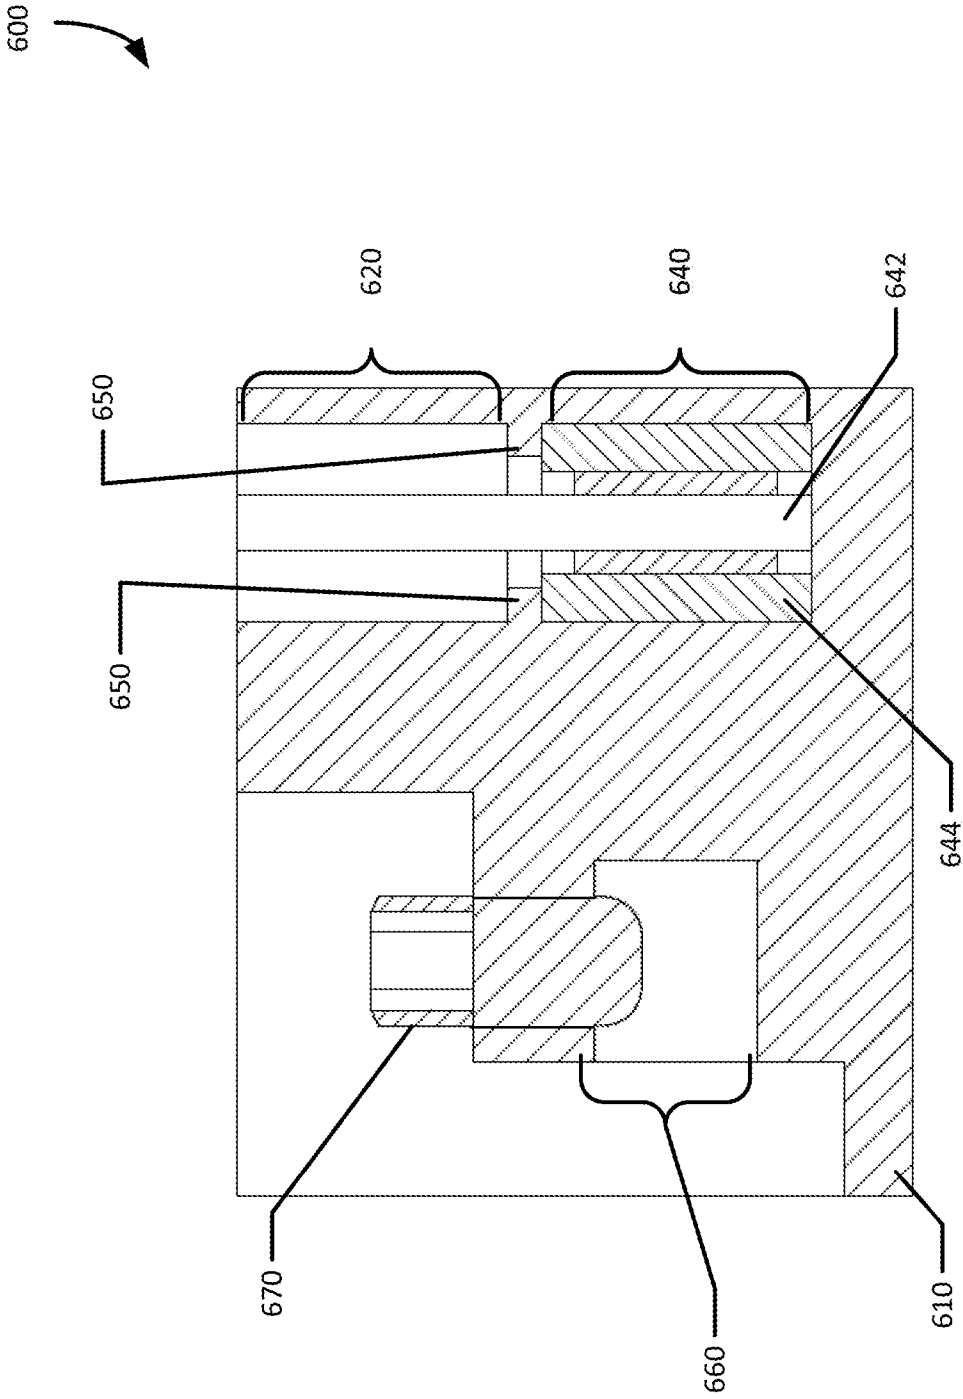


Fig. 4

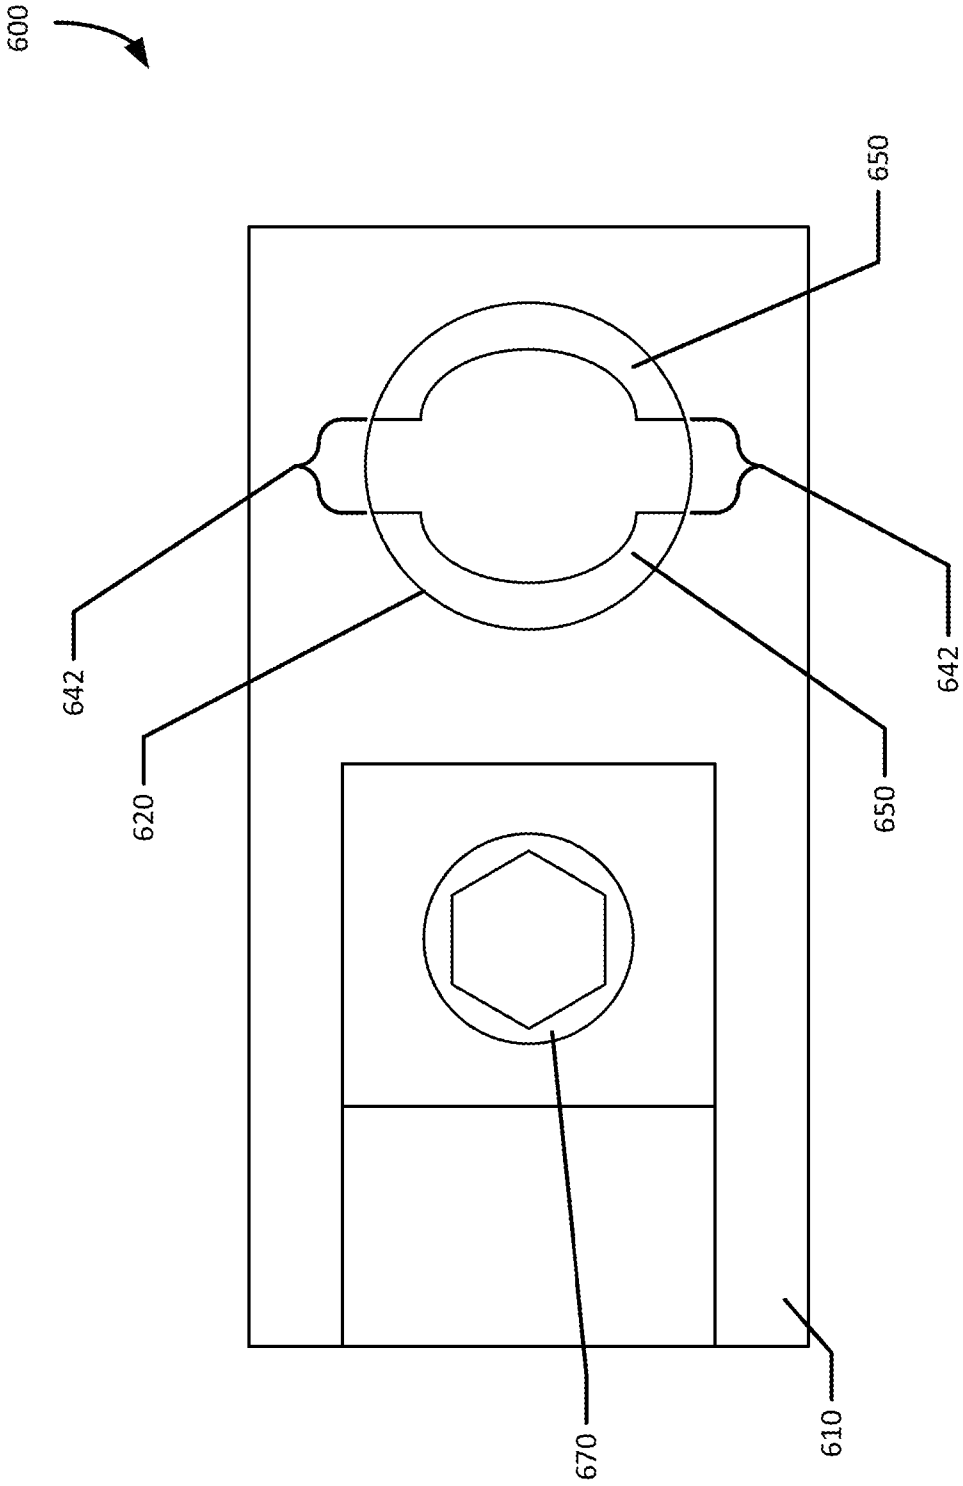


Fig. 5

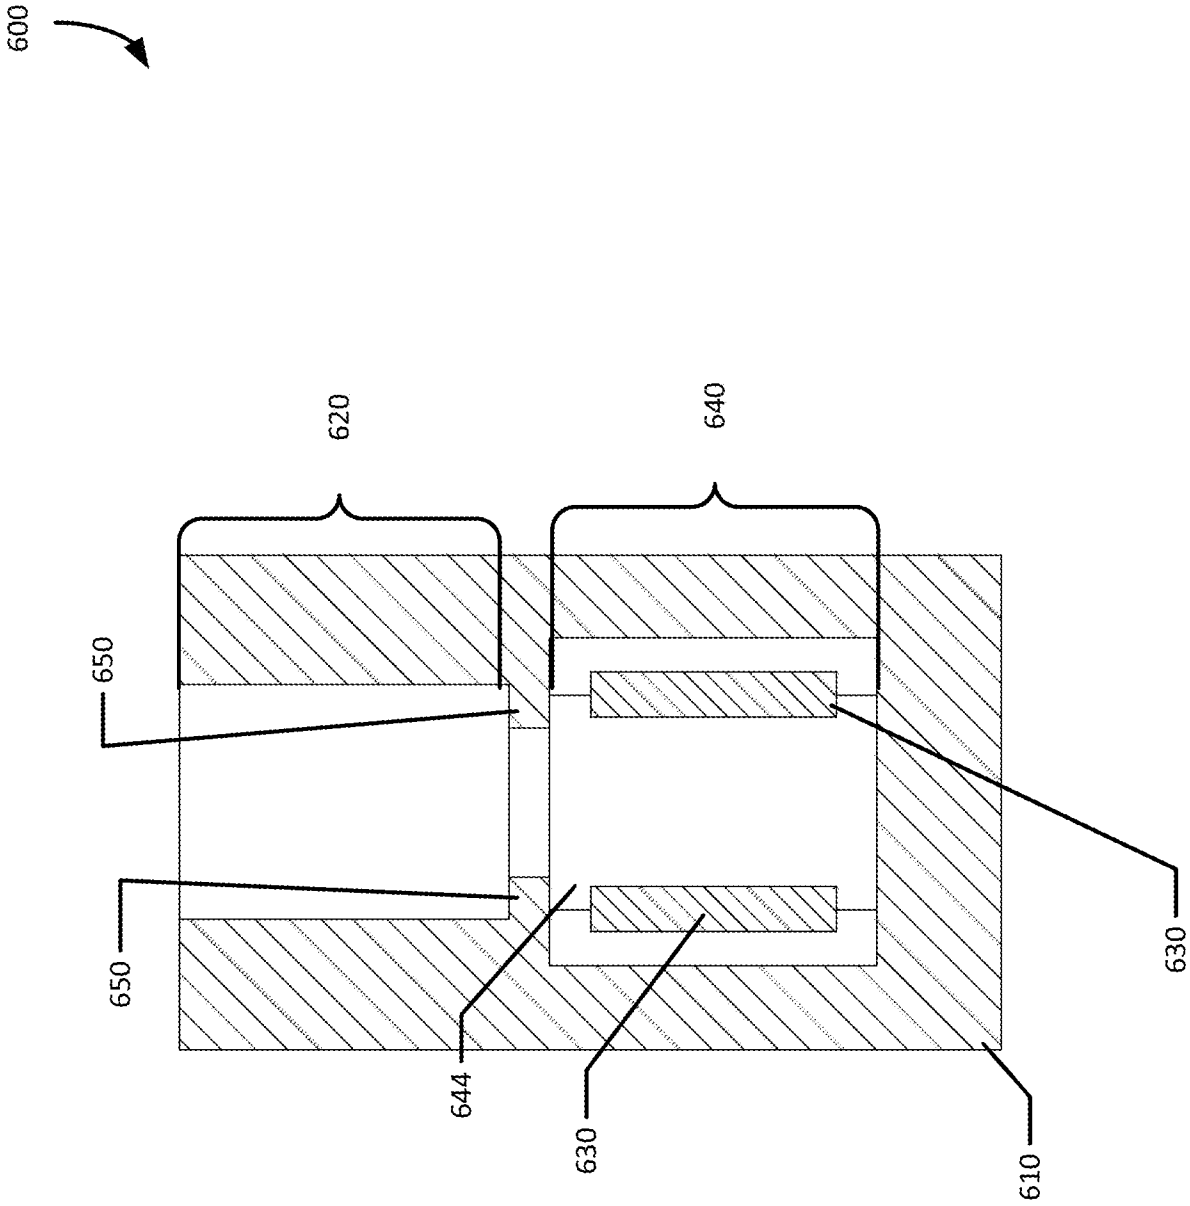


Fig. 6


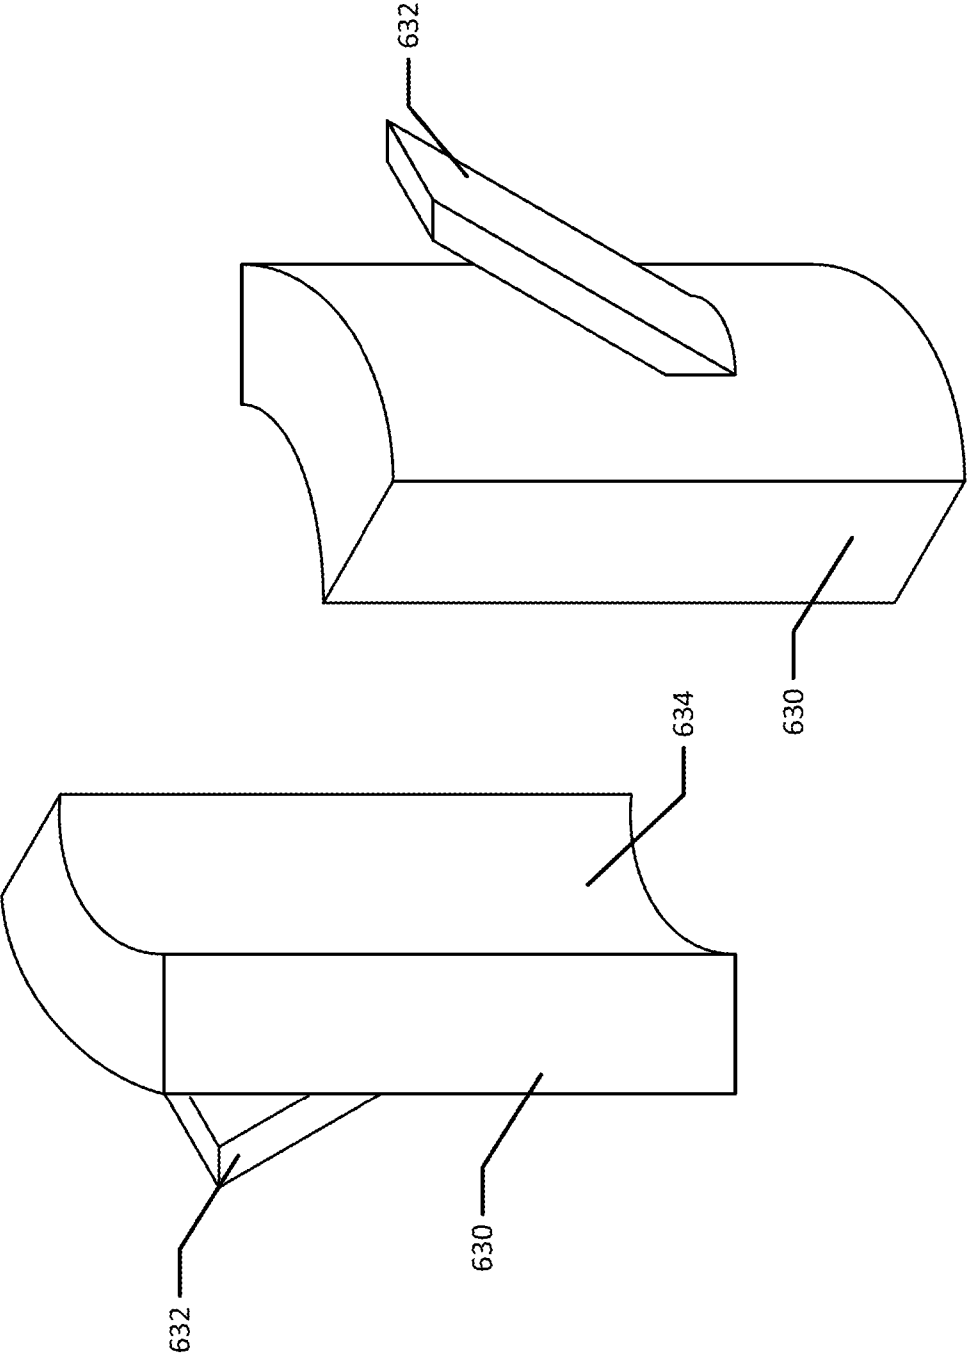


Fig. 7

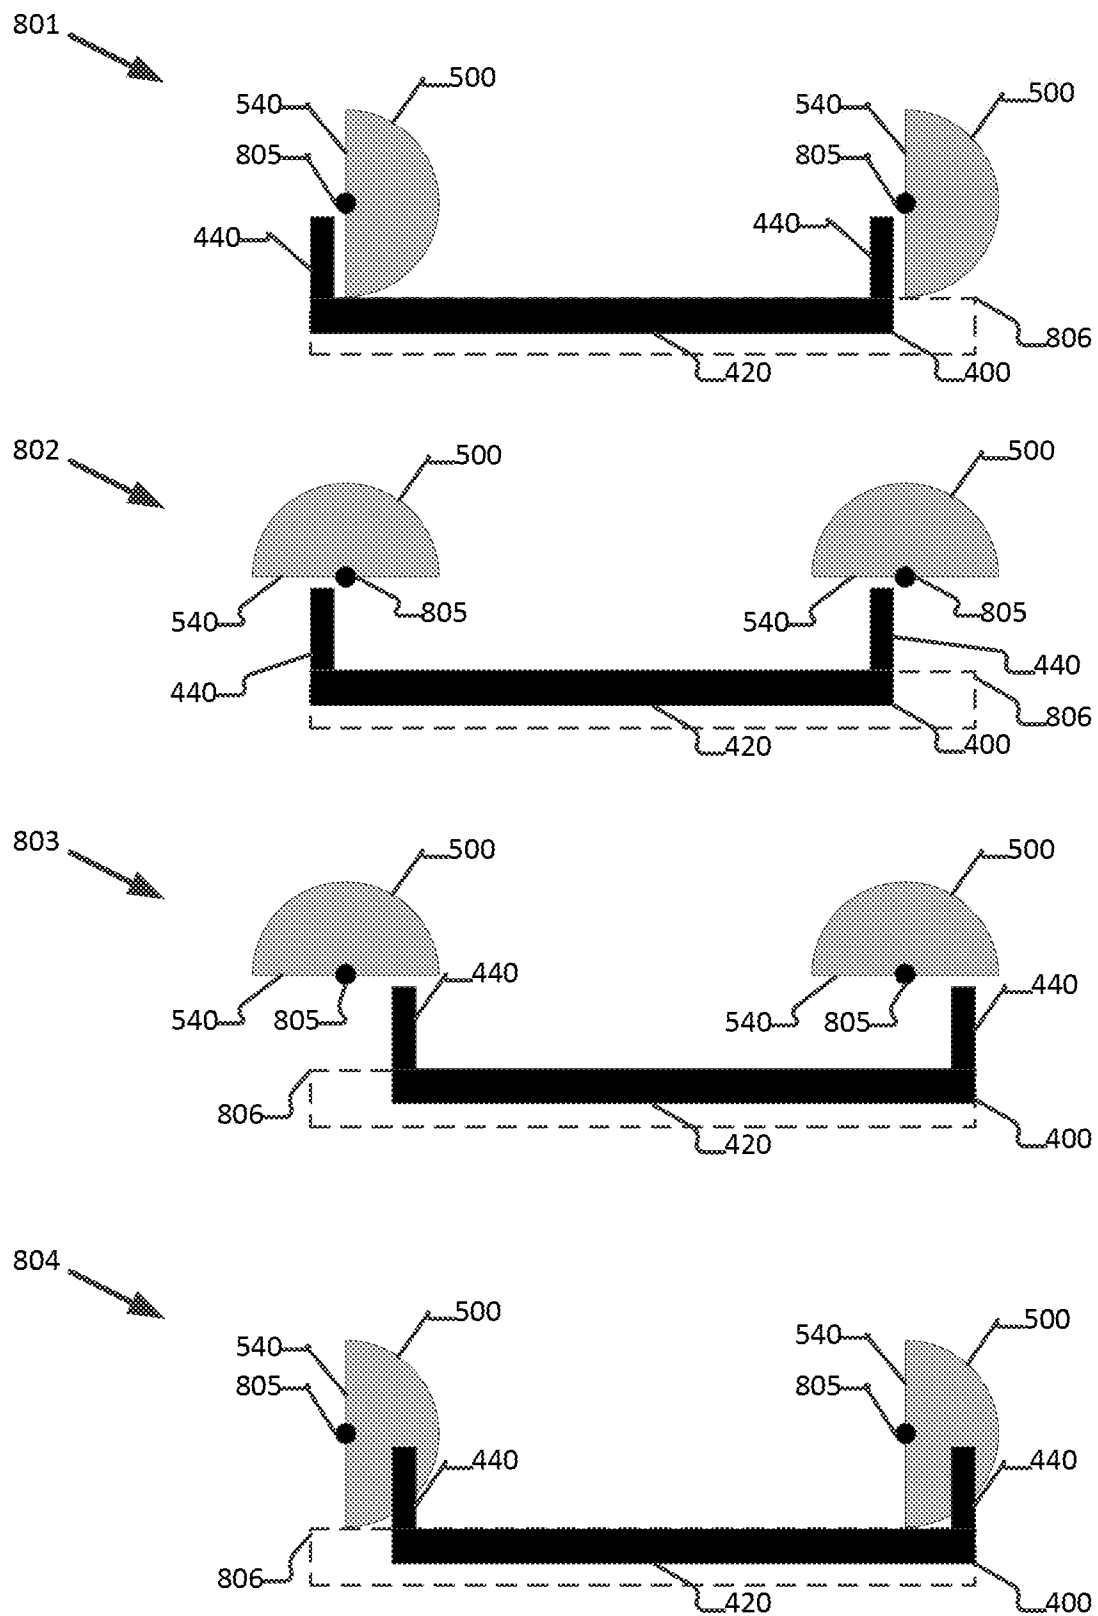

**Fig. 8**

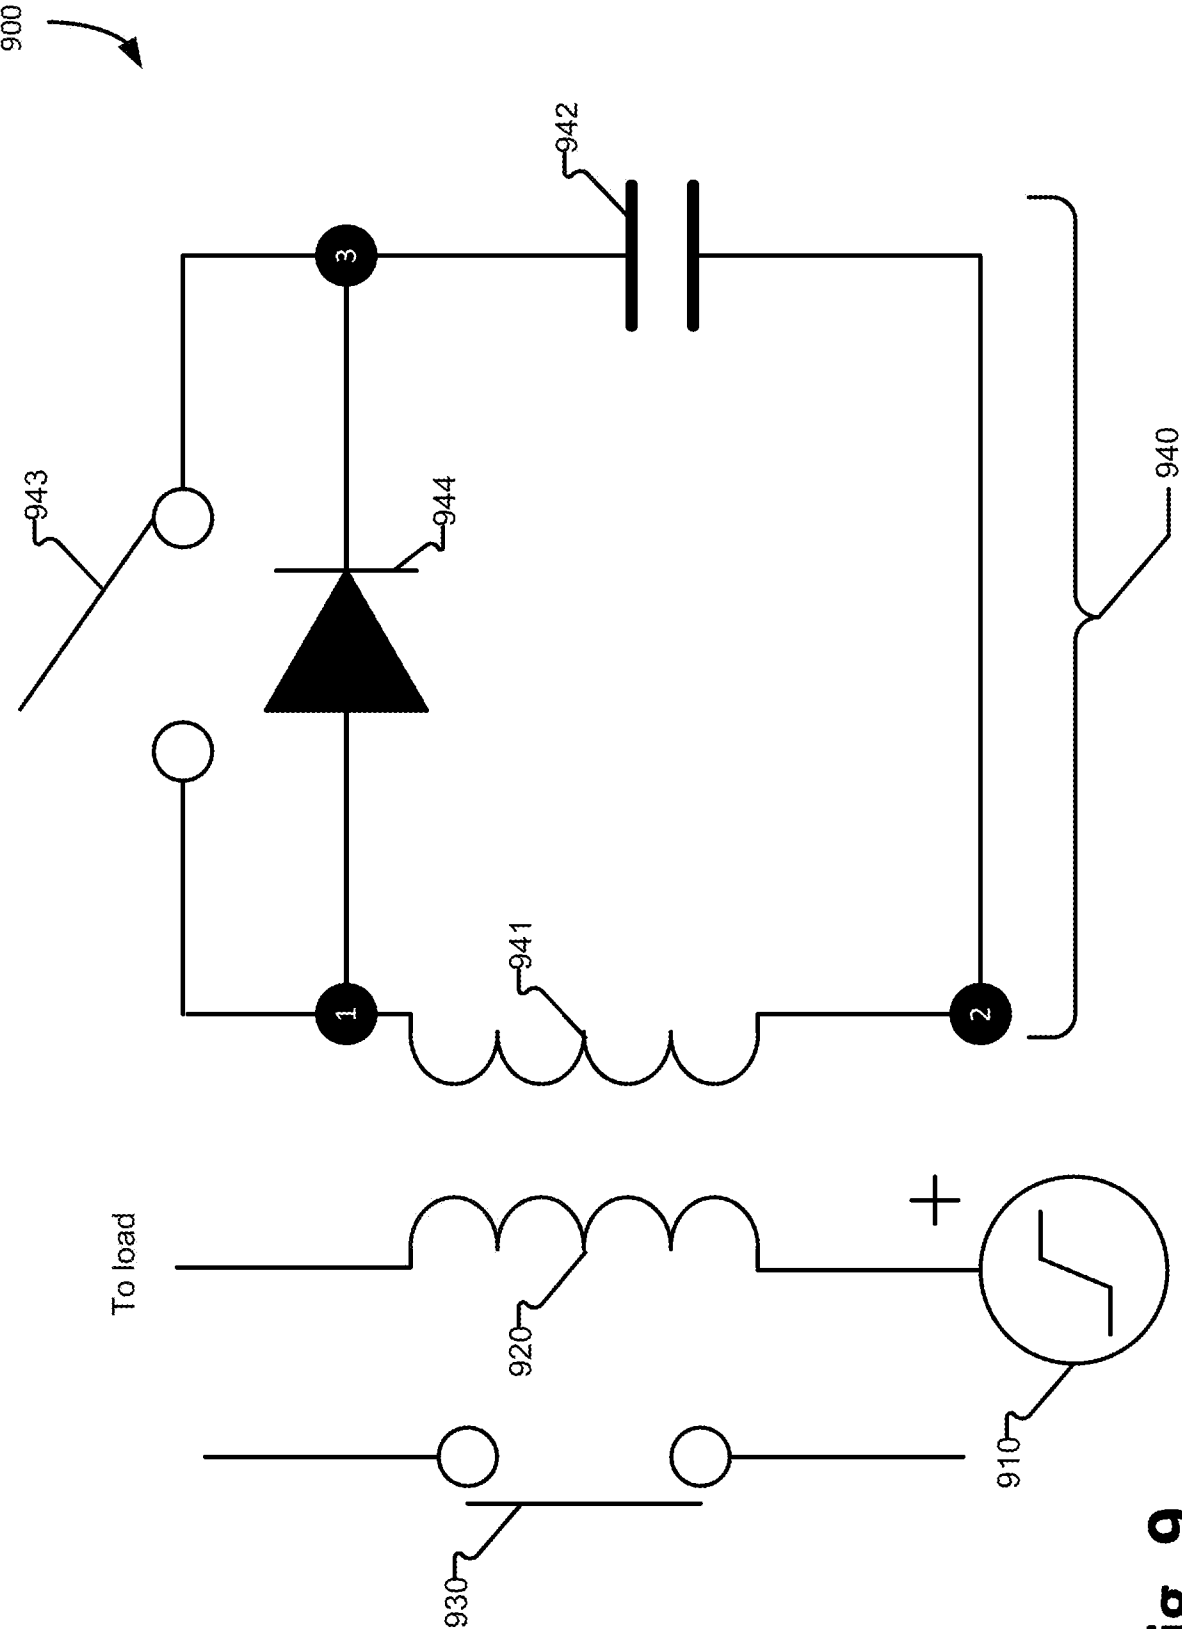
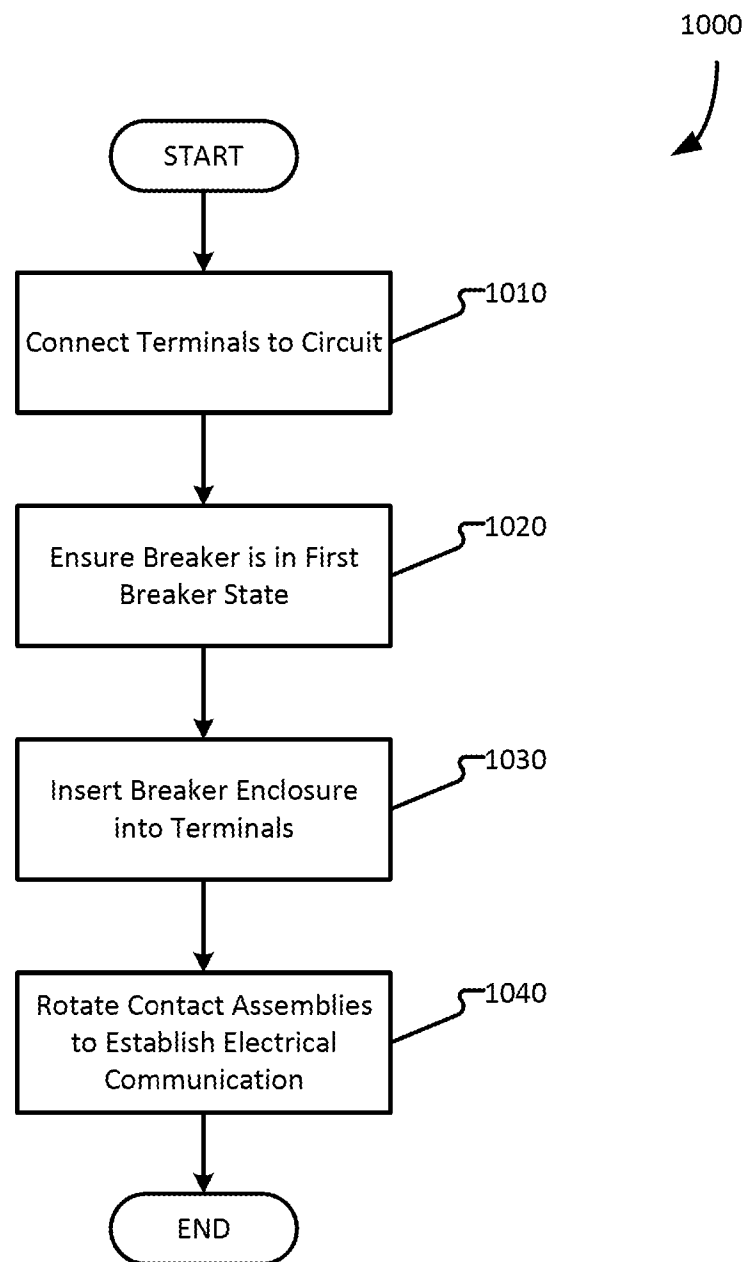


Fig. 9

**Fig. 10**

**A. CLASSIFICATION OF SUBJECT MATTER****H01H 85/25(2006.01)i, H01H 33/46(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**Minimum documentation searched (classification system followed by classification symbols)  
H01H 85/25; H02H 9/08; H01H 9/28; H01H 75/00; H01H 33/66; H01H 73/00; H01H 33/46Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
Korean utility models and applications for utility models  
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
eKOMPASS(KIPO internal) & Keywords: circuit breaker, protection device, toggle interlock, contacts, terminals**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                | Relevant to claim No. |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| A         | US 2007-0121268 A1 (BRUCE R. TERHORST) 31 May 2007<br>See paragraphs [0023]-[0030], claim 1 and figures 1-2.                      | 1-15                  |
| A         | US 2009-0255787 A1 (MAHESH JAYWANT RANE et al.) 15 October 2009<br>See paragraphs [0009], [0019]-[0033], claim 1 and figures 1-5. | 1-15                  |
| A         | US 2011-0102953 A1 (NELSON BONILLA et al.) 05 May 2011<br>See paragraphs [0026]-[0034] and figures 1-5.                           | 1-15                  |
| A         | US 2003-0048160 A1 (CONRAD FRESCO ALFARO et al.) 13 March 2003<br>See paragraphs [0019]-[0033], claims 1-5 and figures 1-5.       | 1-15                  |
| A         | KR 10-2015-0052646 A (LSIS CO., LTD.) 14 May 2015<br>See paragraphs [0041]-[0074] and figures 2-4.                                | 1-15                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

15 December 2017 (15.12.2017)

Date of mailing of the international search report

**15 December 2017 (15.12.2017)**

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea




Facsimile No. +82-42-481-8578

Authorized officer

KIM, Sung Gon

Telephone No. +82-42-481-8746



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2017/049741**

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| US 2007-0121268 A1                        | 31/05/2007          | AU 2006-321352 A1          | 07/06/2007          |
|                                           |                     | AU 2006-321352 B2          | 22/04/2010          |
|                                           |                     | BR PI0620488 A2            | 16/11/2011          |
|                                           |                     | CA 02628813 A1             | 07/06/2007          |
|                                           |                     | CN 101317243 A             | 03/12/2008          |
|                                           |                     | CN 101317243 B             | 15/06/2011          |
|                                           |                     | EP 1955347 A2              | 13/08/2008          |
|                                           |                     | US 7440250 B2              | 21/10/2008          |
|                                           |                     | WO 2007-063394 A2          | 07/06/2007          |
|                                           |                     | WO 2007-063394 A3          | 30/08/2007          |
| US 2009-0255787 A1                        | 15/10/2009          | CN 101562099 A             | 21/10/2009          |
|                                           |                     | CN 101562099 B             | 13/11/2013          |
|                                           |                     | EP 2110839 A2              | 21/10/2009          |
|                                           |                     | EP 2110839 A3              | 11/03/2015          |
|                                           |                     | EP 2110839 B1              | 23/03/2016          |
|                                           |                     | JP 2009-259812 A           | 05/11/2009          |
|                                           |                     | JP 5307601 B2              | 02/10/2013          |
|                                           |                     | KR 10-1084402 B1           | 18/11/2011          |
|                                           |                     | US 7834724 B2              | 16/11/2010          |
| US 2011-0102953 A1                        | 05/05/2011          | CA 02428361 A1             | 09/11/2003          |
|                                           |                     | CA 02466574 A1             | 09/11/2004          |
|                                           |                     | CA 2428361 C               | 28/04/2009          |
|                                           |                     | CA 2466574 C               | 25/10/2011          |
|                                           |                     | US 2004-0004801 A1         | 08/01/2004          |
|                                           |                     | US 2004-0223279 A1         | 11/11/2004          |
|                                           |                     | US 2007-0188949 A1         | 16/08/2007          |
|                                           |                     | US 2009-0262470 A1         | 22/10/2009          |
|                                           |                     | US 7031126 B2              | 18/04/2006          |
|                                           |                     | US 7184250 B2              | 27/02/2007          |
|                                           |                     | US 7538994 B2              | 26/05/2009          |
|                                           |                     | US 7889465 B2              | 15/02/2011          |
|                                           |                     | US 8089738 B2              | 03/01/2012          |
| US 2003-0048160 A1                        | 13/03/2003          | DE 60200633 T2             | 23/06/2005          |
|                                           |                     | EP 1278226 A1              | 22/01/2003          |
|                                           |                     | EP 1278226 A9              | 12/03/2003          |
|                                           |                     | EP 1278226 B1              | 16/06/2004          |
|                                           |                     | US 6707368 B2              | 16/03/2004          |
| KR 10-2015-0052646 A                      | 14/05/2015          | CN 104637746 A             | 20/05/2015          |
|                                           |                     | CN 104637746 B             | 12/04/2017          |
|                                           |                     | EP 2871651 A1              | 13/05/2015          |
|                                           |                     | EP 2871651 B1              | 21/12/2016          |
|                                           |                     | KR 10-1522266 B1           | 21/05/2015          |
|                                           |                     | KR 10-1522267 B1           | 21/05/2015          |
|                                           |                     | US 2015-0123751 A1         | 07/05/2015          |
|                                           |                     | US 9431184 B2              | 30/08/2016          |