



(22) **Date de dépôt/Filing Date:** 2013/09/20

(41) **Mise à la disp. pub./Open to Public Insp.:** 2014/05/30

(45) **Date de délivrance/Issue Date:** 2016/08/30

(30) **Priorité/Priority:** 2012/11/30 (US13/691,309)

(51) **Cl.Int./Int.Cl.** *H01Q 21/08* (2006.01),
H01Q 1/38 (2006.01), *H01Q 13/00* (2006.01)

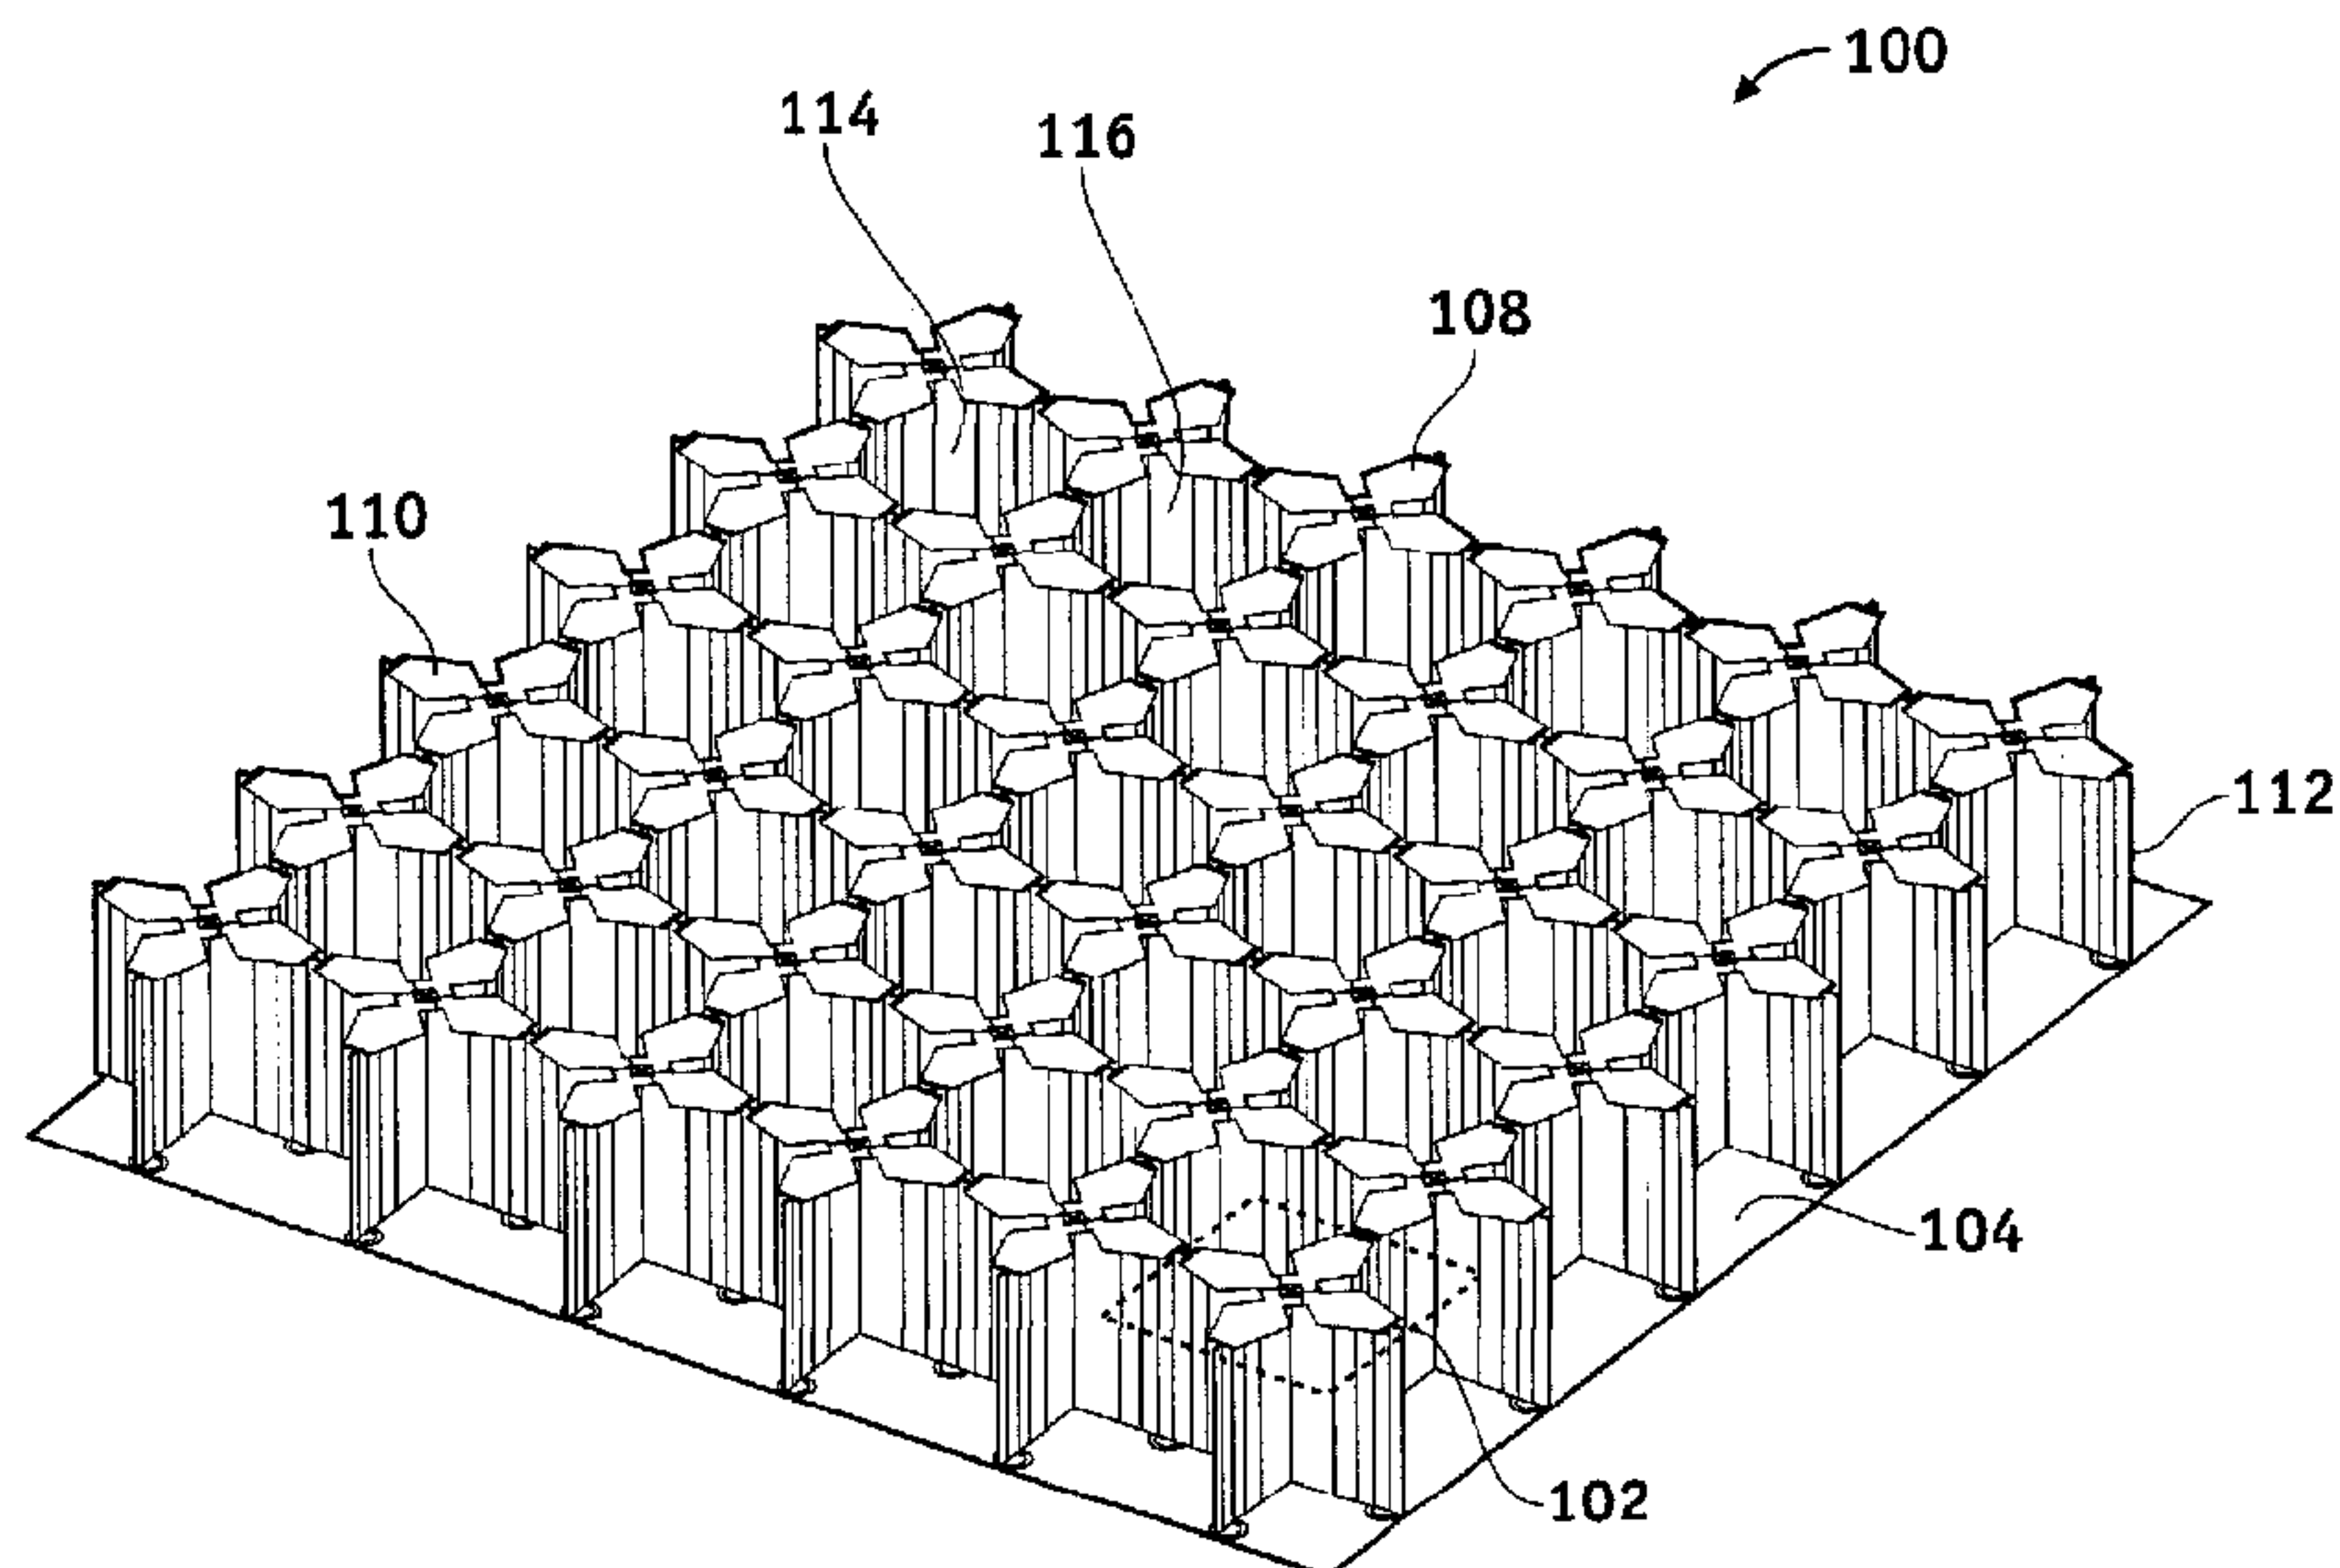
(72) **Inventeurs/Inventors:**
MANRY, CHARLES W., US;
URCIA, MANNY S., US;
BANKS, DAVID L., US

(73) **Propriétaire/Owner:**
THE BOEING COMPANY, US

(74) **Agent:** SMART & BIGGAR

(54) **Titre : OUVERTURES MULTIFONCTIONNELLES STRUCTURELLES LARGE BANDE**

(54) **Title: STRUCTURAL WIDEBAND MULTIFUNCTIONAL APERTURES**



(57) **Abrégé/Abstract:**

A structural wideband multifunctional aperture and methods are presented. A ground plane grounds radio frequency (RF) and direct current (DC) electrical fields. A structural egg crate circuit board comprises a grid of circuit board planes coupled to the ground plane and perpendicular to the ground plane around open boxes. A signal feed-line is coupled to the structural egg crate circuit board and couple-able to a signal transmission line. A driven feed layer parallel to the ground plane is coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane.



ABSTRACT

A structural wideband multifunctional aperture and methods are presented. A ground plane grounds radio frequency (RF) and direct current (DC) electrical fields. A structural egg crate circuit board comprises a grid of circuit board planes coupled to the ground plane and perpendicular to the ground plane around open boxes. A signal feed-line is coupled to the structural egg crate circuit board and couple-able to a signal transmission line. A driven feed layer parallel to the ground plane is coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane.

STRUCTURAL WIDEBAND MULTIFUNCTIONAL APERTURES

BACKGROUND

Embodiments of the present disclosure relate generally to antennas. More particularly, embodiments of the present disclosure relate to antenna structures.

5

Current microwave and millimeter-wave frequency antennas generally comprise cumbersome structures such as waveguides, dish antennas, helical coils, horns, and other large non-conformal structures. Communication applications where at least one communicator is moving and radar applications generally require a steerable beam and/or steerable reception. Phased array antennas are particularly useful for beam steered applications since beam steering can be accomplished electronically without physical motion of the antenna. Such electronic beam steering can be faster and more accurate and reliable than gimbaled/motor-driven mechanical antenna steering.

10

SUMMARY

15 A structural wideband multifunctional aperture and methods are presented. A ground plane grounds radio frequency (RF) and direct current (DC) electrical fields. A structural egg crate circuit board comprises a grid of circuit board planes coupled to the ground plane and perpendicular to the ground plane around open boxes. A set of feed-lines are coupled to the structural egg crate circuit board and comparable to signal transmission lines. A set of shorting-lines are coupled to the structural egg crate circuit board and to the ground plane. Opposite to the ground plane a driven feed layer parallel to the ground plane is coupled to the feed-lines and to a side of the structural egg crate circuit board. The shorting lines are also coupled to the driven feed layer and to a side of the structural egg crate circuit board. An antenna layer adjacent to and co-planar to the feed layer that is coupled to the feed layer.

20

Above the antenna layer is a dielectric cover used to tune the RF performance of structural wideband multifunctional aperture.

5 In this manner, embodiments of the disclosure provide an antenna operable to function as a structure, and comprising elements with wide bandwidth and, for example, better than 50-degree conical scan volume that can be used for creation of conformal arrays and antennas. A design approach provides effective gain that can be, for example, within 2 to 3 dB of an ideal gain possible for a surface area of a unit-cell for the antenna element. The antenna element design can be used as a wide-band antenna and/or array. Embodiments of the disclosure can be used in multifunction and/or shared antenna configuration for communications, electronic warfare, and signal intelligence applications and multiple combinations of multiple applications. Embodiments of the disclosure provide wide-bandwidth coverage, and provide polarization diversity to allow transmission and reception of signals with arbitrary polarization that may comprise, but not exclusive to linear, circular, and slant polarized signals. Embodiments of the disclosure can be scaled to a frequency band with a matching bandwidth ratio (e.g., 5:1) from a highest to a lowest frequency of desired coverage.

20 The antenna integration into structure may provide a significant advancement of aperture technologies over traditional apertures as traditional apertures are rigid / non-load bearing members and they are not allowed to flex. This limits the size and locations of apertures onto aircraft. Integrating the aperture into the structure allows: 1) a larger size aperture as the aperture is the structure of the aircraft, 2) for more flexibility of the location of the aperture on the platform, and 3) the aperture to be installed in small and medium UAV's adding to their mission capabilities.

25 In one embodiment there is provided a structural wideband multifunctional aperture including a ground plane operable to ground radio frequency (RF) and direct current (DC) electrical fields, a structural egg crate circuit board including a grid of circuit board planes coupled to the ground plane. The structural egg crate circuit board is configured substantially perpendicular to the ground plane around a plurality of open boxes and is operable to support a structural load. The structural wideband multifunctional aperture also includes a signal feed-line and a driven feed layer. 30 The signal feed-line is coupled to the structural egg crate circuit board, is operable to couple to a signal transmission line and is configured perpendicular to the ground plane. The driven feed layer

is configured substantially parallel to the ground plane, is coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane, and is configured in a unit cell for an electronically steerable array.

5 In another embodiment there is provided a method for forming a structural wideband multifunctional aperture involving coupling a structural egg crate circuit board including a grid of circuit board planes to a ground plane and configuring the structural egg crate circuit board substantially perpendicular to the ground plane around a plurality of open boxes, and to support a structural load. The method further involves coupling a signal feed-line to the structural egg crate
10 circuit board. The signal feed-line is operable to couple to a signal transmission line and is configured perpendicular to the ground plane. The method further involves configuring a driven feed layer substantially parallel to the ground plane and in a unit cell for an electronically steerable array, and coupling the driven feed layer to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane.

15 In another embodiment there is provided a method for operating a structural wideband multifunctional aperture involving electromagnetically coupling a signal feed-line to a signal transmission line. The signal feed-line is coupled to a structural egg crate circuit board including a grid of circuit board planes coupled to a ground plane. The structural egg crate circuit board is
20 configured substantially perpendicular to the ground plane around a plurality of open boxes and is operable to support a structural load. The method further involves electromagnetically coupling a driven feed layer to the signal feed-line. The driven feed layer is configured substantially parallel to the ground plane, is coupled to the signal feed-line and a side of the structural egg crate circuit board opposite to the ground plane, and is configured in a unit cell for an electronically steerable unit.

25 In another embodiment there is a structural wideband multifunctional aperture including a ground plane operable to ground radio frequency (RF) and direct current (DC) electrical fields and a structural egg crate circuit board including a grid of circuit board planes coupled to the ground plane. The structural egg crate circuit board is configured substantially perpendicular to the ground
30 plane around a plurality of open boxes and is operable to support a structural load. The structural wideband multifunctional aperture further includes a signal feed-line coupled to the structural egg crate circuit board. The signal feed-line is operable to couple to a signal transmission line, and is

configured perpendicular to the ground plane. The structural wideband multifunctional aperture further includes a driven feed layer configured substantially parallel to the ground plane and coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane. The structural wideband multifunctional aperture is configured as a dual-polarized dipole antenna structure.

In another embodiment there is provided a structural wideband multifunctional aperture including a ground plane operable to ground radio frequency (RF) and direct current (DC) electrical fields and a structural egg crate circuit board including a grid of circuit board planes coupled to the ground plane. The structural egg crate circuit is configured substantially perpendicular to the ground plane around a plurality of open boxes, and is operable to support a structural load. The structural wideband multifunctional aperture further includes a signal feed-line coupled to the structural egg crate circuit board. The signal feed-line is operable to couple to a signal transmission line, and is configured perpendicular to the ground plane. The structural wideband multifunctional aperture further includes a driven feed layer configured substantially parallel to the ground plane and coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane. The structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least 5:1 of high frequency to low frequency.

In another embodiment there is provided a method for forming a structural wideband multifunctional aperture involving coupling a structural egg crate circuit board to a ground plane and configuring the structural egg crate circuit board substantially perpendicular to the ground plane around a plurality of open boxes, and to support a structural load. The method further involves coupling a signal feed-line to the structural egg crate circuit board. The signal feed-line is operable to couple to a signal transmission line, and is configured perpendicular to the ground plane. The method further involves configuring a driven feed layer substantially parallel to the ground plane, and coupling the driven feed layer to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane. The structural wideband multifunctional aperture is configured as a dual-polarized dipole antenna structure.

In another embodiment there is provided a method for forming a structural wideband multifunctional aperture involving coupling a structural egg crate circuit board including a grid of

circuit board planes to a ground plane and configuring the structural egg crate circuit board substantially perpendicular to the ground plane around a plurality of open boxes, and to support a structural load. The method further involves coupling a signal feed-line to the structural egg crate circuit board. The signal feed-line is operable to couple to a signal transmission line, and is
5 configured perpendicular to the ground plane. The method further involves configuring a driven feed layer substantially parallel to the ground plane, and coupling the driven feed layer to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane. The structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least 5:1 of high frequency to low frequency.

10

In another embodiment there is provided a method for operating a structural wideband multifunctional aperture involving electromagnetically coupling a signal feed-line to a signal transmission line. The signal feed-line is configured perpendicular to the ground plane and is coupled to a structural egg crate circuit board including a grid of circuit board planes coupled to a
15 ground plane. The structural egg crate circuit board is configured substantially perpendicular to the ground plane around a plurality of open boxes and is operable to support a structural load. The method further involves electromagnetically coupling a driven feed layer to the signal feed-line. The driven feed layer is configured substantially parallel to the ground plane and is coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane. The
20 structural wideband multifunctional aperture is configured as a dual-polarized dipole antenna structure.

In another embodiment there is provided a method for operating a structural wideband multifunctional aperture involving electromagnetically coupling a signal feed-line to a signal
25 transmission line. The signal feed-line is configured perpendicular to the ground plane and is coupled to a structural egg crate circuit board including a grid of circuit board planes coupled to a ground plane. The structural egg crate circuit board is configured substantially perpendicular to the ground plane around a plurality of open boxes and is operable to support a structural load. The method further involves electromagnetically coupling a driven feed layer to the signal feed-line. The
30 driven feed layer is configured substantially parallel to the ground plane and is coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane. The

structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least **5:1** of high frequency to low frequency.

5 This summary is provided to introduce a selection of concepts in a simplified form that are further described below in the detailed description. This summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter.

BRIEF DESCRIPTION OF DRAWINGS

10 A more complete understanding of embodiments of the present disclosure may be derived by referring to the detailed description and claims when considered in conjunction with the following figures, wherein like reference numbers refer to similar elements throughout the figures. The figures are provided to facilitate understanding of the disclosure without limiting the breadth, scope, scale, or applicability of the disclosure. The drawings are not necessarily made to scale.

15 Figure 1 is an illustration of an exemplary structural wideband multifunctional aperture comprising **6x6** unit cells in an egg crate configuration according to an embodiment of the disclosure.

20 Figure 2 is an illustration of the structural wideband multifunctional aperture of Figure 1 with a dielectric cover removed.

Figure 3 is an illustration of an expanded view of the structural wideband multifunctional aperture of Figure 2.

Figure 4 is an illustration of an exemplary unit cell according to an embodiment of the disclosure.

Figure 5 is an illustration of an exemplary cross section of a unit cell in relation to a unit cell according to an embodiment of the disclosure.

Figure 6 is an illustration of an expanded view of a cross section of the antenna layer, combined antenna/feed layer, and the feed layer of Figure 5 according to an embodiment of the disclosure.

Figure 7 is an illustration of an exemplary antenna assembly comprising feed layer and antenna layer elements according to an embodiment of the disclosure.

Figure 8 is an illustration of exemplary feed layer element dimensions and antenna layer element dimensions according to an embodiment of the disclosure.

Figure 9 is an illustration of an exemplary process for forming a structural wideband multifunctional aperture according to an embodiment of the disclosure.

Figure 10 is an illustration of an exemplary process for operating a structural wideband multifunctional aperture according to an embodiment of the disclosure.

Figure 11 is an illustration of an exemplary structural wideband multifunctional aperture comprising a sandwich panel configuration according to an embodiment of the disclosure.

Figure 12 is an illustration of an expanded view of the sandwich panel configuration of Figure 11.

DETAILED DESCRIPTION

5 The following detailed description is exemplary in nature and is not intended to limit the disclosure or the application and uses of the embodiments of the disclosure. Descriptions of specific devices, techniques, and applications are provided only as examples. Modifications to the examples described herein will be readily apparent to those of ordinary skill in the art, and the general principles defined herein may be applied to other examples
10 and applications without departing from the spirit and scope of the disclosure. The present disclosure should be accorded scope consistent with the claims, and not limited to the examples described and shown herein.

Embodiments of the disclosure may be described herein in terms of functional and/or
15 logical block components and various processing steps. It should be appreciated that such block components may be realized by any number of hardware, software, and/or firmware components configured to perform the specified functions. For the sake of brevity, conventional techniques and components related to antenna design, antenna manufacturing, and other functional aspects of systems described herein (and the individual operating
20 components of the systems) may not be described in detail herein. In addition, those skilled in the art will appreciate that embodiments of the present disclosure may be practiced in conjunction with a variety of hardware and software, and that the embodiments described herein are merely example embodiments of the disclosure.

Embodiments of the disclosure are described herein in the context of a non-limiting application, namely, a planar or conformal phased array antenna. Embodiments of the disclosure, however, are not limited to such planar or conformal phased array antenna applications, and the techniques described herein may also be utilized in other applications.

5 For example but without limitation, embodiments may be applicable to manned and unmanned aircraft antennas, sensor antennas, radar antennas, non-conformal antennas, non-planar antennas, and other antenna and phased array applications.

As would be apparent to one of ordinary skill in the art after reading this description,
10 the following are examples and embodiments of the disclosure and are not limited to operating in accordance with these examples. Other embodiments may be utilized and structural changes may be made without departing from the scope of the exemplary embodiments of the present disclosure.

15 A compact array element with wide bandwidth coverage, wide field of view better than 55 degrees from normal to an antenna face, and polarization diversity is not a capability of current designs. Co-planar broadband-antennas based on Vivaldi type (e.g., a dielectric plate metalized on both sides) antenna elements cannot scan beyond 45 degrees while maintaining their bandwidth, spiral antennas are too large or deep for practical usage, a
20 current sheet antenna based on wire dipoles has demonstrated 9:1 bandwidth coverage but requires the use of feed posts and external RF hybrids. Connected arrays over a ground plane have low efficiency. Spiral based elements do not provide polarization diversity. Other wide band planar elements based on similar concepts require the use of machined feed posts and 180-degree hybrids.

25

Embodiments of the disclosure provide an antenna element that can be used in creation of wide-band arrays and/or conformal antennas. The wide-band arrays and/or conformal antennas can achieve wide bandwidth (e.g., 5:1 ratio), can have an ability to achieve wide scan angles, and can provide both dual and separable RF polarization capability. The antennas have a wide applicability to communication utilizing phased antenna arrays, signal intelligence sensors and detection sensor arrays, wide band radar systems, and phased arrays used in electronics warfare. The antenna element can be used as a shared and/or multifunction RF antenna system. The antenna element can achieve, for example, 5:1 or better bandwidth in both voltage standing wave ratio (VSWR) and gain.

10

Figure 1 is an illustration of an exemplary structural wideband multifunctional aperture **100** comprising an array of unit cells in an egg crate configuration according to an embodiment of the disclosure. The structural wideband multifunctional aperture **100** comprises a plurality of unit cells **102** coupled to a ground plane **104** and covered by a dielectric cover **106**. The unit cells **102** comprise bow-tie antenna elements **108/110** coupled to a structural egg crate circuit board **112**. In an alternate embodiment, the exemplary structural wideband multifunctional aperture **100** and unit cell **102** may be comprised of only one set of antenna elements (**108** or **110**) to form a single polarized aperture.

20

The dielectric cover **106** may comprise, for example but without limitation, a single layer comprising low electromagnetic loss material, a plurality of layers comprising differing low electromagnetic loss materials, or other configuration.

25

The structural egg crate circuit board **112** comprises a grid of circuit board planes coupled to the ground plane **104** and is configured perpendicular to the ground plane **104** around a plurality of open boxes **114/116**. The structural egg crate circuit board **112** may

comprise a low dielectric quartz fabric, which is compatible with high temperature and provides high strength structural integrity. Such quartz fabrics may comprise, for example but without limitation, 99.95% SiO₂ quartz crystals providing low dielectric loss properties. AstroquartzTM is such a quartz fabric providing low dielectric, near zero coefficient of thermal expansion, high temperature performance and structural mechanical properties in composites.

The open boxes 114/116 may be filled with a low dielectric material comprising, for example but without limitation, a low dielectric foam, an aerogel, a SEAgel, or other low dielectric constant material. The structural wideband multifunctional aperture 100 can function as a structural sandwich panel as a load-bearing member. For example, the structural wideband multifunctional aperture 100 may comprise an aircraft skin. The structural wideband multifunctional aperture 100 is not limited for integration into an aircraft skin, and skin of other vehicles such as, but without limitation, manned and unmanned ground vehicles, spacecraft, submarines, or other vehicles, may also be used to conform the structural wideband multifunctional aperture 100 thereto.

The structural wideband multifunctional aperture 100 may be configured as a sandwich panel 100 such as a sandwich panel 1100 (Figures 11, 12) comprising the structural egg crate circuit board 112 sandwiched between the dielectric cover 106 and/or additional facing sheets (1104, Figures 11, 12) and the ground plane 104 and/or additional backing sheets (1102, Figures 11, 12). The bow-tie antenna elements 108/110, signal feed-lines 312 (Figure 3), grounded shorting-lines 314 (Figure 3), and grounded shorting-lines 316 (Figure 3) are to be configured in the sandwich panel 100/1100. The dielectric cover 106 incorporates bow-tie antenna elements 108/110, and the structural egg crate circuit board

112 incorporates the signal feed-lines 312, the grounded shorting-lines 314, and the grounded shorting-lines 316.

The structural wideband multifunctional aperture 100 (sandwich panel 100) may be
5 integrated into a structure of a vehicle such as an aircraft. For example, the structural wideband multifunctional aperture 100 may be integrated into an outer composite skin of the aircraft. Furthermore, electronics can be attached to a backside behind the ground plane 104. The structural wideband multifunctional aperture 100 is configured to function under a structural loading of the aircraft. Furthermore, the bow-tie antenna elements 108/110, the
10 signal feed-lines 312, the grounded shorting-lines 314, the grounded shorting-lines 316, and other interconnects, connections, and electronics are configured to function under a structural loading of the aircraft.

Figure 2 is an illustration of the structural wideband multifunctional aperture 100 of
15 Figure 1 with the dielectric cover 106 removed. The structural wideband multifunctional aperture 100 may target, for example, a lower frequency wideband element. The bow-tie antenna elements 108/110 allow for an egg-crate configuration such as the structural egg crate circuit board 112 that enables an array of the structural wideband multifunctional aperture 100 to be designed and built to carry structural loads. The structural wideband
20 multifunctional aperture 100 allows for a wide band array that is thin and light as well. There is more flexibility with a location of the structural wideband multifunctional aperture 100 on a platform such as an aircraft and a size of the structural wideband multifunctional aperture 100 has a potential to be as large as the structure is the aircraft. The ability of the structural wideband multifunctional aperture 100 to carry structural loads while providing
25 wide bandwidth allows the aperture to be installed in small and medium UAV's adding to their mission capabilities they would otherwise not have.

Figure 3 is an illustration of an expanded view of the structural wideband multifunctional aperture 100 of Figure 2. A first bow-tie antenna element 302/304 comprises a driven bow-tie arm 302 and a ground shorted bow-tie arm 304. The driven bow-tie arm 302 and the grounded bow-tie arm 304 may function as dipole antennas. A second bow-tie antenna element 306/308 comprises a driven bow-tie arm antenna element 306 and a grounded bow-tie arm antenna element 308. The first bow-tie antenna element 302/304 and the second bow-tie antenna element 306/308 may overlap at an overlap region 310. The overlap region 310 may provide capacitive coupling between the first bow-tie antenna element 302/304 and the second bow-tie antenna element 306/308.

Referring for this paragraph to Figures 3-7, the first bow-tie antenna element 302/304 and the second bow-tie antenna element 306/308 are driven by signal feed-line 312 and grounded shorting-lines 314 and 316 coupled to the structural egg crate circuit board 112. For example, a driven bow-tie antenna arm 302 in an antenna layer 504 (Figure 5, 6, 7) is electromagnetically coupled to (and may be driven by) a bow-tie antenna feed layer element 722 (Figure 3, 7) in a combined antenna/feed layer 505 (Figure 5, 6, 7) coupled to a drive/feed-line 312 coupled to a signal transmission line 402 (Figure 4). The bow-tie antenna feed layer element 722 may be further coupled to a grounded shorting-line 314 coupled to the ground plane 104 grounding the bow-tie antenna feed layer element 722. A ground shorted bow-tie antenna arm 304 in antenna layer 504 is electromagnetically coupled to a bow-tie antenna feed layer element 718 (Figure 3, 7) in the combined antenna/feed layer 505 (Figure 5, 6, 7). The bow-tie antenna feed layer element 718 is coupled to a grounded shorting-line 316 coupled to the ground plane 104 grounding the bow-tie antenna feed layer element 718. Similarly, a driven bow-tie arm antenna element 306 in the combined antenna/feed layer 505 is electromagnetically coupled to (and may be driven by) a bow-tie

antenna feed layer element **720** (Figure 7) in a feed layer **506** (Figure 5, 6, 7). Also, a ground shorted bow-tie antenna arm **308** in the combined antenna/feed layer **505** is electromagnetically coupled to a bow-tie antenna feed layer element **716** (Figure 7) in the feed layer **506**.

5

The terms antenna layer, antenna layer element, bow-tie antenna element, bow-tie antenna arm, bow-tie arm antenna element, and the like may be used interchangeably in this document. Also, the terms feed layer, feed layer element, bow-tie feed layer element, bow-tie feed layer arm, bow-tie arm feed layer element, and the like may be used interchangeably
10 in this document.

The structural wideband multifunctional aperture **100** comprises the bow-tie antenna elements **108/110** in an egg-crate configuration comprising capacitive bow-tie or dipole-like feeds either underneath a set of capacitively linked bow-tie or dipole-like arms such as the
15 driven bow-tie arm **302**. The feed layer **506** and the driven bow-tie arm **318** can be interchanged to create different configurations. Two elements on the feed layer **506** are connected to an RF source or receiver via the feed-line **312** that can be directly connected to an RF connector to provide, for example, about **3:1** or better bandwidth. The feed-line **312** can also be connected by capacitive coupling to a Z-transformer stripline to provide wider
20 bandwidth by adding two additional layers below the structural wideband multifunctional aperture **100**. The addition of the Z-transformer stripline provides an ability to achieve, for example, about **5:1** or better bandwidth. Shorting traces such as the grounded shorting-lines **314** and **316** are added in tune the overall structural wideband multifunctional aperture **100** to avoid in-band resonances causing nulls in RF performance.

25

Figure 4 is an illustration of an exemplary unit cell **400** (e.g., unit cell **102** of the structural wideband multifunctional aperture **100** in Figure 1) according to an embodiment of the disclosure. The unit cell **400** comprises a dimension D_x in an X direction and a dimension D_y in a Y direction. The unit cell **400** may be symmetric, wherein the dimension D_x and the dimension D_y equal a same length D comprising, for example but without limitation, about **24.5** mm, or other suitable length. In other embodiments, the dimension D_x and the dimension D_y may comprise dissimilar values. The bow-tie antenna elements **108** of the structural wideband multifunctional aperture **100** may comprise the first bow-tie antenna element **302/304**, and the bow-tie antenna elements **110** of the structural wideband multifunctional aperture **100** may comprise the second bow-tie antenna element **306/308**.

The structural wideband multifunctional aperture **100** comprises the bow-tie antenna elements **108/110** with wide bandwidth and better than, for example, about **50**-degree conical scan volume that can be used for creation of conformal arrays and antennas. The structural wideband multifunctional aperture **100** provides effective gain within, for example, about **2** to **3** dB of an ideal gain possible for a surface area of a unit-cell for an antenna element. The structural wideband multifunctional aperture **100** can be used as a wide-band antenna and/or array. The structural wideband multifunctional aperture **100** can be used in multifunction and/or shared antenna configuration for communications, electronic warfare, and signal intelligence applications and multiple combinations of multiple applications. The structural wideband multifunctional aperture **100** not only provides wide-bandwidth coverage it also provides polarization diversity to allow the transmission and reception of signals with any arbitrary polarization that comprises, for example but without limitation linear, circular, slant polarized signals, and other polarization signal. The structural wideband multifunctional aperture **100** can be scaled to any frequency band with a matching bandwidth ratio (e.g. about, **5:1**) from the highest to the lowest frequency of a desired coverage.

Figure 5 is an illustration of an exemplary cross section 500 of the unit cell 400 in Figure 4 according to an embodiment of the disclosure. As shown in the cross section 500, a depth t1 of the dielectric cover 106 may comprise, for example but without limitation, about 10 mm, or other suitable thickness. A height t3 of the structural egg crate circuit board 112 may comprise, for example but without limitation, about 14 mm, or other suitable height. A thickness of t2 between the antenna layer 504, and the combined antenna/feed layer 505, and also between the combined antenna/feed layer 505 and the feed layer 506, may comprise, for example but without limitation, about 0.13 mm (5 mils), or other suitable thickness. The circuit board materials used to form the layers 504, 505 and layer 506 may comprise, for example but without limitation, Rogers 6002TM or other circuit board materials. A width Rf of the drive-line 312, a width Rs of the grounded shorting-line 314, and a width Rf of the grounded shorting-line 314 may comprise, for example but without limitation, about 1 mm each, or other suitable width.

A spacing S between the drive feed-line 312 and the grounded shorting-line 314 may comprise, for example but without limitation, about 4.1 mm, or other suitable spacing. A risk radius Cr and a gap g of the signal transmission line 402 may comprise, for example but without limitation, about 1.3 mm and 0.5mm respectively, or other suitable radius and gap. A distance D-O between the drive feed-line 312 and the grounded shorting-line 316 may comprise, for example but without limitation, about 10 mm, or other suitable distance.

Integration of the structural wideband multifunctional aperture 100 into a structure provides a significant advancement of aperture technologies over traditional apertures as traditional apertures are rigid / non-load bearing members and they are not allowed to flex. This limits the size and locations of traditional apertures onto a vehicle such as an aircraft.

Integrating the structural wideband multifunctional aperture **100** into a structure such as an aircraft structure: allows **1)** a larger size aperture as the aperture comprise the structure of the aircraft, **2)** for more flexibility of the location of the aperture on the aircraft structure, and **3)** the aperture to be installed in small and medium UAV's adding to their mission capabilities.

5

Figure **6** is an illustration of an expanded view of a cross section of the antenna layer **504**, the combined antenna/feed layer **505**, and the feed layer **506** of Figure **5** according to an embodiment of the disclosure. The antenna layer **504** may comprise an antenna element **602** such as the driven bow-tie arm **302** and the grounded bow-tie arm **304**. The combined antenna/feed layer **505** may comprise an antenna element **614** such as the driven bow-tie arm antenna element **306** and the grounded bow-tie arm **308**, and/or a feed element **616** such as the bow-tie antenna feed layer elements **718** and **722** (Figures **3**, **7**). The feed layer **506** may comprise a feed element **604** such as the bow-tie antenna feed layer elements **716** and **720** (Figure **3**, **7**).

15

The antenna element **602** of the antenna layer **504** is electromagnetically coupled to the feed element **616** of the combined antenna/feed layer **505**. The antenna element **614** of the combined antenna/feed layer **505** is electromagnetically coupled to the feed element **604** of the feed layer **506**. The feed elements **604** and **616** are coupled to the feed-line **312**, the grounded shorting-line **314** and/or the grounded shorting-line **316** coupled to the structural egg crate circuit board **112** (Figure **1**). The feed-line **312**, the grounded shorting-line **314** and the grounded shorting-line **316** may each comprise a first side lead **610** coupled to a first side of the structural egg crate circuit board **112**, a second side lead **612** coupled to a second side of the structural egg crate circuit board **112**, or both the first side lead **610** and the second side lead **612** coupled to the structural egg crate circuit board **112**.

25

The first side lead **610** and the second side lead **612** are coupled to the structural egg crate circuit board **112** by a first joint **606** and a second joint **608** respectively. The first joint **606** and the second joint **608** may comprise, for example but without limitation, a weld, a diffusion bond, a solder, or suitable other coupling. A width A_t of the structural egg crate circuit board **112** and also a spacing A_t between the first side lead **610** and the second side lead **612** may comprise, for example but without limitation, about **0.1 mm**, or other suitable width or spacing.

Figure **7** is an illustration of an exemplary antenna assembly **700** comprising feed layer and antenna layer elements according to an embodiment of the disclosure. An antenna assembly **702** may comprise an antenna layer such as the antenna layer **504** comprising the antenna elements **302**, **304**, **306** and **308** overlaying the feed layer elements **722**, **718**, **720** and **716** respectively. A bow-tie antenna element **302/304** comprises the antenna arm element **302** comprising an overlap leaf **712** and an overlap leaf **714**, and the antenna arm element **304** comprising an overlap leaf **708** and an overlap leaf **710**. A bow-tie antenna element **306/308** comprises the antenna element **306** comprising an overlap leaf **734** and an overlap leaf **736**, and the antenna element **308** comprising an overlap leaf **732** and an overlap leaf **734**. The bow-tie antenna element **302/304** is configured in a first layer (Layer **1**: **724**) along a Y-Axis (not shown), and the bow-tie antenna element **306/308** is configured in a second layer (Layer **2**: **726**) along an X-Axis (not shown).

The bow-tie antenna element **302/304** is electromagnetically coupled to the feed layer element **722/718**, and the bow-tie antenna element **306/308** is electromagnetically coupled to the feed layer element **720/716** (Layer **3**: **728**).

The overlap leaf **708** overlays and is capacitively coupled to the overlap leaf **732**. The overlap leaf **710** overlays and is capacitively coupled to the overlap leaf **734**. The

overlap leaf **712** overlays and is capacitively coupled to the overlap leaf **736**. The overlap leaf **714** overlays and is capacitively coupled to the overlap leaf **730**.

The antenna elements **302**, **304**, **306** and **308** may be capacitively coupled in an overlap area **704**. The antenna arm element **302** is capacitively coupled to the antenna arm element **304** by the overlap leafs **708-712** and **730-736**. The antenna element **306** is capacitively coupled to the antenna element **308** by the overlap leafs **708-712** and **730-736**.

In some embodiments, the Y-axis layer (Layer **1**: **724**) and the X-axis layer (Layer **2**: **726**) may have different parameters and/or resemble other bow-tie or dipole shapes. In some embodiments, the antenna assembly **702/700** can be single polarized comprising of only one set of antenna arms and feeds such as one of the bow-tie antenna element **302/304** and the bow-tie antenna element **306/308**. Selections of materials and number of layers, for a circuit card and materials below and above an antenna circuit board are also part of the design. Embodiments of disclosure provide a means for use of a **3** layer combined antenna design with the structural egg crate circuit board **112** (Figure 1). An important feature is the use of a **3** layer antenna board design that allows the structural wideband multifunctional aperture **100** to be configured in an egg-crate layout such as the structural egg crate circuit board **112**. Addition of bow-tie or dipole shapes on layers **2** (**726**) and **3** (**728**) to capacitively feed the end cross-element configuration dual polarized elements on layers **1** (**724**) and **2** (**726**) allows for the egg crate layout.

Figure **8** is an illustration of exemplary feed layer element dimensions and antenna layer element dimensions according to an embodiment of the disclosure. A feed layer element **802** may comprise a driven feed layer element such as the feed layer elements **720** and **722** (Figures 3, 7). A feed layer element **806** may comprise a ground shorted feed layer element such as the feed layer elements **716** and **718** (Figures 3, 7). An antenna layer

element **826** may comprise a driven bow-tie antenna layer element such as the driven bow-tie arm antenna layer element **302** and **306** (Figures **3**, **7**) or the grounded bow-tie arm antenna layer element **304** and **308** (Figures **3**, **7**). Representative parameters for, for example but without limitation, a **1.2 GHz** to **6 GHz** design are described below.

5

The feed layer element **802** is coupled to a feed line **814** (e.g., **312** in Figures **3**, **5**, **12**) at a joint **810** and a grounded shorting-line **812** (e.g., **314** in Figures **3**, **5**, **12**) at a joint **804**. The spacing **S** between the feed line **814** and the grounded shorting-line **812** may comprise, for example but without limitation, about **4.1 mm**, or other suitable spacing. The feed layer element **806** is coupled to a grounded shorting-line **820** (e.g., **316** in Figures **3**, **5**, **12**). A gap between adjacent feed layer elements **FgBT** such as between a feed layer element **816** and a feed layer element **818** may comprise, for example but without limitation, about **2 mm**, or other suitable gap. A feed layer **824** may comprise, for example but without limitation, a length **L3** of about **6.5 mm**, an outer width **W3** of about **3 mm**, an inner width **W3** of about **6**
10
15 mm, or other suitable dimensions.

The antenna layer element **826** may comprise, for example but without limitation, a length-to-maximum-width **L1** of about **5.6 mm**, a length **L2** of about **9.8 mm**, an end width **W1** of about **3.5 mm**, a maximum-width **W2** of about **7.5 mm**, or other suitable dimensions. An antenna overlap leaf **822** may comprise, for example but without limitation, a leaf length **Cl** of about **1.7 mm**, a leaf width **Cw** of about **1.75 mm**, or other suitable dimensions. An adjacent antenna element gap **Fg** between adjacent antenna elements such as between the driven bow-tie arm antenna element **306** of a first unit cell and the grounded bow-tie arm antenna element **308** of a second unit cell may comprise, for example but without limitation,
20
25 about **1.5 mm**, or other suitable gap.

Figure 9 is an illustration of an exemplary process 900 for forming a structural wideband multifunctional aperture according to an embodiment of the disclosure. The various tasks performed in connection with process 900 may be performed by software, hardware, firmware, computer-readable software, computer readable storage medium, a computer-readable medium comprising computer executable instructions for performing the process method, mechanically, or any combination thereof. The process 900 may be recorded in a computer-readable medium such as a semiconductor memory, a magnetic disk, an optical disk, and the like, and can be accessed and executed, for example, by a computer CPU in which the computer-readable medium is stored.

10

For illustrative purposes, the following description of process 900 may refer to elements mentioned above in connection with Figures 1-2. In some embodiments, portions of the process 900 may be performed by different elements of the structural wideband multifunctional aperture 100 such as: the structural egg crate circuit board 112, the feed-line 312, the grounded shorting-line 314 the grounded shorting-line 316, etc. It should be appreciated that the process 900 may include any number of additional or alternative tasks, the tasks shown in Figure 9 need not be performed in the illustrated order, and the process 900 may be incorporated into a more comprehensive procedure or process having additional functionality not described in detail herein. Process 900 may comprise functions, material, and structures that are similar to the embodiments shown in Figures 1-2. Therefore, common features, functions, and elements may not be redundantly described here.

15
20

Process 900 may begin by coupling a structural egg crate circuit board 112 comprising a grid of circuit board planes to a ground plane 104 (task 902).

25

Process 900 may continue by configuring the structural egg crate circuit board 112 perpendicular to the ground plane 104 around a plurality of open boxes 114/116 (task 904).

Process **900** may continue by coupling a signal feed-line **312** to the structural egg crate circuit board **112**, the signal feed-line **312** operable to couple to a signal transmission line **402** (task **906**).

5

Process **900** may continue by configuring a driven feed layer **722/720** parallel to the ground plane **104** (task **908**). The driven feed layer **722/720** may comprise a single driven feed layer element **722/720**, or any suitable number of the feed layer elements **722/720**.

10 Process **900** may continue by coupling the driven feed layer **722/720** to the signal feed-line **312** and to a side of the structural egg crate circuit board opposite to the ground plane **104** (task **910**).

Process **900** may continue by coupling a grounded shorting-line **314/316** to the
15 structural egg crate circuit board **112** and the ground plane **104** (task **912**).

Process **900** may continue by configuring a grounded feed layer **716/718** parallel to the ground plane **104** (task **914**). The grounded feed layer **716/718** may comprise a single driven grounded feed layer element **716/718**, or any suitable number of the grounded feed
20 layer elements **716/718**.

Process **900** may continue by coupling the grounded feed layer **716/718** to the grounded shorting-line **316** and to the structural egg crate circuit board **112** opposite to the ground plane **104** (task **916**).

25 Process **900** may continue by configuring the driven feed layer **722/720** and the grounded feed layer **716/718** in a trapezoidal configuration (task **918**).

Process **900** may continue by configuring a driven antenna element **302/306** to electromagnetically couple to the driven feed layer **722/720** (task **920**).

Process **900** may continue by configuring a grounded antenna element **304/308** to electromagnetically couple to the grounded feed layer (task **922**).

5 Process **900** may continue by configuring the driven antenna element **302/306** and the grounded antenna element **304/308** to comprise a bow-tie configuration (task **924**).

Process **900** may continue by configuring the ground plane **104** to ground radio frequency (RF) and direct current (DC) electrical fields (task **926**).

10 Process **900** may continue by filling the open boxes **114/116** with a low dielectric material (task **928**).

Process **900** may continue by configuring an aircraft skin comprising the structural wideband multifunctional aperture **100** (task **930**).

Figure **10** is an illustration of an exemplary process **1000** for operating a structural
15 wideband multifunctional aperture according to an embodiment of the disclosure. The various tasks performed in connection with process **1000** may be performed mechanically, by software, hardware, firmware, computer-readable software, computer readable storage medium, or any combination thereof. The process **1000** may be recorded in a computer-readable medium such as a semiconductor memory, a magnetic disk, an optical disk, and the
20 like, and can be accessed and executed, for example, by a computer CPU in which the computer-readable medium is stored.

For illustrative purposes, the following description of process **1000** may refer to elements mentioned above in connection with Figures **1-2**. In some embodiments, portions
25 of the process **1000** may be performed by different elements of the structural wideband multifunctional aperture **100** such as: the structural egg crate circuit board **112**, the feed-line

312, the grounded shorting-line 314, the grounded shorting-line 316, etc. It should be appreciated that process 1000 may include any number of additional or alternative tasks, the tasks shown in Figure 10 need not be performed in the illustrated order, and the process 1000 may be incorporated into a more comprehensive procedure or process having additional
 5 functionality not described in detail herein.

Process 1000 may begin by electromagnetically coupling a signal feed-line 312 to a signal transmission line 402, the signal feed-line 312 coupled to a structural egg crate circuit board 112 comprising a grid of circuit board planes coupled to a ground plane 104 and
 10 configured substantially perpendicular to the ground plane 104 around a plurality of open boxes 114/116 (task 1002).

Process 1000 may continue by electromagnetically coupling a driven feed layer 722/720 to the signal feed-line 312, the driven feed layer 716-722 configured substantially parallel to the ground plane 104 and coupled to the signal feed-line 312 and coupled to a side
 15 of the structural egg crate circuit board 112 opposite to the ground plane 104 (task 1004). The driven feed layer 722/720 may comprise a single driven feedlayer element 722/720, or any suitable number of the feed layer elements 722/720.

Process 1000 may continue by grounding a grounded shorting-line 314/316 coupled to the structural egg crate circuit board 112 to the ground plane 104 operable to ground radio
 20 frequency (RF) and direct current (DC) electrical fields (task 1006).

Process 1000 may continue grounding a grounded feed layer 716/718 with the grounded shorting-line 314/316, the grounded feed layer 716/718 configured parallel to the ground plane 104 and coupled to the grounded shorting-line 314/316 and to the structural egg crate circuit board 112 opposite to the ground plane 104 (task 1008). The grounded feed
 25 layer 716/718 may comprise a single driven grounded feed layer element 716/718, or any suitable number of the grounded feed layer elements 716/718.

Process **1000** may continue by electromagnetically coupling a driven antenna element **302/306** to the driven feed layer **716-722** (task **1010**).

Process **1000** may continue by electromagnetically coupling a grounded antenna element **304/308** to the grounded feed layer **716/718** (task **1012**).

5

Figure **11** is an illustration of an exemplary structural wideband multifunctional aperture comprising a sandwich panel configuration **1100** (sandwich panel **1100**) according to an embodiment of the disclosure. The structural wideband multifunctional aperture **100** may be configured in the sandwich panel **1100** comprising the structural egg crate circuit board **112** sandwiched between one or more facing sheet **1104** and one or more backing sheet **1102**. The facing sheet **1104** and the backing sheet **1102** may provide additional stiffness to the structural egg crate circuit board **112**. The facing sheet **1104** and the backing sheet **1102** may each comprise, for example but without limitation, a low dielectric quartz fabric or other low di-electric material. For example, the low dielectric quartz fabric may be compatible with high temperature and provides high strength structural integrity. Such quartz fabrics may comprise, for example but without limitation, **99.95%** SiO₂ quartz crystals providing low dielectric loss properties.

10

15

Figure **12** is an illustration of an expanded view **1200** of the sandwich panel configuration **1100** of Figure **11**. The antenna elements **108/110** (antenna layer) in the antenna layer **504** and the combined antenna/feed layer **505**, the feed layer **506** are configured in a plane **1202** above the facing sheet **1104**. The ground plane **104** may be configured above or below the backing sheet **1102**. Furthermore, electronics can be attached below the backing sheet **1102** and the ground plane **104**. The antenna elements **108/110**, signal feed-lines **312**, grounded shorting-lines **314**, and grounded shorting-lines **316** are to be configured in the sandwich panel **1100**. The dielectric cover **106** covers the bow-tie antenna

20

25

elements **108/110**, and the structural egg crate circuit board **112** incorporates the signal feed-lines **312**, the grounded shorting-lines **314**, and the grounded shorting-lines **316**.

The sandwich panel **1100** may be integrated into a structure of a vehicle such as an aircraft. For example, the sandwich panel **1100** may be integrated into an outer composite skin of an aircraft. The structural wideband multifunctional aperture **100** is configured to function under a structural loading of the aircraft. Furthermore, the antenna elements **108/110**, the signal feed-lines **312**, the grounded shorting-lines **314**, the grounded shorting-lines **316**, and other interconnects, connections, and electronics are configured to function under a structural loading of the aircraft.

10

In this manner, embodiments of the disclosure provide an antenna element with wide bandwidth and better than, for example, about **50-degree** conical scan volume for the creation of conformal arrays and antennas. The design approach provides effective gain within, for example, about **2 to 3dB** of an ideal gain possible for a surface area of a unit-cell for an antenna element. The element design can be used as a wide-band antenna and/or array. Embodiments of the disclosure can be used in multifunction and/or shared antenna configuration for communications, electronic warfare, and signal intelligence applications and multiple combinations of multiple applications. Embodiments of the disclosure not only provide wide-bandwidth coverage, but provide polarization diversity to allow transmission and reception of signals with any arbitrary polarization that includes, but not exclusive to linear, circular, and slant polarized signals. Embodiments of the disclosure can be scaled to a frequency band with a matching bandwidth ratio (e.g. **5:1**) from a highest to a lowest frequency of desired coverage.

15

20

25

Antenna integration into structure provides a significant advancement of aperture technologies over traditional apertures as traditional apertures are rigid / non-load bearing

members and are not allowed to flex. This limits a size and locations of apertures onto aircraft. Integrating the aperture into the structure allows: 1) a larger size aperture as the aperture is the structure of the aircraft, 2) for more flexibility of the location of the aperture on the platform, and 3) the aperture to be installed in small and medium size UAV's adding
5 to their mission capabilities.

Further, the disclosure comprises embodiments according to the following clauses:

Clause 1. A structural wideband multifunctional aperture comprising:

10 a ground plane operable to ground radio frequency (RF) and direct current (DC) electrical fields;

a structural egg crate circuit board comprising a grid of circuit board planes coupled to the ground plane and configured substantially perpendicular to the ground plane around a plurality of open boxes;

15 a signal feed-line coupled to the structural egg crate circuit board and operable to couple to a signal transmission line; and

a driven feed layer configured substantially parallel to the ground plane and coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane.

20 Clause 2. The structural wideband multifunctional aperture of clause 1, further comprising:

a grounded shorting-line coupled to the structural egg crate circuit board and the ground plane; and

25 a grounded feed layer configured parallel to the ground plane and coupled to the grounded shorting-line and to the structural egg crate circuit board opposite to the ground plane.

Clause 3. The structural wideband multifunctional aperture of clause 2, wherein the driven feed layer and the grounded feed layer comprise a trapezoidal configuration.

Clause 4. The structural wideband multifunctional aperture of clause 2, further comprising:

5 a driven antenna element configured to electromagnetically couple to the driven feed layer; and

a grounded antenna element configured to electromagnetically couple to the grounded feed layer.

Clause 5. The structural wideband multifunctional aperture of clause 4, wherein
10 the driven antenna element and the grounded antenna element comprise a bow-tie configuration.

Clause 6. The structural wideband multifunctional aperture of clause 4, further comprising a dielectric cover covering the driven antenna element and the grounded antenna element, wherein the dielectric cover comprises one of: a single layer comprising
15 low electromagnetic loss material, a plurality of layers comprising differing low electromagnetic loss materials.

Clause 7. The structural wideband multifunctional aperture of clause 1, wherein the structural wideband multifunctional aperture comprises an aircraft skin, and is configured to bear loads on the aircraft skin.

20 Clause 8. The structural wideband multifunctional aperture of clause 1, wherein the structural egg crate circuit board comprises a low dielectric quartz fabric.

Clause 9. The structural wideband multifunctional aperture of clause 1, wherein the open boxes are filled with a low dielectric material.

Clause 10. A method for forming a structural wideband multifunctional aperture comprising:

coupling a structural egg crate circuit board comprising a grid of circuit board planes to a ground plane;

5 configuring the structural egg crate circuit board substantially perpendicular to the ground plane around a plurality of open boxes;

coupling a signal feed-line to the structural egg crate circuit board, the signal feed-line operable to couple to a signal transmission line;

configuring a driven feed layer substantially parallel to the ground plane; and

10 coupling the driven feed layer to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane.

Clause 11. The method of clause 10, further comprising:

coupling a grounded shorting-line to the structural egg crate circuit board and the ground plane;

15 configuring a grounded feed layer parallel to the ground plane; and

coupling the grounded feed layer to the grounded shorting-line and to the structural egg crate circuit board opposite to the ground plane.

Clause 12. The method of clause 11, further comprising configuring the driven feed layer and the grounded feed layer in a trapezoidal configuration.

20 Clause 13. The method of clause 11, further comprising:

configuring a driven antenna element to electromagnetically couple to the driven feed layer; and

configuring a grounded antenna element to electromagnetically couple to the grounded feed layer.

Clause 14. The method of clause 13, further comprising configuring the driven antenna element and the grounded antenna to comprise a bow-tie configuration.

Clause 15. The method of clause 10, further comprising filling the open boxes with a low dielectric material.

5 Clause 16. The method of clause 10, further comprising configuring an aircraft skin comprising the structural wideband multifunctional aperture.

Clause 17. The method of clause 10, further comprising configuring the ground plane to ground radio frequency (RF) and direct current (DC) electrical fields.

10 Clause 18. A method for operating a structural wideband multifunctional aperture comprising:

electromagnetically coupling a signal feed-line to a signal transmission line, the signal feed-line coupled to a structural egg crate circuit board comprising a grid of circuit board planes coupled to a ground plane and configured substantially perpendicular to the ground plane around a plurality of open boxes; and

15 electromagnetically coupling a driven feed layer to the signal feed-line, the driven feed layer configured substantially parallel to the ground plane and coupled to the signal feed-line and coupled to a side of the structural egg crate circuit board opposite to the ground plane.

Clause 19. The method of clause 18, further comprising:

20 grounding a grounded shorting-line coupled to the structural egg crate circuit board to the ground plane operable to ground radio frequency (RF) and direct current (DC) electrical fields; and

grounding a grounded feed layer with the grounded shorting-line, the grounded feed layer configured parallel to the ground plane and coupled to the grounded shorting-line and to the structural egg crate circuit board opposite to the ground plane.

Clause 20. The method of clause 19, further comprising:

5 electromagnetically coupling a driven antenna element to the driven feed layer; and
 electromagnetically coupling a grounded antenna element to the grounded feed layer.

10 Terms and phrases used in this document, and variations thereof, unless otherwise expressly stated, should be construed as open ended as opposed to limiting. As examples of the foregoing: the term “including” should be read as meaning “including, without limitation” or the like; the term “example” is used to provide exemplary instances of the item in discussion, not an exhaustive or limiting list thereof; and adjectives such as
 15 “conventional,” “traditional,” “normal,” “standard,” “known” and terms of similar meaning should not be construed as limiting the item described to a given time period or to an item available as of a given time, but instead should be read to encompass conventional, traditional, normal, or standard technologies that may be available or known now or at any time in the future.

20

 Likewise, a group of items linked with the conjunction “and” should not be read as requiring that each and every one of those items be present in the grouping, but rather should be read as “and/or” unless expressly stated otherwise. Similarly, a group of items linked with the conjunction “or” should not be read as requiring mutual exclusivity among that
 25 group, but rather should also be read as “and/or” unless expressly stated otherwise.

Furthermore, although items, elements or components of the disclosure may be described or claimed in the singular, the plural is contemplated to be within the scope thereof unless limitation to the singular is explicitly stated. The presence of broadening words and phrases such as “one or more,” “at least,” “but not limited to” or other like phrases in some instances
5 shall not be read to mean that the narrower case is intended or required in instances where such broadening phrases may be absent.

The above description refers to elements or nodes or features being “connected” or “coupled” together. As used herein, unless expressly stated otherwise, “connected” means
10 that one element/node/feature is directly joined to (or directly communicates with) another element/node/feature, and not necessarily mechanically. Likewise, unless expressly stated otherwise, “coupled” means that one element/node/feature is directly or indirectly joined to (or directly or indirectly communicates with) another element/node/feature, and not necessarily mechanically. Thus, although Figures 1-8 depict example arrangements of
15 elements, additional intervening elements, devices, features, or components may be present in an embodiment of the disclosure.

As used herein, unless expressly stated otherwise, “substantially” means may comprise a minor deviation due to measuring devices, fabrication processes, testing
20 environments, material properties, or similar factors. For example, substantially perpendicular means may comprise a minor deviation from a 90 degree angle. Similarly, substantially parallel means may comprise a minor deviation from being parallel.

As used herein, unless expressly stated otherwise, “operable” means able to be used,
25 fit or ready for use or service, usable for a specific purpose, and capable of performing a recited or desired function described herein. In relation to systems and devices, the term

"operable" means the system and/or the device is fully functional and calibrated, comprises elements for, and meets applicable operability requirements to perform a recited function when activated. In relation to systems and circuits, the term "operable" means the system and/or the circuit is fully functional and calibrated, comprises logic for, and meets applicable

5 operability requirements to perform a recited function when activated.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A structural wideband multifunctional aperture comprising:

5 a ground plane operable to ground radio frequency (RF) and direct current (DC) electrical fields;

10 a structural egg crate circuit board comprising a grid of circuit board planes coupled to the ground plane and configured substantially perpendicular to the ground plane around a plurality of open boxes, and operable to support a structural load;

a signal feed-line coupled to the structural egg crate circuit board and operable to couple to a signal transmission line, and configured perpendicular to the ground plane; and

15 a driven feed layer, wherein the driven feed layer is:

configured substantially parallel to the ground plane;

20 coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane; and

configured in a unit cell for an electronically steerable array.

2. The structural wideband multifunctional aperture of claim 1, further comprising:

25 a grounded shorting-line coupled to the structural egg crate circuit board and the ground plane; and

30 a grounded feed layer configured parallel to the ground plane and coupled to the grounded shorting-line and to the structural egg crate circuit board opposite to the ground plane.

3. The structural wideband multifunctional aperture of claim 2, wherein the driven feed layer and the grounded feed layer comprise a trapezoidal configuration.

4. The structural wideband multifunctional aperture of claim 2, further comprising:

a driven antenna element configured to electromagnetically couple to the driven feed layer; and

a grounded antenna element configured to electromagnetically couple to the grounded feed layer.

5. The structural wideband multifunctional aperture of claim 4, wherein the driven antenna element and the grounded antenna element comprise a bow-tie configuration.

6. The structural wideband multifunctional aperture of claim 4, further comprising a dielectric cover covering the driven antenna element and the grounded antenna element, wherein the dielectric cover comprises one of:

a single layer comprising low electromagnetic loss material; or

a plurality of layers comprising differing low electromagnetic loss materials.

7. The structural wideband multifunctional aperture of claim 1, wherein the structural wideband multifunctional aperture comprises an aircraft skin, and is configured to bear loads on the aircraft skin.

8. The structural wideband multifunctional aperture of claim 1, wherein the structural egg crate circuit board comprises a low dielectric quartz fabric.

9. The structural wideband multifunctional aperture of claim 1, wherein the open boxes are filled with a low dielectric material.

10. The structural wideband multifunctional aperture of claim 1, wherein the structural wideband multifunctional aperture is configured as a dual-polarized dipole antenna structure.

5 11. The structural wideband multifunctional aperture of claim 10, wherein the structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least 5:1 of high frequency to low frequency.

10 12. The structural wideband multifunctional aperture of claim 1, wherein the structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least 5:1 of high frequency to low frequency.

13. A method for forming a structural wideband multifunctional aperture comprising:

15 coupling a structural egg crate circuit board comprising a grid of circuit board planes to a ground plane;

configuring the structural egg crate circuit board substantially perpendicular to the ground plane around a plurality of open boxes, and to support a structural load;

20 coupling a signal feed-line to the structural egg crate circuit board, the signal feed-line operable to couple to a signal transmission line, and configured perpendicular to the ground plane;

25 configuring a driven feed layer:

substantially parallel to the ground plane; and

in a unit cell for an electronically steerable array; and

30 coupling the driven feed layer to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane.

14. The method of claim 13, further comprising:

5 coupling a grounded shorting-line to the structural egg crate circuit board and the ground plane;

 configuring a grounded feed layer parallel to the ground plane; and

10 coupling the grounded feed layer to the grounded shorting-line and to the structural egg crate circuit board opposite to the ground plane.

15. The method of claim 14, further comprising configuring the driven feed layer and the grounded feed layer in a trapezoidal configuration.

15 16. The method of claim 14, further comprising:

 configuring a driven antenna element to electromagnetically couple to the driven feed layer; and

20 configuring a grounded antenna element to electromagnetically couple to the grounded feed layer.

17. The method of claim 16, further comprising configuring the driven antenna element and the grounded antenna to comprise a bow-tie configuration.

25 18. The method of claim 13, further comprising filling the open boxes with a low dielectric material.

30 19. The method of claim 13, further comprising configuring an aircraft skin comprising the structural wideband multifunctional aperture.

20. The method of claim 13, further comprising configuring the ground plane to ground radio frequency (RF) and direct current (DC) electrical fields.

21. The method of claim 13, wherein the structural wideband multifunctional aperture is configured as a dual-polarized dipole antenna structure.

22. The method of claim 13, wherein the structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least 5:1 of high frequency to low frequency.

23. A method for operating a structural wideband multifunctional aperture comprising:

electromagnetically coupling a signal feed-line to a signal transmission line, the signal feed-line coupled to a structural egg crate circuit board comprising a grid of circuit board planes coupled to a ground plane and configured substantially perpendicular to the ground plane around a plurality of open boxes and operable to support a structural load; and

electromagnetically coupling a driven feed layer to the signal feed-line, wherein the driven feed layer is:

configured substantially parallel to the ground plane;

coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane; and

configured in a unit cell for an electronically steerable unit.

24. The method of claim 23, further comprising:

grounding a grounded shorting-line coupled to the structural egg crate circuit board to the ground plane operable to ground radio frequency (RF) and direct current (DC) electrical fields; and

5 grounding a grounded feed layer with the grounded shorting-line, the grounded feed layer configured parallel to the ground plane and coupled to the grounded shorting-line and to the structural egg crate circuit board opposite to the ground plane.

25. The method of claim 24, further comprising:

10

electromagnetically coupling a driven antenna element to the driven feed layer; and

electromagnetically coupling a grounded antenna element to the grounded feed layer.

15 26. The method of claim 23, wherein the structural wideband multifunctional aperture is configured as a dual-polarized dipole antenna structure.

27. The method of claim 26, wherein the structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least 5:1 of high frequency to low frequency.
20

28. The method of claim 23, wherein the structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least 5:1 of high frequency to low frequency.
25

25

29. A structural wideband multifunctional aperture comprising:

a ground plane operable to ground radio frequency (RF) and direct current (DC) electrical fields;

30

a structural egg crate circuit board comprising a grid of circuit board planes coupled to the ground plane and configured substantially perpendicular to the ground plane around a plurality of open boxes, and operable to support a structural load;

5 a signal feed-line coupled to the structural egg crate circuit board and operable to couple to a signal transmission line, and configured perpendicular to the ground plane;

10 a driven feed layer configured substantially parallel to the ground plane and coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane; and

wherein the structural wideband multifunctional aperture is configured as a dual-polarized dipole antenna structure.

15

30. The structural wideband multifunctional aperture of claim 29, wherein the structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least 5:1 of high frequency to low frequency.

20 31. A structural wideband multifunctional aperture comprising:

a ground plane operable to ground radio frequency (RF) and direct current (DC) electrical fields;

25 a structural egg crate circuit board comprising a grid of circuit board planes coupled to the ground plane and configured substantially perpendicular to the ground plane around a plurality of open boxes, and operable to support a structural load;

30 a signal feed-line coupled to the structural egg crate circuit board and operable to couple to a signal transmission line, and configured perpendicular to the ground plane;

a driven feed layer configured substantially parallel to the ground plane and coupled to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane; and

5 wherein the structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least **5:1** of high frequency to low frequency.

32. A method for forming a structural wideband multifunctional aperture comprising:

10 coupling a structural egg crate circuit board planes to a ground plane;

configuring the structural egg crate circuit board substantially perpendicular to the ground plane around a plurality of open boxes, and to support a structural load;

15 coupling a signal feed-line to the structural egg crate circuit board, the signal feed-line operable to couple to a signal transmission line, and configured perpendicular to the ground plane;

configuring a driven feed layer substantially parallel to the ground plane;

20 coupling the driven feed layer to the signal feed-line and to a side of the structural egg crate circuit board opposite to the ground plane; and

25 wherein the structural wideband multifunctional aperture is configured as a dual-polarized dipole antenna structure.

33. The structural wideband multifunctional aperture of claim **32**, wherein the structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least **5:1** of high frequency to low frequency.

30 34. The structural wideband multifunctional aperture of claim **33**, wherein the driven feed layer is configured in a unit cell for an electronically steerable array.

35. A method for forming a structural wideband multifunctional aperture comprising:

coupling a structural egg crate circuit board comprising a grid of circuit board planes
to a ground plane;

configuring the structural egg crate circuit board substantially perpendicular to the
ground plane around a plurality of open boxes, and to support a structural load;

coupling a signal feed-line to the structural egg crate circuit board, the signal feed-
line operable to couple to a signal transmission line, and configured perpendicular to
the ground plane;

configuring a driven feed layer substantially parallel to the ground plane;

coupling the driven feed layer to the signal feed-line and to a side of the structural
egg crate circuit board opposite to the ground plane; and

wherein the structural wideband multifunctional aperture is configured with a
matching bandwidth ratio of at least 5:1 of high frequency to low frequency.

36. A method for operating a structural wideband multifunctional aperture comprising:

electromagnetically coupling a signal feed-line to a signal transmission line, the
signal feed-line configured perpendicular to the ground plane and coupled to a
structural egg crate circuit board comprising a grid of circuit board planes coupled to
a ground plane and configured substantially perpendicular to the ground plane around
a plurality of open boxes and operable to support a structural load;

electromagnetically coupling a driven feed layer to the signal feed-line, the driven
feed layer configured substantially parallel to the ground plane and coupled to the

signal feed-line and coupled to a side of the structural egg crate circuit board opposite to the ground plane; and

wherein the structural wideband multifunctional aperture is configured as a dual-polarized dipole antenna structure.

37. The method of claim 39, wherein the structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least 5:1 of high frequency to low frequency.

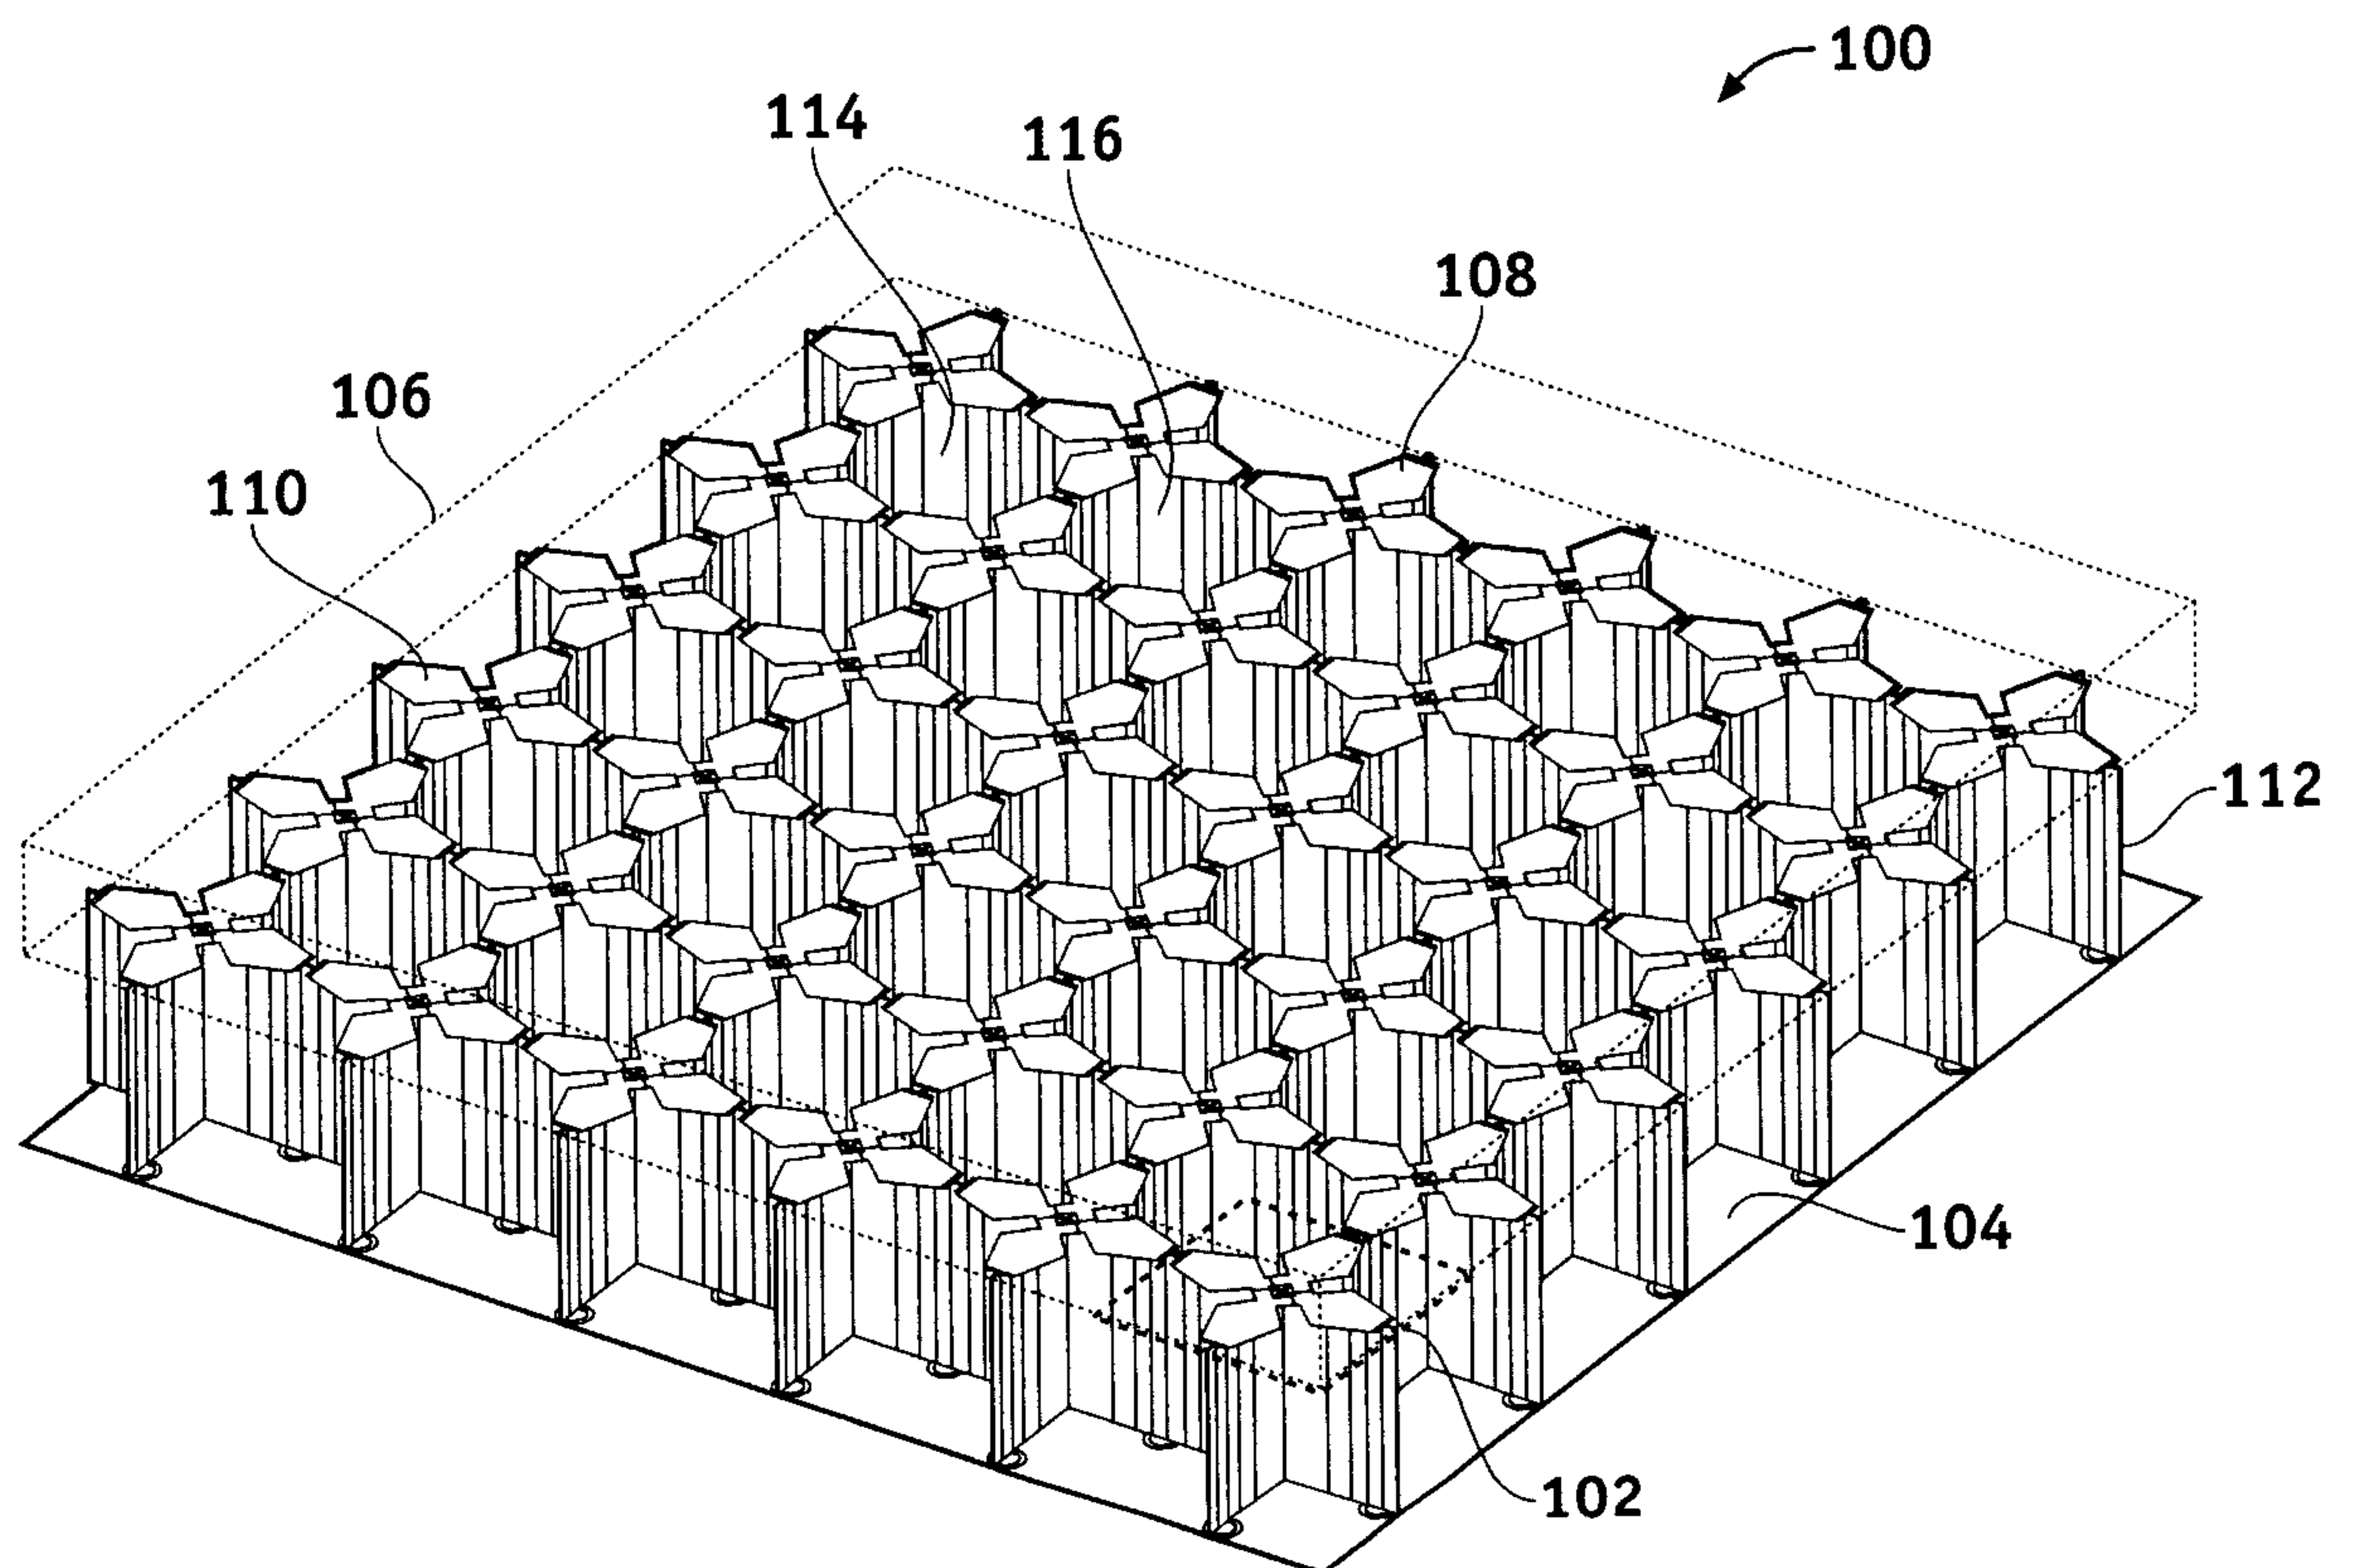
38. A method for operating a structural wideband multifunctional aperture comprising:

electromagnetically coupling a signal feed-line to a signal transmission line, the signal feed-line configured perpendicular to the ground plane and coupled to a structural egg crate circuit board comprising a grid of circuit board planes coupled to a ground plane and configured substantially perpendicular to the ground plane around a plurality of open boxes and operable to support a structural load;

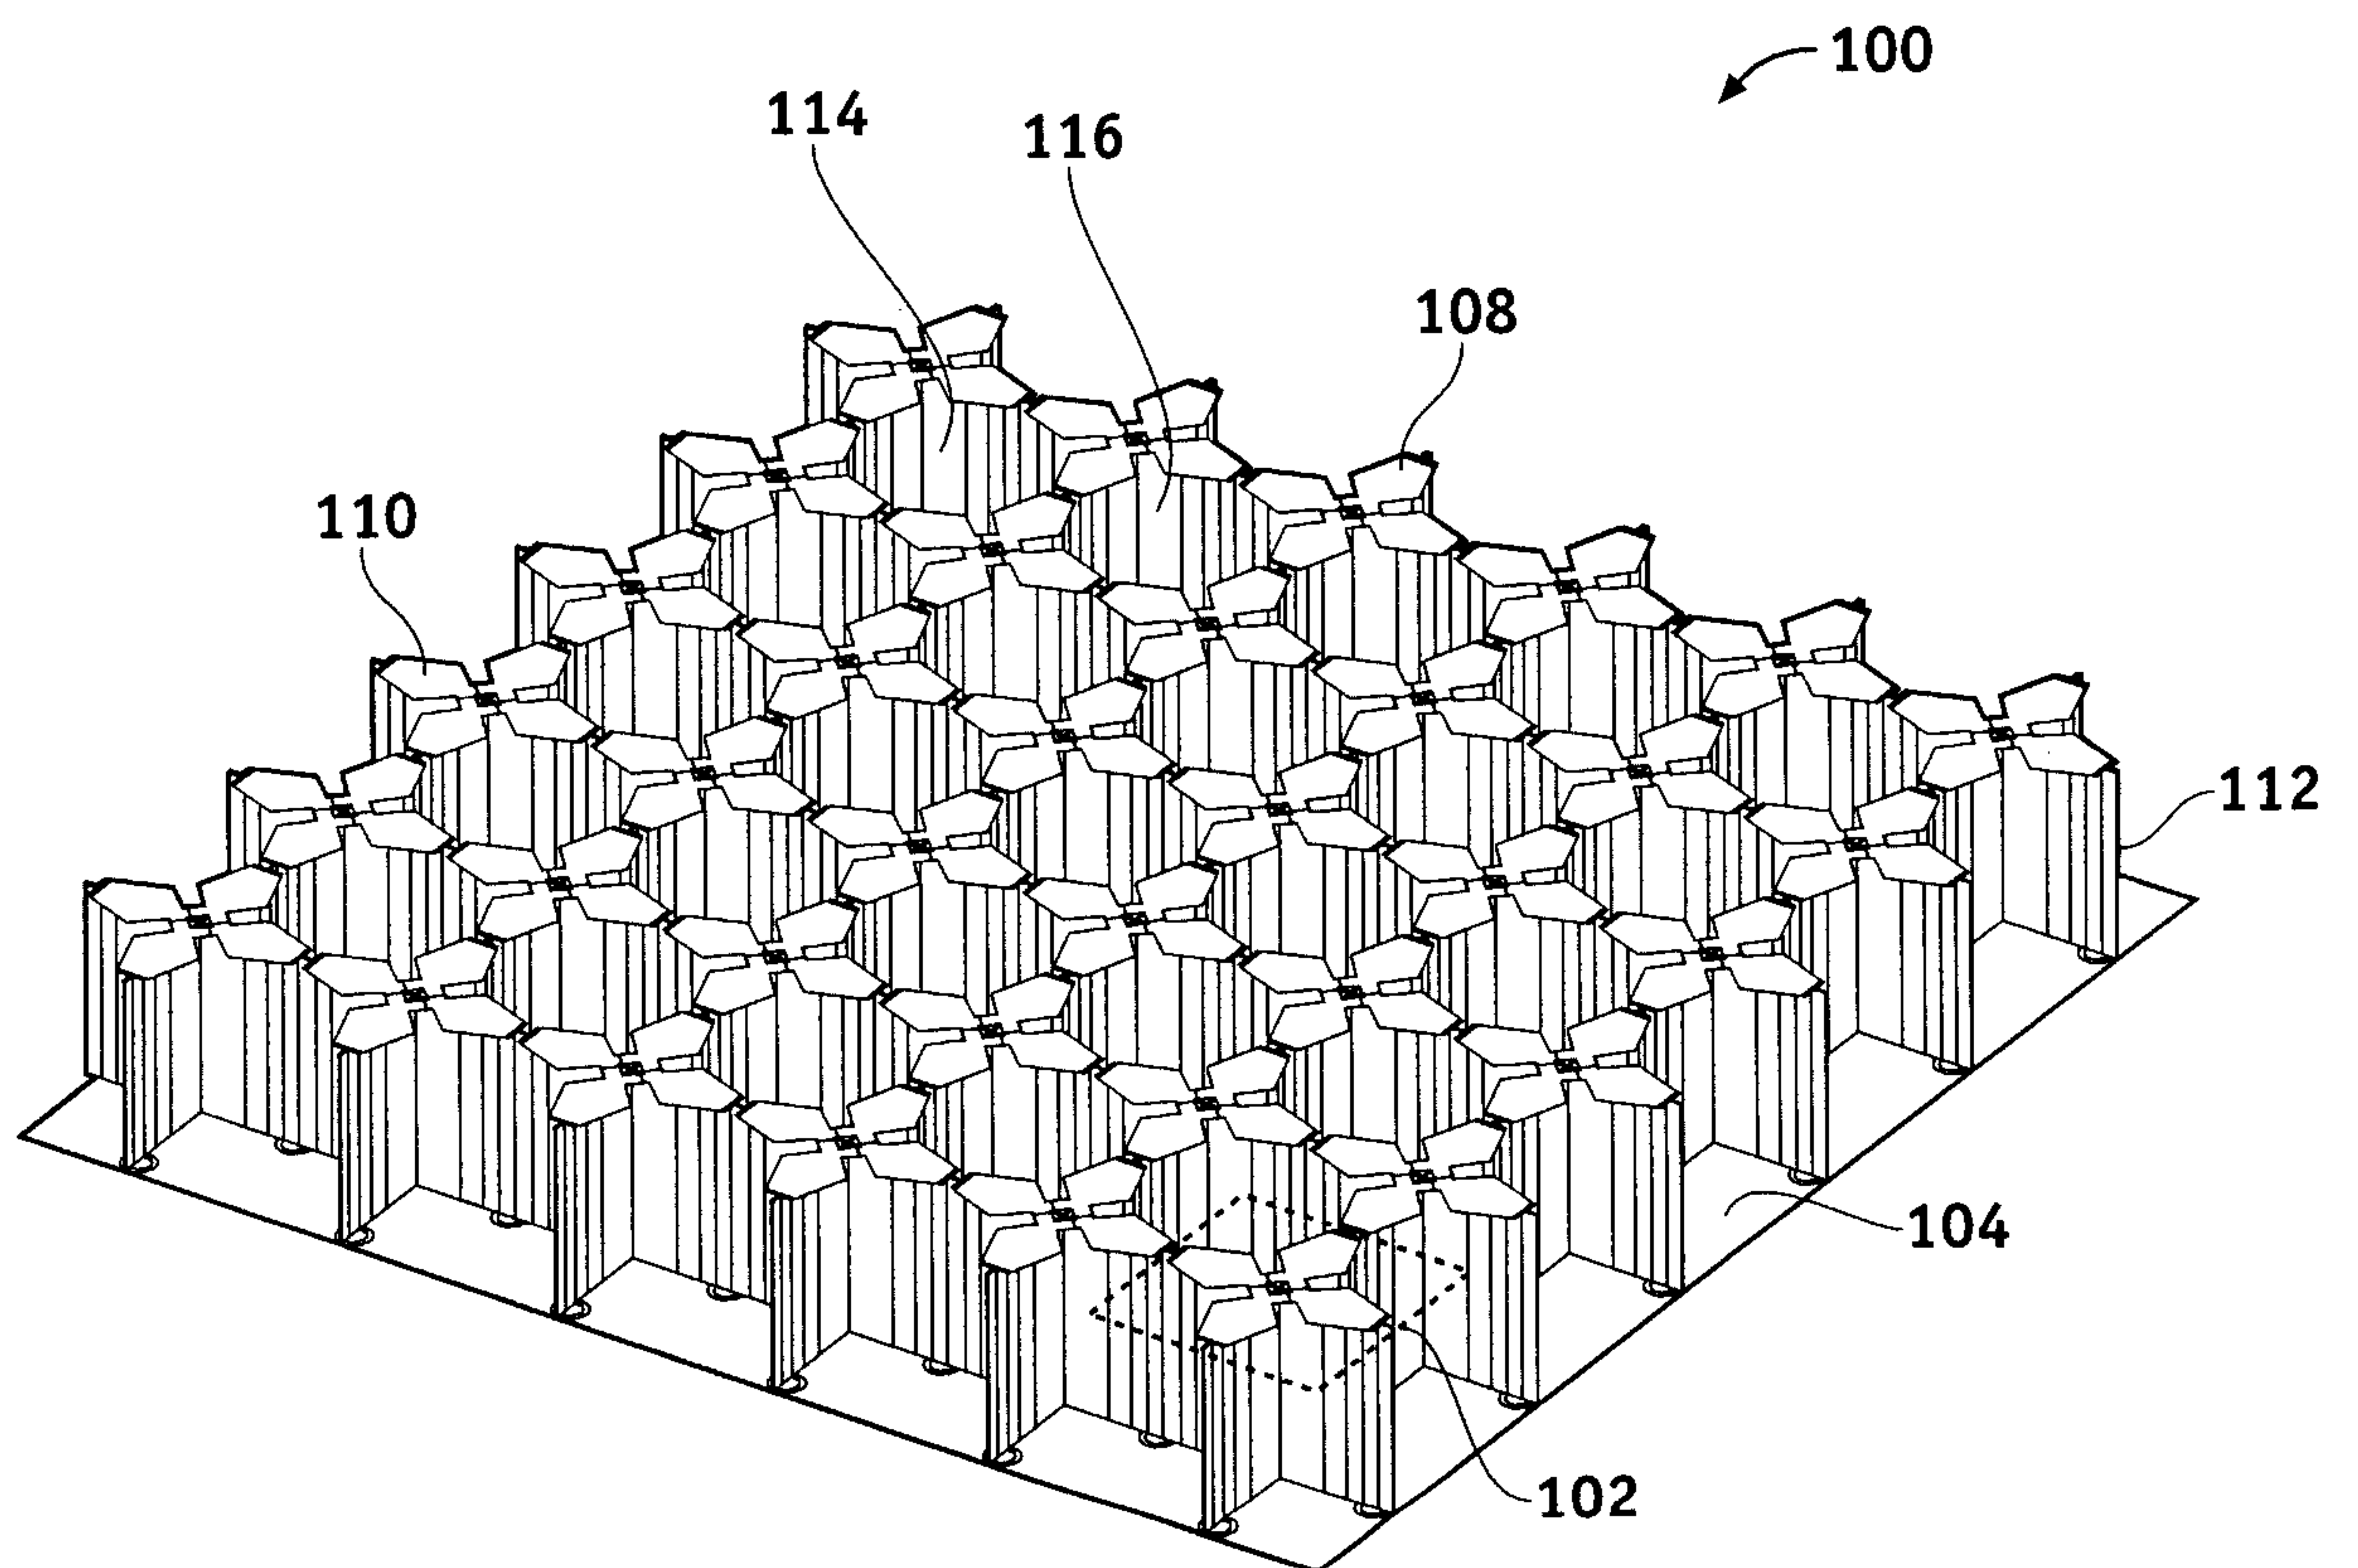
electromagnetically coupling a driven feed layer to the signal feed-line, the driven feed layer configured substantially parallel to the ground plane and coupled to the signal feed-line and coupled to a side of the structural egg crate circuit board opposite to the ground plane; and

wherein the structural wideband multifunctional aperture is configured with a matching bandwidth ratio of at least 5:1 of high frequency to low frequency.

1/11

**FIG. 1**

2/11

**FIG. 2**

└

3/11

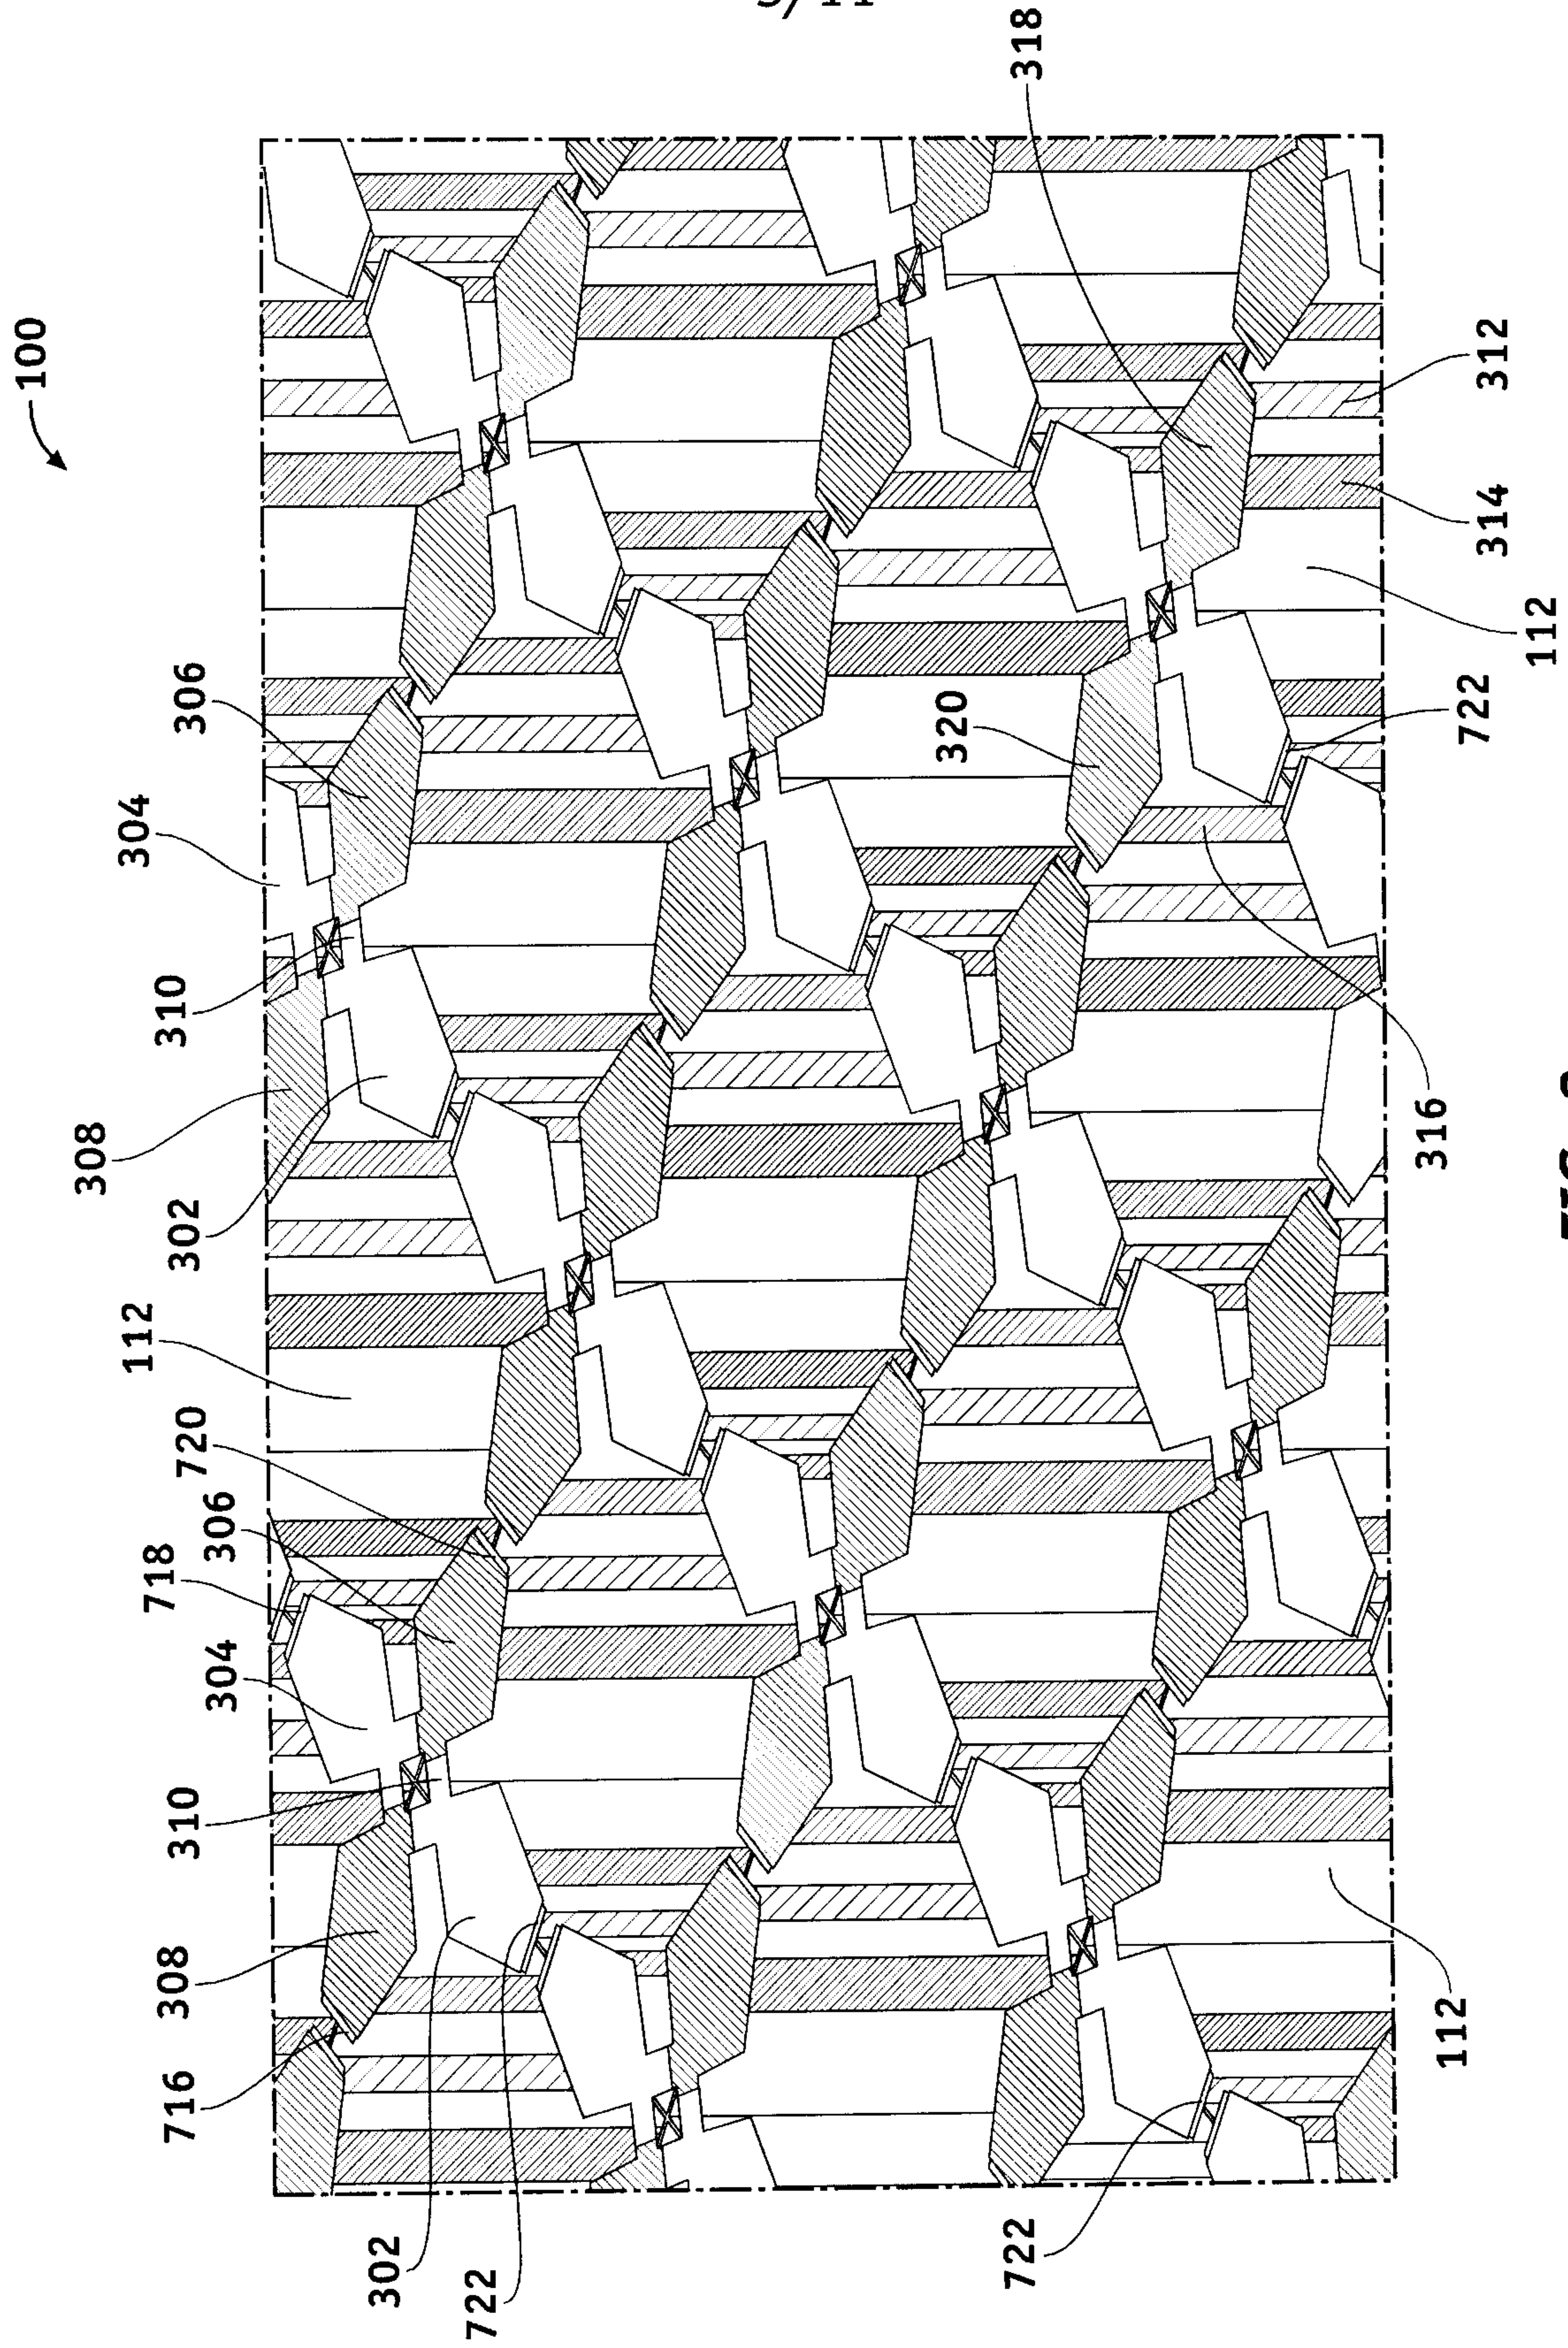
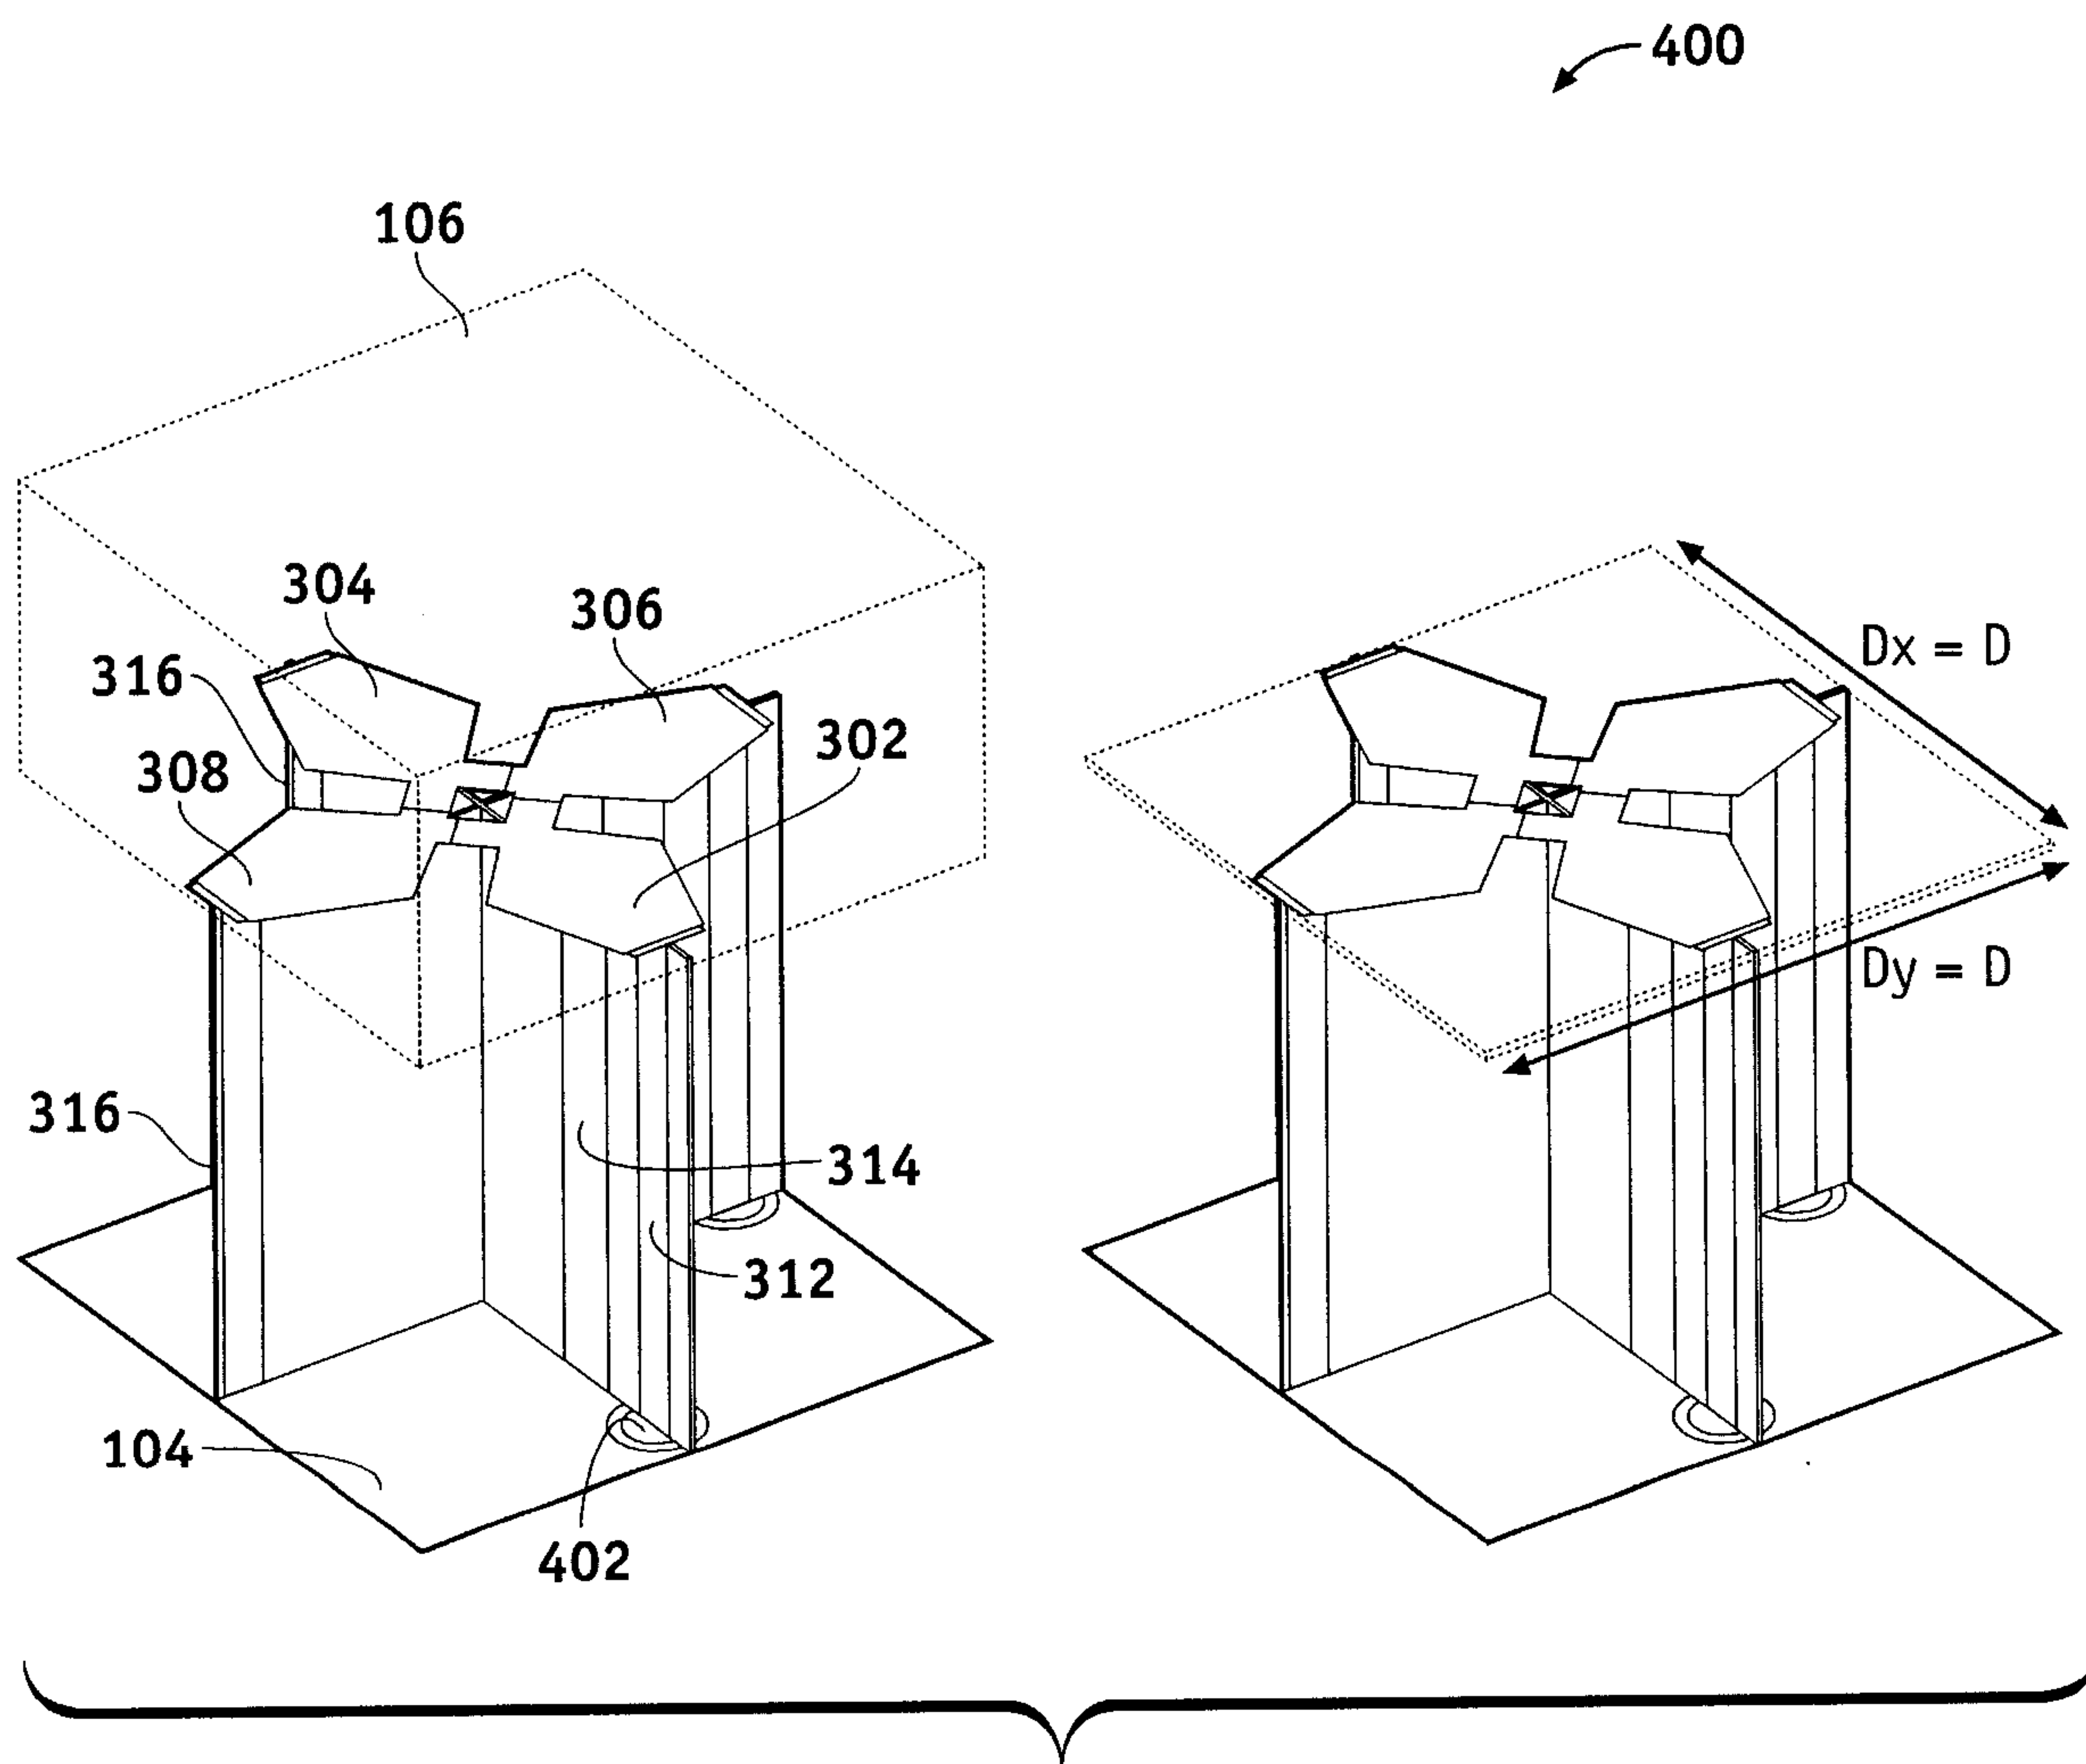


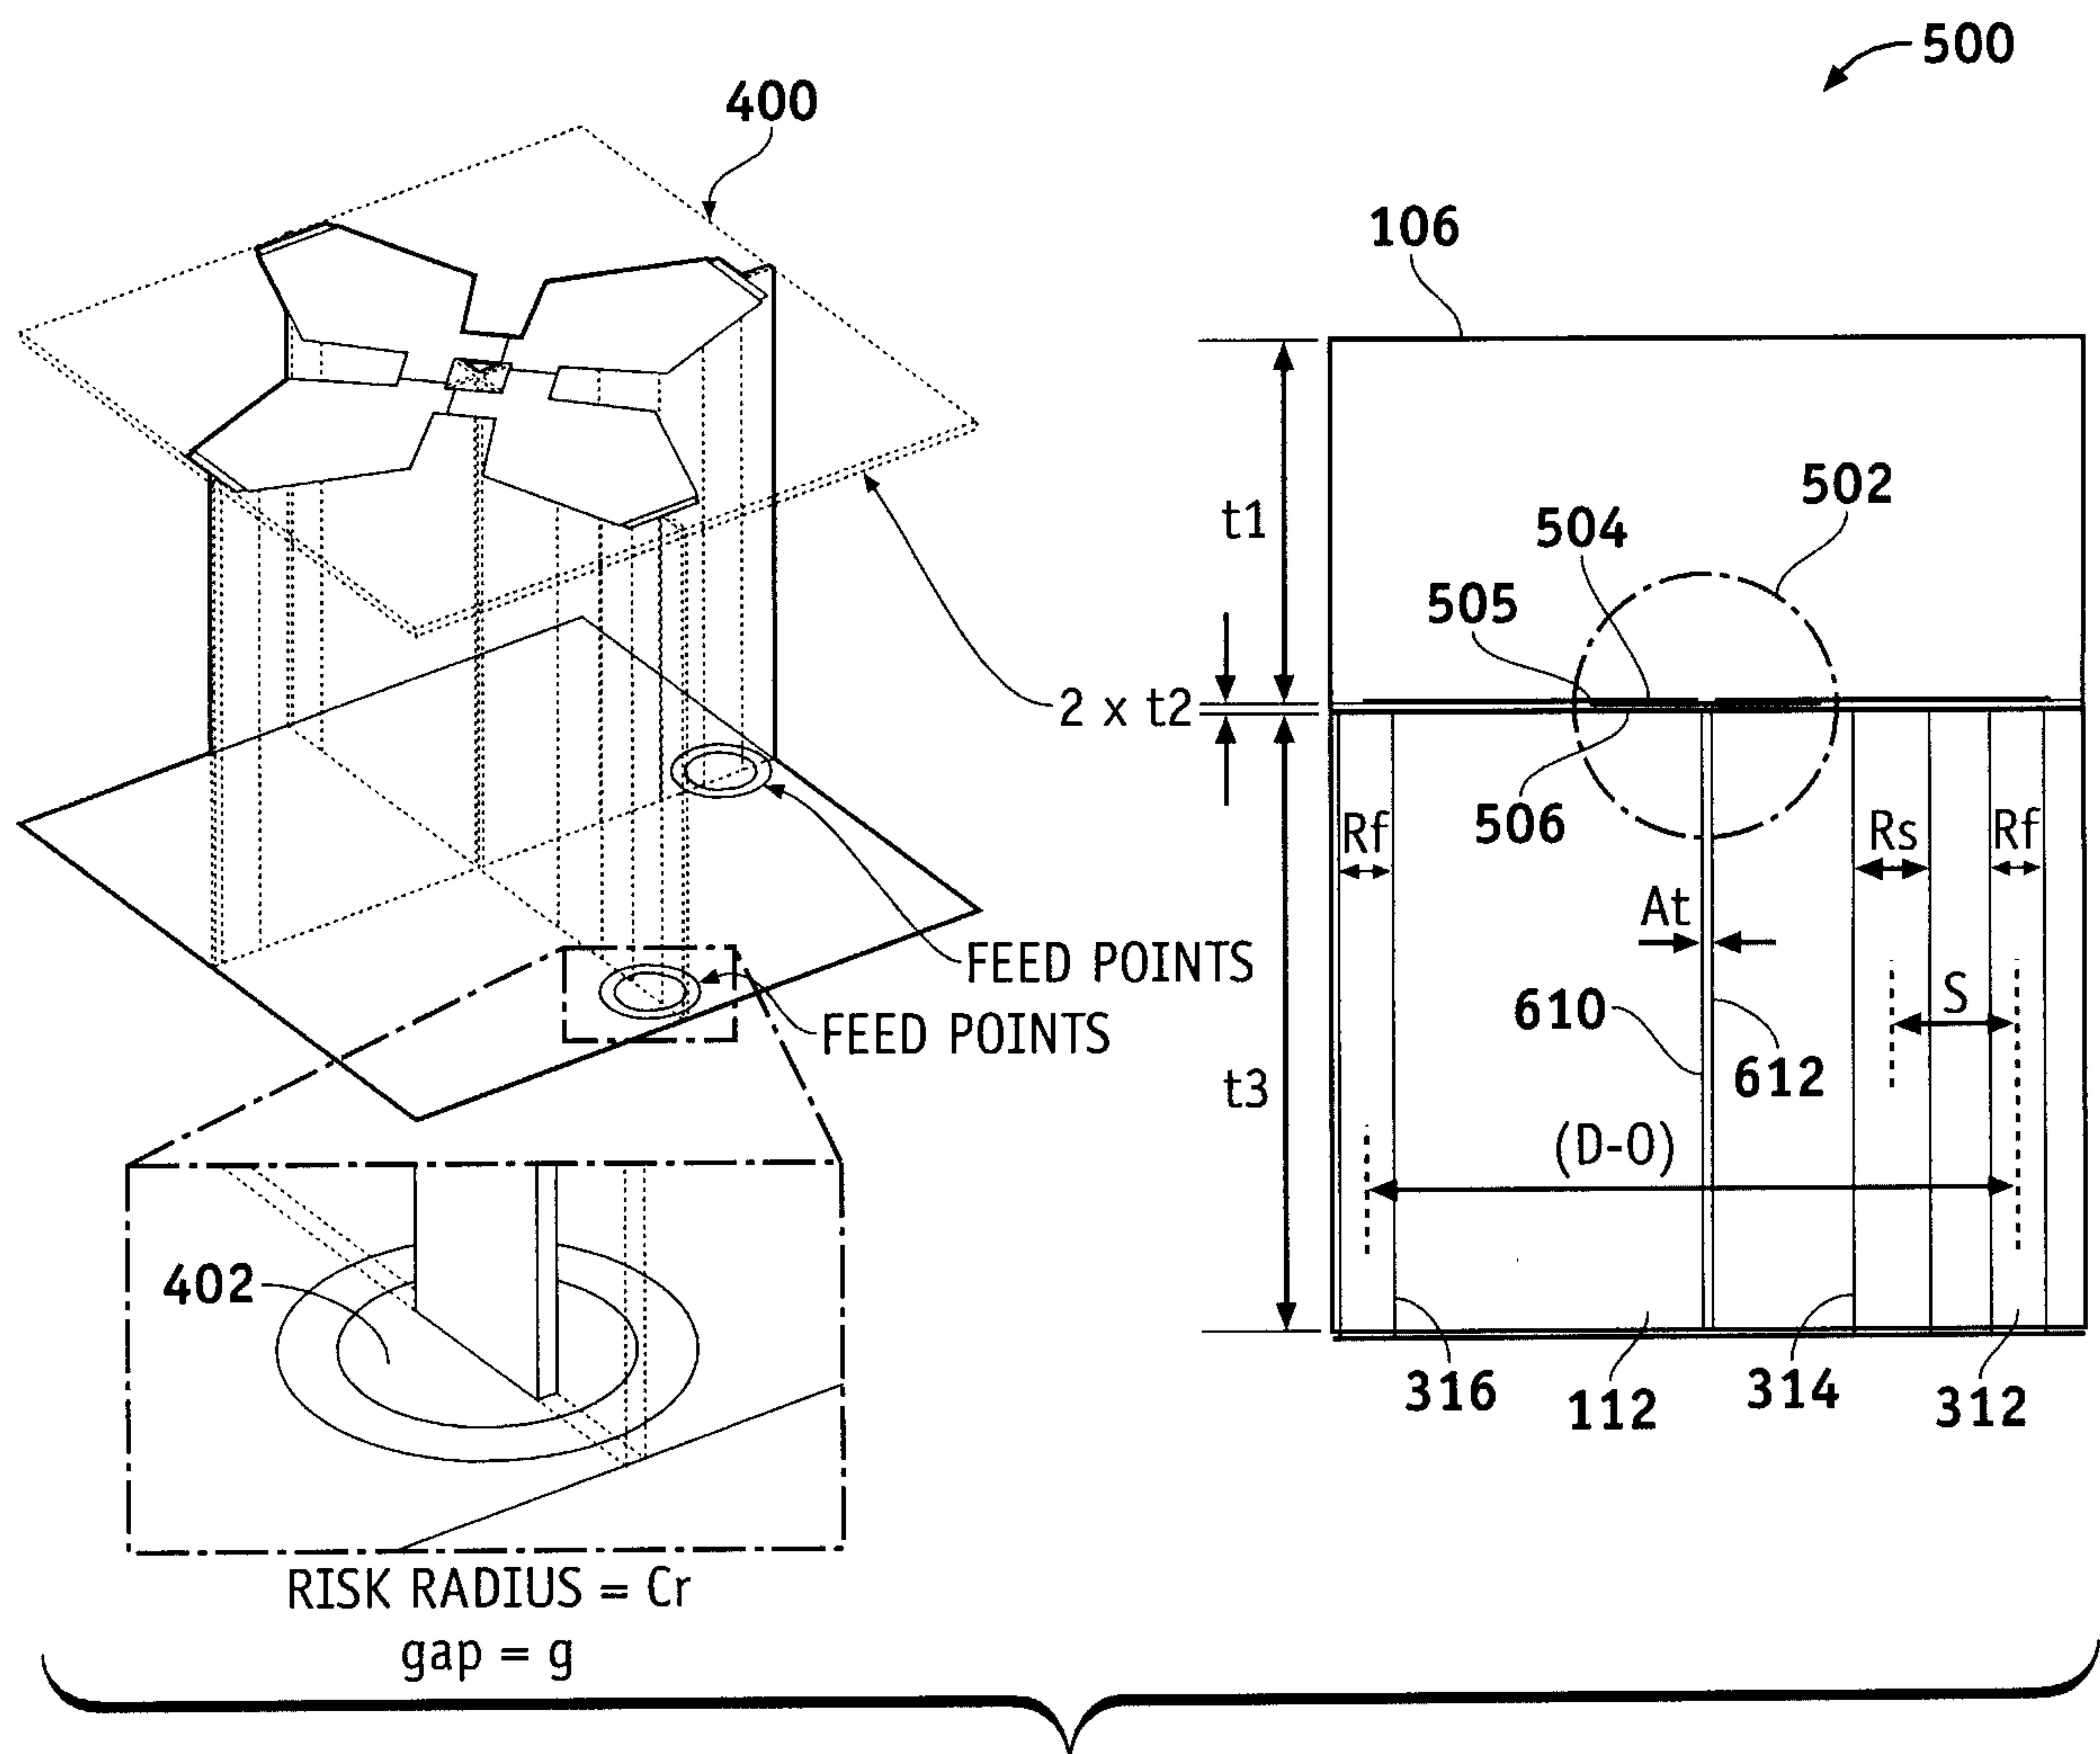
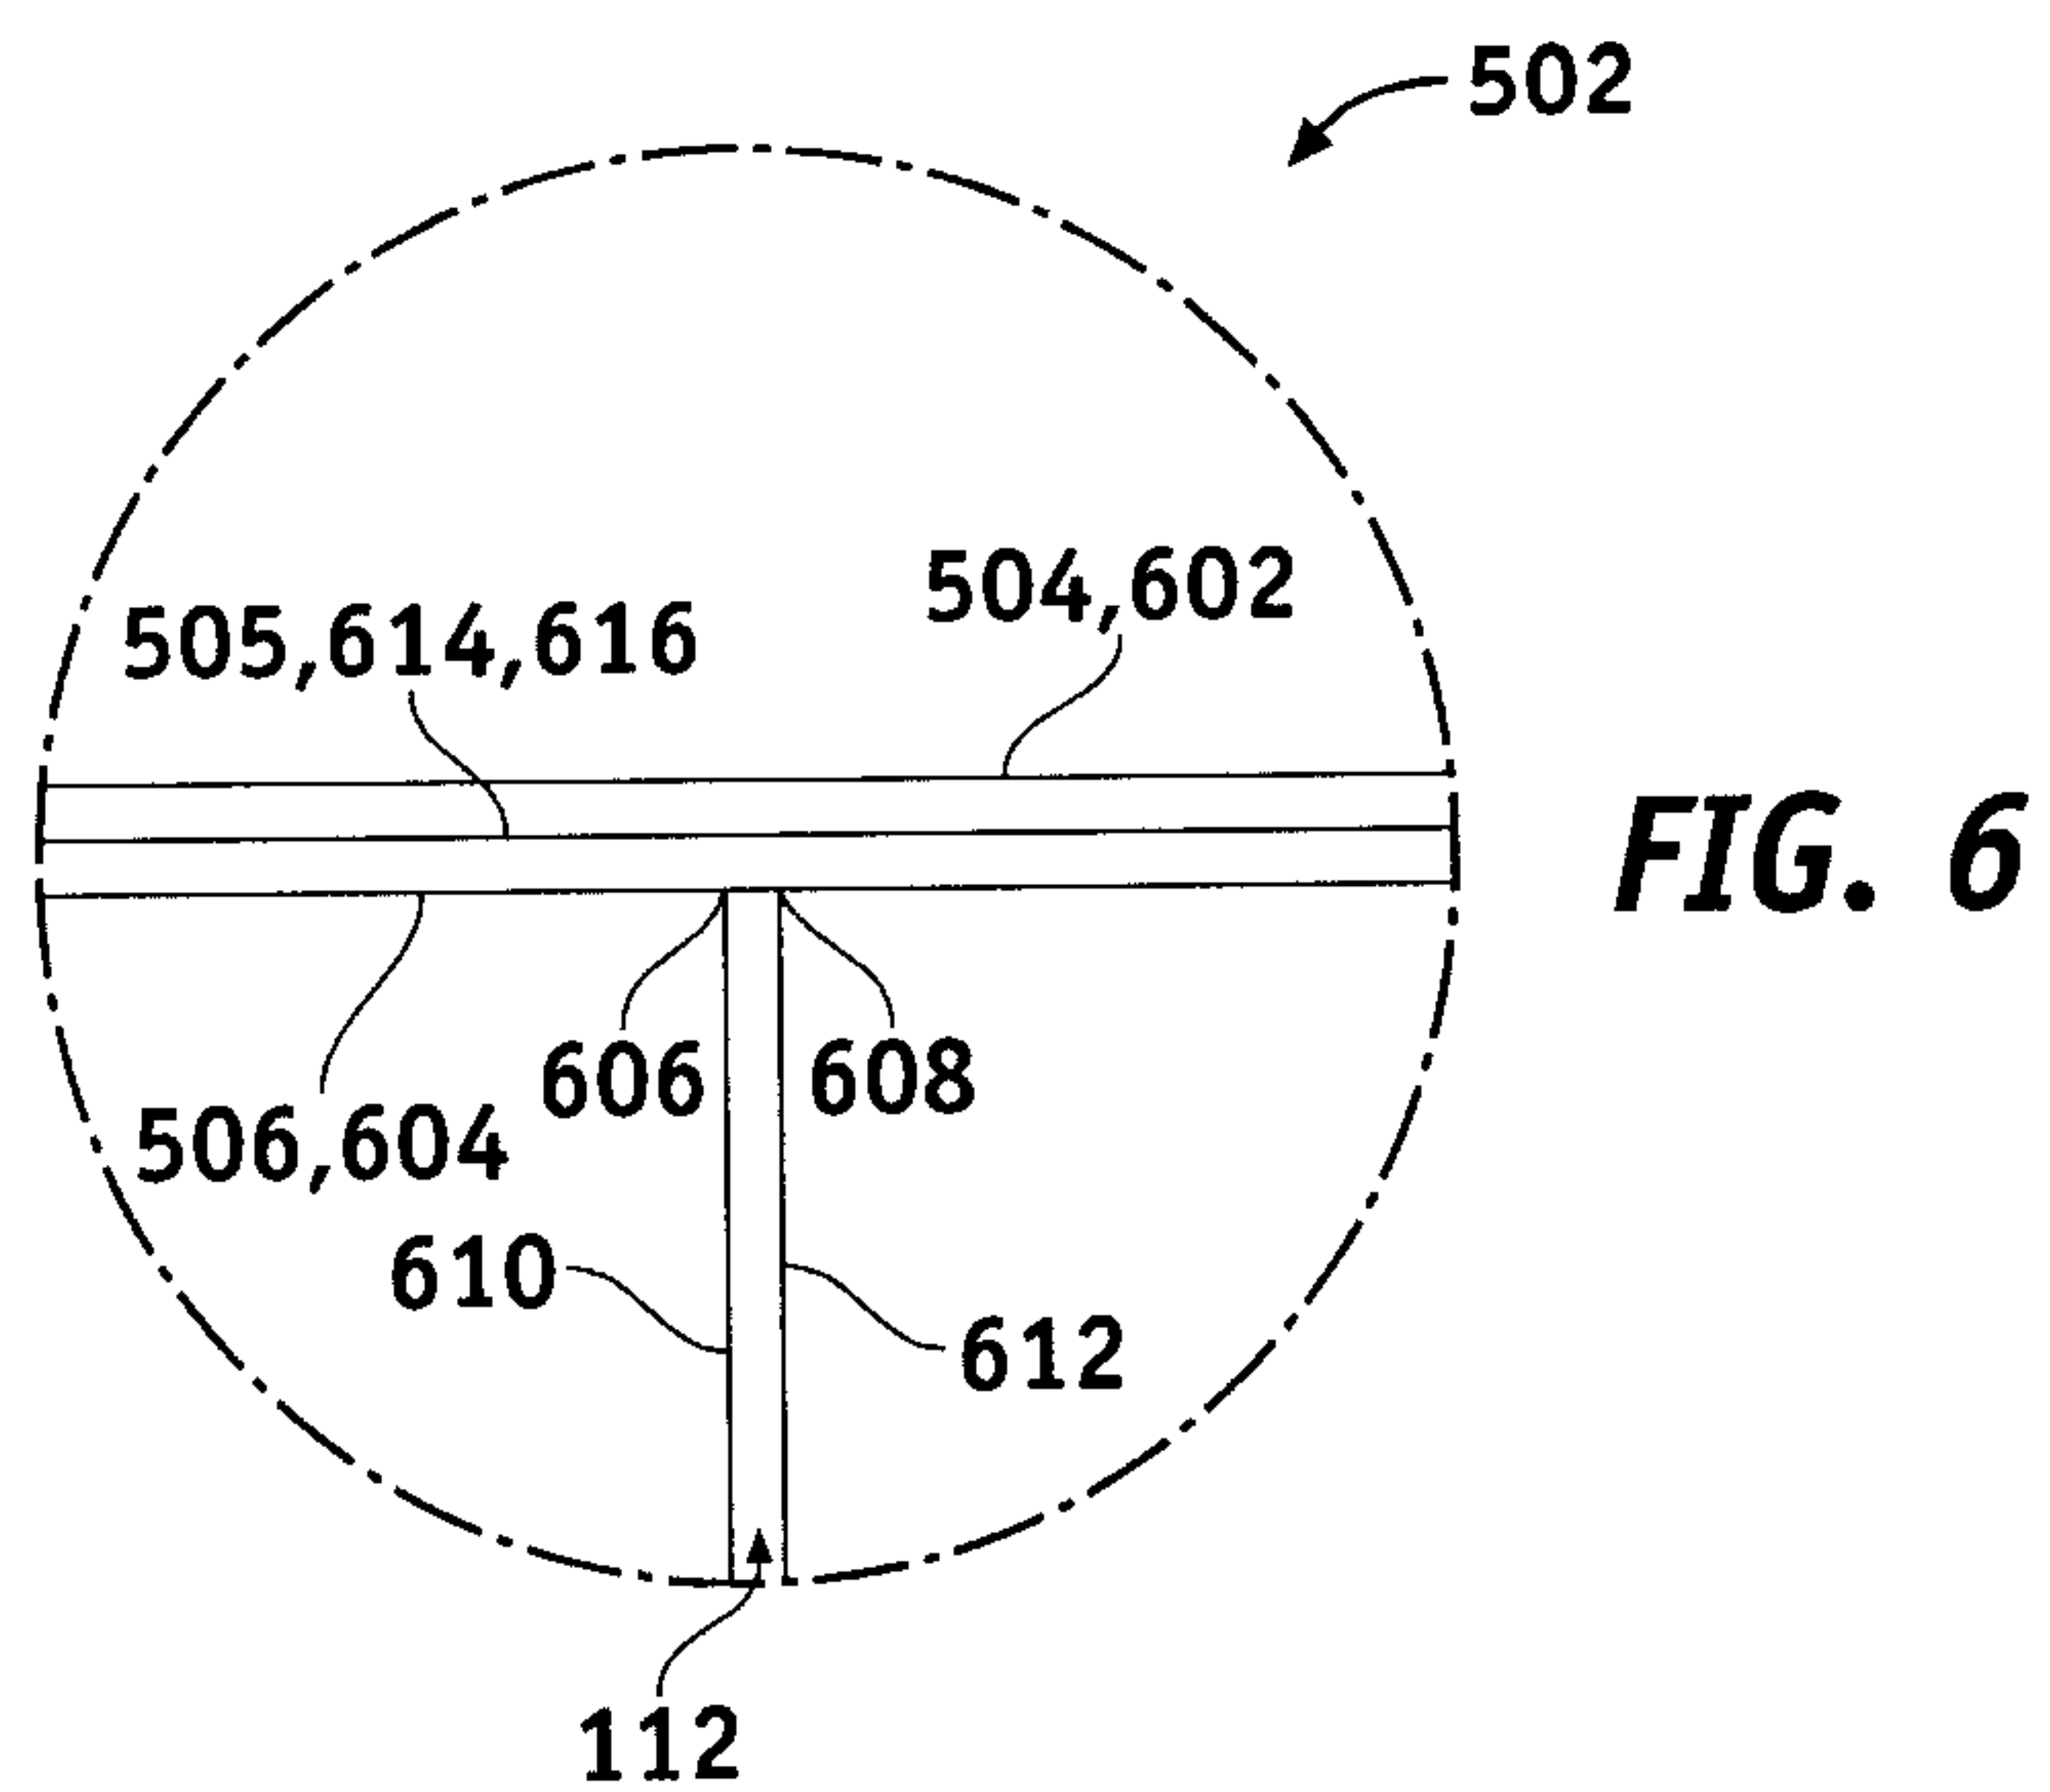
FIG. 3

└

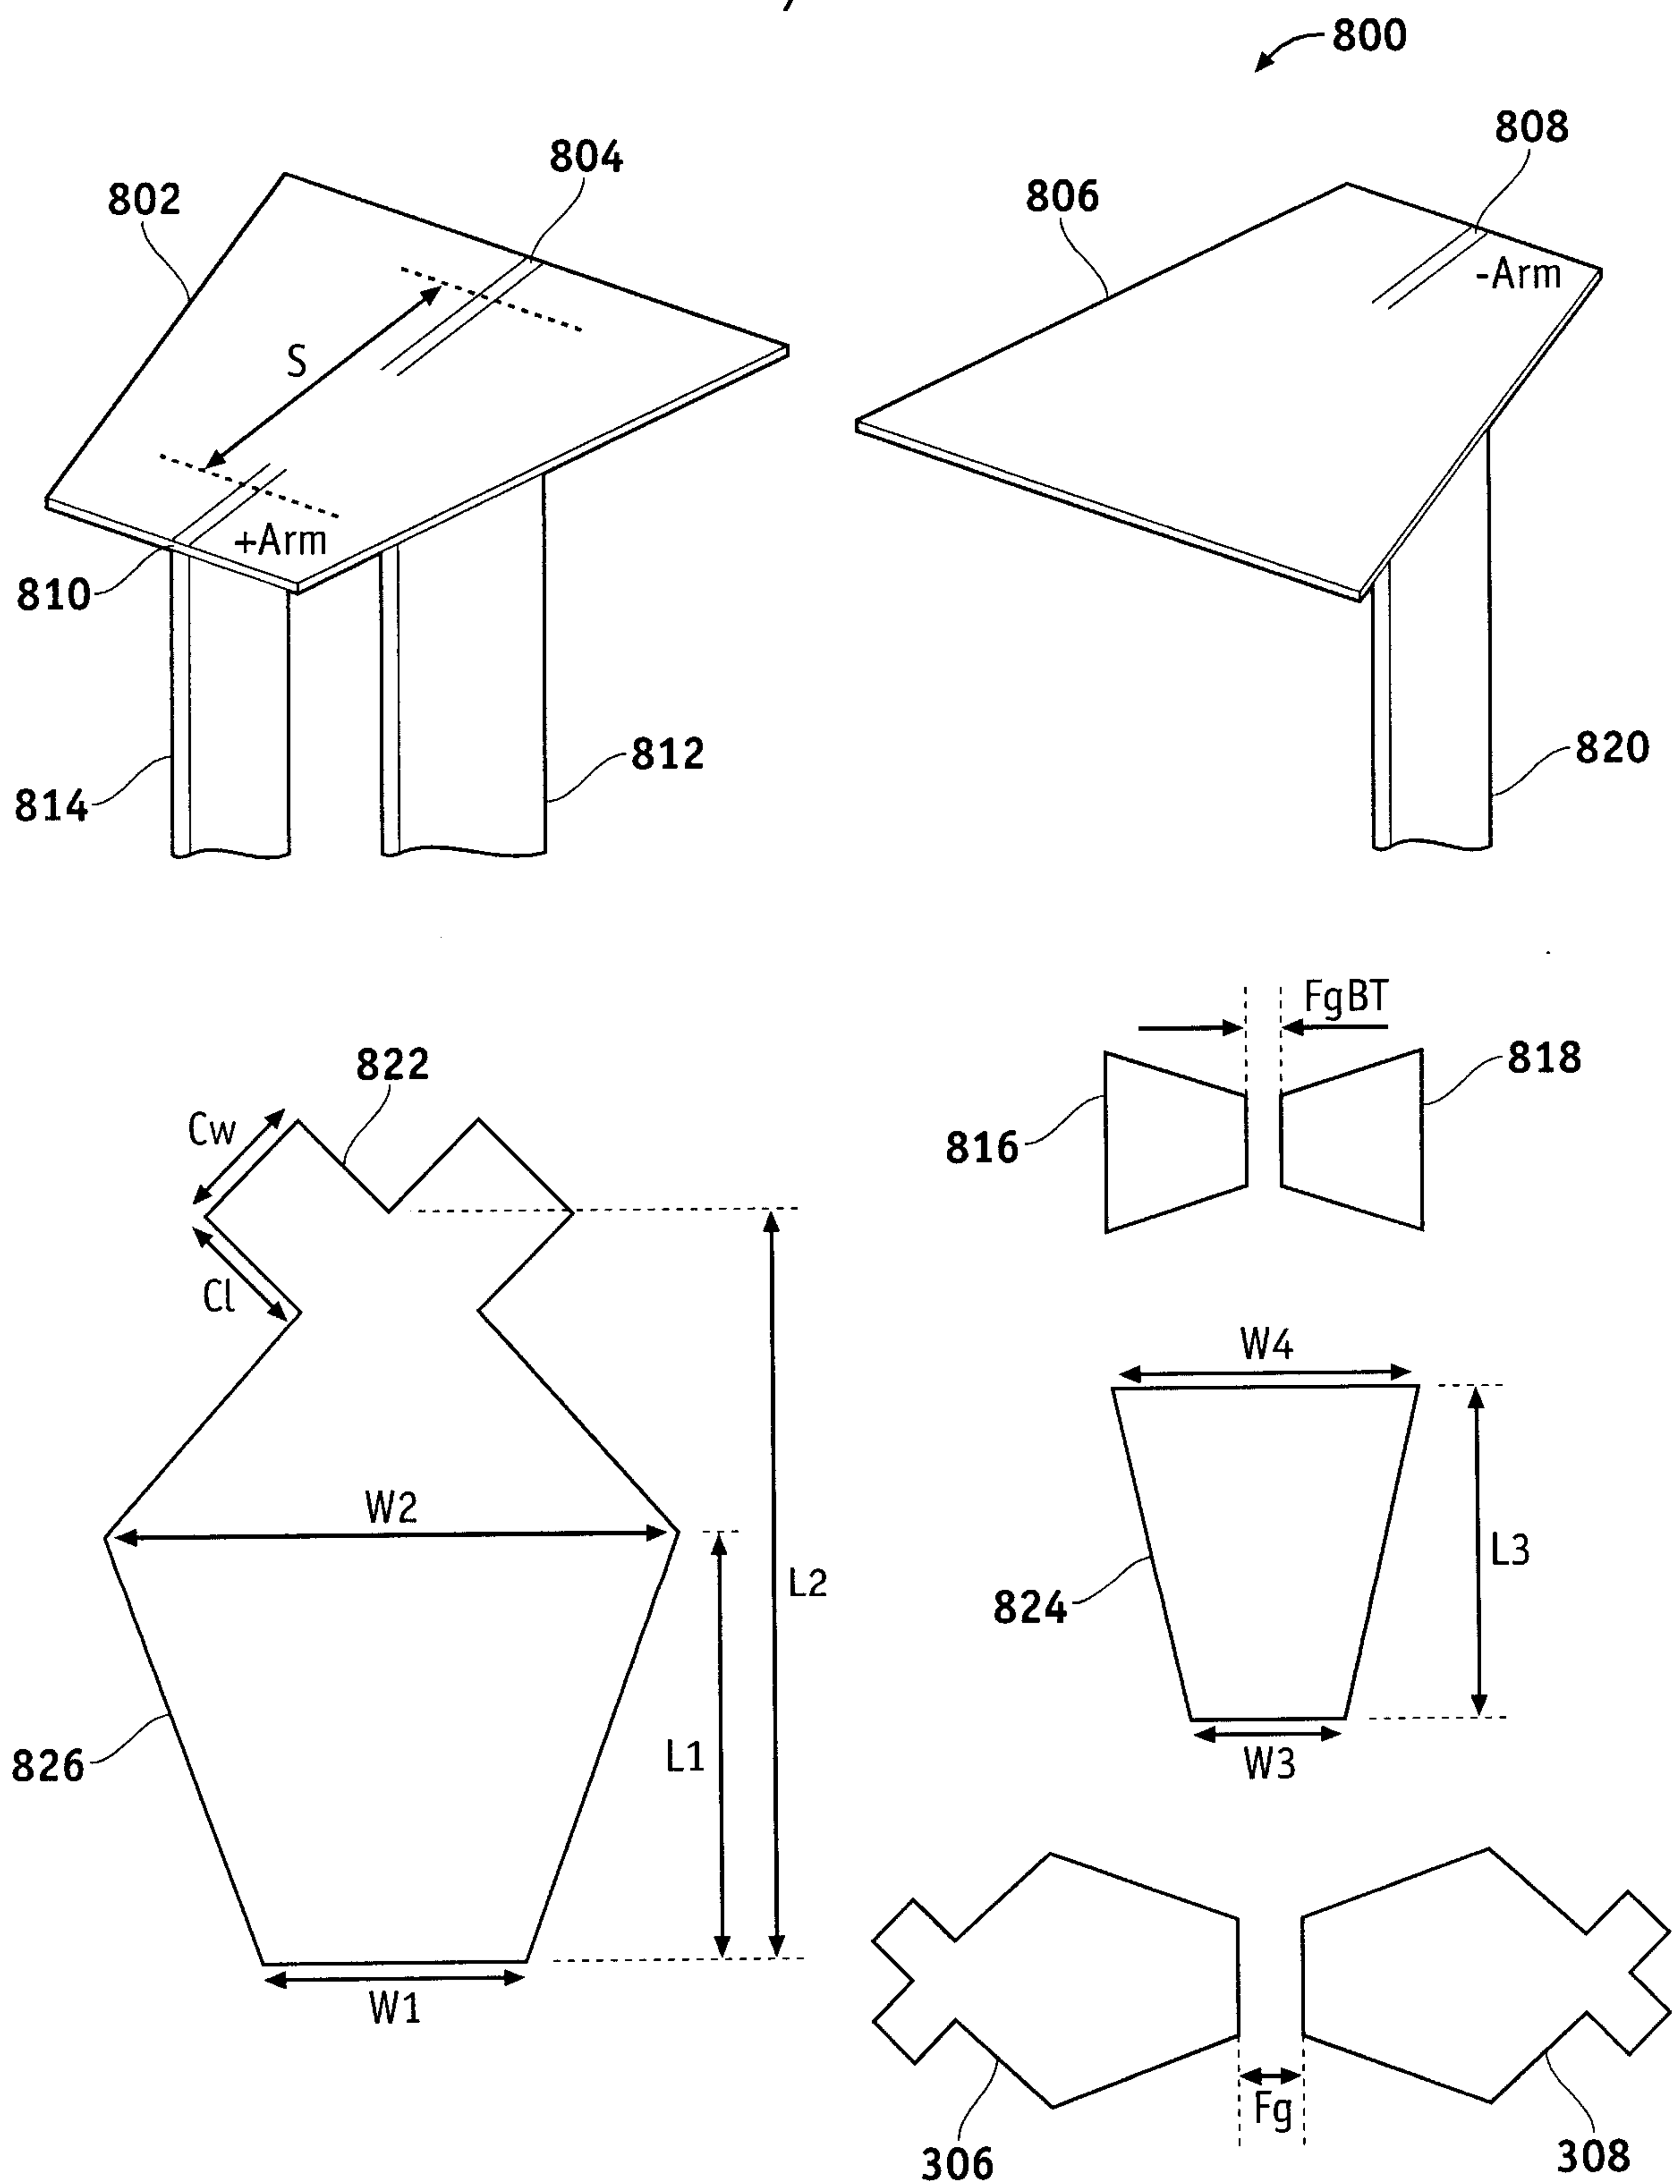
4/11

**FIG. 4**

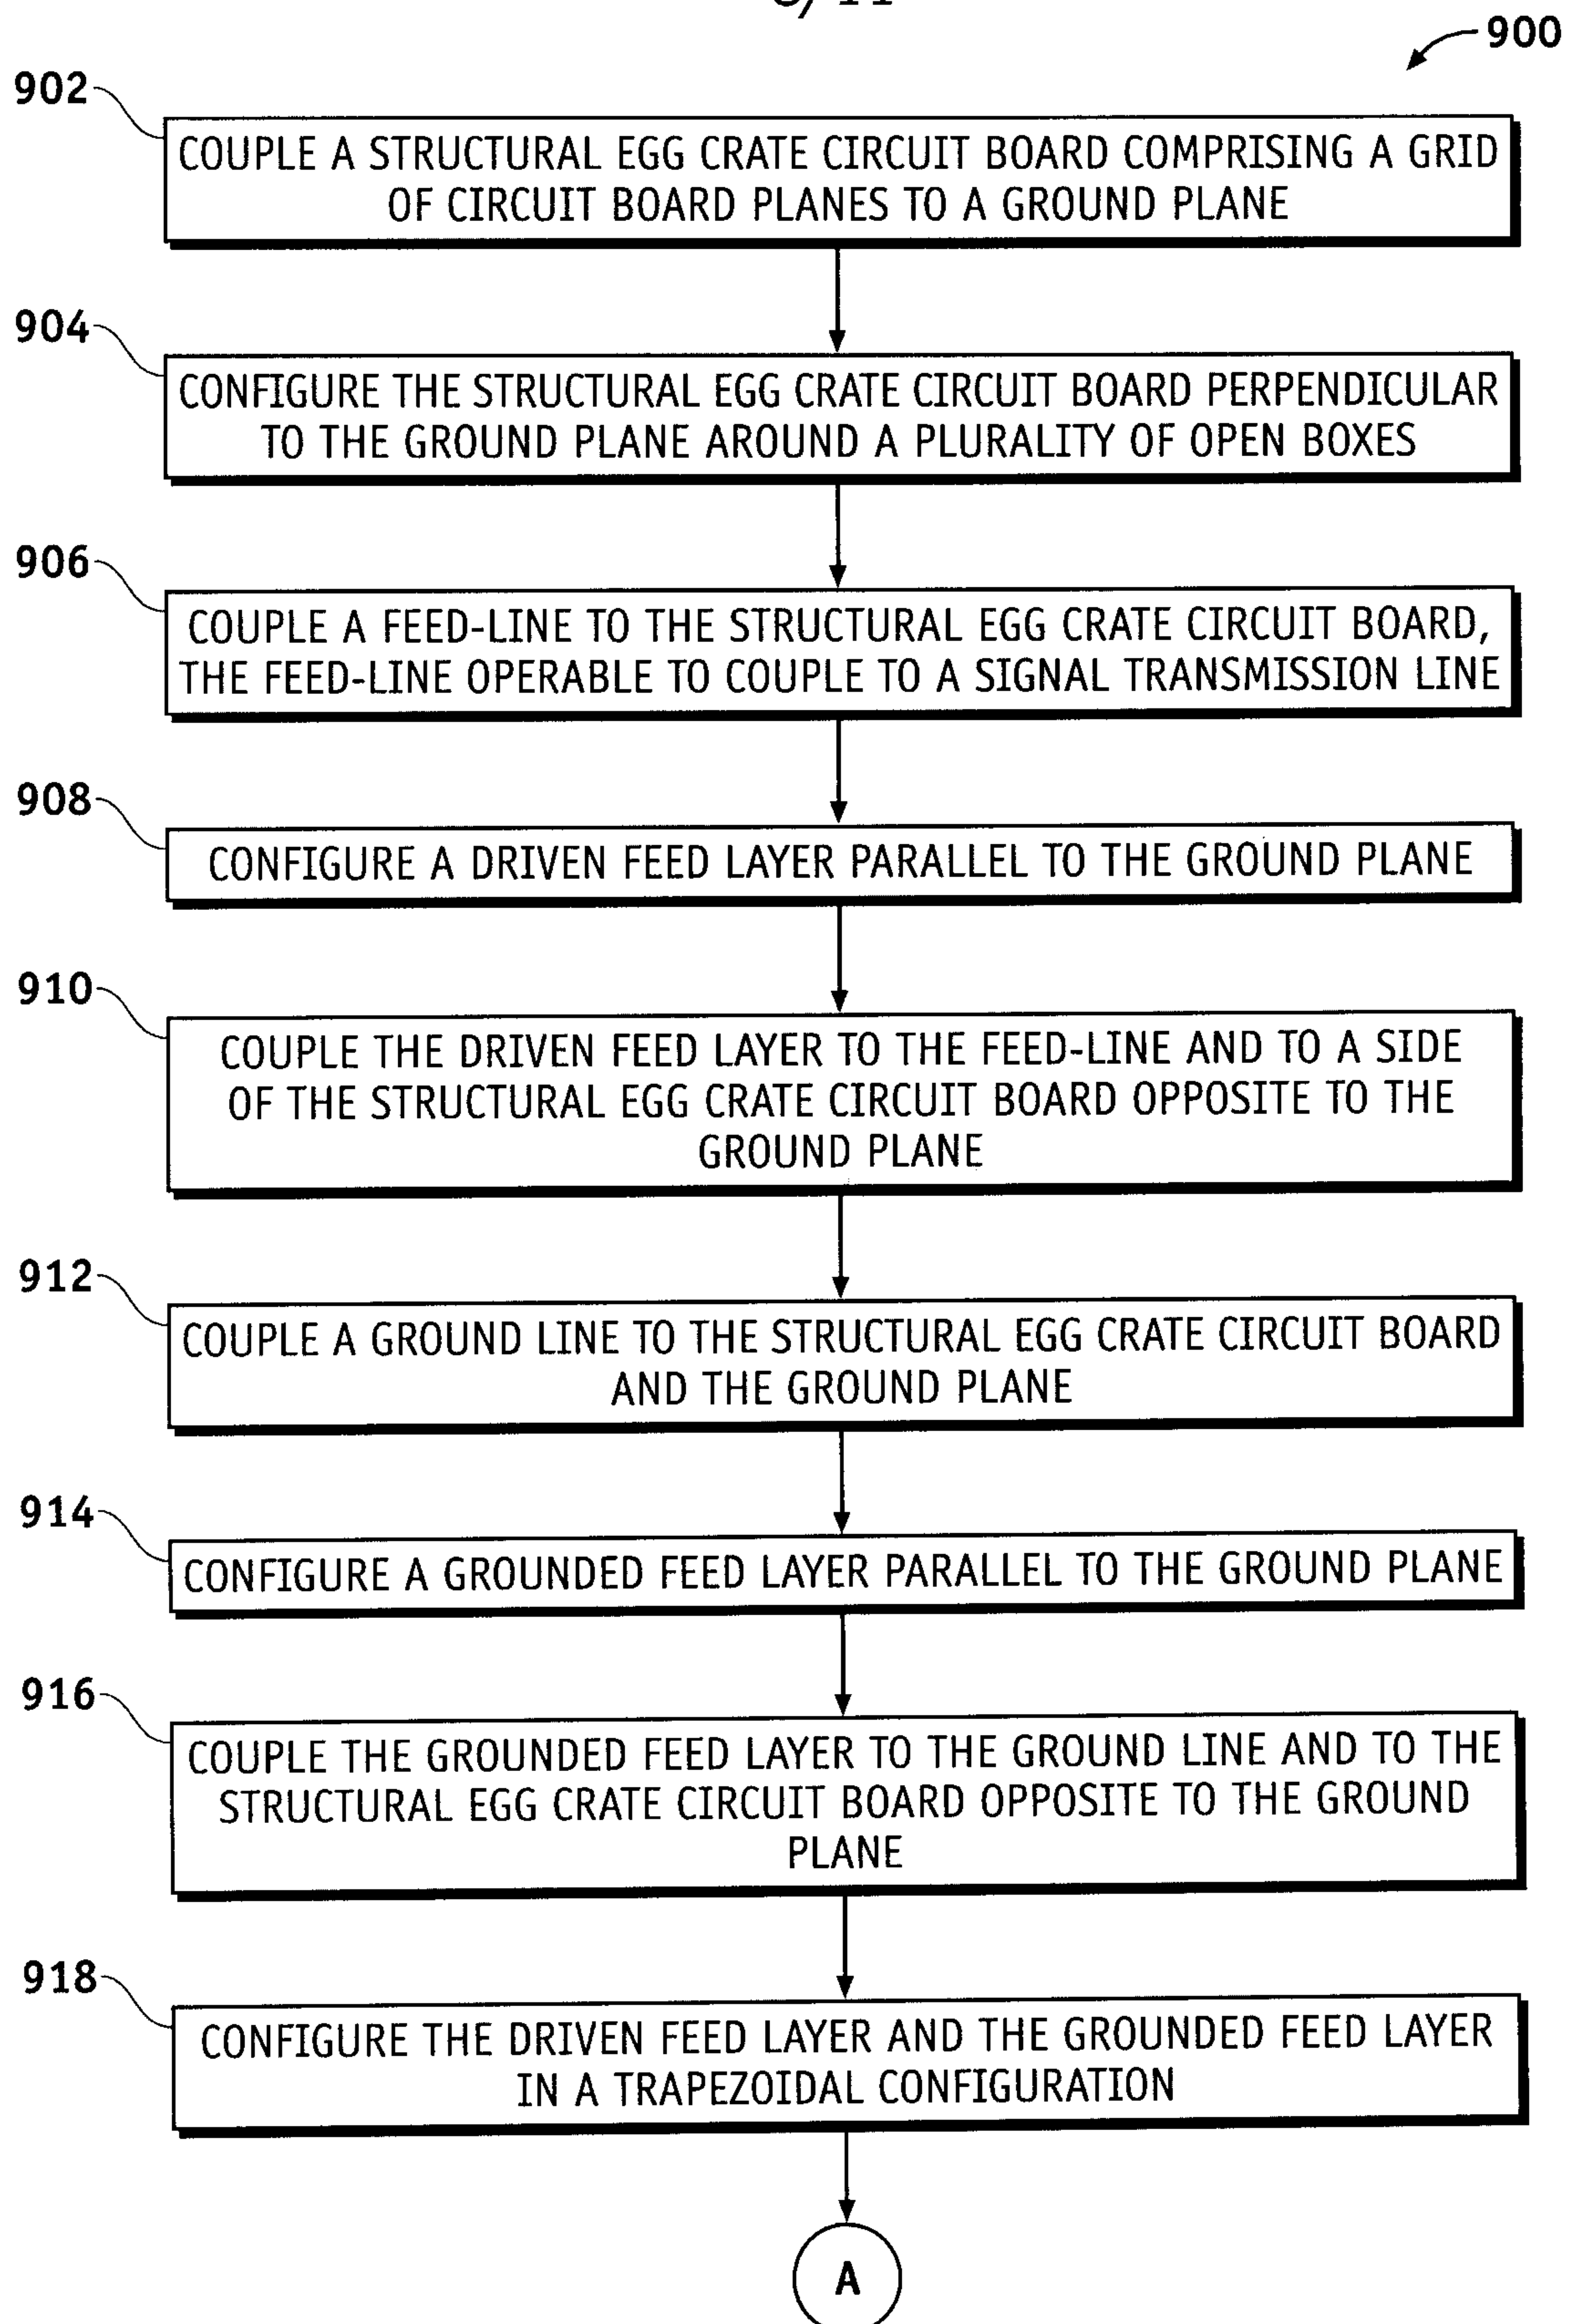
5/11

**FIG. 5****FIG. 6**

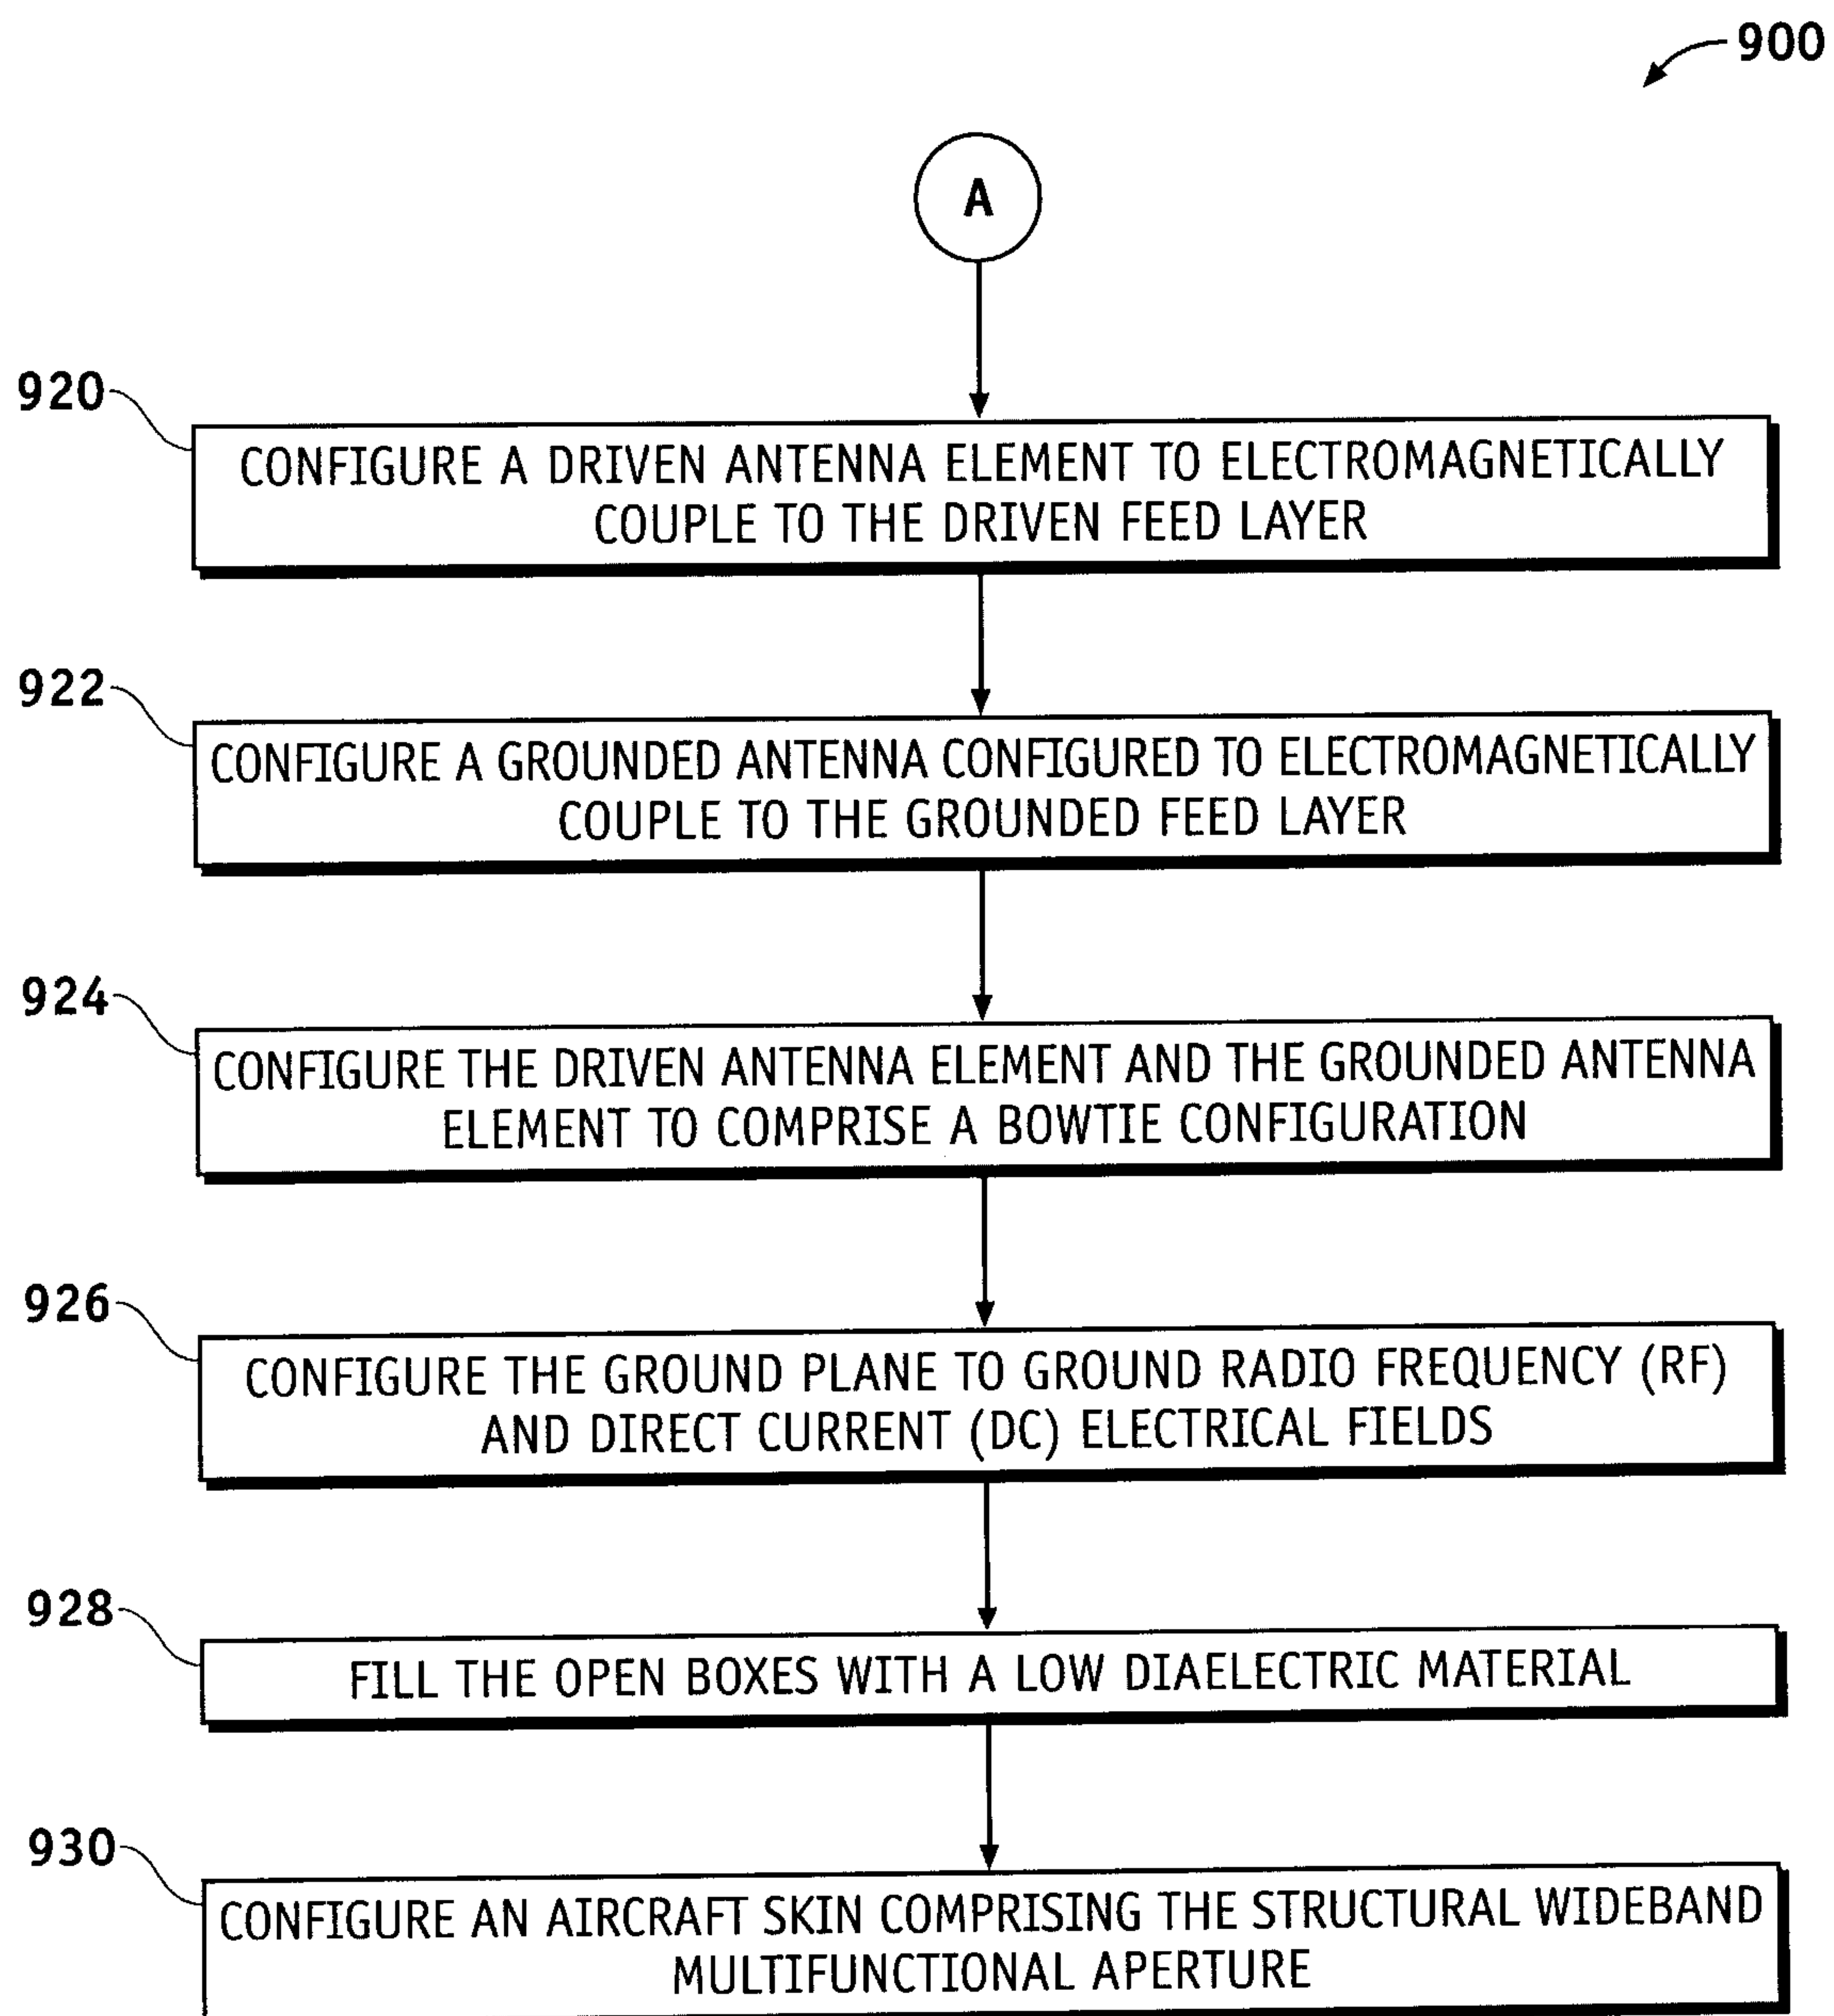
7/11

**FIG. 8**

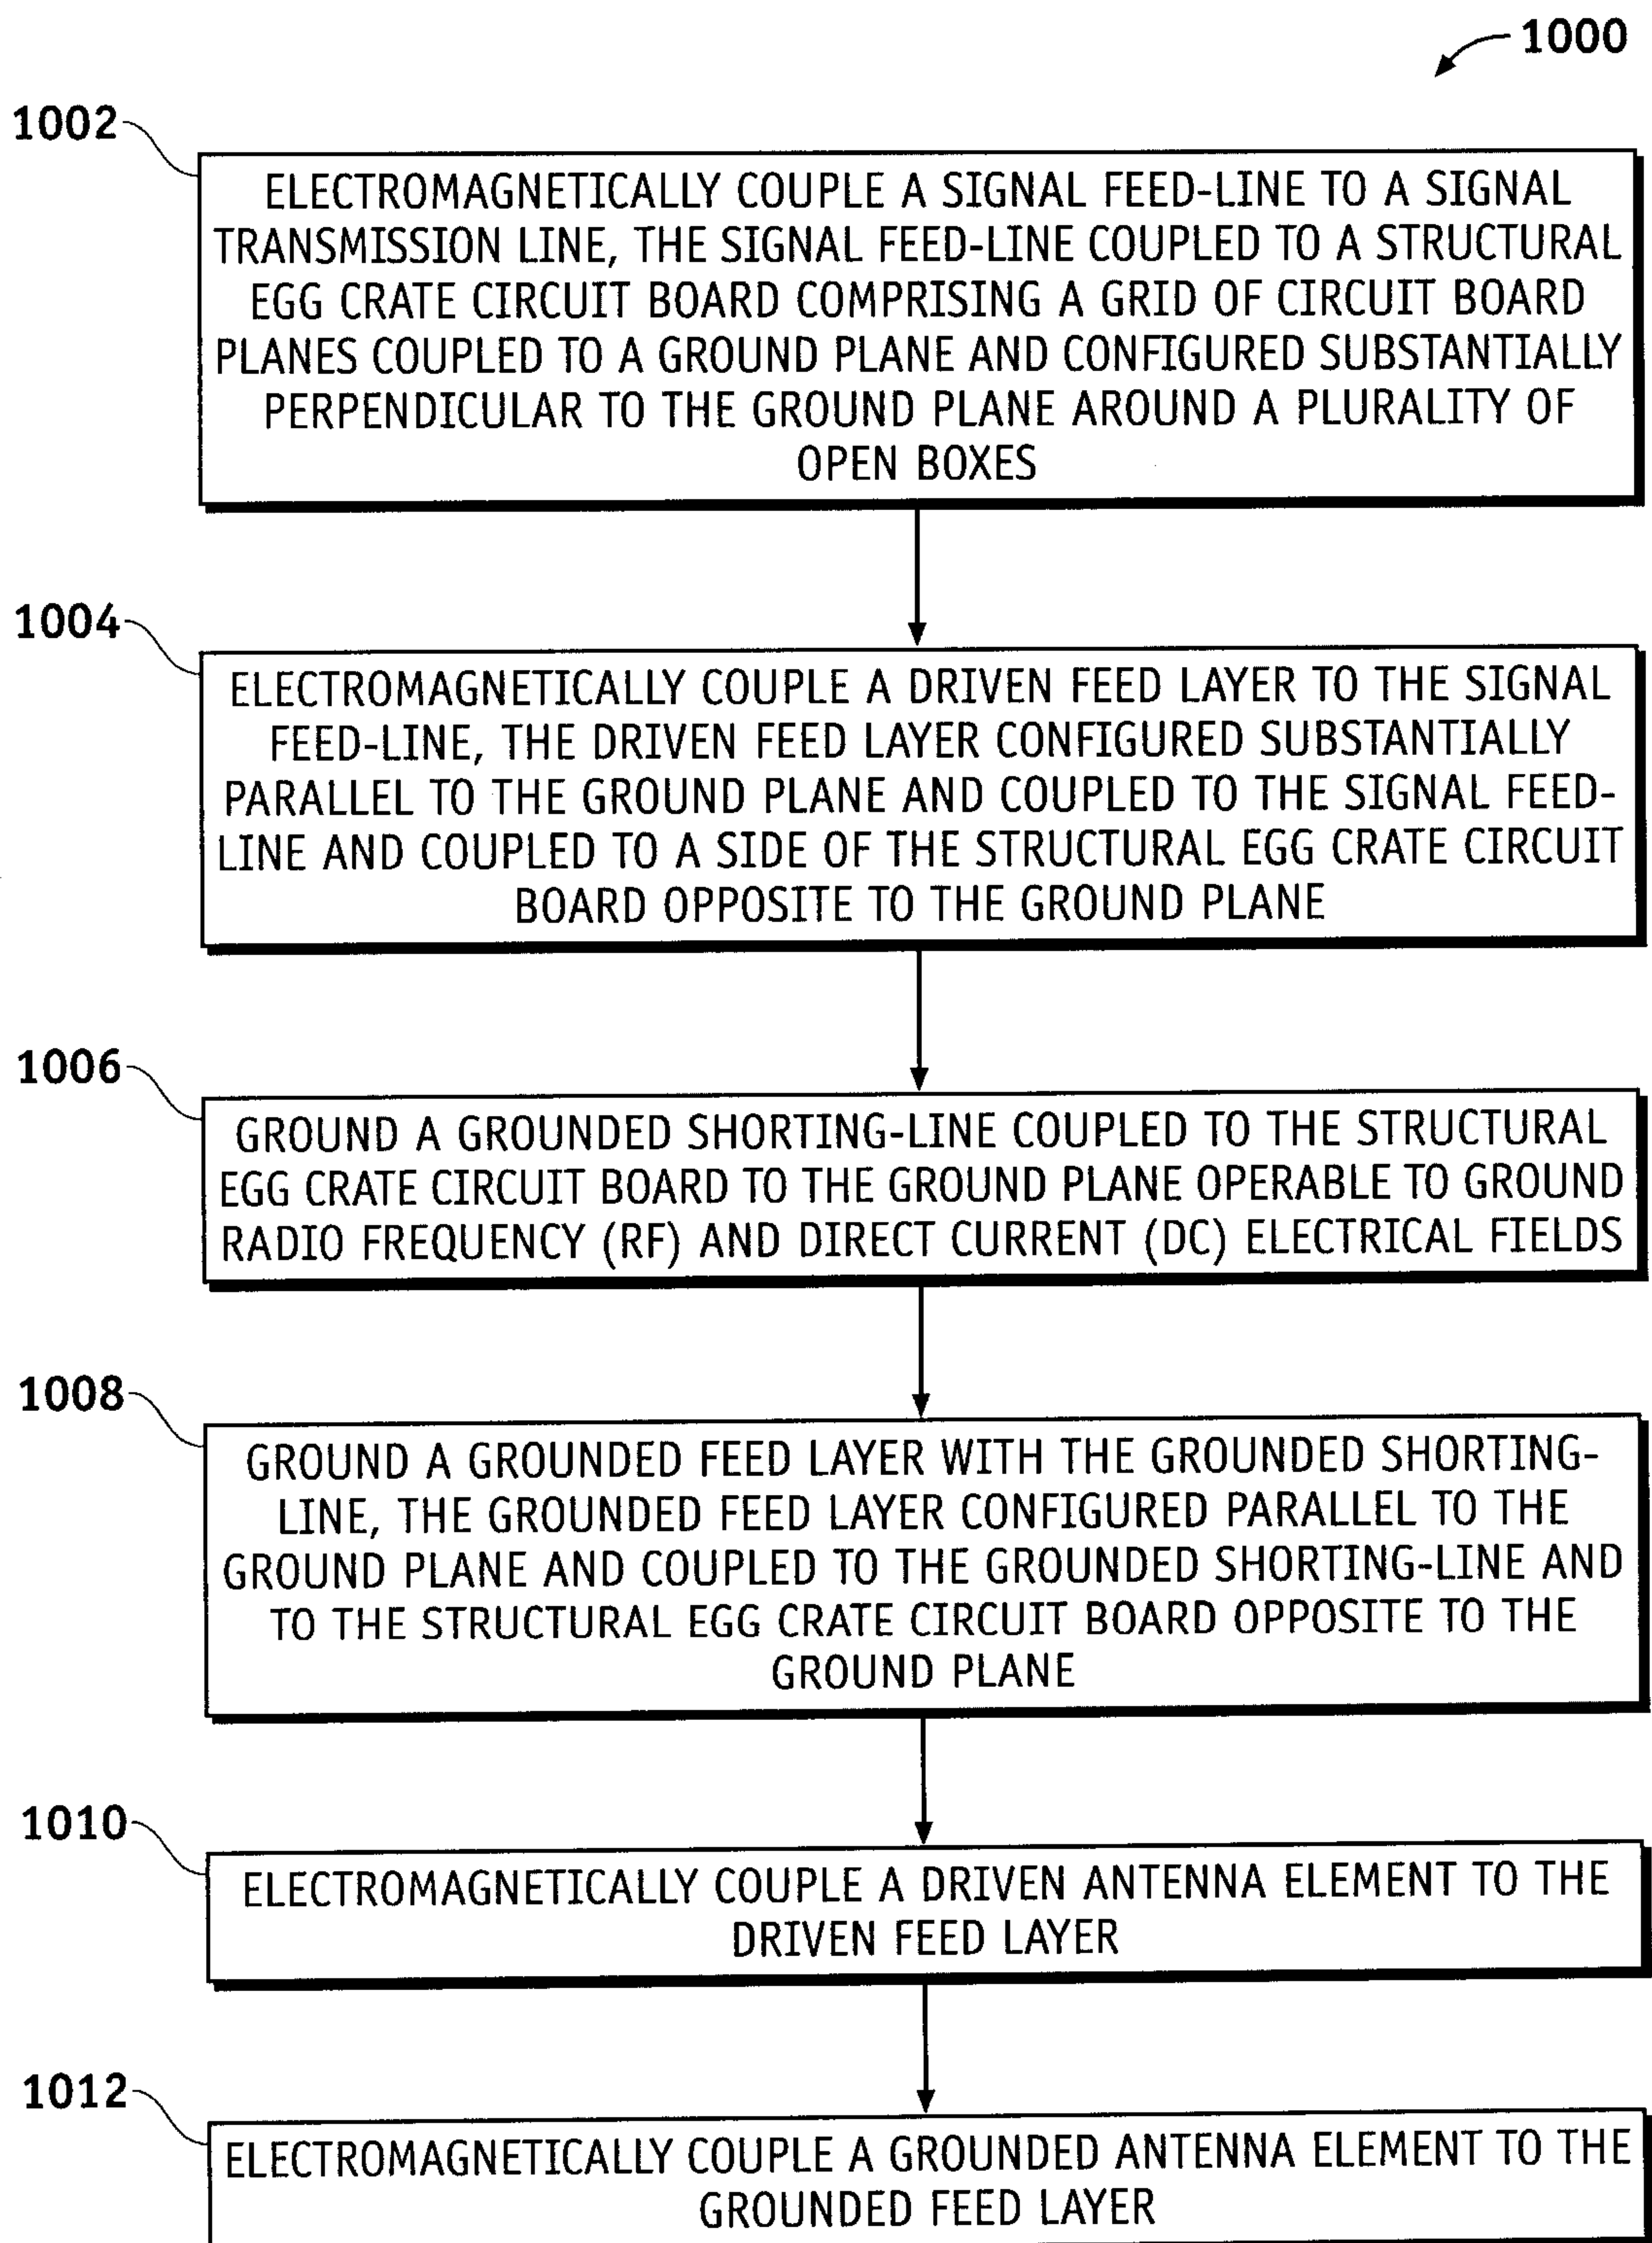
8/11

**FIG. 9**

9/11

**FIG. 9 Cont.**

10/11

**FIG. 10**

