



- (51) **International Patent Classification:**
H04W 24/06 (2009.01)
- (21) **International Application Number:**
PCT/GB2014/053848
- (22) **International Filing Date:**
24 December 2014 (24.12.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
201310721807.X 24 December 2013 (24.12.2013) CN
- (71) **Applicant:** RANPLAN WIRELESS NETWORK DESIGN LTD [GB/GB]; Hart Business Centre, Kimpton Road, Luton Bedfordshire LU2 0SX (GB).
- (72) **Inventors:** ZHANG, Jie; c/o Ranplan Wireless Network Design Ltd, Hart Business Centre, Kimpton Road, Luton Bedfordshire LU2 0SX (GB). SONG, Hui; c/o Ranplan Wireless Network Design Ltd, Hart Business Centre, Kimpton Road, Luton Bedfordshire LU2 0SX (GB). QIN, Chunxia; c/o Ranplan Wireless Network Design Ltd, Hart Business Centre, Kimpton Road, Luton Bedfordshire LU2 0SX (GB).
- (74) **Agent:** SLINGSBY PARTNERS LLP; 5 Chancery Lane, London Greater London EC4A 1BL (GB).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** AN AUTONOMOUS DETECTING AND POSITIONING METHOD OF INDOOR WIRELESS NETWORK FAULTS

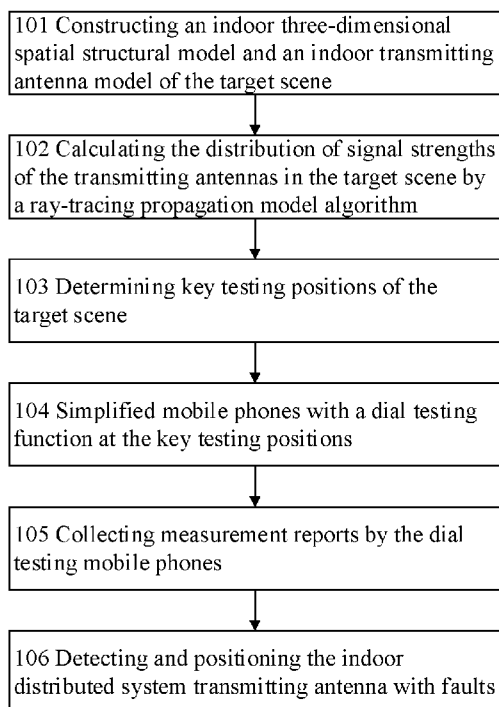


Figure 1

(57) **Abstract:** Method of autonomous detection and positioning method of indoor wireless network faults, the method comprising: building an indoor three-dimensional spatial structural model and an indoor transmitting antenna model of a target building, calculating the signal strength of the indoor transmitting antenna model inside the target building according to a ray-tracing propagation model algorithm to determine key testing positions of the target building, each key test position being associated to an individual transmitting antenna and maximizing the difference between the signal strength generated by its corresponding antenna and that generated by other antennas, deploying mobile phones with an automatic dial testing function at the key testing positions of indoor wireless networks and starting the dial testing mobile phones when the wireless networks are idle, collecting measurement reports reported by the dial testing mobile phones, detecting and locating faults of indoor networks and devices according to the measurement reports.





Published:

— *with international search report (Art. 21(3))*

AN AUTONOMOUS DETECTING AND POSITIONING METHOD OF INDOOR WIRELESS NETWORK FAULTS

Field of the invention

The present invention relates to an autonomous detecting and positioning method of indoor wireless network faults, which belongs to the field of indoor wireless network maintenance of mobile communication field.

Background of the invention

With the development of wireless communication technology and the increase of indoor data business, indoor wireless signal becomes more and more important, and indoor wireless networks become one of the principle ways to deal with indoor network coverage and shunt, or accept, the user's traffic flow. Therefore, to detect the faults of indoor wireless network devices in time is the premise of ensuring normal operations of the existing wireless communication networks and improving customer satisfaction. Under the current situation, the monitor rate of mobile operators on outdoor active devices can reach above 90%, while the monitor on passive devices of indoor wireless networks is just on its debut. On the one hand, this is due to the late starting of indoor networks relative to outdoor networks, on the other hand, this is also because that it is harder to monitor indoor passive devices, and a simple but effective monitor way is also lacked.

The frequently employed methods to monitor faults of indoor wireless networks mainly include artificial dial testing and periodic inspection, which not only takes a long period of time to inspect, but also cannot discover and locate the faults in time. Hubei Mobile has proposed to achieve the monitoring of faults of indoor passive devices by using a method that intelligently analyses, and positions the passive devices with faults by sensing the intensity of electromagnetic wave radiations of terminal antennas, and applying the technology of ZigBee Internet of things. However, although this method is reliable, it needs to build an additional wireless sensor network which costs a lot.

In conclusion, at present, a technical problem that needs to be solved urgently by persons skilled in the art is: how to achieve automatic detection and rapid positioning of indoor wireless network faults.

Summary of the invention

The purpose of the present invention is to solve the above problem, and provides an automatic detecting and positioning method of indoor wireless network faults, which has the advantage of achieving autonomous detecting and positioning of indoor wireless networks faults.

To achieve the above purpose, aspects of the present invention applies the following technical solution:

According to a first aspect of the present invention there is provided an autonomous detecting and positioning method of indoor wireless network faults, the method comprising: building an indoor three-dimensional spatial structural model and an indoor transmitting antenna model of a target building, calculating, in the indoor three-dimensional spatial structural model, the signal strength of the indoor transmitting antenna model inside the target building according to a ray-tracing propagation model algorithm to accordingly determine key testing positions of the target building, deploying mobile phones with an automatic dial testing function at the key testing positions of indoor wireless networks and starting the dial testing mobile phones when the wireless networks are idle, counting on-states of the dial testing mobile phones, collecting measurement reports reported by the dial testing mobile phones, judging faults of indoor networks and devices according to the on-states of the dial testing mobile phones and the measurement report reported by the dial testing mobile phones.

According to a second embodiment of the present invention there is provided a method for autonomous detecting and positioning of indoor wireless network faults, the method comprising: building an indoor three-dimensional spatial structural model and an indoor transmitting antenna model of a target building, calculating, in the indoor three-dimensional spatial structural model, the signal strength of the indoor transmitting antenna model inside the target building according to a ray-tracing propagation model algorithm to accordingly determine key testing positions of the target building, deploying wireless units with an automatic connection testing function at the key testing positions of indoor wireless networks and starting the connection testing wireless units when the wireless networks are idle, counting on-states of the

connection testing wireless units, collecting measurement reports reported by the connection testing wireless units, judging faults of indoor networks and devices according to the on-states of the connection testing wireless units and the measurement reports reported by the connection testing wireless units.

An autonomous detecting and positioning method of indoor wireless network faults, the method may comprise the following steps:

step (1): building an indoor three-dimensional spatial structural model and an indoor transmitting antenna model of a target building;

step (2): calculating the signal strength of the indoor transmitting antenna model in step (1) inside the target building by using a ray-tracing propagation model algorithm in the indoor three-dimensional spatial structural model;

step (3): determining key testing positions of the target building and reference signal strength that can be received by the dial testing mobile phones at the key testing positions, based on the calculation results in step (2);

step (4): deploying mobile phones with a timing automatic dial testing function at the key testing positions determined in step (3); the timing automatic dial testing function includes the automatic dial testing time, frequency, target objects or business of the user-defined mobile phones;

step (5): on network side, judging on-states of the dial testing mobile phones, collecting measurement reports reported by the dial testing mobile phones, and extracting respectively the measurement reports of the dial testing mobile phones that correspond to several transmitting antennas according to the automatic dial testing time and indications of the dial testing mobile phones in step (4);

step (6): judging transmitting antennas with faults according to the on-states of several dial testing mobile phones extracted in step (5), the reference signal strength information in the measurement reports, and the reference signal strength that can be received by the dial testing mobile phones at the key testing positions in step (3).

The construction process of the indoor three-dimensional spatial structural model in step (1) may comprise: three-dimensional modelling the CAD format drawings of the target building for each floor respectively, and storing separately the three-dimensional spatial construction data of each floor; the three-dimensional spatial construction data

includes the vertical heights of the floors, horizontal areas of the floors, data of the building materials of the floors and data of the layout and structures of the floors.

The construction process of the indoor transmitting antenna model in step (1) may be: recording and storing the data of all transmitting antennas inside the target building; the data of the transmitting antennas includes information of specific locations of the transmitting antenna in the target building and the three-dimensional radiation parameter, power, frequency and angle of the transmitting antenna.

Step (2) may include simulating respectively the signal strength of each of the transmitting antennas in the target building, and the specific procedure of calculating the signal strength using the ray-tracing propagation model algorithm is shown in steps (2-1)-(2-8).

Predicting out the signal strength of one transmitting antenna received at a receive point inside the target building by the ray-tracing propagation model algorithm, and the specific procedure may be as shown in (2-1)-(2-6):

step (2-1): according to the locations of the transmitting antennas and the receive points, determining all propagation paths of rays emitted from the transmitting antennas to the receive point i : N is the total number of the propagation paths from the transmitting antennas to the receive point i ;

step (2-2): calculating propagation losses of each of the propagation paths in the free space, wherein the propagation loss value of the k th path in the free space is $L_p(f, d_k)$ ($1 \leq k \leq N$), wherein f is signal frequency (MHz), d_k is the transmission distance (km) of the k th path in the free space; then the loss value (dB) of the k th path in the free space, regardless of transmission, reflection and diffraction, can be calculated by the following formula:

$$L_p(f, d_k) = 20\log_{10}(f) + 20\log_{10}(d_k) + 32.45$$

step (2-3): calculating the loss of each propagation path under the influence of building materials, wherein $L_{MAT}(f)$ is the total fading of the transmissions, reflections and diffractions caused by the building materials on the k th path; T is the total number of all building materials inside the target building, and the j th material is represented

as M_j ($1 \leq j \leq T$), δ_t , δ_d , δ_r are the correlation coefficients of whether there is transmission, reflection or diffraction between the wireless signal and the building materials on the k th path,

$$\delta_t = \begin{cases} 0, & \text{transmission of material } M_j \text{ does not exist} \\ 1, & \text{transmission of material } M_j \text{ exists} \end{cases}$$

$$\delta_d = \begin{cases} 0, & \text{diffraction of material } M_j \text{ does not exist} \\ 1, & \text{diffraction of material } M_j \text{ exists} \end{cases}$$

$$\delta_r = \begin{cases} 0, & \text{reflection of material } M_j \text{ does not exist} \\ 1, & \text{reflection of material } M_j \text{ exists} \end{cases}$$

in the database of the wireless propagation loss parameters of the building materials, $L_t(f, M_j)$, $L_d(f, M_j)$, $L_r(f, M_j)$ are respectively: the loss parameters of transmission, diffraction and reflection of the frequency corresponding to material M_j , when the wireless signal frequency is f ; then the total fading $L_{MAT}(f)$ of the transmissions, diffractions and reflections caused by the building materials on the k th path is calculated by the following formula:

$$L_{MAT}(f) = \sum_{j=1}^T (\delta_t * L_t(f, M_j) + \delta_d * L_d(f, M_j) + \delta_r * L_r(f, M_j))$$

step (2-4): calculating the propagation loss $L(f, d_k)$ of each of the propagation paths with the following formula:

$$L(f, d_k) = L_p(f, d_k) + L_{MAT}(f)$$

step (2-5): calculating the total loss PL(dB) of the propagation paths of N ray propagation paths to the i th point; since the energy of each ray propagation path is in linear relationship, the calculation of the loss of a plurality of propagation paths can start from the superposition of the energy of each ray (mW), followed by taking average and transforming the energy values into path loss values; the calculation formula of PL is as follows:

$$PL = 10 \lg \left(\frac{1}{N} \sum_{k=1}^N \left(10^{\frac{L(f, d_k)}{10}} \right) \right)$$

step (2-6): calculating the wireless signal strength at receive point i , assume that P_i is the signal strength (dBm) at the i th receive point; P_t is the transmitting power (dBm) of the wireless signal transmitting antenna; G_t and G_r are respectively the

antenna gains (dBi) of the wireless signal transmitting antenna and the receive point, then the signal strength P_i at the i th receive point is calculated by the following formula:

$$P_i = P_t - PL + G_t + G_r$$

step (2-7): selecting all other receive points in the scene, repeating step (2-1) to step (2-6) to accordingly obtain the wireless signal strength of one transmitting antenna at all receive points;

step (2-8): selecting other transmitting antennas of the indoor wireless networks, repeating step (2-1) to step (2-7) to accordingly obtain the wireless signal strength information of each of the wireless transmitting antennas in the scene.

the step (3) may comprise the following steps:

step (3.1): as regards the simulation results in step (2), selecting a horizontal plane at the same height with the transmitting antennas from the floors, sampling the field strength generated by each of the transmitting antennas respectively according to a preset sampling resolution, and storing the sampling results in a database;

assume that the number of the sampling points of the scene is m , wherein n transmitting antennas are provided, which are respectively recorded as $Tx1, Tx2, \dots, Txn$, then the sampling result is stored as a two-dimensional array of $m \times n$ (m lines and n columns); each line of data in the two-dimensional array records the field strengths of n transmitting antennas at one position, and the field strengths of n transmitting antennas at the i th position are recorded as $\vec{E}_i = [E_{i,1}, E_{i,2}, \dots, E_{i,n}]$, ($1 \leq i \leq m$), each column of data in the array records the field strengths of one transmitting antenna at m positions in the samples respectively, the field strengths of the p th transmitting antenna at m positions respectively are recorded as $[E_{1,p}, E_{2,p}, \dots, E_{m,p}]^T$; the sampling resolution must ensure that the number of the sampling points m is bigger than the number of the transmitting antennas n ($m > n$);

step (3.2): processing the data in the sampling results stored in step (3.1), searching n key testing positions from m positions, each of which corresponds to a transmitting antenna, the basis of searching key testing positions is to ensure that the difference between the signal strength generated by the transmitting antenna

corresponding to a key testing positions and that generated by other antennas is the biggest, assume that position i is the key testing position of the p th transmitting antenna, then, for any other positions q ($1 \leq q \leq m$), $q \neq j$, there is:

$$\min\{|E_{i,1} - E_{i,p}|, |E_{i,2} - E_{i,p}|, \dots, |E_{i,n} - E_{i,p}|\} \\ > \min\{|E_{q,1} - E_{q,p}|, |E_{q,2} - E_{q,p}|, \dots, |E_{q,n} - E_{q,p}|\}$$

that is, the minimum value of the difference between element $E_{i,p}$ and other elements

in $E_i = [E_{i,1}, E_{i,2}, \dots, E_{i,n}]$ is larger than that between element $E_{q,p}$ and other

elements in $E_q = [E_{q,1}, E_{q,2}, \dots, E_{q,n}]$, assume that $P_1, P_2, \dots, P_n$ are

respectively the key testing positions corresponding to the transmitting antennas $Tx_1,$

$Tx_2, \dots, Tx_n$, the value of $E_{i,p}$ represents the field strength of the p th transmitting

antenna at the key testing position i , which is recorded as $W_p = E_{i,p}$, and the field

strengths generated by transmitting antennas corresponding to the n key testing

positions are recorded as $\vec{W} = [W_1, W_2, \dots, W_n]$,

step (3.3): the signal strength $\vec{W}$ at n key testing positions is calculated via simulation in the correction step (3.2), and the correction process is to correct the signal strength at n key testing positions calculated via simulation according to the technical standards of the networks (GSM, CDMA, WCDMA, TD-SCDMA, TD-LTE, etc.), the ratio of the reference signal power in the total power that is set in the networks, and the gain of the receive antenna of the dial testing mobile phones, storing the correction results as the reference signal strength that can be received by the mobile phones at the key testing positions.

For example: if WCDMA technical standard is applied to the indoor wireless networks, the network reference signal (pilot signal) power takes 10% of the total signal power, and the receiver gain is 3dBi, then the field strength of the reference signal received

by mobile phones is $\vec{W'} = \vec{W} - 10\text{dB} + 3\text{dB}$

When information of the transmitting antenna changes within a region, it is necessary to recalculate the field strength generated by the transmitting antennas in the three-dimensional space according to step (2), recalculate the key testing positions of each

of the transmitting antennas according to step (3), and recalculate and store the reference signal strength received by the mobile phones at the key testing positions. The changes of the information of the transmitting antennas includes: adjustments to the transmitting antenna parameters, alternation of locations of the transmitting antennas or increases in number of the transmitting antennas.

The mobile phones in step (4), having an timing automatic dial testing function which is customized by the mobile phone manufacturer, may be supplied with electric power by connecting to wired power supply;

the user-defined settings in the step (4) is based on the distribution diagram of the telephone traffic in the target building over time, the automatic dial testing time is set when the networks are idle, the automatic dial testing frequency is set as once per day or a plurality of times per day, the target objects of dial testing are other testing mobile phones or internet servers, the business of dial testing is language business, data business or a combination of a plurality kinds of businesses. The type of dial testing may be speech, data or a combination of a plurality of speech and data.

The step (6) comprises the steps: judging the transmitting antenna with faults according to the on-states of n dial testing mobile phones corresponding to n key testing positions extracted in step (5), the reference signal strength information in the measurement reports, and the strength information $\vec{W}'$ of the reference signal received by the mobile phones at the testing positions stored in step (3.3), assume that the reference signal strength information of n dial testing mobile phones in the measurement reports is recorded as $\vec{Me} = [Me_1, Me_2, \dots, Me_n]$, then the reference signal strength information received by the mobile phones in normal situations at n key testing positions is recorded as $\vec{W}' = [W'_1, W'_2, \dots, W'_n]$, calculate the value of $\Delta_p = |Me_p - W'_p|$, $1 \leq p \leq n$, wherein, Δ_p represents the difference value between the reference signal strength information Me_p actually measured by the dial testing mobile phones and the reference signal strength information W'_p theoretically received by the dial testing mobile phones, at a key testing position p ; the transmitting antenna T_{xp} corresponding to the dial testing mobile phone p is considered to have

faults if Δp exceeds a certain threshold value Δ for H times consecutively and/or the mobile phone p has problems in getting through for I times consecutively.

The number of times H that Δp exceeds the threshold, the number of times I that the mobile phone has problems in getting through and the threshold Δ can all be set by oneself according to the requirements to the indoor wireless networks of the scene, the fluctuation situation of $\vec{w}$ and how difficult the inspection and maintenance of the scene is.

The advantageous effects of this invention:

1. This method demands neither the network maintenance staff to measure on site, nor to construct additional wireless networks, but requires only to deploy dial testing mobile phones at the key testing positions of the indoor wireless networks, and the location where a fault occurs can be accurately positioned by analyzing the on-states and measurement reports of the dial testing mobile phones. Comparing with traditional methods of positioning and detecting network faults, this method saves more human costs and resource costs.
2. The method of obtaining the signal strength of the target building in step (1) and step (2) applies the ray-tracing propagation model to predict via simulation, this method is advantageous in establish field strengths in that the establishment process is rapid while the result is accurate.
3. The selection of key testing positions of the antennas in step (3) is based on the signal strength predicted in step (2), therefore when the signal strength changes, the key testing positions of the antennas should also change accordingly, in general, slightly changes of the antenna parameter do not require to recalculate key testing positions, but require only subtle corrections and adjustments to the reference signal strength received by the mobile phones at the key testing positions.

4. The autonomous detecting method of network faults proposed in this invention can discover network faults and replace the wireless network devices of similar index in time, reducing to a largest extent the influences of faults of the room separator upon the performance of indoor wireless networks. And the method herein can continue to be used to perform autonomous detecting and positioning of network faults without recalculating key testing positions and the reference signal strength received by the mobile phones at the key testing positions after replacing the wireless network devices with similar index.

Brief description of the drawings:

Figure 1 is the autonomous detecting and positioning method of indoor wireless network faults proposed in the present invention;

Figure 2 shows the three-dimensional spatial structural model of a target building and the positions of the indoor transmitting antennas;

Figure 3 is a diagram of three propagation paths of the ray emitted by a left WCDMA antenna that can be received at point i;

Figure 4 is a distribution diagram of the key testing positions of the three transmitting antennas on the first floor of the building.

Detailed description of the invention

The present invention will be further described in combination with the figures and embodiment.

An autonomous detecting and positioning method of indoor wireless network faults of this invention is applied to autonomously detect and position the faults of the WCDMA indoor wireless network in a target building of 5 floors (the floorage of each floor is 600 m²). The WCDMA indoor wireless networks in the target building belong to a same cell, and have 15 indoor wireless network transmitting antennas in total, 3 for each floor, which are arranged above the 2.4 meters high ceilings.

The technical solution this invention is not limited to WCDMA networks, but can also be applied to one or a combination of multiple other wireless communication networks (wireless wide area network and wireless local network).

As shown in Fig. 1, a method of rapidly establishing fingerprint database of indoor wireless signals comprises the following steps:

(1): 101 - building an indoor three-dimensional spatial structural model and an indoor transmitting antenna model of a target building. Building the indoor three-dimensional spatial structural model of the target building comprises: three-dimensional modeling the CAD format drawings of the target building for each floor respectively, according to the CAD format drawings of the target building and the existing modeling technology, storing separately the three-dimensional spatial construction data of each floor; the three-dimensional construction data in this embodiment includes: the vertical height of a floor is 3 meters, the horizontal area of a floor is 600 m², the building materials of the floors include brick wall, concrete wall and wooden doors, the layout of the floors is shown in Fig. 2. The transmitting antenna model in this embodiment includes: the horizontal position of the transmitting antennas is shown in Fig. 2, the transmitting antennas are positioned above the ceiling of a vertical height of 2.4 meters, the transmitting antennas (Tx1, Tx2, Tx3) are 3dBi omnidirectional antennas, the transmitting power of the transmitting antenna is 20dBm, the signal frequency of the transmitting antenna is 2100MHz, and the down tilt angle of the transmitting antenna is 5 degrees. Fig. 2 shows the plane structure of the three-dimensional spatial model of the first floor of the target building according to the CAD drawings thereof, and the positions of WCDMA indoor wireless network transmitting antennas in the plane diagram.

(2): 102 - calculating, in the indoor three-dimensional spatial structural model, the signal strength of the transmitting antenna in step (1) inside the target building by using a ray-tracing propagation model algorithm; the calculation process via simulation includes simulating respectively the signal strength of each of the transmitting antennas in the target building, the specific procedure is shown in steps (2-1) to (2-8).

Predicting the signal strength of one transmitting antenna received at a receive point inside the target building by using the ray-tracing propagation model algorithm, the specific procedure is shown in (2-1)-(2-6):

(2-1): according to positions of the left WCDMA wireless transmitting antenna (Tx1) in the indoor wireless networks and the receive point i, determining all propagation paths of the rays emitted from the left WCDMA wireless transmitting antenna of the indoor wireless networks to the receive point i, the propagation paths comprising: N=3 ray propagation paths, ray path a, ray path b and ray path c; as shown in Fig. 3.

Wherein, ray path a reaches the receive point i after being reflected by and penetrate the concrete walls; ray path b reaches the receive point i after penetrating the concrete walls and brick walls; ray path c reaches the receive point i after penetrating the wooden doors and brick walls, and reflected by the concrete walls;

(2-2): calculating the propagation loss of each of the propagation paths in the free space, and the path lengths of the above ray path a, ray path b and ray path c are respectively 6.6 meters, 5.2 meters and 7.1 meters, the transmitting frequency of the wireless signal is 2.1 GHz;

wherein the value of propagation loss of the kth path in the free space is $L_p(f, d_k)$ ($1 \leq k \leq 3$), f is the wireless signal frequency (MHz), d_k is the transmission distance (km) of the kth path in the free space; then the loss value of the kth path in the free space, regardless of transmission, reflection and diffraction, is calculated by the following formula:

$$L_p(f, d_k) = 20\log_{10}(f) + 20\log_{10}(d_k) + 32.45$$

According to this formula, the loss values of the above three ray paths a, b and c in the free space are respectively calculated as 55.29dB, 53.21dB and 55.92dB.

(2-3): calculating the loss of each ray path under the influence of building materials, wherein $L_{MAT}(f)$ represents the total fading of the transmissions, reflections and diffractions caused by the building materials on the kth path; T is the total number of

all building materials in the target building, and the j th material is represented as M_j ($1 \leq j \leq T$), δ_t , δ_d , δ_r respectively represent the correlation coefficients of whether there is transmission, reflection or diffraction between the wireless signals on the k th path and the building materials,

$$\delta_t = \begin{cases} 0, & \text{transmission of material } M_j \text{ does not exist} \\ 1, & \text{transmission of material } M_j \text{ exists} \end{cases}$$

$$\delta_d = \begin{cases} 0, & \text{diffraction of material } M_j \text{ does not exist} \\ 1, & \text{diffraction of material } M_j \text{ exists} \end{cases}$$

$$\delta_r = \begin{cases} 0, & \text{reflection of material } M_j \text{ does not exist} \\ 1, & \text{reflection of material } M_j \text{ exists} \end{cases}$$

in the database of parameters of wireless propagation loss of the building materials, $L_t(f, M_j)$, $L_d(f, M_j)$, $L_r(f, M_j)$ are respectively: the loss parameters of the transmission, diffraction and reflection of the frequency corresponding to material M_j , when the wireless signal frequency is f ; then the total fading $L_{MAT}(f)$ of the transmissions, diffractions and reflections caused by building materials on the k th path is calculated by the following formula:

$$L_{MAT}(f) = \sum_{j=1}^T (\delta_t * L_t(f, M_j) + \delta_d * L_d(f, M_j) + \delta_r * L_r(f, M_j))$$

According to the database of the wireless propagation loss parameters of the building materials, when the frequency of wireless signal is 2.1 GHz, the transmission loss of brick walls, concrete walls and wooden doors are respectively 6.77 dB, 20.25 dB and 4.44dB, the reflection loss of concrete walls is 6dB, and according to the formula

$$L_{MAT}(f) = \sum_{j=1}^T (\delta_t * L_t(f, M_j) + \delta_d * L_d(f, M_j) + \delta_r * L_r(f, M_j))$$

the loss of path a equals to the reflection loss plus the transmission loss of the concrete walls; the loss of path b equals to the transmission loss of the concrete walls plus that of the brick walls; the loss of path c equals to the transmission losses of the wooden doors and the brick walls plus the reflection loss of the concrete walls; the losses of the above three ray paths a, b and c under the influence of building materials are calculated respectively as: 26.25dB, 27.02dB and 17.21dB;

(2-4): calculating the propagation loss $L(f, d_k)$ of each propagation path by the following formula:

$$L(f, d_k) = L_P(f, d_k) + L_{MAT}(f)$$

According to this formula, the propagation losses $L(f, d_k)$ of the above three ray paths a, b and c to the receive point i are calculated as 81.54dB、80.23dB、73.13dB.

(2-5): calculating the total loss $PL(dB)$ of the $N=3$ ray propagation paths to the ith point; since the energy of each ray propagation path is in linear relationship, the calculation of losses of a plurality of propagation paths can start from the superposition of the energy (mW) of each ray, followed by taking average and transforming the energy value into path loss value; the calculation formula of PL is as follow:

$$PL = 10 \lg \left(\frac{1}{N} \sum_{k=1}^N \left(10^{\frac{L(f, d_k)}{10}} \right) \right)$$

The total losses of the above three ray paths is calculated and obtained: $PL=79.52dB$.

(2-6): calculating the wireless signal strength at the receive point i, assume that P_i is the signal strength (dBm) at the ith receive point; P_t is the transmitting power (dBm) of the wireless signal transmitting antenna; G_t and G_r are respectively the antenna gains (dBi) of the wireless signal transmitting antenna and the receive point, then the signal strength P_i at the ith receive point is calculated by the following formula:

$$P_i = P_t - PL + G_t + G_r$$

Since step (1) records that the antenna gains of the wireless transmitting antennas and the receive point i are all 3dBi, the transmitting power of the wireless transmitting antenna is 20dBm, therefore the wireless signal strength P_i at the receive point i is calculated as $P_i = -53.52dBm$ according to this formula;

(2-7): selecting all other receive points in the scene, repeating step (2-1) to step (2-6) to obtain the wireless signal strength of one transmitting antenna at all receive points.

(2-8): selecting other transmitting antennas of the indoor wireless network, repeating step (2-1) to step (2-7) to obtain the strength information of wireless signal of each wireless transmitting antenna in the scene.

(3): 103 - determining key testing positions of the target buildings according to the simulation results in step (2). The method of determining the key testing positions of the target building comprises the following steps:

(3.1): as regards the simulation results in step (2), selecting a plane at the same height with the transmitting antennas from the floors, which is 2.4 meters in this embodiment, selecting accordingly the height of 2.4 meters as the sampling plane and sampling respectively, by a resolution of 1 meter, the field strength generated by 15 transmitting antennas in this embodiment, since the floorage of each floor of the scene is 600 m², and the overall floorage is 3000m², therefore the number of sampling points of the scene is 3000, and the sampling result can be stored as a two-dimensional array of 3000×15 (3000lines and 15 columns), wherein each line of data thereof records the field strengths of 15 transmitting antennas at one position, the field strength of the 15 transmitting antennas at the *i*th position is recorded as $\vec{E}_i = [E_{i,1}, E_{i,2}, \dots, E_{i,15}]$, ($1 \leq i \leq 3000$), each column of data records the field strength of one transmitting antenna at the 3000 positions of the samples, the field strength of the *p*th transmitting antenna respectively at the 3000 positions is recorded as

$$[E_{1,p}, E_{2,p}, \dots, E_{3000,p}]^T, (1 \leq p \leq 15).$$

(3.2): processing the data in the stored sampling results in step (3.1), searching *n* key testing positions from *m* positions, each of which corresponds to a transmitting antenna, the basis of searching key testing positions is to ensure that the difference between the signal strength generated by the transmitting antenna corresponding to a key testing position and that generated by other antennas is the biggest, assume that *i* position is the key testing position of the *p*th transmitting antenna, then, for any other positions $q | 1 \leq q \leq 3000, q \neq i$, there is:

$$\min\{|E_{i,1} - E_{i,p}|, |E_{i,2} - E_{i,p}|, \dots, |E_{i,15} - E_{i,p}|\} \\ > \min\{|E_{q,1} - E_{q,p}|, |E_{q,2} - E_{q,p}|, \dots, |E_{q,15} - E_{q,p}|\}$$

that is, the minimum value of the difference between element $E_{i,p}$ and other elements

in $\vec{E}_i = [E_{i,1}, E_{i,2}, \dots, E_{i,15}]$ is larger than that between $E_{q,p}$ and other elements

in $\vec{E}_q = [E_{q,1}, E_{q,2}, \dots, E_{q,15}]$. As shown in Fig. 4, P1, P2 and P3 are key testing positions respectively correspond to the 3 transmitting antennas Tx1, Tx2 and Tx3 on the first floor of the building, the value of element $E_{i,p}$ is recorded as the signal strength of the pth transmitting antenna at the key testing position i, which is recorded as: $W_p = E_{i,p}$, the field strengths of the transmitting antennas at 15 key testing positions are recorded as $\vec{W} = [W_1, W_2, \dots, W_{15}]$.

(3.3): correcting the signal strengths $\vec{W}$ at 15 key testing positions that are calculated via simulation in step (3.2), since WCDMA technical standard is applied to the indoor wireless networks, the power of network reference signal (pilot signal) takes 10% of the total signal power, and the receiver gain is 3dBi, then the field strength of the reference signal received by the mobile phones is $\vec{W}' = \vec{W} - 10\text{dB} + 3\text{dB}$.

(4): 104 - deploying simplified mobile phones with dial testing function at the 15 determined key testing positions in step (3), the mobile phones having the timing autonomous dial testing function which may be customized by the mobile phone manufacturer are supplied with electric power by a wired power supply, the timing autonomous dial testing function includes that the user can define the automatic dial testing time, frequency, target object and service type, the basis of the user-defined settings is the distribution diagram of the telephone traffic in the target building over time, the automatic dial testing time is set when the networks are idle, the automatic dial testing frequency is set as once per day or a plurality of times per day, the target objects of dial testing are other testing mobile phones or Internet servers, the service type of dial testing is voice call, data connection or a combination of a plurality kinds of services. In other words the dial testing may use speech-type traffic, data-type traffic or a combination of a plurality of traffic types. The timing automatic dial testing function may be that the mobile phone has a timer for initiating the autonomous dial

testing function. In this embodiment, according to the statistical diagram of the telephone traffic in the building, the lowest telephone traffic appears in 3 o'clock in the morning, and the automatic dial testing frequency is set as once per day at 3 o'clock am, and the automatic dial testing function of the 15 dial testing mobile phones is activated in order and respectively to dial voice calls to a certain testing mobile phone.

(5): 105 - on network side, judging on-states of the dial testing mobile phones, collecting measurement reports on the mobile phones, and extracting respectively the measurement reports of the dial testing mobile phones that correspond to the 15 transmitting antenna, according to the dial testing time set in step (4), the indications of the cell where the indoor wireless networks locate and the indications of the dial testing mobile phones.

(6): 106 - judging the transmitting antennas with faults according to the on-states of 15 dial testing mobile phones extracted in step (5), the reference signal strength information in the measurement reports, and the reference signal strength information $\overline{w'}$ received by the mobile phones at the key testing positions stored in step (3.3), assume that the reference signal strength information of 15 dial testing mobile phones

in the measurement reports is recorded as $\overline{M} = [Me_1, Me_2, \dots, Me_{15}]$, then the reference signal strength information received by the mobile phones in normal

situations at 15 key testing positions is recorded as $\overline{w'} = [w'_1, w'_2, \dots, w'_{15}]$,

calculate the value of $\Delta_p = |Me_p - w'_j|$, ($1 \leq p \leq 15$), the transmitting antenna Txp

corresponding to the dial testing mobile phone p is considered to have faults if Δ_p

exceeds a certain threshold value Δ for H times consecutively and/or the mobile phone p has problems in getting through for I times consecutively. Preferably, the

present invention applies the threshold of $\Delta = 7\text{dB}$, $H=5$, $I=3$, that is, the dial testing

mobile phone is considered to have faults when Δ_p exceeds a certain threshold

value Δ for 5 times consecutively and/or the mobile phone p has problems in getting through for 3 times consecutively.

Although the aforementioned content has described the specific embodiment in combination with the figures, it does not limit the protection scope of this invention, and it shall be understood by a persons skilled in the art that, on the basis of the technical solution of this invention, various kinds of amendments or alternations that can be made without paying any creative efforts are still within the protection scope of the present invention.

The applicant hereby discloses in isolation each individual feature described herein and any combination of two or more such features, to the extent that such features or combinations are capable of being carried out based on the present specification as a whole in the light of the common general knowledge of a person skilled in the art, irrespective of whether such features or combinations of features solve any problems disclosed herein, and without limitation to the scope of the claims. The applicant indicates that aspects of the present invention may consist of any such individual feature or combination of features. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

CLAIMS

1. A method for autonomous detecting and positioning of indoor wireless network faults, the method comprising:

building an indoor three-dimensional spatial structural model and an indoor transmitting antenna model of a target building,

calculating, in the indoor three-dimensional spatial structural model, the signal strength of the indoor transmitting antenna model inside the target building according to a ray-tracing propagation model algorithm to accordingly determine key testing positions of the target building,

deploying wireless units with an automatic connection testing function at the key testing positions of indoor wireless networks and starting the connection testing wireless units when the wireless networks are idle,

counting on-states of the connection testing wireless units, collecting measurement reports reported by the connection testing wireless units, judging faults of indoor networks and devices according to the on-states of the connection testing wireless units and the measurement reports reported by the connection testing wireless units.

2. The method for autonomous detecting and positioning of indoor wireless network faults according to claim 1, wherein the wireless units with an automatic connection testing function are mobile phones with an automatic dial testing function.

3. The method for autonomous detecting and positioning of indoor wireless network faults according to claim 1 or 2, wherein the automatic connection testing function is an automatic network service request function.

4. The method for autonomous detecting and positioning of indoor wireless network faults according to any of claims 1 to 3, wherein the wireless units are cellular devices.

5. The method for autonomous detecting and positioning of indoor wireless network faults according to any preceding claim, the method comprising the following steps:

step (1): building an indoor three-dimensional spatial structural model and an indoor transmitting antenna model of a target building;

step (2): calculating the signal strength of the indoor transmitting antenna model inside the target building in step (1) by using a ray-tracing propagation model algorithm in the indoor three-dimensional spatial structural model;

step (3): determining key testing positions of the target building and reference signal strength that can be received by the connection testing wireless units at the key testing positions, according to the calculation results in step (2);

step (4): deploying wireless units with a timer to initiate the automatic connection testing function at the key testing positions determined in step (3); the timing automatic connecting testing function includes the customizable testing time, frequency, target and service types of the wireless units;

step (5): on network side, judging the on-states of the connection testing wireless units, collecting measurement reports reported by the connection testing wireless units, respectively extracting the measurement reports of the connection testing wireless units that correspond to several transmitting antennas, according to the automatic testing time and labelling of such wireless units as set in step (4);

step (6): judging transmitting antennas with faults according to the on-states of several connection testing wireless units extracted in step (5), the reference signal strength information in the measurement report, and the reference signal strength that can be received by the connection testing wireless units at the key testing positions in step (3).

6. The method for autonomous detecting and positioning of indoor wireless network faults according to claim 5, which is characterized by: the construction process of the indoor three-dimensional spatial structural model in step (1) is: three-dimensional modeling the CAD format drawings of the target building for each floor respectively, storing separately the three-dimensional spatial construction data of each floor; the three-dimensional spatial construction data includes vertical heights of the floors, horizontal areas of the floors, data of the building materials and data of the layout and structures of the floors.

7. The method for autonomous detecting and positioning of indoor wireless network faults according to claim 5 or 6, which is characterized by: the construction

process of the indoor transmitting antenna model in step (1) is: recording and storing data of all the transmitting antennas in the target building; the data of all the transmitting antennas includes information of specific locations of the transmitting antennas inside the target building and the three-dimensional radiation parameters, power, frequency and downtilt of the transmitting antennas.

8. The method for autonomous detecting and positioning of indoor wireless network faults according to any of claims 5 to 7, which is characterized by: the step (3) comprises the following steps:

step (3.1): as regards the simulation results in step (2), selecting a horizontal plane at the same height with the transmitting antenna from the floors, sampling the field strength generated by each of the transmitting antennas respectively according to a preset sampling resolution, and storing the sampling results in a database; assume that the number of the sampling points in the scene is m , wherein n transmitting antennas are provided, which are recorded as Tx1、Tx2、.....、Txn, respectively, then the sampling results are stored as a two-dimensional array of $m \times n$; wherein each line of data in the two-dimensional array records the field strengths of n transmitting antennas at one position, therefore the field strengths generated by n transmitting antennas at the i th position is recorded as $\vec{E}_i = [E_{i,1}, E_{i,2}, \dots, E_{i,n}]$, ($1 \leq i \leq m$), and each column of data in the array records the field strengths of one transmitting antenna at m positions, therefore the field strengths of the j th transmitting antenna at m positions respectively in the samples are recorded as $[E_{1,j}, E_{2,j}, \dots, E_{m,j}]^T$, ($1 \leq i \leq m$), and the sampling resolution must ensure that the number of the sampling points m is bigger than the number of the transmitting antennas n , wherein $m > n$;

step (3.2): processing the data in the sampling results stored in step (3.1), searching n key testing positions from m positions, each of the n key testing positions corresponding to a transmitting antenna; the basis on which a key testing position is selected to ensure that the difference between the signal strength generated by the transmitting antenna corresponding to a key testing position and that generated by other antennas is the biggest; assume that position i is the key testing position of the j th transmitting antenna, then, for any other positions k , $1 \leq k \leq m, k \neq i$, there is:

$$\begin{aligned} \min\{|E_{i,1} - E_{i,p}|, |E_{i,2} - E_{i,p}|, \dots, |E_{i,n} - E_{i,p}|\} \\ > \min\{|E_{q,1} - E_{q,p}|, |E_{q,2} - E_{q,p}|, \dots, |E_{q,n} - E_{q,p}|\} \end{aligned}$$

that is, the minimum value of the difference between element $E_{i,j}$ and other elements in $\vec{E}_i = [E_{i,1}, E_{i,2}, \dots, E_{i,n}]$ is larger than that between element $E_{k,j}$ and other elements in $\vec{E}_k = [E_{k,1}, E_{k,2}, \dots, E_{k,n}]$; assume that $P_1, P_2, \dots, P_n$ are respectively the key testing positions corresponding to transmitting antennas $Tx_1, Tx_2, \dots, Tx_n$, then the value of element $E_{i,j}$ is the signal strength of the j th transmitting antenna at the key testing position i , which is recorded as $W_j = E_{i,j}$, and the field strengths generated by transmitting antennas corresponding to the n key testing positions are recorded as $\vec{W} = [W_1, W_2, \dots, W_n]$;

step (3.3): correcting the signal strength $\vec{W}$ at the n key testing positions which is calculated via simulation in step (3.2), and the correction process refers to correcting the signal strengths at the n key testing positions calculated via simulation according to the technical standards of the networks, the ratio of reference signal power in the gross power which is set in the networks and the gain of the receive antenna of the connection testing wireless units, and storing the corrected results as the reference signal strength that can be received by the wireless units at the key testing positions.

9. The method for autonomous detecting and positioning of indoor wireless network faults according to any of claims 5 to 8, which is characterized by: when information of the transmitting antennas within a region changes, it is needed to recalculate the field strengths of the transmitting antennas generated in the three-dimensional spatial according to step (2), recalculate the key testing position of each of the transmitting antennas, and recalculate and store the reference signal strength received by the wireless units at the key testing positions; the changes of the transmitting antenna information includes: adjustments to the transmitting antenna parameters, alternations of locations of the transmitting antennas or increases in number of the transmitting antennas.

10. The method for autonomous detecting and positioning of indoor wireless network faults according to any of claims 5 to 9, which is characterized by:

the wireless units in step (4), having the timing automatic connection testing function which is customized by the wireless device manufacturer, are supplied with electric power by connecting to wired power supply.

11. The method for autonomous detecting and positioning of indoor wireless network faults according to any of claims 5 to 10, which is characterized by:


the user-defined settings in step (4) is based on a distribution diagram of the telephone traffic in the target building over time, the automatic connection testing time is set when the networks are idle, the automatic connection testing frequency is set as once per day or a plurality of times per day, the target objects of connection testing are other testing wireless units or internet servers, the service type of connection testing are voice call, data connection or a combination of a plurality of services.

12. The method for autonomous detecting and positioning of indoor wireless network faults according to any of claims 5 to 11, which is characterized by:

the step (6) comprises the following steps: judging the transmitting antennas with faults according to the on-states of n connection testing wireless units corresponding to n key testing positions extracted in step (5), the reference signal strength information in the measurement reports, and the reference signal strength information $\vec{W}'$ received by the wireless devices at the key testing positions stored in step (3.3), assume that the reference signal strength information in the measurement reports by n connection testing wireless units is recorded as $\vec{Me} = [Me_1, Me_2, \dots, Me_n]$, then the reference signal strength information received by the wireless devices at the n key testing positions in normal situations is recorded as $\vec{W}' = [W'_1, W'_2, \dots, W'_n]$, calculating the value of $\Delta_p = |Me_p - W'_p|$, ($1 \leq p \leq n$), wherein, Δ_p represents the difference value between the strength information of reference signal Me_p actually measured by the connection testing wireless units and the reference signal strength information W'_p theoretically received by the connection testing wireless units, at a key testing position p ; the transmitting antenna T_{xp} corresponding to a connection testing wireless device p is considered to have faults when Δ_p exceeds a certain threshold value Δ for H times consecutively and/or the wireless device p has problems in getting through for I times consecutively.

13. The method for autonomous detecting and positioning of indoor wireless network faults according to any preceding claim, wherein the wireless devices are wireless test devices.

1 / 3

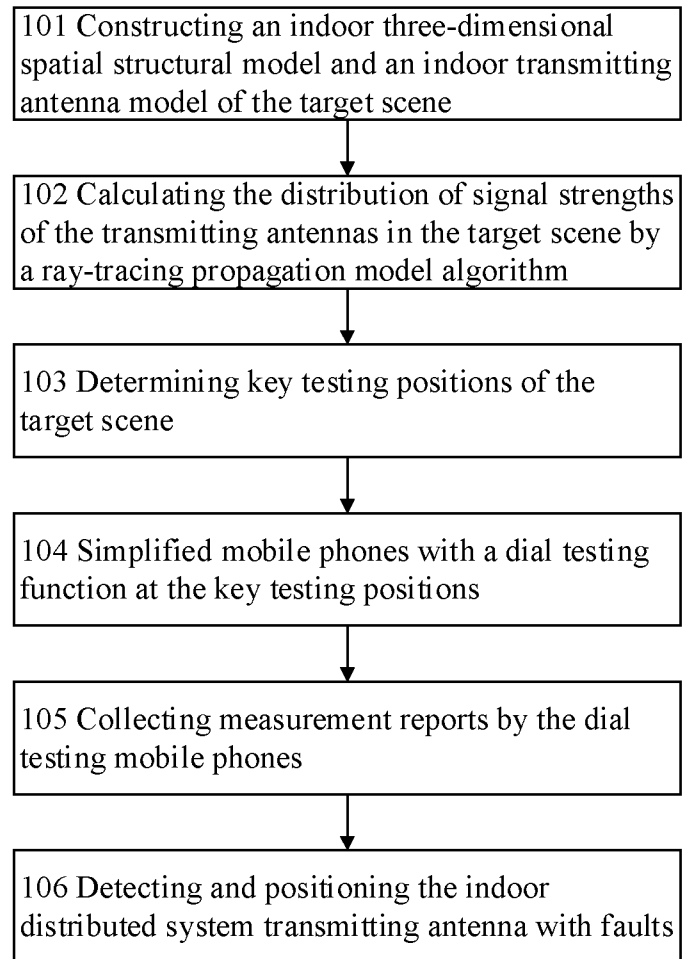**Figure 1**

2 / 3

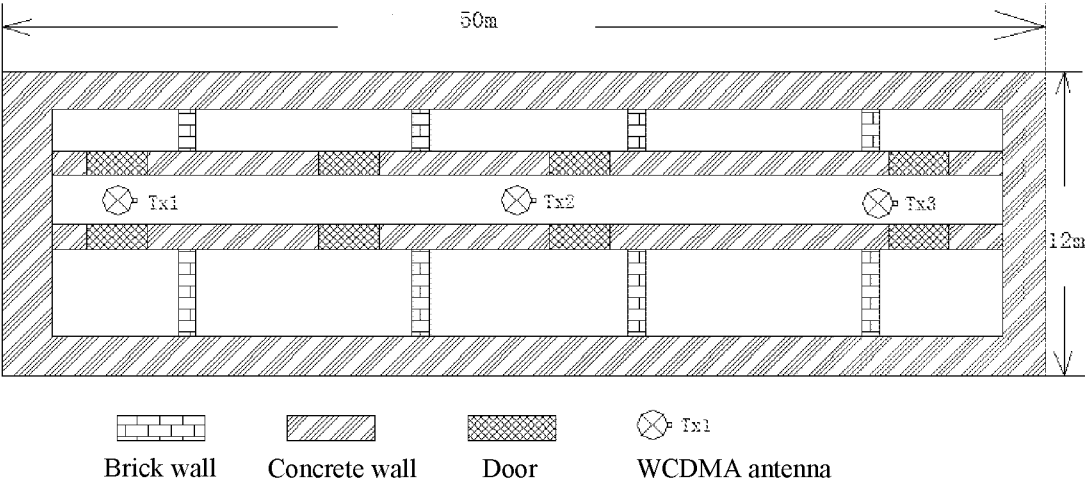


Figure 2

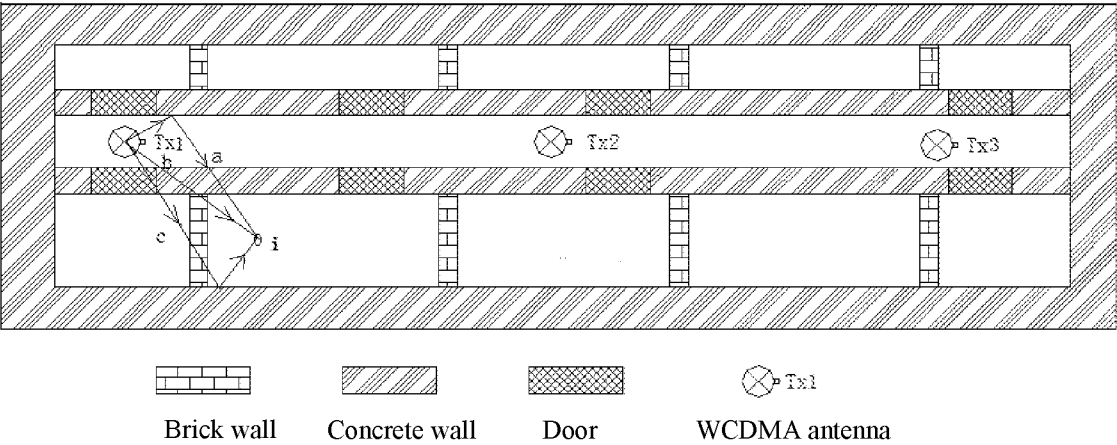


Figure 3

3 / 3

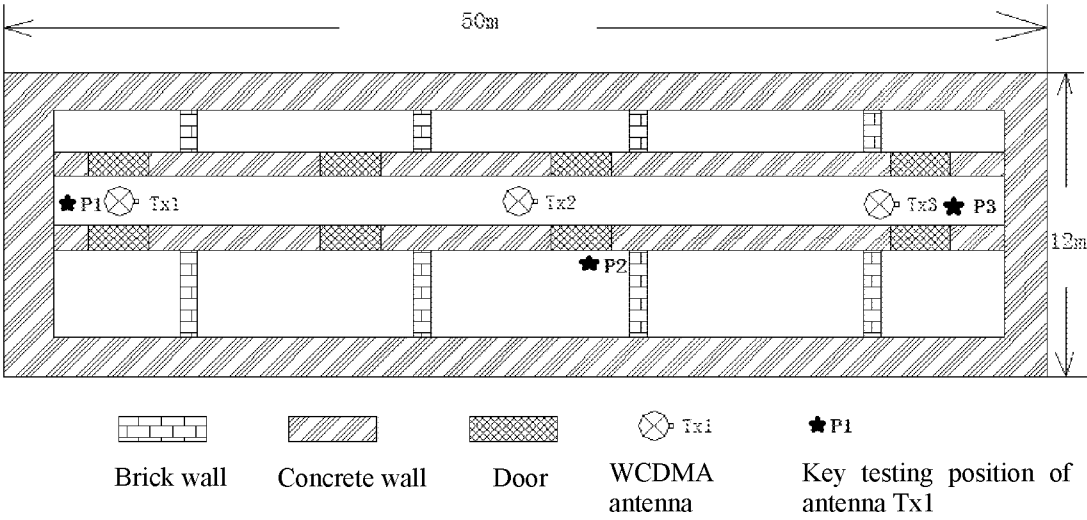


Figure 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2014/053848

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04W24/06
ADD. H04W16/20 H04W84/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/265321 A1 (RAPPAPORT THEODORE [US] ET AL) 1 December 2005 (2005-12-01) paragraphs [0054], [0068], [0070], [0072], [0084], [0096], [0105] -----	1-7,9-13
X	US 2004/236547 A1 (RAPPAPORT THEODORE S [US] ET AL) 25 November 2004 (2004-11-25) paragraphs [0016], [0041], [0088], [0193] -----	1-7,9-13
A	CN 102 143 511 A (GUANGZHOU LEZENT COMM TECHNOLOGY CO LTD) 3 August 2011 (2011-08-03) abstract -----	1-13
A	CN 202 940 968 U (CHEN XI; LI YUNPENG) 15 May 2013 (2013-05-15) abstract -----	1-13
-/-		

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 March 2015

Date of mailing of the international search report

08/04/2015

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Domingos, Luis

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2014/053848

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	STEVEN FORTUNE ED - MING C LIN ET AL: "A beam-tracing algorithm for prediction of indoor radio propagation", 27 May 1996 (1996-05-27), APPLIED COMPUTATIONAL GEOMETRY TOWARDS GEOMETRIC ENGINEERING, SPRINGER BERLIN HEIDELBERG, BERLIN, HEIDELBERG, PAGE(S) 157 - 166, XP047004082, ISBN: 978-3-540-61785-3 the whole document -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2014/053848

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005265321	A1	01-12-2005	AT 372620 T 15-09-2007
		AU 9114801 A 08-04-2002	
		AU 2001291148 A2 08-04-2002	
		BR 0114232 A 20-07-2004	
		CA 2423157 A1 04-04-2002	
		CN 1498382 A 19-05-2004	
		DE 60130352 T2 31-07-2008	
		EP 1328881 A1 23-07-2003	
		JP 2004510372 A 02-04-2004	
		KR 20030059152 A 07-07-2003	
		MX PA03002652 A 25-09-2003	
		US 6973622 B1 06-12-2005	
		US 2005265321 A1 01-12-2005	
		WO 0227564 A1 04-04-2002	
US 2004236547	A1	25-11-2004	AU 2004206564 A1 05-08-2004
		CA 2512388 A1 05-08-2004	
		EP 1595192 A2 16-11-2005	
		JP 2007525040 A 30-08-2007	
		KR 20050102087 A 25-10-2005	
		US 2004236547 A1 25-11-2004	
		WO 2004066077 A2 05-08-2004	
CN 102143511	A	03-08-2011	NONE
CN 202940968	U	15-05-2013	NONE