



EUROPEAN PATENT APPLICATION

(43) Date of publication:
28.06.2023 Bulletin 2023/26

(51) International Patent Classification (IPC):
E06C 1/06 (2006.01) **E06C 7/08** (2006.01)
E06C 7/18 (2006.01)

(21) Application number: **21217569.9**

(52) Cooperative Patent Classification (CPC):
E06C 1/06; E06C 7/081; E06C 7/185

(22) Date of filing: **23.12.2021**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Rizzotto Srl**
35010 San Giorgio in Bosco (PD) (IT)

(72) Inventor: **RIZZOTTO, Manuel**
35010 San Giorgio in Bosco (PD) (IT)

(74) Representative: **Rocchetto, Elena**
Ufficio Veneto Brevetti S.r.l.
Via Sorio, 116
35141 Padova (IT)

(54) **LADDER**

(57) The invention is a new ladder or step irons structure comprising a shaped and preformed element (A) made of metal plate or metal alloy plate, in turn comprising

ing at least two lateral portions (1) that constitute the rails (1) and several central portions (2) that constitute the rungs (2) and are orthogonal to said lateral portions (1).

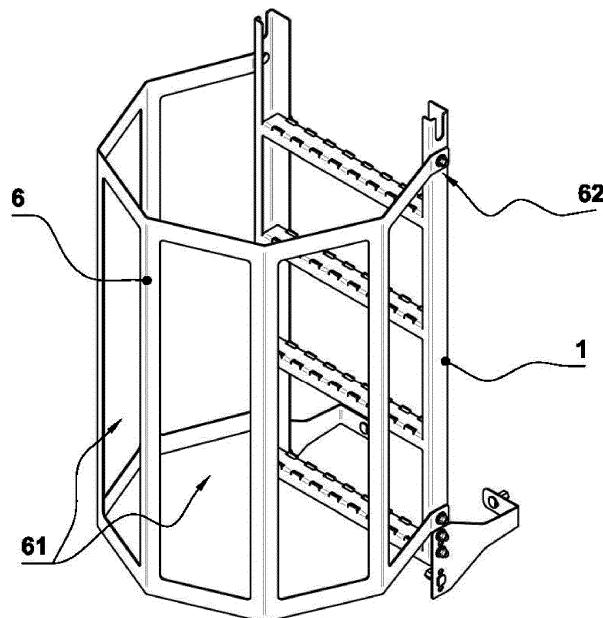


Fig. 6

Description

[0001] The present patent concerns ladders, and more specifically it concerns a new ladder suited to be used also as a step irons structure, a safety cage for ladders and a ladder with safety cage.

[0002] Ladders are known which are constituted by two generally parallel upright elements or rails joined by a series of parallel crosspieces called rungs.

[0003] The ladder is arranged with the two rails along the surface to be climbed, for example with one end resting on the ground and the other end resting on a wall, and the operator can rest his/her feet alternately on the rungs one after the other to reach the desired height.

[0004] Ladders are used, for example, for performing maintenance activities on lighting columns or streetlights or for maintenance and picking activities on fruit trees.

[0005] The so-called step irons are fixed ladders suited to allow quick and safe access to structures and places which, due to their height, are not easy to reach.

[0006] More specifically, step irons are used to access the roof of industrial and civil buildings, the roof of sheds, terraces, vertical structures of any kind, lighting systems, underground or above ground tanks, wells and underground silos, sewage systems, underground parking spaces, machines.

[0007] Step irons are usually arranged vertically but can also be tilted with an inclination of no less than 75 degrees.

[0008] Step irons, due precisely to their structural characteristics, pose the risk of the user falling accidentally and therefore must be provided with a protection cage.

[0009] Said protection cage is compulsory, according to the regulations currently in force, for all ladders exceeding 2 meters in height.

[0010] Furthermore, according to the regulations currently in force, the distance between the side of the cage opposite the plane defined by the rungs and the rungs themselves cannot exceed sixty centimeters and there must be a distance of at least 15 centimeters between the rungs and the wall where they are applied or where the ladder is applied.

[0011] The ladders and the step irons structures currently in use are constituted by single elements, rails and rungs, which are joined in a stable manner during the production stage. The elements constituting ladders are made of wood or metal, while step irons structures are made of metal.

[0012] More specifically, metal ladders or step irons structures are constructed using metal section bars joined together by means of fixing elements such as, for example, bolts or through a welding operation.

[0013] To make metal ladders or step irons structures it is necessary to cut the metal section bars to size, shape their ends, make any needed holes for bolts, assemble the various parts and finally join them by means of bolts or through a welding operation.

[0014] The production of ladders or step irons struc-

tures requires work for the different cutting, shaping, and joining operations, requires the purchase and use of bolts or other connection elements or the use of welding machines for joining the various parts, in addition to producing metal scraps from the metal section bars.

[0015] It should be noted that the tread surfaces of the rungs of ladders or step irons structures obtained from pieces of metal section bar are smooth and consequently may be slippery.

[0016] For said rungs it is possible to use pieces of metal section bar having at least one corrugated surface, but this involves the need to purchase a specific type of metal plate, with the consequent problems in terms of warehouse space and scraps.

[0017] For the tread surfaces of the rungs, it is possible to use additional elements in such a way as to obtain non slip surfaces, but this makes it necessary to purchase and store said additional elements and to consider the cost and time required for the application of said additional elements to each single rung.

[0018] The subject of the present patent is a new ladder or step irons structure, hereinafter referred to only as "ladder" for the sake of description simplicity, obtained from conveniently shaped and bent metal plate.

[0019] The subject of the present patent also includes a new safety cage for ladders, obtained from a single, conveniently shaped and bent metal plate element, and a ladder with safety cage.

[0020] It is one object of the present invention to limit the number of operations, especially manual operations, which are necessary for making said ladder.

[0021] It is another object of the present invention to limit the number of connection elements necessary for making said ladder.

[0022] It is another object of the present invention to limit the production of scraps from the materials used for making said ladder.

[0023] It is another object of the present invention to provide a new ladder in which the tread surface of the rungs is suited to prevent or in any case limit the risk of slipping. These and other direct and complementary objects are achieved by the new ladder suited to be used both as a step ladder and as a step irons structure.

[0024] In the first solution the new ladder comprises a series of steps obtained from a bent metal plate element, wherein a partial cut is carried out at the level of the bent parts, so that after the bending operation an edge portion which is raised with respect to the bent part is obtained. Said raised edge serves the function of a non slip surface. Furthermore, according to the invention, the entire ladder can be obtained from a conveniently cut and bent element made of metal plate or metal alloy, so as to obtain both the side rails and the rungs, and to form a ladder.

[0025] Analogously, the new cage is obtained from a single, shaped and press bent metal plate element, which can be successively mounted on a step ladder of the known type or more preferably on a step ladder of the type described herein.

[0026] The characteristics of the new ladder are highlighted in greater detail in the following description, with reference to the drawings attached hereto by way of non-limiting example.

Figure 1 shows the cut metal plate element (A) before the bending operation, while

Figure 1a shows a detail of said element (A).

Figures 2 and 3 respectively show a front view and an axonometric view of the new ladder.

Figure 4a shows a detail axonometric view of the new ladder, in which it is possible to observe a portion of the rung (2) and a portion of the rail (1).

Figure 4b shows a sectional view of a rung (2).

Figure 5 shows an example of a complete ladder.

Figure 6 shows a three-dimensional view of a new cage (6) mounted on the ladder of

Figure 5, wherein said cage (6), differently from the cage (4) shown in Figure 5, is obtained from a single shaped and press bent metal plate element.

[0027] Said element (A) comprises two lateral portions (1) which constitute the rails (1) and various central portions (2) which constitute the rungs (2).

[0028] Each lateral portion (1) has substantially the shape of a band or strip and is formed by three parts (1a, 1b, 1c) that are parallel to one another:

- a first part (1a) arranged towards the opposite lateral portion (1),
- a second part (1b) arranged so that it is adjacent to said first part (1a), constitutes a continuation of the same and faces said opposite lateral portion (1),
- a third part (1c) arranged so that it is adjacent to said second part (1b), constitutes a continuation of the same and faces said opposite lateral portion (1).

[0029] More specifically, said second part (1b) is included between said first part (1a), facing towards the opposite lateral portion (1), and said third part (1c) that is diametrically opposite said opposite lateral portion (1), adheres to the same and constitutes a continuation of them.

[0030] Said three parts (1a, 1b, 1c), which are coplanar and continuous in the element (A) obtained by cutting metal plate or a metal alloy sheet, are bent along two bending lines (v1, v2) indicated by a broken line in Figure 1 and in Figure 1a.

[0031] Said bending lines (v1, v2) are parallel to each other and to the long side of said three parts (1a, 1b, 1c).

[0032] According to the invention, said bending lines (v1, v2) may not be parallel but slightly convergent.

[0033] When said three parts (1a, 1b, 1c) are bent along said bending lines (v1, v2), each of said three parts (1a, 1b, 1c) comes to be arranged so that it is orthogonal to the adjacent part (1c, 1b, 1a) forming a linear, box-shaped element with C-shaped cross section which constitutes the lateral rail (1) of the new ladder.

[0034] Each central portion (2) has substantially the shape of a strip and is formed by three parts (2a, 2b, 2c) parallel to one another:

- a first part (2a) extending between said first parts (1a) of said two lateral portions (1), said first part (2a) being connected to each of said first parts (1a) of said two lateral portions (1) and constituting a continuation of the same,
- a second part (2b) arranged so that it is adjacent to said first part (2a) and constitutes a continuation of the same,
- a third part (2c) arranged so that it is adjacent to said second part (2b) and constitutes a continuation of the same, in a diametrically opposite position with respect to said first part (2a).

[0035] Said three parts (2a, 2b, 2c), which are coplanar and continuous in the element (A) obtained by cutting metal plate or a metal alloy element, are bent along two bending lines (o1, o2) indicated by a broken line in Figure 1a.

[0036] Said bending lines (o1, o2) are parallel to each other and to the long side of said three parts (2a, 2b, 2c), and orthogonal to the bending lines of the three parts (1a, 1b, 1c) of the lateral portions (1).

[0037] When said three parts (2a, 2b, 2c) are bent along said bending lines (o1, o2), each of said three parts (2a, 2b, 2c) comes to be arranged so that it is orthogonal to the adjacent part (2c, 2b, 2a), forming a linear, box-shaped element with C-shaped cross section which constitutes the rung (2) of the new ladder.

[0038] More specifically, after the bending of said three parts (2a, 2b, 2c), said second part (2b) of each central portion (2) constitutes the tread or foot supporting surface of the rung (2).

[0039] Between said second part (2b) and said first (2a) and third (2c) part of said central portion (2) there are cuts (2d), generically in the shape of a U or in any other open geometrical shape, which are such as to define further parts (2e) of said first part (2a) and third part (2c) extending towards the centre of said second part (2b).

[0040] After the bending of said three parts (2a, 2b, 2c), said further parts (2e) of said first part (2a) and third part (2c) remain respectively coplanar with said first part (2a) and third part (2c), and projecting beyond the surface of said second part (2b), as can be observed in Figures 4a and 4b.

[0041] According to an alternative solution, said further parts (2e) are facing towards said second parts (2b) and are raised with respect to it.

[0042] Said further parts (2e), arranged as can be seen in said Figures 4a and 4b, constitute non slip elements for the rungs (2).

[0043] When all the parts (1a, 1b, 1c, 2a, 2b, 2c) of the element (A) made of metal plate are bent according to the respective bending lines (v1, v2, o1, o2), two sides

of each third part (2c) of the central portions (2) are parallel and adherent to the third parts (1c) of the lateral portions (1) that make up the rails (1).

[0044] Said sides of each third part (2c) of the central portions (2) can be conveniently joined to said adjacent and adherent third parts (1c) of the lateral portions (1) so that the assembly made up of rungs (2) and rails (1) is sturdier and more stable. According to the invention, said sides of each third part (2c) of the central portions (2) can be joined to the third parts (1c) by means of a welding operation, rivets, or bolts or any other suitable system.

[0045] In the case of joining by means of bolts or rivets, on each third part (2c) of each central portion (2) and on each third part (1c) of each lateral portion (1) there are holes (1f, 2f) suited to allow the passage of said bolts or rivets and to house them, as shown in Figures 1, 1a, 2.

[0046] Said lateral portions (1) are provided with further holes (1g) so that they can be joined to:

- the brackets fixing them to the wall (3),
- the elements making up the safety cage (4, 6) of the new ladder,
- other identical shaped and bent elements (A),
- access and transit steps (5) between the ladder and the starting and landing plane of the ladder itself,

as can be seen in Figure 5.

[0047] According to the invention, the ends of said lateral portions (1) can be shaped (1d) or provided with seats or holes for connection to other identical shaped and bent elements (A) or to access and transit steps (5) between the ladder and the starting and landing plane of the ladder itself.

[0048] The new ladder, made up as described above, has considerable advantages.

[0049] The new ladder has rungs (2) provided with non slip projections (2e) obtained directly by bending the metal plate.

[0050] The new ladder is obtained from an element (A) including both the lateral rails (1) and the rungs (2).

[0051] The new ladder is obtained from an element (A) constituted by a cut and shaped flat metal plate element.

[0052] The new ladder does not require the assembly and/or fixing of the rungs (2) on/to the rails (1).

[0053] To make the new ladder it is sufficient to cut the metal plate and bend the various parts (1a, 1b, 1c, 2a, 2b, 2c) in order to obtain a length of ladder complete with already assembled and joined rails (1) and rungs (2).

[0054] The new ladder does not require the purchase and storage of different elements or parts but only of metal plate elements to be cut, shaped and bent.

[0055] The cage (4, 6) to be assembled on the ladder can be of the traditional type, as shown in Figure 5, that is, made up of several shaped pieces constrained to one another, or it can be a cage of the new type, shown in Figure 6.

[0056] In this case the cage (6) is formed starting from a single metal plate element, shaped and provided with

openings (61), and bent in such a way as to surround said ladder completely or partially, and furthermore provided with shaped parts (62) suited to be coupled with the rails (1) of the ladder through common fixing means or other means.

[0057] Therefore, with reference to the preceding description and the attached drawings, the following claims are expressed.

Claims

1. Ladder or step irons structure, **characterized in that** it comprises a shaped and preformed element (A) made of metal plate or metal alloy plate, in turn comprising at least two lateral portions (1) that make up the rails (1) and several central portions (2) that make up the rungs (2) and are orthogonal to said lateral portions (1).

2. Ladder according to claim 1, **characterized in that** each lateral portion (1) has substantially the shape of a band or strip and is made up of three parts (1a, 1b, 1c) parallel to one another, of which:

- a first part (1a) is arranged so that it faces the opposite lateral portion (1),
- a second part (1b) is arranged so that it is adjacent to said first part (1a), constitutes a continuation of the same and faces said opposite lateral portion (1),
- a third part (1c) is arranged so that it is adjacent to said second part (1b), constitutes a continuation of the same and faces said opposite lateral portion (1), *and wherein* said three parts (1a, 1b, 1c), which are coplanar and continuous in the element (A) obtained by cutting metal plate, are bent along two bending lines (v1, v2) substantially parallel to each other and to the long side of said three parts (1a, 1b, 1c) so as to form a linear element with C-shaped cross section that constitutes the side rail (1) of the new ladder.

3. Ladder according to claim 1, **characterized in that** each central portion (2) has substantially the shape of a strip and is made up of three parts (2a, 2b, 2c) parallel to one another, of which:

- a first part (2a), extending between said first parts (1a) of said two lateral portions (1), is connected with each one of said first parts (1a) of said two lateral portions (1) and constitutes a continuation of the same,
- a second part (2b) is arranged so that it is adjacent to said first part (2a) and constitutes a continuation of the same,
- a third part (2c) is arranged so that it is adjacent to said second part (2b) and constitutes a con-

tinuation of the same, in a position diametrically opposite said first part (2a),

and wherein said three parts (2a, 2b, 2c), which are coplanar and continuous in the element (A) obtained by cutting metal plate, are bent along two bending lines (o1, o2) which are substantially parallel to each other and to the long side of said three parts (2a, 2b, 2c), and also orthogonal to the bending lines of the three parts (1a, 1b, 1c) of the lateral portions (1), so as to form a linear element with C-shaped cross section that constitutes the rung (2) of the new ladder between said two lateral portions (1).

4. Ladder according to claim 3, **characterized in that** once said three parts (2a, 2b, 2c) have been bent said second part (2b) of each central portion (2) constitutes the tread or surface of the rung (2) where the foot rests.
5. Ladder according to the preceding claims, **characterized in that** between the second part (2b) and the first part (2a) and/or the third part (2c) notches (2d) are provided, which have generically the shape of a U or any other open geometrical shape, in such a way as to define further parts (2e) of said first part (2a) and/or third part (2c) extending towards the centre of said second part (2b), *and wherein* once said two parts (2a, 2c) have been bent said further parts (2e) of said first part (2a) and said third part (2c) are coplanar with said first part (2a) and/or said third part (2c), respectively, and projecting beyond the surface of said second part (2b) so as to constitute non slip elements of the rungs (2).
6. Ladder according to the preceding claims, **characterized in that** the sides of each third part (2c) of the central portions (2) are joined to the third parts (1c) of said lateral portions (1) that constitute the rails (1).
7. Safety cage (6) for ladders, **characterized in that** it comprises a single metal plate element shaped and bent in such a way as to surround a ladder completely or partially, and comprising one or more openings (61) and shaped parts (62) for fixing it to the rails of said ladder.
8. Ladder according to any of the claims from 1 to 6, **characterized in that** it comprises a safety cage (6) according to claim 7.

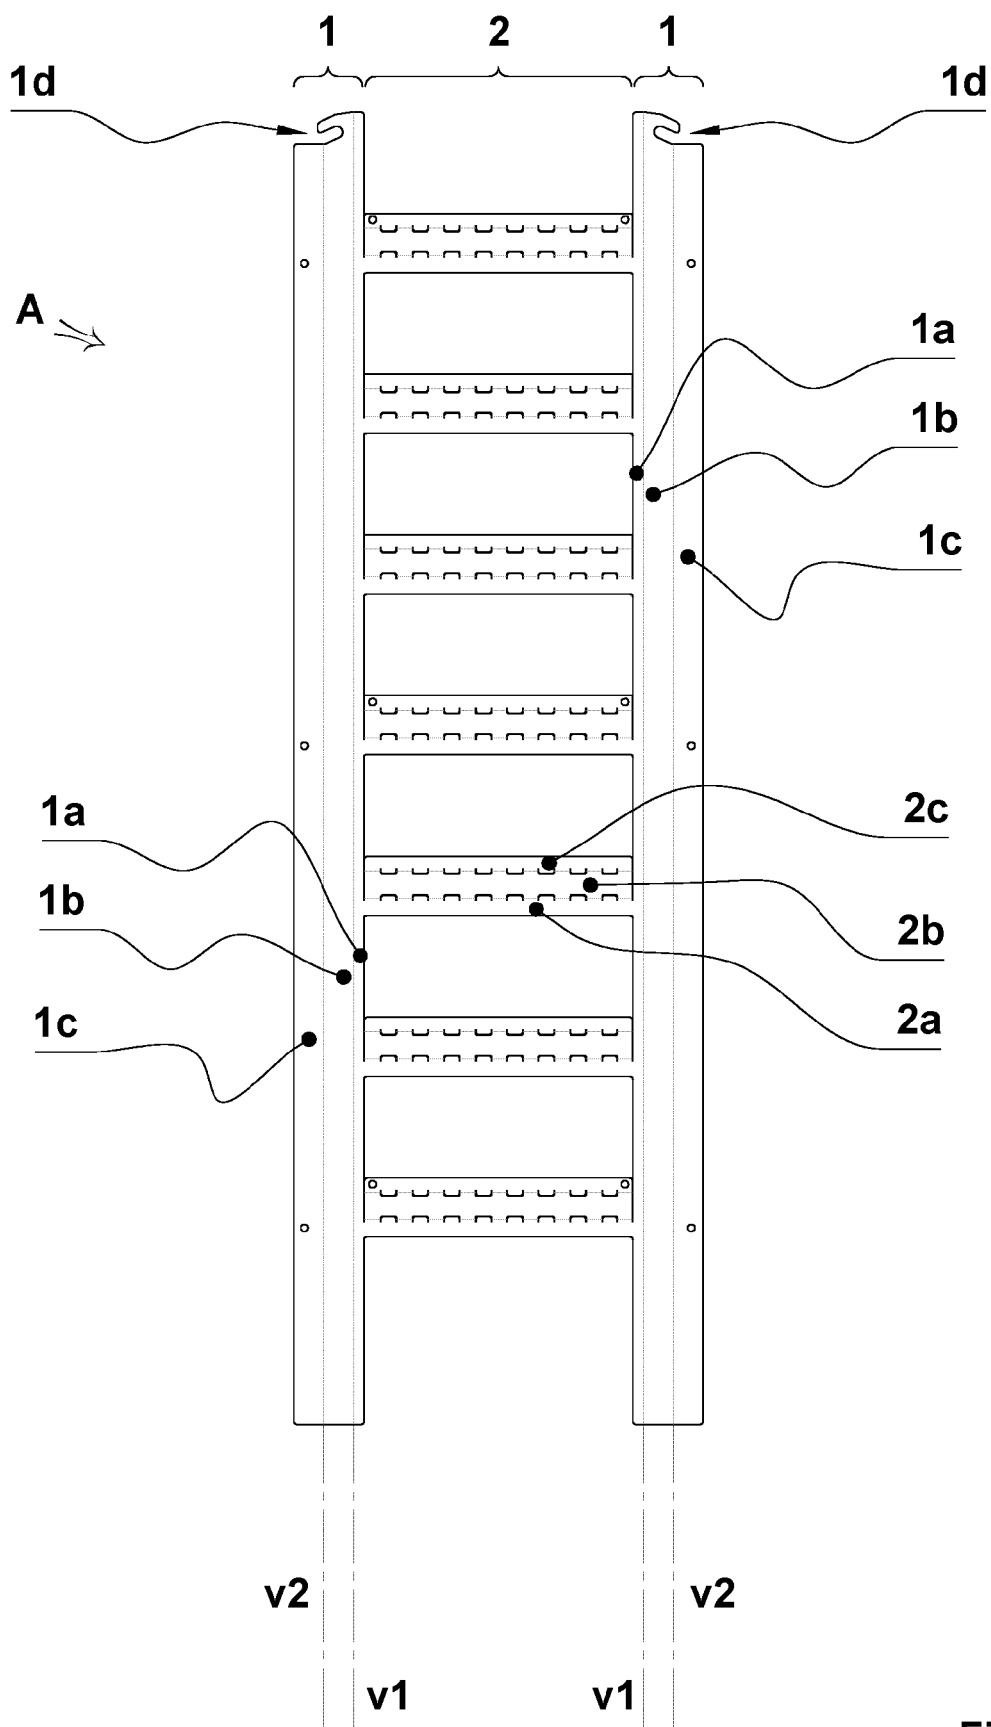


Fig. 1

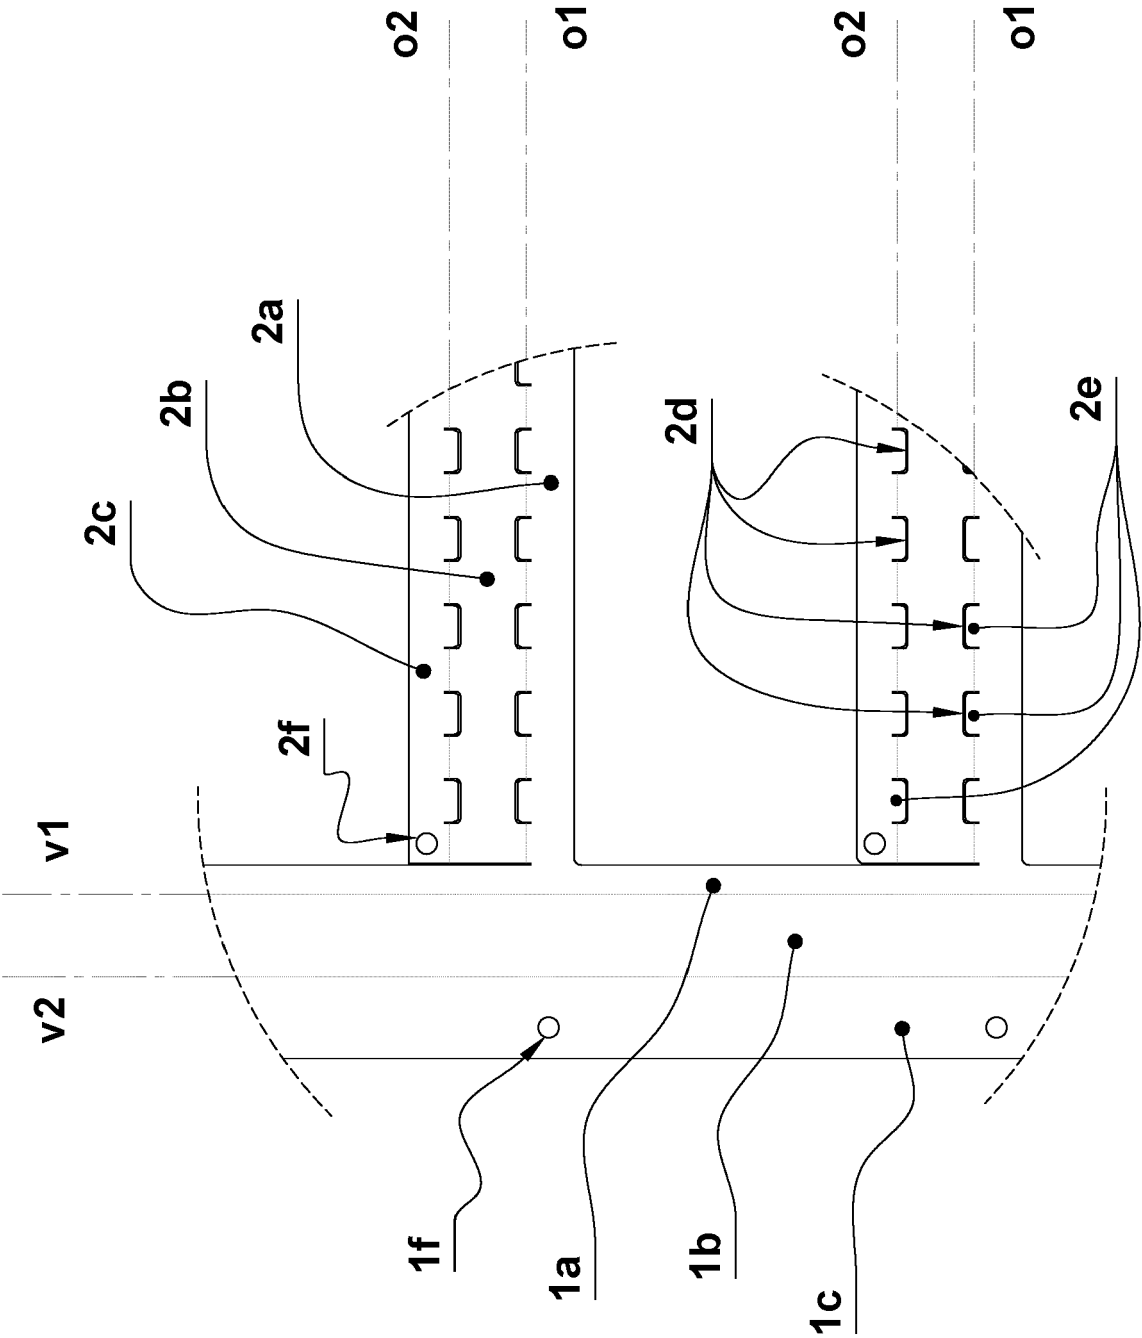


Fig. 1a

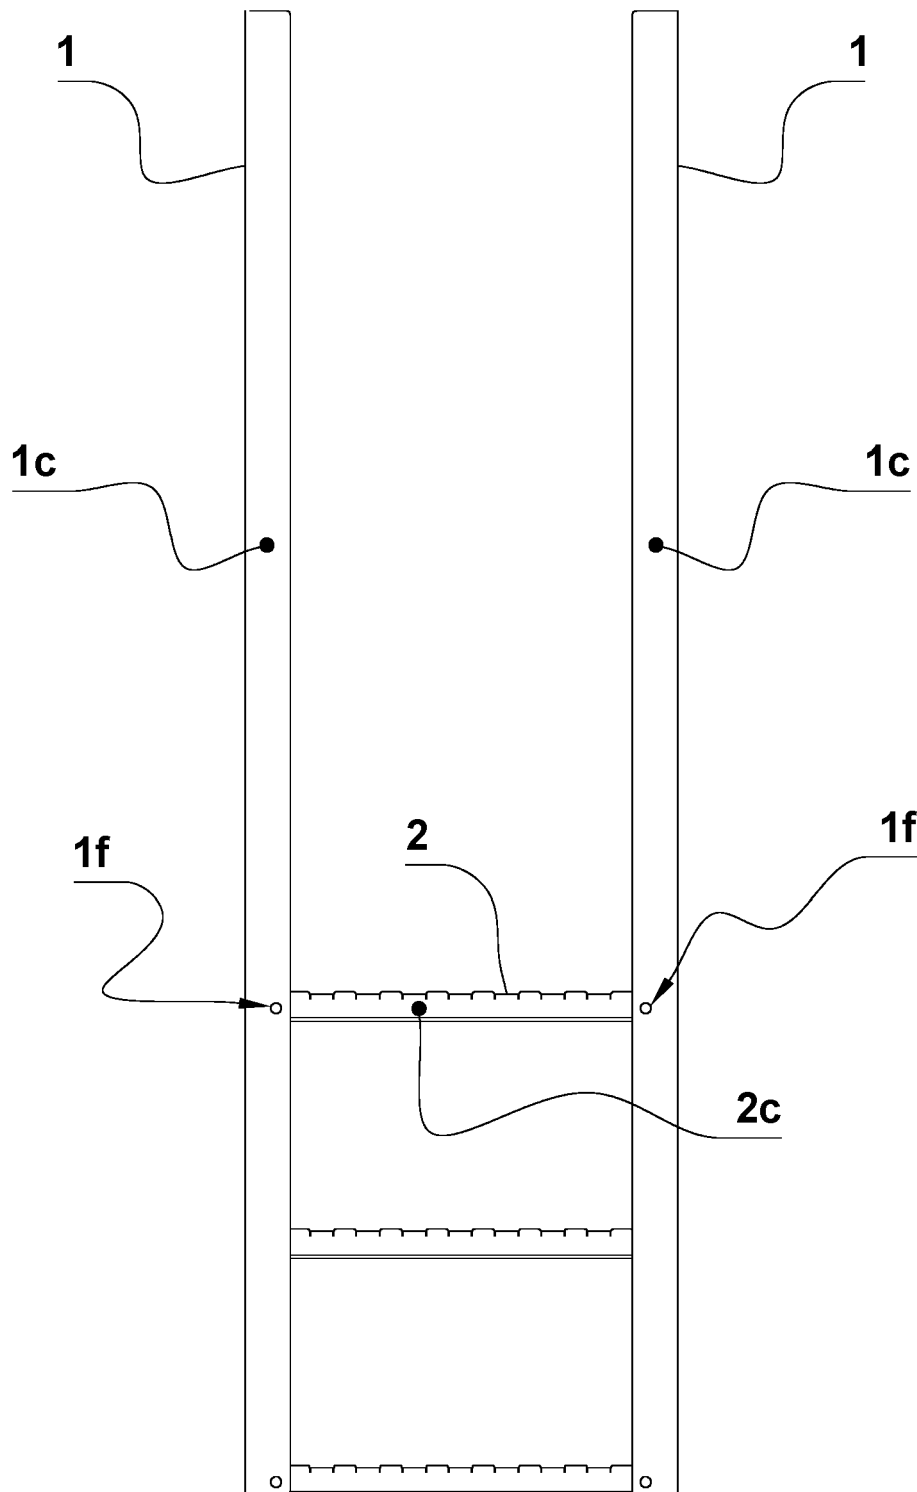


Fig. 2

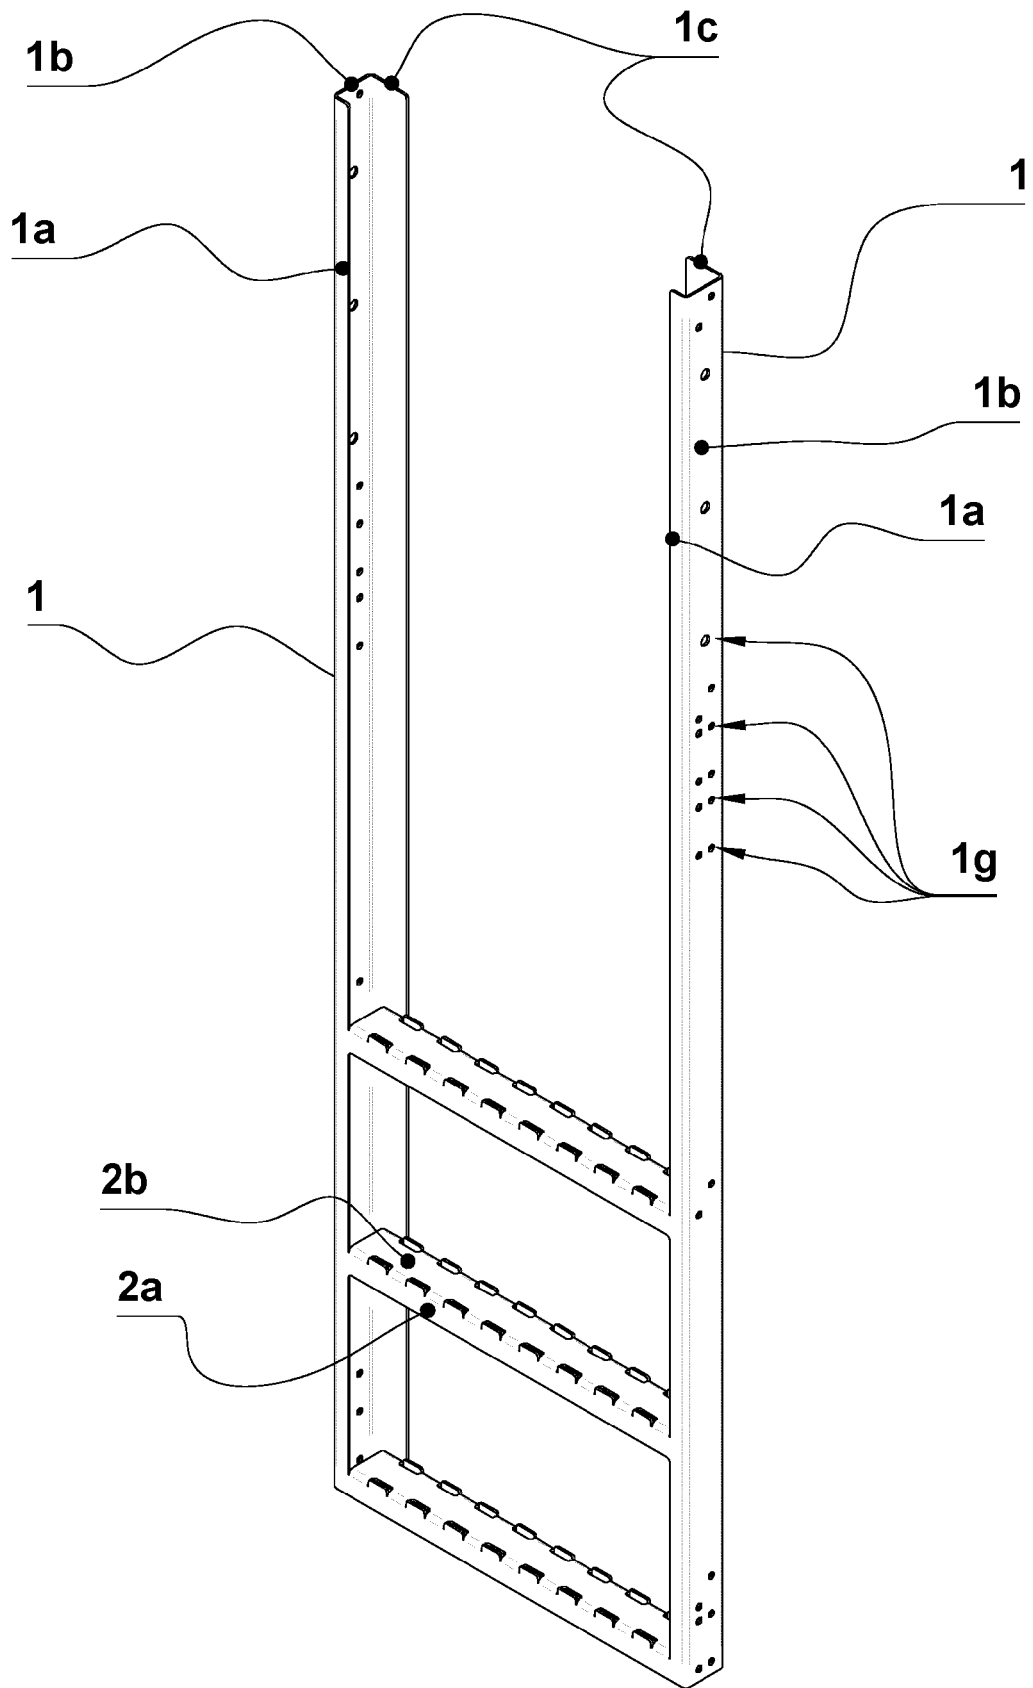


Fig. 3

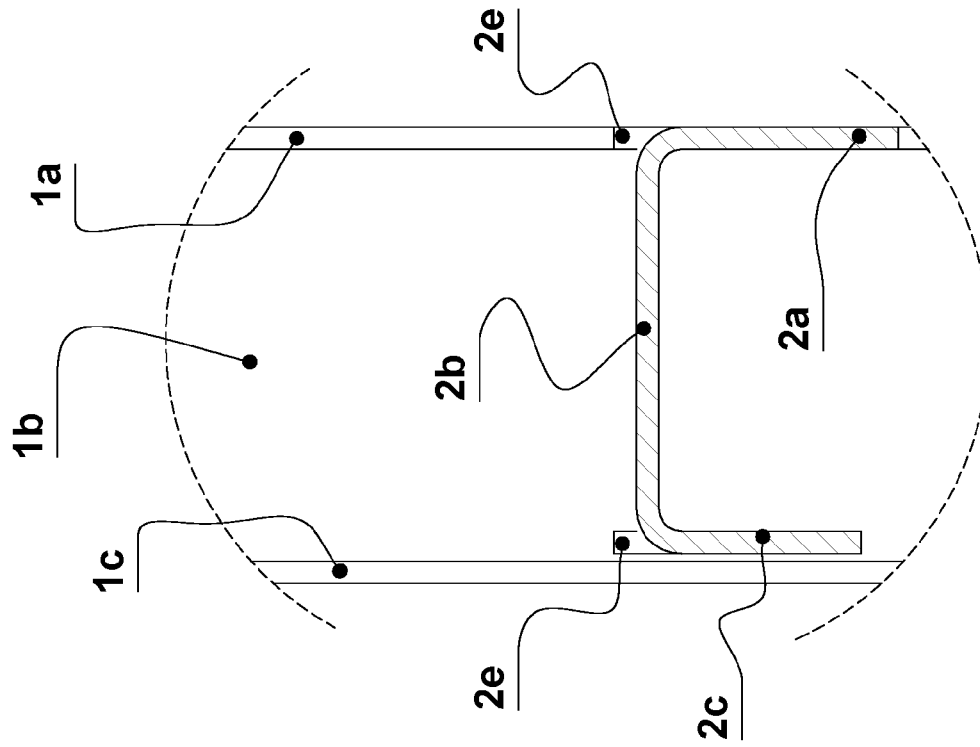


Fig. 4b

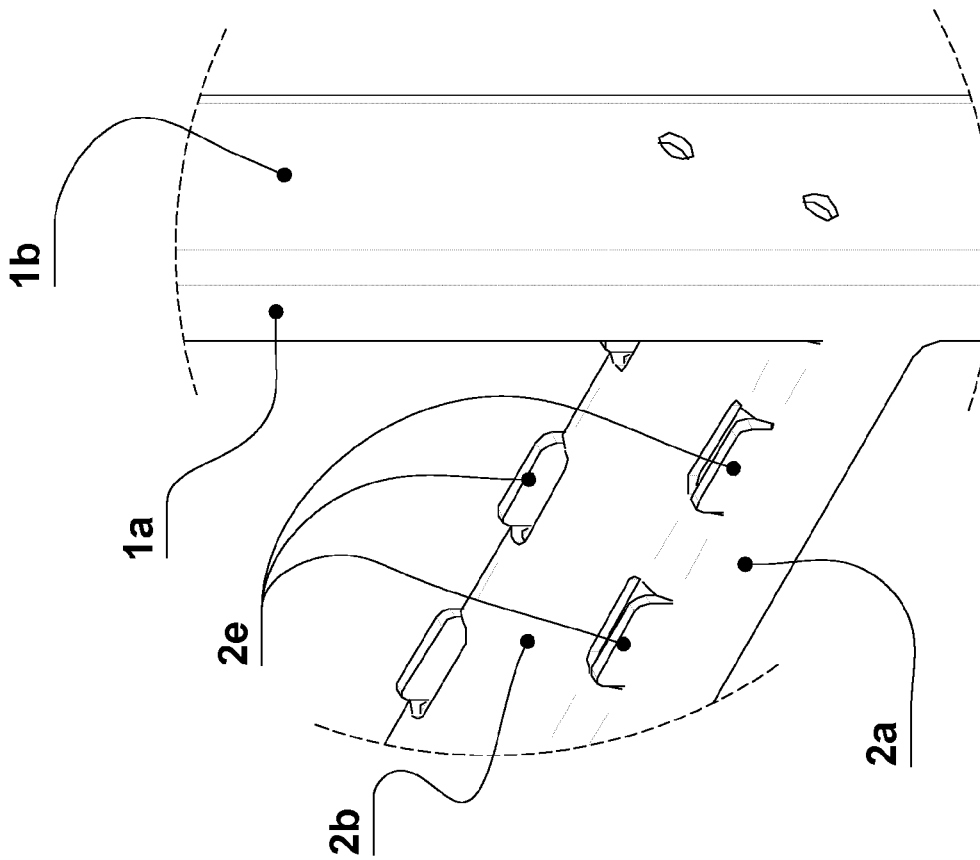


Fig. 4a

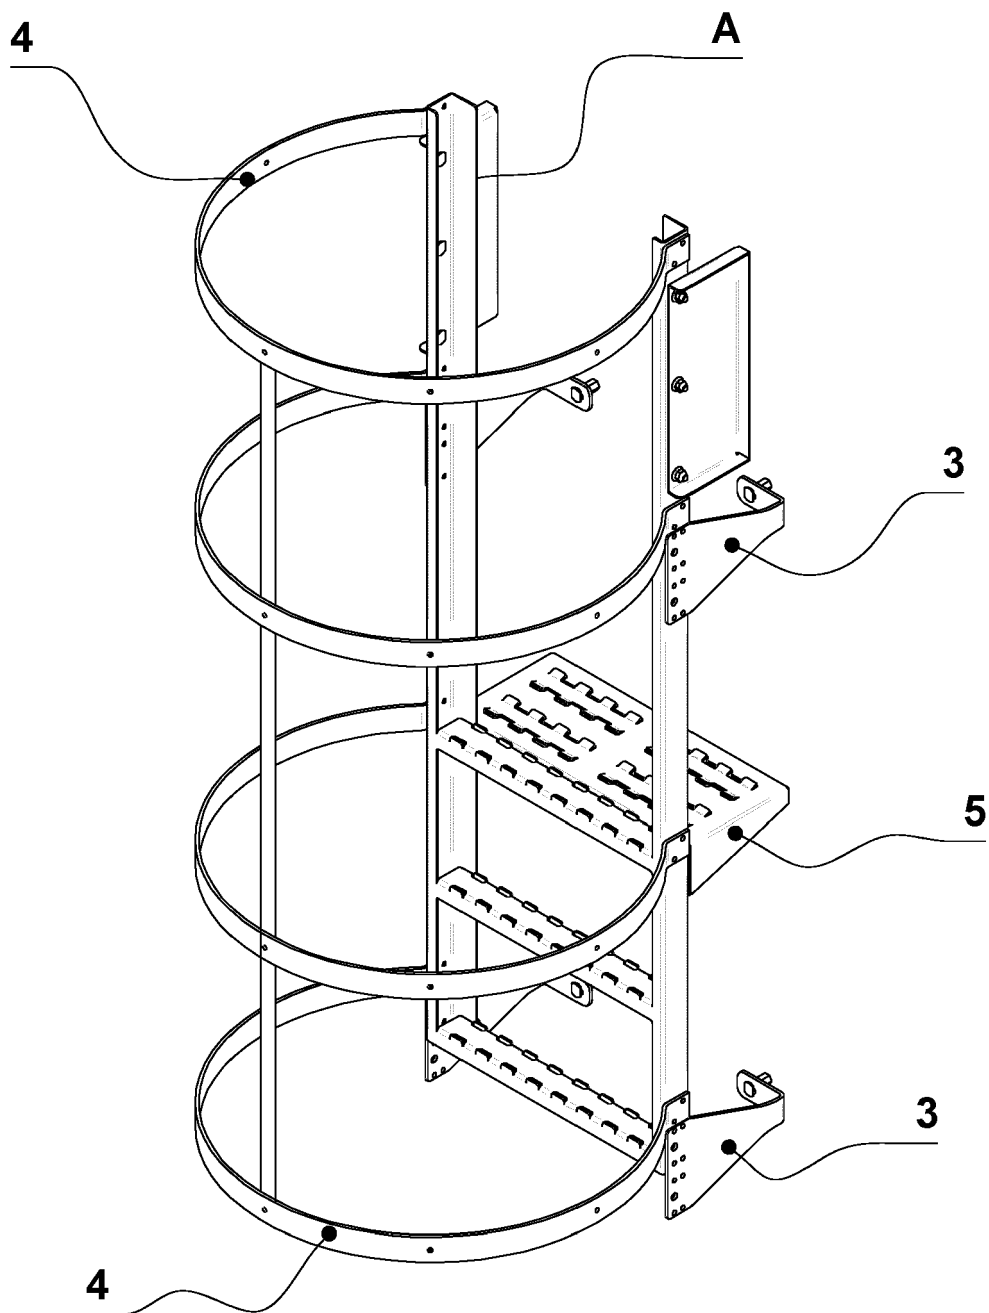


Fig. 5

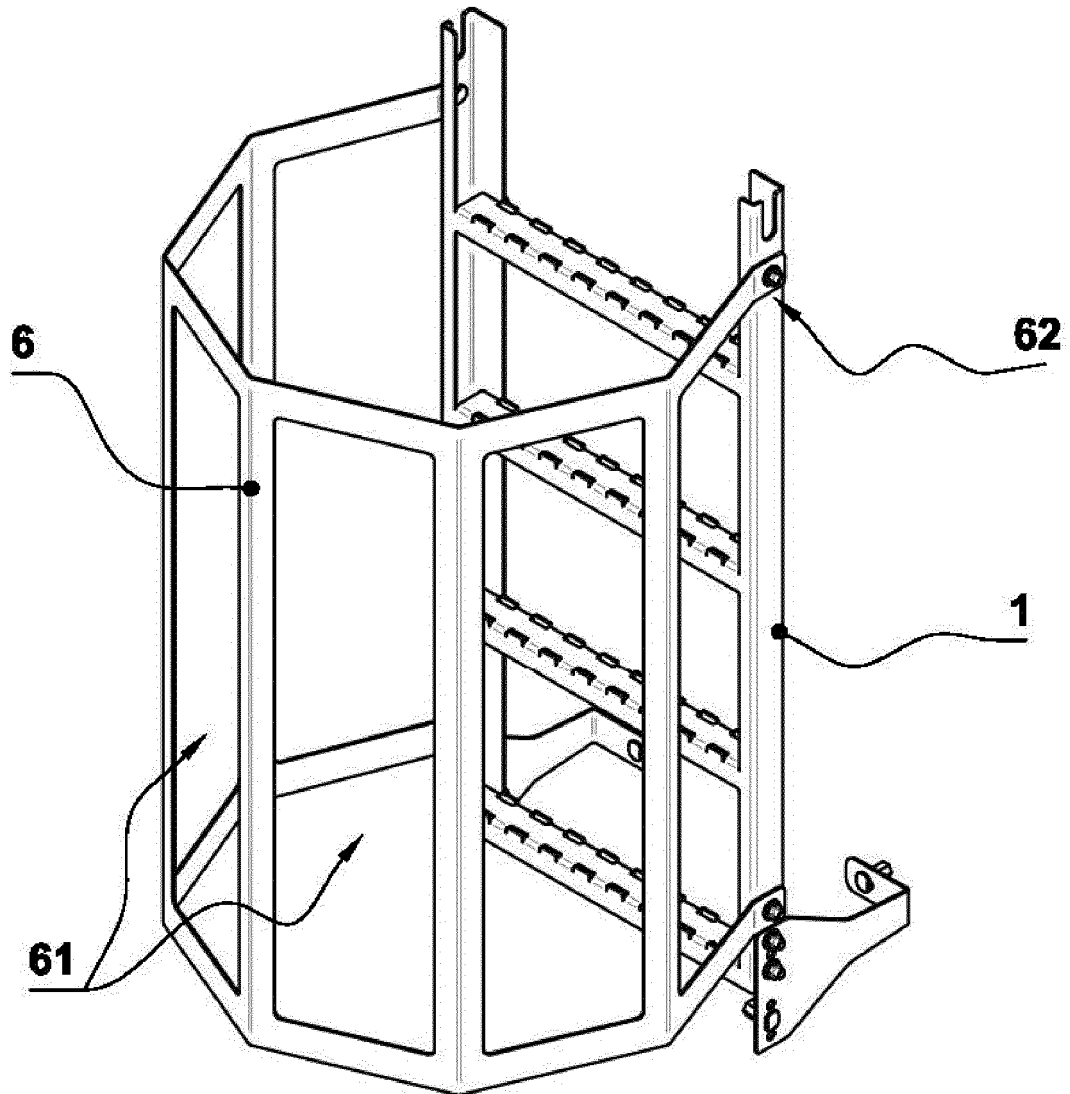


Fig. 6



EUROPEAN SEARCH REPORT

Application Number

EP 21 21 7569

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	CN 210 013 648 U (XINGGUANG AGRICULTURAL MACHINERY CO LTD) 4 February 2020 (2020-02-04)	1-4, 6	INV. E06C1/06 E06C7/08 E06C7/18
Y	* figures 1, 2 *	5, 8	
X	ES 2 226 535 A1 (ESCALERAS Y OBJETOS PRACTICOS [ES]) 16 March 2005 (2005-03-16) * figure 1 *	1-4, 6	
Y	EP 1 036 892 A2 (WIESBROCK BARBARA [DE]) 20 September 2000 (2000-09-20) * figures 5a - 5c *	5	
X	CN 110 043 183 A (CHINA CONSTR 4TH ENG DIVISION) 23 July 2019 (2019-07-23)	7	
Y	* figure 1 *	8	
			TECHNICAL FIELDS SEARCHED (IPC)
			E06C
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		1 June 2022	Bauer, Josef
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 21 21 7569

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-06-2022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CN 210013648 U	04-02-2020	NONE	
ES 2226535 A1	16-03-2005	NONE	
EP 1036892 A2	20-09-2000	AT 287477 T	15-02-2005
		DE 29904654 U1	22-07-1999
		EP 1036892 A2	20-09-2000
CN 110043183 A	23-07-2019	NONE	