



(51) International Patent Classification:

G01L 5/22 (2006.01) G06F 3/041 (2006.01)
G01L 1/20 (2006.01) H03K 17/96 (2006.01)

(21) International Application Number:

PCT/GB2018/000113

(22) International Filing Date:

15 August 2018 (15.08.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1713123.6 16 August 2017 (16.08.2017) GB

(71) Applicant: **PERATECH HOLDCO LTD** [GB/GB]; Old Repeater Station, 851 Gatherley Road, Brompton on Swale, Richmond, DL10 7JH (GB).

(72) Inventors: **BECKENBAUGH, William Max**; 9460 Meadow Creek Lane, Chappell Hill, Texas 77426 (US). **McCONNELL, Richard**; 4870 Gardenia Street, Ocean-side, California 92057 (US).

(74) Agent: **REID, Alexandra**; Atkinson & Company Intellectual Property Limited, 7 Moorgate Road, Rotherham S60 2BF (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: FORCE DETECTING SENSOR

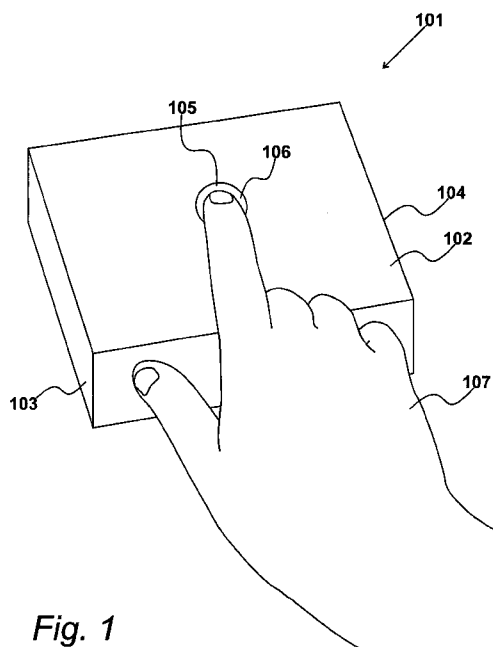


Fig. 1

(57) Abstract: A sensor (102) for detecting input force comprises a housing (103) having a cavity (201) and a contact element (105) which is enclosed in the cavity. The contact element and cavity provide a substantially flush profile along their respective surfaces (104, 106). The cavity includes a wall (301, 302, 303) having a sensing device (304) attached thereto and the contact element provides a physical contact between the contact element and the sensing device on application of a mechanical interaction to the surface of the contact element.



Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

FORCE DETECTING SENSOR

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims priority from United Kingdom Patent Application number GB 17 13 123.6, filed on 16 August 2017, the whole
5 contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

The present invention relates to a sensor for detecting input force and the manufacture of such a sensor and a method of detecting an input force.

It is known to provide sensors for use in a wide variety of applications
10 and industries. Sensors which provide touch capabilities in response to mechanical interactions such as pressure are often used in applications such as in electronic devices as part of a touchscreen, buttons or similar, or in respect of input devices such as joysticks for use in gaming.

When sensors are provided in commercial applications, it is often
15 important that they present a tactile interface which appeals to a user. It can be difficult to achieve ergonomic designs without compromising on functionality. Thus, more functional sensors, in particular those which provide measurements in three dimensions, are increasingly complex in order to enable the ergonomic requirements of commercial users to be met.

20 BRIEF SUMMARY OF THE INVENTION

According to an aspect of the present invention, there is provided a sensor for detecting input force in accordance with claim 1.

According to a further aspect of the present invention, there is provided a method of detecting an input force in accordance with claim 13.

25 According to a still further aspect of the present invention, there is provided a method of manufacturing a sensor for detecting input force, in accordance with claim 18.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

The invention will now be described by way of example only, with reference to the accompanying drawings, of which:

Figure 1 shows a sensor capable of detecting input force;

5 Figure 2 shows a diagrammatic view of the sensor of Figure 1;

Figure 3 shows a diagrammatic cross-sectional view of the sensor of Figures 1 and 2;

Figure 4 shows an example sensing device for use in the sensor described previously;

10 Figure 5 shows a cross sectional side view of the sensor of Figure 1;

Figure 6 shows a diagrammatic cross-sectional view of a plurality of layers which make up a sensing device;

Figure 7 shows the plurality of layers of Figure 6 in response to a mechanical interaction;

15 Figure 8 shows an alternative embodiment of a sensor for detecting input force;

Figure 9 shows the sensor of Figure 8 being utilised in an electronic device; and

20 Figure 10 shows a vehicle incorporating a sensor in the vehicle's bumper.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1

A sensor capable of detecting input force is illustrated in Figure 1. Figure 1 shows an apparatus in the form of a joystick **101** which comprises a sensor for detecting input force.

25

Sensor **102** comprises a housing **103** which has a top surface **104** and a contact element **105** which is enclosed by a cavity in housing **103**. Contact element **105** comprises an external surface **106** which is configured to receive a mechanical interaction so as to operate sensor **102**. As

illustrated, external surface **106** and top surface **104** provide a substantially flush profile extending from the external surface to the top surface, and will be further described with respect to Figure 5.

5 In the embodiment, external surface **106** comprises a moulded portion which comprises a finger-shaped profile which conforms to the finger of user **107**. In the embodiment, contact element **105** comprises an elastomeric material.

10 As shown, in use, sensor **102** is able to detect an input force when user **107** applies a mechanical interaction by means of an application of force to external surface **106** from the finger of user **107**. In the embodiment, sensor **102** is configured to detect a property of mechanical interaction, such as a force magnitude or position of force, in response to the finger press by user **107**. In this way, sensor **102** is used as a joystick and provides a low-profile joystick which a user can control with minimal movements of their
15 finger.

Figure 2

A diagrammatic view of sensor **102** is shown with respect to Figure 2. Housing **103** comprises cavity **201** disposed therein and top surface **104** as previously described. Contact element **105** is shown in exploded view so as
20 to expose cavity **201**. However, in use, it is appreciated that contact element **105** is enclosed in cavity **201** as will be further described with respect to Figure 5.

In the embodiment, cavity **201** comprises four side walls, such as side wall **202** and bottom wall **203**. Contact element **105** comprises a mutually co-
25 operating profile comprising corresponding side walls which therefore allows contact element **105** to be enclosed by cavity **201** in use.

Figure 3

A cross-sectional diagrammatic side view of sensor **102** is illustrated

with respect to Figure 3. Again, contact element 105 is shown in exploded view from housing 103 and cavity 201. Housing 103 defines cavity 201 as shown and a sensing device is positioned in cavity 201 to enable physical contact with contact element 105 when a mechanical interaction, such as a force, is applied.

In this embodiment, side walls 301 and 302 and bottom wall 303, define a v-shaped or u-shaped cross-sectional profile. Each of the walls 301, 302 and 303 have a sensing device 304 attached thereto. In the embodiment, sensing device 304 is aligned against the inner surface of each of the walls and attached to the inner surface.

In the embodiment, sensing device 304 is a single sensing device, although it is appreciated that, in alternative embodiments, a sensing device can be attached to each of the walls independently.

Thus, when contact element 105 is positioned within cavity 201, a contact can be made between contact element 105 and sensing device (or devices) 304.

Figure 4

An example embodiment of sensing device 304 will now be described with respect to Figure 4. Figure 4 illustrates a plan view of a sensing device prior to its application in cavity 201 described previously. Sensing device 304 comprises a central portion 401 and four extending portions 402, 403, 404 and 405.

In the embodiment, central portion 401 is configured to be positioned in line with bottom wall 303 and extending portions 402, 403, 404 and 405 are configured to attach to side walls, such as side walls 301 and 302. Each extending portion extends from central portion 401 and includes a foldable interface which allows sensing device 304 to be folded and bent in manufacture so as to fit in cavity 201. For example, foldable interface 406 provides a foldable line between extending portion 402 and central portion

401 to enable extending portion 402 to align against side wall 301 in the manner shown in Figure 3. It is appreciated that the dashed lines of Figure 4 illustrate where foldable interfaces are present in sensing device 304.

Figure 5

5 In manufacture of sensor 102, contact element 105 is positioned in cavity 201 of housing 103 such that contact element 105 is enclosed in cavity 201.

External surface 106 and top surface 104 of housing 103 provide a substantially flush profile which extends from external surface 106 to top surface 104.

10 In use, contact element 105 is configured to provide a physical contact between contact element 105 and sensing device 304 on application of a mechanical interaction in the direction of arrow 501 onto external surface 106. It is appreciated that while arrow 501 illustrates a force applied in a perpendicular direction to external surface 106, a force applied to external surface 106 in a non-perpendicular direction is still able to provide the physical contact between contract element 105 and sensing device 304. Thus, when inactive, sensing device 304 and contact element 105 are in a resting position whereby sensing device is not active (i.e. not providing a reading of force), and when the physical contact is made, sensing device 304 becomes active by means of the mechanical interaction applied. This will be described further in respect of Figures 6 and 7 which describe sensing device 304 in further detail.

Figure 6

25 Figure 6 shows a diagrammatic cross-sectional exploded view of a plurality of layers which make up sensing device 304 in an example embodiment.

In the example embodiment, sensing device 304 comprises a plurality

of layers which combine to enable the detection of the magnitude and position of a mechanical interaction when applied to sensing device 304 by means of contact element 105. In Figure 6, the plurality of layers are shown slightly apart in an exploded view, however, it is appreciated that these layers can be touching in the resting position but remain inactive until a mechanical interaction, such as a pressure is applied.

In the embodiment, sensing device 304 comprises substrates 601 and 602. Substrates 601 and 602 may comprise a PET (Polyethylene terephthalate) substrate although it is appreciated that other substrates may be suitable. Sensing device 304 further includes a conductive layer 603 which comprises silver and two further conductive layers 604 and 605 which comprise a printed carbon material. A further central layer 606 comprising a pressure sensitive variably resistive material is sandwiched between the two carbon layers 604 and 605. In the embodiment, the pressure sensitive variably resistive material comprises a quantum tunnelling composite material.

This particular arrangement provides a single point pressure sensor which, on application of force to one of the outer substrates, experiences a reduction in electrical resistance by means of the pressure sensitive variably resistive material thereby providing a means for detecting the position and magnitude of the applied mechanical interaction. Single point pressure sensors of this type are available from the applicant, Peratech Holdco Limited, Brompton-on-Swale, United Kingdom. In an embodiment, the sensing device is able to detect magnitude and position in three dimensional Cartesian axes, such that the force itself (in the z direction) can be determined, along with the x, y position of the applied force.

Figure 7

The diagrammatic view of Figure 6 is shown in Figure 7 and illustrates the response to a mechanical interaction by means of contact element 105. When a mechanical interaction is applied to the external surface 106 of

contact element **105**, physical contact is made along a bottom contact surface **701** of contact element **105**. It is appreciated that, in the example previously described with respect to Figure 5, such physical contact can be made with side contact surfaces of contact element **105** and the sensing device attached to the corresponding side walls of cavity **201**.

When this physical contact is made, each layer of sensing device **304** is compressed as shown to provide a conductive path through the layers of variable electrical resistance. Thus, a magnitude of force and position of force can be determined by utilising appropriate electrical circuitry in a manner known in the art.

Figure 8

An alternative embodiment of a sensor for detecting input force in accordance with the present invention will now be described with respect to Figure 8. Sensor **801** is shown in diagrammatic exploded form for illustrative purposes.

Sensor **801** comprises a housing **802** having a top surface **803** and a cavity **804** disposed therein. In a similar manner to sensor **102** as previously described, sensor **801** further comprises a contact element **805** which comprises an external surface **806** and which, in use is enclosed by cavity **804**. When enclosed in cavity **804**, external surface **806** and top surface **803** provide a substantially flush profile which extends from the external surface **806** to the top surface **803**.

In this embodiment, cavity **804** comprises an elongate channel **807** which has two longitudinal side walls **808** and **809** and a bottom wall **810**, and each of these walls are provided with a sensing device, which may be substantially similar to that as previously described with respect to Figures 6 and 7. Contact element **805** comprises a mutually co-operating profile to cavity **804** and, in this embodiment, is therefore also elongated. In the embodiment, the cross-sectional profile of the contact element comprises a

v-shaped or u-shaped profile and cavity **804** therefore provides a corresponding inverted v-shaped or u-shaped cross-sectional profile.

In use, contact element **805** again provides physical contact between contact element **805** and the sensing device on application of a mechanical interaction to the external surface **806**.

Thus, it is appreciated that sensor **801** functions in a substantially similar manner to sensor **102**, the difference being that the cavity is elongated and the sensing devices and contact element may also be elongated to correspond with this amendment.

Figure 9

Sensor **801** can be utilised in an electronic device in the manner of Figure 9. In the embodiment, sensor **801** forms part of an electronic device **901** which, in this illustrated example, is a mobile telephone.

Sensor **801** extends along an edge **902** of a telephone **901** and provides a user with an input device to control aspects of the mobile telephone **901**. As sensor **801** provides a substantially flush profile along edge **902**, it is capable of being incorporated into an electronic device without substantially affecting the design, and thus, in use, a user **903** can utilise sensor **801** as an ergonomic input device.

In this embodiment, the input force provided by user **903** is configured to be applied as a sliding force along external surface **806**. The sensing devices are therefore configured to detect this mechanical interaction and provide corresponding outputs to electronic device **901**. For example, a sliding force could be used to control volume output from the telephone, or, in the case of a video or other media playing on the device, advance the video by fast-forwarding or re-winding. In an alternative embodiment, sensor **801** is configured to provide a toggle function along the external surface, such that different functions can be selected or switched on or off by providing a force in an upwards or downwards manner.

It is appreciated that, while the current example describes the electronic device as a mobile telephone, any other suitable electronic device can utilise a sensor in accordance with the present invention. For example, other suitable electronic devices could be a hand-held computer, laptop, tablet, music and/or video players or other non-portable electronic devices requiring a user interface.

Figure 10

A further example embodiment utilising sensor 801 of Figure 8 is shown in Figure 10. Figure 10 shows a vehicle 1001 in the form of a car incorporating sensor 801 in the vehicle's bumper 1002.

In this embodiment, sensor 801 is able to detect any external objects which come into contact with sensor 801. In this way, sensor 801 provides a protective bumper and reacts to any objects which may impact vehicle 1001.

It is appreciated that sensor 801 may be used in alternative applications in which the detection of external objects to provide a protective bumper is also required. For example, robotic devices may include a plurality of sensors substantially similar to sensor 801 and/or sensor 102 on the exterior of the robotic device. This would then be used as a bump detector to avoid such a robotic device from receiving damage from any impact.

CLAIMS

The invention claimed is:

1. A sensor for detecting input force, comprising:
a housing defining a cavity therein and a top surface; and
5 a contact element enclosed by said cavity, said contact element comprising an external surface;
said cavity comprising at least one wall having an inner surface, said at least one wall having a sensing device attached thereto and aligned against said inner surface of said at least one wall;
10 said contact element being configured to provide physical contact between said contact element and said sensing device on application of a mechanical interaction to said external surface; wherein
said external surface and said top surface provides a substantially flush profile extending from said external surface to said top surface.
15
2. A sensor according to claim 1, wherein said sensing device is configured to detect magnitude and position of the mechanical interaction when applied.
- 20 3. A sensor according to claim 2, wherein said sensing device is configured to detect magnitude and position in three dimensional Cartesian axes.
4. A sensor according to any preceding claim, wherein said
25 sensing device is a single point pressure sensor.
5. A sensor according to claim 4, wherein said single point pressure sensor comprises a quantum tunnelling composite material.
- 30 6. A sensor according to any one of claims 1 to 5, wherein said

cavity comprises four side walls and a bottom wall, each said wall having one said sensing device attached thereto.

5 7. A sensor according to any one of claims 1 to 5, wherein said cavity comprises an elongate channel having two longitudinal side walls and a bottom wall, each said longitudinal side wall and said bottom wall comprising one said sensing device.

10 8. A sensor according to any preceding claim, wherein said contact element and said cavity each comprise mutually co-operating profiles.

15 9. A sensor according to any preceding claim, wherein said contact element comprises a v-shaped cross-sectional profile.

 10. A sensor according to any preceding claim, wherein said contact element comprises an elastomeric material.

20 11. A sensor according to any preceding claim, wherein said external surface comprises a moulded portion which comprises a finger-shaped profile.

25 12. A sensor according to any preceding claim, wherein said sensor is configured to detect an external object thereby providing a protective bumper.

30 13. A method of detecting an input force, comprising the steps of:
 providing a sensor having a housing defining a cavity therein and a contact element enclosed by said cavity;
 applying a mechanical interaction to an external surface of said contact element, said external surface and a top surface of said housing

providing a substantially flush profile extending from said external surface to said top surface;

5 providing a physical contact between said contact element and a sensing device attached and aligned with an inner surface of a side wall of said cavity; and

detecting a property of said mechanical interaction in response to said physical contact.

10 14. A method of detecting an input force according to claim 13, wherein said property of mechanical interaction comprises a force magnitude and a position of force along three axes.

15 15. A method of detecting an input force according to claim 13 or claim 14, further comprising the step of: detecting an external object in contact with said sensor so as to provide a protective bumper.

20 16. A method of detecting an input force according to claim 13 or claim 14, wherein said step of applying a mechanical interaction involves providing a sliding force along said external surface.

25 17. A method of detecting an input force according to claim 13 or claim 14, wherein said step of applying a mechanical interaction involves providing a toggle function along said external surface.

30 18. A method of manufacturing a sensor for detecting input force, comprising the steps of:

producing a housing having a top surface;

providing said housing with a cavity comprising at least one wall;

aligning a sensing device against an inner surface of said at least one wall;

attaching said sensing device to said inner surface of said at least one

wall; and

positioning a contact element into said cavity such that said contact element is enclosed by said cavity and such that an external surface of said contact element and said top surface provides a substantially flush profile extending from said external surface to said top surface;

said contact element being able to provide physical contact between said contact element and said sensing device on application of a mechanical interaction to said external surface.

10 **19.** A method of manufacturing according to claim 18, wherein in said step of positioning said contact element into cavity, said contact element is positioned so as to mutually co-operate with said cavity.

15 **20.** A method of manufacturing according to claim 19, wherein said contact element is produced to have a v-shaped cross-sectional profile.

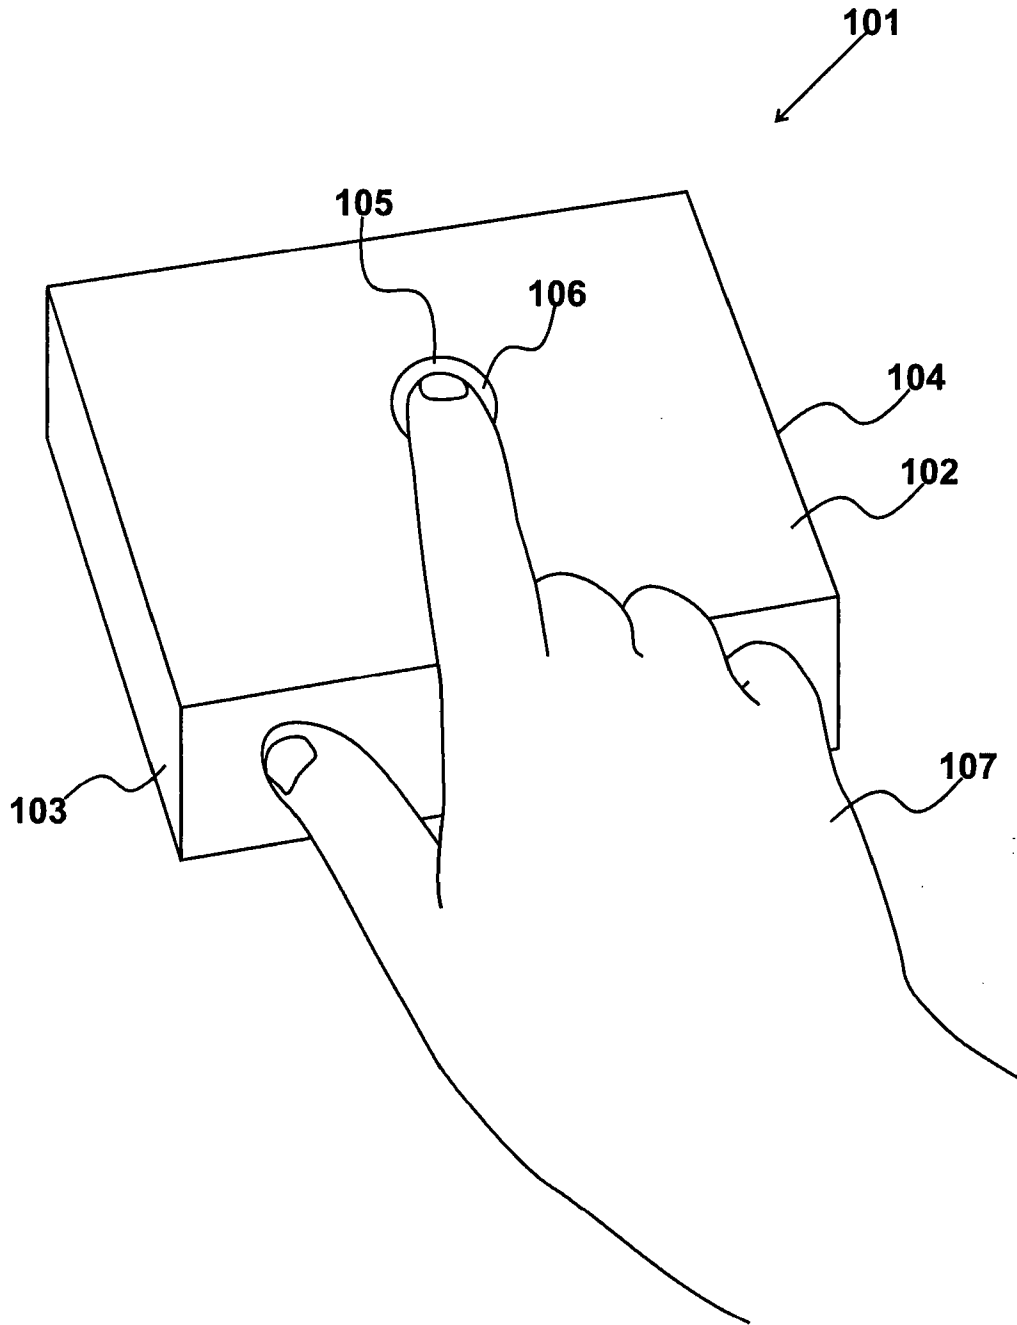


Fig. 1

2/10

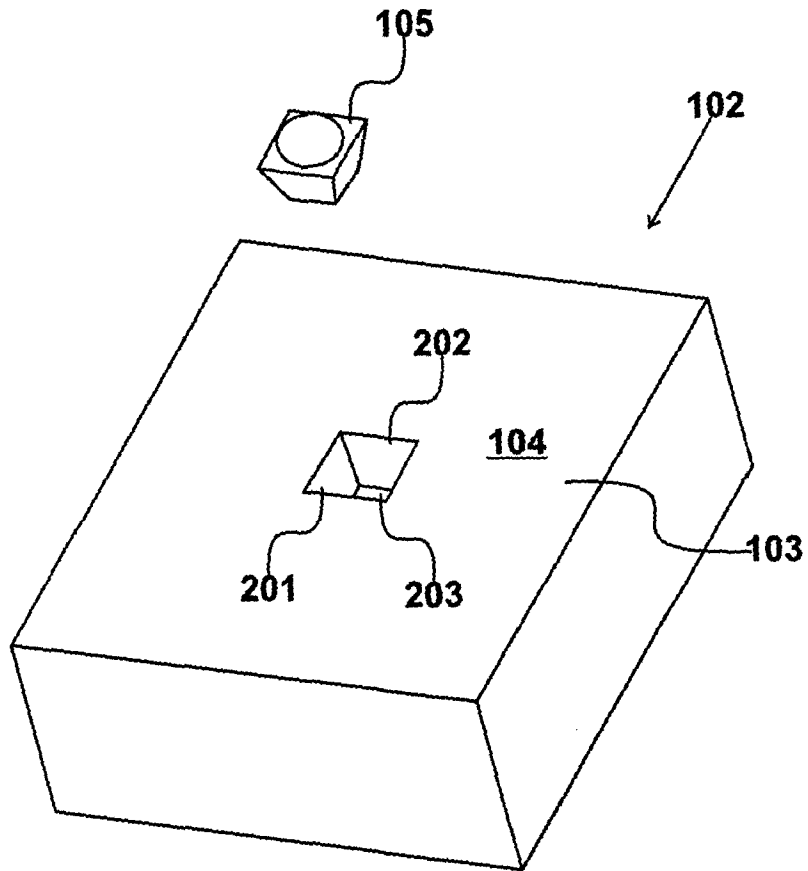


Fig. 2

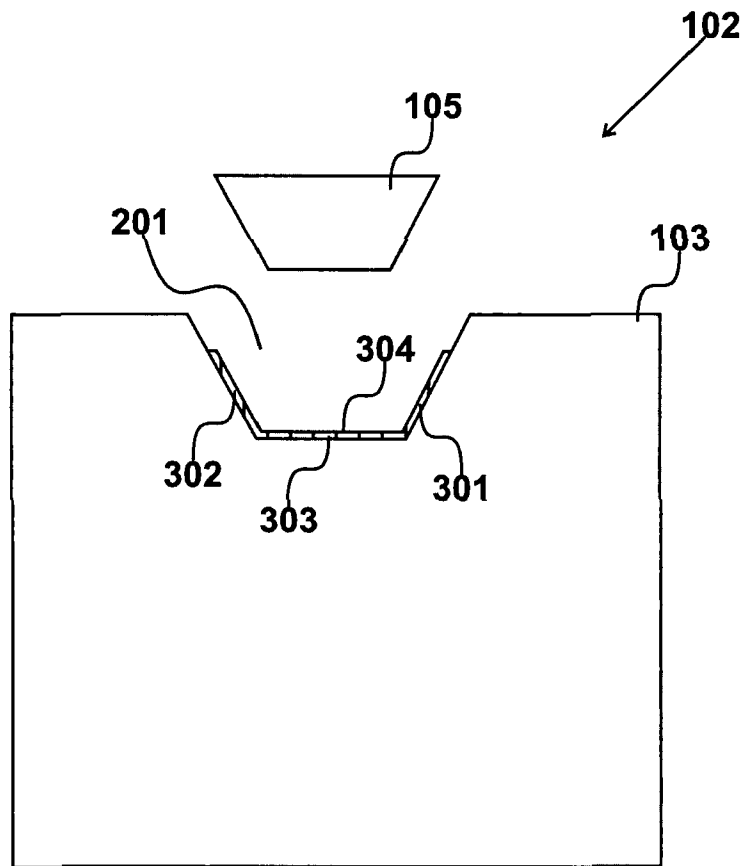


Fig. 3

4/10

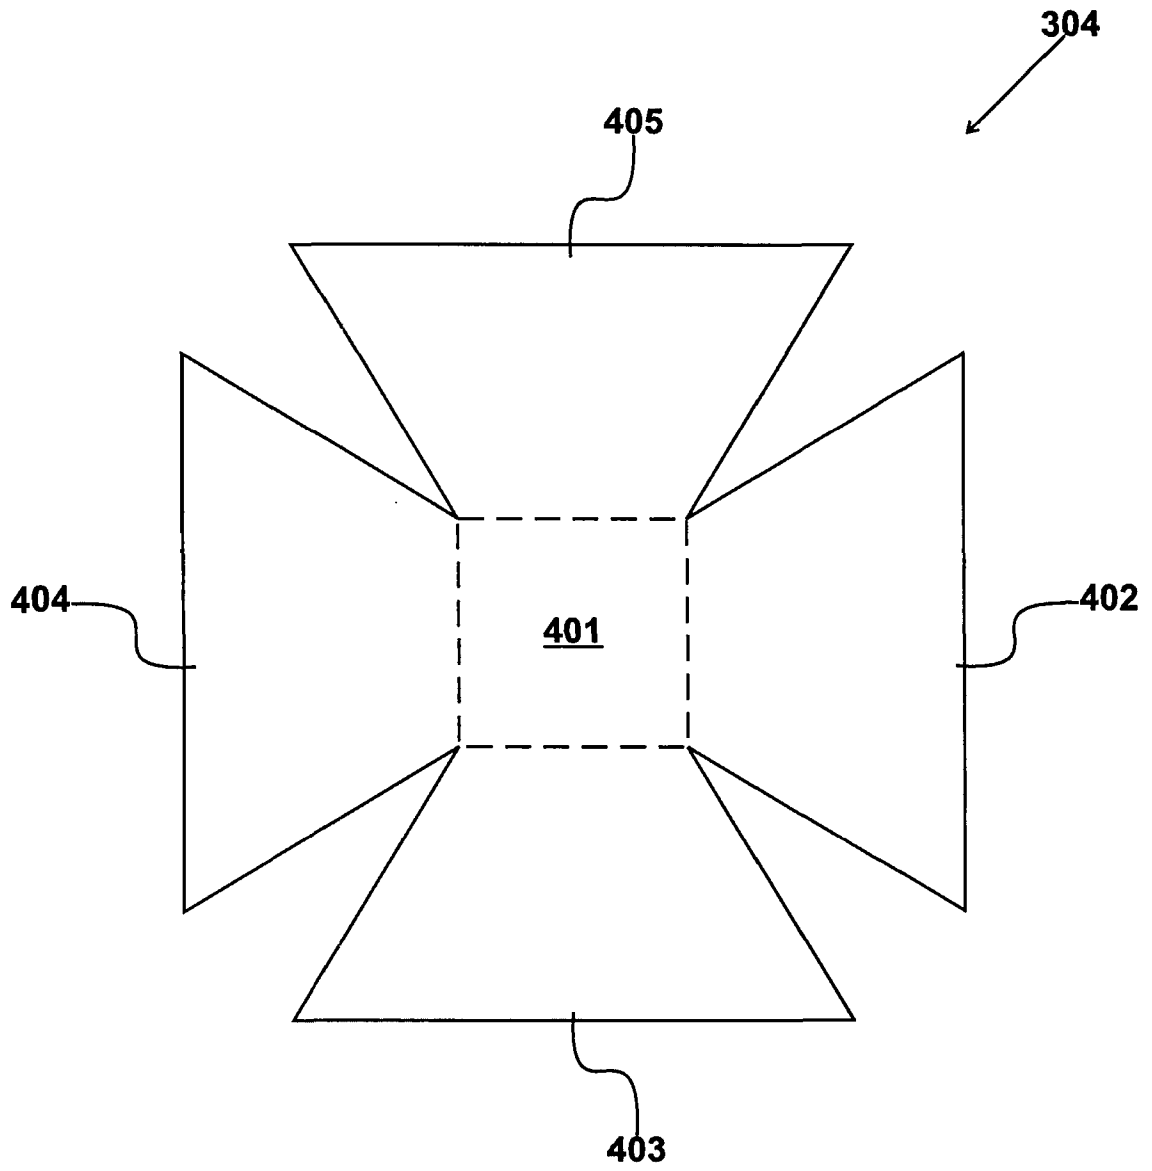


Fig. 4

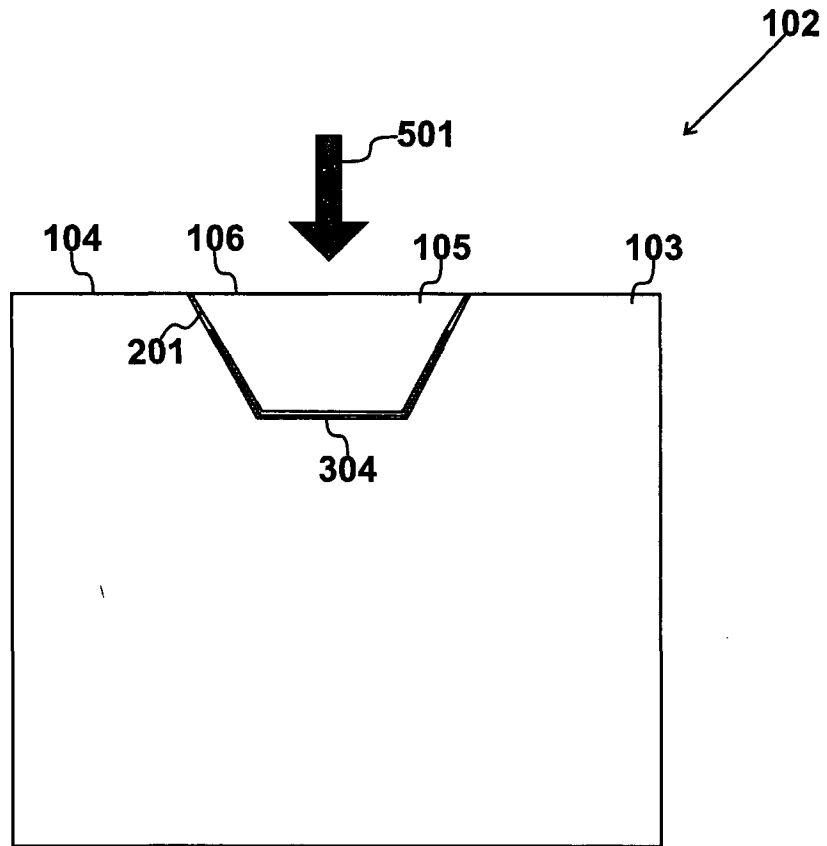


Fig. 5

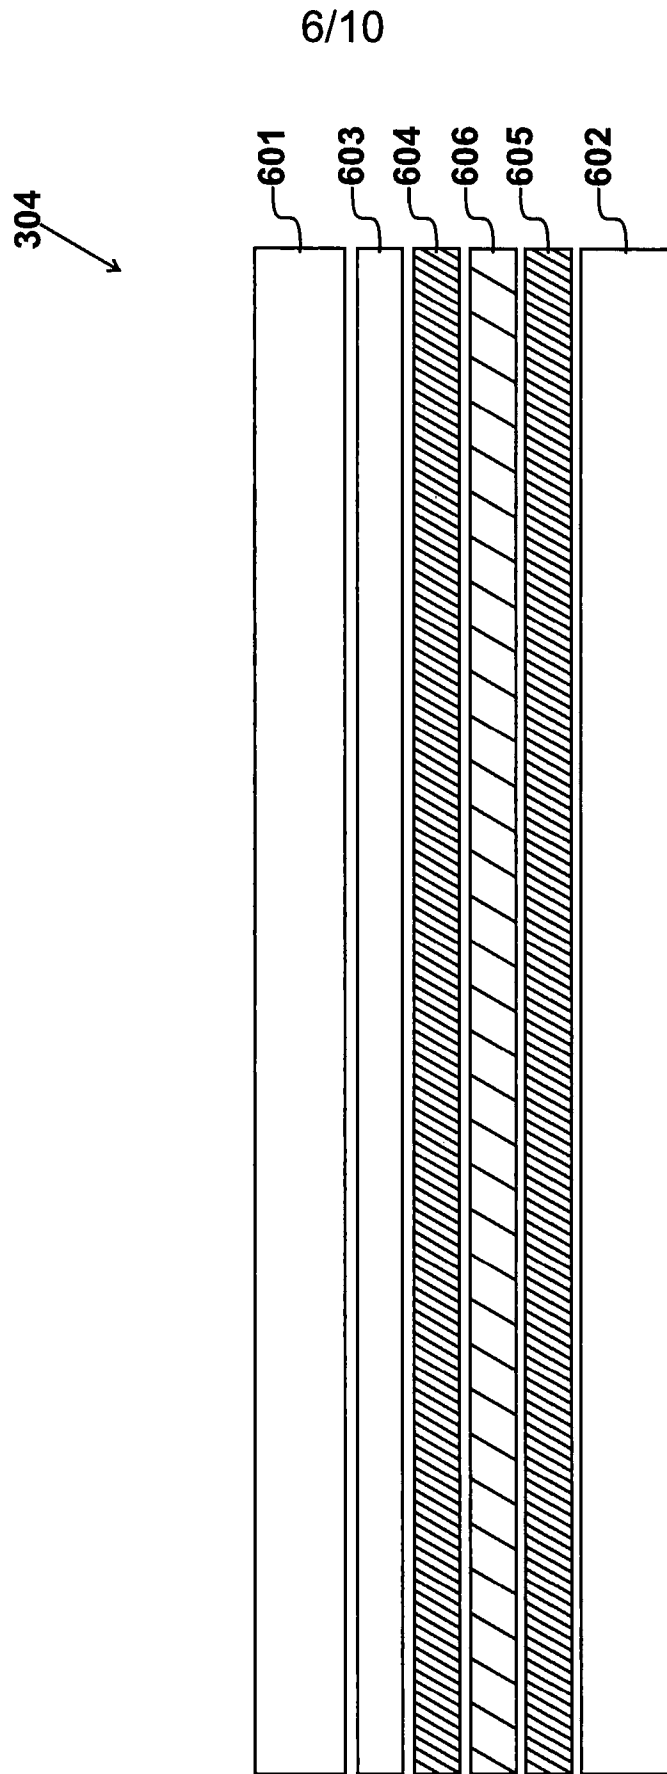


Fig. 6

7/10

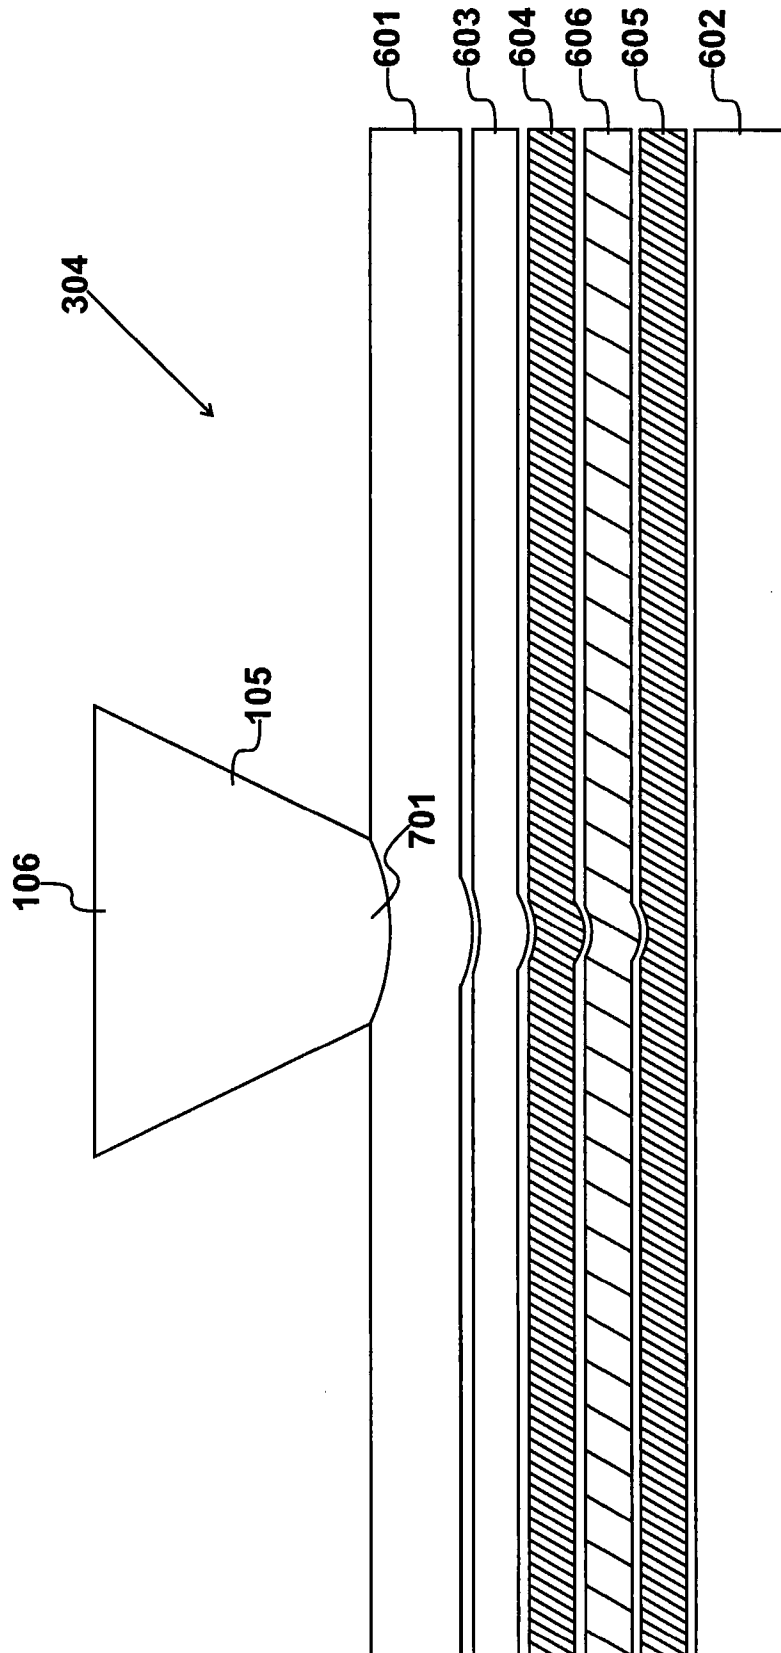


Fig. 7

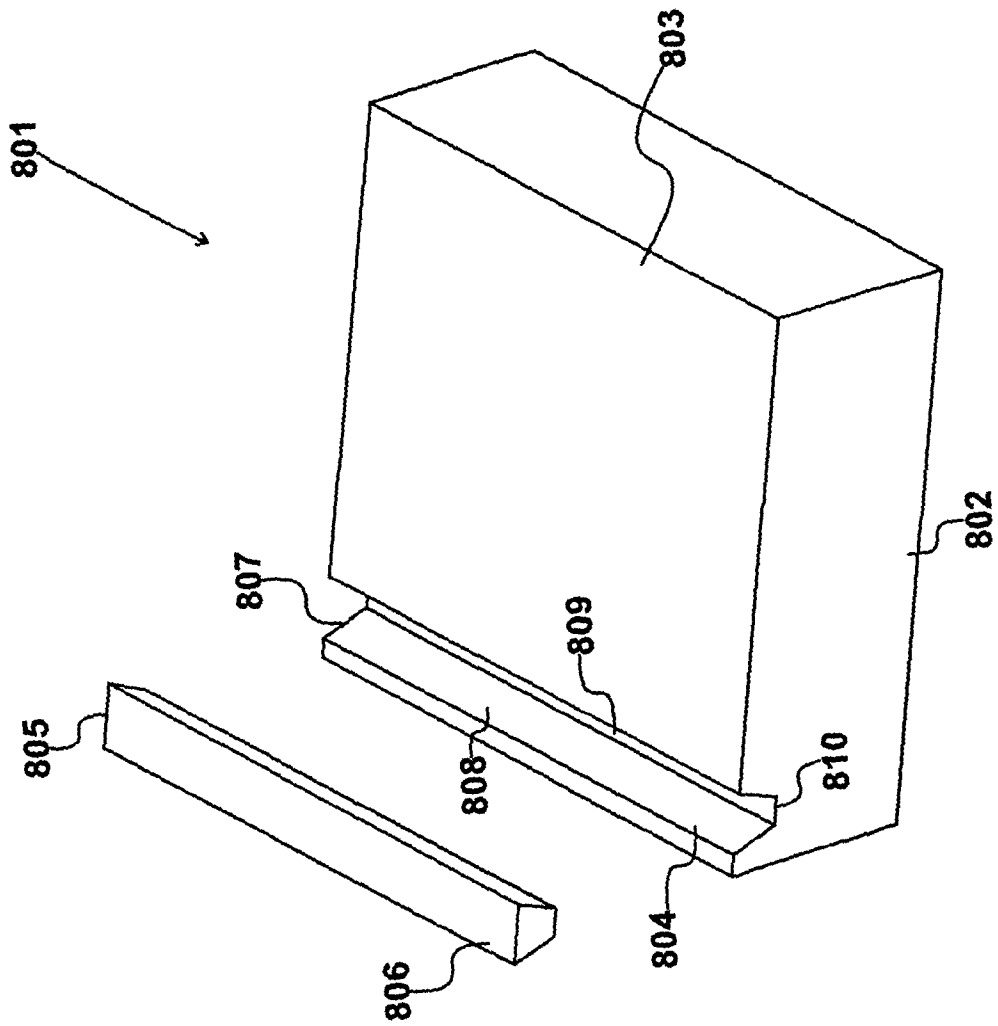


Fig. 8

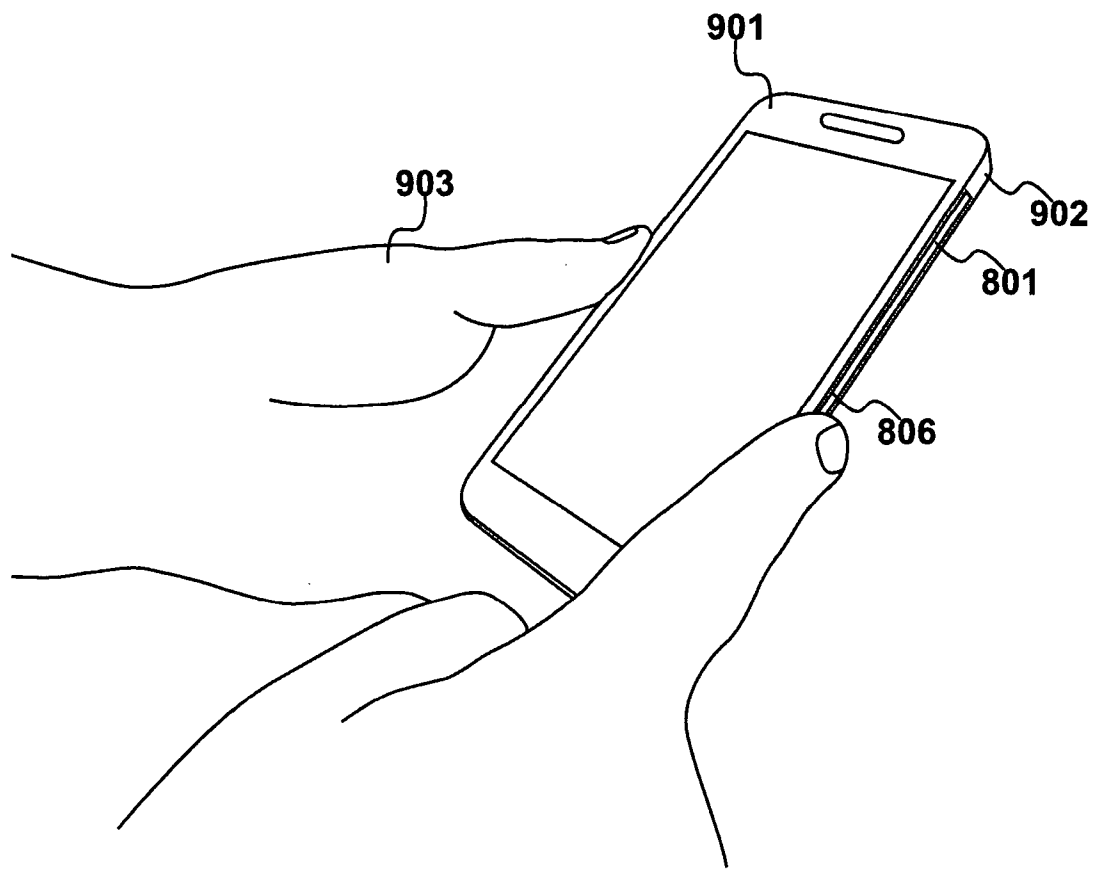


Fig. 9

10/10

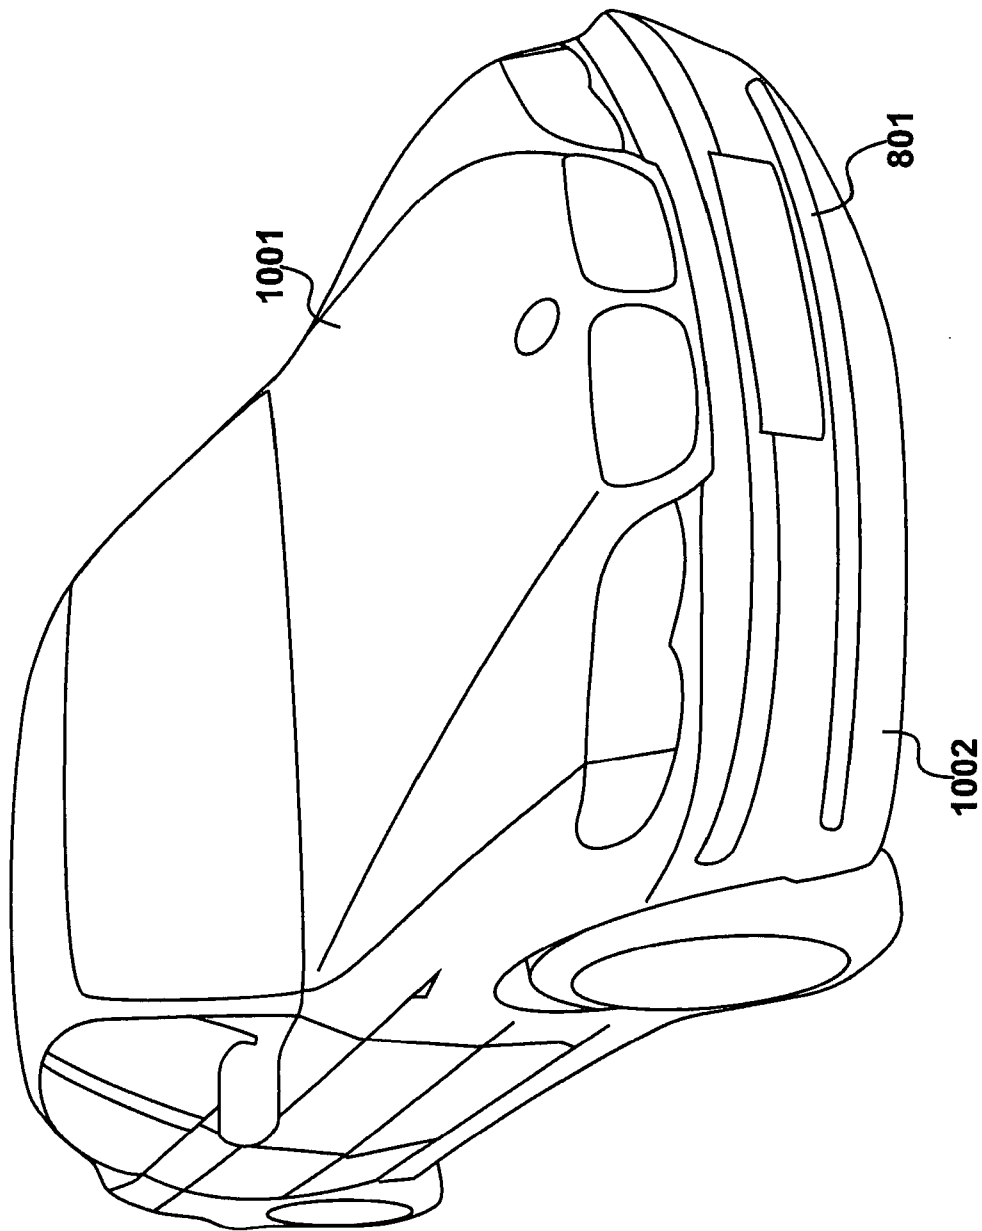


Fig. 10

INTERNATIONAL SEARCH REPORT

International application No PCT/GB2018/000113

A. CLASSIFICATION OF SUBJECT MATTER INV. G01L5/22 G01L1/20 G06F3/041 H03K17/96 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) G01L G06F H03K		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/180620 A1 (GETTEMY SHAWN R [US] ET AL) 5 December 2002 (2002-12-05) figures 1-5 paragraph [0033] paragraph [0036] paragraph [0056] - paragraph [0058] paragraph [0042]	1-20
X	EP 1 519 173 A1 (HOKURIKU ELECT IND [JP]) 30 March 2005 (2005-03-30)	1,4,5,8, 9,12,13, 15-20
A	figure 1 paragraph [0022] - paragraph [0025] ----- -/--	2,3,6,7, 10,11,14
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 21 December 2018		Date of mailing of the international search report 07/01/2019
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Keita, Mamadou

INTERNATIONAL SEARCH REPORT

International application No PCT/GB2018/000113

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014/260678 A1 (JENTOFT LEIF [US] ET AL) 18 September 2014 (2014-09-18)	1,4,8, 10,11, 13,18,19
A	figure 8b paragraph [0005] paragraph [0050]	2,3,5-7, 9,12, 14-17,20
A	----- US 9 524 070 B2 (LG DISPLAY CO LTD [KR]) 20 December 2016 (2016-12-20) figure 1 column 4, line 59 - column 5, line 8 -----	5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2018/000113

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 2002180620	A1	05-12-2002	US 2002180620 A1	05-12-2002
			US 2005184974 A1	25-08-2005
			US 2008083569 A1	10-04-2008
			US 2011254801 A1	20-10-2011

EP 1519173	A1	30-03-2005	AU 2003227495 A1	27-10-2003
			EP 1519173 A1	30-03-2005
			JP 3479064 B1	15-12-2003
			JP 2004003934 A	08-01-2004
			US 2005217386 A1	06-10-2005
			US 2007234827 A1	11-10-2007
			WO 03087747 A1	23-10-2003

US 2014260678	A1	18-09-2014	US 2014260678 A1	18-09-2014
			US 2017191891 A1	06-07-2017

US 9524070	B2	20-12-2016	CN 105988653 A	05-10-2016
			KR 20160114217 A	05-10-2016
			US 2016282999 A1	29-09-2016
