

(21) Application No: 1211351.0
(22) Date of Filing: 26.06.2012
(30) Priority Data:
(31) 1111120 (32) 29.06.2011 (33) GB

(71) Applicant(s):
Roke Manor Research Limited
(Incorporated in the United Kingdom)
Old Salisbury Lane, ROMSEY, Hampshire, SO51 0ZN,
United Kingdom

(72) Inventor(s):
Graham Leighton

(74) Agent and/or Address for Service:
Withers & Rogers LLP
4 More London Riverside, LONDON, SE1 2AU,
United Kingdom

(51) INT CL:
H01Q 7/08 (2006.01) **H01Q 23/00** (2006.01)

(56) Documents Cited:
GB 2300921 A **GB 2169764 A**
EP 1850475 A1 **US 4314378 A**
US 2406360 A **US 20070222695 A1**

(58) Field of Search:
INT CL **H01Q, H03F**
Other: **EPODOC, WPI, INSPEC, TXTE**

(54) Title of the Invention: **Reduced Q low frequency antenna**
Abstract Title: **Rod antenna circuit with centre tapped coil, differential amplifier and negative feedback**

(57) A rod antenna circuit 20 comprises: a first antenna coil 24 wound on a former 22 and the ends of the coil providing first and second connections, respectively, to the non-inverting and inverting inputs of a differential amplifier 32 which provides an output signal which is used to provide a negative feedback signal to the first antenna coil 24 via a feedback coil 26 which is magnetically coupled to the first antenna coil. The first antenna coil 24 may have a centre tap 242 connected to AC ground and the circuit may include biasing means for suitable amplifier 32 operation. Also disclosed is an antenna circuit comprising: a plurality of sets of antenna circuitry, each set comprising an antenna coil wound on a former, feedback circuitry and a negative feedback coil; the feedback coil being magnetically coupled to the antenna coil; wherein the antenna coils and the feedback coils of the plurality of sets of antenna circuitry are magnetically coupled and the antenna circuit comprises at least one output signal derived from one of the sets of feedback circuitry, the output signal providing a frequency response corresponding to the individual frequency responses of the plurality of sets of antenna circuitry. The rod antenna circuit may have a reduced Q, electric field susceptibility and noise with multiple band or wideband operation.

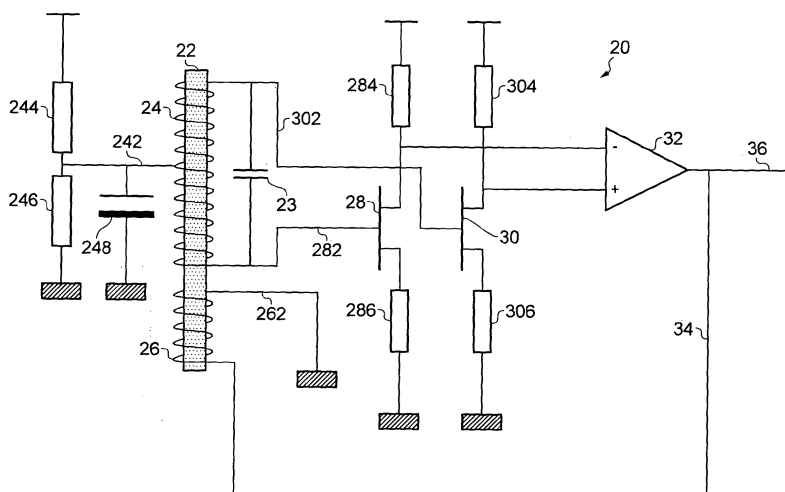


FIG. 2

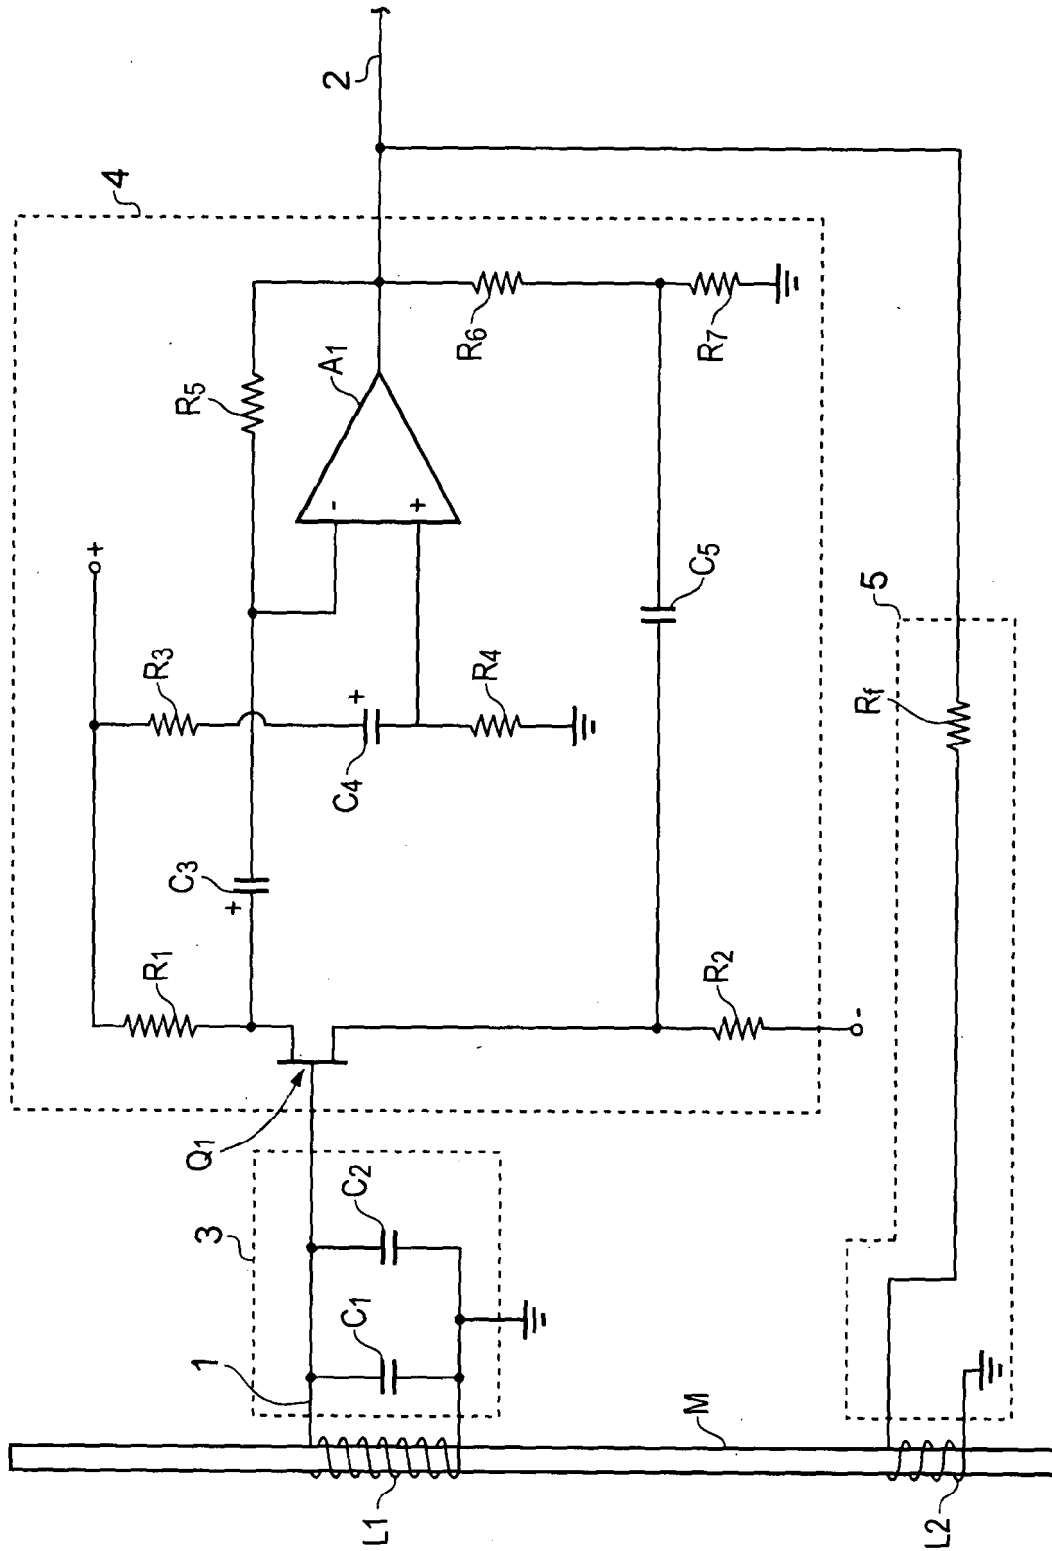


FIG. 1 (Prior Art)

31 32 33

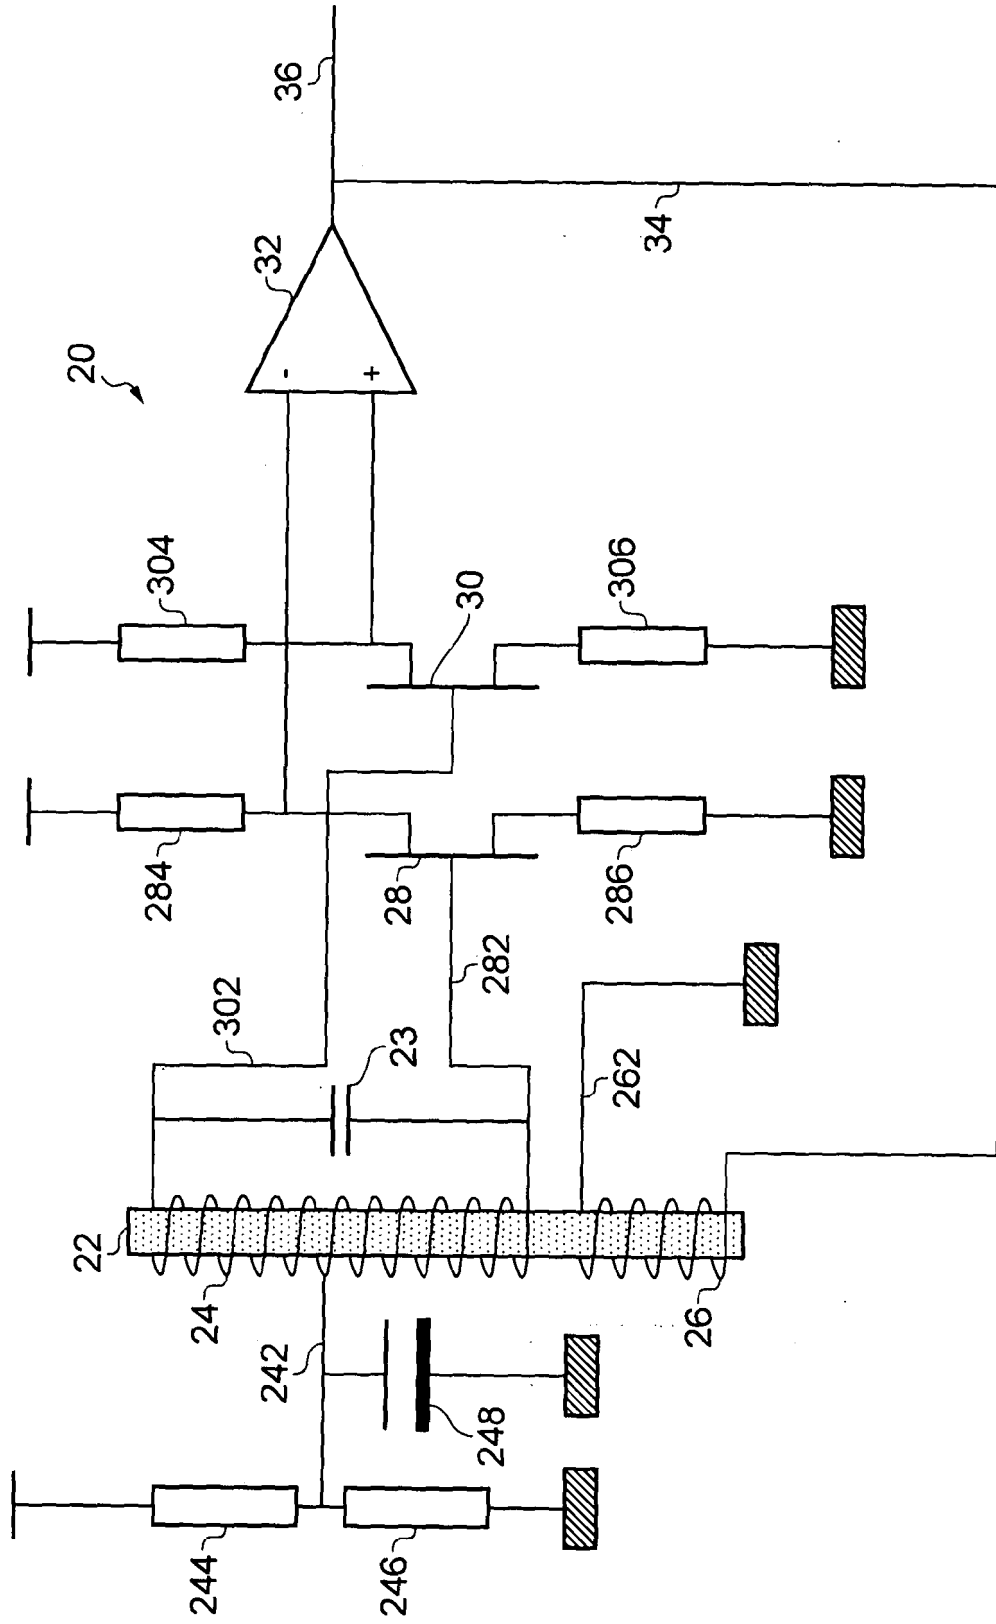


FIG. 2



FIG. 3

31 0 12

4/7

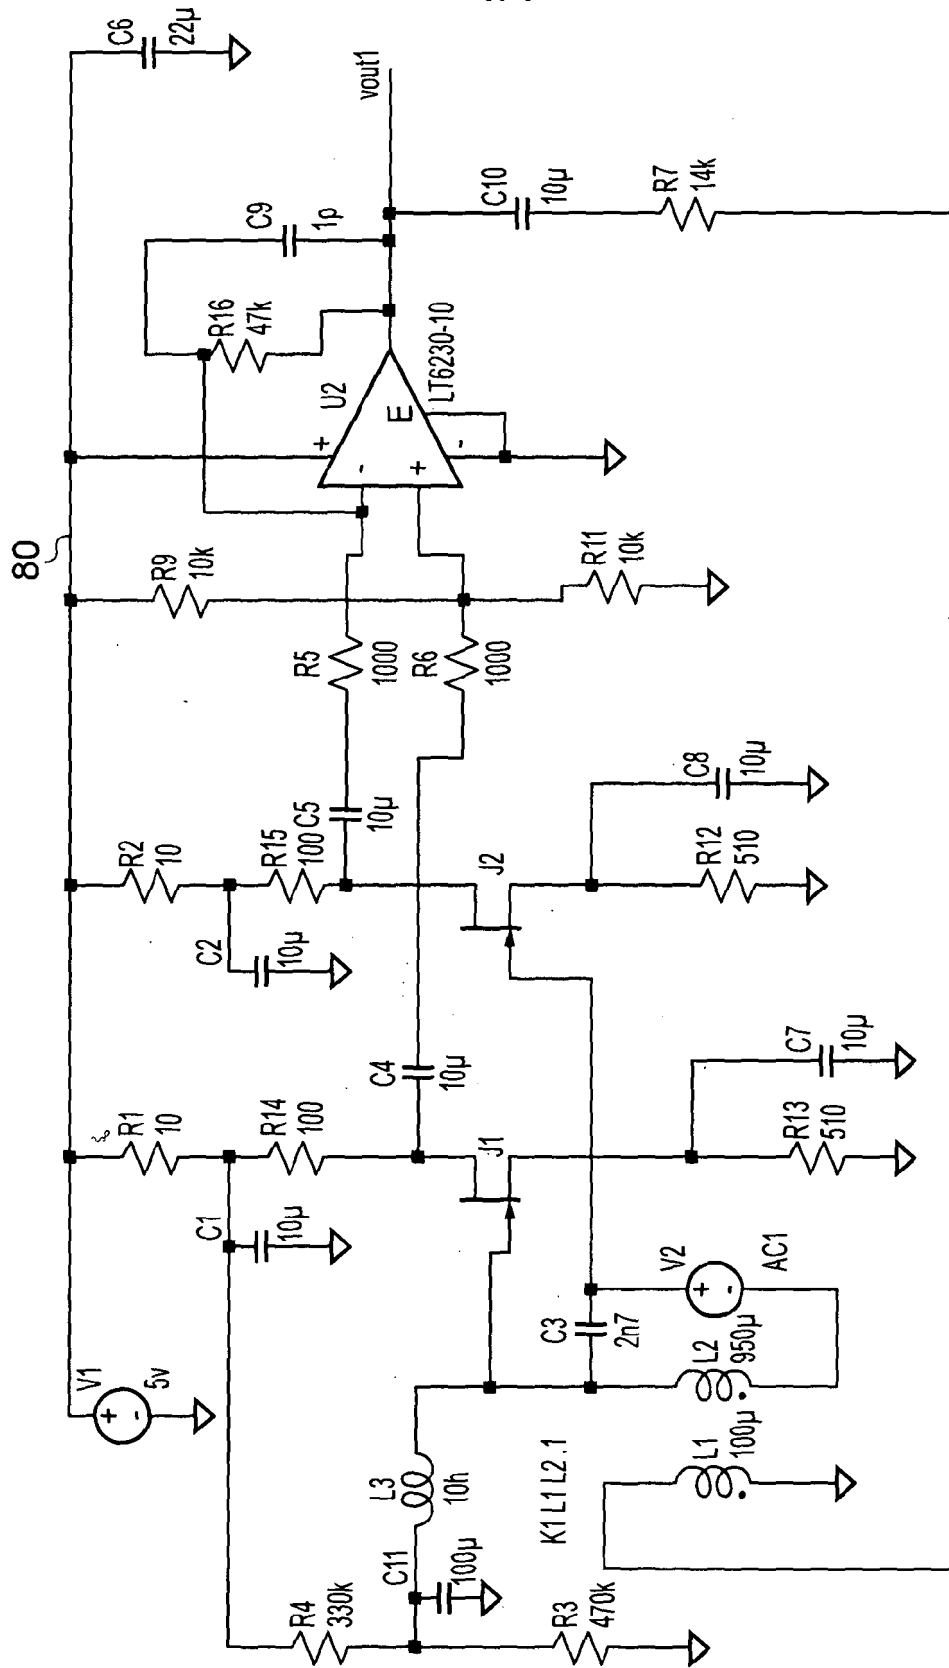


FIG. 4

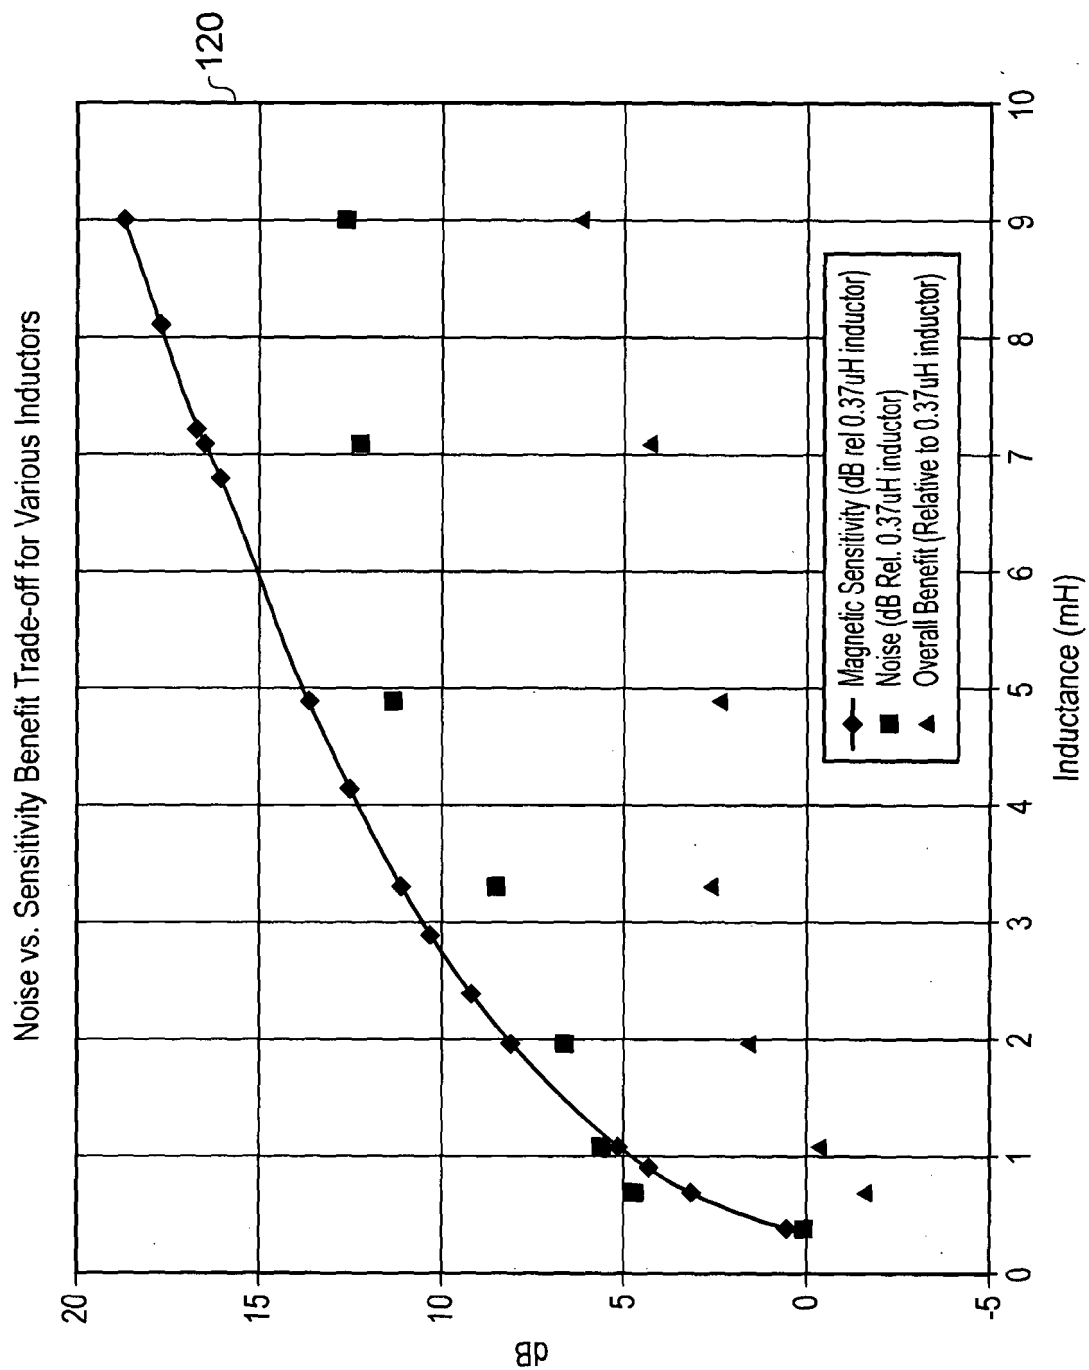


FIG. 5

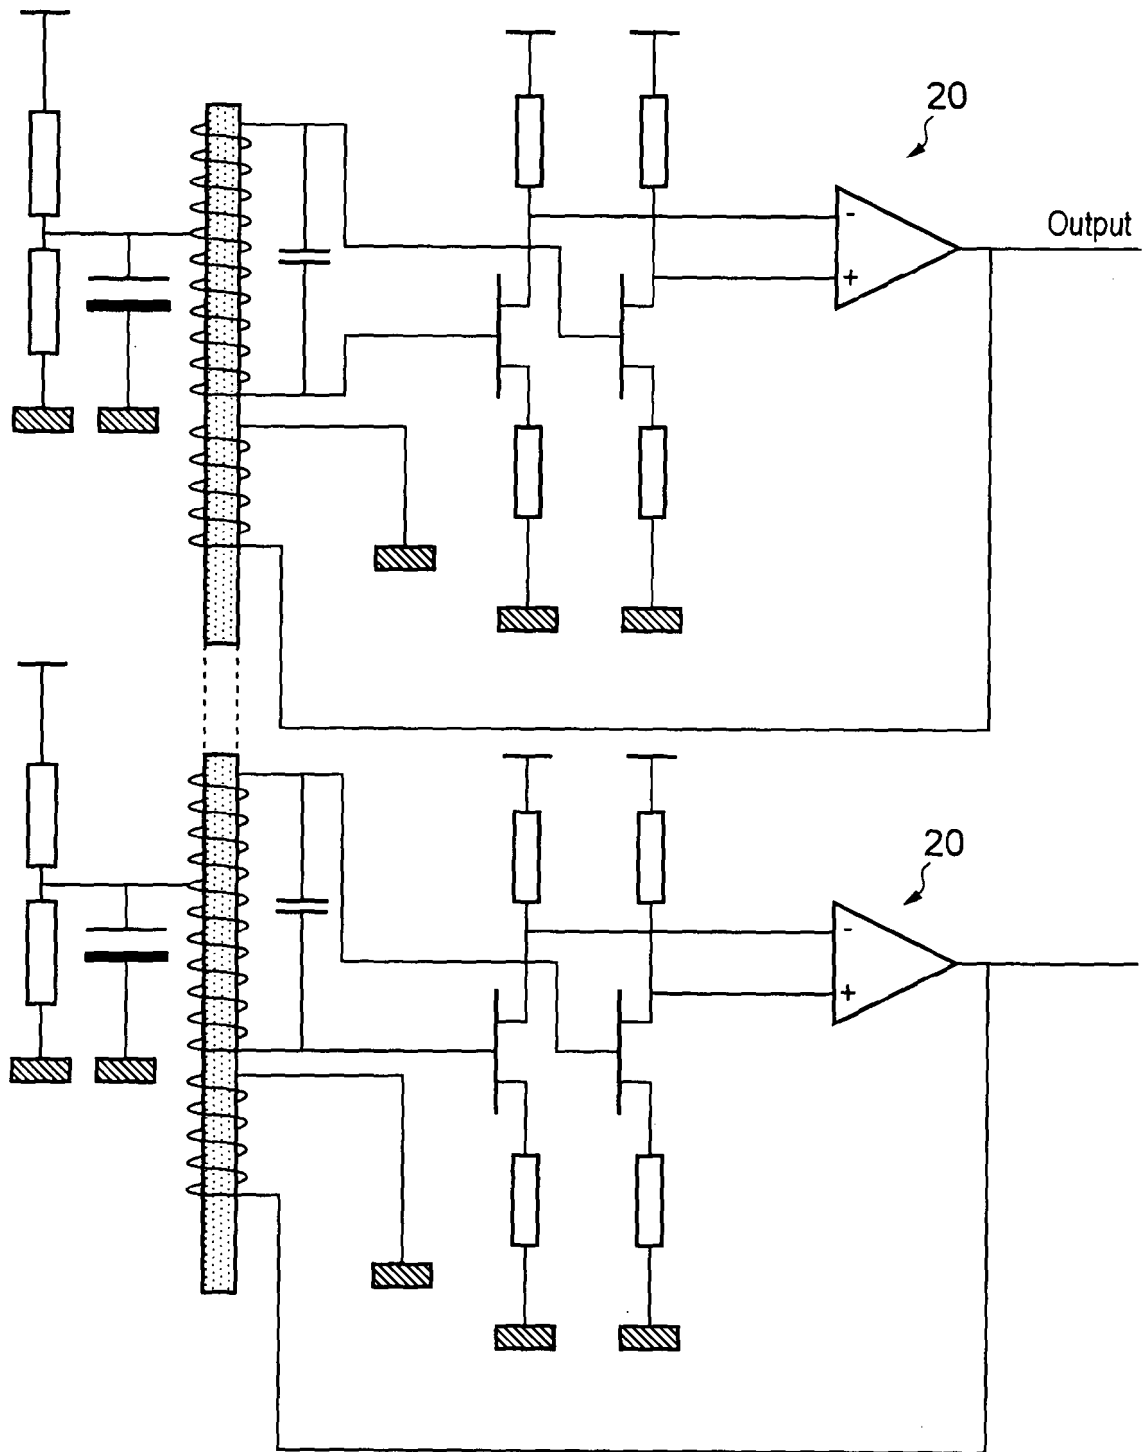


FIG. 6

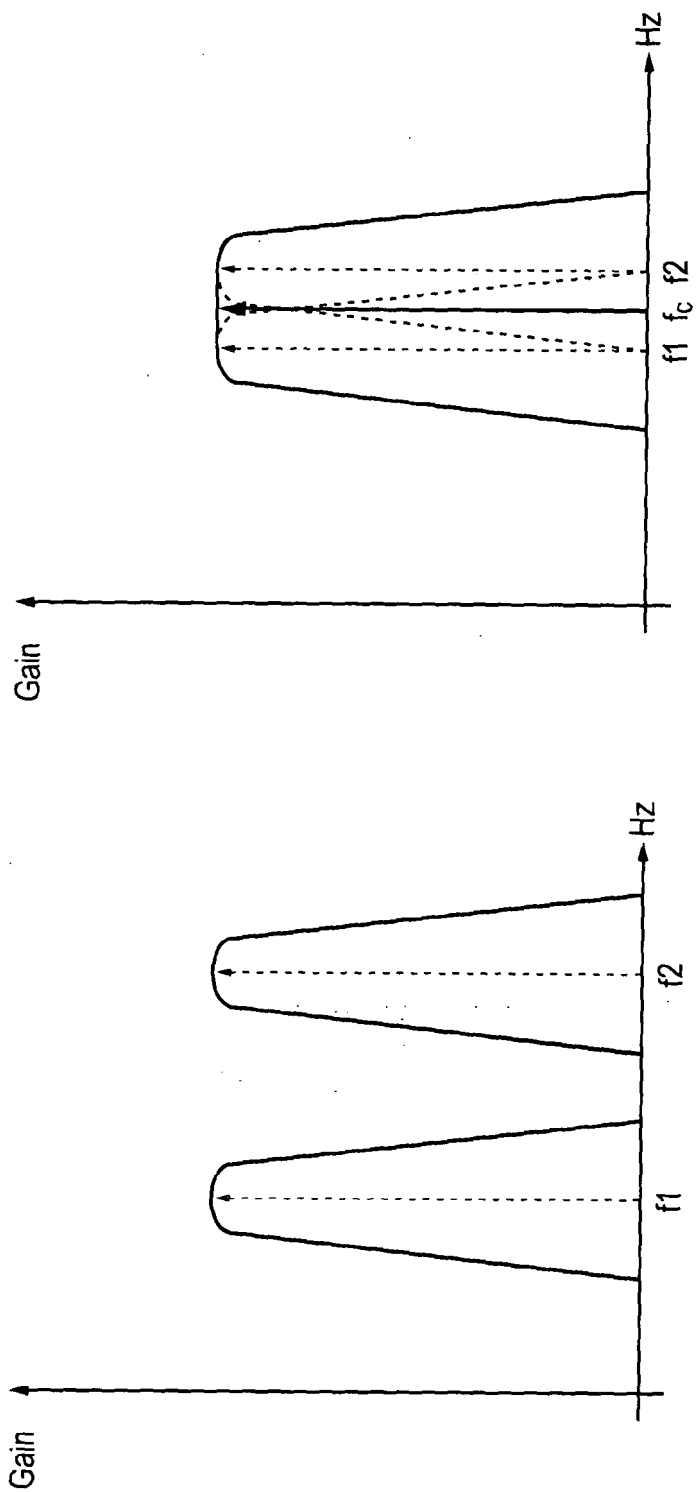


FIG. 7(a)

FIG. 7(b)

Reduced Q Low Frequency Antenna

Technical Field

- 5 The present invention relates to a rod antenna, and in particular a rod antenna which has reduced Q by making use of negative feedback.

Background to the Invention and Prior Art

- 10 Rod antennas are known in the art for the receipt of low frequency signals in the range typically of a few tens of kHz up to 1 to 2 MHz. A conventional low frequency rod antenna usually comprises a number of turns of wire on a former, the former usually being a ferrite rod. The coil forms an inductor and the antenna may be tuned to a particular frequency by adding a capacitor for example in parallel with the inductor so
15 that the inductor and capacitor form a resonant circuit. However, the inductor-capacitor combination provides a frequency response with very high Q, which, whilst acceptable for the reception of narrow band signals, is not acceptable for the reception of wide band signals, where the bandwidth is a significant portion of the antenna centre frequency. For example, in the LORAN navigational system, the centre frequency is
20 100 kHz, but with a -20dB bandwidth of 20kHz. A rod antenna with high Q thanks to the inductor-capacitor resonant circuit may therefore not be suitable for receiving such a wideband signal.

- It is known to reduce the Q in several ways. A conventional way is to add an additional
25 resistor, but this has the effect of reducing the sensitivity of the antenna, and decreasing the signal to noise ratio. Another known technique is to apply negative feedback to the antenna magnetic circuit, by use of a secondary feedback coil. Such a technique is known from US 2,787,704, but more particularly from US 4,314,378, the arrangement of which is shown in Figure 1.

- 30 As shown in Figure 1, a parallel inductor-capacitor resonant tank circuit, wherein the inductor has a ferrite rod core M and provides an output via field effect transistor Q1 to the inverting input of an operational amplifier A1. Connected to the output of the amplifier A1 is inductor L2, which is magnetically coupled to the ferrite rod so that it

responds to the same magnetic field as inductor L1. The turns of the inductor L2 are applied to the ferrite rod M in the same sense as inductor L1 so that the voltage applied to inductor L2 will produce a voltage on L1 that is in phase with the voltage on L2. Because of the inversion produced by operational amplifier A1, the magnetic field
5 produced by the current in L2 will be 180° out of phase with the antenna detect signal 1 output from L1. The magnitude of the negative feedback can be controlled via a feedback resistor R_f .

The effect of the negative feedback on the Q of the rod antenna is to reduce the Q, but
10 the sensitivity of the antenna is not reduced.

Whilst the prior art of record reduces sensitivity of the rod antenna to proximal components, it would be beneficial if such insensitivity could be increased. In addition, sensitivity of the antenna can also be increased by improvements aimed at reducing
15 noise in the circuit.

Summary of the Invention

Embodiments of the invention provide an improved rod antenna and antenna tank
20 circuit which make use of negative feedback to reduce the Q of the antenna, but which also makes use of a different coil tapping arrangement to significantly reduce electric field susceptibility on the detected signal from the main coil and/or different biasing arrangements to reduce noise. More particularly, in some embodiments of the invention the main detector coil of the antenna has a centre tap that is AC grounded with signal
25 taps then being taken from the opposite ends of the main coil, and being respectively fed to the inputs of a differential amplifier. The output of the differential amplifier is then fed to the magnetic circuit of the rod antenna via a second inductor winding that is magnetically coupled to the resonance circuit of the main antenna coil. The AC grounding of the centre of the main coil significantly reduces susceptibility of the coil to
30 the electric field with attendant advantages of reducing E-field interference and proximity effects of other components, as well as preserving the radiation pattern of the antenna. In addition, in further embodiments of the invention improvements are made to the biasing circuitry of the antenna's tank circuit, and of the amplifier, and in particular through removing resistors from the AC circuit at the input, and having

biasing provided to the circuit via an inductor. Investigations have also been undertaken to determine more optimal coil resistances, and front end buffer amplifiers between the antenna and the operational amplifier.

5 In view of the above, from one aspect there is provided rod antenna circuit comprising:
a first antenna coil wound on a former, the coil providing first and second output
connections at opposite ends of the coil; a differential amplifier having inverting and
non-inverting inputs, the inverting input receiving a first signal derived from one of the
first and second output connections, and the non-inverting input receiving a second
10 signal derived from the other of the first and second output connections, the differential
amplifier providing a differential output signal dependent upon the first and second
signals; and a feedback coil magnetically coupled to the first antenna coil and arranged
to be fed the differential output signal so as to provide negative feedback to the first
antenna coil.

15

The use of the differential amplifier has the effect that electric field (E-field) rejection is
provided within the common mode range of the differential amplifier. In this respect,
whilst a rod antenna is predominantly a magnetic-field (H-field) antenna, an E-field is
generated across the output of the antenna which can be susceptible from interfering E-
20 fields from proximal components. However, by using the differential amplifier
susceptibility to E-field interference is reduced.

In one embodiment the first antenna coil comprises a centre tap that is AC grounded.
This has the effect of providing a balanced connection to the antenna coil, thus also
25 reducing susceptibility to E-field. In addition, the centre tapped AC ground has the
effect of tying the centre of the antenna to ground, so that the common mode voltage
developed at the output of the antenna, taken from the opposite ends of the antenna coil
can be kept within the common mode input range of the differential amplifier.

30 Where a centre tap is used, in one embodiment the first antenna coil comprises wound
bifilar wire. This provides advantages in manufacture, as the bifilars at one end of the
wound wire together form the centre tap, and the bifilars at the other end of the wound
wire provide the first and second output connections. With such an arrangement it

becomes possible to ensure that there are the same numbers of turns in each half of the antenna coil either side of the centre tap.

5 In addition where a centre tap is used, in one embodiment biasing circuitry is further provided to provide a bias signal so as to bias the first and second signals to within the common mode range of the differential amplifier. In this way the signals received from the antenna can be kept within the input range of the differential amplifier whilst taking into account other biasing in the circuit.

10 In one embodiment a bias signal is provided to the first antenna coil from biasing circuitry via a first bias inductor. This allows for biasing of the antenna circuit without using resistors in the AC front end, which leads to an improvement in noise performance.

15 In one embodiment the feedback coil is wound on the same former as the antenna coil. This provides for easy and convenient magnetic coupling between the feedback coil and the antenna coil.

20 In one embodiment the feedback coil is over wound on the antenna coil. By winding the feedback coil over the antenna coil magnetic coupling is easily achieved as both coils are wound on the same former, and space savings may be made as a shorter former can be used.

25 In embodiments of the invention a first transistor arranged to receive an output signal from one of the first and second output connections of the first antenna coil and to generate the first signal in dependence thereon is provided, as well as a second transistor arranged to receive an output signal from the other of the first and second output connections of the first antenna coil and to generate the second signal in dependence thereon. The first and second transistors act as buffer amplifiers between the antenna
30 coil and differential amplifier, preventing loading of the antenna which may affect the frequency of operation.

Preferably, the first and second transistors are field effect transistors. In this respect, the use of FETs provides improved noise performance.

In one embodiment a buffer amplifier may be provided at the output of the differential amplifier, the buffer amplifier arranged to isolate the feedback signal taken from the output of the differential amplifier from load changes in any subsequent circuitry.

5

Within some embodiments of the invention the advantage is obtained that the negative feedback results in a minima in noise performance at the centre frequency of the antenna. That is, minimum noise is obtained at the centre frequency, with noise (in pV/Hz) increasing with frequency either side of the centre frequency.

10

In one preferred embodiment, a plurality of rod antenna circuits as described above are provided, the antenna coils and feedback coils of the plurality of antenna circuits being magnetically coupled. This allows for an antenna with extended performance characteristics to be provided, that may, for example, provide for multi-frequency performance, or wide-band performance.

15

In this respect, in one embodiment, the respective antenna coils may be tuned to different frequencies. Depending on the frequencies chosen, either a multi-band or wideband, or both, frequency response may be obtained.

20

For example, in one embodiment the respective antenna coils are tuned to different frequencies that are sufficiently apart such that the bandwidths of the respective antenna coils do not substantially overlap, whereby a multi-frequency antenna is obtained. Alternatively, in another embodiment the respective antenna coils are tuned to different frequencies that are sufficiently close together such that the bandwidths of the respective antenna coils at least partially overlap, whereby a wide-band antenna is obtained. In a further example a combination of the frequencies may be chosen, to give multiple frequency wideband performance.

25

From another aspect, embodiments of the invention may also provide an antenna circuit, comprising: a plurality of sets of antenna circuitry, each set comprising an antenna coil wound on a former, feedback circuitry, and a feedback coil, the feedback coil being magnetically coupled to the antenna coil and arranged to be fed a feedback signal derived from the feedback circuitry so as to provide negative feedback to the antenna

30

coil; wherein the antenna coils and the feedback coils of the plurality of sets of antenna circuitry are magnetically coupled; and wherein the antenna circuit comprises at least one output signal derived from one of the sets of feedback circuitry, the output signal providing a frequency response corresponding to the individual frequency responses of the plurality of sets of antenna circuitry. With such an arrangement an antenna with extended performance characteristics may be provided, that may, for example, provide for multi-frequency performance, or wide-band performance.

In embodiments according to this aspect, as with the previous aspect, the respective antenna coils may be tuned to different frequencies. Depending on the frequencies chosen, either a multi-band or wideband, or both, frequency response may be obtained.

For example, in one embodiment at least some of the respective antenna coils are tuned to different frequencies that are sufficiently apart such that the bandwidths of the respective antenna coils do not substantially overlap, whereby a multi-frequency antenna is obtained. Alternatively, in another embodiment at least some of the respective antenna coils are tuned to different frequencies that are sufficiently close together such that the bandwidths of the respective antenna coils at least partially overlap, whereby a wide-band antenna is obtained.

In a further example a combination of the frequencies may be chosen, where some of the antennas are tuned to frequencies close to a first desired frequency to give a wideband response about that first frequency, and others of the antennas are tuned to frequencies close to a second desired frequency to give a wideband response about that second frequency. In such an arrangement, the first and second desired frequencies may be such that the wideband responses about such frequencies do not substantially overlap. With such arrangements multiple frequency wideband antenna performance is obtained.

In one embodiment of the second aspect the feedback circuitry comprises an operational amplifier, and the output signal is derived from the output of one of the operational amplifiers. In this respect, the frequency response obtained at the single output is due to the individual frequency responses of the different sets of antenna circuitry combined

together, and it is not necessary to take an output from each set of antenna circuitry and then electrically combine the signals.

Description of the Drawings

5

Further features and advantages of the present invention will become apparent from the following description of embodiments thereof, presented by way of example only, and by reference to the accompanying drawings, wherein like reference numerals refer to like parts, and wherein: -

10 Figure 1 is a circuit diagram of a negative feedback rod antenna arrangement of the prior art;

Figure 2 is a circuit diagram of a rod antenna arrangement of an embodiment of the invention;

Figure 3 is a circuit diagram of a further embodiment of the invention;

15 Figure 4 is a circuit diagram of a third embodiment of the present invention;

Figure 5 is a graph illustrating the trade off between noise and sensitivity for different coil inductances;

Figure 6 is a circuit diagram illustrating a further embodiment of the present invention; and

20 Figures 7(a) and (b) are diagrams illustrating example frequency responses of the further embodiment.

Description of the Embodiments

25 A first embodiment of the present invention is shown in Figure 2. Here, a rod antenna circuit 20 is provided, comprising a former 22, such as a ferrite rod or the like, around which a first, main, antenna coil 24 is wound. In this embodiment the coil 24 has a centre tap 242 which is connected to an AC ground via AC grounding capacitor 248. The centre tap is DC biased via a divider formed from resistors 244 and 246. Outputs of
30 the coil 24 are taken from opposite ends of the coil, with a first output line 302 feeding into the base (or gate) of a first transistor 30. A second output line 282 at the opposite end of the coil feeds a signal to the base (or gate) of a second transistor 28, via line 282. The first transistor 30 is provided with biasing resistors 304 and 306 respectively connected to the collector (drain) and emitter (source) of the transistor. Similarly, the

second transistor 28 is also provided with biasing resistors 284 and 286, respectively connected to the collector (drain) and emitter (source) of the transistor.

The first transistor 30 provides an output at the collector (drain) to the non-inverting input of an operational amplifier 32. Similarly, the second transistor 28 provides an output signal from its collector (drain) into the inverting input of the operational amplifier 32. The operational amplifier 32 is configured to operate as a differential amplifier, where the output is dependent on the difference between the signals on the inverting and non-inverting inputs, and provides an output signal 36. The output 36 is also fed back via line 34 to a second coil 26 which is shown as formed on the same former 22. In this respect, whilst the coil 26 may not necessarily need to be on exactly the same former as the main coil 24, the coil 26 should at least be magnetically coupled to the magnetic circuit of the main coil 20 so that it responds to the same magnetic field as coil 24. The other end of coil 26 is connected via line 262 to an AC ground. Not shown in Figure 2, but included in some embodiments is a variable resistor placed in series on the line 34, so as to be able to vary the amount of feedback that is fed to coil 26. Additionally typically provided would be a tuning capacitor 23 associated with the main coil 20, connected, for example, between the output lines 282 and 302, so as to allow the antenna to be tuned to a particular centre frequency. With the above arrangement, the negative feedback provided via the coil 24 has the effect of detuning the relatively high Q of the main coil 24 together with its tuning capacitor (not shown).

Additionally, the AC grounded centre tap of the main coil 24 together with the output of the coil being taken from both ends and then fed into a differential amplifier provides a balanced connection to the antenna, which provides a significantly improved response from the antenna, particularly with respect to electric field (E-field) sensitivity. In particular, the AC grounding of the centre of the coil significantly reduces E-field susceptibility which means that there is reduced E-field interference on the output of the antenna, and the AC grounding together with the DC biasing keeps the output signals within the common mode range of the differential amplifier. In addition, within the above arrangement all biasing resistors for transistors 28 and 30 have been removed from the AC connection to the main coil 24 of the antenna, and this leads to improvements in noise performance. In addition, as will be apparent from the

embodiments described below, choice of transistor 28 and 30 can also improve the noise performance that is obtained.

Regarding noise performance, the feedback can be set at a level which creates an active,
5 low noise, very wide band, H field antenna. The noise figure of the antenna is optimized at the natural resonant frequency of the rod and its tuning capacitance. Below this frequency the coupling response falls at the same rate as would a simple, un-tuned, loop i.e. 20dB/decade. However, use of the feedback also provides for optimal noise at the desired tuned frequency, as well as reducing Q so as to widen the bandwidth of the
10 antenna.

A second embodiment of the invention will now be described with respect to Figure 3. More particularly, Figure 3 illustrates a second embodiment of the present invention, wherein bipolar transistors Q8 and Q4 are used as the first and second transistors
15 respectively. Inductor L2 acts as the main coil, and inductor L1 is a feedback coil magnetically coupled to the main coil, and connected to the output of differential amplifier U1 via resistor R7 and C10. Transistor Q8 receives a first signal from one end of the main coil L2 at its base, and is biased by resistors R1 and R14 in series with the collector, and resistor R18 in parallel with capacitor C7 at the emitter. Transistor Q4
20 receives a second signal from the other end of coil L2 at its base, and is biased by resistors R2 and R16 in series with the collector, and resistor R12 and capacitor C8 arranged in parallel at the emitter. The output from the collector of Q4 is input to the non-inverting input of the amplifier U1 via resistor R6 and capacitor C6 in series, whilst the output taken from the collector of transistor Q8 is input into the non-inverting input
25 of amplifier U1 via capacitor C4 and resistor R8 in series. The response of amplifier U1 is controlled via a feedback loop comprising resistor R16 and capacitor C9 in parallel, connected between the output of the amplifier and the inverting input.

In contrast to the arrangement of Figure 2, the circuit of Figure 3 does not have a
30 grounded centre tap on the main coil, and an inductor L8 is provided to feed bias to the front end, the biasing circuitry to produce the bias comprising a divider formed from resistors R4 and R8, and capacitor C11 arranged in parallel with resistor R4, the bias being fed from the divider tap via inductor L8 to the base of transistor Q8..

Regarding the noise performance of the bipolar arrangement of Figure 3, through simulation noise performance figures were obtained that show that at the desired centre frequency of 121 kHz, 352.5 pV/Hz noise was obtained.

5 In order to improve this noise performance, in a further circuit 80 of an embodiment of the invention shown in Figure 4, the bipolar transistors Q4 and Q8 were replaced with field effect transistors J2 and J1 respectively, as shown in Figure 4. Here, again circuit 80 comprises a main coil L2, which is magnetically coupled to a feedback coil L1. The front end bias voltage is provided via inductor L8, and field effect transistors J1 and J2
10 respectively receive inputs from either end of the main coil inductor L2. The output of FET J1 taken from the drain is input into the non-inverting input of amplifier U2, and the output of FET J2 taken from the drain is input into the inverting input of amplifier U2. FET J1 is biased by resistors R1, R14, and R18, and FET J2 is biased by resistors R2, R15, and R12. The input from J1 to the amplifier is via capacitor C4 and resistor
15 R8, and from J2 via capacitor C6 and resistor R6 in series.

The amplifier U2, as previously, has a feedback loop in the form of parallel resistor capacitor combination R16 and C9, feeding the output back into the inverting input. The output is also fed via capacitor C10 and resistor R7 in series to one end of coil L1,
20 with the other end of coil L1 being connected to AC ground.

The replacement of the bipolar transistors Q4 and Q8 of the circuit of Figure 3 with the FETs improves the noise performance at the centre frequency. For example, at a centre frequency of 111 kHz a noise figure of 131.9 pV/Hz was obtained using Sanyo 2SK369
25 FETs, compared to the 352 pV/Hz for the bipolar arrangement. Thus a benefit of 8.5 dBs in signal-to-noise ratio over the bipolar design is obtained.

Further investigations have also been undertaken into varying the resistance of the main coil. In this respect, the circuit of Figure 4 was used for simulation purposes, but with
30 NXP BF862 FETs as FETs J1 and J2. The results of the investigations are shown in Table 1 below:

Coil Resistance	Coil	Noise
-----------------	------	-------

(Ω)	Dimensions	Performance (pV/Hz @ 99.6 kHz)
0	20mm x 8mm, 950 μ H	31.7
1.6	20mm x 8mm, 950 μ H	161
4.5	300mm x 4mm	275.8

This difference in noise performance dependent on coil resistance indicates that there is a benefit trade off between noise and sensitivity, and this trade off is shown in Figure 5. In particular, Figure 5 plots the simulated noise, based on the resistance, and the relative sensitivity, based on magnetic sensitivity, for a range of RFID coils, available from, for example, Coilcraft. Inc. of Cary, Illinois. It shows that there are some values where the increase in sensitivity, due to increased turns, is more than offset by the increase in noise, due to coil resistance. For example, Figure 5 shows that above an inductance of approximately 5 mH the increase in noise flattens off, whereas magnetic sensitivity tends to continue to increase. It may be concluded, therefore, that a larger coil provides better performance, subject to size constraints.

A final embodiment of the invention is shown in Figure 6. Here it will be seen that two or more of the antenna circuit arrangements 20 described previously with respect to Figure 2 may be provided, with respective antenna coils and feedback coils wound on the same former, or otherwise magnetically coupled in the same magnetic circuit, for example by being wound on separate formers which are magnetically coupled. Each of the sets 20 of antenna circuitry may have their respective antenna coils tuned to different frequencies, to provide for multi-frequency performance, or to provide for increased wideband coverage. Because of the magnetic coupling between the respective antenna windings, and their respective feedback windings, the output from the first amplifier has a response at the frequency expected from its own winding, and also one from the winding on the second circuit. This allows an antenna to be built with either responses at two (or more) frequencies, or to create a wideband response.

As noted, only a single output needs to be taken from one of the differential amplifiers, as shown, in order to obtain the multi-frequency or wide band performance. Moreover, if multiple outputs were needed, then outputs could be taken from respective differential amplifiers, with each output providing the same multi-frequency or wide-band performance, due to the magnetic coupling of the respective antenna coils and feedback coils.

In order to obtain a multi-frequency antenna with such an arrangement, the respective antenna coils are tuned to the respective desired frequencies, which should be far enough apart that the bandwidths of the antennae do not substantially overlap, as shown in Figure 7(a). Conversely, for wideband performance about a single desired center frequency, the respective antenna coils may be tuned to specific frequencies at or around the desired center frequency, for example to frequencies a small amount either side of the desired center frequency, and within the bandwidths of the respective antennas (which can themselves be broadened by flattening the Q with the feedback). In this way the resulting bandwidths of each antenna will overlap to a degree (depending on the precise tuned frequencies chosen, and the bandwidths), leading to a resultant increased overall bandwidth. Figure 7(b) illustrates an example.

Note also that the above described multi-band or wideband arrangement is not limited to using the circuit of Figure 2, as shown, and may use any of the other circuits described herein, in any combination. That is, each set of antenna circuitry need not be identical, and different circuits may be used for each set. In this respect, in some embodiments of the invention the feedback circuit of Figure 1 may be used as one or more of the sets.

Regarding implementation issues concerning physically implementing any of the circuits, although the feedback coil may be wound separately on the same former as the main coil, or another former provided it is magnetically connected to the main coil former, in practice it is more preferable for the feedback coil to be overwound on the main coil. This has the advantage of being more space efficient and requires a shorter former.

Additionally, although it is preferable to try and use large diameter wire to minimise the coil resistance, for example Litz wire (e.g. 60 x 0.02mm), in practice the coils may be wound using bifilar wire, for example of 0.1mm diameter, although of course other diameter wire may be used. The use of bifilar wire simplifies accurate winding of
5 centre tapped coils, since both halves of the main coil can be wound together. The centre tap may be formed by both filars at one end of the wound wire, and the first and second outputs are formed by the respective filars at the other end of the wound bifilar wire.

- 10 Regarding the material used for the former, a ferrite material is preferable, and in order to reduce the size of the rods whilst maintaining their magnetic sensitivity, higher permeability ferrites may be used. Example ferrite rods that may be used are RFID coils, such as those produced by Fair-Rite Products Corporation. These have a reduced diameter compared to other ferrite rods available, which is advantageous in reducing the
15 length of winding wire and hence the winding resistance with a resultant reduction in the noise.

In conclusion, embodiments of the present invention provide an improved rod antenna circuit arrangement, which makes use of a main coil with signals sensed at either end of
20 the coil being fed into the inputs of a differential amplifier. The output of the differential amplifier is then fed back to a feedback coil which is magnetically coupled to the magnetic circuit of the main antenna coil. Improvements in performance in embodiments of the invention can be used by making use of field effect transistors instead of bipolar transistors and by ensuring that no resistive biasing is present in the
25 antenna tank circuit up to the input of the front end amplifiers. The effect of the negative feedback is to reduce the Q of the rod antenna so as to enable it to receive wide band signals such as, for example, a Loran signal. In some embodiments the main coil has an AC grounded centre tap, and the AC grounding of the centre tap, together with the use of a differential amplifier to determine the difference between the signals
30 obtained from either end of the main coil provides for a balanced connection to the antenna, which greatly reduces E-field susceptibility. This has the effect that the antenna may be packaged in a smaller package, closer to other components.

In preferred implementations the feedback coil is overwound on the main coil, on the same former. In order to easily produce a centre tapped main coil, the main coil may be wound with bifilar wire.

- 5 In one embodiment a buffer amplifier may be added to the output of the differential amplifier. This provides an advantage by isolating the feedback from load changes in any subsequent circuitry to which the antenna circuit may be connected.

- Various modifications may be made to any of the above embodiments to produce
- 10 further embodiments, any and all of which are intended to be encompassed by the appended claims.

Claims

1. A rod antenna circuit comprising:
 - a first antenna coil wound on a former, the coil providing first and
5 second output connections at opposite ends of the coil;
 - a differential amplifier having inverting and non-inverting inputs, the
inverting input receiving a first signal derived from one of the first and second output
connections, and the non-inverting input receiving a second signal derived from the
other of the first and second output connections, the differential amplifier providing a
10 differential output signal dependent upon the first and second signals; and
 - a feedback coil magnetically coupled to the first antenna coil and
arranged to be fed a feedback signal derived from the differential output signal so as to
provide negative feedback to the first antenna coil.
- 15 2. A circuit according to claim 1, wherein the first antenna coil comprises a centre
tap that is AC grounded.
3. A circuit according to claim 2, wherein the first antenna coil comprises wound
bifilar wire, the bifilars at one end of the wound wire together forming the centre tap,
20 and the bifilars at the other end of the wound wire providing the first and second output
connections.
4. A circuit according to any of the preceding claims, and further comprising
biasing circuitry to provide a bias signal so as to bias the first and second signals to
25 within the common mode range of the differential amplifier.
5. A circuit according to any of the preceding claims, wherein a bias signal is
provided to the first antenna coil from biasing circuitry via a first bias inductor.
- 30 6. A circuit according to any of the preceding claims, wherein the feedback coil is
wound on the same former as the antenna coil.
7. A circuit according to any of the preceding claims, wherein the feedback coil is
over wound on the antenna coil.

8. A circuit according to any of the preceding claims, and further comprising a first transistor arranged to receive an output signal from one of the first and second output connections of the first antenna coil and to generate the first signal in dependence thereon, and a second transistor arranged to receive an output signal from the other of the first and second output connections of the first antenna coil and to generate the second signal in dependence thereon.
9. A circuit according to claim 8, wherein the first and second transistors are field effect transistors.
10. A circuit according to any of the preceding claims, and further comprising a buffer amplifier at the output of the differential amplifier arranged to isolate the feedback from load changes in any subsequent circuitry.
11. A circuit according to any of the preceding claims, wherein the negative feedback results in a minima in noise performance at the centre frequency of the antenna.
12. An antenna circuit, comprising a plurality of rod antenna circuits of any of the preceding claims, the antenna coils and feedback coils of the plurality of antenna circuits being magnetically coupled.
13. The antenna circuit of claim 12, wherein the respective antenna coils are tuned to different frequencies.
14. The antenna circuit of claims 12 or 13, wherein the respective antenna coils are tuned to different frequencies that are sufficiently apart such that the bandwidths of the respective antenna coils do not substantially overlap, whereby a multi-frequency antenna is obtained.
15. The antenna circuit of claims 12 or 13, wherein the respective antenna coils are tuned to different frequencies that are sufficiently close together such that the

bandwidths of the respective antenna coils at least partially overlap, whereby a wide-band antenna is obtained.

16. An antenna circuit, comprising:

5 a plurality of sets of antenna circuitry, each set comprising an antenna coil wound on a former, feedback circuitry, and a feedback coil, the feedback coil being magnetically coupled to the antenna coil and arranged to be fed a feedback signal derived from the feedback circuitry so as to provide negative feedback to the antenna coil;

10 wherein the antenna coils and the feedback coils of the plurality of sets of antenna circuitry are magnetically coupled; and


wherein the antenna circuit comprises at least one output signal derived from one of the sets of feedback circuitry, the output signal providing a frequency response corresponding to the individual frequency responses of the plurality of sets of antenna
15 circuitry.

17. The antenna circuit of claim 16, wherein the respective antenna coils of the plurality of sets of antenna circuitry are tuned to different frequencies.

20 18. The antenna circuit of claims 16 or 17, wherein the respective antenna coils are tuned to different frequencies that are sufficiently apart such that the bandwidths of the respective antenna coils do not substantially overlap, whereby a multi-frequency antenna is obtained.

25 19. The antenna circuit of claims 16 or 17, wherein the respective antenna coils are tuned to different frequencies that are sufficiently close together such that the bandwidths of the respective antenna coils at least partially overlap, whereby a wide-band antenna is obtained.

30 20. The antenna circuit of any of claims 16 to 19, wherein the feedback circuitry comprises an operational amplifier, and the output signal is derived from the output of one of the operational amplifiers.



Application No: GB1211351.0

Examiner: Mr John Watt

Claims searched: 1 - 20

Date of search: 9 October 2012

Patents Act 1977: Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
Y	1 - 11	US 2007/0222695 A1 (DAVIS) see figs.1, 3 & 4 and paragraphs [0022], [0029] and [0032].
Y	1 - 11	GB 2300921 A (THE CHARLES MACHINE WORKS) see figs.5 & 6 and page 10, lines 4 - 24 and page 14, line 32 to page 15, line 35.
Y	1 - 11	EP 1850475 A1 (AMC) see figs.1 - 6 and paragraphs [0009], [0010], [0019] and [0020].
Y	1 - 11	US 4314378 A (FOWLER ET AL) see fig.1 and col.1, lines 5 - 11 and col.3, lines 56 - 65.
Y	1 - 11	GB 2169764 A (SONY) see figs.1 - 7B and page 2, lines 3 - 15.
A	-	US 2406360 A (ELLWOOD) see the figure and col.3, lines 2 - 20 and col.6, lines 37 - 45.

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:


Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X:

Worldwide search of patent documents classified in the following areas of the IPC

H01Q; H03F

The following online and other databases have been used in the preparation of this search report

EPODOC, WPI, INSPEC, TXTE



International Classification:

Subclass	Subgroup	Valid From
H01Q	0007/08	01/01/2006
H01Q	0023/00	01/01/2006