




US 20210056988A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2021/0056988 A1****Chen et al.**(43) **Pub. Date: Feb. 25, 2021**(54) **DESIGN OF READER NOISE REDUCTION
USING SPIN HALL EFFECTS**(52) **U.S. Cl.**CPC *G11B 5/3932* (2013.01); *G11B 5/3909*
(2013.01); *G11B 5/3945* (2013.01)(71) Applicant: **Headway Technologies, Inc.**, Milpitas,
CA (US)

(57)

ABSTRACT(72) Inventors: **Wenyu Chen**, San Jose, CA (US); **Yan
Wu**, Cupertino, CA (US)

A read head is disclosed wherein a Spin Hall Effect (SHE) layer is formed on a free layer (FL) in a sensor and between the FL and top shield (S2). Preferably, the sensor has a seed layer, an AP2 reference layer, antiferromagnetic coupling layer, AP1 reference layer, and a tunnel barrier sequentially formed on a bottom shield (S1). In a three terminal configuration, a first current flows between S1 and S2 such that the AP1 reference layer produces a first spin torque on the FL, and a second current flows across the SHE layer thereby generating a second spin torque on the FL that opposes the first spin torque. When the stripe heights of the FL and SHE layer are equal, a two terminal configuration is employed where a current flows between one side of the SHE layer to a center portion thereof and then to S1, or vice versa.

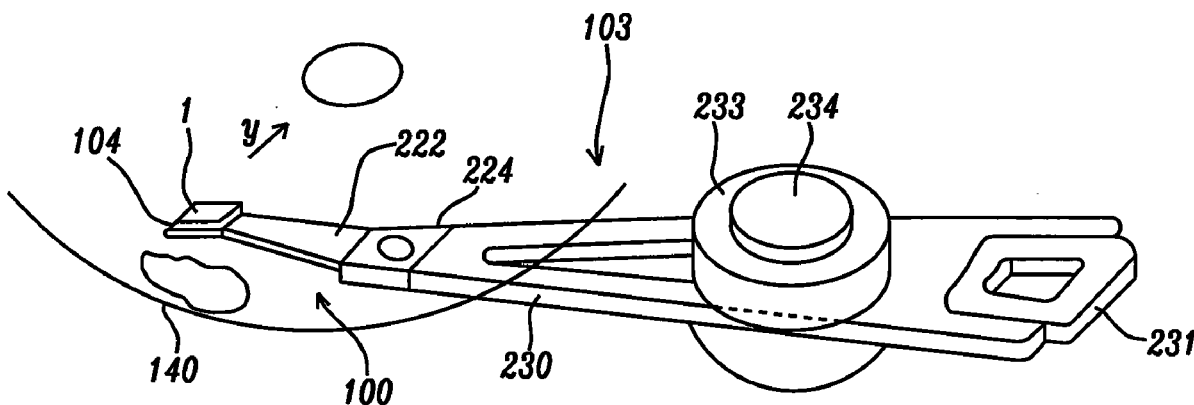(21) Appl. No.: **16/546,397**(22) Filed: **Aug. 21, 2019****Publication Classification**(51) **Int. Cl.***G11B 5/39* (2006.01)

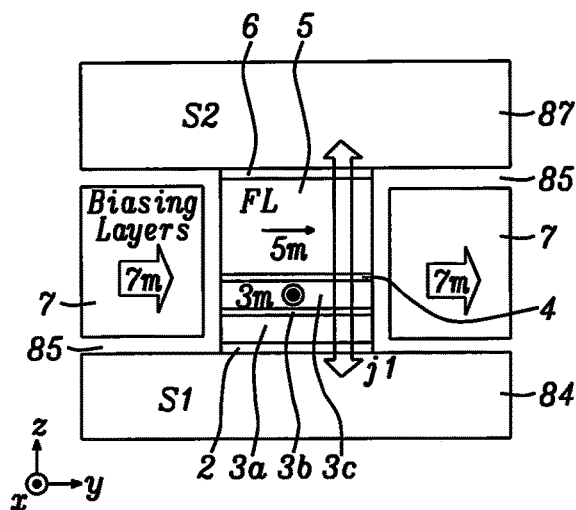


FIG. 1A
Prior Art

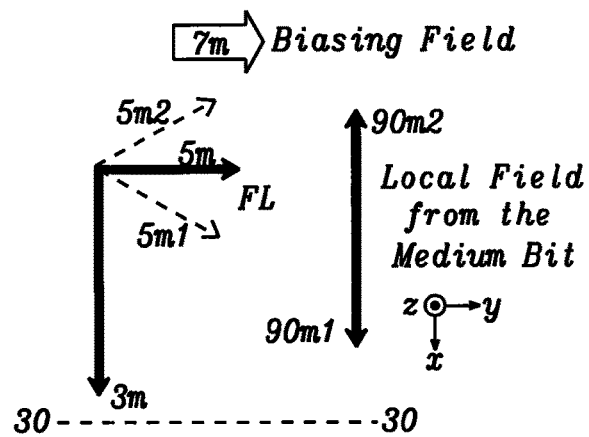


FIG. 1B

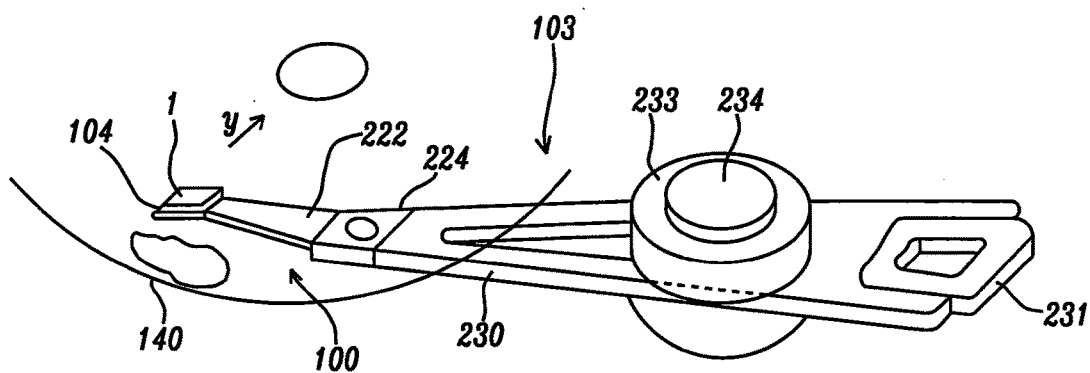


FIG. 2

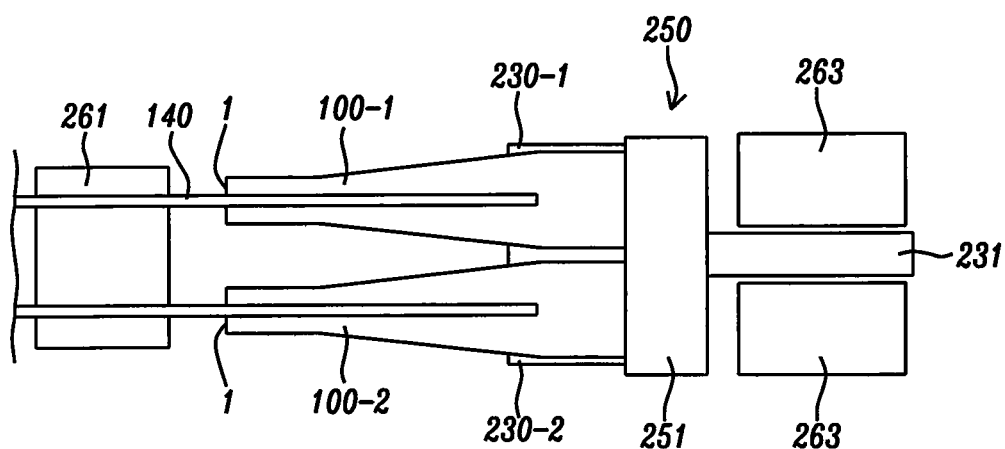


FIG. 3

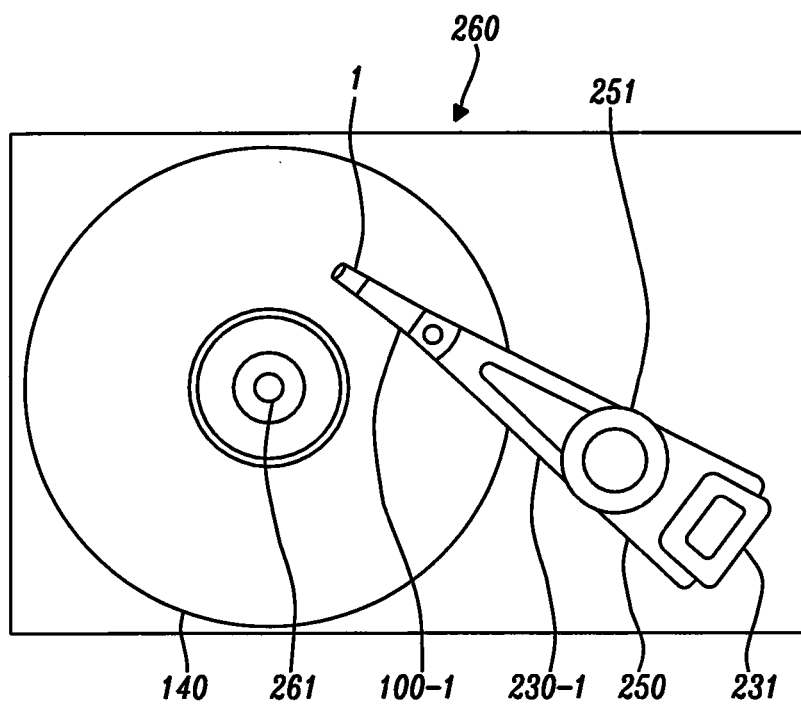


FIG. 4

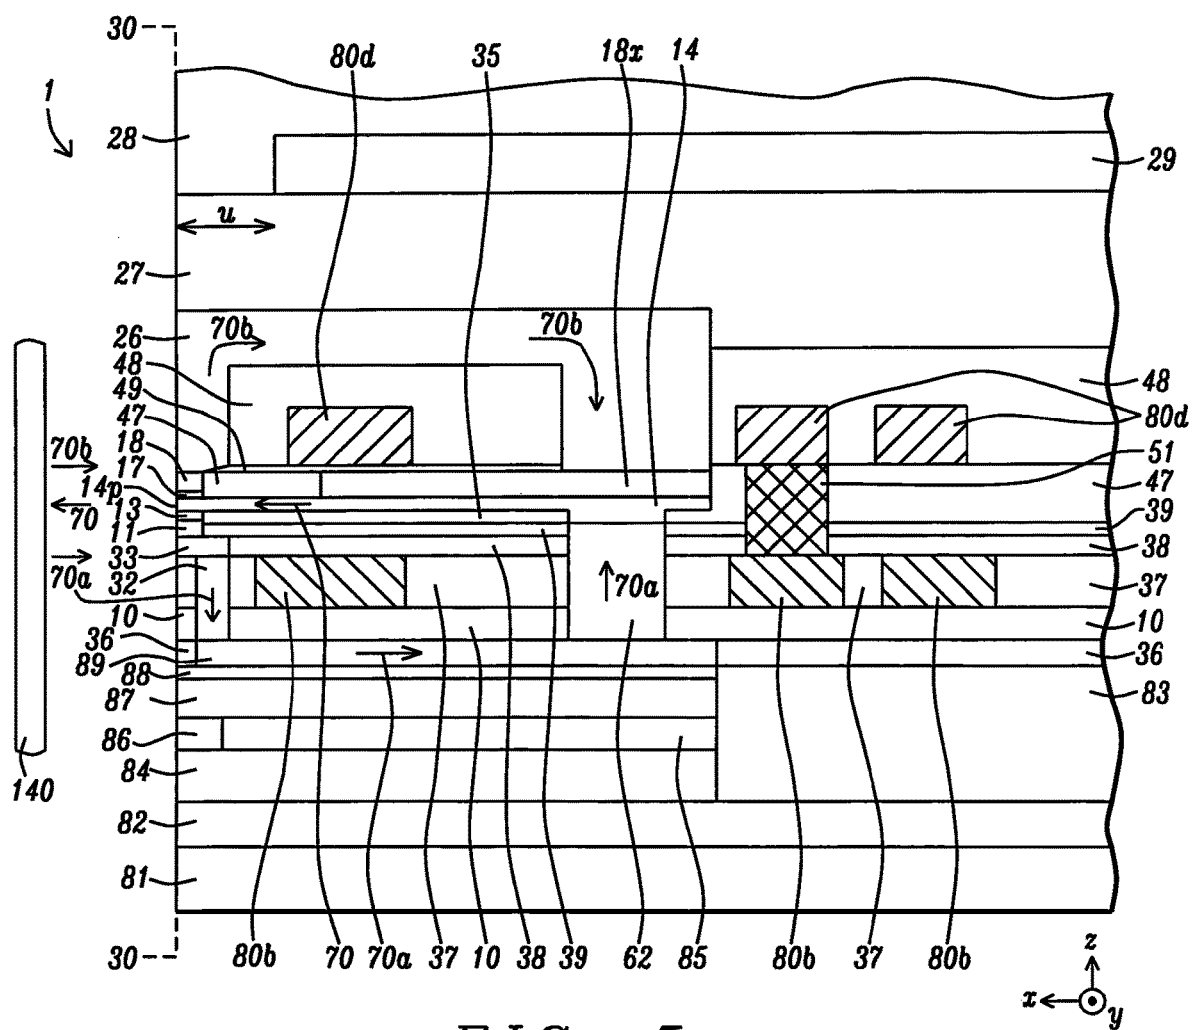


FIG. 5

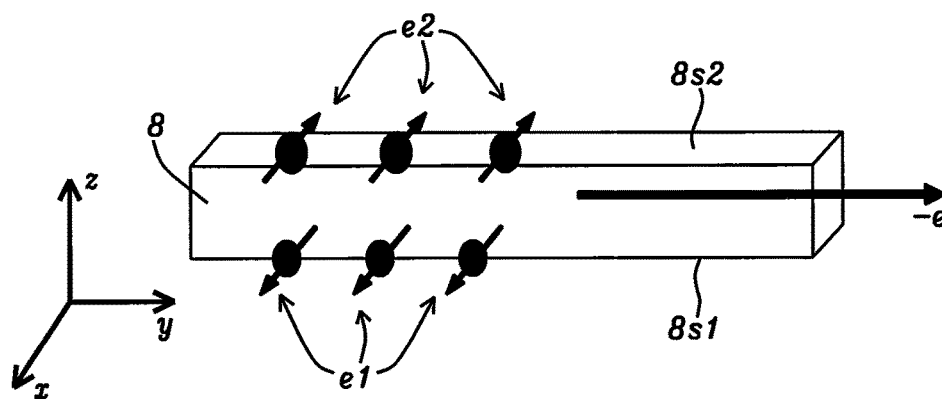


FIG. 6

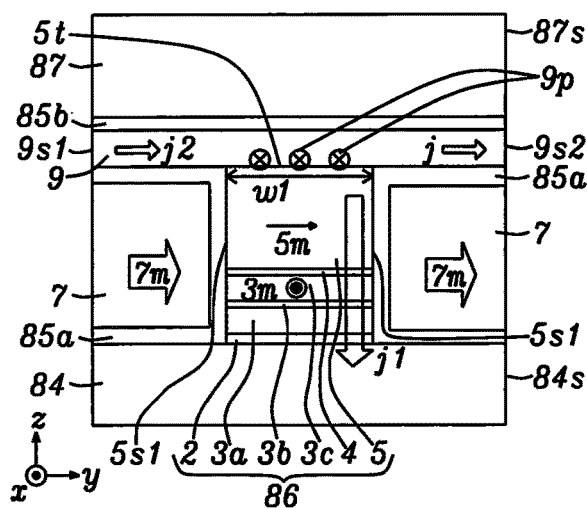


FIG. 7A

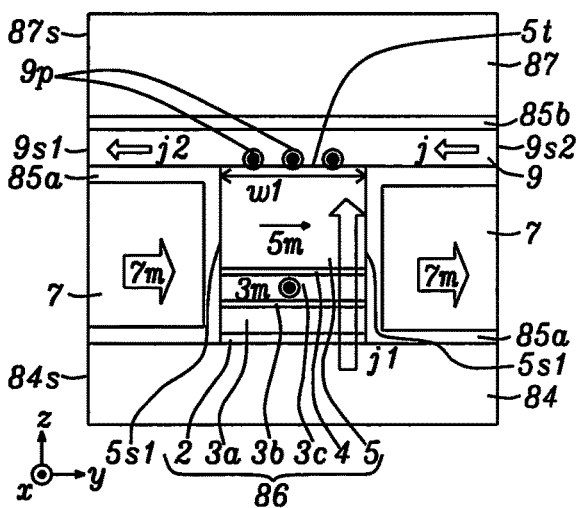


FIG. 7B

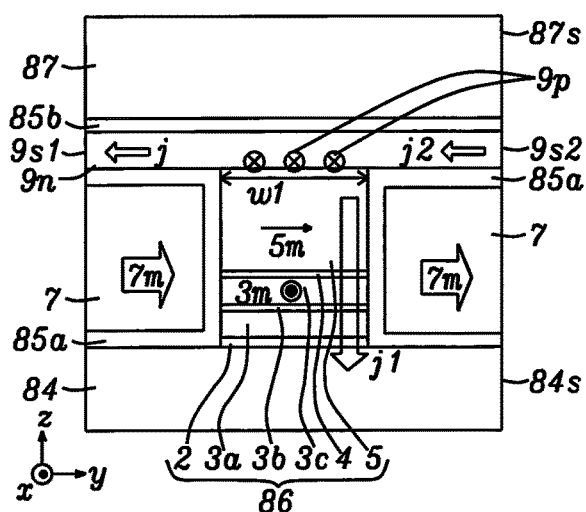


FIG. 8A

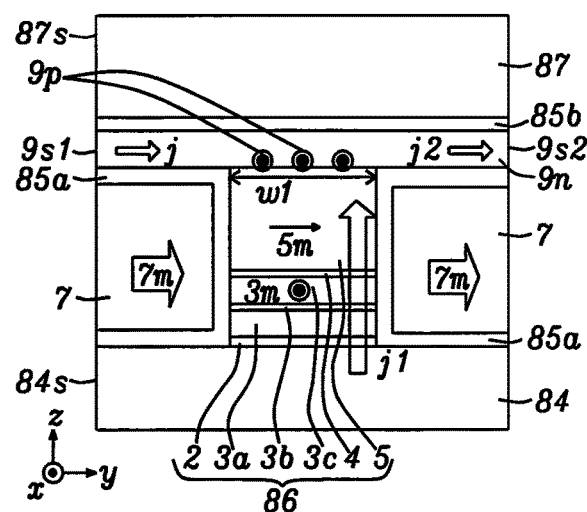


FIG. 8B

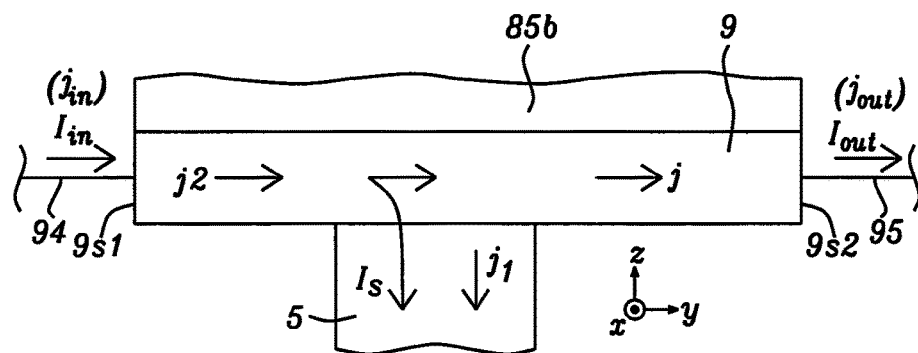


FIG. 9

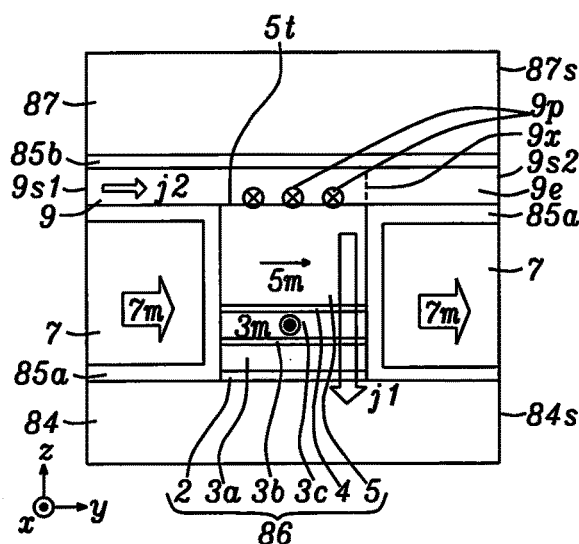


FIG. 10A

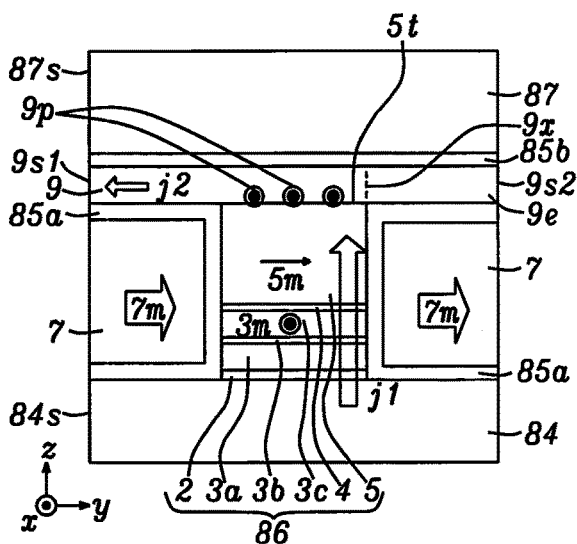


FIG. 10B

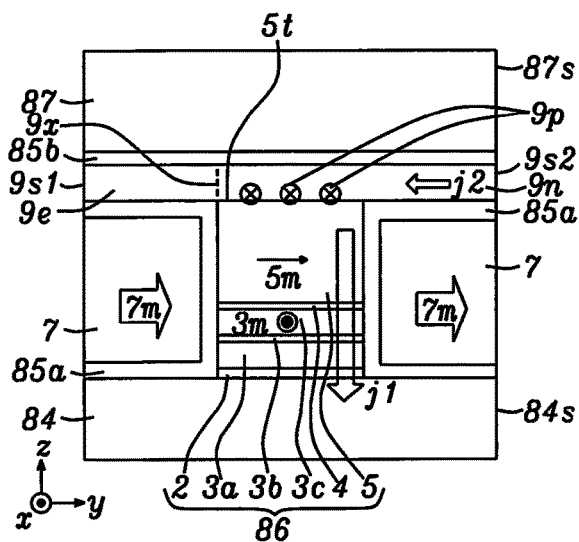


FIG. 11A

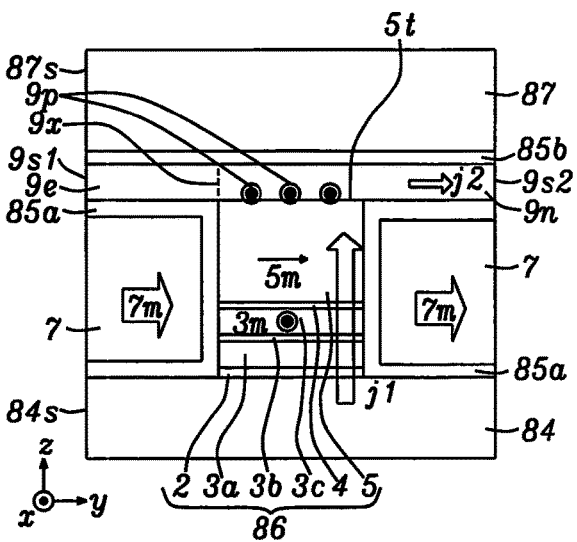
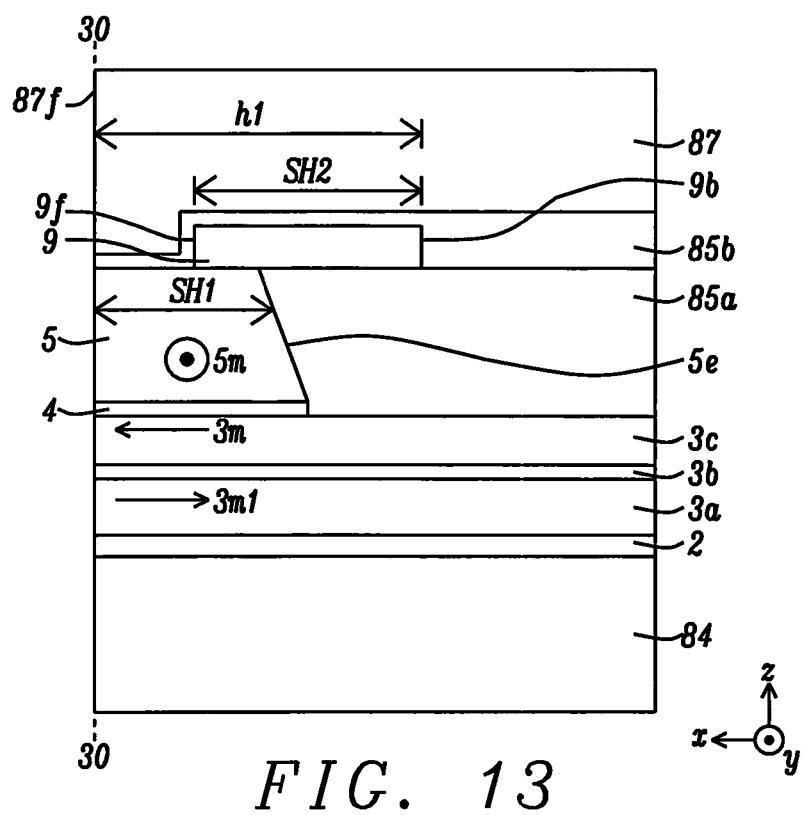
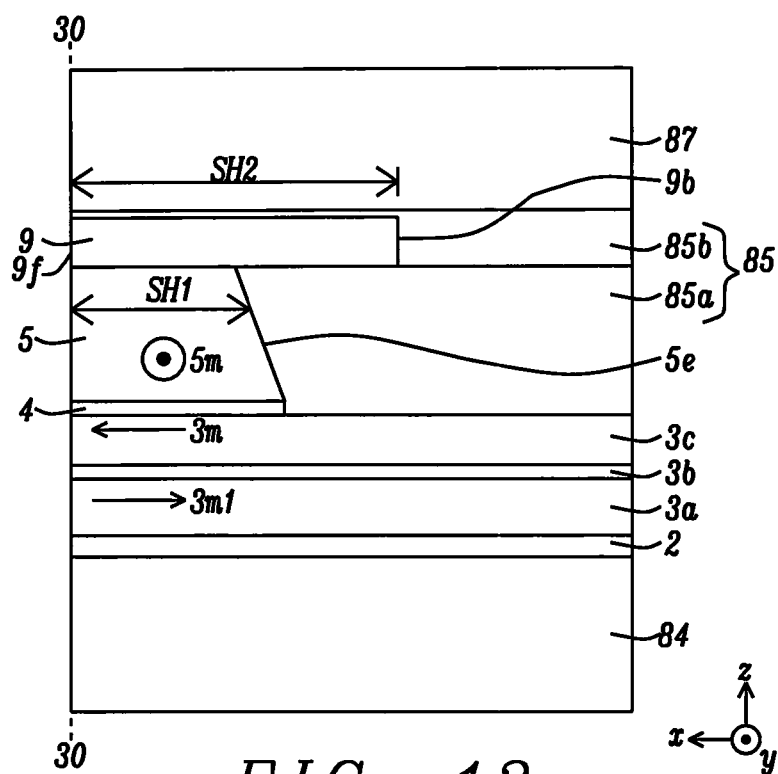
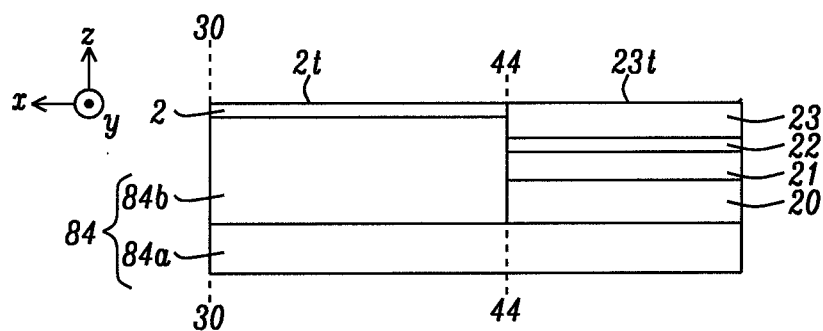
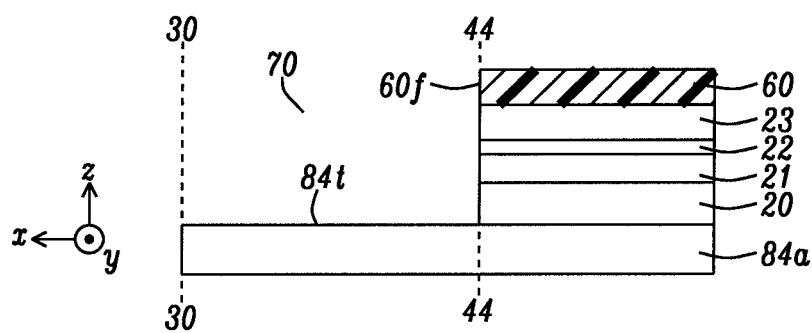
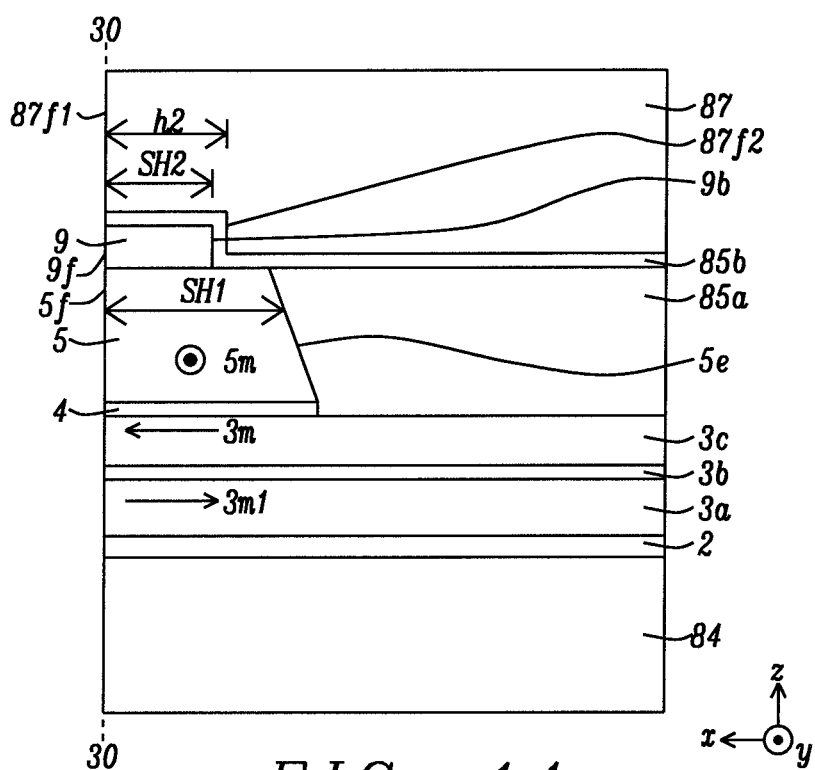
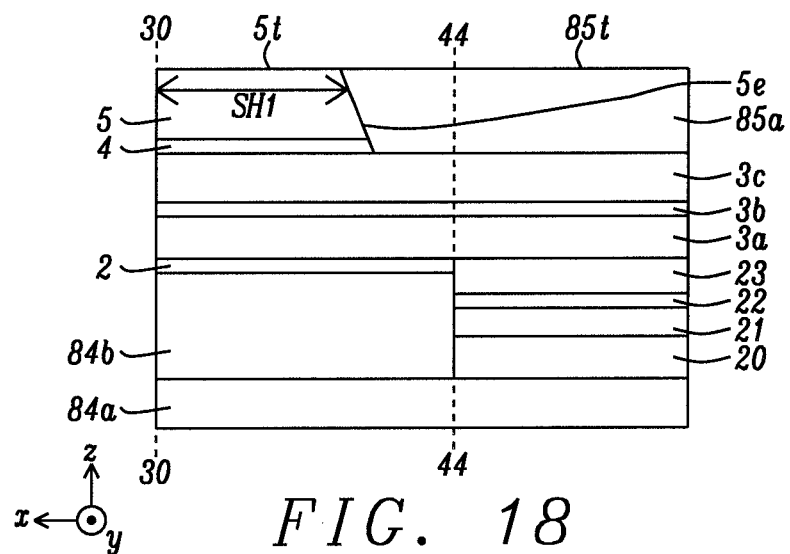
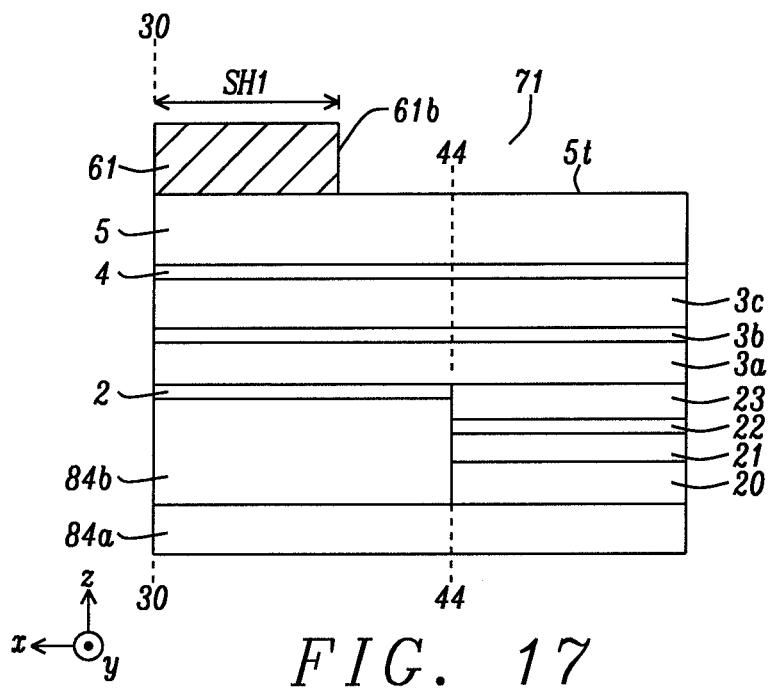


FIG. 11B







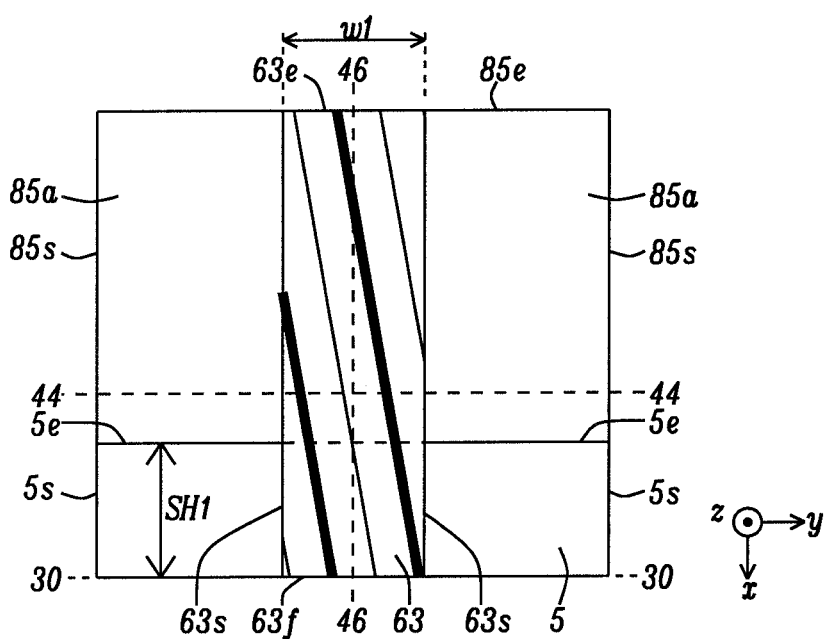


FIG. 19

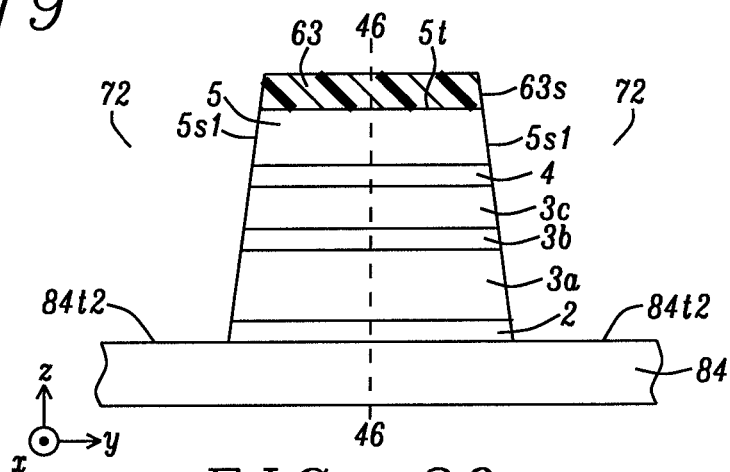


FIG. 20

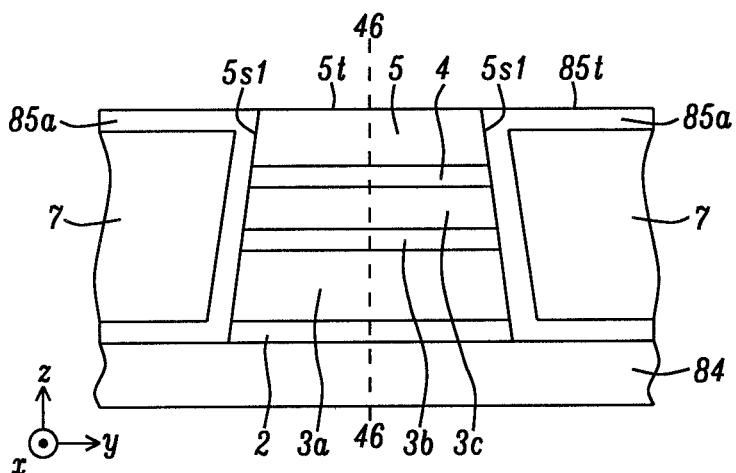


FIG. 21

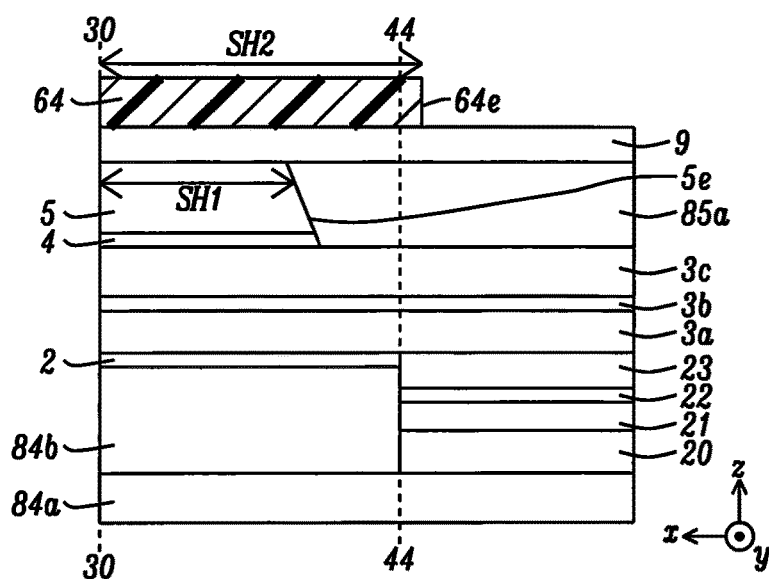


FIG. 22

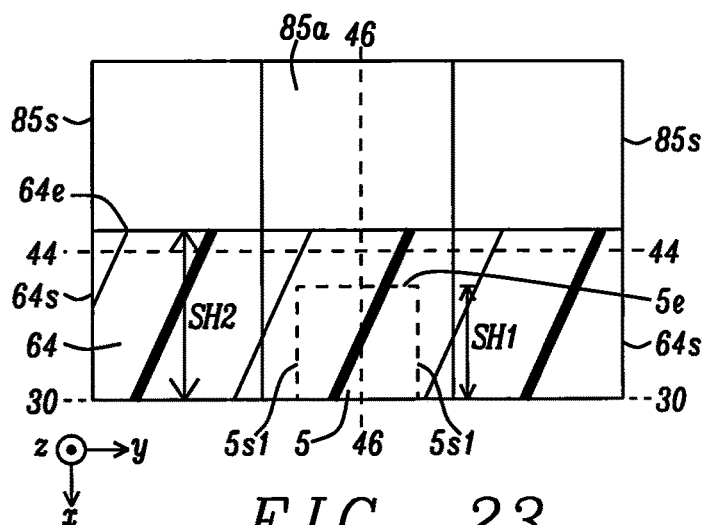


FIG. 23

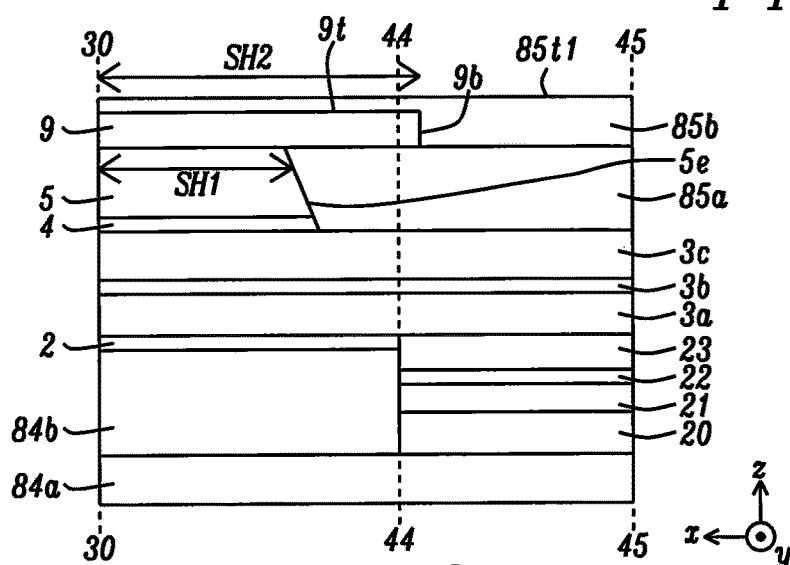


FIG. 24

DESIGN OF READER NOISE REDUCTION USING SPIN HALL EFFECTS

RELATED PATENT APPLICATIONS

[0001] This application is related to the following: U.S. Pat. No. 9,437,225; and Docket #HT18-047, Ser. No. 16/370,613, filed on Mar. 29, 2019; assigned to a common assignee, and herein incorporated by reference in their entirety.

TECHINICAL FIELD

[0002] The present disclosure relates to a reader structure wherein a Spin Hall Effect (SHE) layer comprised of a giant positive or negative Spin Hall Angle (SHA) material is formed between a free layer (FL) in a sensor and a top shield (S2), and wherein the reader is configured in a two terminal design where a read current is applied between a bottom shield (S1) and one end of the SHE layer, or in a three terminal design where a first current is applied between S1 and S2 while a second current (I_{SHE}) is applied across the SHE layer in a longitudinal direction so that spin torque from the SHE layer opposes spin torque from a reference layer on the FL thereby substantially reducing spin torque noise in the FL, and increasing the sensor signal-to-noise ratio (SNR) and improving the bit error rate (BER) in recording to enable smaller sensor sizes and greater areal density capability (ADC).

BACKGROUND

[0003] The hard disk drive (HDD) industry requires the magnetoresistive (MR) sensor in a read head of a combined read-write head to have a smaller size for better ADC. For current tunneling MR (TMR) sensors that typically have a sensor resistance of around 300-600 Ohms, a reduction of the tunnel barrier RA (product of the resistance and area) is necessary to keep the same sensor resistance as the lateral size decreases. However, an undesirable consequence of lower tunnel barrier RA is spin torque induced magnetic noise in sensors.

[0004] Spin transfer torque (hereinafter referred to as spin torque) arises from the spin dependent electron transport properties of ferromagnetic-spacer-ferromagnetic multilayers. When current passes through a magnetic multilayer in a CPP (current perpendicular to plane) configuration, the first ferromagnetic layer (FM1) that is a reference layer, for example, will generate spin polarized currents as the electrons traverse FM1. When the spin polarized current is transmitted through a polarization preservation spacer such as a tunnel barrier, the spin angular moment of electrons incident on a second FM layer (FM2) interacts with magnetic moments of FM2 (i.e. free layer) near the interface between FM2 and the non-magnetic spacer. Through this interaction, the electrons transfer a portion of their angular momentum to FM2. As a result, spin-polarized current can influence the magnetization direction of a FL, or induce its dynamics, if the current density in a read current between bottom and top shields (S1 and S2) in a sensor is sufficiently high.

[0005] FIG. 1A is a schematic depicting a typical read head sensor in HDD from an ABS perspective. A seed layer 2, AP2 reference layer 3a, antiferromagnetic coupling (AFC) layer 3b, AP1 reference layer 3c, non-magnetic spacer 4, free layer 5, and capping layer 6 are sequentially

formed on S1 84 and form a sensor between S1 and S2 87. The AP1 layer has magnetization $3m$ in a transverse direction (orthogonal to the ABS) that is stabilized through AFC coupling with the AP2 layer. The free layer (FL) has magnetization $5m$ that is free to rotate in and out of the ABS, and is biased in a cross-track direction with a longitudinal field $7m$ from magnetic biasing layers 7 on each side of the FL. The AP2 layer is usually coupled to an antiferromagnetic (AFM) layer (not shown) that may be behind the sensor stack shown in FIG. 1A to reduce S1-S2 spacing. Read current $j1$ may be applied from S1 to S2 or in the reverse direction.

[0006] As shown in FIG. 1B from a top-down view, with a local magnetic field $90m1$ or $90m2$ from a magnetic medium bit (not shown) out of or into the ABS 30-30, respectively, FL magnetization $5m$, which is in a longitudinal direction in the absence of a local field, rotates toward the ABS ($5m1$) or away from the ABS ($5m2$) under the influence of the local field. Accordingly, alignment between magnetization $5m1$ and $3m$ is closer to the parallel state (P) with lower resistance, and alignment between magnetization $5m2$ and $3m$ is closer to the anti-parallel state (AP) with higher resistance. For simplicity, the AP1 layer has a small canting angle (not shown) toward the longitudinal (y-axis) direction that is neglected. Spin torque noise in the sensor depends on the polarity of the current applied between S1 and S2. When positive current flows from S2 to S1, electrons with negative charge are spin polarized by AP1 to the FL direction and interact with the FL through spin torque. As a result, spin torque attempts to stabilize the P state and destabilize the AP state. Therefore, when the local field $90m2$ is into the ABS (upward x-axis direction) and results in FL magnetization $5m2$, spin torque noise at power level A is observed. On the other hand, when current flows from S1 to S2, spin torque destabilizes the P state and stabilizes the AP state thereby causing higher spin torque noise at power level B when the local field $90m1$ is out of the ABS 30-30 (downward x-axis direction) and results in FL magnetization $5m1$. Power level A is typically higher than B since the magnitude of the spin torque per area of the FL is proportional to the voltage across the TMR barrier (non-magnetic spacer 4). Under a fixed current density, the AP state has a higher resistance, and thus a higher voltage drop and a higher spin torque noise is the result.

[0007] The magnitude of the spin torque per area of the FL is proportional to the voltage across the TMR barrier, and is anti-proportional to the RA of the barrier layer. Thus, for a sensor width >30 nm, RA is typically above $0.7 \text{ Ohm-}\mu\text{m}^2$ where spin torque noise is not considered an important factor and where current polarity does not make a significant difference in noise level. For sensor widths in the range of 25-30 nm, RA around $0.6 \text{ Ohm-}\mu\text{m}^2$ is needed, and restricting the current polarity to only the preferred direction as described previously can limit the noise level to an acceptable magnitude for power level A. However, when sensor widths below 25 nm, and RA below $0.6 \text{ Ohm-}\mu\text{m}^2$ or even below $0.5 \text{ Ohm-}\mu\text{m}^2$ are required, then spin torque noise increases to a level that is an important concern for SNR even under the preferred current polarity. Thus, a new reader design is necessary to reduce spin torque noise, especially for reader sensors having a width <25 nm and RA below $0.6 \text{ Ohm-}\mu\text{m}^2$ that are critical features in advanced HDD products.

SUMMARY

[0008] One objective of the present disclosure is to provide a reader design where the spin torque noise between an AP1 layer and FL in a sensor is effectively canceled to provide better SNR and enable higher ADC, especially for sensor widths <25 nm.

[0009] A second objective of the present disclosure is to provide various embodiments of the reader design according to the first objective that allow for smaller shield to shield spacing, or for greater simplicity in the fabrication process.

[0010] A third objective of the present disclosure is to provide a process flow for forming a sensor that satisfies the first two objectives.

[0011] According to a first embodiment of the present disclosure, these objectives are achieved by forming a SHE layer between a FL in a sensor and a top shield (S2) in the reader. The SHE layer may be made of a positive giant SHA material such as Pt or a negative giant SHA material such as β -Ta, and has a front side at the ABS in some embodiments, or is recessed behind a portion of S2 in other embodiments to reduce shield to shield spacing (RSS). In another embodiment, the SHE layer replaces a front portion of S2 to minimize RSS. Preferably, the SHE layer is comprised of a so-called giant SHA material having an absolute value for SHA that is >0.05 , and is separated from S2 by an insulation layer. In one preferred embodiment, the sensor stack has a seed layer, a reference layer with an AP2/AF coupling/AP1 configuration, tunnel barrier, FL, and SHE layer sequentially formed on the bottom shield (S1).

[0012] The reader may be configured as a three terminal device where a first current (j_1) is applied between S1 and S2 during a read operation, and a second current (j_2) is applied in a longitudinal direction across the SHE layer. When j_1 is applied from S2 to S1 and spin polarization from the AP1 layer to the FL is P0, and AP1 magnetization is aligned out of the ABS, then the spin current at density ($j_1 \times P_0$) with spin direction out of the ABS is injected into the FL that causes FL magnetic noise. To offset the aforementioned noise, the SHE layer produces spin current with spin torque on the FL. For a (+) SHA material and a j_2 direction from left to right at the ABS, the two flows of spin injections in opposing directions into the FL will cancel each other when $(j_2 \times \text{SHA}) = (j_1 \times P_0)$. If a (-) SHA material is used, then the j_2 direction is from right to left when j_1 is from S2 to S1. Alternatively, when j_1 is from S1 to S2, then the direction of j_2 in each of the aforementioned SHE layers made of (+) and (-) SHA material is reversed.

[0013] In embodiments where the stripe height (SH) of the SHE layer is proximate to that of the FL, then the current density for j_1 and j_2 is substantially the same and the reader may be configured as a two terminal device to simplify the circuit and processing steps. In particular, one end of the SHE layer used in the three terminal device described previously may be etched away, or remain in place but with no connection to a lead. For example, with a (+) SHA material, a current (j) is directed from the left side of the SHE layer to a center portion and then proceeds down through the sensor stack to S1, or the direction of j may be reversed so that spin torque from the SHE layer and AP1 layer on the FL cancel one another. When a (-) SHA material is employed, the current direction is from the right side of the SHE layer to the center portion and then down through the sensor stack to S1, or in the reverse direction.

[0014] A process flow is provided for fabricating a sensor where an AFM layer is formed behind a front portion of S1 to reduce RSS. The SHE layer preferably has a full width between the sides thereof so that the SHE layer sides are coplanar with the sides of S1 and S2.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] FIG. 1A is a schematic view of a reader structure wherein a sensor stack is formed between two shields (S1 and S2), and biasing layers are placed on each side of the sensor stack to bias the FL magnetization.

[0016] FIG. 1B is a top-down view of the AP1 layer and FL magnetizations in FIG. 1A, and shows how a local field from a medium bit influences the FL magnetization to move toward or away from the air bearing surface (ABS).

[0017] FIG. 2 is a perspective view of a head arm assembly of the present disclosure.

[0018] FIG. 3 is side view of a head stack assembly of the present disclosure.

[0019] FIG. 4 is a plan view of a magnetic recording apparatus of the present disclosure.

[0020] FIG. 5 is a down-track cross-sectional view of a combined read-write head with leading and trailing loop pathways for magnetic flux return to the main pole according to an embodiment of the present disclosure.

[0021] FIG. 6 is an oblique view of a conductor made of a SHA material where electrons with spin in the (-) x-axis direction are deflected to the (+) z-axis surface, and electrons with spin in the (+) x-axis direction are deflected to the (-) z-axis surface.

[0022] FIG. 7A is an ABS view of a reader sensor according to an embodiment of the present disclosure where a current j_2 is applied in a cross-track direction across a SHE layer made of a (+) SHA material while current j_1 is applied from S2 to S1 to reduce spin torque noise within the free layer that is below the SHE layer.

[0023] FIG. 7B is an ABS view of the reader sensor in FIG. 7A showing that the j_1 and j_2 pathways may be reversed to minimize spin torque noise within the free layer.

[0024] FIG. 8A is an ABS view of a reader sensor according to an embodiment of the present disclosure where a current j_2 is applied in a cross-track direction across a SHE layer made of a (-) SHA material while current j_1 is applied from S2 to S1 to reduce spin torque noise within the free layer that is below the SHE layer.

[0025] FIG. 8B is an ABS view of the reader sensor in FIG. 8A showing that the j_1 and j_2 pathways may be reversed to minimize spin torque noise within the free layer.

[0026] FIG. 9 is an ABS showing input and output current for a SHE layer, and where a portion of current j_2 is split out to the j_1 pathway through the free layer according to an embodiment of the present disclosure.

[0027] FIG. 10A and FIG. 10B are alternative embodiments to FIG. 7A and FIG. 7B, respectively, where the reader sensor is modified to a two terminal device by flowing a current j from one side of the (+) SHE layer to S1 or in the reverse direction when the other SHE layer side is removed or disconnected from a lead.

[0028] FIG. 11A and FIG. 11B are alternative embodiments to FIG. 8A and FIG. 8B, respectively, where the reader sensor is modified to a two terminal device by flowing a current j from one side of the (-) SHE layer to S1 or in the reverse direction when the other SHE layer side is removed or disconnected from a lead.

[0029] FIG. 12 is a down-track cross-sectional view of a reader sensor according to an embodiment of the present disclosure where a front side of the SHE layer is at the ABS, and the SHE layer stripe height is greater than the FL stripe height.

[0030] FIG. 13 is a down-track cross-sectional view of a reader sensor according to an embodiment of the present disclosure where the SHE layer is recessed behind a front portion of S2 in order to reduce reader shield to shield spacing (RSS).

[0031] FIG. 14 is a down-track cross-sectional view of a reader sensor according to an embodiment of the present disclosure where a front side of the SHE layer is at the ABS, and the SHE layer is formed in front of S2 to reduce the RSS.

[0032] FIGS. 15-18 are down-track cross-sectional views showing a sequence of steps in forming a sensor wherein a seed layer, AP2 layer, AF coupling layer, AP1 layer, tunnel barrier, and FL are sequentially formed on S1, and an AFM layer is formed behind a portion of S1 according to an embodiment of the present disclosure.

[0033] FIG. 19 is a top-down view showing a step of patterning the sensor stack of layers in a cross-track direction.

[0034] FIGS. 20-21 are views from the eventual ABS plane that show a sequence of etching a sensor stack to form sensor sidewalls, and then forming biasing layers on each side of the sensor according to an embodiment of the present disclosure.

[0035] FIG. 22 and FIG. 23 are a down-track cross-sectional view and a top-down view, respectively, showing a step of patterning the SHE layer in a height direction.

[0036] FIG. 24 is a down-track cross-sectional view of the sensor structure in FIG. 22 after an insulation layer is deposited behind the patterned SHE layer.

DETAILED DESCRIPTION

[0037] The present disclosure is a reader comprised of a sensor and that is in a combined read-write head wherein a SHE layer is formed between a free layer (FL) in the sensor and a top shield (S2) so that when a current is applied across the SHE layer in a cross-track direction, and a current is applied down-track through the sensor in either a three terminal or two terminal configuration, spin torque from the SHE layer offsets spin torque from a reference layer on the FL to substantially reduce magnetic noise in the FL thereby reducing the sensor SNR and improving BER. In the drawings, the y-axis is in a cross-track direction, the z-axis is in a down-track direction, and the x-axis is in a direction orthogonal to the ABS and towards a back end of the writer structure. Thickness refers to a down-track distance, width is a cross-track distance, and height is a distance orthogonal to the ABS in the x-axis direction. A magnetization in a transverse direction is orthogonal to the ABS, while a longitudinal direction is the cross-track direction. A back end or backside refers to a side of a layer facing away from the ABS, and a front side is a side of a layer facing the ABS or at the ABS.

[0038] Referring to FIG. 2, a head gimbal assembly (HGA) 100 includes a magnetic recording head 1 comprised of a slider and a PMR writer structure formed thereon, and a suspension 103 that elastically supports the magnetic recording head. The suspension has a plate spring-like load beam 222 formed with stainless steel, a flexure 104 provided

at one end portion of the load beam, and a base plate 224 provided at the other end portion of the load beam. The slider portion of the magnetic recording head is joined to the flexure, which gives an appropriate degree of freedom to the magnetic recording head. A gimbal part (not shown) for maintaining a posture of the magnetic recording head at a steady level is provided in a portion of the flexure to which the slider is mounted.

[0039] HGA 100 is mounted on an arm 230 formed in the head arm assembly 103. The arm moves the magnetic recording head 1 in the cross-track direction y of the magnetic recording medium 140. One end of the arm is mounted on base plate 224. A coil 231 that is a portion of a voice coil motor is mounted on the other end of the arm. A bearing part 233 is provided in the intermediate portion of arm 230. The arm is rotatably supported using a shaft 234 mounted to the bearing part 233. The arm 230 and the voice coil motor that drives the arm configure an actuator.

[0040] Next, a side view of a head stack assembly (FIG. 3) and a plan view of a magnetic recording apparatus (FIG. 4) wherein the magnetic recording head 1 is incorporated are depicted. The head stack assembly 250 is a member to which a first HGA 100-1 and second HGA 100-2 are mounted to arms 230-1, 230-2, respectively, on carriage 251. A HGA is mounted on each arm at intervals so as to be aligned in the perpendicular direction (orthogonal to magnetic medium 140). The coil portion (231 in FIG. 2) of the voice coil motor is mounted at the opposite side of each arm in carriage 251. The voice coil motor has a permanent magnet 263 arranged at an opposite position across the coil 231.

[0041] With reference to FIG. 4, the head stack assembly 250 is incorporated in a magnetic recording apparatus 260. The magnetic recording apparatus has a plurality of magnetic media 140 mounted to spindle motor 261. For every magnetic recording medium, there are two magnetic recording heads arranged opposite one another across the magnetic recording medium. The head stack assembly and actuator except for the magnetic recording heads 1 correspond to a positioning device, and support the magnetic recording heads, and position the magnetic recording heads relative to the magnetic recording medium. The magnetic recording heads are moved in a cross-track of the magnetic recording medium by the actuator. The magnetic recording head records information into the magnetic recording media with a PMR writer element (not shown) and reproduces the information recorded in the magnetic recording media by a magnetoresistive (MR) sensor element (not shown).

[0042] Referring to FIG. 5, magnetic recording head 1 comprises a combined read-write head. The down-track cross-sectional view is taken along a center plane (46-46 described later with respect to FIGS. 19-21) that is formed orthogonal to the ABS 30-30, and that bisects the main pole layer 14. The read head (reader) is formed on a substrate 81 that may be comprised of AlTiC (alumina+TiC) with an overlying insulation layer 82 that is made of a dielectric material such as alumina. The substrate is typically part of a slider formed in an array of sliders on a wafer. After the combined read head/write head is fabricated, the wafer is sliced to form rows of sliders. Each row is typically lapped to afford an ABS before dicing to fabricate individual sliders that are used in a magnetic recording device. A bottom shield (S1) 84 is formed on insulation layer 82.

[0043] A magnetoresistive (MR) element also known as MR sensor 86 is formed on bottom shield 84 at the ABS

30-30 and typically includes a plurality of layers (not shown) including a tunnel barrier formed between a reference layer and a free layer where the FL has a magnetization (not shown) that rotates in the presence of a local magnetic field from a magnetic bit to a position that is substantially parallel or antiparallel to the reference layer magnetization as described previously with regard to FIG. 1B. Insulation layer **85** adjoins the backside of the MR sensor, and insulation layer **83** contacts the backsides of the bottom shield and top shield (**S2**) **87**. The top shield is formed on the MR sensor. An insulation layer **88** and a top shield (**S2B**) layer **89** are sequentially formed on **S2**. Note that the **S2B** layer **89** may serve as a flux return path (RTP) in the write head portion of the combined read/write head. Thus, the portion of the combined read/write head structure formed below layer **89** in FIG. 5 is typically considered as the read head (reader). In other embodiments (not shown), the read head may have a dual reader design with two MR sensors, or a multiple reader design with multiple MR sensors.

[0044] The present disclosure anticipates that various configurations of a write head (writer) may be employed with the read head portion. The exemplary embodiment shows magnetic flux **70** in main pole (MP) layer **14** is generated with flowing a current (not shown) through bucking coil **80b** and driving coil **80d** that are below and above the main pole layer, respectively, and are connected by interconnect **51**. Magnetic flux **70** exits the MP layer at MP pole tip **14p** at the ABS **30-30** and is used to write a plurality of bits on magnetic medium **140**. Magnetic flux **70b** returns to the MP through a trailing loop comprised of trailing shield **17**, write shield **18**, PP3 shield **26**, and top yoke **18x**. There is also a leading return loop for magnetic flux **70a** that includes leading shield **11**, leading shield connector (LSC) **33**, **S2** connector (**S2C**) **32**, return path **89**, and back gap connection (BGC) **62**. The magnetic core may also comprise a bottom yoke **35** below the MP layer. Dielectric layers **10**, **13**, **36-39**, and **47-49** are employed as insulation layers around magnetic and electrical components. A protection layer **27** covers the PP3 trailing shield and is made of an insulating material such as alumina. Above the protection layer and recessed a certain distance u from the ABS **30-30** is an optional cover layer **29** that is preferably comprised of a low coefficient of thermal expansion (CTE) material such as SiC. Overcoat layer **28** is the uppermost layer in the writer.

[0045] In related patent application Ser. No. 16/370,613, we disclosed the use of a SHE layer in a write head between a MP trailing side and the trailing shield. When a current (I_{SHE}) is conducted across the SHE layer during a write process and synchronized with the write current, spin transfer torque is generated on both of the MP trailing side and trailing shield to provide a boost in transition speed and transition sharpness, and improved BER. Now we have discovered that the spin torque generated by flowing a current through a SHE layer may be advantageously employed in reducing magnetic noise within a FL in a reader sensor.

[0046] Spin Hall Effect (SHE) is a physics phenomenon discovered in the mid 20th century, and is described by M. Dyakonov et al. in Physics Lett. A, Vol. 35, 459 (1971). Similar to a regular Hall Effect where conduction carriers with opposite charges are scattered to opposite directions perpendicular to the current density due to a certain scattering mechanism, SHE causes electrons with opposite spins to be scattered to opposite directions perpendicular to the

charge current density as a result of strong spin-orbit coupling in the conducting layer. As shown in FIG. 6, electrons pass through a non-magnetic conductor **8** with strong spin orbit interaction, and electrons **e2** with spin in the negative x-axis direction are deflected to the +z-axis surface **8s2** while electrons **e1** with spin in the positive x-axis direction are deflected to the negative z-axis surface **8s1**. SHE is quantified by the Spin Hall Angle (SHA) defined as the ratio of the spin current in the direction transverse to the charge current (z-axis in FIG. 6) to the charge current (y-axis direction in FIG. 6). For many years after SHE was discovered, the absolute value of SHA materials evaluated was typically <0.01, and SHE layers had very limited applications in industry.

[0047] During the past 10 years, materials with substantially larger (giant) SHA have been found. B. Gu et al. in Phys. Rev. Lett. 105, 216401 (2010), and L. Liu et al. in Phys. Rev. Lett. 106, 036601 (2011) provided examples of SHA ~0.07 in a Pt layer, and as large as 0.12 in Au layers with Pt doping. A large but negative SHA of around -0.12 was found in β -Ta, meaning that electrons in the β -Ta layer are spin scattered in the opposite directions compared to what is shown in FIG. 6.

[0048] Referring to FIG. 7A, an ABS view of the reader with MR sensor **86** in FIG. 5 is shown according to a first embodiment of the present disclosure where a single SHE layer **9** made of a positive giant SHA material contacts a top surface **5t** of FL **5** in the sensor. The sensor is a stack of layers with sidewalls **5s1**, and wherein seed layer **2**, AP2 layer **3a**, AF coupling layer **3b**, AP1 layer **3c**, non-magnetic layer **4**, and FL **5** are sequentially formed on **S1** **84**. The non-magnetic spacer is a tunnel barrier layer in preferred embodiments, but also may be a metal spacer in other embodiments. The MR sensor also typically comprises one or more additional layers including an AFM layer (not shown) behind the stack pictured in FIG. 7A, and described later. FL magnetization **5m** is longitudinally biased with magnetization **7m** in biasing layers **7** formed within an insulation layer **85a** that contacts each sidewall **5s1** of the MR sensor. An upper portion of insulation layer **85a** separates each biasing layer from SHE layer **9**. Note that the SHE layer has a full width such that each side **9s1**, **9s2** is coplanar with a side **84s** of **S1** and a side **87s** of **S2** **87**. Insulation layer **85b** is formed on the SHE layer and electrically separates the SHE layer from **S2**. Insulation layers **85a**, **85b** are bottom and top portions, respectively, of insulation layer **85** shown in FIG. 5.

[0049] The benefit of the SHE layer **9** is explained as follows. Conduction electrons in current I_{SHE} (hereinafter referred to as j_2) that flows in a positive y-axis direction from SHE layer side **9s1** to side **9s2**, and that carry spin downward propagate to FL top surface **5t**. This spin polarization **9p** substantially offsets a similar spin polarization (not shown) that is generated when read current **j1** flows from **S2** to **S1** and conduction electrons in **j1** that carry spin upward from AP1 layer **3c** produce spin torque on FL **5**. In particular, spin current density represented by the product ($j_1 \times P_0$) where P_0 is the spin polarization from AP1 to the FL is preferably proximate to the spin current density represented by the product ($j_2 \times SHA$) where SHA is the spin polarization from the SHE layer to the FL. In the ideal case where ($j_1 \times P_0$) = ($j_2 \times SHA$), or optionally, when ($j_1 \times P_0$) is proximate to ($j_2 \times SHA$), then spin torque induced magnetic noise within the FL is minimized to essentially zero or

reduced substantially and will enable smaller sensor widths w_1 with a smaller RA product of <0.6 in the tunnel barrier **4** for optimum performance. Note that when sensor side-walls **5s1** are non-vertical, width w_1 refers to the FL width.

[0050] SHE layer thickness t is preferably less than 12 nm since the L. Liu reference mentioned earlier indicates that a SHE assist (spin torque applied to an adjacent magnetic layer, i.e. FL **5** in the present disclosure) is reduced when the giant SHA material has a thickness >12 nm. Preferably, the absolute value for SHA is >0.05 , and more preferably is greater than 0.10 to enable a lower j_2 current density. In some embodiments, the SHA material is a heavy metal that is one of β -Ta, Hf, Pt, Ir, and W that may be embedded with Au, for example. In other embodiments, a topological insulator (TI) may serve as a SHA material according to a report at <https://phys.org/news/2017-11-significant-breakthrough-topological-insulator-based-devices.html#Cp>. A TI may be one of Bi_2Sb_3 , Bi_2Se_3 , Bi_2Te_3 , or Sb_2Te_3 , and has an inner portion that is an insulator or a high resistance material while an outer portion comprising the surface thereof has a spin-polarized metal state. Therefore, the TI has an internal magnetic field such as a spin orbit interaction. A pure spin current can be generated in a highly efficient manner due to the strong spin orbit interaction and collapse of the rotational symmetry at the surface.

[0051] Seed layer **2** typically includes one or more metals such as Ta, Ti, Ru, and Mg, an alloy such as NiCr, or a nitride (TiN or TaN) that promote uniform thickness and the desired crystal growth in overlying MR sensor layers. Each of AP2 layer **3a**, AP1 layer **3c**, and FL **5** may be a single layer or multilayer comprised of one or both of Co and Fe that may be alloyed with one or more of Ni, B, and with one or more non-magnetic elements such as W, Mo, Ta, and Cr. AF coupling layer **3b** is typically one of Ru, Rh, Ir, or Os and has a thickness that ensures AP2 layer **3a** is AF coupled to AP1 layer **3c**. A non-magnetic spacer **4** that is a tunnel barrier layer is preferably MgO but may be another metal oxide, metal oxynitride, or metal nitride used in the art. In other embodiments, the non-magnetic spacer is a metal such as Cu. Insulation layers **85a**, **85b** may be one or more of Al_2O_3 , TaOx, SiN, AlN, SiO_2 , MgO, and NiO. S1 **84** and S2 **87** typically extend from a front side at the ABS to a backside (not shown) that is 10 microns or more from the ABS, have a magnetization saturation (M_s) value from 5 kiloGauss (kG) to 15 kG, and are generally comprised of CoFe, CoFeNi, CoFeN, or NiFe, or a combination thereof. In some embodiments, each biasing layer **7** is a junction shield that is comprised of one or more magnetic materials such as CoFe and NiFe. However, the biasing layer may also be a hard magnetic material that is CoCrPt or CoCrPtX where X is B, O or other elements that can assist a perpendicular growth of the HB easy axis, TbFeCo, or a multilayer ferromagnetic/non-magnetic super-lattice structure that is $[\text{Co}/\text{Pt}/\text{Co}]_n$ or $[\text{Co}/\text{Pd}/\text{Co}]_n$, for example, where n is a lamination number.

[0052] As shown in FIG. 7B, the first embodiment also encompasses a MR sensor having the three terminal configuration shown in FIG. 7A except where j_1 flows from S1 **84** to S2 **87**, and j_2 flows in the negative y-axis direction from the right side **9s2** of SHE layer **9** to the left side **9s1**. In this case, SHE layer spin polarization $9p$ is in the opposite direction shown in FIG. 7A but still opposes spin polarization (not shown) from AP1 layer **3c** on FL **5** because j_1 is also reversed compared with the FIG. 7A configuration. As

a result, the same advantageous result of reduced spin torque induced magnetic noise in the FL that enables a reduced SNR, lower tunnel barrier RA, and improved reader performance for a MR sensor width $w_1 < 25$ nm, is realized as in FIG. 7A when the product ($j_1 \times P_0$) is proximate or equal to the product ($j_2 \times \text{SHA}$).

[0053] Referring to FIG. 8A, all aspects of the embodiment in FIG. 7A are retained except the (+) SHE layer is replaced with a negative giant SHA material to give (−) SHE layer **9n**. Therefore, j_2 in SHE layer **9n** is reversed compared with FIG. 7A and flows from side **9s2** to side **9s1** when j_1 is applied from S2 **87** to S1 **84** in order to achieve the same effect where spin torque produced by spin polarization $9p$ from j_2 essentially cancels spin torque caused by spin polarization (not shown) from AP1 layer **3c** that is generated on FL **5**. In other words, spin torque induced magnetic noise in the FL is effectively reduced to zero, or substantially decreased, to provide the same benefit mentioned previously for the FIG. 7A configuration when ($j_1 \times P_0$) is proximate or equal to ($j_2 \times \text{SHA}$).

[0054] FIG. 8B depicts an alternative configuration for the embodiment in FIG. 8A where all aspects are retained except the current is reversed for both j_1 and j_2 . Thus, when j_1 flows from S1 **84** to S2 **87**, and j_2 flows from side **9s1** to side **9s2** in SHE layer **9n**, then the spin torque from the SHE layer essentially cancels the spin torque from AP1 layer **3c** when ($j_1 \times P_0$) equals or is proximate to ($j_2 \times \text{SHA}$) as explained earlier.

[0055] In a conventional reader with an RA of 0.5 $\text{Ohm}\cdot\mu\text{m}^2$, a voltage of about 140 mV is generally applied across tunnel barrier **4**. Thus, the resulting current density is $j_1 = 2.8 \times 10^7$ Amps/ cm^2 . Assuming the stripe height (SH2 in FIG. 12) is substantially larger than the FL stripe height (SH1 in FIG. 12), the amount of current that is input from SHE layer side **9s1** in FIG. 7A, for example, and split into the MR sensor current is negligible. Thus, the injected current density from side **9s1** and output current at side **9s2** in FIG. 7A are both equal to j_2 . Spin polarization P_0 from AP1 layer **3c** to FL **5** is typically 0.4-0.6, and the SHA for a giant SHE layer **9** is in the range of 0.1-0.2. Accordingly, j_2 should be a factor of 3-4 times j_1 to satisfy the objective of ($j_1 \times P_0$) = ($j_2 \times \text{SHA}$). It follows that the desired j_2 of around $8-10 \times 10^7$ Amps/ cm^2 is applicable in a SHE layer with good reliability. It should be understood that in embodiments where ($j_1 \times P_0$) is proximate to ($j_2 \times \text{SHA}$), a significant decrease in spin torque induced magnetic noise within the FL is still achieved compared with the prior art where there is no SHE layer.

[0056] Referring to FIG. 9, an enlarged view of SHE layer **9** and FL **5** from FIG. 7A according to an alternative embodiment is depicted. If the stripe height of the SHE layer **9** is equal to that of the FL **5**, the current I_s split from j_2 into the FL and sensor cannot be neglected. Assuming the FL has a width $\times$ SH1 of 24×24 nm^2 area for the j_1 path, the SHE layer has a thickness $\times$ SH2 of 6×24 nm^2 for the j_2 path, the current density from the left lead **94** into SHE layer side **9s1** is j_{in} and the current density from side **9s2** to the right lead **95** is j_{out} , then total input current I_{in} to the SHE layer equals the sum of output current split into the sensor (I_s) and the output current (I_{out}) into the right lead where $I_{out} \times j_{in} = j_{out} + 4 \times j_1$ because j_1 has a cross-sectional area in the (x, y) plane that is a factor of 4 higher than the cross-sectional area for j_2 in the (x, z) plane, and $j_2 = (j_{in} + j_{out})/2 = j_{in} + 2 \times j_1$, which is still in the applicable regime. Note that $I_{in} = 1.25 \times I_s$ and

$I_{out}=0.25 \times I_S$. The same result is realized for the alternative embodiments in FIG. 7B, FIG. 8A, and FIG. 8B where SH1 is essentially equal to SH2 (FIG. 12), and one or both of the j1 and j2 pathways are reversed.

[0057] In FIG. 10A, another embodiment of the present disclosure is illustrated and is a modification of the reader in the first embodiment where the three terminal device becomes a two terminal device. In particular, for a SHE layer 9 made of a giant positive SHA material, and when the stripe height of the SHE layer is proximate to that of the FL, current through the SHE layer is substantially the same as the current through the MR sensor. In other words, current j may be input from a first terminal (not shown) and through a lead to SHE layer side 9s1, and continues through sensor 86 to S1 84 that serves as a second terminal. A key feature is that a right portion of the SHE layer between dashed line 9x and right side 9s2 is either not connected to an output lead as in the first embodiment, or is removed by etching and replaced with an insulation layer (not shown). In addition to the spin torque induced magnetic noise reduction in the FL associated with the three terminal embodiments described earlier, this embodiment has an additional advantage of simplifying the circuit and process steps. Note that the thickness and stripe height of the SHE layer may be adjusted so that product (j×P0) is proximate or equal to product (j×SHA) so that spin polarization 9p from the SHE layer opposes spin polarization (not shown) from AP1 layer 3c on FL 5 with the overall outcome of substantially reducing or essentially eliminating, respectively, spin torque induced magnetic noise in the FL.

[0058] As shown in FIG. 10B, the reader configuration in FIG. 10A also encompasses an embodiment where current j flows from S1 84 upward through sensor 86 and to the SHE layer 9, and then exits through SHE layer side 9s1 to a lead (not shown). In this case, SHE layer spin polarization 9p is in the opposite direction shown in FIG. 10A but still opposes spin polarization from AP1 layer 3c on FL 5 because the j pathway through the AP1 layer is also reversed compared with the FIG. 10A configuration. Therefore, the same advantageous result of reduced spin torque induced magnetic noise in the FL that enables a reduced SNR, lower tunnel barrier RA, and improved reader performance for MR sensor width $w1 < 25$ nm, is realized.

[0059] Referring to FIG. 11A, all aspects of the embodiment in FIG. 10A are retained except the (+) SHE layer is replaced with a negative giant SHA material to give SHE layer 9n. Moreover, the left portion of the SHE layer between dashed line 9x and side 9s1 is either not connected to an output lead as in the three terminal embodiment, or is removed with an etching process and replaced by an insulation layer (not shown). A key feature is that current j in SHE layer 9n is reversed compared with FIG. 10A and flows from side 9s2 to a center portion of the SHE layer and then continues down through MR sensor 86 to S1 84 in order to achieve the same effect where spin torque produced by spin polarization 9p in the SHE layer essentially cancels spin torque caused by spin polarization from AP1 layer 3c that is generated on FL 5.

[0060] Alternatively in FIG. 11B, the reader configuration shown in FIG. 11A is retained except the current pathway is reversed so that current j proceeds from S1 84 up through sensor 86, and then exits SHE layer 9n at side 9s2. Spin polarization 9p is in the opposite direction compared with the FIG. 11A embodiment, but spin torque from the SHE

layer continues to oppose spin torque from AP1 layer 3c on FL 5 because the current pathway through the AP1 layer is also reversed.

[0061] In the two terminal device embodiments, an upper portion of FL 5 proximate to top surface 5t or an upper layer in a multilayer stack for the FL preferably has a higher resistivity than the lower portion of the FL, and preferably a resistivity that is at least $\sim 5 \times 10^{-7}$ Ohm·m. If the resistivity in the upper portion of the FL is too low, then the spin torque generated by SHE layer 9 (or 9n) will be concentrated in the FL corner nearer to the spin current injection side, which is side 9s1 in FIG. 10A and side 9s2 in FIG. 11A, or in the FL corner nearer the spin current exit, which is side 9s1 in FIG. 10B and side 9s2 in FIG. 11B. Magnetic materials with B doping such as CoFeB, CoB, and FeB typically have higher resistivity than non-B containing materials, and are preferred for an upper portion of the FL proximate to the SHE layer since they also do not reduce the TMR ratio. In other embodiments, the upper FL portion may contain a high damping impurity that is one of Re, Tb, or the like that also provides higher resistivity as long as the impurity element does not diffuse into the tunnel barrier 4 and cause a reduction in the tunneling magnetoresistive (TMR) ratio.

[0062] As indicated earlier, the present disclosure anticipates that the MR sensor in any of the previously described reader configurations may have different locations for an AFM layer that is used to pin the AP2 layer 3a and thus stabilize the direction of magnetization 3m in AP1 layer 3c. In conventional reader designs where reader shield to shield spacing (RSS) at the ABS is not a critical concern, then an AFM layer (not shown) may be formed between the seed layer 2 and AP2 layer 3a in FIG. 1A, for example. However, in more recent designs where reducing RSS is an important requirement, then the AFM layer may be recessed behind one or more other layers in the MR sensor. In related U.S. Pat. No. 9,437,225, we disclosed a MR sensor structure where an AFM layer is formed behind the FL, and in related U.S. Pat. No. 9,799,357, we disclosed a MR sensor wherein the AFM layer is behind an upper portion of S1 in order to reduce RSS and pin related noise.

[0063] The present disclosure also encompasses reader designs with different stripe heights and positions for SHE layer 9 (or 9n). In the exemplary embodiment shown in FIG. 12 that is a down-track cross-sectional view of the reader structure in one of FIGS. 7A-8B or in one of FIGS. 10A-11B, the SHE layer has a front side 9f at the ABS 30-30, and a backside 9b at a stripe height SH2. FL 5 has stripe height SH1 between the ABS and backside 5e, and magnetization 5m in the absence of an external field. AP1 layer magnetization 3m is AF coupled to AP2 layer magnetization 3m1. The AFM layer that is typically employed to pin magnetization 3m1 is not pictured in this drawing since the MR sensor may accommodate various AFM layer positions such as in U.S. Pat. No. 9,799,357, for example. As explained previously, SH2 may be greater than SH1 in a reader with a three terminal device configuration where current j2 flows across the SHE layer in a longitudinal direction, and read current j1 flows in a down-track direction between S1 84 and S2 87 as indicated in FIGS. 7A-8B. In other embodiments (FIGS. 10A-11B) where SH1 is proximate to SH2, the reader may have a two terminal device configuration where current j flows from one side of the SHE layer in a

longitudinal direction to a center portion thereof, and then in a down-track direction to S1, or in the reverse pathway mentioned previously.

[0064] Referring to FIG. 13, an alternative embodiment for the placement of SHE layer 9 is depicted. A key feature is that front side 9f is recessed behind a portion of S2 front side 87f to reduce RSS. The SHE layer has stripe height SH2, but a backside thereof is at height h1 from ABS 30-30 where $h1 > SH2$. Insulation layer 85b continues to separate the SHE layer from S2 87.

[0065] In yet another embodiment shown in FIG. 14, the SHE layer front side 9f may be maintained at ABS 30-30, but S2 87 has a lower portion with a front side 87/2 that is recessed behind SHE layer backside 9b in order to reduce RSS. Meanwhile, an S2 upper portion has front side 87/1 at the ABS. Here, SHE layer stripe height SH2 is less than FL stripe height SH1, and less than height h2 that is the recessed distance of S2 front side 87/2 from the ABS.

[0066] The present disclosure also encompasses a process sequence for fabricating a SHE layer 9 (or 9n) on a top surface 5t of FL 5 according to an embodiment described herein. The particular fabrication sequence that is illustrated relates to a reader with a MR sensor design with an ABS view in one of FIGS. 7A-8B, a down-track cross-sectional view shown in FIG. 12, and an AFM layer placement described in related U.S. Pat. No. 9,799,357. However, various combinations of a two terminal or three terminal device with one of multiple alternative AFM layer positions, and one of the SHE layer positions from FIGS. 12-14 are anticipated by the present disclosure as appreciated by those skilled in the art.

[0067] Referring to FIG. 15, a down-track cross-sectional view is shown where a S2 bottom portion 84a with top surface 84t is provided. AFM layer 20, ferromagnetic (FM) layer 21, AF coupling layer 22, and FM layer 23 are sequentially laid down on the bottom shield. Optionally, FM layer 21 and the AF coupling layer 22 may be omitted so that the AFM layer pins a magnetization (not shown) in FM layer 23, which in turn is ferromagnetically coupled to AP2 layer 3a (shown in FIG. 17). Thus, the AFM layer is responsible for pinning a magnetization in the AP2 layer through a stack comprised of layers 21/22/23, or through a single FM layer 23.

[0068] A first photoresist layer 60 is coated on FM layer 23 and is patterned by a conventional photolithography method to form a front side 60f that faces the eventual ABS, which is indicated here by plane 30-30. Thereafter, a reactive ion etch (RIE) or ion beam etch (IBE) is performed to remove uncovered portions of underlying layers and stops on top surface 84t to leave an opening 70 between plane 30-30 and plane 44-44 that includes front side 60f.

[0069] Referring to FIG. 16, S2 top portion 84b also known as a bottom shield refill and the seed layer 2 are sequentially deposited on S2 top surface 84t to a level that fills essentially all of opening 70 thereby forming a seed layer top surface 2t that is coplanar with top surface 23t on FM layer 23. The bottom shield refill is an extension of bottom shield 84a so that the bottom and top S2 portions may be collectively referred to as S2 84. A chemical mechanical polish (CMP) process may be performed to form coplanar top surfaces 2t and 23t.

[0070] Referring to FIG. 17, AP2 layer 3a, AF coupling layer 3b, AP1 layer 3c, tunnel barrier 4, and FL 5 are sequentially laid down on seed layer 2 and FM layer 23. The

aforementioned sensor layers may be deposited in an Anelva C-7100 thin film sputtering system or the like which typically includes three physical vapor deposition (PVD) chambers each having multiple targets, an oxidation chamber, and a sputter etching chamber. Next, a second photoresist layer 61 is coated on FL 5 and is patternwise exposed and developed with a photolithography process to generate a photoresist mask that extends from plane 30-30 to a backside 61b at stripe height SH1 from the eventual ABS. Opening 71 exposes a portion of FL top surface 5t. It should be understood that the ABS is not defined until a back end lapping process occurs after all layers in the read head and overlying write head are formed in combined read/write head structure. For the purpose of more clearly describing the process flow in this disclosure, the eventual ABS is illustrated as a reference plane 30-30. Thus, all layers contacting plane 30-30 actually extend to the opposite side of the eventual ABS until the lapping process is performed.

[0071] Referring to FIG. 18, patterned photoresist layer 61 is used as an etch mask during a RIE or IBE step that removes portions of the FL 5, and tunnel barrier 4 that are not protected by the etch mask. The etching process stops on a back portion of AP1 layer top surface 3t behind FL backside 5e where a bottom end at tunnel barrier 4 may be a greater distance from plane 30-30 than a top end at top surface 5t. Note that the FL backside may be essentially vertical in other embodiments depending on FL thickness and the etching conditions. Then, insulation layer 85a is deposited with a top surface 85t thereon. A planarization step may be performed to form a top surface 85t that is coplanar with FL top surface 5t. Insulation layer 85a is preferably one or more of Al_2O_3 , TaOx, SiN, AlN, SiO_2 , MgO, and NiO although other dielectric materials known in the art may be employed.

[0072] With regard to FIG. 19, a photoresist layer 63 is coated on FL 5 and insulation layer 85a with backside 85e, and is patternwise exposed and developed with a conventional photolithography process to form a photoresist mask having width w1 between sides 63s that extend from a front side 63f at the plane 30-30 to backside 63e. Portions of FL 5 are exposed on either side of center plane 46-46 between a side 63s and a far side of the MR sensor structure at FL side 5s. Portions of insulation layer 85a are exposed between each photoresist mask side 63s and a far side 85s of the insulation layer, and behind FL backside 5e.

[0073] FIG. 20 depicts a view of the partially formed MR sensor structure from plane 30-30 after exposed portions of the sensor stack between each photoresist mask side 63s and FL side 5s in FIG. 19 are removed by an IBE process thereby forming a MR sensor side 5s1 that extends from FL top surface 5t to S1 refill top surface 84t2 on each side of center plane 46-46. An opening 72 is generated on each side of the MR sensor. Insulation layer 85a has a composition that provides a slower etching rate than the sensor stack of layers to prevent etching into AP1 layer 3c behind plane 44-44 in FIG. 19.

[0074] Referring to FIG. 21, the MR sensor structure in FIG. 20 is depicted after a second portion of insulation layer 85a and biasing layer 7 are deposited on S1 top surface 84t2 and on sidewall 5s1 to fill the opening 72. A planarization process may be used to form top surface 5t1 that is coplanar with insulation layer top surface 85t. Thus, each biasing layer 7 extends from the plane 30-30 to a backside at plane 44-44 (not shown).

[0075] In FIG. 22, SHE layer 9 (or 9n) is deposited on FL 5 and on insulation layer 85a. Then, another photoresist is coated on the SHE layer and patterned with a conventional method to yield photoresist mask 64 that extends a stripe height SH2 from plane 30-30 to a photoresist mask backside 64e.

[0076] As shown from a top-down view in FIG. 23, unprotected portions of the SHE layer are removed with an IBE or RIE step behind photoresist mask backside 64e. The etch stops on or within insulation layer 85a and thereby forms SHE layer backside 9b.

[0077] Referring to FIG. 24, after photoresist mask 64 is removed, insulation layer 85b is deposited on SHE layer top surface 9t and on insulation layer 85a. Thereafter, another photoresist patterning and etch sequence well known to those skilled in the art may be performed to generate a backside on the MR sensor stack of layers at plane 45-45.

[0078] The present disclosure also encompasses an annealing step after all layers in the MR sensor structure have been deposited. A first annealing process may be performed to set the magnetization direction of the AP1 layer 3c and AP2 layer 3a by heating the patterned MR sensor to a temperature range of 200° C. to 350° C. while applying a magnetic field along the x-axis direction. A second annealing process is typically used to set the direction of magnetization 7m in biasing layers 7. If the temperature and/or applied field employed during the anneal of biasing layers 7 is lower than during annealing of the sensor stack, the first annealing process may be performed before the second annealing process to maintain the AP1 and AP2 magnetization directions established during the first annealing process.

[0079] While the present disclosure has been particularly shown and described with reference to, the preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made without departing from the spirit and scope of this disclosure.

1. A read head, comprising:

- (a) a bottom shield (S1) having a front side at an air bearing surface (ABS), and a top surface;
- (b) a top shield (S2) having a front side at the ABS, and a bottom surface;
- (c) a magnetoresistive (MR) sensor formed on S1 at the ABS, comprising:
 - (1) a free layer (FL) with a magnetization in a first cross-track (longitudinal) direction, a front side at the ABS, and a back side at a first stripe height (SH1) from the ABS;
 - (2) an AP1 reference layer with a magnetization that is orthogonal to the ABS in a first transverse direction, and wherein the AP1 reference layer is antiferromagnetically (AF) coupled to an AP2 reference layer through an AF coupling layer; and
 - (3) a non-magnetic layer between the FL and AP1 reference layer; and
- (d) a Spin Hall Effect (SHE) layer formed on the FL and with a second stripe height (SH2) between a front side and backside thereof, and wherein a top surface of the SHE layer is separated from the S2 bottom surface by an insulation layer, and wherein the SHE layer is configured to spin polarize a current and generate a first spin torque on the FL that opposes a second spin torque generated by the AP1 reference layer on the FL when

the current flows between a first side of the SHE layer and a second side of the SHE layer, and a portion of the current flows through the MR sensor thereby reducing spin torque induced magnetic noise in the FL.

2. The read head of claim 1 wherein the SHE layer has a down-track thickness less than 12 nm.

3. The read head of claim 1 wherein the SHE layer is comprised of a positive Spin Hall Angle (SHA) material having an absolute value for SHA that is >0.05 , and the current flows from the first side to the second side of the SHE layer in the first cross-track direction when the portion of current through the MR sensor flows from the SHE layer to S1.

4. The read head of claim 1 wherein the SHE layer is comprised of a negative Spin Hall Angle (SHA) material having an absolute value for SHA that is >0.05 , and the j_2 flows from the second side to the first side of the SHE layer in a direction that is opposite to the first cross-track direction when the j_1 flows from S2 to S1.

5. The read head of claim 1 wherein the SHE layer is comprised of a positive Spin Hall Angle (SHA) material having an absolute value for SHA that is >0.05 , and the current flows from the second side to the first side of the SHE layer in a direction opposite to the first cross-track direction when the portion of current through the MR sensor flows from S1 to the SHE layer.

6. The read head of claim 1 wherein the SHE layer is comprised of a negative Spin Hall Angle (SHA) material having an absolute value for SHA that is >0.05 , and the j_2 flows from the first side to the second side of the SHE layer in the first cross-track direction when the j_1 flows from S1 to S2.

7. The read head of claim 1 wherein the SHE layer front side is at the ABS.

8. The read head of claim 7 wherein the SHE layer backside is formed between the ABS and a bottom portion of S2 that has a front side at height h2 from the ABS where $h2 > SH2$.

9. The read head of claim 1 wherein the SHE layer front side is recessed behind a bottom portion of S2.

10. The read head of claim 1 wherein the non-magnetic layer is a tunnel barrier layer.

11. The read head of claim 1 wherein the MR sensor is further comprised of an antiferromagnetic (AFM) layer that is formed behind an upper portion of S1, and wherein the AFM layer pins a magnetization in the AP2 reference layer.

12. The read head of claim 1 wherein SH2 is greater than SH1.

13. A head gimbal assembly (HGA), comprising:

- (a) the read head of claim 1; and
 - (b) a suspension that elastically supports the read head, wherein the suspension has a flexure to which the read head is joined, a load beam with one end connected to the flexure, and a base plate connected to the other end of the load beam.
14. A magnetic recording apparatus, comprising:
- (a) the HGA of claim 13;
 - (b) a magnetic recording medium positioned opposite to a slider on which the read head is formed;
 - (c) a spindle motor that rotates and drives the magnetic recording medium; and
 - (d) a device that supports the slider, and that positions the slider relative to the magnetic recording medium.

15. A read head, comprising:

- (a) a bottom shield (S1) having a front side at an air bearing surface (ABS), and a top surface;
- (b) a top shield (S2) having a front side at the ABS, and a bottom surface;
- (c) a magnetoresistive (MR) sensor formed on S1 at the ABS, comprising:
 - (1) a free layer (FL) with a magnetization in a first cross-track (longitudinal) direction, a front side at the ABS, and a backside at a first stripe height (SH1) from the ABS;
 - (2) an AP1 reference layer with a magnetization that is orthogonal to the ABS in a first transverse direction, and wherein the AP1 reference layer is antiferromagnetically (AF) coupled to an AP2 reference layer through an AF coupling layer, and produces a first spin torque on the FL when a current (j) flows through the MR sensor in a down-track direction; and
 - (3) a non-magnetic layer between the FL and AP1 reference layer; and
- (d) a Spin Hall Effect (SHE) layer formed on the FL and with a second stripe height (SH2) between a front side and backside thereof, and wherein a top surface of the SHE layer is separated from the S2 bottom surface by an insulation layer, and wherein the SHE layer is configured to generate a second spin torque on the FL that opposes the first spin torque when the current (j) flows between one side of the SHE layer and a center portion thereof, and thereby reduces spin torque induced magnetic noise in the FL.

16. The read head of claim **15** wherein the SHE layer has a down-track thickness less than 12 nm.

17. The read head of claim **15** wherein the SHE layer is comprised of a positive Spin Hall Angle (SHA) material having an absolute value for SHA that is >0.05 , and the current j flows from the first side to the center portion of the SHE layer in the first cross-track direction, and then through the MR sensor to S1.

18. The read head of claim **15** wherein the SHE layer is comprised of a negative Spin Hall Angle (SHA) material having an absolute value for SHA that is >0.05 , and the current j flows from the second side to the center portion of the SHE layer in a direction that is opposite to the first cross-track direction, and then through the MR sensor to S1.

19. The read head of claim **15** wherein the SHE layer is comprised of a positive Spin Hall Angle (SHA) material having an absolute value for SHA that is >0.05 , and the current j flows from S1 through the MR sensor and to the center portion of the SHE layer, and then to the first side of the SHE layer in a direction opposite to the first cross-track direction.

20. The read head of claim **15** wherein the SHE layer is comprised of a negative Spin Hall Angle (SHA) material having an absolute value for SHA that is >0.05 , and the current j flows from S1 through the MR sensor and to the center portion of the SHE layer, and then to the second side of the SHE layer in the first cross-track direction.

21. The read head of claim **15** wherein the SHE layer front side is at the ABS.

22. The read head of claim **21** wherein the SHE layer backside is formed between the ABS and a bottom portion of S2 that has a front side at height h2 from the ABS where $h2 > SH2$.

23. The read head of claim **15** wherein the SHE layer front side is recessed behind a bottom portion of S2.

24. The read head of claim **15** wherein the MR sensor is further comprised of an antiferromagnetic (AFM) layer that is formed behind an upper portion of S1, and wherein the AFM layer pins a magnetization in the AP2 reference layer.

25. The read head of claim **15** wherein SH2 is essentially equivalent to SH1.

26. The read head of claim **15** wherein the non-magnetic spacer is a tunnel barrier layer.

27. A head gimbal assembly (HGA), comprising:

- (a) the read head of claim **15**; and
 - (b) a suspension that elastically supports the read head, wherein the suspension has a flexure to which the read head is joined, a load beam with one end connected to the flexure, and a base plate connected to the other end of the load beam.
- 28.** A magnetic recording apparatus, comprising:
- (a) the HGA of claim **27**;
 - (b) a magnetic recording medium positioned opposite to a slider on which the read head is formed;
 - (c) a spindle motor that rotates and drives the magnetic recording medium; and
 - (d) a device that supports the slider, and that positions the slider relative to the magnetic recording medium.

29. A method of forming a read head, comprising:

- (a) depositing a magnetoresistive (MR) sensor stack of layers comprised of an AP1 reference layer, a non-magnetic spacer, and a free layer (FL) that are sequentially formed above a bottom shield (S1) top surface;
- (b) forming a backside on the FL that is a first stripe height (SH1) from a first plane and extends from a FL top surface to a bottom end at a top surface of the AP1 reference layer;
- (c) depositing a first insulation layer on the top surface of the AP1 reference layer and that adjoins the FL backside;
- (d) forming a sidewall on each side of the MR sensor stack of layers and that extends from the FL top surface to the S1 top surface;
- (e) forming a biasing layer adjacent to each MR sensor stack sidewall that longitudinally biases a FL magnetization in a cross-track direction;
- (f) forming a Spin Hall Effect (SHE) layer on the FL wherein the SHE layer has a second stripe height (SH2) between a front side and a backside thereof, and wherein the AP1 reference layer generates a first spin torque on the FL when a first current flows in a down-track direction through the MR sensor stack of layers, and the SHE layer generates a second spin torque on the FL that opposes the first spin torque when a second current flows in a cross-track direction between one side of the SHE layer and at least a center portion thereof; and
- (g) performing a lapping process such that the first plane becomes an air bearing surface (ABS).

30. The method of claim **29** wherein the SHE layer is comprised of a positive giant SHA material, or a negative giant SHA material having an absolute value for SHA that is >0.05 .

31. The method of claim **29** further comprised of forming a second insulation layer on the SHE layer and a top shield (S2) on the second insulation layer before the lapping process.

32. The method of claim 29 wherein the SHE layer front side is at the ABS.

33. The method of claim 30 wherein the SHE layer backside is formed between the ABS and a bottom portion of S2 that has a front side at height h2 from the ABS where $h2 > SH2$.

34. The method of claim 31 wherein the SHE layer front side is recessed behind a bottom portion of S2.

35. The method of claim 29 wherein $SH2 > SH1$, and the first current that is in a down-track direction flows between S1 and S2, and the second current in a cross-track direction across the SHE layer flows from a first side of the SHE layer to a second side of the SHE layer.

36. The method of claim 29 where SH2 is essentially equal to SH1, the first current is the second current, and the second current in the cross-track direction flows from one side of the SHE layer to the center portion, and then in a down-track direction through the MR sensor stack of layers to S1, or the first current in the down-track direction flows from S1 through the MR sensor stack of layers to the center portion of the SHE layer, and then in the cross-track direction to one side of the SHE layer.

37. The method of claim 29 wherein the non-magnetic spacer is a tunnel barrier layer.

38. The method of claim 29 wherein the MR sensor stack of layers is further comprised of a seed layer on S1, an AP2 reference layer on the seed layer, an antiferromagnetic (AF) coupling layer that antiferromagnetically couples the AP1 and AP2 reference layers, and an AFM layer formed behind an upper portion of S1 wherein the AFM layer pins a magnetization in the AP2 reference layer.

* * * * *