

(51) International Patent Classification:
C10G 1/00 (2006.01)(21) International Application Number:
PCT/US2013/026412(22) International Filing Date:
15 February 2013 (15.02.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/599,206 15 February 2012 (15.02.2012) US

(72) Inventor; and

(71) Applicant: ULLOM, William [US/US]; 526 South Main Street, Suite 801D, Akron, OH 44311 (US).

(74) Agent: MOXON, George, W., II; Moxon & Associates LLC, 110 W. Streetsboro St., Suite L9 & L11-L14, Hudson, OH 44236 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,

ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: DUAL STAGE, ZONE-DELINEATED PYROLYSIS APPARATUS

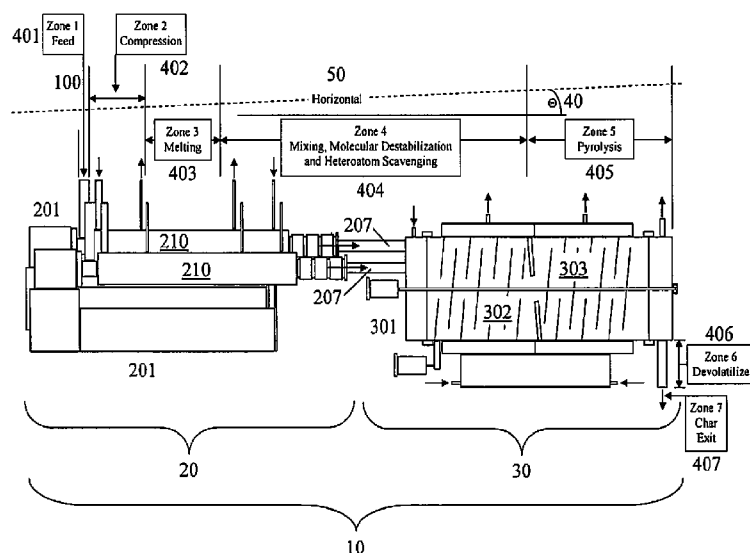


FIG. 1

(57) Abstract: An apparatus for continuous conversion of hydro carbonaceous materials to condensable, non-condensable and solid hydrocarbon products, comprising at least one extruder capable of providing shear force and heat and having three or more treatment zones, a continuous process thermal kiln reactor, said extruder and said kiln reactor being in fluid communication, means for transporting hydro carbonaceous materials through the apparatus, and between said extruder and said kiln reactor, means for feeding said hydrocarbonaceous materials to the apparatus, means for heating said hydrocarbonaceous materials, means for removing vapor products from said apparatus, means for removing solid products from said apparatus, and means whereby said hydrocarbonaceous materials are maintained within the zones for a range of defined temperature and residence times, wherein said extruder has at least three zones, and said kiln reactor comprises at least two zones, whereby said hydrocarbonaceous material is subjected to a plurality of defined temperature ranges and residence times.

DUAL STAGE, ZONE-DELINEATED PYROLYSIS APPARATUS

BACKGROUND OF THE INVENTION

The present invention relates to an improved apparatus for the conversion of polymer waste in successive process environments, in solid and/or liquid form, herein interchangeably described as hydrocarbonaceous material, polymer waste and/or polymeric material, to condensable, non-condensable and solid hydrocarbon products. Condensable hydrocarbon products include synthetic petroleum and a variety of its fractions including but not limited to light sweet crude oil, fuel additives, base oil, slack wax, paraffin wax, microcrystalline wax and condensate dominated by aromatic petroleum hydrocarbons. The non-condensable hydrocarbon product is a gas. Solid hydrocarbon products include finely divided carbon char. In particular, the invention is an improved zone-delineated apparatus incorporating shear force in addition to heat in its first stage, plus a large volume thermal reactor in its second stage. It has capability to simultaneously produce multiple products, one of which, a hard wax, is produced from the apparatus at temperatures lower than typical pyrolysis conversion temperatures.

Converting waste polymers to obtain useful end products via pyrolysis has been a goal sought by many, for many years. Prior art involving pyrolytic decomposition of polymers largely relies on batch, semi-batch or serial batch processes limited in commercially viable application by their operating complexity and inability to continuously process mixed, poorly sorted and/or contaminated polymer waste without fouling. Many claim that serial batch processes comprised of a series of batch reactors progressively operated in a set sequence are “continuous” merely because some product is constantly being discharged from one or more exit ports connected to the batch reactors by a manifold or other suitable exit configuration. Polymer conversion processes include the primary processes of chemical depolymerization, gasification with partial oxidation, and thermal cracking, including pyrolysis, either with or without catalytic cracking and reforming, as well as the secondary process of hydrogenation.

Chemical depolymerization has mainly been limited to decomposition of polyesters e.g. PET, and polyurethanes, with secondary application to polyamides, polycarbonates and polyacetals. This method is generally restricted to decomposition of condensation polymers, targeting monomer yield.

Gasification and partial oxidation of waste polymers typically targets production of mixtures of carbon monoxide and hydrogen generally known as syngas. Although partial oxidation can be a more efficient process than steam methane reformation in terms of reactor size and process rate, partial oxidation produces a lower comparative hydrogen yield. Little, if
5 any, condensable hydrocarbon is produced.

Thermal cracking processes employ thermal decomposition resulting in complex mixtures. Reaction temperature, coupled with molecular retention times within respective desired temperature ranges, is the most significant reaction variable, influencing both polymer conversion and molecular distribution of conversion products. Accordingly, efficient control of
10 reaction temperature and residence times is paramount in importance to maximize yield of the desired product mix. Batch, semi-batch and serial batch processes experience difficulty in efficiently achieving and maintaining control of reaction temperatures and residence times due to problems resulting from, among other things, inefficient heat transfer through the waste polymer as this polymer appears to exhibit poor thermal conductivity. Unlike continuous processes, which
15 achieve a dynamic process equilibrium thereby maintaining control of reaction temperatures and residence times, batch, semi-batch and serial batch processes are continually in a state of disequilibrium, posing chronic control challenges with every process cycle and acute problems of reactor fouling. Other variables, including catalysts, are optimizers; although catalytic cracking and reforming offers advantages of polymer breakdown at lower temperatures and
20 higher rate with added control on product quality, catalytic cracking poses challenges including process complexity, deposition of residues hindering activity, poisoning of catalysts, high capital and operating cost of catalyst reactors, and cost of disposal of spent catalyst.

Hydrogenation is a basic step in petroleum refining and petrochemical production that has been applied to secondary processing of oil resulting from thermal cracking processes. This
25 secondary method, often coupled with distillation, is employed in the production of petroleum-based fuels and process cuts where hydrogen saturation of olefins and removal of heteroatoms is required. The term "heteroatom" is understood to mean any atom that is not carbon or hydrogen, and has been applied to indicate that non-carbon atoms have replaced carbon in the backbone of the molecular structure or replaced hydrogen or alkyl groups bonded to the backbone of the
30 molecular structure. Typical heteroatoms are nitrogen, oxygen, sulfur, phosphorus, chlorine, bromine, fluorine and iodine. Hydrogenation is a secondary process deployed in petroleum

refining and petrochemical production. Hydrogenation is capital intensive, and can have high operating cost attributed to high pressure operation, cost of hydrogen, cost of removing waste heat, and other factors.

Prior art systems and processes have not achieved wide acceptance or success involving
5 pyrolytic decomposition of polymers and this has been attributed to high operating costs, inability to consistently process contaminated waste streams and waste streams of varying composition, the prohibitively high cost or lack of market availability of uncontaminated raw material streams, inability to reliably and efficiently control temperature and pressure process conditions, inability to consistently supply adequate quantities of in-specification raw material to
10 plants requiring high volumes of material to sustain operations, inability to control system fouling by char, terephthalic acid, benzoic acid, minerals, metals and the like, attempts to produce fuel having comparatively narrow ranges of market-driven specifications from widely varying raw material compositions, inability to control heteroatom content of product oil thus limiting market acceptance of the products, inability to consistently and effectively manage
15 safety issues attributed to worker exposure to hazardous vapors and solids in every batch reactor cycle, and generation of hazardous waste including but not limited to char, waste water and off-specification hydrocarbonaceous liquids.

More specifically, prior art involving batch or semi-batch processes must overcome challenges of thermal inefficiency to promote conversion. Given that polymer waste has poor
20 thermal conductivity, most batch reactor systems rely on some configuration of mixing elements within the reactor or complex arrays of raw material-containing cartridges placed into the batch reactor or concentric tubular devices containing raw material subjected to thermal energy or tubular heat transfer geometries deployed within the body of the batch reactor and the like, with the intent to increase raw material surface area, thereby increasing surface exposure to thermal
25 energy which is otherwise poorly conveyed through material having poor thermal conductivity. The large number of batch reactor configurations that have sought patent protection is consistent with a broad-spectrum series of attempts to solve the heat transfer and process control challenges inherent to batch reactor systems. Complex mechanical and/or geometric solutions to the limitations are inherent to batch reactors.

30 Additionally, most if not all batch reactors, whether singly or in series, must be charged with hydrocarbonaceous raw materials, purged of atmospheric air containing oxygen, heated to

the desired temperature when product vapors are extracted, then cooled to a temperature below flash point of the residual solids to facilitate their removal. The repeated thermal cycles experienced by these systems have poor thermal efficiency resulting in overconsumption of energy to complete the polymer conversion.

5 In an embodiment of the batch process, U.S. Pat. No. 8,192,587 to Garrison et al provides limited means of process control. In a batch reactor, all of the chemistries in the batch reactor described by Garrison are decomposed at successive times in the same three-dimensional space. Without the addition of the complex geometric means in Garrison to increase surface area available for heat transfer in a batch reactor by circulating heat transfer fluid through a sealed
10 heating system, temperature control over the internal cross section of the reactor is poor because of poor thermal conductivity and varying material densities in the raw material charge. Such material densities change as conversions occur and mass is removed from the reactor via discharge of vapor. Moreover, poor thermal conductivity of polymer raw materials in a batch reactor, such as in Garrison, even with internal heat transfer fluids deployed results in varying
15 degrees of raw material thermal transfer capacity across the complex cross section of the batch reactor. Additional complexity arises from change in thermal conductivity of the raw material as its composition changes as it decomposes. Further inefficiency in a batch reactor system such as in Garrison results from deposition of heavy oligomer, polynuclear aromatic hydrocarbons, asphaltines and/or char upon the surface of the internal heat transfer system and upon the surface
20 of the reactor body itself, thereby offering an incomplete thermal conductivity solution to promotion of efficient heat transfer. As waste polymer decomposes in place in an unstirred reactor as described by Garrison, deposition of char on the internal surface of the reactor for much of the reactor cycle promotes formation and adsorption of aromatic and polynuclear aromatic hydrocarbons onto the surface of the char. Unless those aromatic and polynuclear
25 aromatic hydrocarbons are removed from the char or unless this adsorption is prevented, disposal of the char created by the batch process can be rendered prohibitively expensive if it is characterized as a hazardous waste. As with all batch reactors, at the end of each process cycle, the char must be removed.

 U.S. Pat. Nos. 5,389,961 5,740,384 to Cha et al describe a continuous, two-step thermal
30 process for co-recycling scrap tires and oils. This prior art processes scrap tire with relatively large amounts of used motor oil, cylinder oil, vacuum tower bottoms and the like Cha describes a

dual-reactor system operated in series whereby a transfer point between the two reactors is required to discharge un-reacted material from the first inclined reactor to the second horizontal reactor. This transfer point results in operational challenges as a result of fouling. Cha describes a cross-sectional shape of the dual-reactor system which provides for an open headspace through which un-reacted tire components, including steel fibers, could move, said open headspace posing a challenge to efficient transport of raw material up the incline of the first reactor. Cha describes operating the inclined reactor at increasing temperature, and operating the horizontal a higher temperature to drive off volatile hydrocarbons from the char.

U.S. Pat. No. 5,836,524 to Wang describes a process that processes solid polymer waste and used lubricating oils or recycled heavy oil in a single continuous step at relatively low temperatures. This prior art employs a continuous process inclined screw having no means for control in rate of temperature ramp and control of residence time. Wang recognizes that process yield is a function of temperature.

U. S. Pat. No. 6,172,275 to Tadauchi et al describes a pyrolysis method and apparatus for decomposing waste plastic which may contain organic chlorine. Tadauchi teaches the use of heating zones for decomposition of plasticizers and for dechlorination of halogenated polymer including polyvinyl chloride (PVC), by which the plasticizers can be decomposed to oil and hydrochloric acid, which can evolve from PVC. Both the oil and the hydrochloric acid are separately recovered. Tadauchi further describes condensation and isolation of wax from lighter molecules which may contain organic chlorine compounds, and further pyrolyzing of that wax fraction to light oil. Tadauchi teaches plasticizer decomposition and hydrochloric acid evolution, noting only that additional decomposition occurs at temperatures at or above 450°C (842°F) to produce a pyrolysis product, which can be light oil dominated by 4-15 carbon atoms. Tadauchi teaches that the material remaining after decomposition of plasticizers and recovery of hydrochloric acid are subjected to a pyrolysis process generally exceeding 450°C (842°F). Tadauchi describes a vacuum to remove hydrochloric acid from the plastic and increasing reactor pressure coincident with pyrolysis to shift molecular distribution toward lighter molecules having 4-15 carbon numbers.

U. S. Pat. No. 7,344,622 to Grispin describes what is called a continuous process wherein control upon the composition of liquids resulting from the thermal decomposition of polymer waste is achieved by maintaining a slow heating rate in the substantial absence of oxygen,

creating a char bed having a thermal gradient. Grispin suggests that the nature of the char bed, reactor size, the amount of raw material charge, heating rate and the substantial exclusion of oxygen are simultaneously related to the composition of the product. The process described by Grispin operates by achieving a controlled single heat ramp for an optimal time period in a reactor targeting a relationship between reactor volume and reactor charge, to impact the composition of the oil formed thereby. Grispin's teaching is for a process for the production of aromatic fractions having 6-12 carbon numbers.

U. S. Pat. No. 7,893,307 to Smith describes a process whereby "hydrocarbon-formable materials, such as plastics and other waste or other recycled materials" are melted in a "viscous shear apparatus" such as an extruder and introduced into a device described as a "ribbonchannel" reactor wherein a cylindrical ribbon of melted plastic having a thin cross-sectional area is advanced and wherein pyrolytic decomposition of the plastic occurs. The intent of this design is to maximize surface area available to heating by exposing the thin body of melted material to a skin temperature far above that which is necessary to promote polymer decomposition, thus imparting a high thermal gradient to the material in the reactor. The temperature of melt exiting the viscous shear apparatus and entering the ribbonchannel reactor is claimed to range from about 238°C (460°F) to about 315°C (600°F). In the Smith process, effective dechlorination, if any, occurs between about 300°C (572°F) to about 365°C (690°F). Smith further discloses that residual material is discharged from the ribbonchannel reactor in a temperature range from about 524°C (975°F) to about 538°C (1000°F). To achieve decomposition in the ribbonchannel reactor, the skin temperature / heating element temperature of the ribbon channel reactor ranges from about 760°C (1400°F) to about 1315°C (2400°F) in an effort to efficiently heat the thin cross section of material filling the ribbon channel by maintaining a high temperature differential between the reactor skin and internal reactor temperature. This heating results in internal ribbonchannel reactor temperatures increasing from 338°C (640°F) – 368°C (694°F) up to 393°C (740°F) - 524°C (975°F) where pyrolytic decomposition is achieved, optionally in the presence of a melt-phase catalyst. Char material, dirt, and small pieces of metal are discharged at the end of the process about 524°C (975°F) to about 538°C (1000°F). Smith's teaching is to a process throughput of 3,000 to 10,000 pounds per hour, and focuses on the geometry of the ribbonchannel reactor to optimize rapid heat transfer. The extruder and ribbonchannel reactor cannot accept particles larger than the clearance between the extruder screw and barrel, or the

effective distance between the inner diameter of the outer heated cylinder and the outer diameter of the inner heated cylinder, whichever is smaller. In the exemplary case of rubber, Smith articulated far smaller particle sizes including crumb. Smith focuses only on providing a solution to effective heat transfer.

5

SUMMARY OF THE INVENTION

An apparatus and method of operation for continuous conversion of hydrocarbonaceous materials to condensable, non-condensable and solid hydrocarbon products, comprising an improved zone-delineated pyrolysis apparatus incorporating shear force in addition to heat in its first stage, plus a baffled, large volume and continuous process thermal kiln reactor in its second stage, means for transporting hydrocarbonaceous materials through the apparatus by an improved, zone-delineated extruder in its first stage and by advancing hydrocarbonaceous material in a zone-delineated thermal kiln reactor in its second stage, means for feeding and heating said hydrocarbonaceous materials whereby they are processed and pyrolyzed to produce vapor and solid products, wherein said screw means extends substantially the length of the first stage extruder and wherein said means of advancing hydrocarbonaceous material in the thermal kiln reactor extends substantially the length of the second stage thermal kiln, means for removing vapor products from said processed hydrocarbonaceous materials, means for removing solid products from said processed hydrocarbonaceous materials, means whereby said hydrocarbonaceous material is maintained within zones for a range of respective, defined residence times, means for rotating said extruder screw which has a plurality of flight configurations for feeding, compressing and dewatering, melting said hydrocarbonaceous materials to convert them from a solid to a liquid, for mixing, destabilizing and dehalogenating said hydrocarbonaceous materials, means for rotating said thermal kiln reactor, which has a plurality of internal flighting, baffle, blade and/or lifter configurations for further destabilizing said hydrocarbonaceous materials, for pyrolyzing said hydrocarbonaceous materials, for devolatilizing the pyrolyzed hydrocarbonaceous materials, for discharging produced vapors as well as recovery of condensable, non-condensable and solid hydrocarbon products.

In its first stage, the present invention comprises one or more parallel extruders capable of accepting hydrocarbonaceous material. Upon introduction into the extruder, the polymer waste is subjected to compression, dewatering, shearing, melting, destabilizing and

dehalogenating prior to direct injection of dehalogenated and partially destabilized/decomposed hydrocarbonaceous melt into the second stage. The first stage is directly coupled to the second stage.

5 The second stage of the present invention comprises one or more counter-rotating thermal kiln reactors each having at least two chambers separated by an annular baffle dam, with each chamber operated at a different temperature. The hydrocarbonaceous material accumulates and continually destabilizes for a design-controlled residence time in the first chamber of the second stage prior to eventual passive discharge through a central opening in the baffle dam to the second chamber of the second stage. Important molecular cracking occurs in the later zone of the first chamber and the earlier zone of the second chamber. Final pyrolysis occurs in this second 10 chamber of the second stage, and solid char residue is discharged from an end plate assembly at the termination of said second chamber.

The present invention provides for efficient conversion of widely variable raw material streams, highly contaminated raw material streams, and raw material streams having inconsistent 15 compositions over time into condensable, non-condensable and solid hydrocarbon products having superior quality over products produced by pyrolysis systems described in the prior art.

BRIEF DESCRIPTION OF THE DRAWINGS

20 The foregoing and other features and advantages of the present invention will become apparent to those skilled in the art to which the present invention relates upon reading the following description with reference to the accompanying drawings, in which:

FIG 1 is a schematic side view of a two-stage, zone-delineated continuous process pyrolysis apparatus in accordance with the present invention.

25 FIG 2 is a schematic view of the first stage of the zone-delineated continuous process pyrolysis apparatus in accordance with the present invention.

FIG 3 is a schematic view of the second stage of the zone-delineated continuous process pyrolysis apparatus in accordance with the present invention.

30

FIG 4 is a schematic side view of a step-down condenser array and its deployment downstream of a dual stage, zone-delineated pyrolysis apparatus in accordance with the present invention.

5 DETAILED DESCRIPTION OF THE INVENTION

The present invention is a dual stage, zone-delineated continuous pyrolysis apparatus for continuous conversion of hydrocarbonaceous material in successive process environments. The present invention, one embodiment of which is illustrated in FIG 1, comprises an improved zone-delineated apparatus **10** incorporating shear force in addition to heat, with integral and progressive additive introduction, steam removal and halogen acid removal in its first stage **20**, plus a baffled, large volume and continuous process thermal kiln reactor in its second stage **30**. The apparatus of the present invention and the method of operation for continuous conversion hydrocarbonaceous materials to condensable, non-condensable and solid hydrocarbon products have capability to simultaneously discharge end products both before and after an integral series of step-down condensers. It operates in a continuous manner. The present invention is sufficiently robust to accept shredded polymer waste including fractions of thermoset plastics that do not generally decompose to yield oil. Moreover, it is a modular and scalable pyrolysis apparatus capable of continually converting polymer waste and low-value or contaminated polymers to synthetic petroleum and a variety of its fractions, including but not limited to, light sweet crude oil, fuel additives, base oil, slack wax, paraffin wax, microcrystalline wax and condensate dominated by aromatic petroleum hydrocarbons. The non-condensable hydrocarbon product is a gas. The solid hydrocarbon product is a finely divided carbon char which may or may not contain non-polymer solids if such non-polymer solids are present in the raw material prior to its decomposition.

The present invention has the flexibility to allow, with optional capacity to produce and separately discharge, a primary microcrystalline or paraffin wax product having, collectively, 30-70 carbon atoms via direct discharge from the apparatus, in a preferred embodiment, at the end of the fourth of seven continuously operated, series-oriented process zones, hereinafter referred to as Zones. These Zones are the Raw Material Feed Zone or Zone 1 **401**, the Compression Zone or Zone 2 **402**, the Melt Zone or Zone 3 **403**, the Mixing, Molecular Destabilization and Heteroatom Scavenging Zone or Zone 4 **404**, the Pyrolysis Zone or Zone 5 **405**, the

Devolatilization Zone or Zone 6 **406**, and the Char Discharge Zone or Zone 7 **407**. Specifically, this discharge of microcrystalline or paraffin wax product occurs after the Mixing, Molecular Destabilization and Heteroatom Scavenging Zone 4 **404**, within a temperature range of 300°C to 338°C (572°F to 690°F), a temperature threshold not previously identified from which consistent

5 yield of microcrystalline or paraffin wax product could be achieved. Further, in a preferred embodiment, it allows additional and simultaneous capacity to produce one or more additional, lighter fractions collectively having 4-30 carbon numbers recovered from separate discharge ports located in the fifth and sixth continuously operated, series-oriented process Zones, namely, the Pyrolysis Zone 5 **405** and the Char and Residual Solids Devolatilization Zone 6 **406**,

10 respectively, via subsequent recovery of pyrolysis vapor in a series of step-down condensers, with optional demisters in plurality with respective condensers when very highly efficient separation is required, operating at progressively colder operating temperature ranges. The apparatus requires no deployment of catalyst reactors and/or reflux reactors and/or fractionation columns, although the modularity and scalability of the apparatus of this invention provides

15 opportunity for optional deployment of those additional devices when, for example, production of only light oil, diesel additive or gasoline additive is desired.

Raw material feed to first stage **20** of apparatus **10** can be a combination of mixed and/or varying solids. Varying proportions of petroleum-based liquids, if any as may be desired, can be injected into the first stage **20** and/or into the second stage **30**, so long as the rate of injection of

20 the liquid does not overtax the heating capacity of the second stage **30**. As used herein “petroleum-based liquids” and “hydrocarbon liquids” will be used interchangeably and is meant to include used oil, waste oil, gasoil, refinery bottoms, cylinder oil, and the like. The process control provides for efficient conversion of widely variable raw material streams, highly contaminated raw material streams, and raw material streams having inconsistent compositions

25 over time.

The apparatus of the present invention is modular and scalable in all aspects. For example, in an embodiment of the present invention as contemplated in FIG 1 and FIG 3, the number of parallel extruders **201** in first stage **20** of the present invention is a modular and scalable component of apparatus **10**, providing opportunity to introduce and co-process multiple

30 hydrocarbonaceous raw material feeds in a single system, each respective raw material feed

introduced to and comingled in second stage **30** at potentially unequal rates, such rates which can be purposefully controlled and varied with respect to each other over time as may be desired.

Zone-delineated process control provides for efficient conversion of widely variable raw material streams, highly contaminated raw material streams, and raw material streams having inconsistent compositions over time. Clean, uncontaminated raw material feed streams are not required. Even contamination of the polymer waste by pesticides, herbicides, petroleum products, pharmaceuticals and the like is well tolerated. Certain characteristic and listed hazardous wastes can constitute or be included as a component of the hydrocarbonaceous raw material if the apparatus is operated pursuant to an EPA Permit to Operate a Hazardous Waste Storage, Treatment, and Disposal Facility.

The present invention provides improved zone-delineated conversion by continuous raw material feed through a staged apparatus **10** having progressive shear to non-shear environments as well as a progressive series of temperature ramps and soaks, one embodiment of which is illustrated in FIG 1. The first stage **20** and second stage **30** operate in a continuous manner whereby hydrocarbonaceous material **100** is fed into the first stage **20**, then partially processed hydrocarbonaceous material is continuously discharged from first stage **20** to second stage **30**, from which synthetic petroleum and a variety of its fractions including, but not limited to, light sweet crude oil, fuel additives, base oil, slack wax, paraffin wax, microcrystalline wax and condensate dominated by aromatic petroleum hydrocarbons are discharged to condensers **80**. The non-condensable hydrocarbon product is a gas. The solid hydrocarbon product is a finely divided carbon char plus recyclable metals and/or aggregates. This solid hydrocarbon product will also be described herein as “solid residue” or “solid products.”

Many of the waxes discussed herein exit the thermal kiln reactor in a liquid phase, but tend to cool to a solid or slow-flowing liquid once collected. For this reason and for purposes of consistency and for purposes of this invention, wax and waxes, regardless of where they are recovered in the process, will be treated as solids, solid products, and/or solid residue(s), unless specifically indicated otherwise.

Some or all of apparatus **10** may be deployed in an angled configuration **40**. The entire apparatus **10** may be so angled, but the thermal kiln reactor **301** is the only component that requires this angled arrangement. In other words, in other embodiments the extruder **201** and other components may be horizontal, alternatively connected to a pitched or sloped thermal kiln

reactor **301**. In the embodiment of the present invention illustrated in FIG 1, FIG 2 and FIG 3, the apparatus **10** is angled with a negative incline or slope, i.e. declining, with respect to the horizon **50**, such that the entrance end of the thermal kiln reactor **301** is at a higher elevation than the exit end, allowing the force of gravity to assist in the transport of partially decomposed hydrocarbonaceous material through declining thermal kiln reactor **301** when the internal components of thermal kiln reactor **301** are configured to promote transport in concert with the force of gravity. The negative incline **40** can be between about 1° and about 20° off of horizontal **50**, with the preferred negative incline being about 1.5° to about 6° off of horizontal **50**. Alternatively, apparatus **10** or thermal kiln reactor **30** can also be oriented or pitched in the opposite or positive inclining direction when the internal components of thermal kiln reactor **301** are configured to physically advance the hydrocarbonaceous material, thereby overcoming the force of gravity, via rotation of the thermal kiln reactor **301**. The positive incline **40** can be between about 1° and about 20° off of horizontal **50**, with the preferred positive incline being about 1.5° to about 6° off of horizontal **50**. This gives a possible range of between about -20° (decline) to about +20° (incline) with respect to the horizon **50**.

Apparatus **10** is operated such that as the hydrocarbonaceous material and the products of decomposition are advanced through and subsequently discharged from the apparatus, the hydrocarbonaceous material passes through a series of successive process environments, also hereinafter referred to as Zones. An optimum product mix is achieved by determining and establishing a variety of progressive temperature zones to affect optimal temperature ramps, and by varying the internal design of extruder **201** and thermal kiln reactor **301** thereby controlling residence time within each respective temperature zone. This creates a plurality of temperature ramps and retention times (soaks) resulting in the apparatus of the present invention, which operates as a continuous process, having the thermal efficiency advantage of Zone-delineated conversion.

Shredded polymer waste **100**, which may or may not be contaminated by non-polymer fractions, is continuously introduced to first stage **20** of apparatus **10**. For this purpose, in addition to thermoplastic and thermoset plastics (“plastic”), “polymer waste” can include elastomers (or “waste elastomers”) such as scrap tires, rubber residue, rubber belting, EPDM rubber sheet, membrane or extrudate, and the like. Mineral-based additives and/or melt-phase catalyst can also be added, if desired and at appropriate proportions to facilitate desired chemical

reactions, to the extruder **201** at the beginning of the zonal sequence **401** (Zone 1). In addition, varying proportions of petroleum-based liquids, if any as may be desired, can be injected into port **206** in extruder **201** and/or into port **320** in thermal kiln reactor **301**, so long as the rate of injection of the liquid does not overtax the heating capacity of the second stage **30**.

5 As the raw material charge is advanced through the apparatus **10**, phase change occurs as it is progressively compressed or otherwise experiences reduction in volume in Zone 2 **402** to expel entrained atmospheric air and heated via a temperature ramp or gradient until entrained moisture in the polymer waste boils, resulting in steam formation, and subsequent melting in Zone 3 **403**. The melt is then heated in another thermal ramp and advanced through a mixing,
10 molecular destabilization and heteroatom scavenging zone (Zone 4) **404** of controlled maximum temperature in the reactor. Mixing of the melt in this zone (Zone 4) **404** over a controlled residence time and temperature results in molecular destabilization, decomposition of cellulose to char and additional steam, decomposition of a number of plasticizers and organic additives to
15 complete reduction of the organic halogens chlorine and bromine, partial reduction of the organic halogen fluorine, and near complete reduction of terephthalic acid to benzoic acid and benzoic acid to benzene. Hard wax product can be discharged from Zone 4 **404** at its termination and transition to Zone 5 **405**. Remaining melt which has not been discharged directly from the thermal kiln reactor at the termination of Zone 4 **404** to recover hard wax is subsequently
20 advanced through yet another thermal ramp to a zone (Zone 5) **405** in which the majority of pyrolysis occurs. This pyrolysis occurs over a residence time optimized per category of raw material to be decomposed. Advancing the remaining mass through a Zone 5 **405** environment of controlled maximum temperature and adequate residence time results in pyrolysis products of optimum yield and composition. As the remaining mass exits the pyrolysis zone **405**, it
25 experiences yet another thermal ramp at the introduction to Zone 6 **406**, thereby promoting devolatilization of the char and coking of residual aromatic hydrocarbons and polynuclear aromatic hydrocarbons over adequate residence time. Accordingly, after the residual solid moves from Zone 6 **406** to Zone 7 **407**, it is continuously discharged from Zone 7 **407** as dry and friable, finely divided, residual solid material, which is not saturated with adsorbed aromatic and
30 polynuclear aromatic hydrocarbons. These remaining solids are continuously removed from the apparatus as char which may contain entrained metals (precious and/or nonprecious), glass,

stones and the like if these contaminants are present in the raw material feed. Stated another way, “char” is carbon residue and residual solids other than carbon remaining from the decomposition of hydrocarbonaceous material.

In a variety of embodiments, extruder **201** and thermal kiln reactor **301** are designed to
5 promote transport, mixing and reaction of a wide variety of raw hydrocarbonaceous materials. Thermal kiln reactor **301** can optionally include means to discharge paraffin or microcrystalline wax from thermal kiln reactor **301** at the termination of Zone 4 **404**. Condensable hydrocarbons are discharged from discharge port **323** located in Zone 5 **405**. Residual solid char is discharged from exit **319** in Zone 7 **407**. Internal design configurations of extruder **201** and thermal kiln
10 reactor **301** are coupled with a plurality of temperature zones and respective residence times. As this is a single piece of equipment, operated in a continuous process, there may not necessarily be clear demarcations between Zones, such that one Zone might incidentally transition or overlap with the succeeding Zone.

The Zones are generally defined and/or delineated by the geometry of the screw in
15 extruder **201**, as well as the geometry and positioning of internal components of thermal kiln reactor **301** to establish desired respective Zonal residence times coupled with the respective operating temperature maintained in that Zone for each desired rate of process throughput. Design of a continuous process, Zone-delineated conversion apparatus is conducted to allow for construction of that apparatus having adequate but not unnecessary lengths at its respective
20 diameters to promote adequate heat transfer to the hydrocarbonaceous material over the appropriate residence time in each Zone, thereby accomplishing the desired chemical reactions over required residence times to desired magnitudes of completion for the desired overall rate of process throughput. Preferably, continuous process components are designed in context of an interactive thermal and kinetic model incorporating variables including, among other things,
25 reactor orientation, reactor length, reactor diameter, materials of reactor construction, extruder screw design, kiln internal components design, hydrocarbonaceous material throughput rate, density and thermal conductivity, kinetic viscosity, Zonal retention time, Zone pressure, inter-Zonal temperature ramp, etc. That model must have the capacity to forecast the outcome of operating the present invention to decompose any raw material composition which may be
30 encountered with a desired or tolerable outcome. In the absence of such a model, an optimal

geometry may or may not be derived from trial and error which can, especially in this context, have undesired or even catastrophic results.

Any embodiment of the present invention having process zones beginning with raw material introduction into the system (Zone 1 **401**), then proceeding with volume reduction and/or compression (Zone 2 **402**), the proceeding with raw material phase change to melt (Zone 3 **403**), then proceeding with decomposition of certain plasticizers and additives as well as evolution of hydrochloric acid, among other things, concurrent and/or subsequent molecular destabilization (Zone 4 **404**), then proceeding with pyrolytic decomposition (Zone 5 **405**), then proceeding with char devolatilization and/or coking (Zone 6 **406**), and ending with discharge of solid product (Zone 7 **407**) can be deployed to accomplish conversion of polymer waste in any configuration over a wide variety of scalabilities to accommodate all economically viable throughput solutions. The system embodied by the present invention is modular, scalable and versatile, being adaptable to applications having varied raw material compositions and desired throughput rates. Examples of the present invention's versatility include application of a Zone-delineated process to any system configuration. Note that while some but not all of the preferred embodiments of this invention are described in the following detailed descriptions of the invention, a variety of modifications and changes within the spirit of the invention will become evident to persons skilled in the art from disclosures made in the preceding and following detailed descriptions. Accordingly, the preceding and following descriptions are not limitative of the present invention.

It should be noted that in this application, the terms "thermal kiln reactor", "reactor", "retort" and "apparatus" are frequently used in similar context or interchangeably. In all cases, unless noted otherwise, these terms refer to the present invention.

The present invention, one embodiment of which is illustrated in FIG 1, comprises an improved zone-delineated apparatus **10** incorporating shear force in addition to heat, with integral and progressive additive introduction, steam removal and halogen acid removal in its first stage **20**, plus a baffled, large volume and continuous process thermal kiln reactor in its second stage **30**.

In either the inclining or declining embodiment, in its first stage **20**, the present invention comprises one or more extruders **201** each comprised of motor **208** and gear reduction assembly **209** with heated screw and barrel assembly **210** supported by frame **211**. In cases when only one

hydrocarbonaceous material stream is to be processed, or when multiple hydrocarbonaceous material streams having sufficiently similar physical and chemical properties are to be co-processed, a single extruder **201** can be employed in the preferred embodiment. However, in cases where two or more highly dissimilar hydrocarbonaceous material streams are to be co-processed in a single thermal kiln reactor, the preferred embodiment may utilize two or more extruders **201**. In embodiments including more than one extruder, extruders **201** are connected in parallel, as opposed to sequentially or in series. This parallel arrangement of two or more extruders **201** has three primary advantages. First, it increases the amount of raw material that can be processed and fed into the system. Second, it allows for redundancy such that if one extruder **201** is down for maintenance, the system can still operate using the remaining extruder **201**, albeit at half its intended total system operational capacity. Third, it provides flexibility by allowing simultaneous introduction of two completely different raw material streams into the reactor.

Extruders **201** are capable of accepting common or differing blends of hydrocarbonaceous raw material. This raw material is dominated by shredded polymers, including mixed and/or contaminated polymers. When additives or melt-phase catalysts are desired in the process, some or all of these can be added to the hydrocarbonaceous material prior to introduction of the hydrocarbonaceous material to extruder **201**. The raw materials are subsequently compressed, sheared, melted, partially destabilized, desulfurized, and dehalogenated prior to direct injection of the dehalogenated, partially destabilized and partially decomposed hydrocarbonaceous melt into the second stage **30**. Extruders **201** can accept and discharge respective differing blends of hydrocarbonaceous materials at different throughput rates, thereby providing process flexibility previously not experienced in the prior art. Common extruder dimensions, often described as the L/D ratio or the ratio of barrel length to barrel diameter, normally deployed in industry for most applications range from 15 to 35. The L/D ratio for extruder **201** is higher. Largely depending upon the desired feed rate and the effective rate of heat transfer to the hydrocarbonaceous material, the L/D ratio for extruder **201** is between 35 and 75.

Shredded hydrocarbonaceous material is introduced into extruder **201** at feed opening **202**. The extruder screw and barrel in feed Zone 1 **401** is designed for the purpose of accepting shredded hydrocarbonaceous materials and transporting the hydrocarbonaceous materials to

subsequent Zone 2 **402** for compression. For purposes of describing the present invention, the ratio of depth of Zone 1 flights to Zone 4 flights is called the screw compression ratio. Extruder **201** has a compression ratio ranging from about 1.5:1 to 2.0:1 at the feed end to about 4:1 to 5:1 at the discharge end. Accordingly, design of the screw and barrel assembly in Zone 1 **401** of
5 extruder **201** incorporates a compression ratio between 1.5 and 2.2.

Optionally, when staged addition of additives and/or melt-phase catalysts is desired, these finely divided additives and/or melt-phase catalyst can be introduced to additive opening **203**. These mineral-based additives are selected from one or more melt-phase heteroatom scavengers identified as the group consisting of alkali metals, alkaline earth metals, transition metals, post-
10 transition metals and/or metalloids in a variety of forms. Melt-phase catalysts include but are not limited to oxides, hydroxides and/or carbides of the group consisting of alkali metals, alkaline earth metals, transition metals, post-transition metals, metalloids, non-metals and/or naturally-occurring & synthetic silicate minerals.

The extruder screw and barrel in Zone 2 **402** is designed for the purpose of compressing
15 the shredded hydrocarbonaceous materials, heating the hydrocarbonaceous materials to a temperature sufficient to dehydrate the contents of Zone 2 **402**, evacuating steam at steam port **204**, and transporting the hydrocarbonaceous materials to subsequent Zone 3 **403** for melting. Accordingly, design of the screw and barrel assembly in Zone 2 **402** of extruder **201** incorporates a compression ratio between 2.0 and 3.8. As the hydrocarbonaceous material is heated and
20 compressed in a first temperature gradient, or thermal ramp, steam which evolves from dehydration of the hydrocarbonaceous material is discharged at the termination of Zone 2 **402** from steam port **204**. At the termination of Zone 2 **402** within extruder **201**, compression is relieved to materially decrease pressure via increase in the distance between the interior wall of the barrel and the root (shaft) of the screw, such that volatile steam can escape extruder **201** from
25 steam port **204**, but hydrocarbonaceous material will remain in extruder **201**. Depending upon the nature of the hydrocarbonaceous material to be processed, the compression ratio beneath steam port **204** can be reduced to 1.0:1 to 2.0:1 or lower.

Downstream of steam port **204**, the hydrocarbonaceous material is further compressed and heated in another thermal ramp under shear stress, promoting melting. The extruder screw
30 and barrel in Zone 3 **403** is designed for the purpose of melting hydrocarbonaceous materials under shear stress and direct heating, and to advance the hydrocarbonaceous materials to

succeeding Zone 4 **404**. Accordingly, design of the screw and barrel assembly in Zone 3 **403** of extruder **201** incorporates a compression ratio between 3.5 and 5.0. This shear stress is created by the interaction of the screw flighting in the extruders **201**, the walls of the extruder **201** and viscosity of the molten hydrocarbonaceous material resulting in smearing and mixing of the hydrocarbonaceous material. Downstream of Zone 3 **403**, the hydrocarbonaceous material is further heated in another thermal ramp under shear stress, promoting highly efficient dehalogenation of the hydrocarbonaceous material. This dehalogenation results in the *in situ* formation of halogen acids and salts. These salts remain as a component of the hydrocarbonaceous material and are identified as melt-phase cracking catalysts, as are the halogen acids, which are created by operation of the extruder **201**. The extruder screw and barrel in Zone 4 **404** is designed for the purpose of mixing, destabilizing and dehalogenating the hydrocarbonaceous materials, evacuating halogen acids at halogen exit port **205**, and transporting the hydrocarbonaceous materials to the continuation of Zone 4 **404** in the thermal kiln reactor for further molecular destabilization. Accordingly, design of the screw and barrel assembly in Zone 4 **404** of extruder **201** incorporates a compression ratio between 4.0 and 5.0.

Halogen acids are removed in their respective vapor phases from halogen exit port **205**, as are the first commercially important petroleum hydrocarbon vapors that are produced by the apparatus from decomposition of certain plasticizers and additives. At the end of that portion of Zone 4 **404** in extruder **201**, compression is relieved to materially decrease pressure via increase in the distance between the interior wall of the barrel and the root of the screw, such that halogen acids and hydrocarbon vapors can escape extruder **201** from halogen exit port **205**, but melted hydrocarbonaceous material will remain in extruder **201**. Depending upon the nature of the hydrocarbonaceous material to be processed, the compression ratio beneath halogen exit port **205** can be reduced to 1.0:1 to 2.0:1 or lower.

Subsequently, the partially destabilized/decomposed and dehalogenated hydrocarbonaceous material is advanced in yet another thermal ramp under secondary shear stress, after which point additional additives, including but not limited to additional finely divided solids and/or hydrocarbon-based liquids, may optionally be added through injection port **206**. In the preferred embodiment, any additional finely-divided solids are introduced to extruder **201** in the form of a heated slurry comprised of the finely-divided solids suspended in

petroleum-based liquids having a boiling point greater than 690°F, more or less, such as asphalt and the like.

The first stage **20** is directly coupled to the second stage **30**, such that the dehalogenated and partially destabilized/decomposed hydrocarbonaceous material is discharged directly from one or more connecting ports **207** to second stage **30**. Connecting port(s) **207** are heated by electrical heaters or any other means standard in the industry to a temperature matching the Zone 4 operating temperature maintained in respective portions of extruder **201** and thermal kiln reactor **301** operated within Zone 4

In either the inclining or declining embodiment, in its second stage **30**, the present invention comprises one or more rotating thermal kiln reactors **301** each having at least two adjoining chambers, **302**, **303** operated at different temperatures, separated by an annular baffle dam **304**. Thermal kiln reactor **301** is rotated via robust gear drive powered by motor and gear drive **314**. Mixing and material advancement can be accomplished via internal screw flighting and/or baffles and/or mixing blades and/or lifters or any combination of these devices, collectively, mixing means **309**, which is attached to the internal surface of thermal kiln reactor **301**. In applications requiring an amount of mixing which cannot be realized from a thermal kiln reactor **301** not having a counter-rotating shaft with integral mixing means, thermal kiln reactor **301** can include an optional counter-rotating shaft **310** driven by motor **324** and running the length of the thermal kiln reactor **301** along its axis. Shaft **310** turns optional internal mixing blades **311** which are affixed to shaft **310**. Bearing/end plate assembly **315** is stationary and holds the thermal kiln reactor **301** in place, allowing the thermal kiln reactor **301** to rotate, as well as allowing for introduction of liquid to thermal kiln reactor **301** at auxiliary injection port **320** integral to end plate **315**. Bearing/end plate assembly **316** is stationary and holds the thermal kiln reactor **301** in place, allowing the thermal kiln reactor **301** to rotate, as well as allowing for continuous removal of vapor and char resulting from pyrolysis.

Baffle dam **304** is a cylindrical disc or plate with a central opening **305**. Baffle dam **304** separates the first chamber **302** from the second chamber **303** of the thermal kiln reactor **301** and allows for the passage of optional shaft **310**, when deployed, through baffle dam opening **305**. Opening **305** allows hydrocarbonaceous material from the first chamber **302** to pass into the second chamber **303**. The size of the opening **305** in baffle dam **304** in relation to operating feed rate through connecting port **207** dictates the maximum melt level that can be achieved in the

first chamber **302** without creating a condition of rapidly increasing pressure. Design of apparatus **10** to allow for higher raw material throughput rates minimizing potential for pressure build-up in first chamber **302** will incorporate a larger opening **305** in baffle dam **304** such that the opening **305** in baffle dam **304** does not provide flow restriction. Design of apparatus **10** to allow for lower raw material throughput rates still minimizing potential for pressure build-up in first chamber **302** can optionally incorporate a smaller opening **305** in baffle dam **304**, but the optional design feature of a smaller opening **305** is not necessarily required for raw material flow rates lower than design capacity of opening **305** in baffle dam **304** to allow unrestricted flow. Accordingly, if the option of a smaller opening **305** is not chosen in equipment design, the melt level in first chamber **302** cannot be maintained at the correspondingly higher level that would be experienced if the option of smaller opening **305** were chosen. For applications where increased pressure in first chamber **302** is desired and thermal kiln reactor **301** is constructed in such a way as to tolerate increased pressure in its interior, opening **305** would be sized to create the desired magnitude of restriction to melt flow passing through the opening **305**.

Management of melt level in first chamber **302** requires balance between (i) pressure maintenance in first chamber **302** and (ii) feed rate of hydrocarbonaceous material through connecting port **207** to first chamber **302** and (iii) the viscosity of the melt in first chamber **302**, all of which are to be considered in designing the size of opening **305** in baffle dam **304**. Desired pressure control can be achieved by use of pressure control devices common in the industry. In the preferred embodiment, positioning of the pressure control device (not shown) is near auxiliary injection port **320** at the top of the end plate **315** integral to connecting port **207**. Control of feed rate of hydrocarbonaceous material through connecting port **207** to first chamber **302** is accomplished by managing the feed rate to extruder(s) **201**. Mitigation of melt viscosity can be achieved by injection of petroleum-based liquid at injection port **206** and/or auxiliary injection port **320**. Greater reduction in melt viscosity is achieved by adding correspondingly larger amounts of petroleum-based liquid, although the addition of modest amounts of petroleum-based oil often results in material decrease in melt viscosity, especially if injected at injection port **206**. Oil injection at injection port **206** will primarily result in reduction of melt viscosity, and secondarily result in expansion of melt passing through connecting port **207** with corresponding pressure increase in connecting port **207**. If the melt level is higher than the top of the opening **305** in baffle dam **304**, oil injection at auxiliary injection port **320** can

be anticipated to primarily result in acute, rapid pressure increase in first chamber **302** and secondarily result in modest decrease in melt viscosity in first chamber **302**. Such result is exacerbated if refinery overheads or similarly light petroleum fractions are injected, and mitigated if petroleum-based liquids having a boiling point greater than 690°F, more or less, are injected. If the melt level is lower than the top of opening **305** in baffle dam **304**, oil injection at auxiliary port **320** can, depending upon the boiling point of the injected liquid, primarily result in mitigated yet acute and rapid pressure increase in thermal kiln reactor **301** with corresponding increase in vapor throughput velocity in downstream catalyst reactors and/or reflux reactors and/or fractionation columns (collectively, not shown), as well as condensers **80**. A secondary result of this liquid injection can be modest decrease in melt viscosity in first chamber **302**. Size design of opening **305** in baffle dam **304** must allow for reduction in cross sectional area of the opening **305** due to the passing of optional shaft **310**, when deployed, through opening **305** in baffle dam **304**.

The rotating thermal kiln reactor **301** is continuously fed hydrocarbonaceous melt through connecting port **207**. The thermal kiln reactor **301** is heated either electrically or via direct combustion of non-condensable process gas and/or natural gas in two zones, or a combination thereof. The heating means is not critical, and can include direct-fired gas heating, electric heating elements, radiant heating, and thermal jacketing using heat transfer media known to the industry, including but not limited to, Dowtherm[®], molten lead, molten salt, molten sodium, and the like as may be appropriate for the respective zone temperature. FIG 3 depicts an embodiment of the present invention incorporating the option of direct gas-fired heating of a first heating zone **312** corresponding to the first chamber **302** and a second heating zone **313** corresponding to the second chamber **303**. Each of these heating zones is a jacket that surrounds the thermal kiln reactor **301** and heats its section respectively, via operation of gas burner array **306**. Gas burner array **306** can be fired by non-condensable product gas recovered from gas discharge port **830** (FIG 4), natural gas, or a blend of non-condensable product gas and natural gas introduced to one or more burner port(s) **307** and/or **308** as shown on the embodiment illustrated on FIG 3. Two separate burner ports are not critical, as a single burner port could be used to introduce both gas streams.

The contents of the thermal kiln reactor can be mixed using one or more mixing means. One of these mixing means, comprised of screw flighting and/or baffles and/or mixing blades

and/or lifters or any combination of these devices, collectively **309**, is connected to the inner surface of the thermal kiln reactor **301**. This first means can be augmented by an optional counter-rotating mixer within thermal kiln reactor **301**. The counter-rotating mixer operates in the opposite direction to achieve the counter-mixing. In a preferred embodiment for applications requiring an amount of mixing which cannot be realized from a thermal kiln reactor **301** not having a counter-rotating shaft with integral mixing means **309**, screw flighting, baffles, blades and/or lifters comprising mixing means **309** must be slotted to allow passage of blades **311** which rotate in the opposite direction. When counter-rotating shaft **310** and blades **311** are deployed, mixing means **309** must have slots which are appropriately spaced to avoid contact between mixing means **309** and **311**.

Mixing of the melted hydrocarbonaceous material in first chamber **302** over a controlled residence time and temperature results in additional molecular destabilization, near complete reduction of organic halogens, and near complete reduction of terephthalic acid to benzoic acid and benzoic acid to benzene. Continuous introduction of dehalogenated and partially destabilized/decomposed hydro-carbonaceous material through connecting port **207** to first chamber **302** results in a dynamic equilibrium of accumulation and mixing of hydrocarbonaceous material over a design-controlled and specified residence time in first chamber **302** with continuous passive discharge of hydrocarbonaceous material through central opening **305** in baffle dam **304** to the second chamber **303** of second stage **30**. The diameter of opening **305** in baffle dam **304** dictates the height of the spill point across which the hydrocarbonaceous material is advanced to second chamber **303** of second stage **30**. Counter-mixing of the contents of the thermal kiln reactor, although a complex and costly embodiment, provides additional surface area within the thermal kiln reactor to promote heat transfer as well as the most thorough mixing. Optional counter-rotating mixing via **309** and **311** can be operated at the same or different relative speeds.

Melt-phase transition from residence in first chamber **302** to second chamber **303** coincides with the point of a thermal ramp, as final pyrolysis occurs in the second chamber **303** of the second stage **30**. This pyrolysis occurs over a residence time optimized per category of raw material to be decomposed. Solid char residue accumulates at the bottom of bearing/end plate assembly **316** and is discharged from second chamber **303** through thermal kiln reactor port **317** to a heated devolatilization chamber **318**. Devolatilization chamber **318** subsequently

discharges the devolatilized char through char port **319** to a downstream char cooling system (not shown). Other embodiments (not shown) include removal of the char from the thermal kiln reactor **301** using screws to move the char to an exit at the central axis. Still other embodiments (not shown) include a channel at the lowest, terminal end, about the circumference of the thermal
5 kiln reactor **301** that directs the char into exit ports.

Optional addition of hydrocarbon-based liquids may be accomplished for purposes including but not limited to desire to consume liquid hydrocarbonaceous material, desire to reduce melt viscosity and the like. Liquid can be introduced through injection port **206** and/or through one or more auxiliary injection ports **320**. Similarly, water and/or steam sourced from
10 steam removal port **204** and/or elsewhere may optionally be injected through one or more injection ports **206** and/or **320** in the interest of promoting the water-gas shift reaction. Optional addition of methane and/or non-condensable hydrocarbons taken as a fraction of non-condensable gases exiting a downstream condenser train can also be introduced through one or more additional auxiliary injection ports **320** to serve as carrier gas to transport hydrocarbon
15 vapors from thermal kiln reactor **301** to vapor exit **323** and/or provide optional pressurization of the interior of thermal kiln reactor **301**.

The present improved zone-delineated apparatus has capability to simultaneously produce multiple products, one of which, a hard wax, is produced from the apparatus at temperatures lower than typical pyrolysis conversion temperatures. This microcrystalline or
20 paraffin wax product having, collectively, 30-70 carbon atoms, can be recovered via direct discharge of the molten wax from the thermal kiln reactor **301**, in a preferred embodiment, at the termination of the Mixing, Molecular Destabilization and Heteroatom Scavenging Zone **404** within a temperature range of 300°C to 338°C (572°F to 690°F), a temperature threshold not previously identified from which consistent yield of microcrystalline or paraffin wax product
25 could be achieved. The preferred embodiment to directly recover wax from the thermal kiln reactor **301** is optional and not necessary to the operation of thermal kiln reactor **301**. This preferred embodiment is deployed when direct discharge of wax from thermal kiln reactor **301** is desired at the expense of liquid product recovery from condensers **80**, product gas recovery from product gas discharge port **830** and char recovery from char discharge **319**. Accordingly, total
30 condensable product yield is higher when hard wax is recovered from the termination of the Mixing, Molecular Destabilization and Heteroatom Scavenging Zone **404** because pyrolysis of

all the hydrocarbonaceous material does not go to completion, thereby reducing formation of non-condensable gas and char and increasing condensable product yield as material balance is conserved.

In one means of deployment of this preferred embodiment as depicted in FIG 3, thermal
5 kiln reactor **301** is angled with a negative incline or slope, i.e. declining, with respect to the horizon **50**, such that the entrance end of thermal kiln reactor **301** is at a higher elevation than the exit end, allowing the force of gravity to assist in the transport of molten wax product recovered in catch trough **330** to exit via wax exit pipe **331** at wax discharge port **332** exiting end plate assembly **316**. Catch trough **330** is located immediately beneath an opening cut into the top of
10 wax exit pipe **331** situated in the longitudinal center of thermal kiln reactor **301**. Wax exit pipe **331** is not present along the entire length of thermal kiln reactor **301**, but only along the length of the second chamber, coincident with Zone 5 **405**. As thermal kiln reactor **301** rotates and the contents of the reactor boil, tumble, flow and fall vertically downward through the open headspace in rotating thermal kiln reactor **301**, molten wax spills into catch trough **330**, i.e. that
15 portion of exit pipe **331** not cut away to make the opening. Catch trough **330** is located at the end of wax exit pipe **331** which is positioned such that catch trough **330** is located within central opening **305** to baffle dam **304**, thereby capturing the melt, constituting microcrystalline or paraffin wax, at the transition from Zone 4 **404** to Zone 5 **405**. Catch trough **330** is integral to wax exit pipe **331** which, in the event of optional deployment of counter-rotating shaft **310**,
20 encases counter-rotating shaft **310**, incorporating the end bearing of counter-rotating shaft **310** at the lower end of the thermal kiln reactor, such end bearing encased in a cage or similar device that allows passage of the wax past the end bearing, and blades **311** are eliminated from the second chamber **303** of thermal kiln **301** due to the presence of wax exit pipe **331**. The wax captured in catch trough **330** flows with the force of gravity down-slope within wax exit pipe **331**
25 in the annulus between shaft **310** and the interior wall of wax exit pipe **331**, passing the suspended end bearing and subsequently exiting wax exit pipe **331** at wax discharge port **332**. Given that wax exit pipe **331** passes through Zone 5 **405** where temperatures exceed Zone 4 **404** temperatures ranging from 300°C to 338°C (572°F to 690°F), limited pyrolysis of the wax within wax exit pipe **331** occurs. The magnitude of this pyrolysis and resulting loss of wax is mitigated
30 by the short residence time of wax in that portion of wax exit pipe **331** within Zone 5 **405**. In the event that counter-rotating shaft **310** is not deployed, wax exit pipe **331** is completely open such

that the wax captured in catch trough **330** flows with the force of gravity down-slope within wax exit pipe **331**, unimpeded by the presence of counter-rotating shaft **310**, subsequently exiting wax exit pipe **331** at wax discharge port **332**. Depending upon the presence or absence of mineral-based additives, non-polymer contaminants and the like, the wax discharged from wax discharge port **332** may or may require filtering and/or other treatment if market specifications require.

In an alternative deployment of this preferred embodiment (not shown), thermal kiln reactor **301** is angled with a positive slope, i.e. inclined, with respect to the horizon **50**, such that the entrance end of thermal kiln reactor **301** is at a lower elevation than the exit end, allowing the contents of the first chamber of thermal kiln reactor **301** to form a destabilizing melt pool at the low end of thermal kiln reactor **301**. In this alternative deployment, catch trough **330** is also located immediately beneath an opening cut into the top of wax exit pipe **331** situated in the longitudinal center of thermal kiln reactor **301**. Wax exit pipe **331** is not present along the entire length of thermal kiln reactor **301**, but only along the length of the first chamber, coincident with Zone 4 **404**. In this alternative means of deployment, the operational level of the destabilizing melt pool coincides with the horizontal **50**, the level of catch trough **330** and the level of central opening **305** to baffle dam **304**, such that all 3 levels are equal. Accordingly, wax will exit the melt pool via catch trough **330** and wax exit pipe **331** at the low end of thermal kiln reactor **301** as well as through central opening **305** to baffle dam **304**, thereby entering Zone 5 **405**. In this deployment, wax exit pipe **331** does not pass through Zone 5 **405** where temperatures exceed Zone 4 **404** temperatures ranging from 300°C to 338°C (572°F to 690°F), and no Zone 5 **405** pyrolysis of the wax occurs within wax exit pipe **331**. Although wax pyrolysis within exit pipe **331** is avoided in the inclined deployment, loss of wax occurs in an amount roughly equal to that of the declining deployment because some of the wax advances into the second chamber of the thermal kiln reactor coincident with Zone 5 **405**, is pyrolyzed, and converted to condensable and non-condensable product recovered from condenser array **80**. Depending upon the presence or absence of mineral-based additives, non-polymer contaminants and the like, the wax discharged from wax discharge port **332** may or may require filtering and/or other treatment if market specifications require.

In yet another means of deployment and operation, the thermal kiln reactor **301** can be operated at a minimum temperature of about 349°C to 338°C (660°F to 690°F), more or less, and

a maximum temperature of about 360°C to 382°C (680°F to 720°F), more or less in either the inclining or declining orientation. In this example, both chambers of the thermal kiln reactor operate within the same temperature range, roughly equivalent to that of Zone 4 **404**. Accordingly, in the absence of temperature Zones 5, 6, and 7, little, if any, pyrolysis of wax
5 forming at the termination of Zone 4 **404** will occur, and the vast majority of hydrocarbonaceous material, with exception of mineral impurities and the like, will be recovered as hard microcrystalline or paraffin wax. Depending upon the presence or absence of mineral-based additives, non-polymer contaminants and the like, the wax discharged from wax discharge port **332** may or may require filtering and/or other treatment if market specifications require.

10 Exhaust from gas burner array **306** and/or first heating zone **312** and second heating zone **313** is discharged from first exhaust port **321** exiting heating zone **312** and second exhaust port **322** exiting heating zone **313**. The primary discharge from the thermal kiln reactor **301**, namely hydrocarbon vapor resulting from pyrolysis of the hydrocarbonaceous material in thermal kiln reactor **301**, is discharged via thermal kiln reactor exhaust port **323**, to a downstream catalyst
15 reactors and/or reflux reactors and/or fractionation columns (not shown), as may or may not be deployed and ultimately to condensation system **80**.

The apparatus **10** is described in relation to the process Zones used throughout, each having a plurality of temperature and residence time. The apparatus **10** is comprised of a series of distinct, throughput process Zones through which the raw material blend is continually heated
20 and advanced. Although modest temperature variation over operating periods is well tolerated by apparatus **10**, for purposes of efficiency and to maintain the plurality between Zone temperature and residence time, it is desirable to maintain dynamic equilibrium in reactor **10**. Dynamic equilibrium is achieved by maintaining a constant raw material throughput rate and constant reactor temperatures in each Zone once these temperatures have been achieved when
25 operations ensue. The slower the raw material throughput, the longer the residence time. Although the dynamic equilibrium has been interrupted, less heat may be required to successfully drive the desired chemical reactions over a longer residence time so long as operations continue within rate-determining limits. In contrast, the faster the raw material throughput, the shorter the residence time. Although the dynamic equilibrium has been
30 interrupted, more heat may be required to successfully drive the chemical reactions over a shorter residence time so long as operations continue within rate-determining limits. In both

cases, if rate-determining limits are exceeded by variations in temperature and/or residence time, the desired reactions will not be experienced, and undesirable reactions may result. Accordingly, if the dynamic equilibrium is not maintained, operations in disequilibrium pose risk to efficient system operation and consistency in product quality.

5 Although it is critical to maintain the plurality between Zone temperature and residence time, limits exist as to functional ability to maintain this plurality if the dynamic equilibrium is interrupted. These limits stem from, among other things, reactor design capacity, fixed thermal conductivity of the hydrocarbonaceous material and reaction kinetics. For example, an excessive feed rate beyond that contemplated in reactor design is likely to result in residence times being
10 insufficient to facilitate heat transfer to the hydrocarbonaceous material. Those reduced residence times may be insufficient for the desired reactions to achieve the desired level of completion even if adequate heat could be transferred to the hydrocarbonaceous raw material. In another example, in an attempt to compensate for faster raw material throughput, one might increase the temperature of the heating system. Although limited benefit is achieved by this action, the
15 temperature differential between heated surfaces and the hydrocarbonaceous material can become so extreme as to prematurely promote reactions which ideally should occur in a successive Zone, thereby losing Zone definition in apparatus 10. Risks created by overheating to compensate for excessive throughput include creation of excessive reactor pressure / unsafe operation conditions, as well as overproduction of gas and char at the expense of solid wax
20 and/or condensable hydrocarbon yield. In another example, a feed rate far below apparatus 10 capacity or chronic interruptions to feed can result in excessive residence times.

The apparatus 10 is comprised of a series of distinct, throughput process Zones through which the raw material blend is continually heated and advanced. There are seven of these throughput process Zones: the Raw Material Feed Zone 401, the Compression Zone 402, the
25 Melt Zone 403, the Mixing, Molecular Destabilization and Heteroatom Scavenging Zone 404, the Pyrolysis Zone 405, the Devolatilization Zone 406, and the Char Discharge Zone 407.

Zone 1: Raw Material Feed Zone. Zone 1 401 is operated at ambient temperature and pressure for a residence time of less than one minute. In the embodiment of the present invention shown in FIG 1, raw materials are introduced to the apparatus at the entrance 100. The exact
30 means of introducing feed materials is not critical, and may be of any method known in the industry so long as the feed method selected is sufficiently robust and effective thereby avoiding

failure to feed shredded and often highly compressible raw materials, and isolate undesirably large and bulky non-polymeric solid contaminants that will foul the reactor feed entrance **100** or the reactor **10** itself. The purpose of this Zone is to accept material into the apparatus **10** and move the material into the next Zone.

5 The present apparatus **10** allows for the purposeful combination of mixed and/or varying solids with any quantity, including zero, of mixed and/or varying petroleum-based liquids. It provides for efficient conversion of widely variable raw material streams, highly contaminated raw material streams, and raw material streams having inconsistent compositions over time. Additionally, hydrocarbonaceous materials can be fed at entrance **100** to apparatus **10** with finely
10 divided, mineral-based additives selected from one or more melt-phase heteroatom scavengers in forms including but not limited to oxides, hydroxides and/or carbides of the group consisting of alkali metals, alkaline earth metals, transition metals, post-transition metals and/or metalloids. Optionally, for example, when only light oil, diesel additive or gasoline additive is desired, feed materials can additionally include addition of one or more melt-phase catalysts in forms
15 including but not limited to oxides, hydroxides and/or carbides of the group consisting of alkali metals, alkaline earth metals, transition metals, post-transition metals, metalloids, non-metals and/or naturally-occurring & synthetic silicate minerals.

 Addition of mineral-based additives and/or melt-phase catalysts at entrance **100** is optional, depending upon factors including but not limited to composition of the raw
20 hydrocarbonaceous materials, desired product mix, e.g. ratio of produced oil to produced gas, ratio of produced wax to oil and desired molecular composition of condensable hydrocarbon products. For example, when addition of heteroatom scavengers is desired, the weight percentage of heteroatom scavenger of the total hydrocarbonaceous material added to the reactor, such percentage ranging from 0% to 20% or more, is determined by fate of the scavenger in the
25 reactor. Thorough dispersion of mineral-based additives and/or melt-phase catalysts is critical to efficient use of these mineral-based additives and/or melt-phase catalysts and to prevent reactor fouling, especially in Zones 1 through 4 resulting from the presence of excessive finely divided mineral-based additives and/or melt-phase catalysts. Some but not all of the heteroatom scavenger will be available to participate in the desired reactions if dispersion of the scavenger in
30 the hydrocarbonaceous material is not be complete. Moreover, some of the heteroatom scavenger may aggregate in the hydrocarbonaceous material prior to or after introduction of the

hydrocarbonaceous material to the reactor, thereby reducing its availability to participate in the desired reactions. If only one primary reaction involving heteroatom scavenger is anticipated, the optimal weight percentage of heteroatom scavenger added to the total hydrocarbonaceous raw material feed may be the sum of the amount of heteroatom scavenger stoichiometrically required to complete all desired dehalogenation and desulfurization reactions plus the amount of heteroatom scavenger not available to the desired reactions due to, for example, incomplete dispersion of heteroatom scavenger in the system. If more than one primary reaction involving heteroatom scavenger is anticipated, such scavenger can be consumed by competing reactions. As one of many possible examples, if the hydrocarbonaceous material includes polyvinyl chloride (PVC) and/or polyvinylidene chloride (PVDC) in the presence of polyesters of terephthalic acid (PET), competing reactions may include conversion of hydrochloric acid evolving from PVC and PVDC to calcium chloride salt and water, as well as promoting conversion of the sublimates terephthalic acid and benzoic acid evolving from the decomposition of PET to benzene. Accordingly, the amount of heteroatom scavenger added to the hydrocarbonaceous material must be sufficient to allow for all desired competing reactions to achieve completion. Similarly, the number of polymer species and their relative concentrations in the raw hydrocarbonaceous material will impact polymer decomposition rates. For example, citing simple first order kinetics, rate limited on a single species, the addition of more of that species can promote acceleration of the decomposition rate. Determination of optimum weight percentages, if any, of heteroatom scavengers to the raw hydrocarbonaceous material must be made with thorough knowledge of the composition of the hydrocarbonaceous material, as well as any anticipated variance of that same material over time. Similarly, polymer decomposition rates can change via catalyst addition to the hydrocarbonaceous material whereby energy barriers are lowered, resulting in interactions to accelerate some, but not all, decomposition reactions. Selection and quantity of catalyst, if any, added to the hydrocarbonaceous material are functions of the composition of the hydrocarbonaceous material.

Zone 2: Raw Material Volume Reduction / Compression Zone. Zone 2 **402** is operated to reduce the volume of the hydrocarbonaceous material, expel atmospheric air from the hydrocarbonaceous material at a temperature below the flash point of the hydrocarbonaceous material, and to generate and expel steam as moisture in the hydrocarbonaceous material boils. Zone 2 **402** is operated with an internal temperature, as opposed to skin temperature, not less

than ambient temperature and not more than 220°F, more or less. In Zone 2, the hydrocarbonaceous material experiences increase in pressure resulting from temperature increase, shear force and evolution of steam. At the beginning of Zone 2, pressure is at or near ambient pressure. As heat builds, the hydrocarbonaceous material undergoes shear. As steam evolves, Zone 2 pressure increases to a maximum of as little as 50 psig, more or less, or as much as 500 psig, more or less, depending upon the amount of moisture in the hydrocarbonaceous material as introduced into Zone 2 as well as the clearance between the extruder screw and barrel, a control upon the degree of shear. At the end of Zone 2, if steam is discharged from steam port **204**, the pressure in Zone 2 will fall to a minimum of not less than 2 psig at steam port **204**. Residence time in Zone 2 is not less than 15 seconds, more or less, and not more than 5 minutes, more or less, depending upon extruder screw and barrel design. The volume of the hydrocarbonaceous material is reduced, and feed materials are compressed by the rotating screw within screw and barrel assembly **210**, forcing air and moisture, as steam, out of the system under optional vacuum. Raw material moisture reduction is accomplished thereby to a moisture content ranging from less than 1% moisture by weight up to 15% moisture by weight, more or less. In the preferred embodiment, moisture is reduced to about 10% by weight. Expelled air and moisture can be routed to an activated carbon bed. Condensed water can be disposed of as waste water. Operation of the activated carbon bed may, depending upon governmental agency jurisdiction, require environmental permitting of a waste water pre-treatment system. The remaining air can, for example to promote odor control, optionally be directed to the air intake of a direct-fired reactor heating system or the air intake of a generator set (“genset”, not shown) comprising a diesel generator fueled by the non-condensable gas product discharged from gas discharge port **830** (shown in FIG 4) plus a dynamo. A genset can be used to generate electricity, which can be used utilized by the apparatus and/or distributed to other parts of the facility.

Zone 3: Raw Material Melt Zone. Zone 3 **403** is operated with an internal reactor temperature range between 220°F and 572°F, more or less, for a residence time of not less than 10 minutes and not more than 45 minutes, more or less. In Zone 3, the hydrocarbonaceous material experiences increase in pressure resulting from temperature increase, shear force and expansion of the hydrocarbonaceous material upon melting. At the beginning of Zone 3, pressure is not less than 2 psig at a point coincident with steam port **204**. As heat builds, the hydrocarbonaceous material undergoes shear. As melting occurs and the hydrocarbonaceous

material expands, Zone 3 pressure increases to a maximum of as little as 50 psig, more or less, or as much as 800 psig, more or less, depending upon the composition of the hydrocarbonaceous material as well as the clearance between the extruder screw and barrel, a control upon the degree of shear. For example, if the hydrocarbonaceous material is composed of polyisobutylene, some or all of the polyisobutylene will enter Zone 3 as a melt, depending upon the isomers of polyisobutylene constituting the material. In another example, if the hydrocarbonaceous material is composed of low density polyethylene, the minimum Zone 3 operating temperature is 220°F or more, in an operating temperature adequate to accomplish melting of all constituents have a melting point at or below 220°F, more or less. In yet another example, if the hydrocarbonaceous material is composed of polystyrene, the minimum Zone 3 operating temperature is 464°F or more, in an operating temperature adequate to accomplish melting of all constituents have a melting point at or below 464°F, more or less. If organic halogens are present in the melt, operation of the present invention will result in generation of a relatively modest yield of halogen acids in the temperature range of not less than 305°F. Additional hydrochloric acid may evolve in Zone 3 **403** as the Zone 3 operating temperature approaches 572°F. In that event, salts resulting from the reaction of heteroatom scavenger and halogen acids will begin to form, acting with remaining halogen acids as melt-phase cracking catalysts generated *in situ* by operation of the present invention. If halogen acids begin to form at the end of Zone 3, operation of Zone 3 in the upper portion of the Zone 3 operating pressure range is experienced.

Zone 4: *Mixing, Destabilization and Heteroatom Scavenging Zone.* Zone 4 **404** is operated with an internal reactor temperature range of not less than 572°F and not more than 690°F, more or less, for a residence time of not less than 30 minutes and not more than 120 minutes, more or less. In Zone 4, the hydrocarbonaceous material experiences increase in pressure resulting from temperature increase, shear force, evolution of halogen acids resulting from the decomposition of PVC, PVDC, certain fire retardants and the like, and evolution of hydrocarbon vapors resulting from the decomposition of certain additives and plasticizers. At the beginning of Zone 4, pressure is equivalent to that at the contiguous termination of Zone 3, in the range of 50 psig, more or less, to as much as 800 psig, more or less. As heat builds, the hydrocarbonaceous material expands as it undergoes further shear. As hydrocarbon vapors and halogen acids evolve, Zone 4 pressure increases to a maximum of as much as 1,200 psig, more or less, depending upon the quantity of hydrocarbon vapors and halogen acids that evolve as well as

the clearance between the extruder screw and barrel, a control upon the degree of shear. Near the termination of the extruder screw and barrel assembly **210**, a position at or near the center of Zone 4, hydrocarbon vapors and halogen acids are discharged from halogen exit port **205**, optionally under slight vacuum. At this point, the pressure in Zone 4 will fall to a minimum of not less than 2 psig at halogen exit port **205** or possibly lower if optional vacuum is deployed. Destabilizing hydrocarbonaceous material is discharged from extruder **201** via connecting port **207** to thermal kiln reactor **301**. Nominal to modest pressure increase is experienced within the piping run of connecting port **207**, a continuation of Zone 4, as the hydrocarbonaceous material continues to destabilize. Upon discharge to the continuation of Zone 4 within the first chamber **302** of thermal kiln reactor **301**, pressure decrease is experienced to the operating pressure of the thermal kiln reactor, generally not more than 5.0 psig, more or less.

The purpose of this section of the apparatus operated in Zone 4 is to thoroughly mix the melt for a prolonged period, destabilize molecules comprising the melt, scavenge sulfur (desulfurize), and convert organic halogens to solid salts (i.e. dehalogenate).

Polymer cracking within the hydrocarbonaceous materials is promoted by multiple-stage generation of hydrochloric acid, hydrobromic acid and/or hydrofluoric acid. Such acids are commonly identified as cracking catalysts. Concurrently and subsequently, reaction of these halogen acids with heteroatom scavenger results in conversion of organic halogens in the hydrocarbonaceous material to salts which are also identified as cracking catalysts. Accordingly, in addition to Zone 4 **404** generation of hydrocarbon vapors as a result of decomposition of certain polymer plasticizers and additives in Zone 4, operation of Zone 4 also results in production of hydrocarbon vapors at temperatures well below those predicted by standard thermal and kinetic models. Upon condensation, such hydrocarbon vapors produced in Zone 4 **404** result in not less than 2% nor more than 22%, more or less, of the total condensable product yield of the present invention. The efficacy of heteroatom scavenging and rate of production of product oil resulting from operation of Zone 4 **404** are controlled by factors including but not limited to ramp rate to achieve Zone 4 operating temperature, residence time in Zone 4, and interplay of the geometry of Zone 4 vs. raw material throughput rate and composition. Zone 4 geometry is a function of factors including the length and diameter of that portion of extruder screw and barrel assembly **210** within Zone 4, extruder screw design, the length of heated connecting port **207**, the length and diameter of the first chamber **302** of thermal kiln reactor **303**

within Zone 4, desired collective residence time in all portions of Zone 4 and, to a far lesser degree, total mass loss from Zone 4 melt. Heteroatoms removed from the hydrocarbonaceous melt via reactions in Zone 4 accumulate largely as salts in the char material, which is removed from subsequent Zone 7, described below.

5 In addition to the products of pyrolysis recovered from subsequent segments of the present invention, microcrystalline and/or paraffin wax product can be directly discharged from a point at the transition from Zone 4 **404** to Zone 5 **405**, specifically, at the termination of the first chamber **302** of thermal kiln reactor **301** via wax recovery at catch trough **330**, subsequent wax flow through wax exit pipe **331** and ultimate recovery at takeoff port **332**. While sheared and
10 subsequently mixed melt within the first portion of Zone 4 maintains characteristics of melted plastic when discharged and examined upon freezing, as the material progressively destabilizes as it advances within the last half of Zone 4 toward the transition of Zone 4 **404** to Zone 5 **405**, the material begins to experience cracking that is dominated by homologous cracking, gradually losing viscosity and, upon freezing, becoming more friable, eventually taking on the
15 characteristics of hard wax when the melt is held at adequate residence time in the temperature range of 352⁰C (670⁰F) to 365⁰C (690⁰F). Given that relatively little char has formed prior to pyrolysis in Zone 5, wax discharged from takeoff port **332** is contaminated only by dissolved lower molecular weight hydrocarbon molecules which have not evolved from the wax as vapor, non-hydrocarbonaceous components of the raw material introduced into the reactor, and reaction
20 byproducts, if any, of heteroatom scavengers, if any were introduced. The reactor can be operated with or without wax take-off. If the wax is not removed, it remains in the reactor in a liquid state and is further processed in subsequent Zones. If this hard wax is removed and recovered, it will cool to a solid state at room temperature. As such, wax is to be considered a solid product.

25 Certain non-polymeric materials in the hydrocarbonaceous material will participate in and/or promote reactions resulting in changes in end-product molecular composition. For example, the presence of paper as a contaminant of the raw hydrocarbonaceous material introduced into apparatus **10** may cause a proportional increase in concentration of aromatic and polynuclear aromatic hydrocarbons at the expense of paraffin and/or isoparaffin in the wax
30 which can be recovered from takeoff port **332** shown on FIG 3 as well as in the condensable hydrocarbon vapors condensed and recovered from takeoff ports **831** and/or **833** and/or **835**

shown on FIG 4. If the primary products desired include an aromatic cut, the presence of paper in the raw material can offer an advantage. In another example, laminate food-packing wastes including aluminum foils as components of the laminate can be present in municipal waste plastics. After the polymer layers melt, the aluminum foil is released. The metallic surface of the aluminum promotes rapid depolymerization on its surface, resulting in increased yield of the wax fraction.

Wax discharge from takeoff port 332 results in a higher total process yield of condensable petroleum hydrocarbons than operation of the present invention with no wax discharge from takeoff port 332. When condensable hydrocarbons are removed as wax from takeoff port 332, those removed molecules do not experience pyrolysis in Zones 5 405, and 6 406, and the proportional yield of gas and char is lower. In general, the relatively limited amount of char suspended in wax discharged from takeoff port 332 is composed largely of carbon resulting from the decomposition of cellulose included as a contaminant to the raw material feed, non-polymeric matter included as a contaminant to the raw material feed, reacted and un-reacted heteroatom scavenger, if heteroatom scavenger is added, melt-phase catalyst created *in situ*, and any melt-phase catalyst added to the raw material feed.

Wax resulting from decomposition of mixed polymers and recovered from takeoff port 332 exhibits many characteristics of microcrystalline wax in contrast to paraffin wax, including ratio of unbranched to branched alkanes, darker color, higher melting point, hardness and adhesive characteristics.

Zone 5: Pyrolysis Zone. Zone 5 405 is operated with an internal reactor temperature range appropriate to the blend of raw material introduced into the primary thermal reactor, commonly between 365°C (690°F) and 393°C (740°F), more or less, at the lower end of the temperature range, and 454°C-488°C (850°F-910°F), more or less, at the upper end of the temperature range, and at *in situ* derived reactor pressure, generally not more than 5.0 psig, more or less, for a residence time of not less than 30 minutes and not more than 90 minutes, more or less. The lack of oxygen, coupled with high temperature over the required residence time, results in various pyrolysis reactions taking place governed by high-order reaction kinetics, breaking down the polymeric material into volatile vapors and char material. The vapor stream is composed primarily of vapor, but may contain aerosol liquids and condensable molecules. This vapor stream is subject to further down-stream treatment (described below), wherein

condensable and non-condensable vapors are separated. The condensable vapors form liquids including oil, light sweet crude oil, fuel additives, and base oil. A heavier fraction can form solid products, generally in the form of slack wax. The non-condensable vapors or gases are recovered and can be optionally passed to a genset (described above) to produce electric power or can be
5 circulated prior to use elsewhere as the vapor blanket over liquid product (discussed in more detail below).

The ultimate yields of condensable hydrocarbons, as well as relative material balance of oil, gas, char and inorganic residue, are controlled by several factors. These factors include, but are not limited to, operating temperature, interplay of the geometry of Zone 5 **405** versus raw
10 material throughput rate, residence time required for pyrolysis reactions to go to completion, desired magnitude of reaction completions, raw material composition, and recovery, if any, of wax product from takeoff port **332**. Zone 5 geometry is a function of factors including but not limited to length of the second chamber of the thermal kiln reactor, thermal kiln reactor diameter, internal design of the thermal kiln reactor, and forecasted rate of mass loss via vapor evolution
15 and emission from Zone 5 melt. This rate of mass loss is a key input from an interactive thermal and kinetic model into design of Zone 5 geometry. The process comprising the present invention is characterized by the virtual absence of oxygen and organic halogens in Pyrolysis Zone 5 **405** coupled with the presence of *in situ* derived catalysts, including salts.

Operation of Zone 5 **405** results in significant loss of mass of the hydrocarbonaceous
20 material as pyrolysis proceeds on the continuously advancing hydrocarbonaceous material and vapor is expelled from the reactor. Thermal kiln reactor 301 operates as a boiler in which the pyrolyzing hydrocarbonaceous material exhibits a boiling and dynamic transitional interface of vapor above incompletely pyrolyzed hydrocarbonaceous material. This transitional surface continually evolves as it boils under conditions of the dynamic equilibrium until the
25 hydrocarbonaceous material is effectively pyrolyzed, leaving only the solid char material and any incompletely pyrolyzed hydrocarbonaceous material to be advanced into Zone 6 **406** for devolatilization and coking. Accompanying and correlative change in viscosity of the hydrocarbonaceous material is experienced in the reactor as pyrolysis proceeds to completion.

Optionally, for example, in cases where accelerated evacuation of product vapor from
30 Zone 5 is desired, and depending upon the product mix desired, a non-condensable carrier gas can be introduced into thermal kiln reactor **301** at auxiliary injection port **320**. Optional addition

of carrier gas results in a proportional increase in vapor flow exiting the second chamber **303** and corresponding Zone 5. Accordingly, condensers **80** must be designed to accommodate the increased rate of vapor flow if this option is to be exercised. Such non-condensable carrier gas is comprised of nitrogen and/or a recycled non-condensable gas fraction resulting from operation of the present invention and/or methane from natural gas or any blend of these non-condensable gases. Use of a recycled gas and/or methane as an alternative to nitrogen for carrier gas has a benefit of increased BTU content of produced process gas in the absence of dilution by nitrogen, as well as decreased operating expenses by eliminating the need to purchase or generate nitrogen. This aspect of the present invention can, depending upon raw material composition and range of operating conditions, also result in the unanticipated benefit of increase in oil yield, unanticipated albeit modest benefit of slight increase in hydrogen concentration of the reactor atmosphere in the pyrolysis environment, and an unanticipated increase in the hydrogen concentration of resulting process gas.

Zone 6: Char and Residual Solids Devolatilization Zone. Zone 6 **406** serves to drive volatile hydrocarbons from the char as well as to convert any remaining oligomer and semi-volatile aromatic hydrocarbons to coke. Zone 6 is operated with an internal reactor temperature not less than the maximum pyrolysis temperature appropriate to the blend of raw material introduced into the thermal reactor, commonly between 454°C (850°F) and 488°C (910°F), more or less, and not greater than 982°C (1800°F), more or less, commonly and preferably between 593°C (1100°F) and 649°C (1200°F), more or less, and at *in situ* derived reactor pressure, generally not more than 5.0 psig, more or less. Zone 6 **406** is operated at an *in situ* derived reactor pressure, generally not more than 0.8 psig, more or less, and a residence time of not less than 15 minutes and not more than 60 minutes, more or less. Vapor resulting from reactions occurring in Zones 5 **405** and 6 **406** is discharged to outlet **323** positioned in Zone 5 **405**. The outlets can be a single outlet **323**, or a plurality of outlets, including back-up or auxiliary outlets.

A scrubber (not shown) can be used to recover any residual halogens not captured in Zone 4 **404** prior to discharge to step-down condensers **80**. This heteroatom scrubber is operated in a temperature range appropriate to recovery of halogens in each unique raw material blend, but not at an excessive temperature to promote cracking, for example between 338°C (640°F) and 365°C (690°F), more or less.

Vapor resulting from operation of Zone 6 **406** can be optionally routed to catalyst reactors and/or reflux reactors and/or fractionation columns (collectively, not shown) for further processing prior to discharge to step-down condensers **80**. Vapor emanating from Zones 5 **405**, 6 **406** and/or 7 **407** of thermal kiln reactor **301** and/or the scrubber can be routed to one or more secondary catalyst reactors and/or reflux reactors and/or fractionation columns (collectively, not shown). These reactors and/or columns are designed to optimize molecular size and molecular species distribution in the condensable product as may be desired.

In addition, the purpose of Zone 6 **406** includes completion of molecular cracking to the desired end point, also targeting decomposition of some but not all silanes and siloxanes. Notably, of the hydrocarbonaceous material including polyfluoroethylene (PTFE), chloromethylaromatic silanes (a component of flexible, multi-layer circuit boards) or other halogenated species for which kinetic models describe dehalogenation at temperatures exceeding 454°C (850°F), capture of said halogens must be accomplished at a scrubber (not shown) located downstream from thermal kiln reactor **301** and upstream of the condenser array **80**.

Optionally, if olefin content of the condensable products is problematic, an anti-oxidant/stabilizer/inhibitor (hereinafter referred to as “inhibitor”) can be injected downstream from discharge from thermal kiln reactor **301** and downstream from a point of vapor discharge from any catalyst reactors and/or reflux reactors and/or fractionation columns where temperature mitigation is sufficient. The inhibitor may be comprised of 4-tert-butylcatechol, other alkyl catechols, 2,6-dinitro-p-cresol (DNPC), cuts of whole or topped asphaltic crude oil, phenylenediamine and/or commercially available materials in the category of oxy-compound inhibitors. The inhibitors are introduced to inhibit broad spectrum, downstream oxidative reactions involving metastable molecular species as well as additive polymerization which would otherwise occur. The refluxed product stream at a temperature of about 280°F can be injected with inhibitor at a rate of about 0.00001 to 0.05 mole percent to condenser **801** if condenser **801** is operated at a maximum temperature below about 280°F or injected to condenser **803** if condenser **801** is operated at a maximum temperature above about 280°F.

Product vapor is discharged from discharge port **323** or, if deployed, downstream catalyst reactors and/or reflux reactors and/or fractionation columns and/or scrubbers to step-down condensers **80** in series, for example to condensers **801**, **803** and **805** shown on FIG 4, optionally supplemented by demisters **811**, **813** and **815** between condensers for those required applications

where more efficient separation than condensers alone can achieve. A final demister system (not shown) can be deployed at the termination of the condensation train when it is necessary to very efficiently remove residual aromatic hydrocarbons from the non-condensable gas product. Each condenser in the series is operated within a predetermined temperature range specified to isolate molecules within desired dew point ranges, resulting in condensable products having respective API gravities and pour points and/or melting points. In the embodiment illustrated in FIG 4, the first condenser **801** in the series **80** operates at the highest temperature range, and the final condenser **805** in the series operates at the coldest temperature range. Optional multiple demisters **811**, **813** and **815** are operated at temperatures corresponding to the minimum operating temperatures of their respective condensers. The condensers and, where deployed, the demisters are fitted with collection vessels **821**, **823** and **825**, also known as knockouts, which provide for oil accumulation / takeoff, and oil-water separation as may be required for each petroleum cut that is to be recovered.

Condensable product cuts are recovered from each condenser and its dedicated demister to respective knockouts **821**, **823** and **825** that provide for density separation of *in situ* derived water and oil. Multiple condensers deployed in series **80** constitute a series of step-down condensers, also known as a condenser train. As an example, if the step-down condenser train is constructed in a fashion adequate to recover at least 4 cuts, four step-down condensers are installed in series. Slack wax can be recovered from the first step-down condenser and its respective demister if operated between 300°F and 360°F, more or less, or, alternatively, slack wax and base oil can be recovered from the first step-down condenser and its respective demister is operated between 130°F and 300°F, more or less. Light sweet crude oil, sometimes described as diesel additive, can be recovered from the second step-down condenser and its respective demister if operated between 90°F and 130°F, more or less. The majority of water can be recovered coincident with recovery of C₄-C₈ hydrocarbons, sometimes described as condensate or gasoline additive, from the third step-down condenser and its respective demister if operated between 60°F and 90°F, more or less. A light aromatic cut, as well as the principal balance of water, is recovered from the fourth and final step-down condenser and its respective demister if operated between 35°F and 60°F more or less.

Liquid product can be routed to remote day tanks **831**, **833** and **835** as depicted in FIG 4 and subsequent product sale. Product tanks containing liquids having higher pour points or wax

products that must be transported in the molten state are heated to a point minimally above respective product pour points and/or melting points to provide for product transfer without distilling the products in their respective day tanks. The preferred embodiment is to maintain an anaerobic, non-condensable vapor blanket over liquid products to minimize product degradation via oxidation and retard the formation of tar and varnish resulting from additive polymerization that may occur, attributed to the presence of olefins, especially if inhibitor (as described above) is not added to the product. The vapor blanket can be comprised of non-condensable product gas produced by the apparatus and discharged from gas discharge port **830**. Tank vapor inlets and vents can be pressure regulated and can be integral to the non-condensable gas discharge port **830** of the present invention. Heavy cuts recovered from the first condenser **801** can be recycled back into the process as described above if recovery and sale of heavy cuts is not desired.

Residual, non-condensable gas is recovered from non-condensable gas discharge port **830** and can be optionally passed to a genset (described above) to produce electric power. Alternatively, the recovered non-condensable gas can be circulated prior to use elsewhere as the vapor blanket over liquid product in the liquid product tanks, consumed as fuel for direct-fired heating of the reactor apparatus, consumed as fuel for other purposes, or flared.

An optional genset, deployed when electric power generation is advantageous such as in remote locations or if the price of electricity is prohibitive, can take in make-up air from the compression zone **402** and/or areas where odor control is desired, e.g. post-consumer plastic raw material inventory storage, product driers and the like. Exhaust from the genset is routed to an air pollution control system.

In situ derived water, recovered from moisture entering the primary thermal reactor with the raw hydrocarbonaceous material and created by chemical reactions in the primary thermal reactor and elsewhere, can be separately recovered from the bottom of the knockouts **821**, **823** and **825** as depicted in FIG 4, passed over a carbon bed to adsorb dissolved aromatic hydrocarbon compounds, and subsequently vaporized to steam using waste heat from the genset, if deployed, from direct-fired heating of the reactor, and/or from elsewhere. Optionally, some portion of this steam can be passed over activated carbon and the condensate disposed of as waste water, or returned to the process at auxiliary injection port **320** promote the water-gas shift reaction. Alternatively, it can be routed to the air pollution control system as steam.

Zone 7: Char and Solids Discharge Zone. This zone **407** is operated with an internal reactor temperature range of not less than the maximum temperature of the preceding Zone 6 **406** and not greater than 1,800°F, more or less, at the start of the discharge zone to ambient temperature at the conclusion of discharge. It is operated at *in situ* derived reactor pressure, generally less than the system pressure experienced in Zone 6 **406** and not more than 1.0 psig, more or less, experienced in Zone 7 and beneath and/or downstream from vapor takeoff port **323** which operates at relative vacuum due to its respective discharge to condensers **80**. The residence time in the char discharge zone is not less than 15 minutes and not more than 30 minutes. Solid char is removed from the system, and inert contaminants including but not limited to glass, stones, metal and the like are sequestered from the reactor thereby with the char. Solids from Zone 7 **407** are discharged via char exit **319**. Solids can be discharged to a sealed, cooled continuous process solids takeoff system (not shown) which can be a part of Zone 7 **407**. At its hot end, the char is purged with methane from natural gas to mitigate residual adsorbed aromatic and polynuclear aromatic hydrocarbons. The system is designed to collect and/or separate and cool the solids, prevent re-adsorption of aromatic hydrocarbons and polynuclear aromatic hydrocarbons onto the char via ethane purge, and convert vapor entrained in the solids stream from a hot, anaerobic atmosphere dominated by methane purge gas in Zone 7 **407** downstream from char exit **319** to atmospheric air at a temperature below the flash point of the solids at the termination of Zone 7 **407**. This is done in such a manner so as to prevent spontaneous combustion and mitigate a dust explosion hazard. Given the very high insulating capacity of char, adequate residence time to allow cooling is critical to avoid spontaneous combustion.

The ability of the present invention to prevent the re-adsorption of aromatic hydrocarbons and polynuclear aromatic hydrocarbons onto the char in Zone 7 **407** is an important improvement over prior char recovery attempts. Pyrolysis char is notoriously known as being “sticky” given the presence of adsorbed tar composed of aromatic and polynuclear aromatic hydrocarbons. This problem is solved by the ability of the present invention to prevent re-adsorption of aromatic hydrocarbons and polynuclear aromatic hydrocarbons onto the char by hot methane purge prior to final cooling as it is discharged. As a result, given the absence of nearly all aromatic and polynuclear aromatic hydrocarbons, if the char must be disposed of as a waste, char discharged from Zone 7 **407** of the present invention does not exhibit the D018, D023, D024, D025, D026 or D036 toxicity characteristics of hazardous waste as described in 40 CFR Part 261.20. Given

the great difference in disposal cost between non-hazardous solid waste and hazardous waste, this improvement of the present invention provides a means to dispose, if necessary, char as non-hazardous solid waste in contrast to hazardous waste as identified by the hazardous waste codes previously identified.

5 Fouling is a common problem and can occur at various points in the apparatus. Such points include discharge nozzles exiting the primary thermal reactor. This fouling is a result of deposition of char, varnish, tar, terephthalic acid, benzoic acid, mineral salts and the like. These deposits can be removed and/or prevented from accumulating in various ways. One method is by operation of one or more mechanical rapper systems which are installed in the interior of the
10 nozzles or other ports. One preferred embodiment of a rapper system is described in U.S. Patent Application 13/735677, "Anti-Fouling Apparatus for Cleaning Deposits in Pipes and Pipe Joints" filed January 7, 2013. That rapper apparatus is designed to abrade the interior of surfaces prone to fouling while allowing bypass of vapor so as not to create unwanted pressure drops and pressure fluctuations, and are operated via scheduled manual use or via electronic control. The
15 resulting vapor is passed through a filter element comprised of ceramic, glass fibers, and/or an electrostatic device to mitigate passage of suspended particles to successive segments of the system. This reduces downstream system fouling, undesirable downstream chemical reactions, including catalysis, promoted by the presence of particles of char and/or salts and oxides and entrained/suspended particulate matter otherwise contributing to total metals concentration in the
20 condensable products.

 Although the invention has been described in detail with reference to particular examples and embodiments, the examples and embodiments contained herein are merely illustrative and are not an exhaustive list. Variations and modifications of the present invention will readily occur to those skilled in the art. The present invention includes all such modifications and
25 equivalents. The claims alone are intended to set forth the limits of the present invention.

CLAIMS

What is claimed is:

- 5 1. An apparatus for continuous conversion of hydrocarbonaceous materials to condensable, non-condensable and solid hydrocarbon products, comprising:
- at least one extruder means capable of providing shear force and heat and having three or more treatment zones,
- 10 a continuous process thermal kiln reactor, said extruder and said kiln reactor being in fluid communication,
- means for transporting hydrocarbonaceous materials through the apparatus, and between said extruder and said kiln reactor,
- means for feeding said hydrocarbonaceous materials to the apparatus,
- means for heating said hydrocarbonaceous materials,
- 15 means for removing vapor products from said apparatus,
- means for removing solid products from said apparatus,
- means whereby said hydrocarbonaceous materials are maintained within the zones for a range of defined temperature and residence times, and
- means for rotating said thermal kiln reactor,
- 20 wherein said at least one extruder has at least three zones, including a zone for compressing and dewatering said hydrocarbonaceous materials, a zone for melting said hydrocarbonaceous materials to convert them from a solid to a liquid, and a zone for mixing, destabilizing and dehalogenating said hydrocarbonaceous materials, whereby said hydrocarbonaceous material is subjected to a plurality of defined temperature ranges and residence times,
- 25 wherein said kiln reactor comprises at least two zones, including a zone for further destabilizing and dehalogenating, and a zone for pyrolyzing and for devolatilizing the pyrolyzed hydrocarbonaceous materials, whereby said hydrocarbonaceous materials are converted to vapor products, which can be further treated to produce condensable and non-condensable products,
- 30 and solid hydrocarbon products, and

wherein said apparatus collectively comprises the complete thermal and kinetic environment required to convert hydrocarbonaceous materials.

2. The apparatus of claim 1 wherein said extruder means comprises a plurality of screw and
5 barrel configurations which define a zone for feeding, the zone for compressing and dewatering to remove air and moisture from said hydrocarbonaceous materials, the zone for melting said hydrocarbonaceous materials to convert them from a solid to a liquid, and the zone for mixing, destabilizing and dehalogenating said hydrocarbonaceous materials.

10 3. The apparatus of claim 1 wherein all or part of said apparatus is inclined with respect to the horizon at an angle between about -20° to about $+20^{\circ}$.

4. The apparatus of claim 3 wherein all or part of said apparatus is inclined with respect to the horizon at an angle between about $+2^{\circ}$ to about $+6^{\circ}$.

15 5. The apparatus of claim 3 wherein all or part of said apparatus is inclined with respect to the horizon at an angle between about -2° to about -6° .

6. The apparatus of claim 1 further including a series of step-down condensers for
20 condensing said vapor products to recover liquid products.

7. The apparatus of claim 1 further including direct recovery of wax from a point located at the transition from the mixing, molecular destabilization and heteroatom scavenging zone to the succeeding pyrolysis zone.

25 8. The apparatus of claim 1 further including a means for removing and collecting solid products wherein said solid products are char.

9. The apparatus of claim 1 further including a means for removing and collecting halogen
30 acids.

10. The apparatus of claim 1 further including a means for introduction of purge gas.

11. The apparatus of claim 1 further including a separate means for feeding liquid hydrocarbonaceous materials to the apparatus.

5

12. A pyrolysis process for conversion of hydrocarbonaceous material to produce useful vapor products and solid products comprising:

providing at least one extruder having means for transporting said hydrocarbonaceous material through said apparatus, capable of providing shear force and heat and having three or
10 more treatment zones and a continuous process thermal kiln reactor having means for heating said hydrocarbonaceous material which is in fluid communication with said extruder,

feeding said hydrocarbonaceous material to a compression zone in said extruder to remove entrained air and moisture from said hydrocarbonaceous material,

melting said hydrocarbonaceous material,

15 mixing said melted hydrocarbonaceous material to form a melted mixture and subjecting said melted mixture to molecular destabilization, dehalogenation, desulfurization, and heteroatom scavenging,

feeding said melted mixture to said kiln,

20 subjecting said melted mixture to further molecular destabilization, dehalogenation, desulfurization, and heteroatom scavenging,

subjecting said melted mixture to pyrolysis to convert the hydrocarbonaceous material to vapor products and solid products, and

recovering said vapor products and said solid products,

25 wherein said process comprises the complete thermal and kinetic environment required to convert the hydrocarbonaceous material.

13. The process of claim 12 wherein said hydrocarbonaceous material is fed to said apparatus with finely divided, mineral-based additives selected from one or more melt-phase heteroatom scavengers selected from the group consisting of alkali metals, alkaline earth metals, transition
30 metals, post-transition metals and metalloids, and mixtures thereof.

14. The process of claim 12 wherein said hydrocarbonaceous material is fed to said apparatus with finely divided, mineral-based additives selected from (i) one or more melt-phase heteroatom scavengers selected from the group consisting of alkali metals, alkaline earth metals, transition metals, post-transition metals and metalloids, and mixtures thereof; and, (ii) one or
5 more melt-phase catalysts selected from the group consisting of alkali metals, alkaline earth metals, transition metals, post-transition metals, metalloids, non-metals and silicate minerals, and mixtures thereof.

15. The process of claim 12 wherein moisture in the raw hydrocarbonaceous material fed to
10 the apparatus is removed to about 10% moisture by weight.

16. The process of claim 12 wherein said hydrocarbonaceous material are compressed, and air and water are removed at a temperature of not more than about 220°F.

15 17. The process of claim 12 wherein the hydrocarbonaceous material are compressed in a compression zone and the residence time in the compression zone is about 15 seconds to 5 minutes.

18. The process of claim 12 wherein said hydrocarbonaceous materials are maintained in a
20 melt zone at a temperature between about 220°F and about 572°F to melt said hydrocarbonaceous material.

19. The process of claim 12 wherein the hydrocarbonaceous material is melted in a melt zone and the residence time in the melt zone is between about 10 minutes to about 45 minutes.

25 20. The process of claim 12 wherein said hydrocarbonaceous materials are mixed, destabilized, desulfurized, and dehalogenated at a temperature in the range of about 572°F to about 690°F.

21. The process of claim 12 wherein the hydrocarbonaceous material is mixed, destabilized, desulfurized, and dehalogenated in a mix zone and the residence time in the mix zone is about 30 minutes to about 120 minutes.

5 22. The process of claim 12 wherein the solid products include microcrystalline wax and paraffin wax and mixtures thereof.

23. The process of claim 12 wherein said hydrocarbonaceous materials are pyrolyzed at a temperature f about 690°F to about 910°F.

10

24. The process of claim 12 wherein the hydrocarbonaceous material is pyrolyzed in a pyrolysis zone and the residence time in the pyrolysis zone is about 30 minutes to 90 minutes.

15 25. The process of claim 12 wherein the solid products are solid char product and they are further subjected to devolatilization at a temperature in the range of about 850°F to about 1800°F.

26. The process of claim 25 wherein the solid char product is subjected to devolatilization at a temperature in the range of about 850°F to about 1200°F.

20

27. The process of claim 12 wherein the solid products are char and they are devolatilized in a devolatilization zone and the residence time in the devolatilization zone is about 15 minutes to 60 minutes.

25 28. The process of claim 12 wherein the solid products are solid char products and they are discharged at ambient temperature.

29. The process of claim 12 wherein the residence time in the char discharge zone is about 15 minutes to about 30 minutes.

30

30. The process of claim 12 wherein said hydrocarbonaceous materials are selected from the group consisting of plastic, thermoplastic polymer, thermoset polymer, hydrocarbon liquids, used oil, waste oil, gasoil, refinery bottoms, cylinder oil, waste elastomer, scrap tire, rubber residue, rubber belting, EPDM rubber sheet, membrane, and extrudate, and mixtures thereof.

5

31. The process of claim 12 further comprising the steps of condensing said vapor products to recover liquid products.

10

32. A process for conversion of hydrocarbonaceous material to produce useful wax products comprising:

providing at least one extruder having means for transporting said hydrocarbonaceous material through said apparatus, capable of providing shear force and heat and having three or more treatment zones, and a continuous process thermal kiln reactor having means for heating said hydrocarbonaceous material which is in fluid communication with said extruder,

15

feeding a mixture of hydrocarbonaceous material and heteroatom scavenging composition to said apparatus,

compressing said hydrocarbonaceous material to remove entrained air and moisture from said hydrocarbonaceous material,

melting said hydrocarbonaceous material,

20

mixing said melted hydrocarbonaceous material to form a melted mixture whereby said melted mixture is subject to molecular destabilization, dehalogenation, and heteroatom scavenging,

recovering said wax products.

25

33. The process of claim 32 wherein said hydrocarbonaceous material is fed to said apparatus with finely divided, mineral-based additives selected from (i) one or more melt-phase heteroatom scavengers selected from the group consisting of alkali metals, alkaline earth metals, transition metals, post-transition metals and metalloids, and mixtures thereof; and, (ii) one or more melt-phase catalysts selected from the group consisting of alkali metals, alkaline earth metals, transition metals, post-transition metals, metalloids, non-metals and silicate minerals, and mixtures thereof.

30

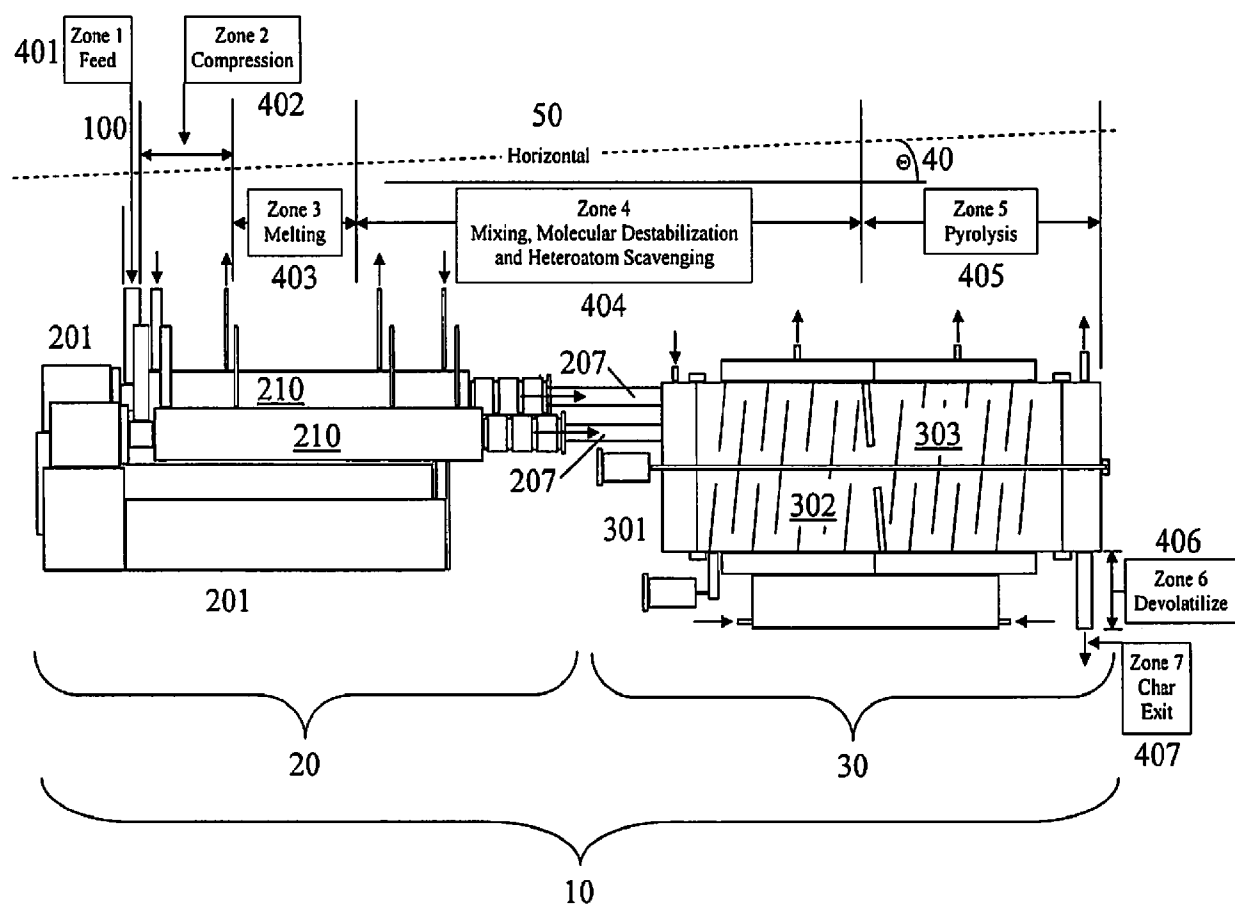


FIG. 1

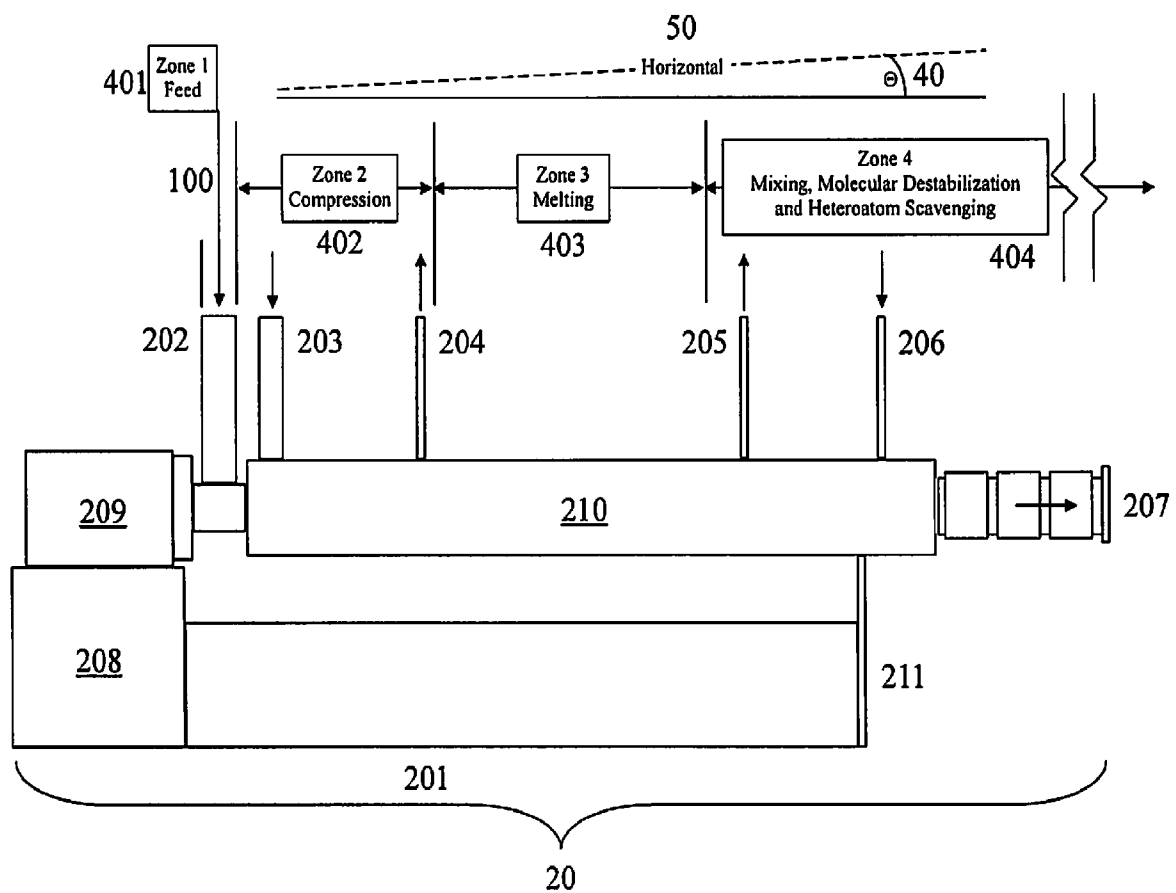


FIG. 2

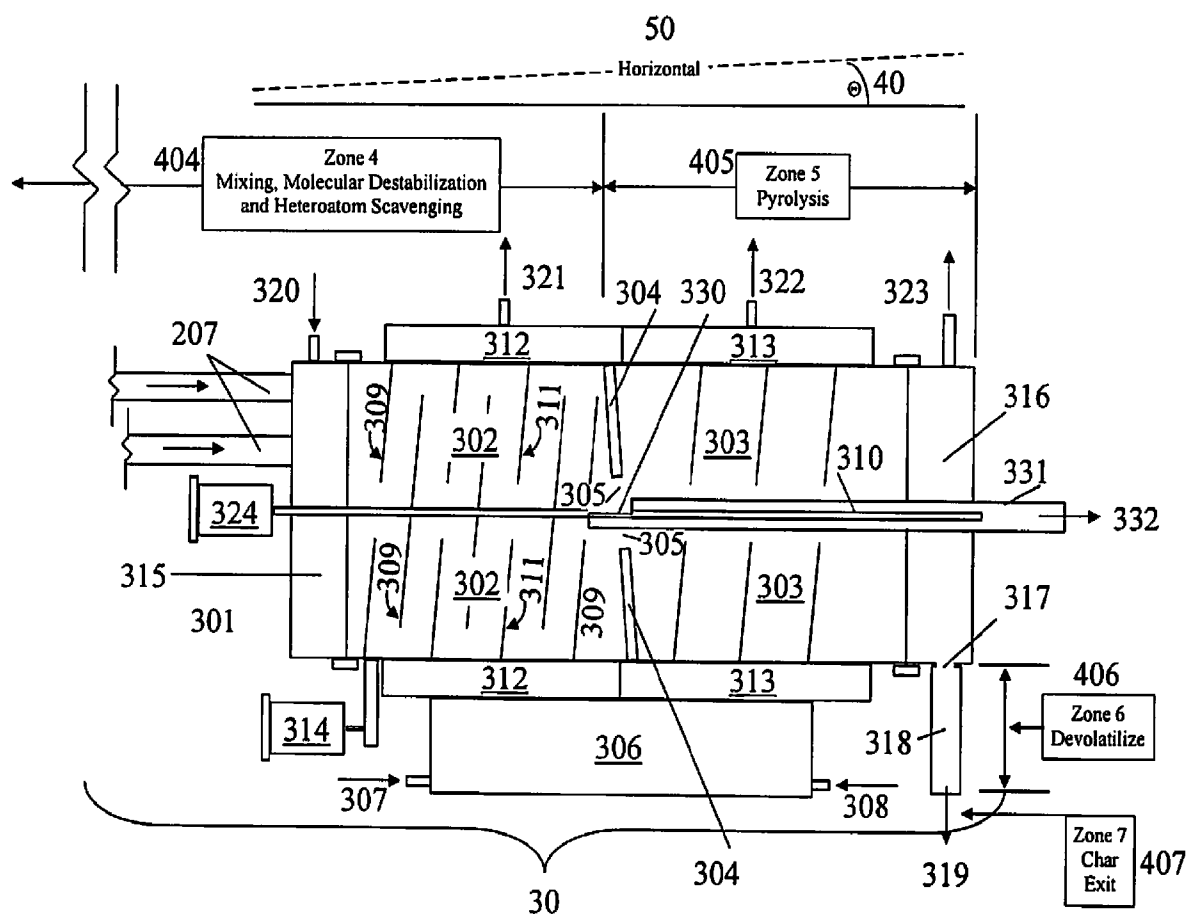


FIG. 3

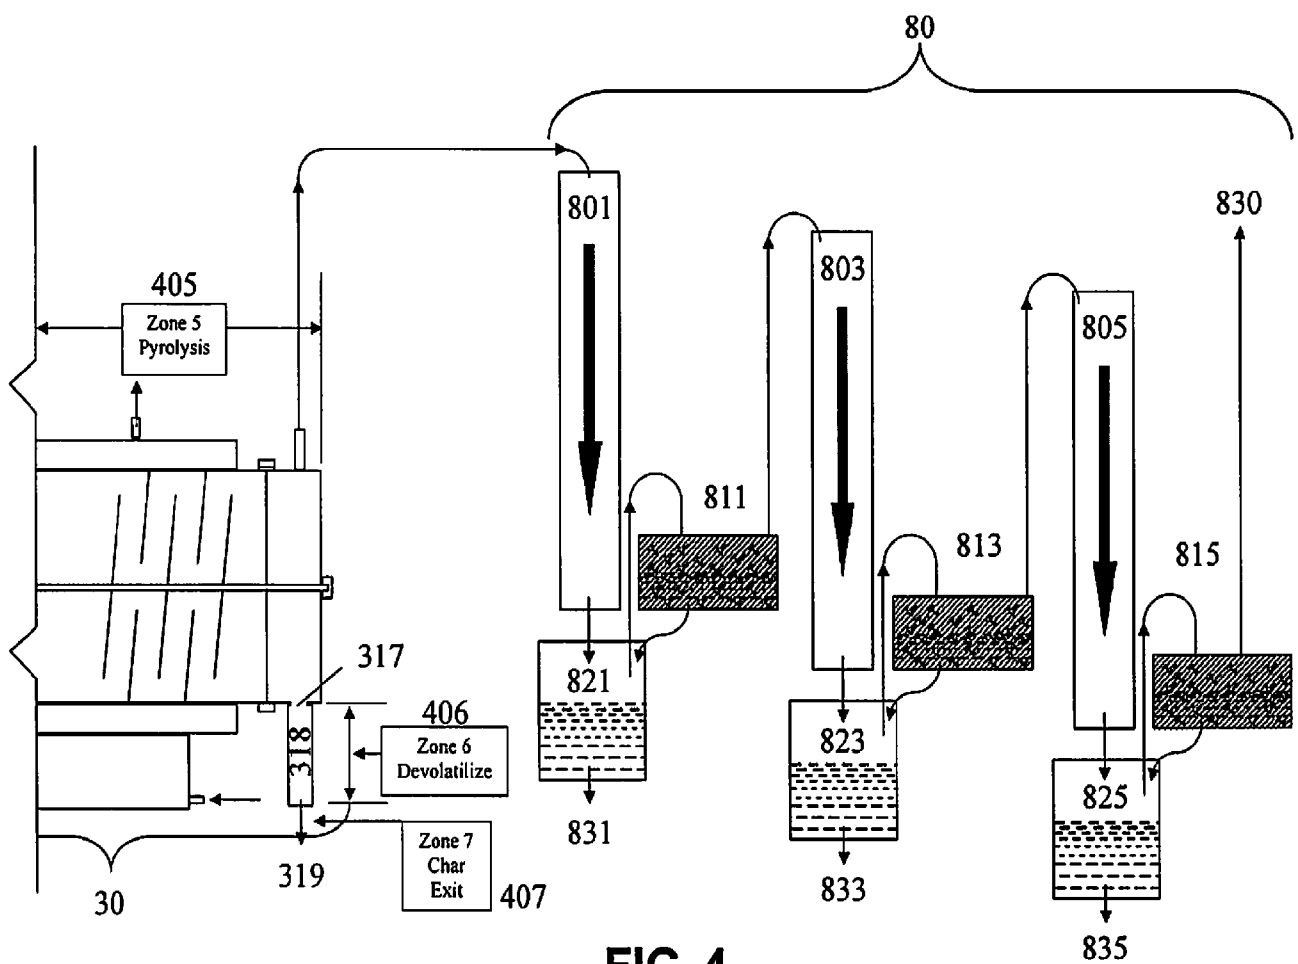


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2013/026412

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - C10G 1/00 (2013.01)

USPC - 208/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - B29C 47/00; C07C 1/00; C10B 7/00; C10G 1/00, 1/10 (2013.01)

USPC - 202/93, 96; 208/46, 106

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
CPC - B29C 47/00; C07C 1/00; C10B 7/00; C10G 1/00, 1/10 (2013.01)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Orbit.com, Google Patents, Google Scholar

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2009/0007484 A1 (SMITH) 08 January 2009 (08.01.2009) entire document	1-33
A	US 2012/0017498 A1 (RUGG) 26 January 2012 (26.01.2012) entire document	1-33
A	US 2006/0280669 A1 (JONES) 14 December 2006 (14.12.2006) entire document	1-33
A	US 2011/0089015 A1 (KELLEY) 21 April 2011 (21.04.2011) entire document	1-33

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

03 April 2013

Date of mailing of the international search report

19 APR 2013

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774