

(51) International Patent Classification:
H05B 41/392 (2006.01)(21) International Application Number:
PCT/US2014/014299(22) International Filing Date:
31 January 2014 (31.01.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/777,753 26 February 2013 (26.02.2013) US(71) Applicant: **LUTRON ELECTRONICS CO., INC.**
[US/US]; 7200 Suter Road, Coopersburg, PA 18036-1299
(US).(72) Inventors: **CHITTA, Venkatesh**; 4162 Huckleberry
Drive, Center Valley, PA 18034 (US). **MACADAM, Rus-**
sell, L.; 3076 Flint Hill Road, Coopersburg, PA 18036
(US).(74) Agents: **PISCITELLI, Michael** et al.; Condo Roccia LLP,
One Liberty Place, Suite 2200, 1650 Market Street, Phil-
adelphia, PA 19103 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

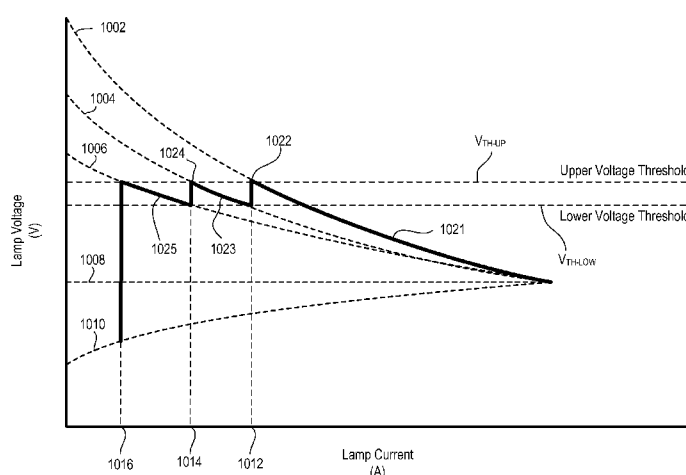
(54) Title: CONTROLLING AN ELECTRONIC DIMMING BALLAST DURING LOW TEMPERATURE OR LOW MERCURY
CONDITIONS

FIG. 4

(57) Abstract: An electronic dimming ballast or light emitting diode (LED) driver for driving a gas discharge lamp or LED lamp may be operable to control the lamp to avoid flickering and flashing of the lamp during low temperature or low mercury conditions. Such a ballast or driver may include a control circuit that is operable to adjust the intensity of the lamp. Adjusting the intensity of the lamp may include decreasing the intensity of the lamp. The control circuit may be operable to stop adjustment of the intensity of the lamp if a magnitude of the lamp voltage across the lamp is greater than an upper threshold, and subsequently begin to adjust the intensity of the lamp when the lamp voltage across the lamp is less than a lower threshold. Subsequently beginning to adjust the intensity of the lamp may include subsequently decreasing the intensity of the lamp.

CONTROLLING AN ELECTRONIC DIMMING BALLAST DURING LOW TEMPERATURE OR LOW MERCURY CONDITIONS

CROSS –REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority from U.S. Patent Application No. 13/777,753, filed February 26, 2013 entitled “CONTROLLING AN ELECTRONIC DIMMING BALLAST DURING LOW TEMPERATURE OR LOW MERCURY CONDITIONS”.

BACKGROUND

[0002] In order to reduce energy consumption of artificial illumination sources, the use of high-efficiency light sources is increasing, while the use of low-efficiency light sources is decreasing. Examples of high-efficiency light sources may include gas discharge lamps (*e.g.*, compact fluorescent lamps), phosphor-based lamps, high-intensity discharge (HID) lamps, light-emitting diode (LED) light sources, and other types of high-efficacy light sources. Examples of low-efficiency light sources may include incandescent lamps, halogen lamps, and other low-efficacy light sources.

[0003] Lighting control devices, such as dimmer switches, for example, may allow for controlling the amount of power delivered from a power source to a lighting load, such that the intensity of the lighting load may be dimmed from a high-end (*e.g.*, maximum) intensity to a low-end (*e.g.*, minimum) intensity. Both high-efficiency and low-efficiency light sources may be dimmed, but the dimming characteristics of these two types of light sources may differ.

[0004] Due to the increased desire to use more high-efficiency light sources, fluorescent lamps, for example, are now being installed outdoors where the lamps may be subject to low operating temperatures. A ballast may be required to regulate the current conducted through a

fluorescent lamp to properly illuminate the lamp. Fluorescent lamps may not operate correctly and may flicker if the lamps are dimmed in cold ambient temperatures. This may be intensified if the lamp has a low mercury concentration. As the lamp is dimmed towards the low-end intensity, the magnitude of a lamp voltage required to drive the lamp may increase. As the temperature of the lamp decreases, the magnitude of the lamp voltage required to drive the lamp may further increase. The increase in lamp voltage required to drive the lamp may cause unnecessary stress on the electrical components of the ballast, as well as instability in the intensity of the lamp near the low-end intensity of the lamp, which may consequently produce visible flickering or flashing of the lamp. A load control device for high-efficiency light sources that may stably dim a light source to low intensities without flicker in low temperature and/or low mercury conditions may be desired.

[0005] FIG. 1 is a perspective view of an example gas discharge lamp fixture 100. The fixture 100 may include a ballast 102, lamp sockets 104, and a housing 106. The ballast 102 and the sockets 104 may be fixed to the housing 106. The lamp sockets 104 may be sized and situated within the housing 106 to hold the lamps 108. The ballast 102 may have wires 110 to connect the ballast 102 to the sockets 104 for driving the lamps 108 and for providing heating current.

[0006] FIGs. 2A and 2B show example exterior lamp fixtures 202, 210. These fixtures, typically made of metal or plastic, are particularly suited for outdoor use. In FIG. 2A, the exterior fixture 202 includes a housing 204 and a translucent cover 206. The housing 204 may be mounted to an exterior ceiling or wall. Gas discharge lamps 208 may be attached to the housing via lamp sockets (not shown). A ballast (not shown) may be contained in the housing, as well. Similarly, the fixture 210 shown in FIG. 2B includes a housing 212 and a translucent cover 214. This fixture 210 is shown with a compact fluorescent lamp 216. The compact fluorescent lamp 216 may include an internal ballast contained in the base structure of the lamp. In both examples, the covers 206, 214 may protect the lamps 208, 216 and the ballasts from weather, including water and humidity. However, the lamps and the ballasts may still be subject to the cold ambient temperatures and the corresponding effects described above.

[0007] Additional background may be found in commonly assigned U.S. Patent Application No. 12/955,988, filed November 30, 2010, entitled METHOD OF CONTROLLING AN ELECTRONIC DIMMING BALLAST DURING LOW TEMPERATURE CONDITIONS, and commonly assigned U.S. Patent Application No. 13/629,903 filed September 28, 2012, entitled FILAMENT MISWIRE PROTECTION IN AN ELECTRONIC DIMMING BALLAST, the entire disclosures of each of which are hereby incorporated by reference.

SUMMARY

[0008] An electronic dimming ballast for driving a gas discharge lamp may be operable to control the lamp to avoid flickering and flashing of the lamp during low temperature or low mercury conditions. Such a ballast may include a control circuit that is operable to adjust the intensity of the lamp. Adjusting the intensity of the lamp may include decreasing the intensity of the lamp. The control circuit may be operable to stop adjustment of the intensity of the lamp if a magnitude of the lamp voltage across the lamp is greater than an upper threshold, and subsequently begin to adjust the intensity of the lamp when the lamp voltage across the lamp is less than a lower threshold. Subsequently beginning to adjust the intensity of the lamp may include subsequently decreasing the intensity of the lamp. The control circuit may be operable to determine a magnitude of the lamp voltage across the lamp.

[0009] The control circuit may be operable to decrease the intensity of the lamp at a first rate and subsequently decrease the intensity of the lamp at a second rate. The second rate may be slower than the first rate. The magnitude of the lamp voltage may depend on a lamp temperature of the lamp and/or a mercury concentration of the lamp. The control circuit may be further operable to receive a lamp voltage control signal representative of the magnitude of a lamp voltage across the lamp.

[0010] Such a ballast may further include an inverter circuit for receiving a DC bus voltage and for generating a high-frequency output voltage, and a resonant tank circuit for receiving the high-frequency output voltage and generating a sinusoidal voltage for driving the lamp.

[0011] A method for driving a gas discharge lamp may include adjusting an intensity of the lamp, determining a magnitude of a lamp voltage across the lamp, stopping adjustment of the intensity of the lamp if the magnitude of the lamp voltage across the lamp is greater than an upper threshold, and subsequently beginning to adjust the intensity of the lamp when the lamp voltage across the lamp is less than a lower threshold.

[0012] An electronic dimming ballast for controlling the intensity of a gas discharge lamp may include a control circuit that may be operable to decrease an intensity of the lamp at a first rate, determine that a magnitude of a lamp voltage across the lamp is above an upper threshold, increase the intensity of the lamp, determine that the magnitude of the lamp voltage across the lamp is below a lower threshold, and decrease the intensity of the lamp at a second rate until the magnitude of the lamp voltage across the lamp is above the upper threshold or the intensity of the lamp is at a target intensity level. The intensity of the lamp may be increased such that the magnitude of the lamp voltage across the lamp is equal to or below the upper threshold. The intensity of the lamp may be periodically increased by a predetermined amount. The target intensity level may be the minimum intensity of the lamp.

[0013] A method for driving a gas discharge lamp may include decreasing an intensity of the lamp at a first rate, determining that a magnitude of a lamp voltage across the lamp is above an upper threshold, increasing the intensity of the lamp, determining that the magnitude of the lamp voltage across the lamp is below a lower threshold, and decreasing the intensity of the lamp at a second rate until the magnitude of the lamp voltage across the lamp is above the upper threshold or the intensity of the lamp is at a target intensity level.

[0014] An electronic dimming ballast for controlling an amount of power delivered to an electrical load may include a control circuit. The control circuit may be operable to adjust a first magnitude of a first operating characteristic of the electrical load, measure a second magnitude of a second operating characteristic of the electrical load, the second operating characteristic different than the first operating characteristic, stop adjustment of the first magnitude of the first operating characteristic of the electrical load if the second magnitude of the second operating characteristic

crosses a first threshold, and subsequently begin to adjust the first magnitude of the first operating characteristic of the electrical load when the second magnitude of the second operating characteristic crosses a second threshold. The first operating characteristic may include a load current conducted through the electrical load. The second operating characteristic may include a load voltage produced across the electrical load.

[0015] The control circuit may be operable to stop adjustment of a magnitude of the load current if a magnitude of the load voltage is greater than the first threshold. The control circuit may be operable to decrease the magnitude of the load current conducted through the load. The control circuit may be operable to subsequently decrease the magnitude of the load current when the magnitude of the load voltage is less than the second threshold. The electrical load may include a gas discharge lamp.

[0016] The control circuit may be operable to increase the magnitude of the load current conducted through the load. The control circuit may be operable to subsequently increase the magnitude of the load current when the magnitude of the load voltage is less than the second threshold. The electrical load may include an LED light source.

[0017] A method for controlling an amount of power delivered to an electrical load may include adjusting a first magnitude of a first operating characteristic of the electrical load, measuring a second magnitude of a second operating characteristic of the electrical load, the second operating characteristic different than the first operating characteristic, stopping adjustment of the first magnitude of the first operating characteristic of the electrical load if the second magnitude of the second operating characteristic crosses a first threshold, and subsequently beginning to adjust the first magnitude of the first operating characteristic of the electrical load when the second magnitude of the second operating characteristic crosses a second threshold.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a perspective view of an example gas discharge lamp fixture.

[0019] FIGs. 2A and 2B are perspective views of example outdoor fixtures.

- [0020] FIG. 3 is a simplified block diagram of an example of an electronic dimming ballast.
- [0021] FIG. 4 is a graph illustrating an example of the relationship between lamp current and lamp voltage during an adaptive low-end procedure.
- [0022] FIG. 5A is an example plot of the magnitude of lamp current with respect to time during a current-control lockout procedure executed by a control circuit of a ballast when the ballast strikes a good lamp.
- [0023] FIG. 5B is an example plot of the magnitude of lamp current with respect to time during a current-control lockout procedure executed by a control circuit of a ballast when the ballast strikes a bad lamp.
- [0024] FIG. 6 is a simplified diagram of an example of a current-control lockout procedure executed by a control circuit of a ballast.
- [0025] FIG. 7 is a simplified diagram of another example of a current-control lockout procedure executed by a control circuit of a ballast.

DETAILED DESCRIPTION

[0026] FIG. 3 is a block diagram of an example of an electronic dimming ballast 300. The ballast 300 may include a hot terminal H and a neutral terminal N that are adapted to be coupled to an alternating-current (AC) power source (not shown) for receiving an AC mains line voltage V_{AC} . The ballast 300 may be adapted to be coupled between the AC power source and a gas discharge lamp 306 (*e.g.*, a fluorescent lamp). The ballast 300 may be operable to control the amount of power delivered to the lamp and thus the intensity of the lamp 306. The ballast 300 may include an RFI (radio frequency interference) filter circuit 310 for minimizing the noise provided on the AC mains, and a rectifier circuit 320 for generating a rectified voltage V_{RECT} from the AC mains line voltage V_{AC} . The ballast 300 may include a boost converter 330 for generating a direct-current (DC) bus voltage V_{BUS} across a bus capacitor C_{BUS} . The DC bus voltage V_{BUS} may have a magnitude (*e.g.*, approximately 465 V) that is greater than the peak magnitude V_{PK} of the AC mains line

voltage V_{AC} (e.g., approximately 170 V). The boost converter 330 may operate as a power-factor correction (PFC) circuit for improving the power factor of the ballast 300. The ballast 300 may include a load control circuit 340 that includes an inverter circuit 346 and a resonant tank circuit 348. The inverter circuit 346 may convert the DC bus voltage V_{BUS} to a high-frequency AC voltage. The resonant tank circuit 348 may couple the high-frequency AC voltage generated by the inverter circuit to filaments of the lamp 306.

[0027] The ballast 300 may include a control circuit 360 for controlling a present intensity L_{PRES} of the lamp 306 to a target intensity L_{TARGET} between a low-end (e.g., minimum) intensity L_{LE} (e.g., 1%) and a high-end (e.g., maximum) intensity L_{HE} (e.g., 100%). The control circuit 360 may include a microprocessor, a microcontroller, a programmable logic device (PLD), an application specific integrated circuit (ASIC), or any suitable type of controller or control circuit. The control circuit 360 may be coupled to the inverter circuit 346 and provide a drive control signal V_{DRIVE} to the inverter circuit for controlling the magnitude of a lamp voltage V_L generated across the lamp 306 and a lamp current I_L conducted through the lamp. The present intensity L_{PRES} of the lamp 306 may be proportional to the magnitude of the lamp current I_L that is presently being conducted through the lamp. The control circuit 360 may be operable to turn the lamp 306 on and off, and adjust (e.g., dim) the present intensity L_{PRES} of the lamp. The control circuit 360 may receive a lamp current feedback signal V_{FB-IL} , which may be generated by a lamp current measurement circuit 370 and is representative of the magnitude of the lamp current I_L . The control circuit 360 may execute a current control routine to adjust the present intensity L_{PRES} of the lamp 306 by controlling the magnitude of the lamp current I_L supplied to (e.g., and conducted through) the lamp.

[0028] The control circuit 360 may receive a lamp voltage feedback signal V_{FB-VL} , which may be generated by a lamp voltage measurement circuit 372, and is representative of the magnitude of the lamp voltage V_L . The control circuit 360 may infer a lamp temperature T_L of the fluorescent lamp 306 from the magnitude of the lamp voltage V_L . Since the lamp voltage V_L may depend on the lamp temperature T_L of the fluorescent lamp 306, the lamp voltage feedback signal V_{FB-VL} generated by the lamp voltage measurement circuit 372 may be representative of the lamp temperature T_L of

the fluorescent lamp 306. The ballast 300 may include a power supply 362, which may receive the bus voltage V_{BUS} and generate a DC supply voltage V_{CC} (e.g., approximately five volts) for powering the control circuit 360 and other low-voltage circuitry of the ballast.

[0029] The ballast 300 may include a phase-control circuit 390 for receiving a phase-control voltage V_{PC} (e.g., a forward or reverse phase-control signal) from a standard phase-control dimmer (not shown). The control circuit 360 may be coupled to the phase-control circuit 390, such that the control circuit 360 may be operable to determine the target intensity L_{TARGET} and a corresponding target lamp current I_{TARGET} for the lamp 306 from the phase-control voltage V_{PC} . The ballast 300 may include a communication circuit 392, which may be coupled to the control circuit 360 and allows the ballast to communicate (e.g., transmit and receive digital messages) with the other control devices on a communication link (not shown), e.g., a wired communication link or a wireless communication link, such as a radio-frequency (RF) or an infrared (IR) communication link. Examples of ballasts having communication circuits are described in greater detail in commonly-assigned U.S. Patent No. 7,489,090, issued February 10, 2009, entitled ELECTRONIC BALLAST HAVING ADAPTIVE FREQUENCY SHIFTING; U.S. Patent No. 7,528,554, issued May 5, 2009, entitled ELECTRONIC BALLAST HAVING A BOOST CONVERTER WITH AN IMPROVED RANGE OF OUTPUT POWER; and U.S. Patent No. 7,764,479, issued July 27, 2010, entitled COMMUNICATION CIRCUIT FOR A DIGITAL ELECTRONIC DIMMING BALLAST, the entire disclosures of which are hereby incorporated by reference. The ballasts 312 may be two-wire ballasts operable to receive power and communication (e.g., digital messages) via two power lines from the digital ballast controller 310, for example, as described in greater detail in U.S. Patent Application No. 13/359,722, filed January 27, 2012, entitled DIGITAL LOAD CONTROL SYSTEM PROVIDING POWER AND COMMUNICATION VIA EXISTING POWER WIRING, the entire disclosure of which is hereby incorporated by reference.

[0030] As disclosed herein, the control circuit 360 may use a current-control lockout procedure to control the present intensity L_{PRES} of the fluorescent lamp 306 (e.g., via the lamp current I_L that may be conducted through the lamp) throughout the operation of a ballast 300. Cold lamps and/or lamps with low mercury concentration may require high (e.g., extremely high) voltages

at low currents to operate. For example, cold lamps and/or lamps with low mercury concentration may require twice as much voltage (e.g., approximately 360 volts) to operate at low currents than lamps operating under normal conditions at low currents, which may require, for example, approximately 180 volts. Therefore, lamps that are cold and/or have low mercury concentration may require higher voltages to operate at lower intensity levels (e.g., which correspond to lower operating currents). Potential issues relating to operating lamps at high voltages are described herein (e.g., flickering). The current-control lockout procedure disclosed herein may deter the ballast 300 from operating the lamp 306 at high voltages by controlling the present intensity L_{PRES} of the lamp 306 (e.g., via the lamp current I_L that is conducted through the lamp). As the lamp 306 heats up and/or more mercury is released, the lamp voltage V_L required for operation at low-end intensities may drop. As the magnitude of the lamp voltage V_L required for operation at low-end is reduced, the current-control lockout procedure may allow the lamp 306 to reach its actual low-end intensity or current level. The current-control lockout procedure described herein may be incorporated into an electronic dimming ballast, such as via a control circuit as described in connection with FIG. 3.

[0031] The control circuit 360 may compare the magnitude of the lamp voltage V_L to an upper voltage threshold V_{TH-UP} and a lower voltage threshold V_{TH-LOW} . The upper voltage threshold V_{TH-UP} may represent an upper limit of the lamp voltage V_L below which the lamp 306 exhibits consistent and desired performance. For example, if the lamp voltage V_L exceeds the upper voltage threshold V_{TH-UP} , the lamp 306 may flicker or otherwise exhibit less than ideal performance. The lower voltage threshold V_{TH-LOW} may represent a guideline that may be used to determine when the magnitude of the lamp voltage V_L is sufficiently low that dimming of the lamp 306 may occur without hampering the desired performance of the lamp. The upper voltage threshold V_{TH-UP} and the lower voltage threshold V_{TH-LOW} may be fixed or adjustable. The upper voltage threshold V_{TH-UP} and the lower voltage threshold V_{TH-LOW} may be configured specifically for the ballast 300 and/or type of lamp being controlled. If the magnitude of the lamp voltage V_L exceeds the upper voltage threshold V_{TH-UP} , the control circuit 360 may be operable to lockout the current control routine to freeze (e.g., stop adjustment of) the lamp current I_L until the lamp 306 warms up and the magnitude

of the lamp voltage drops below the lower voltage threshold V_{TH-LOW} , after which the control circuit may begin to adjust the lamp current I_L once again.

[0032] FIG. 4 is a graph showing an example relationship between the lamp current I_L and the lamp voltage V_L during a current-control lockout procedure executed by a control circuit of a ballast (e.g., the control circuit 360 of the ballast 300 of FIG. 3). The example scenario of FIG. 4 may be where a control circuit is attempting to control a cold and/or mercury depleted lamp to the low-end intensity L_{LE} (e.g., the minimum intensity level). An example scenario may include the following. At 1021, when first struck and attempting to dim to low-end intensity L_{LE} , the lamp 306 may be operating with an I-V (e.g., current-voltage) curve 1002. The control circuit 360 may adjust the present intensity L_{PRES} of the lamp 306 by adjusting the lamp current I_L at a first rate (e.g., an initial or pre-lockout rate). For example, the control circuit 360 may decrease the present intensity L_{PRES} towards the target intensity L_{TARGET} , which may be the low-end intensity L_{LE} of the lamp 306 (e.g., at lamp current level 1016).

[0033] At 1022, if the magnitude of the lamp voltage V_L is equal to or exceeds the upper voltage threshold V_{TH-UP} (e.g., at lamp current level 1012), then the control circuit 360 may stop adjusting the lamp current I_L and maintain the magnitude of the lamp current constant for a period of time. As the lamp 306 heats up and/or more mercury is released, the I-V curve may begin to flatten out (e.g., as shown by the progression from I-V curve 1002, to I-V curve 1004, to I-V curve 1006, to I-V curve 1008, to I-V curve 1010). After a period of time while the lamp current I_L is maintained constant, the I-V curve may begin to flatten out and/or reach its characteristic shape, for example, by leveling out from the I-V curve 1002 to the I-V curve 1004. If the I-V curve adjusts such that the magnitude of the lamp voltage V_L drops below the lower voltage threshold V_{TH-LOW} , the control circuit 360 may once again begin decreasing the lamp current I_L towards the target lamp current I_{TARGET} (e.g., at 1023 as shown in FIG. 4), for example, at a second rate (e.g., a post-lockout rate) that may be slower than the first rate.

[0034] If the magnitude of the lamp voltage V_L overshoots the upper voltage threshold V_{TH-UP} as the magnitude of the lamp current I_L is decreasing (e.g., at 1022 in FIG. 4), the

control circuit 360 may increase the magnitude of the lamp current at a predetermined rate or by a predetermined amount, for example, until the magnitude of the lamp voltage is once again below the upper voltage threshold V_{TH-UP} . The magnitude of the lamp current I_L may be periodically increased by the predetermined amount (*e.g.*, every 104 μ sec). After the magnitude of the lamp voltage V_L is below the upper voltage threshold V_{TH-UP} , the control circuit 360 may then stop adjusting the lamp current I_L . The control circuit 360 may anticipate that the magnitude of the lamp voltage V_L will meet or exceed the upper voltage threshold V_{TH-UP} and adjust accordingly (*e.g.*, stop, reduce the rate at which the intensity of the lamp may be decreasing, *etc.*), for example, such that the magnitude of the lamp voltage may not exceed the upper voltage threshold.

[0035] At 1024, if the magnitude of the lamp voltage V_L meets or exceeds the upper voltage threshold V_{TH-UP} again, then the control circuit 360 may freeze the target intensity L_{TARGET} of the lamp 306 for a period of time (*e.g.*, as shown at current level 1014) and/or may increase the magnitude of the lamp current I_L at a predetermined rate or by a predetermined amount if there is an overshoot of the lamp voltage V_L . This may be a similar process as described above when the lamp current I_L reached current level 1012. For example, the current-control lockout procedure may freeze adjustment of the lamp current I_L and/or may increase the lamp current I_L until the magnitude of the lamp voltage V_L is below the upper voltage threshold V_{TH-UP} .

[0036] At 1025, if the magnitude of the lamp voltage V_L drops below the lower voltage threshold V_{TH-LOW} , then the control circuit 360 may once again begin decreasing the magnitude of the lamp current I_L at the second rate or a third rate that is slower than the second rate. At this point, the I-V curve 1006 may not have settled to its characteristic shape, for example, as represented by I-V curve 1010 in FIG. 4. Even though the I-V curve had yet to reach its characteristic shape, the control circuit 360 may be able to adjust the present intensity I_{PRES} of the lamp 306 (*e.g.*, via adjusting the lamp current I_L), such that the lamp reaches the low-end intensity L_{LE} .

[0037] Although the scenario of FIG. 4 includes two instances of the magnitude of the lamp voltage V_L exceeding the upper voltage threshold V_{TH-UP} (*e.g.*, at lamp current level 1012 and lamp current level 1014), the current-control lockout procedure may be implemented in scenarios where

the magnitude of the lamp voltage V_L meets or exceeds the upper voltage level V_{TH-UP} any number of times (*e.g.*, any number greater than or equal to one).

[0038] FIG. 5A is an example plot of the magnitude of the lamp current I_L with respect to time on a good lamp during a current-control lockout procedure executed by a control circuit of a ballast (*e.g.*, the control circuit 360 of the ballast 300) when the lamp is first turned on to the low-end intensity L_{LE} . FIG. 5B is an example plot of the magnitude of the lamp current I_L with respect to time on a bad lamp during a current-control lockout procedure executed by a control circuit of a ballast (*e.g.*, the control circuit 360 of the ballast 300) when the lamp is first turned on to the low-end intensity L_{LE} .

[0039] After the lamp 306 strikes at time t_1 , for example as shown in FIG. 5A, the control circuit 360 may control the present intensity L_{PRES} of the lamp 306 on to an initial intensity L_{INIT} (*e.g.*, approximately 15%) and then decrease the present intensity L_{PRES} of the lamp 306 to the target intensity L_{TARGET} at time t_2 using the first fade rate (*e.g.*, the initial rate). Specifically, the control circuit 360 is operable to decrease the magnitude of the lamp current I_L of the lamp 306 from an initial current I_{INIT} (*e.g.*, which may correspond to the initial intensity L_{INIT}) to the target current I_{TARGET} (*e.g.*, which may correspond to the target intensity L_{TARGET}). For example, the target intensity L_{TARGET} may be the low-end intensity L_{LE} (*e.g.*, approximately 5%) at which the magnitude of the lamp current I_L may be controlled to a low-end current I_{LE} . In addition, the first fade rate may be a constant fade rate (*e.g.*, approximately 1/3% per second) equivalent to approximately 30 seconds from the initial intensity L_{INIT} (*e.g.*, 15%) to the low-end intensity L_{LE} (*e.g.*, approximately 5%). Such a fade rate may be utilized because it may be slow enough that a user may not be able to notice that the lamp 306 is actively dimming. After the magnitude of the lamp current I_L reaches the low-end current I_{LE} at time t_2 , the control circuit 360 maintains the magnitude of the lamp current I_L constant at the low-end current I_{LE} . Thus, as shown in FIG. 5A, the control circuit 360 may decrease the magnitude of the lamp current I_L to the target current I_{TARGET} at the first fade rate on a good lamp without freezing adjustment of the lamp current I_L (*e.g.*, without the magnitude of the lamp voltage V_L exceeding the upper threshold level V_{TH-UP}).

[0040] The magnitude of the lamp voltage V_L may be checked (*e.g.*, periodically checked) to determine if the magnitude of the lamp voltage V_L meets or exceeds the upper voltage threshold V_{TH-UP} . If at any time (*e.g.*, during a dimming procedure) the magnitude of the lamp voltage V_L meets or exceeds the upper voltage threshold V_{TH-UP} , the control circuit 360 may operate to freeze adjustments of the lamp current I_L until the magnitude of the lamp voltage drops below the lower voltage threshold V_{TH-LOW} . For example, when the lamp 306 is first struck at time t_1 as shown in FIG. 5B, the control circuit 360 may decrease the magnitude of the lamp current I_L from the initial lamp current I_{INIT} at the first rate. When the magnitude of the lamp current I_L drops to an intermediate lamp current I_{INTER} (*e.g.*, which may correspond to a present intensity L_{PRES} of approximately 8%), the magnitude of the lamp voltage V_L may meet or exceed the upper voltage threshold V_{TH-UP} . When the magnitude of the lamp voltage V_L meets or exceeds the upper voltage threshold V_{TH-UP} at time t_2 in FIG. 5B, the control circuit 360 stops decreasing the present intensity L_{PRES} of the lamp 306, and maintains the magnitude of the lamp current I_L constant.

[0041] If the magnitude of the lamp voltage V_L drops below the lower voltage threshold V_{TH-LOW} , the control circuit 360 may decrease the present intensity L_{PRES} of the lamp 306 at the second fade rate (*e.g.*, the post-lockout rate) as shown at time t_3 in FIG. 5B. The control circuit 360 may decrease the present intensity L_{PRES} until the present intensity reaches the target intensity L_{TARGET} or the magnitude of the lamp voltage V_L exceeds the upper voltage threshold V_{TH-UP} . The second fade rate may be slower than the first fade rate. For example, as illustrated in FIG. 5B, the second fade rate at which the control circuit 360 may decrease the present intensity L_{PRES} of the lamp 306 may be approximately three times slower than the first fade rate. The second fade rate may be sized such that adjustment of the present intensity L_{PRES} of the lamp 306 at the second fade rate is not visually perceptible to a user. When the magnitude of the lamp current I_L reaches the target lamp current I_{TARGET} (*e.g.*, the low-end current I_{LE}) at time t_4 , the control circuit 360 stops adjusting the lamp current I_L .

[0042] FIG. 6 is a simplified diagram of an example of a current-control lockout procedure 600, which may be executed by a control circuit of a ballast (*e.g.*, the control circuit 360 of the ballast 300 as depicted in FIG. 3). The current-control lockout procedure 600 may begin

when a lamp is first turned on and continue during normal operation of the ballast 300. For example, the current-control lockout procedure 600 may be executed periodically, for example, about every 104 microseconds.

[0043] The current-control lockout procedure 600 may run in concert with the current control routine that controls the present intensity L_{PRES} of the lamp 306 to a desired intensity level (*e.g.*, target intensity L_{TARGET}). For example, when the present intensity L_{PRES} of the lamp 306 is adjusted (*e.g.*, dimmed) to a low-end intensity L_{LE} (*e.g.*, at or near the minimum intensity of the lamp), the current control routine may cause the present intensity L_{PRES} of the lamp to be decreased. The present intensity L_{PRES} of the lamp 306 may be decreased by controlling (*e.g.*, decreasing) the lamp current I_L conducted through the lamp. The desired lamp level may be set by the user. In response, the current control routine may control the present intensity L_{PRES} of the lamp 306 to the desired intensity level by adjusting the magnitude of the lamp current I_L being conducted through the lamp. For example, when the lamp 306 is first struck (*e.g.*, when the lamp is cold) and the desired lamp level is relatively low (*e.g.*, below 15%), the current control routine may decrease the present intensity I_{PRES} of the lamp at a relatively slow fade rate, for example, a fade rate equivalent to approximately a 30 second fade from 15% lamp current to 5% lamp current. Such a fade rate may be utilized because it may be slow enough that a human observer may not be able to notice that the lamp is actively dimming.

[0044] At 604, the control circuit 360 may sample (*e.g.*, periodically sample) the lamp voltage feedback signal V_{FB-VL} . For example, as described herein, the lamp voltage feedback signal V_{FB-VL} may be representative of the lamp voltage (V_L) and accordingly the lamp temperature T_L of the lamp 306. At 606, the control circuit 360 may determine if the current control routine is presently locked, for example, by determining whether a LOCKOUT flag is set. For example, the adjustment of the lamp current I_L by the current control routine may be stopped, and the LOCKOUT flag (*e.g.*, a software variable, memory location, or the like) may indicate and/or cause the adjustment of the lamp current to stop.

[0045] If the LOCKOUT flag is not set, at 608, the control circuit 360 may determine (*e.g.*, periodically determine) whether or not the magnitude of the lamp voltage V_L is at or above the upper voltage threshold (V_{TH-UP}). The control circuit 360 may sample the lamp voltage feedback signal V_{FB-VL} and determine whether or not the magnitude of the lamp voltage V_L is at or above the upper voltage threshold V_{TH-UP} , for example, on a periodic basis or a substantially continuous basis.

[0046] If the magnitude of the lamp voltage V_L is less than the upper voltage threshold V_{TH-UP} , then the control circuit 360, at 610, may set the LOCKOUT Flag. Setting the LOCKOUT flag may effectively stop the current control routine from adjusting the lamp current I_L . If the magnitude of the lamp voltage V_L is not less than the upper voltage threshold V_{TH-UP} , then the current-control lockout procedure 600 may end. The current-control lockout procedure may run again at the next period (*e.g.*, in 104 μ sec), for example, as mentioned above. This decision point, at 608, and the corresponding action, at 610, may insure that the magnitude of the lamp voltage V_L does not exceed the upper threshold voltage V_{TH-UP} , for example, as illustrated at 1022 and 1024 in FIG. 4.

[0047] When the LOCKOUT Flag is set, the control circuit 360 may determine, at 612, whether the magnitude of the lamp voltage V_L is less than a lower voltage threshold V_{TH-LOW} . If the magnitude of the lamp voltage V_L is not less than a lower voltage threshold V_{TH-LOW} , the current-control lockout procedure 600 may end. The current-control lockout procedure 600 may run again at the next period, for example, as mentioned above. If the magnitude of the lamp voltage V_L is less than a lower voltage threshold V_{TH-LOW} , the LOCKOUT Flag may be cleared, at 614. This may, in effect, allow the control current routine begin adjusting the magnitude of the lamp current I_L to control the magnitude of the lamp to the desired intensity level. For example, subsequent to stopping adjustment of the present intensity L_{PRES} of the lamp 306, the control circuit 360 may begin to adjust the present intensity L_{PRES} when the magnitude of the lamp voltage V_L crosses the second threshold (*e.g.*, the lower voltage threshold $V_{L-T/H}$). This subsequent adjustment, which may be a restarting of the current control routine, may correspond to 1023 and 1025 in the example illustrated in FIG. 4.

[0048] The current control routine may adjust the present intensity L_{PRES} of the lamp 306 to the desired intensity level at one or more fade rates. These fade rates may determine how quickly the control loop drives the lamp to the desired intensity level. This process 600 may have two fade rates, for example, a pre-lockout fade rate and a post-lockout fade rate. Typically, the post-lockout fade rate may be slower than the pre-lockout fade rate. At about the time the LOCKOUT Flag is cleared, at 614, the operable fade rate may be the post-lockout fade rate. This action may be consistent with the two fade rates illustrated in FIG. 5B. The rates may be selected to ensure that the intensity of the lamp does not fade too quickly and cause the iteration to repeat and the lamp to oscillate.

[0049] FIG. 7 is a simplified diagram of another example of a current-control lockout procedure 700 executed by a control circuit of a ballast (*e.g.*, the control circuit 360 of the ballast 300 of FIG. 3). With regard to steps 604-616, the current-control lockout procedure 700 of FIG. 7 may operate, for example, as described herein with reference to current-control lockout procedure 600. When the LOCKOUT Flag is set, at 702, the control circuit 360 may determine (*e.g.*, periodically determine) whether or not the magnitude of the lamp voltage V_L is at or above the upper voltage threshold V_{TH-UP} . If the magnitude of the lamp voltage V_L is at or above the upper voltage threshold V_{TH-UP} at this point in the procedure, the control circuit 360 may decrease the magnitude of the lamp voltage V_L , for example, by an amount ΔV_L . For example, the magnitude of the lamp voltage V_L may be decreased by increasing the present intensity L_{PRES} of the lamp 306 (*i.e.*, by increasing the magnitude of the lamp current I_L). This additional action may serve to correct the magnitude of the lamp voltage V_L in the event that the magnitude of the lamp voltage V_L overshoots the upper voltage threshold V_{TH-UP} . If the magnitude of the lamp voltage V_L is not at or above the upper voltage threshold V_{TH-UP} , the lamp voltage may be compared to the lower threshold, for example, at 612 as described herein. The amount ΔV_L may be a predetermined amount. The amount ΔV_L may be a dynamically determined amount, for example, an amount equal to the difference between the sampled lamp voltage and the upper threshold.

[0050] It should be understood that the current-control lockout procedures disclosed herein have been described in connection with electronic dimming ballasts and fluorescent lamps for

illustrative purposes only. The processes described herein may be applied in other types of load control devices, such as, for example, light-emitting diode (LED) drivers for controlling LED light sources, as well as load control devices for controlling other types of high-efficacy light sources. In LED drivers, the lamp voltage across the LED light source may increase (*e.g.*, increase drastically) when the LED light source is cold and the lamp current conducted through the LED light source is increasing. In this sense, the V-I curve for the LED light source may be generally flipped on the vertical axis and similarly shaped as those shown for ballasts in FIG. 4. It should also be understood that while the current-control lockout procedures disclosed herein have been described in regards to monitoring a magnitude of a lamp voltage of an electronic dimming ballast in order to control a lamp current conducted through a fluorescent lamp, the processes described herein may be applied to other measurable operating characteristics of an electronic dimming ballast, an LED driver, or other load control device.

[0051] A procedure, for example, may include adjusting the magnitude of a first operating characteristic of the electrical load and measuring the magnitude of a second operating characteristic of the electrical load. The second operating characteristic may be different than the first operating characteristic. For example, the first operating characteristic may include a load current conducted through the load, and the second operation the second operating characteristic may include a load voltage produced across the load.

[0052] If the magnitude of the second operating characteristic crosses a first threshold, adjustment of the magnitude of the first operating characteristic may be stopped. When the second operating characteristic crosses a second threshold, adjustment of the magnitude of the first operating characteristic may subsequently begin (*e.g.*, restart following the stopping).

[0053] For gas discharge lamps, for example, the adjustment of the magnitude of the first operating characteristic may include decreasing the magnitude of the load current conducted through the load. Similarly, the subsequent beginning adjustment may include subsequently decreasing the magnitude of the load current.

[0054] For LED light sources, for example, the adjustment of the magnitude of the first operating characteristic may include increasing the magnitude of the load current conducted through the load. Similarly, the subsequent beginning adjustment may include subsequently increasing the magnitude of the load current.

CLAIMS

1. A method for controlling an amount of power delivered to an electrical load, the method comprising:
 - adjusting a first magnitude of a first operating characteristic of the electrical load;
 - measuring a second magnitude of a second operating characteristic of the electrical load, the second operating characteristic different than the first operating characteristic;
 - stopping adjustment of the first magnitude of the first operating characteristic of the electrical load if the second magnitude of the second operating characteristic crosses a first threshold; and
 - subsequently beginning to adjust the first magnitude of the first operating characteristic of the electrical load when the second magnitude of the second operating characteristic crosses a second threshold.
2. The method of claim 1, wherein the first operating characteristic comprises a load current conducted through the electrical load.
3. The method of claim 2, wherein the second operating characteristic comprises a load voltage produced across the electrical load.
4. The method of claim 3, wherein stopping adjustment of the first magnitude of the first operating characteristic of the electrical load comprises stopping adjustment of a magnitude of the load current if a magnitude of the load voltage is greater than the first threshold.
5. The method of claim 4, wherein adjusting the first magnitude of a first operating characteristic of the electrical load comprises decreasing the magnitude of the load current conducted through the load; and
 - wherein subsequently beginning to adjust the first magnitude of the first operating characteristic of the electrical load comprises subsequently decreasing the magnitude of the load current when the magnitude of the load voltage is less than the second threshold.

6. The method of claim 5, wherein the electrical load comprises a gas discharge lamp.
7. The method of claim 4, wherein adjusting the first magnitude of a first operating characteristic of the electrical load comprises increasing the magnitude of the load current conducted through the load; and
wherein subsequently beginning to adjust the first magnitude of the first operating characteristic of the electrical load comprises subsequently increasing the magnitude of the load current when the magnitude of the load voltage is less than the second threshold.
8. The method of claim 7, wherein the electrical load comprises an LED light source.
9. A load control device for controlling an amount of power delivered to an electrical load, the load control device comprising:
a control circuit operable to:
adjust a first magnitude of a first operating characteristic of the electrical load;
measure a second magnitude of a second operating characteristic of the electrical load, the second operating characteristic different than the first operating characteristic;
stop adjustment of the first magnitude of the first operating characteristic of the electrical load if the second magnitude of the second operating characteristic crosses a first threshold; and
subsequently begin to adjust the first magnitude of the first operating characteristic of the electrical load when the second magnitude of the second operating characteristic crosses a second threshold.
10. The load control device of claim 9, wherein the first operating characteristic comprises a load current conducted through the electrical load.
11. The load control device of claim 10, wherein the second operating characteristic comprises a load voltage produced across the electrical load.

12. The load control device of claim 11, wherein the control circuit operable to stop adjustment of the first magnitude of the first operating characteristic of the electrical load comprises the control circuit operable to stop adjustment of a magnitude of the load current if a magnitude of the load voltage is greater than the first threshold.

13. The load control device of claim 12, wherein the control circuit operable to adjust the first magnitude of a first operating characteristic of the electrical load comprises the control circuit operable to decrease the magnitude of the load current conducted through the load; and

wherein the control circuit operable to subsequently begin to adjust the first magnitude of the first operating characteristic of the electrical load comprises the control circuit operable to subsequently decrease the magnitude of the load current when the magnitude of the load voltage is less than the second threshold.

14. The load control device of claim 13, wherein the electrical load comprises a gas discharge lamp and the load control device comprises an electronic dimming ballast.

15. The load control device of claim 12, wherein the control circuit operable to adjust the first magnitude of a first operating characteristic of the electrical load comprises the control circuit operable to increase the magnitude of the load current conducted through the load; and

wherein the control circuit operable to subsequently begin to adjust the first magnitude of the first operating characteristic of the electrical load comprises the control circuit operable to subsequently increase the magnitude of the load current when the magnitude of the load voltage is less than the second threshold.

16. The load control device of claim 15, wherein the electrical load comprises an LED light source and the load control device comprises an LED driver.

17. A method for driving a gas discharge lamp, the method comprising:

adjusting an intensity of the lamp;
stopping adjustment of the intensity of the lamp if a magnitude of the lamp voltage across the lamp is greater than an upper threshold; and
subsequently beginning to adjust the intensity of the lamp when the lamp voltage across the lamp is less than a lower threshold.

18. The method of claim 17, wherein adjusting the intensity of the lamp comprises decreasing the intensity of the lamp.

19. The method of claim 17, wherein subsequently beginning to adjust the intensity of the lamp comprises subsequently decreasing the intensity of the lamp.

20. The method of claim 17, wherein adjusting the intensity of the lamp comprises decreasing the intensity of the lamp at a first rate, and wherein subsequently beginning to adjust the intensity of the lamp comprises subsequently decreasing the intensity of the lamp at a second rate.

21. The method of claim 20, wherein the second rate is slower than the first rate.

22. The method of claim 17, wherein the magnitude of the lamp voltage depends on a lamp temperature of the lamp.

23. The method of claim 17, wherein the magnitude of the lamp voltage depends on a mercury concentration of the lamp.

24. The method of claim 17, further comprising:
generating a high-frequency output voltage having an operating frequency;
adjusting the operating frequency so as to control an intensity of the lamp between the minimum intensity and the maximum intensity; and

generating a lamp voltage control signal representative of a magnitude of a lamp voltage across the lamp.

25. The method of claim 17, further comprising:
determining the magnitude of a lamp voltage across the lamp.
26. An electronic dimming ballast for controlling the intensity of a gas discharge lamp, the electronic dimming ballast comprising:
a control circuit operable to:
adjust the intensity of the lamp;
stop adjustment of the intensity of the lamp if a magnitude of the lamp voltage across the lamp is greater than an upper threshold; and
subsequently begin to adjust the intensity of the lamp when the lamp voltage across the lamp is less than a lower threshold.
27. The electronic dimming ballast of claim 26, wherein the control circuit operable to adjust the intensity of the lamp comprises the control circuit operable to decrease the intensity of the lamp.
28. The electronic dimming ballast of claim 26, wherein the control circuit operable to subsequently begin to adjust the intensity of the lamp comprises the control circuit operable to subsequently decrease the intensity of the lamp.
29. The electronic dimming ballast of claim 26, wherein the control circuit operable to adjust the intensity of the lamp comprises the control circuit operable to decrease the intensity of the lamp at a first rate, and wherein the control circuit operable to subsequently begin to adjust the intensity of the lamp comprises the control circuit operable to subsequently decrease the intensity of the lamp at a second rate.

30. The electronic dimming ballast of claim 29, wherein the second rate is slower than the first rate.
31. The electronic dimming ballast of claim 26, wherein the magnitude of the lamp voltage depends on one or more of: a lamp temperature of the lamp and a mercury concentration of the lamp.
32. The electronic dimming ballast of claim 26, wherein the control circuit is further operable to: receive a lamp voltage control signal representative of the magnitude of a lamp voltage across the lamp.
33. The electronic dimming ballast of claim 26, further comprising:
an inverter circuit for receiving a DC bus voltage and for generating a high-frequency output voltage; and
a resonant tank circuit for receiving the high-frequency output voltage and generating a sinusoidal voltage for driving the lamp.
34. The electronic dimming ballast of claim 26, wherein the control circuit is further operable to: determine the magnitude of the lamp voltage across the lamp.
35. A method for driving a gas discharge lamp, the method comprising:
decreasing an intensity of the lamp at a first rate;
determining that a magnitude of a lamp voltage across the lamp is above an upper threshold;
increasing the intensity of the lamp;
determining that the magnitude of the lamp voltage across the lamp is below a lower threshold; and
decreasing the intensity of the lamp at a second rate until the magnitude of the lamp voltage across the lamp is above the upper threshold or the intensity of the lamp is at a target intensity level.
36. The method of claim 35, wherein the second rate is slower than the first rate.

37. The method of claim 35, wherein the intensity of the lamp is increased such that the magnitude of the lamp voltage across the lamp is equal to or below the upper threshold.
38. The method of claim 35, wherein the intensity of the lamp is periodically increased by a predetermined amount.
39. The method of claim 35, wherein the target intensity level is the minimum intensity of the lamp.
40. An electronic dimming ballast for controlling the intensity of a gas discharge lamp, the electronic dimming ballast comprising:
a control circuit operable to:
 decrease an intensity of the lamp at a first rate;
 determine that a magnitude of a lamp voltage across the lamp is above an upper threshold;
 increase the intensity of the lamp;
 determine that the magnitude of the lamp voltage across the lamp is below a lower threshold; and
 decrease the intensity of the lamp at a second rate until the magnitude of the lamp voltage across the lamp is above the upper threshold or the intensity of the lamp is at a target intensity level.
41. The electronic dimming ballast of claim 40, wherein the second rate is slower than the first rate.
42. The electronic dimming ballast of claim 40, wherein the intensity of the lamp is increased such that the magnitude of the lamp voltage across the lamp is equal to or below the upper threshold.

43. The electronic dimming ballast of claim 40, wherein the intensity of the lamp is periodically increased by a predetermined amount.

44. The electronic dimming ballast of claim 40, wherein the target intensity level is the minimum intensity of the lamp.

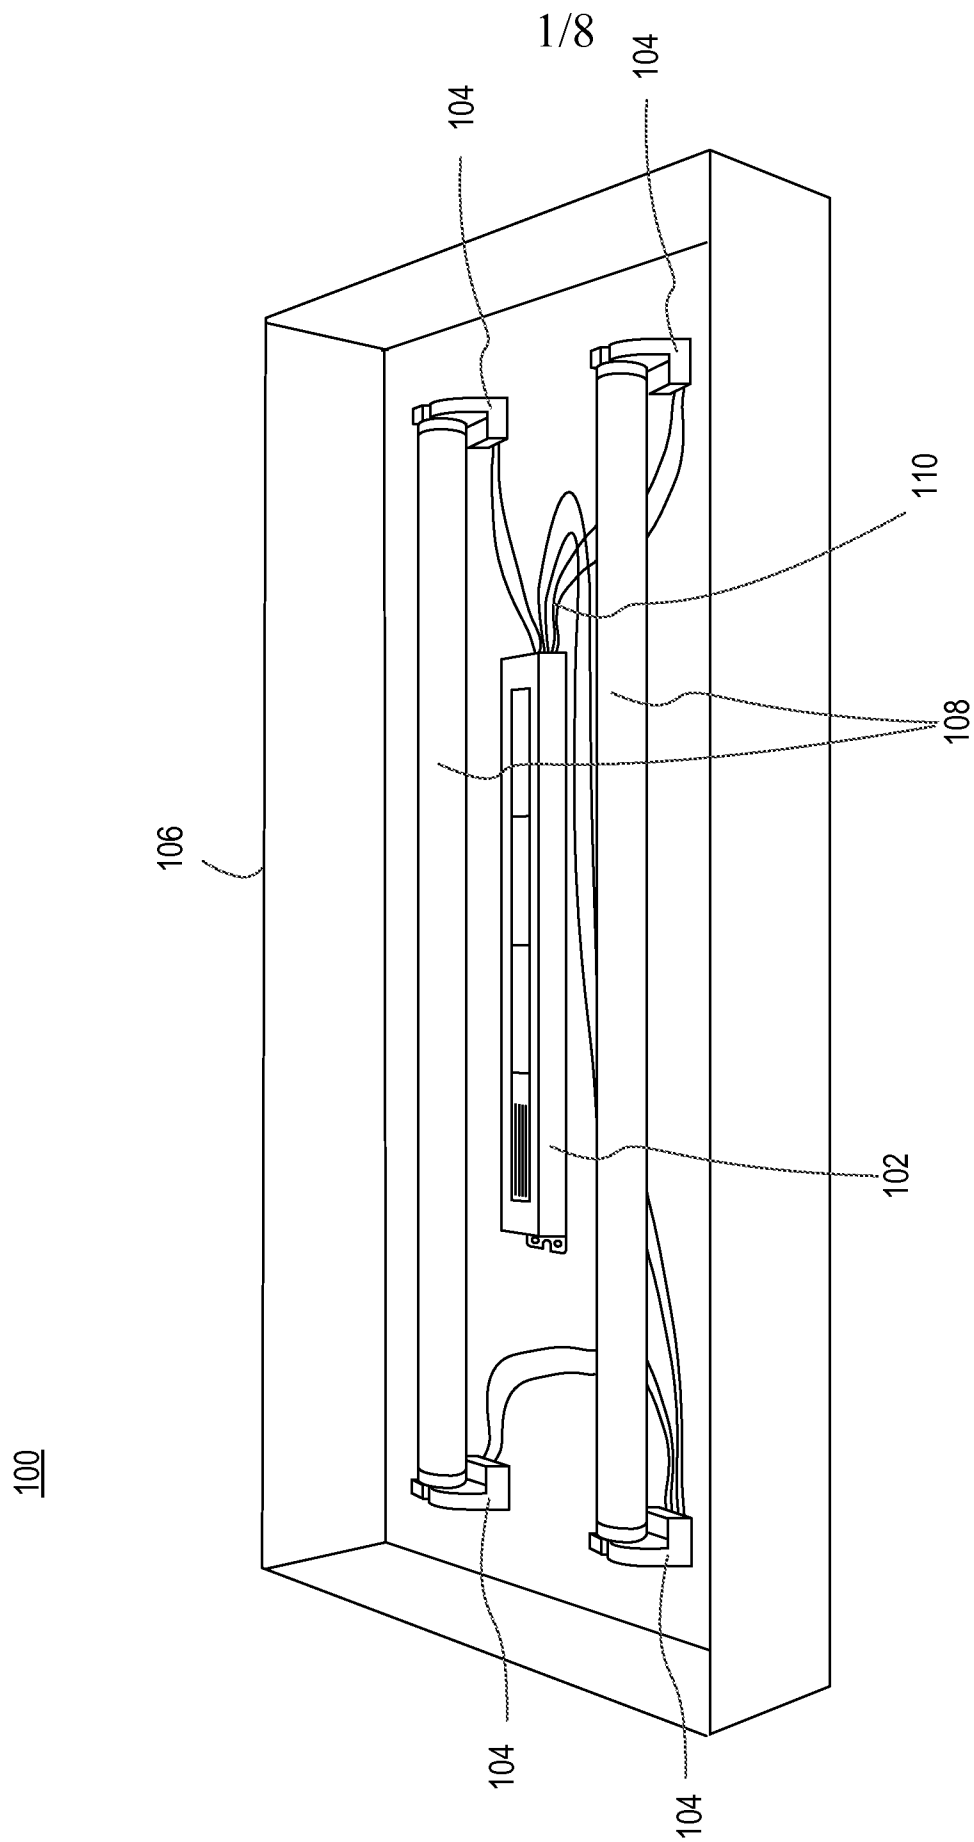


FIG. 1

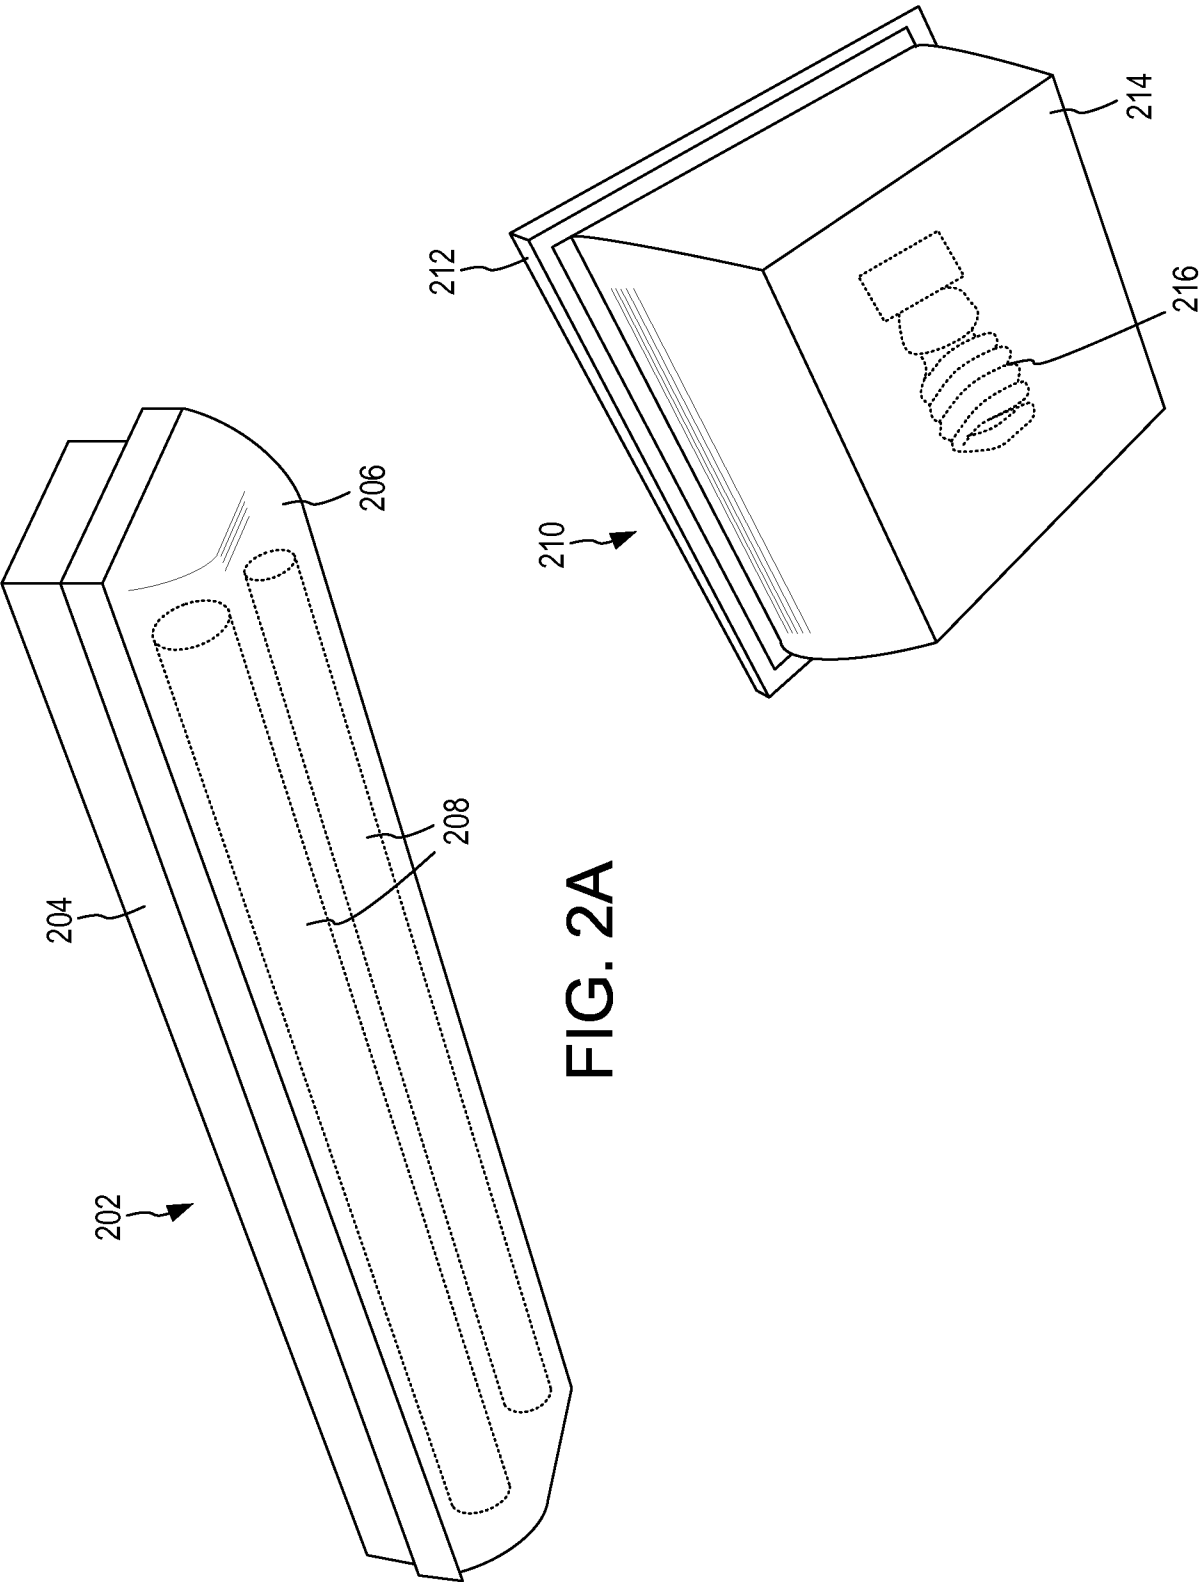


FIG. 2B

FIG. 2A

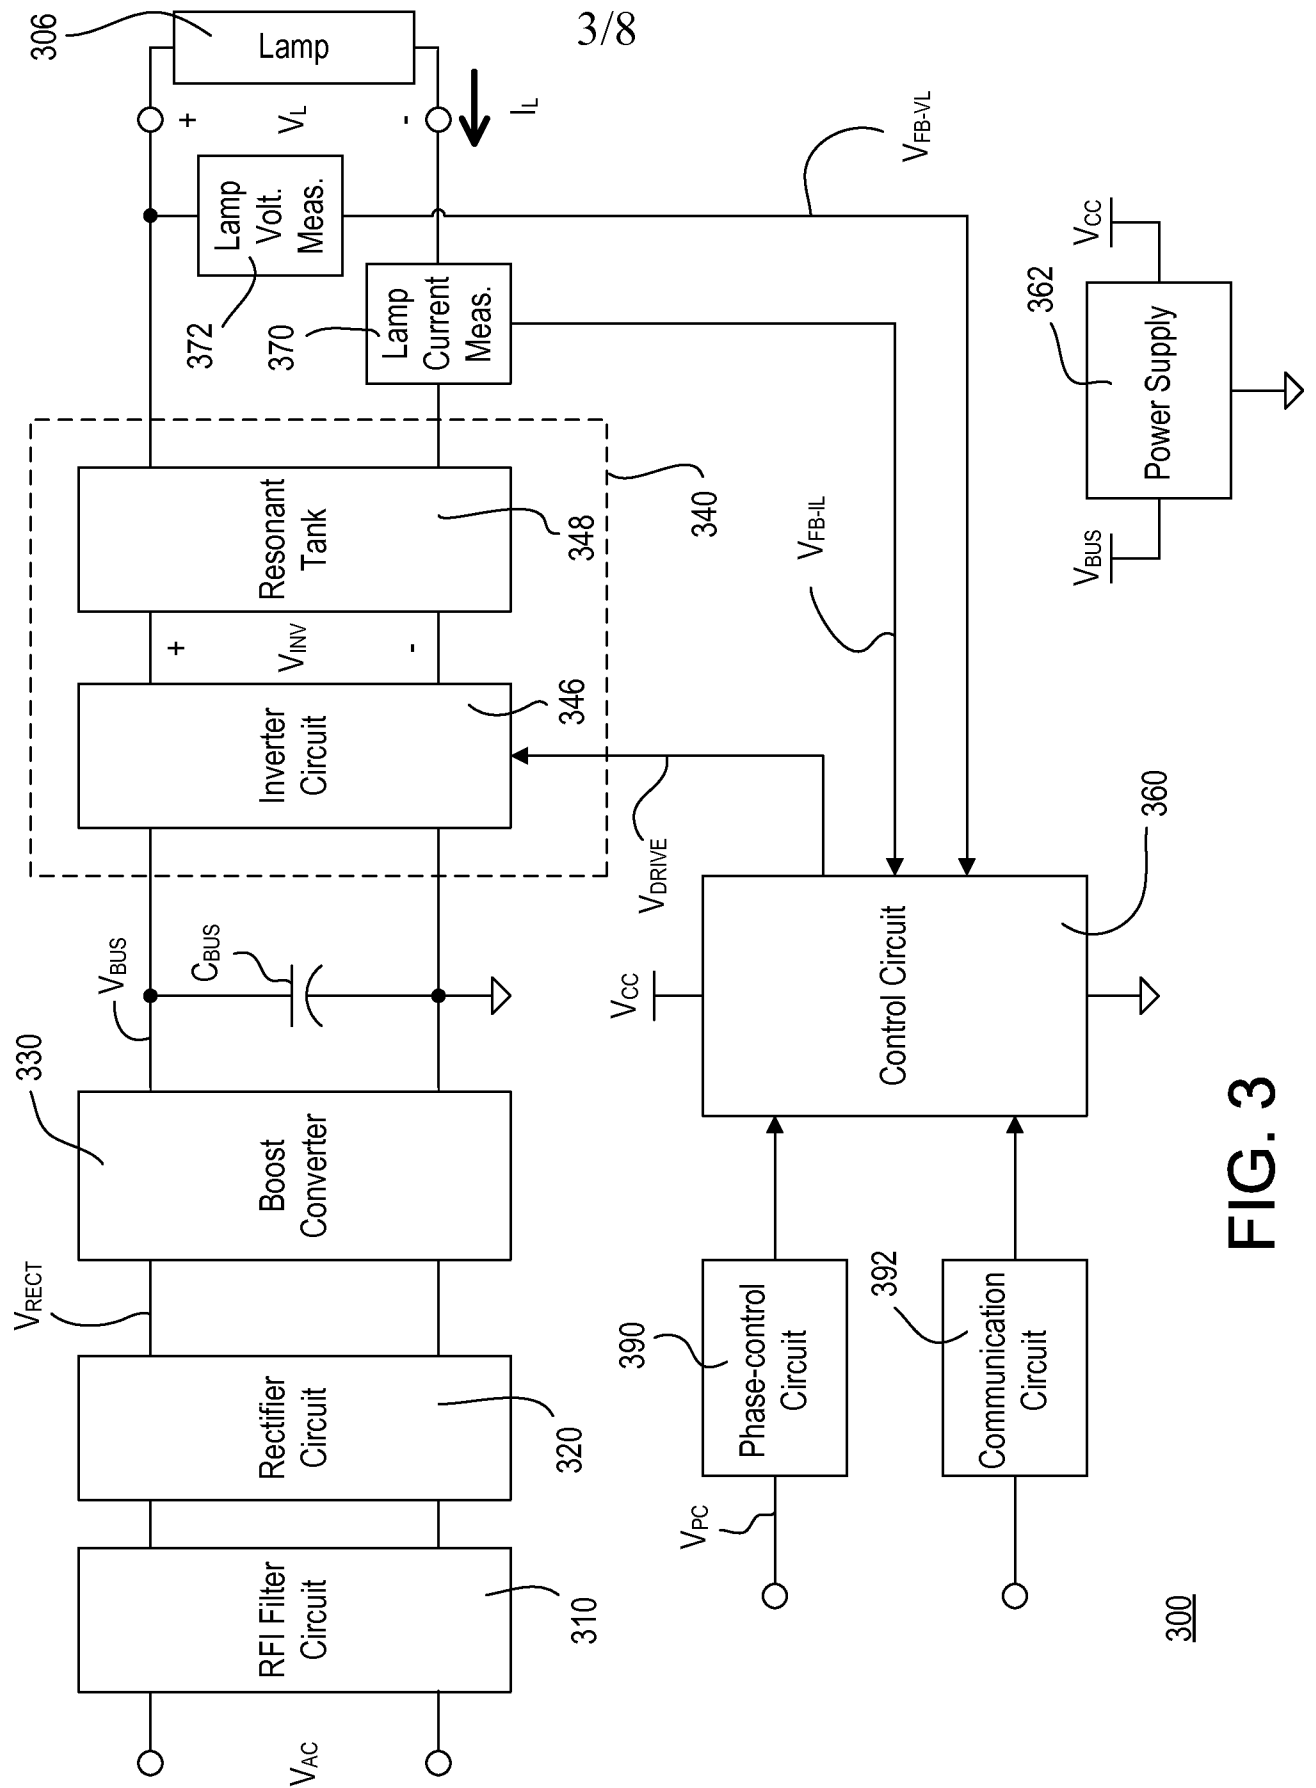


FIG. 3

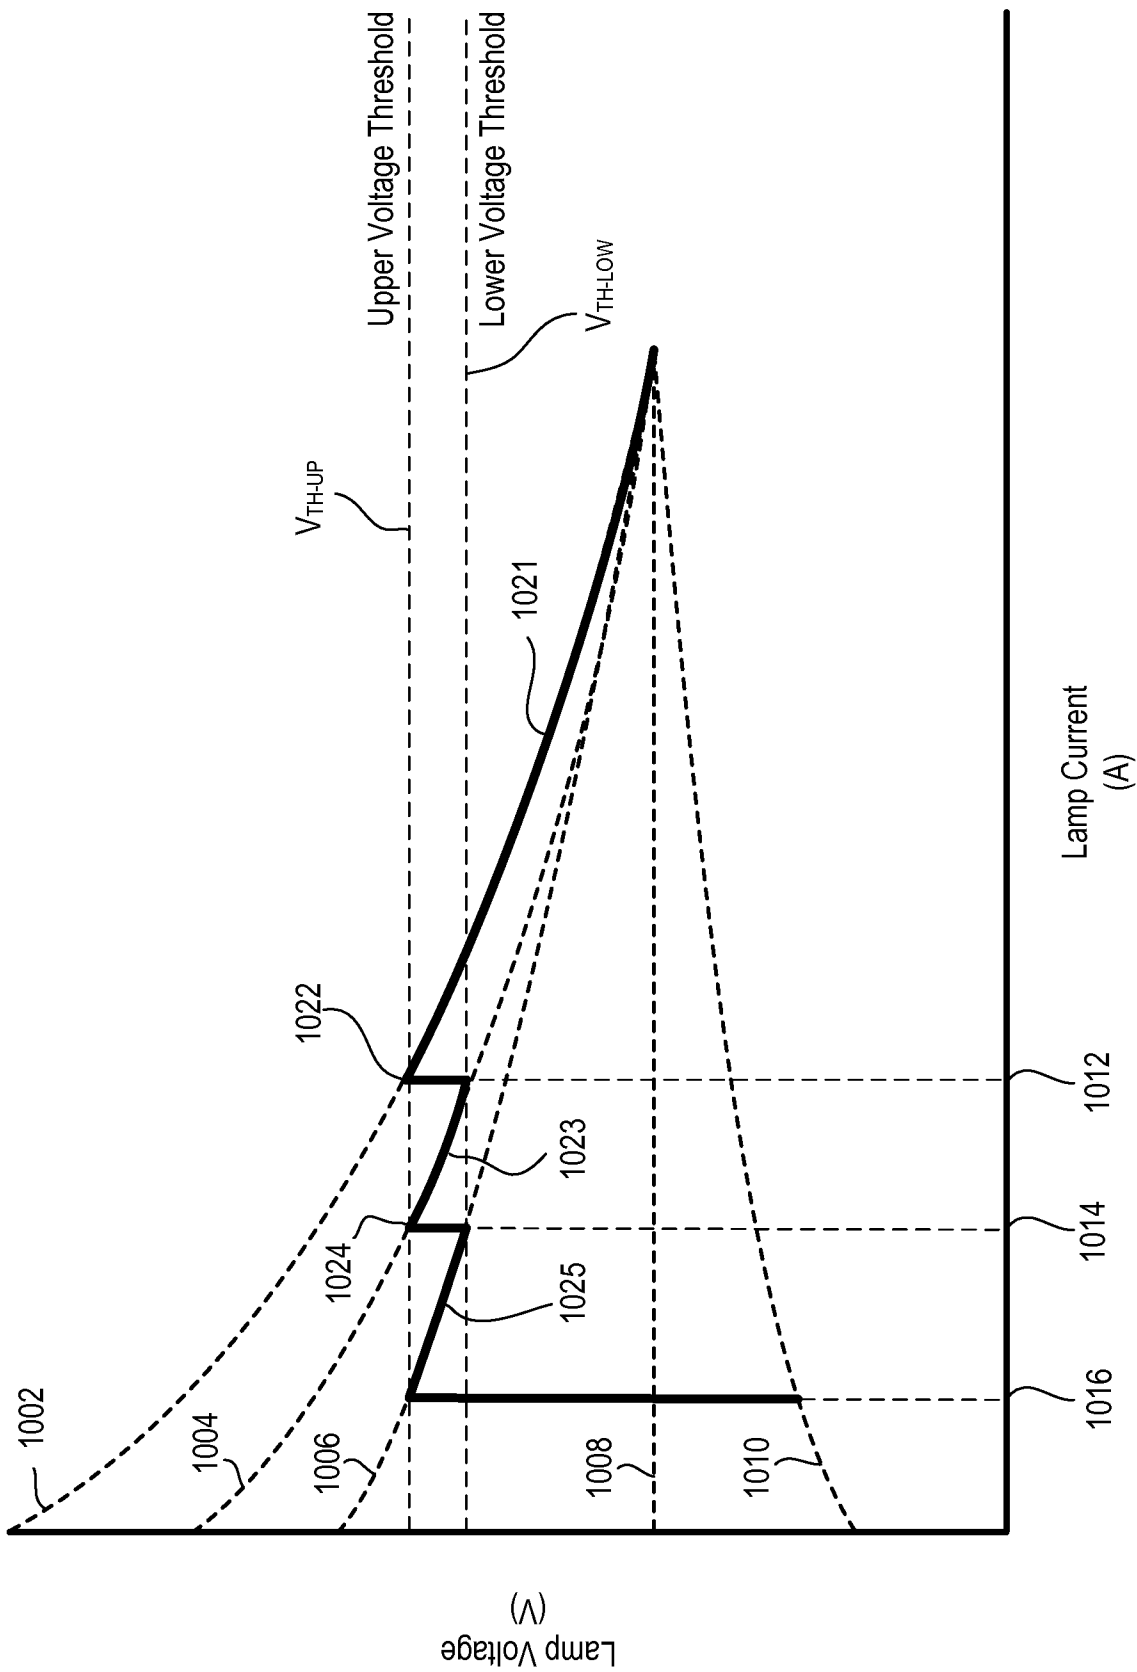


FIG. 4

Envelope of Lamp Current I_L Vs. Time on a Good Lamp

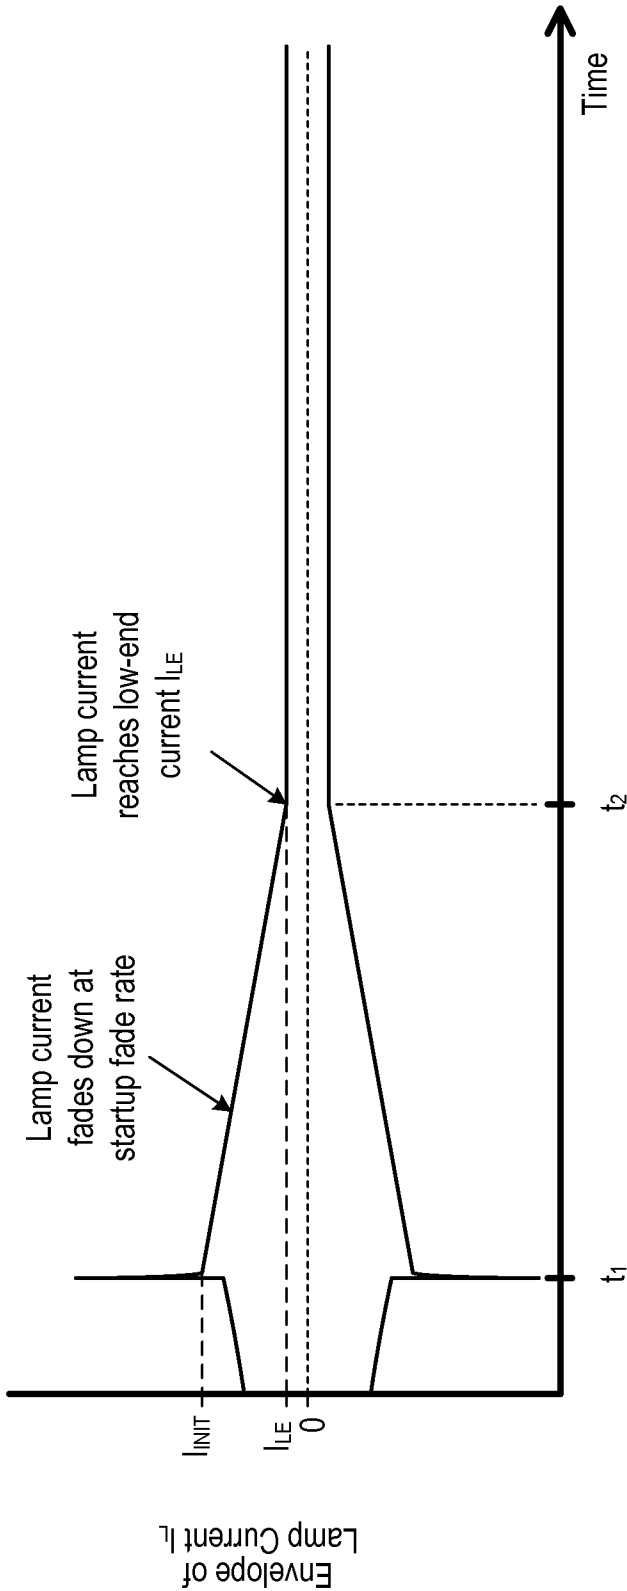


FIG. 5A

Envelope of Lamp Current I_L vs. Time on a Bad Lamp

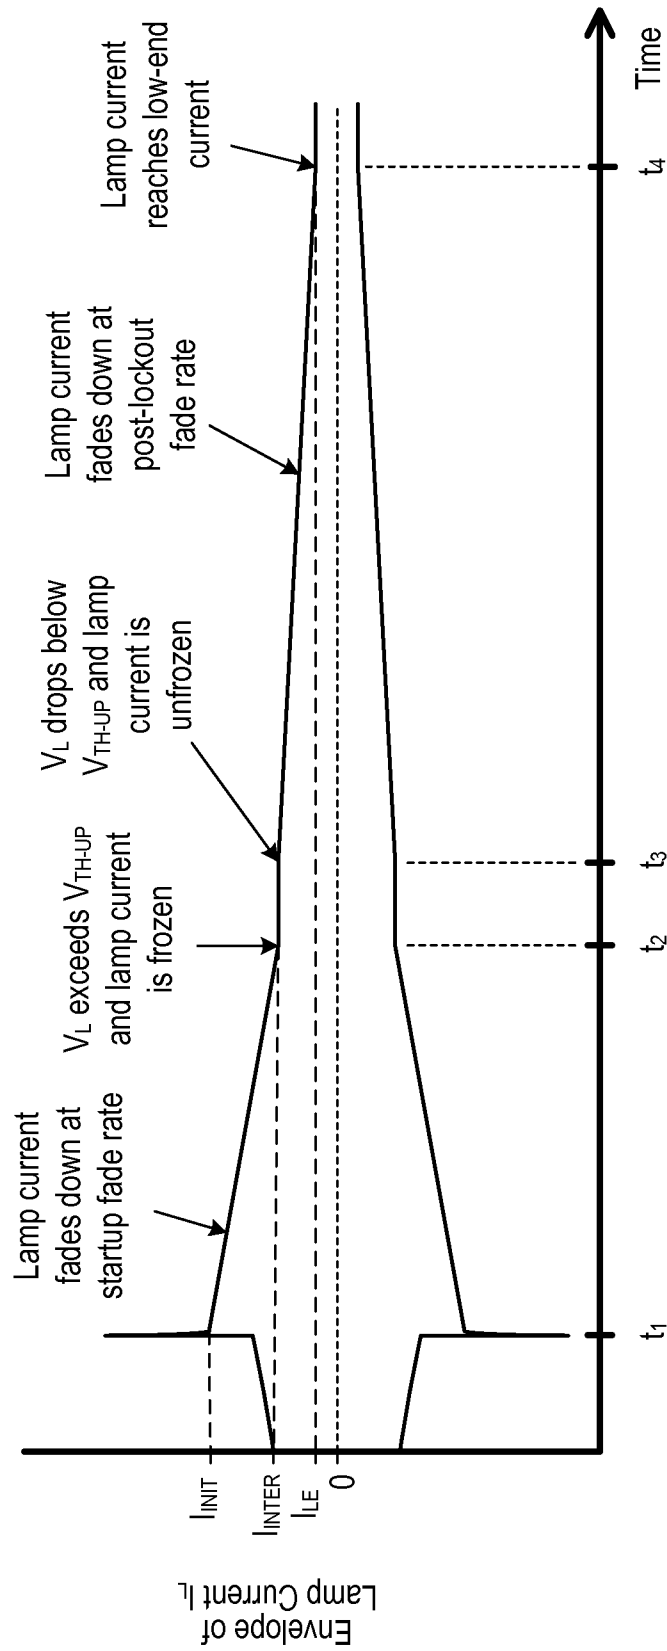


FIG. 5B

7/8

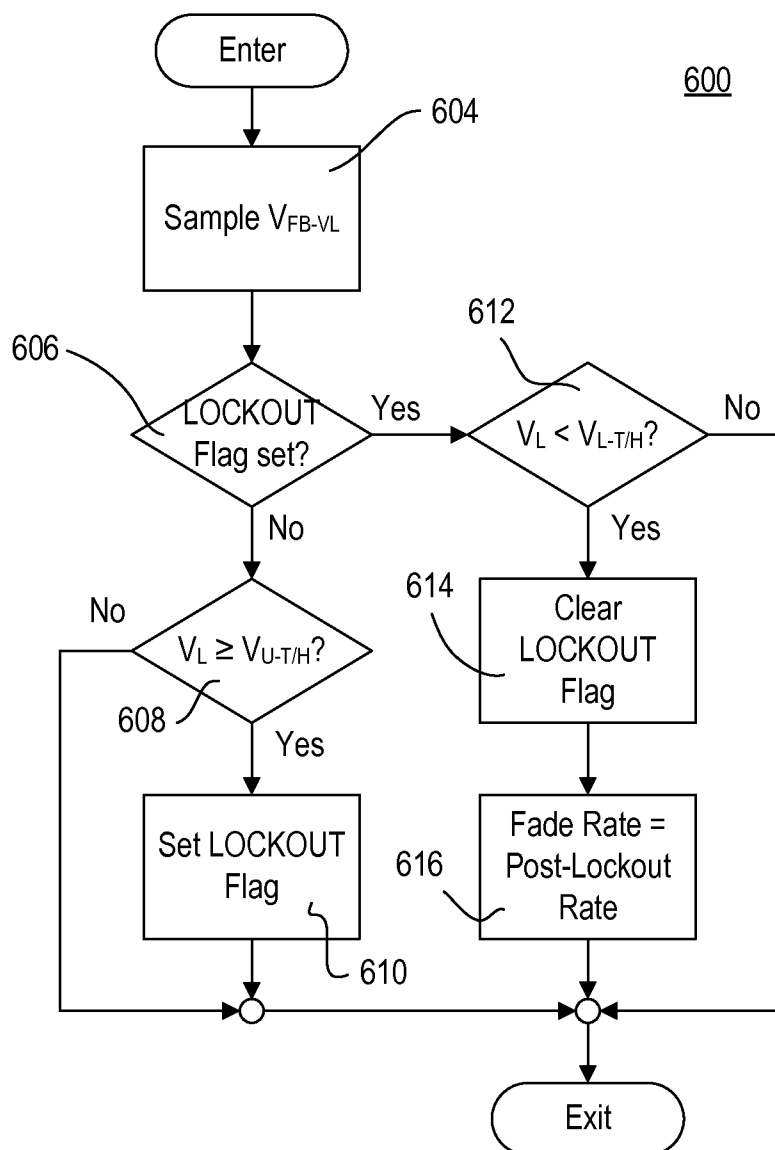


FIG. 6

8/8

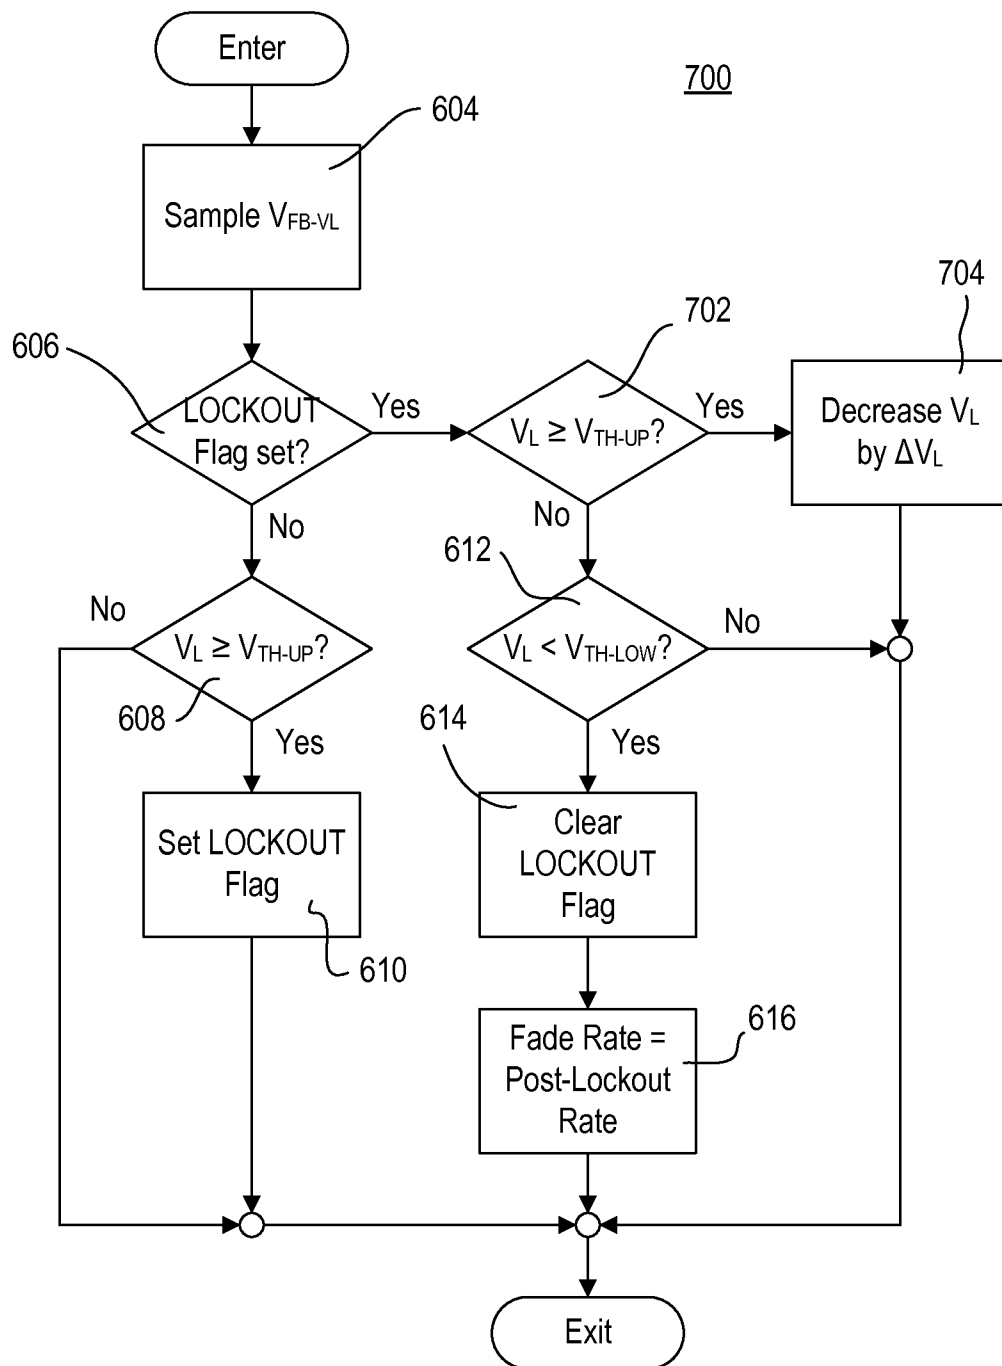


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/014299

A. CLASSIFICATION OF SUBJECT MATTER
INV. H05B41/392
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011/241561 A1 (CHITTA VENKATESH [US] ET AL) 6 October 2011 (2011-10-06) paragraph [0037] - paragraph [0041]; figures 5,6 -----	1-44
X	WO 97/29618 A1 (TAVARES JOAO F [CA]; SZABADOS BARNA [CA]; DABLEH YOUSSEF H [CA]) 14 August 1997 (1997-08-14) claims 1-3; figure 1 -----	1-44
X	US 2008/018263 A1 (OHTA SHINJI [JP] ET AL) 24 January 2008 (2008-01-24) paragraph [0063] - paragraph [0064]; figures 1,6 -----	1-44
X	US 2006/061304 A1 (CHO GYU-HYEONG [KR] ET AL) 23 March 2006 (2006-03-23) paragraph [0046]; figure 7 ----- -/-	1-44



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 May 2014

Date of mailing of the international search report

28/05/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Brown, Julian

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2014/014299

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 10 2007 047142 A1 (TRIDONICATCO GMBH & CO KG [AT]) 9 April 2009 (2009-04-09) abstract; figure 2 -----	1-44

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2014/014299

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011241561	A1	06-10-2011	CA 2795735 A1 13-10-2011
			CN 103039127 A 10-04-2013
			EP 2556728 A2 13-02-2013
			EP 2574154 A2 27-03-2013
			US 2011241561 A1 06-10-2011
			WO 2011127145 A2 13-10-2011
WO 9729618	A1	14-08-1997	AT 193175 T 15-06-2000
			AU 709399 B2 26-08-1999
			AU 1538197 A 28-08-1997
			CA 2168941 A1 07-08-1997
			DE 69702046 D1 21-06-2000
			DE 69702046 T2 11-01-2001
			DK 0879549 T3 09-10-2000
			EP 0879549 A1 25-11-1998
			ES 2150214 T3 16-11-2000
			KR 100366997 B1 15-03-2003
			PT 879549 E 30-11-2000
			US 6133696 A 17-10-2000
			WO 9729618 A1 14-08-1997
US 2008018263	A1	24-01-2008	CN 101111114 A 23-01-2008
			DE 102007034008 A1 31-01-2008
			FR 2905554 A1 07-03-2008
			JP 2008027710 A 07-02-2008
			KR 20080008974 A 24-01-2008
			US 2008018263 A1 24-01-2008
US 2006061304	A1	23-03-2006	CN 1780518 A 31-05-2006
			KR 20060027421 A 28-03-2006
			US 2006061304 A1 23-03-2006
			US 2007229002 A1 04-10-2007
			US 2007229084 A1 04-10-2007
DE 102007047142	A1	09-04-2009	NONE