

(51) International Patent Classification:
H02N 1/04 (2006.01)(21) International Application Number:
PCT/US201 1/043244(22) International Filing Date:
7 July 2011 (07.07.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/362,233 7 July 2010 (07.07.2010) US(71) Applicant (for all designated States except US): **DREX-EL UNIVERSITY** [US/US]; 3141 Chestnut Street, Philadelphia, PA 19104 (US).

(72) Inventors; and

(75) Inventors/ Applicants (for US only): **MUTHARASAN, Rajakkannu** [US/US]; 312 Tarbert Drive, West Chester, PA 19382 (US). **JOHNSON, Blake, N.** [US/US]; 1 Franklinton Boulevard, Apt. 1116, Philadelphia, PA 19103 (US). **LAKSHMANAN, Ramji, S.** [IN/US]; 7800 C Stenton Avenue, Apt. 211, Philadelphia, PA 19118 (US). **SHARMA, Harsh** [IN/US]; 334 South 42nd Street, Apt. 2R, Philadelphia, PA 19104 (US).(74) Agents: **CALDWELL, John, W.** et al; Woodcock Washburn LLP, Cira Centre, 12th Floor, Philadelphia, PA 19104 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: ASYMMETRIC SENSOR

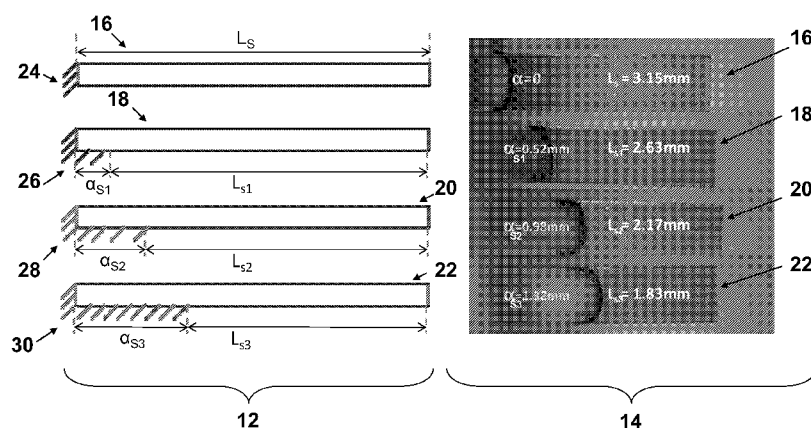**FIGURE 1**

(57) **Abstract:** An asymmetric sensor having asymmetric electrodes and/or being asymmetrically anchored provides enhanced sensitivity. In example embodiments, part of the electrode on a sensor is etched or removed resulting in enhanced mass-change sensitive resonant modes. In another example embodiment, a sensor is anchored asymmetrically, also resulting in enhanced mass-change sensitive resonant modes. By asymmetrically anchoring a piezoelectric portion of a sensor, resonant bending modes of the sensor can be measured electrically without external instrumentation. Modifying the electrode of a piezoelectric cantilever enables expression of mass-change sensitive resonant modes that normally do not lend themselves to electrical measurement.

ASYMMETRIC SENSOR

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims priority to U.S. provisional patent application number 61/362,233, entitled "Asymmetric Sensor," filed July 7, 2010, which is hereby incorporated by reference in its entirety.

GOVERNMENT RIGHTS

[0002] This invention was made with government support under grant number CBET-0828987 awarded by the National Science Foundation. The government has certain rights in the invention.

TECHNICAL FIELD

[0003] The technical field generally relates to sensors, and more specifically relates to piezoelectric cantilever sensors having asymmetric anchors and/or electrodes.

BACKGROUND

[0004] Cantilever sensors have enjoyed considerable interest among researchers because of their high sensitivity and their potential for high throughput applications with label-free reagents. Resonant-mode cantilever sensors respond to attached analytes by reduction in resonant frequency. The change in resonant frequency is proportional to analyte concentration, and can be measured by a variety of methods, which can include integrated transducing elements within the oscillating cantilever and external instrumentation that measures the cantilever oscillation amplitude. In both cases, the actuation of the cantilever can be provided by natural thermal fluctuations or by actuating the base of the cantilever electromechanically.

[0005] There have been several attempted innovative methods for measuring resonance, both internal and external to the sensor. However, more sensitive sensors continue to be sought.

SUMMARY

[0006] An asymmetric sensor having asymmetric electrodes and/or being asymmetrically anchored is described herein. In example embodiments, part of the electrode on a sensor is etched or removed, or a sensor is anchored asymmetrically, resulting in enhanced mass-change sensitive resonant modes. In an example embodiment, by asymmetrically anchoring a piezoelectric portion (such as a lead zirconate titanate, PZT, portion for example) of a sensor, resonant bending modes of the sensor can be measured electrically without external instrumentation that measures sensor oscillation. This approach is an improvement over bonding a non- piezoelectric material to induce measurable bending modes as it improves mass-change sensitivity due to avoidance of parasitic mass of non-piezoelectric layer. In another example embodiment, modifying the electrode of a piezoelectric cantilever enables expression of mass-change sensitive resonant modes that normally do not lend themselves to electrical measurement.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] Figure 1 illustrates cross sectional views and bottom views of symmetrically and asymmetrically anchored PZT cantilever sensors.

[0008] Figure 2 illustrates two graphs in Figure 2A and Figure 2B, depicting phase angles versus frequency response. Figure 2A illustrates an experimental frequency response spectra showing the measurability of bending modes due to anchor asymmetry of a sensor. Figure 2B illustrates measured changes in the resonant frequencies as a function of extent of anchor asymmetry of the sensors 16, 18, 20, and 22 shown in Figure 1.

[0009] Figure 3 contains Figure 3A and Figure 3B. Figure 3A illustrates a finite element model (FEM) solution showing effects of anchor asymmetry and phase angle behavior at resonance for the sensors depicted in Figure 2A. Figure 3B illustrates a FEM solution for resonant modes as a function of anchor asymmetry extent.

[0010] Figure 4 includes Figure 4A and Figure 4B. Figure 4 illustrates dependence of resonant modes on the shorter length of asymmetrically anchored cantilevers.

[0011] Figure 5 includes Figure 5A, Figure 5B, and Figure 5C. Figure 5A illustrates frequency shift responses for alternate changes in liquid density from DI water to various

concentrations of PBS. Figure 5B illustrates frequency shifts obtained for various density liquids. Figure 5C illustrates sensitivity of the two modes as a function of added mass.

[0012] Figure 6 illustrates the frequency response of the first and second bending modes in response to 30 pM dodecanethiol.

[0013] Figure 7 illustrates that the resonance spectra of the second bending mode shows partial etching of Ni electrode on one side of PZT amplifies Q by 29 % and gave a slightly higher resonant frequency.

[0014] Figure 8 includes Figure 8A and Figure 8B. Figure 8A illustrates a schematic diagram of a PEMC sensor before electrode etch. Figure 8B illustrates a schematic diagram of a PEMC sensor after 1 mm of Ni electrode was etched using 0.1 M FeCl_3 solution.

[0015] Figure 9 depicts an example schematic diagram and picture of experimental apparatus.

[0016] Figure 10 includes Figure 10A and Figure 10B. Figure 10 A depicts an example real-time sensor response over the course of a liquid density change experiment. Figure 10 B depicts an example decrease in resonant frequency values for changing from DIW to liquids of higher density is found to be linear with respect to the density of the higher density liquid.

[0017] Figure 11 includes Figure 11A and Figure 11B. Figure 11A depicts an example time-shifted sensor responses for 1-dodecanethiol chemisorption at 1 pM - 10 nM. Shown data are from separate experiments with the same sensor. Figure 11B depicts an example sensor mass-change sensitivity (σ) as a function of chemisorbed mass of DDT shows a sensitivity limit about one picogram in liquid.

[0018] Figure 12 illustrates the resonant mode used for measuring dodecanethiol (DDT) chemisorption in air ($f = 86.9$ kHz, $Q = 61$) and in ethanol ($f = 72.6$ kHz, $Q = 40$). The 33 % decrease in Q-value and resonant frequency decrease of 14.3 kHz was due to immersion in ethanol.

DETAILED DESCRIPTION

[0019] As described herein, part of the electrode on a sensor is etched or removed, or the sensor is anchored asymmetrically, which results in mass-change sensitive resonant modes that are expressed and enhanced by the device. This disclosure pertains to example methods of electroding lead zirconate titanate (PZT), for example, to induce electrically-observable resonant modes useful for biosensing, or the like. Also, as described herein a sensor may comprise an asymmetric anchor.

[0020] Experiments were conducted to measure performance of asymmetric sensors. The experiments, results, and fabrication of the sensors are described herein.

Asymmetric Anchors

[0021] In example embodiments, piezoelectric cantilever sensors consisting only of lead zirconate titanate (PZT) are self-exciting and self-sensing of resonance if they are asymmetrically anchored. Symmetrically-anchoring has not been observed to give rise to electrically measurable resonant modes. As described herein, sensitivities of first and second bending mode resonances are characterized in a flow apparatus using small density changes in liquid and by chemisorptions of dodecanethiol at 60 pM. Density change experiments yielded mass-change sensitivity of -33 ng/Hz and 217 pg/Hz for the first two modes. In chemisorptions experiments, where binding was restricted to a 1 mm tip of the PZT cantilever sensor, sensitivity improved by an order of magnitude to 3.9 pg/Hz and 828 fg/Hz for the same two resonant modes.

[0022] In the conducted experiments, the PZT layer was excited at 10^3 v/m and the resulting current was measured. The phase angle (Φ) between the excitation voltage and the resulting electric current in the piezoelectric layer exhibited sharp change in Φ at resonance due to altered electrical impedance of PZT, caused by higher than normal strain at resonance. The glass layer served to constrain longitudinal deformation of PZT, thus inducing bending mode vibration of the integrated cantilever. Such an integrated sensor has yielded successful label-free biosensing in liquid at 50 picograms using low-order (<60 kHz) resonant modes. Described herein are PZT cantilever sensors that are devoid of the parasitic non-piezoelectric glass layer, and a novel approach for anchoring PZT that enables induction of measurable bending mode resonance is described. A PZT cantilever anchored uniformly or symmetrically and excited

electrically exhibits longitudinal deformation, and weak transverse or bending vibration that are not transduced into electrical impedance change because the resulting symmetric mode shapes cause no net accumulation of charge in PZT. Since bending modes have been associated with detection sensitivity, methods and configurations that induce measurable impedance change at bending resonant modes of PZT cantilevers were investigated. By anchoring the PZT in epoxy asymmetrically, it was found that bending modes that are not normally measurable became electrically measurable. Because one side of the PZT cantilever is longer than the other, due to asymmetrical anchoring, differential longitudinal deformation occurs inducing transverse vibration that causes charge accumulation in PZT that the bending mode resonances become electrically measurable. As described herein, the low order bending modes are more sensitive than a PZT-glass and PZT-stainless steel cantilever sensors anchored symmetrically.

[0023] Materials utilized to conduct experiments included phosphate buffered saline solution (PBS, 10 mM, pH 7.4) purchased from Sigma-Aldrich (Alletown, PA) were prepared in deionized water (18 M Ω , Milli-Q system, Millipore), and subsequently diluted to obtain 2.5 and 5.0 mM solutions. Ethanol (analytical grade) and dodecanethiol (99%) were purchased from Sigma.

[0024] Figure 1 illustrates cross sectional views and bottom views of symmetrically and asymmetrically anchored PZT cantilever sensors. The left panel 12 illustrates cross sectional views of symmetrically and asymmetrically anchored PZT cantilever sensors. The right panel 14 shows respective samples of fabricated PZT cantilever sensors, viewed from the bottom (underside) of the sensor.

[0025] As shown in Figure 1, sensor 16 is anchored at the cross hatched portion 24. Sensor 16 is symmetrically anchored. Sensor 16 is not anchored on the bottom or top of the sensor 16. Sensor 16 is anchored only at its left edge. The length of the unanchored portion of the sensor 16 is depicted as L_s in left panel 12 of Figure 1. As depicted in right panel 14 of Figure 1, the length of the unanchored portion of the sensor 16 is 3.15 mm.

[0026] Sensor 18 is asymmetrically anchored. Sensor 18 is anchored at the cross hatched portion 26. Sensor 18 is anchored at the left edge and at the bottom portion of the sensor 18. The top portion of sensor 18 is not anchored, thus anchoring the bottom portion of sensor 18 and not the top portion of sensor 18 results in sensor 18 being asymmetrically anchored. The length of the anchored bottom portion of the sensor 18 is depicted as α_{si} in left panel 12 of

Figure 1. As depicted in right panel 14 of Figure 1, the length of the anchored bottom portion of the sensor 18 is 0.52 mm. The length of the unanchored bottom portion of the sensor 18 is depicted as L_{s1} in left panel 12 of Figure 1. As depicted in right panel 14 of Figure 1, the length of the unanchored bottom portion of the sensor 18 is 2.63 mm.

[0027] Sensor 20 is asymmetrically anchored. Sensor 20 is anchored at the cross hatched portion 28. Sensor 20 is anchored at the left edge and at the bottom portion of the sensor 20. The top portion of sensor 20 is not anchored, thus anchoring the bottom portion of sensor 20 and not the top portion of sensor 20 results in sensor 20 being asymmetrically anchored. The length of the anchored bottom portion of the sensor 20 is depicted as αs_2 in left panel 12 of Figure 1. As depicted in right panel 14 of Figure 1, the length of the anchored bottom portion of the sensor 20 is 0.98 mm. The length of the unanchored bottom portion of the sensor 20 is depicted as L_{s2} in left panel 12 of Figure 1. As depicted in right panel 14 of Figure 1, the length of the unanchored bottom portion of the sensor 20 is 2.17 mm.

[0028] Sensor 22 is asymmetrically anchored. Sensor 22 is anchored at the cross hatched portion 30. Sensor 22 is anchored at the left edge and at the bottom portion of the sensor 22. The top portion of sensor 22 is not anchored, thus anchoring the bottom portion of sensor 22 and not the top portion of sensor 22 results in sensor 22 being asymmetrically anchored. The length of the anchored bottom portion of the sensor 22 is depicted as αs_3 in left panel 12 of Figure 1. As depicted in right panel 14 of Figure 1, the length of the anchored bottom portion of the sensor 22 is 1.32 mm. The length of the unanchored bottom portion of the sensor 22 is depicted as L_{s3} in left panel 12 of Figure 1. As depicted in right panel 14 of Figure 1, the length of the unanchored bottom portion of the sensor 22 is 1.83 mm. Although the various lengths depicted in Figure 1 were used to conduct experiments as described herein, it is to be understood that any appropriate lengths may be utilized.

[0029] The piezoelectric sensors depicted in Figure 1 were fabricated from $1 \times 5 \times 0.127$ mm³ PZT layer (Piezo Systems, Woburn, MA). The top and bottom surfaces of the PZT layer at the anchored end were connecting to excitation voltage source. The cantilever was anchored in a 6 mm glass tube by a non-conductive epoxy. Initial anchoring was obtained by ensuring that both sides of PZT were embedded to the same depth in epoxy. After the spectral properties were determined, additional epoxy was applied to one side of PZT and epoxy in the glass tube to introduce asymmetry in the anchor. The other side of the sensor remained at the original free length (L). After the applied epoxy had cured, its spectral property was measured. Several

sensors ($n > 60$) were prepared with asymmetric anchor for spectral property evaluation. The asymmetric dimension (**a**) was varied from 10% to 65% of the free length. For in-liquid applications, the sensors were parylene C coated following the vendor supplied protocol for providing electrical insulation. Deposition of a gold layer on the sensors (used in chemisorption experiments) was carried out in a Denton DESK IV sputtering unit (Denton Vacuum LLC, Moorestown, NJ).

[0030] The experimental setup comprised an impedance analyzer (HP 4192A or Agilent, HP4294A), a peristaltic pump, a custom flow cell and several fluid reservoirs. The flow cell has a hold-up volume of 120 μL , and was maintained in an incubator at 30 ± 0.1 °C to ensure isothermal conditions. Prior to an experiment, the entire flow loop was rinsed with 100 % ethanol followed by copious amount of DI water. The resonant frequency change during an experiment was monitored continuously by a custom-written LabView® program. The flow loop was operated in either a single pass mode or in a recirculation mode.

[0031] In a typical example experiment, a sensor was vertically installed in the flow cell and the flow rate was set at 0.6 mL/min. In the density change experiments the flow loop was filled with DI water and the resonant frequency was allowed to reach steady state. Subsequently, the flow was switched to PBS and the sensor was allowed to reach a new steady state. To confirm that the sensor response was due to density change experiments alternated between DI water and PBS of various concentrations. The chemisorption experiments were done with gold coating on the cantilever tip by sputtering 100 nm thick at the distal 1 mm^2 area. After stabilizing the sensor in the flow cell at 0.6 mL/min ethanol, the flow was switched to 30 pM dodecanethiol in ethanol and the change in resonant frequency of the first two resonant modes were monitored.

[0032] The PZT cantilever of thickness t , and of free lengths L and L_s containing asymmetry **a** ($=L - L_s$) shown in Figure 1 were simulated using a commercial finite element modeling (FEM) software, COMSOL 3.4 (COMSOL Group, Burlington, MA). The expected deformation in PZT at 100 mV excitation is small, and thus plane stress model was invoked for cantilever deformation mechanics. Zero deflection at the anchor (depicted in Figure 1) was imposed. The properties of PZT-5A used for simulation and for fabrication of experimental sensors are given in supplemental materials as shown in Table SI below.

TABLE SI

Material	Density [kg/m ³]	Young's Modulus [Pa]	Poisson Ratio	Elasticity Matrix [Pa]	Coupling Matrix [C/m ²]	Relative Permittivity
PZT-5A	7750	-	-	$e_{11} = 1.20 \text{ eO}$	$e_{31} = -5.35$	$\epsilon_{11} = 919.1$
				$c_{12} = 7.52 \text{ eO}$	$e_{32} = -5.35$	$\epsilon_{22} = 919.1$
				$c_{13} = 7.51 \text{ eO}$	$e_{33} = 15.78$	$\epsilon_{33} = 826.6$
				$c_{22} = 1.20 \text{ eO}$	$e_{24} = 12.29$	
				$c_{23} = 7.51 \text{ eO}$	$e_{15} = 12.29$	
				$c_{33} = 1.11 \text{ eO}$		
				$c_{44} = 2.11 \text{ eO}$		
				$c_{55} = 2.11 \text{ eO}$		
				$c_{66} = 2.26 \text{ eO}$		

[0033] Constitutive equations that represent the coupling between the electric field and mechanical deformation of the PZT layer are given by:

$$T = c^E S - e' E \quad (1)$$

$$D = e S + \epsilon^S E \quad (2)$$

where T, S, E, and D denote stress, strain, electric fields, and electric displacement (or induction), respectively. The term c^E is the elasticity tensor evaluated at a constant (zero, short and open circuit) electric field, e is the piezoelectric tensor, and ϵ^S is the dielectric permittivity measured at constant (zero, clamped) strain.

[0034] The model included the coupling of electrical and mechanical effects in the PZT domain. Loss factor damping in PZT was adjusted manually until the results were close to the experimental quality factors. Loss factor used in this paper was 1% in all calculations. The total number of elements in each simulation ranged from 72 to 1152; convergence was observed with minimal mesh resolution due to the simple cantilever geometry. The number of elements used was increased such that the calculated resonance frequencies and phase angles converged within < 0.01 %. Initial charge in PZT, initial stress, and external force were set to zero. Using the principle of virtual work option, resonance frequencies of the finite element model were computed. An eigenvalue solver was used for determining resonance frequencies and eigenvalues. As a check, cantilevers of uniform cross-section and isotropic properties yielded eigenfrequency values within an accuracy of few part per million when compared with the analytical model (Equation (3)). Boundary current density obtained from the FEM calculation was integrated over the electrode area to obtain total current (**I**) as a function of excitation

frequency. The response output variables, phase angle ($\Phi = \tan^{-1}[\text{Im}(\mathbf{I})/\text{Re}(\mathbf{I})]$) and impedance ($Z = \mathbf{V}/\mathbf{I}$) were then calculated.

Effect Of Asymmetric Anchor On Resonance Measurability

[0035] Figure 2 illustrates two graphs, A and B, depicting phase angles versus frequency response. Figure 2A illustrates an experimental frequency response spectra showing the measurability of bending modes due to anchor asymmetry of a sensor. Figure 2B illustrates measured changes in the resonant frequencies as a function of extent of anchor asymmetry of the sensors 16, 18, 20, and 22 shown in Figure 1. The plots depicted in Figure 2B have a 1° offset for clarity.

[0036] In an example embodiment, the electrically measurable resonant modes of an excited PZT cantilever sensors manifest resonance by a sharp peak in phase angle (Φ) between excitation voltage (V) and resulting current (I) in PZT at the corresponding excitation frequency. PZT cantilevers that are anchored symmetrically (*e.g.*, sensor 16 depicted in Figure 1) show phase angle values close to -90° for the entire frequency range of 0-100 kHz indicating that the device acts electrically as a pure capacitor; see Figure 2A. Since PZT is a dielectric ceramic with piezoelectric properties, at resonance the charge accumulated in PZT is small or nearly zero such that one measures no deviation from capacitive behavior. In the example shown in Figure 2A, the length of the sensor was 2.5 mm, and such a device has bending modes determined by FEM eigenfrequency analysis at 9.79 and 60.75, but the modes were not observable experimentally. When the PZT ($L=3.2$ mm) was asymmetrically epoxy-anchored with $cc=0.3$ mm, two bending modes were electrically measurable at 11.3 kHz ($\Phi = -85.7^\circ$, $Q=37$) and at 67.8 kHz ($\Phi = -83.9^\circ$, $Q=44$), as shown in Figure 2A. The phase angle profile shown is plotted with an offset of one degree for clarity. All sensors fabricated ($n>60$), in the size range $L=2$ to 4 mm, and an asymmetry $cc=0.2$ to 1.5 mm exhibited at least two resonant modes in 0-100 kHz as measured by phase angle. Two questions emerge when one examines the results in Figure 2. What is the effect of asymmetry, in relation to the length L on resonant frequency and its intensity as measured by Φ ? Second, what geometric parameter determines the location of resonant frequency and its intensity? It is recognized that cantilever length is a significant parameter. Both of these questions are answered using experiments, finite element model and an approximate analytical model.

Effect Of Asymmetric Anchor Extent (a) On Resonant Frequency And Its Intensity

[0037] To determine the effects of the asymmetry parameter a , sensors were fabricated with symmetric anchor first and then progressively increased asymmetry extent by adding epoxy to one side of the base of the PZT cantilevers in a pre-determined fashion. After the epoxy had cured, the frequency spectrum of the modified sensor was determined. This progressive approach allowed modification of a single sensor and evaluate changes in its spectral properties in a systematic fashion. In Figure 2B it is shown the spectrum of one such sensor (sensor 18 of Figure 1, wherein total length, L , = 3.15 mm) and was typical of all fabricated sensors ($n=16$). Sensors with symmetric anchor (spectrum shown in black) showed no measurable resonant modes. When anchor asymmetry was introduced by reducing the length on one side from 3.15 mm to 2.63 mm (sensor 18 of Figure 1), two low-order modes appeared with the first mode at 8.54 kHz ($\Phi=-88.5^\circ$; $Q=16$) and the second mode at 52.03 kHz ($\Phi=-86^\circ$; $Q=52$). Upon increasing the extent of asymmetry further by reducing the length from 2.63 to 2.17 mm (sensor 20 of Figure 1) the two resonant modes increased both in location (11.53 and 66.5 kHz) and phase angle ($\Phi=-87.1^\circ$, -81.8°). It was found that the peak amplitudes depend on the extent of asymmetry introduced, a result confirmed by the finite element model. A conclusion drawn from examining the spectra of over 30 similarly constructed sensors is that asymmetry increases both resonant frequency and the phase angle.

Comparison Of Finite Element Model And Experiments

[0038] Figure 3 contains Figure 3A and Figure 3B. Figure 3A illustrates a finite element model (FEM) solution showing effects of anchor asymmetry and phase angle behavior at resonance for the sensors depicted in Figure 2A. Figure 3B illustrates a FEM solution for resonant modes as a function of anchor asymmetry extent. The solutions correspond to the fabrication shown in panel 14 of Figure 1 and the experimental spectra illustrated in Figure 2B. Plots are shown in Figure 3B with a 1° offset for clarity.

[0039] A two dimensional (2D) FEM of the PZT cantilever was constructed to determine the effects of anchor asymmetry on resonance frequency and the corresponding charge accumulation in PZT at resonance. Magnitude of current correlates with phase angle. Mathematically, symmetric anchor is one in which no constraint is specified along both top and bottom length of the cantilever. The distal end is also unconstrained. Zero displacement is specified at the left plane (shown as hatched boundary) in Figure 1. Electrical boundary condition of excitation voltage is specified on the electrodes- top and bottom surfaces. Such a boundary condition excites the sensor at the same 100 mV potential used experimentally. Sensor

16 of Figure 1 is an example of a symmetric anchor and sensors 18, 20, and 22 of Figure 1 represent asymmetric anchors of various extents. The hatched boundaries (24, 26, 28, 30) in Figure 1 are constrained (zero displacement), while the unhatched boundaries are unconstrained. Eigenfrequency analysis yields resonant frequency values and current in PZT. The eigenfrequency of a symmetrically anchored PZT cantilever ($L = L_s = 3.2$ mm) yields resonance at 5.98, 37.25, and 103.29 kHz, but experimentally resonance was not observed from measurement of phase angle, Φ in the same frequency range (Figure 3B). Frequency response analysis of the finite element model enables calculation of dynamic steady-state response as a function of the excitation frequency. This analysis solves for resonance electrically as was done experimentally. Although eigenfrequency calculations showed that the PZT cantilever has three bending resonant modes in 1 - 130 kHz, frequency response analysis indicated that the resonant modes were not measureable by impedance changes because the resonance behavior did not manifest electrically, and is illustrated in Figure 3B. One notes that there was no change in phase angle or change in current in PZT at the resonance for a symmetric anchor. This result compares exactly with the experimental measurement that a perfectly symmetric anchor ($cc=0$) leads to no electrical manifestation of resonance. To confirm the experimental observation that resonant modes become observable with anchor asymmetry, the FEM was modified with asymmetric anchor boundary condition was solved. The results (Figure 3B) show that the resonant modes obtained from eigenfrequency analysis becomes observable by phase angle measurement only if asymmetry boundary is present. The asymmetry in the anchor results in a change in current at resonance resulting in phase angle change. Thus removal of symmetry allows charge accumulation in PZT instead of destructive neutralization.

[0040] In Figure 3B the FEM frequency response spectra of cantilevers with various extents ($L=3.2$, $cc=0.5, 0.9, 1.3$ mm) of anchor asymmetries are shown. Asymmetry extent significantly affects both the resonant frequency values and Φ , but minimally affects the Q -values, and is consistent with experiments. For the case $cc=0$, the mechanical resonance was not present electrically. Although mechanical resonant modes were predicted by eigenfrequency analysis, the phase angle and current density did not vary at resonant frequency, but remained nearly constant at 2.3 and 14.4 A/m² for the two modes. For the case $a = 0.5$ mm, the first and second modes were determined by FEM at 8.05 ($Q=82^\circ$, $\Phi=-87.54^\circ$) and 50.54 ($Q=106$, $\Phi = -86.76^\circ$) kHz, respectively. Further increase in asymmetry a to 0.9 or 1.2 mm led to further increases in resonant frequency and phase angle, and are consistent with experimental results.

The FEM and experimental results for the various asymmetries investigated are summarized in Table S2 below.

TABLE S2

L_s mm	α mm	Experimental						Finite Element Model (FEM)							
		First Mode			Second Mode			First Mode				Second Mode			
		f (kHz)	Phase Φ	Q - value	f (kHz)	Phase Φ	Q - value	f (kHz)	Phase Φ	Q - value	ΔI (A/m ²)	f (kHz)	Phase Φ	Q - value	ΔI (A/m ²)
2.62	0.52	8.5	-88.5°	16	52.0	-85.9°	52	8.06	-87.5°	86	12.2	50.45	-86.8°	106	127
2.17	0.98	11.5	-87.2°	23	66.8	-81.8°	61	11.15	-86.2°	86	19.4	68.85	-85.5°	106	199
1.82	1.32	15.5	-85.9°	31	83.3	-78.1°	45	14.6	-84.9°	86	33.3	90.15	-84.1°	106	316

[0041] The FEM results correlate the increase in current density (I) at resonance to phase angle increases. For example, the current density change (ΔI) corresponding to the case $a = 0.5$ mm was 12.2 and 127 A/m² for the first and second modes, respectively. For the case of $a = 0.9$ mm the phase angle values were higher compared to the $a = 0.5$ mm case, and FEM results show that the current density change was also higher for both modes, being $\Delta I = 19.4$ and 199.8 A/m², respectively. As observed experimentally the case $a = 1.2$ mm led to the highest Φ and ΔI for both the modes ($\Delta I = 33.3$ and 316 A/m², respectively). Since the frequency of resonant modes was dependent on the asymmetry level, the role of a on resonant frequency values was further investigated.

Role Of Asymmetry Extent On Frequency Response Of PZT Cantilevers

[0042] The PZT cantilevers were fabricated such that one of the flat sensor surfaces was fixed in epoxy to a greater extent than the other, thus introducing asymmetric anchor. This resulted in the length of one side of the cantilever to be longer than the other. Since low-order bending modes are measurable in asymmetrically anchored PZT cantilevers, an understanding of their dependence on the introduced asymmetry will be of great value in design. Resonant frequency (f_n) of a uniform cross section cantilever depends on the spring constant and effective mass, and hence on the cantilever length.

$$f_n = \frac{\lambda_n^2}{2\pi} \frac{1}{L^2} \sqrt{\frac{EI}{wt\rho_c}} = \frac{1}{2\pi} \sqrt{\frac{k}{m_{e,n}}} \quad (3)$$

where λ_n are the nth root of: $1 + \cosh(\lambda_n) \cos(\lambda_n) = 0$. The parameters k and $m_{\text{eff},n}$ are the effective spring constant ($= 3EI/L^3$; E is Young's modulus of PZT, I is moment of inertia $wt^3/12$) and the effective cantilever mass ($= 3mc/8$, mc is cantilever mass $\rho_c wtL$), respectively. Equation (3) suggests that the resonant frequency depends on inverse of cantilever length squared.

[0043] Figure 4 includes Figure 4A and Figure 4B. Figure 4 illustrates dependence of resonant modes on the shorter length (L_s) of asymmetrically anchored cantilevers. In Figure 4A, the sensors of same initial length ($L=3.15$ mm) are anchored asymmetrically to various extent as shown in Figure 1. In Figure 4B the sensors of various initial lengths asymmetrically are anchored. Both first and the second mode resonant frequency strongly depend on L_s . Results are compared with FEM calculations and modeled in Eq.(3) with $L = L_s$. Since asymmetric anchor was created by modifying the cantilever length, and experimentally increasing the anchor asymmetry parameter a increased the resonant frequency, it is reasonable to expect the increase depends linearly with $1/L_s^2$.

[0044] Such a relationship holds true and is illustrated in Figure 4A for the two sets of sensors fabricated with $L=3.15$ mm, and epoxy was added in steps as shown in Figure 1. The resonant frequency values of the six sensors show a near perfect linear relationship for both modes. On the same plot FEM solution corresponding to the boundary condition illustrated in Figure 1A is also shown. The agreement between experiment and FEM suggest that the resonant frequency of asymmetrically anchored sensor can be calculated with reasonable accuracy from Equation (3) by setting the length as L_s .

[0045] A plot similar to Figure 4A was prepared which included all sensors tested ($n > 60$). The longer length of fabricated PZT cantilevers were in the range of $L = 1.2$ to 3.5 mm with asymmetries ranging from $a = 0.03L$ to $0.69L$. When the short length (L_s) was greater than 1.5 mm both the first and the second modes were present in 0 - 100 kHz, and for sensors with $L_s < 1.5$ mm only a single mode in the same frequency range was measured. As one can see in Figure 4B, deviation from linear dependence for the second mode is seen for the sensors $1/L_s^2 > 0.3 \text{ mm}^{-2}$, which represents sensors with large asymmetry values, a . This deviation is because long asymmetric anchor made of epoxy is likely to act as an "epoxy cantilever" attached to the PZT cantilever. In addition for large a values, the sensor geometry deviates significantly from that of a cantilever as length and width dimensions are nearly equal. The data in Figure 4 show that

small asymmetry ($a < 0.5$ mm) is sufficient to express measurable resonant modes, and if fundamental resonant frequency is to be increased, extent of asymmetry should be increased. It is reasonable to ask if the short length controls the eigenfrequency, what advantage there is in having additional PZT that is anchored on only one side in epoxy. The answer is that a sensor with equal length on both sides, whether be it short or long, would constitute a symmetric anchor and the resonant mode will not be measurable. Although the resonant mode is present in a highly diminished state in a sensor with perfect anchor, its impedance change at resonance would be far too small for measurement. Consequently asymmetry in the anchor is paramount for measuring electrically resonance in PZT cantilevers.

Sensitivity Of Asymmetrically- Anchored PZT Cantilever Sensors To Changes In Density Of Surrounding Medium

[0046] The resonant modes respond in a symmetrically- anchored PZT cantilevers respond to mass addition. For example, when a PZT cantilever is immersed in DI water, the resonant frequency decreases because of the significant increase in the density of the surrounding medium. While such results give mass sensitivity information, it is important to investigate the frequency shifts for small density changes in liquid, as that more closely represents sensing response to target analytes. It was noted here that the purpose is not to show that the PZT cantilevers are density sensors, but use of such an experimental approach to calculate mass-change sensitivity. The fluid adjacent to the sensor acts as added mass and one can estimate the mass-change sensitivity using density change experiments. A change from DI water to 2.5 mM PBS is a small change in density of 0.003 g/cm^3 , and hence the frequency response to such a density change can provide a measure of sensitivity.

[0047] Figure 5 includes Figure 5A, Figure 5B, and Figure 5C. Figure 5A illustrates frequency shift responses for alternate changes in liquid density from DI water to various concentrations of PBS. Figure 5B illustrates frequency shifts obtained for various density liquids agree with the model given in Eq. (8) below. Figure 5C illustrates sensitivity of the two modes as a function of added mass, and is plotted as a function of solute (phosphate) mass fraction. The density values corresponding to the three mass fractions are: 1.001, 1.004 and 1.008 g/cm^3 .

[0048] Figure 5A shows frequency response to various density fluids. The sensor ($L=3.1$ mm, $f_1=11.7$; $f_2=63.1$ kHz) in a custom-built flow cell and allowed to reach a steady state ($t < 15$ minutes) in DI water at 0.6 mL/min. DI water was then replaced by admitting 10mM PBS and the resonant frequency response of the two modes were monitored continuously. The

decrease in resonant frequency occurred in a few minutes, and reached a new steady state value. Re-introduction of DI water caused the resonant frequency to return to the original value. In a similar fashion, alternately switched between DI water and 5 mM and 2.5mM PBS. Frequency shifts of 18, 8 and 2 Hz in f_1 and 63, 32 and 14 for f_2 were observed in response to a density change from DI to the three PBS solutions. The near linear dependence of average responses ($n=8$) to density is plotted in Figure 5B. The results confirm that higher frequency modes exhibit a greater response for the same imposed density change.

[0049] Considering the density change as an added mass (Δm) response, Equation (3) can be written as:

$$f'_n = \frac{1}{2\pi} \sqrt{\frac{k}{\left[\frac{3}{\lambda_n^4} [(m)_c + \Delta m] \right]}} = \frac{1}{2\pi} \sqrt{\frac{k}{(m_{c,n} + \Delta m_n)}} \quad (4)$$

where the added fluid mass is assumed to be uniformly distributed along the entire cantilever length. Thus, the effective mass addition due to surrounding density change can be written as:

$$\Delta m_n = \frac{k}{4\pi^2} \left[\frac{1}{f_n'^2} - \frac{1}{f_n^2} \right] \quad (5)$$

[0050] In the above, all parameters are known and thus the effective mass change due to density change can be calculated, and the sensor mass-change sensitivity (σ = ratio of mass change/resonant frequency change) can be computed from:

$$\sigma = \frac{\Delta m_n}{(f_n - f_n')} = \frac{k}{4\pi^2} \left[\frac{f_n + f_n'}{f_n^2 f_n'^2} \right] \quad (6)$$

[0051] For the case of shift from DI water to 2.5 mM PBS, the first mode and second mode responses were 3 and 10 Hz, and effective mass change for the two modes were 101.6 and 6.9 ng, yielding σ values of 33.9 pg/Hz and 217.8 pg/Hz. A plot of σ values of the two modes is plotted as a function of added equivalent mass computed using Equation (5) is shown in Figure 5B. The increasing trend with increasing mass fraction of solute indicates that

numerically σ increases with added equivalent mass (Δm_n). That is, mass-change sensitivity decreases. The results in Figure 5B show that for the same density change of DI water to 2.5 mM PBS, the calculated sensitivities of the first and second mode are: $\sigma \sim 33.9$ ng/Hz and 217 pg/Hz, respectively.

[0052] An alternate method of analyzing density change is to use the density response relationship reported in the literature for uniform cross section cantilever sensors. That is:

$$\frac{f_{fluid}}{f_{vac}} = \left(1 + \psi \cdot \frac{\pi \rho_w}{4 \rho_c t} \right)^{-1/2} \quad (7)$$

where f_{fluid} and f_{vac} are resonant frequency in fluid of density (ρ) and resonant frequency in vacuum. The geometric factor ψ was originally introduced that corrects for the aspect ratio of the cantilever. The PBS density can be expressed as $\rho(X) = \rho_w(1 + \alpha X)$ where X is the mass fraction of solute phosphate, ρ_w is the density of water at 20°C (0.998 g/mL) and α is a dimensionless coefficient that fits experimentally determined solution density. Thus, Equation (8) can be arranged to:

$$\left(\frac{f_w}{f_x} \right)^2 = 1 + \alpha \frac{\psi \beta}{1 + \psi \beta} X \quad (8)$$

where $\beta = \pi \rho_w w I A p_c t$ contains only physical properties and geometric parameters and $\psi = 0.613 L \sqrt{L} / \rho_c \sqrt{t}$ for the first mode and for higher modes the value is determined experimentally. Although ψ depends on the geometry and mode number, it is a constant for a given cantilever. Therefore, it was expected that a plot of $(f_w / f_x)^2$ against solute mass fraction X would be a straight line as given in Figure 5C. As can be seen in that figure the experimental correlation is linear with correlation coefficient for both modes being better than 0.999. The slope obtained for the first mode with experimental data is 0.315 and compares favorably with 0.312 and 0.351 determined from Equation (7) and ψ from previous calculations, respectively. For the second mode it was noted that the experimental results follow the predicted straight line relationship, but a quantitative comparison of slope is not possible without the empirical constant that is specific to the geometry tested for the second mode.

Sensitivity Measured Using A Binding Reaction

[0053] Density shifts provided an estimate of sensing sensitivity of the two modes. A density change causes a uniform loading of mass all along the entire cantilever. In a sensing application, the target analyte binds to receptor immobilized on the sensor. The receptor is often immobilized at the distal tip of the cantilever. Therefore, a truer measure of sensitivity is the response associated with binding reaction to the sensor surface. In order to examine this property of the fabricated PZT cantilevers, resonant frequency response to chemisorption reaction of dodecanethiol was measured. The sulfur in thiol binds to gold <111> sites with high affinity that is equivalent to a covalent bond.

[0054] A thin layer of gold (100 nm) was sputtered down at the distal end of $\sim 1\text{mm}^2$, that provided Au <111> sites. This experiment was carried out in ethanol at a flow rate of 0.6 mL/min. Once the resonant frequency reached a steady state, the flow was changed from ethanol to 60 pM dodecanethiol in ethanol. As soon as dodecanethiol came in contact with the sensor the resonant frequency began to decrease monotonically and reached a new steady state resonant frequency in about 10 minutes. The resulting frequency shifts obtained were 26 Hz and 123 Hz for the first and second modes, respectively. The response reached steady state in 14 minutes during which the sensor was exposed to 101.8 pg of dodecanethiol. If assumed that all entering dodecane thiol chemisorbed to Au<1 11> sites on the sensor (an unlikely event) one would estimate sensitivity as 3.9 pg/Hz for the first mode and 828 fg/Hz for the second mode. As expected, the mass-change sensitivity for sensing application of the PZT cantilever is higher than the value calculated from density change experiments, because in the latter mass loading was on the entire sensor.

[0055] Figure 6 illustrates the frequency response of the first and second bending modes in response to 30 pM dodecanethiol. Once the thiol comes in contact with the sensor, the frequency starts decreasing and reaches a steady state on the surface has saturated with the thiols. The frequency shifts obtained for the first and the second mode were 23 Hz and 123 Hz for the same chemisorbed mass.

[0056] In a study with PZT composite cantilever sensors in which PZT was bonded to a stainless steel film to induce bending mode, a 1 nM hexadecane thiol induced a 116 Hz response when measured in batch mode. The sensor was wider (2 mm) and length of stainless steel was 3 mm and the third mode resonant frequency 45.5 kHz was used for sensing. If was assumed that

all thiols in the 1 mL sample chemisorbed, sensitivity calculated is ~ 2.2 pg/Hz and is poorer than the sensitivity value obtained for second mode in the present study. It is believed that the second mode PZT cantilever is more sensitive (lower σ) than the third mode of composite PZT/stainless steel sensor because of the absence of parasitic mass.

[0057] By asymmetrically anchoring PZT, one can measure the first two resonant bending modes electrically without any external instrumentation. This approach is a significant improvement over the previous approach of bonding a non-piezoelectric material to induce measurable bending modes as it improves mass-change sensitivity due to avoidance of parasitic mass of non-piezoelectric layer. The first mode sensitivity is -30 ng/Hz and -217 pg/Hz for the second mode when mass loading occurs along the entire cantilever length. In chemisorption experiments where binding occurred in the tip region, the same sensor showed an order of magnitude higher sensitivity of 3.9 pg/Hz and 828 fg/Hz for the two modes. The latter is more sensitive than similar sized composite cantilever sensors consisting of PZT-glass or PZT-stainless steel.

Asymmetric Electrodes

[0058] The uniform cross-sectioned lead zirconate titanate (PZT) macro-cantilever fabricated with an asymmetric electrode increased the Q-value of electrically measured resonant bending modes which exhibit picogram level sensitivity in liquid. Significant responses to density changes as small as 0.004 g/mL were obtained. The third mode was the most sensitive and exhibited a limit of sensitivity of one picogram in liquid as determined from 1-dodecanethiol chemisorption experiments. The sensitivity decreased with chemisorbed mass, and was log-linear over five orders of magnitude. The observed resonance responses are in agreement with literature cantilever bending models.

[0059] Piezoelectric-excited millimeter-sized cantilever (PEMC) sensors containing both a piezoelectric layer (PZT) and a non-piezoelectric layer (glass) enable excitation of mechanical resonant modes. Removal of the non-piezoelectric parasitic mass (glass), combined with an asymmetric electrode design makes excitation and measurement of mass-sensitive low-order resonant modes possible. When a symmetrically-electroded PZT cantilever is excited by an alternating electric field in the polarization axis, the cantilever deforms longitudinally in a harmonic fashion. On the other hand, if the electrode area on one side of the cantilever is less

than on the other, the cantilever experiences differential longitudinal deformation, inducing bending modes.

[0060] Figure 7 illustrates that the resonance spectra of the second bending mode shows partial etching of Ni electrode on one side of PZT amplifies Q by 29 % and gave a slightly higher resonant frequency. Insert B shows a scanning electron microscope (SEM) image of PZT surface showing both the etched (light gray) and not etched (dark gray) portions of the electrode. Insert C is an energy density scan (EDS) showing high energy density of Ni (upper right corner of insert C) where no etching occurred and very low energy density of Ni over etched region.

[0061] The spectra of PZT cantilevers ($3.4 \times 1 \times 0.127 \text{ mm}^3$) prepared with symmetric and asymmetric electrodes were compared for verification of this approach in Figure 7. In Figure 7, the manifestation of the second bending mode increases (-88.7° ; $Q=45$ to -87.5° ; $Q=58$) because of electrode asymmetry enhancing signal-to-noise ratio by a factor of 5. In the example shown, one mm of the nickel (Ni) electrode on the distal side of PZT was etched (10 minutes, 0.1 M FeCl_3) to obtain asymmetric electrode. Removal of Ni was confirmed by scanning electron microscopy and energy density scans (Insert B and C). Although the symmetrically-electroded sensor minimally expressed the resonant mode, the asymmetric ally-electroded sensors always yielded a higher electrical expression of mechanical resonance and Q increased by $33 \pm 13\%$ ($n=9$ sensors).

[0062] Figure 8 includes Figure 8A and Figure 8B. Figure 8A illustrates a schematic diagram of a PEMC sensor before electrode etch. Figure 8B illustrates a schematic diagram of a PEMC sensor after 1 mm of Ni electrode was etched using 0.1 M FeCl_3 solution. Excitation at 0.1 sin(cot) volts applied across the Ni electrodes. Wire contacts provide ability to both excite and measure resonance. Diagram is not drawn to scale. Typical cantilever dimensions range 2.0 - 3.5 mm length, 1 mm width, and 127 μm thick.

[0063] The η^{th} mode resonant frequency of a uniform cross-section cantilever subjected to small deformations ("plane stress" model) is $f_n = (1/2\pi)(1/m_{\text{eff},n})^{1/2}$, where $m_{\text{eff},n} = 3m/\lambda_n^4$ is effective mass, m =cantilever mass, $k=3EI/L^3$ is effective spring constant, E =Young's modulus ($E_i=66 \text{ GPa}$), I =moment of inertia ($=1.71 \cdot 10^{-4} \text{ mm}^4$), L =cantilever length ($=3.4 \text{ mm}$), and λ_n is n^{th} eigenvalue of $1 + \cosh(\lambda)\cos(\lambda) = 0$. Analytically, the first three bending modes are at 5.2, 32.4, and 90.6 kHz. Experimentally, the modes were measured at comparable values of 5.5 ± 0.4 , 30.8 ± 1.4 , and $89.1 \pm 3.7 \text{ kHz}$ ($n=3$ devices). The corresponding Q-values in air were $47 \pm$

8, 48 ± 7 , and 37 ± 3 , and 33 ± 5 , 43 ± 6 , and 29 ± 2 in deionized water (DIW), respectively. The minimal change in Q is due to high Re ($\sim 10^5$) indicating negligible viscous effects.

[0064] For in-liquid applications, the sensor was parylene-c ($5 \mu\text{m}$) coated for insulating PZT. The effective mass of a cantilever in a fluid increases because the fluid adjacent to the cantilever also moves with the oscillating surface. The resonant frequency (f) in a fluid is given by $f_2 = (1 + \rho_2 w / 4 \rho_c t)^{-1/2} f_{\text{vac}}$, where f_{vac} and f_2 are in vacuum and in a medium of density ρ_2 ; t =cantilever thickness and ρ_c =cantilever density. For a submerged cantilever in DIW ($\rho = 0.998 \text{ g/mL}$) the model predicts the first three bending modes at 3.9, 24.4, and 68.1 kHz, respectively. Experimentally, the modes in DIW were at 4.3 ± 0.5 , 26.2 ± 2.1 , and 73.0 ± 3.5 kHz ($n=3$ devices) indicating agreement within 9 %.

[0065] For measuring small density changes, the sensor was installed in a flow cell and a flow rate of $0.6 \pm 0.1 \text{ mL/min}$ was used. *In situ* experiment in a flow format avoids measurement ambiguities and results in reliable and repeatable responses. Details of an example experimental apparatus are shown in Figure 9. Figure 9 depicts an example schematic diagram and picture of experimental apparatus; 4192A LF 5 Hz - 13 MHz Hewlett-Packard impedance analyzer interfaced with a computer excites and measures resonant frequency of a PEMC sensor installed in a custom flow cell. Data acquisition was carried out by a custom LABVIEW program. Isothermal condition is maintained by the incubator at 30°C .

[0066] The resonant frequency of the first three modes was monitored continuously as the running fluid was changed between DIW and phosphate buffered saline (PBS) solutions (2.5 to 10 mM). Upon changing from DIW to higher density PBS, the resonant frequency decreased for all three modes. The shifts were successively higher with mode number and with higher density differences.

[0067] Typical density change response and a compilation of measured frequency changes as a function of liquid density are summarized in Figure 10. Figure 10 includes Figure 10A and Figure 10B. Figure 10 A depicts an example real-time sensor response over the course of a liquid density change experiment. The sensor was initially stabilized in 10 mM PBS creating a baseline for the experiment. After a baseline was reached, the flowing liquid was changed from 10 mM PBS to DIW ($\Delta\rho=0.010 \text{ g/mL}$) and allowed to reach new resonant frequency value. The change caused the frequency to increase by 65 Hz. After reaching steady state in DIW, the flowing liquid was then switched to a less concentrated PBS solution (5 mM,

$\Delta\rho=0.006$ g/mL) resulting in a resonant frequency decrease of 33 Hz. Figure 10 B depicts an example decrease in resonant frequency values for changing from DIW to liquids of higher density is found to be linear with respect to the density of the higher density liquid. The overall change in density investigated is 0.8% which is small enough that a linear response is seen. The model described in the text of the manuscript predicts a square root relationship. Note that the third bending mode is most sensitive.

[0068] The model predicts the first bending mode to decrease by 3, 5, and 9 Hz for changes between DIW and 2.5 mM ($\rho=1.001$ g/mL), 5 mM ($\rho=1.004$ g/mL), and 10 mM ($\rho=1.008$ g/mL) PBS, respectively. Experimentally, successive changes between DIW and 2.5 mM, 5.0 mM, and 10 mM PBS caused the first mode to decrease by 4 ± 1 , 7 ± 2 , and 13 ± 2 Hz ($n=3$ sensors), respectively. For the second mode, the model predicts a decrease of 16, 32, and 54 Hz for the same changes, and experimental results were in agreement being 17 ± 5 , 32 ± 8 , and 65 ± 9 Hz ($n=3$ sensors), respectively. The third mode, in comparison, gave the largest response. The model predicted values were in good agreement with experiments, 45 vs. 41 ± 6 , 89 vs. 76 ± 10 , and 149 vs. 120 ± 11 Hz, respectively; $n=3$ sensors.

[0069] Although density-change experiments give a measure of sensitivity, detection sensitivity is best tested by binding experiments in liquid. Therefore, molecular chemisorption of 1-dodecanethiol (DDT, 202 Da) was conducted in flow. Gold (Au) sputtered on the sensor (0.75 mm^2 per side, 100 nm) gave Au $\langle 111 \rangle$ sites. X-ray diffraction confirmed $>95\%$ Au $\langle 111 \rangle$. The $\langle 111 \rangle$ sites chemisorb sulfur in the sulfhydryl functional group (-SH) of DDT with binding energy comparable to covalent bonding. The sensor ($L=2.2$ mm) was first allowed to reach steady-state in ethanol (0.6 ± 0.1 mL/min; 30.0 ± 0.1 °C) in the custom flow cell apparatus (200 μL contact volume; 1.0 mL flow loop volume; Figure 9). Flow was changed to various DDT solutions (1 pM - 10 nM), and the resonant frequency at 72.6 kHz was monitored continuously as depicted in Figure 11 and Figure 12.

[0070] Figure 11 includes Figure 11A and Figure 11B. Figure 11A depicts an example time-shifted sensor responses for 1-dodecanethiol chemisorption at 1 pM - 10 nM. Shown data are from separate experiments with the same sensor. Figure 11B depicts an example sensor mass-change sensitivity (σ) as a function of chemisorbed mass of DDT shows a sensitivity limit about one picogram in liquid.

[0071] Figure 12 illustrates the resonant mode used for measuring dodecanethiol (DDT) chemisorption in air ($f = 86.9$ kHz, $Q = 61$) and in ethanol ($f = 72.6$ kHz, $Q = 40$). The 33 % decrease in Q -value and resonant frequency decrease of 14.3 kHz was due to immersion in ethanol.

[0072] The resonant frequency decreased as binding occurred. Exposure of a virgin sensor separately to 1 pM, 10 pM, 100 pM, and 10 nM DDT caused decreases of 5 ± 1 , 7 ± 1 , 14 ± 2 and 42 ± 2 Hz, respectively (Figure 8A). Standard deviation noted is signal noise at steady-state. After steady state was reached, switch to ethanol did not result in resonant frequency increase verifying that the response was due to chemisorbed DDT. The binding kinetics yielded rate constants from 0.08 min^{-1} to 0.20 min^{-1} over the concentrations tested, and are comparable with previous work using similar sized alkanethiols. Since each Au $\langle 111 \rangle$ site chemisorbs one DDT molecule and each DDT molecule occupies $\sim 24 \text{ \AA}^2$ area, it was expected that $\sim 10^{13}$ DDT molecules (=one nanogram (ng)) can potentially bind to the sensor, assuming full coverage and low defects. Analytically, the resonant frequency decrease for small mass additions to the sensor can be determined from $df_n/dm = -2f_n/\eta^3/4_n$. For a one ng mass, the model predicts a decrease of 43 Hz, which compares favorably to the experimental results of 42 ± 2 Hz.

[0073] The responses in Figure 11A can be used to determine mass-change sensitivity as a function of chemisorbed mass. The mass-change sensitivity (σ) was defined as the mass that causes a unit resonant frequency decrease. For example, the binding profile for 100 pM DDT showed a transient of ~ 7 minutes, a time during which the sensor was exposed to ~ 90 pg of DDT. Since the resonant frequency decreased by 14 Hz, the mass-change sensitivity, assuming all entering DDT chemisorbed, is 6 pg/Hz. Similarly, 1 pM DDT response gave $\sigma \sim 100$ fg/Hz. Note that σ numerically increases with chemisorbed mass, and exhibits a log-linear relationship over five orders of magnitude tested (Figure 11B). For further verification of sensitivity, mass-addition experiments were conducted in air. To a sensor at 23 °C, 0.2 μL of wax-in-hexane (25 pg/ μL) was added to sensor tip. After hexane evaporated and resonant frequency reached a new steady-state resulting in a decrease of 51 ± 19 Hz ($n=3$ repeat experiment). Such a response indicates a sensitivity of 98 ± 27 fg/Hz in air, and is comparable to in-liquid values because of negligible viscous effects; $Re \sim 10^5$.

[0074] Modifying the electrode of a piezoelectric (PZT) cantilever enables expression of mass-change sensitive resonant modes that normally do not lend themselves to electrical measurement. Chemisorption experiments indicate that sensitivity varies with added mass. At

the lowest added mass (500 fg) the sensitivity is -100 fg/Hz, and at the highest added mass (1 ng) the sensitivity is ~ 24 pg/Hz. A response of 10 Hz at a good signal-to-noise ratio would enable detection of one picogram. If a higher bending mode can be expressed electrically, the model predicts the limit of detection can be further enhanced.

[0075] Although illustrated and described herein with reference to certain specific embodiments, an asymmetric sensor as described herein is not intended to be limited to the details shown. Rather, various modifications may be made in the details within the scope and range of equivalents of the claims and without departing from the spirit of the invention.

What is Claimed:

1. An asymmetrically anchored sensor, wherein:

anchoring on one side of the sensor is longer than anchoring on another side of the sensor; and

resonant bending modes of the sensor are measurable without external instrumentation for measuring sensor oscillation.
2. The sensor of claim 1, wherein the sensor is a cantilever sensor.
3. The sensor of claim 1, wherein the sensor is a piezoelectric cantilever sensor.
4. The sensor of claim 1, wherein the resonant bending modes of the sensor are electrically measurable without external instrumentation for measuring sensor oscillation.
5. The sensor of claim 1, wherein:

the sensor is a piezoelectric cantilever sensor; and

differential longitudinal deformation occurs inducing transverse vibration that causes a detectable charge accumulation in bending mode resonances of the sensor.
6. The sensor of claim 1, wherein the sensor comprises lead zirconate titanate/
7. A sensor comprising asymmetric electrode portions, wherein:

an electrode on one side of the sensor is longer than an electrode on another side of the sensor; and

differential longitudinal deformation occurs inducing bending modes.

8. The sensor of claim 7, wherein the sensor is a cantilever sensor.
9. The sensor of claim 7, wherein the sensor is a piezoelectric cantilever sensor.
10. The sensor of claim 7, wherein the bending modes of the sensor are electrically measurable without external instrumentation for measuring sensor oscillation.
11. The sensor of claim 7, wherein:
 - the sensor is a piezoelectric cantilever sensor; and
 - differential longitudinal deformation occurs inducing transverse vibration that causes a detectable charge accumulation in bending mode resonances of the sensor.
12. The sensor of claim 7, wherein the sensor comprises lead zirconate titanate/

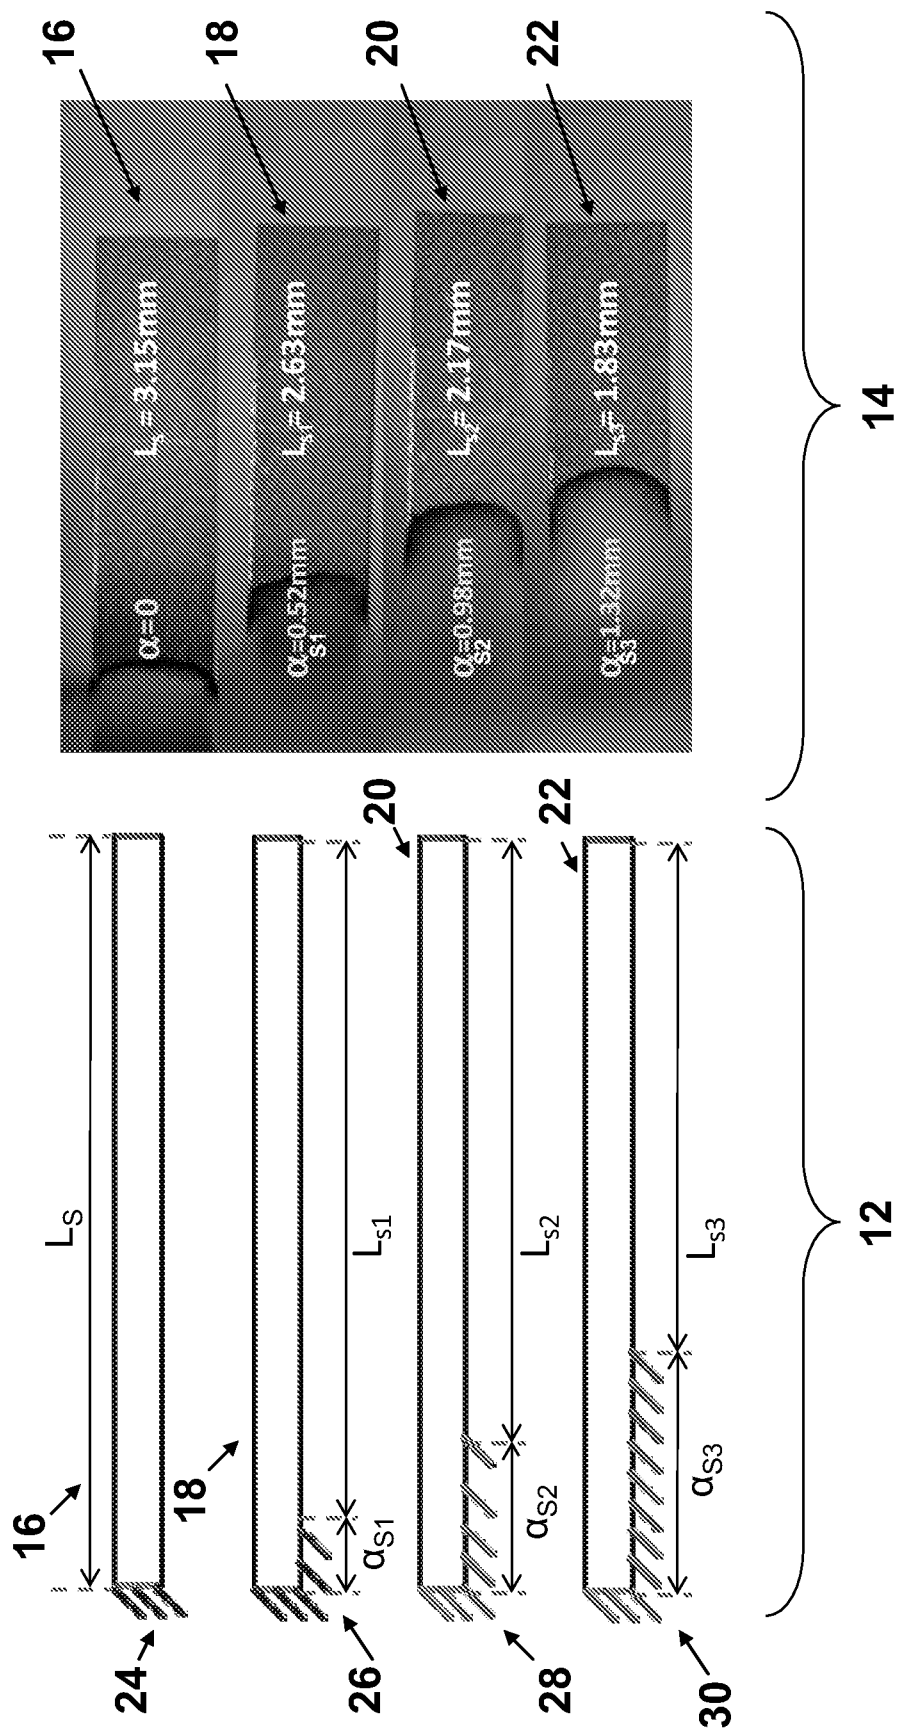
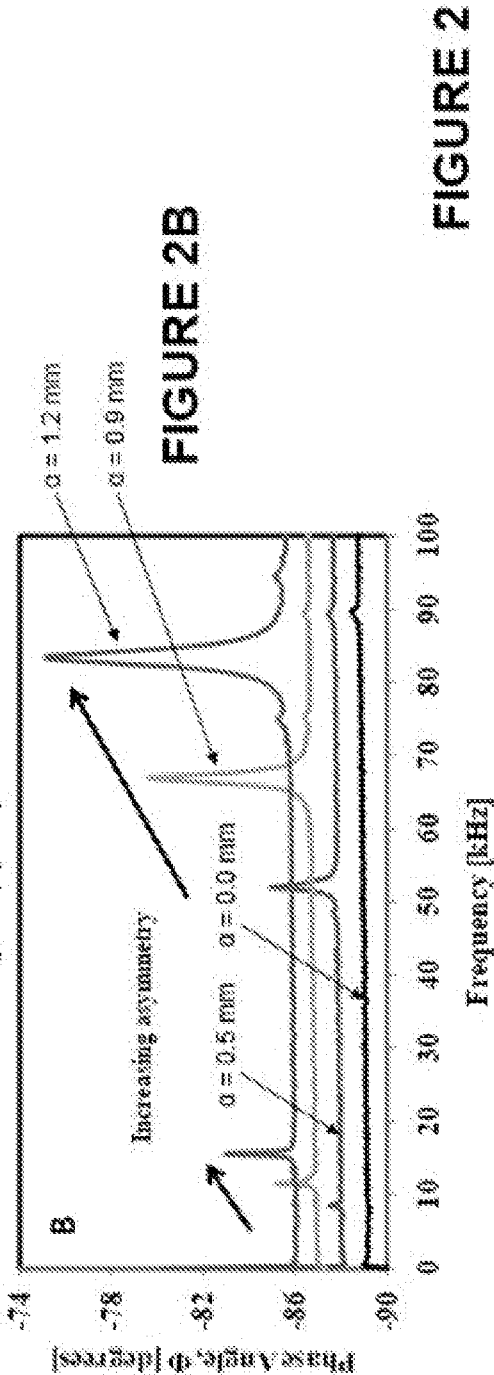
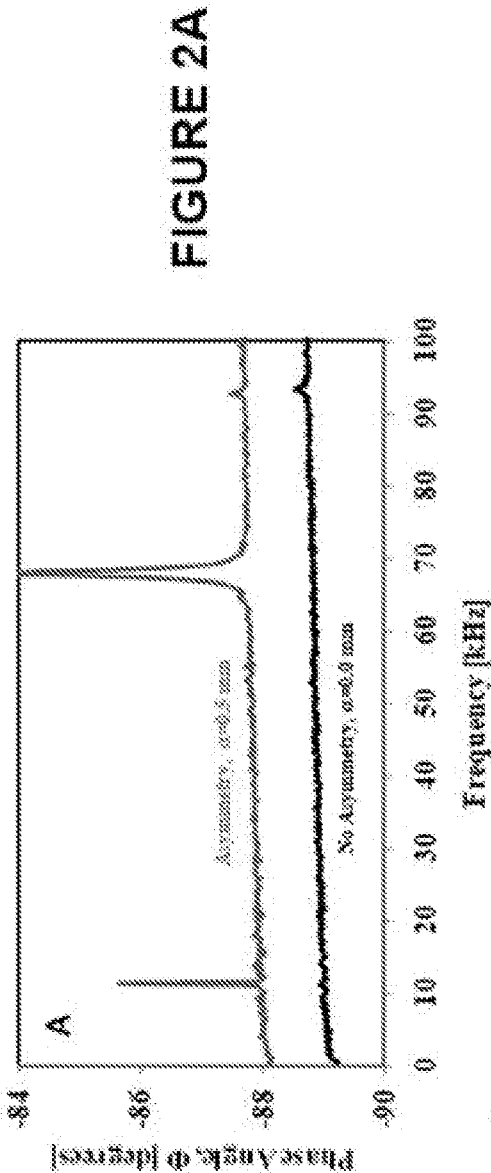


FIGURE 1



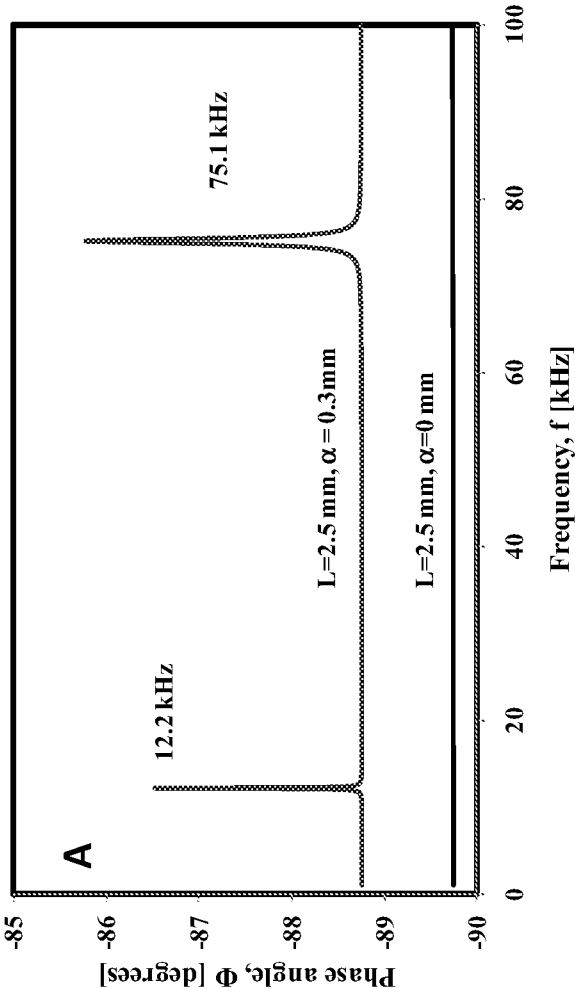


FIGURE 3A

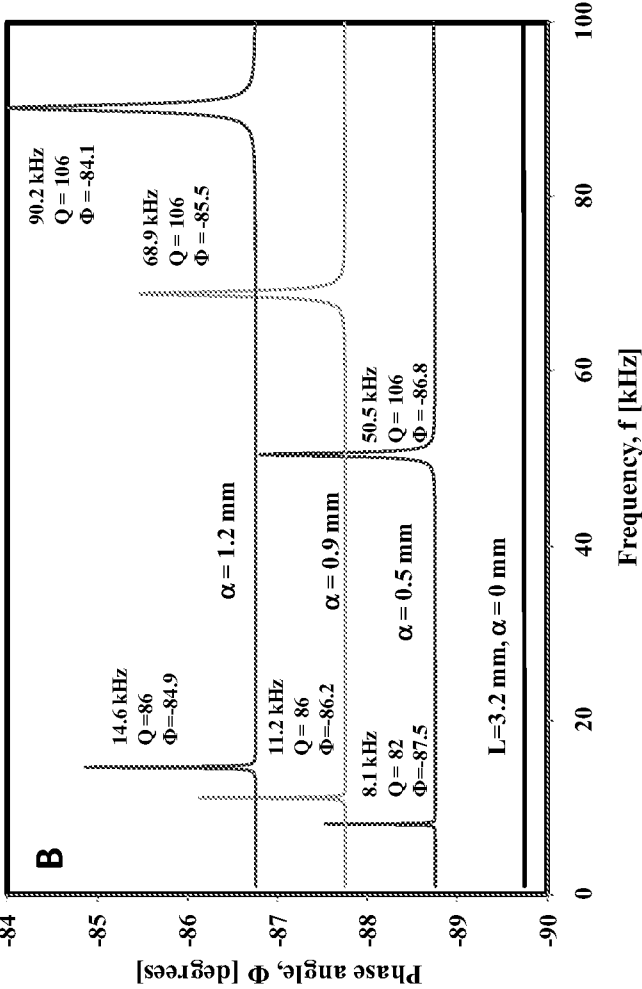


FIGURE 3B

FIGURE 3

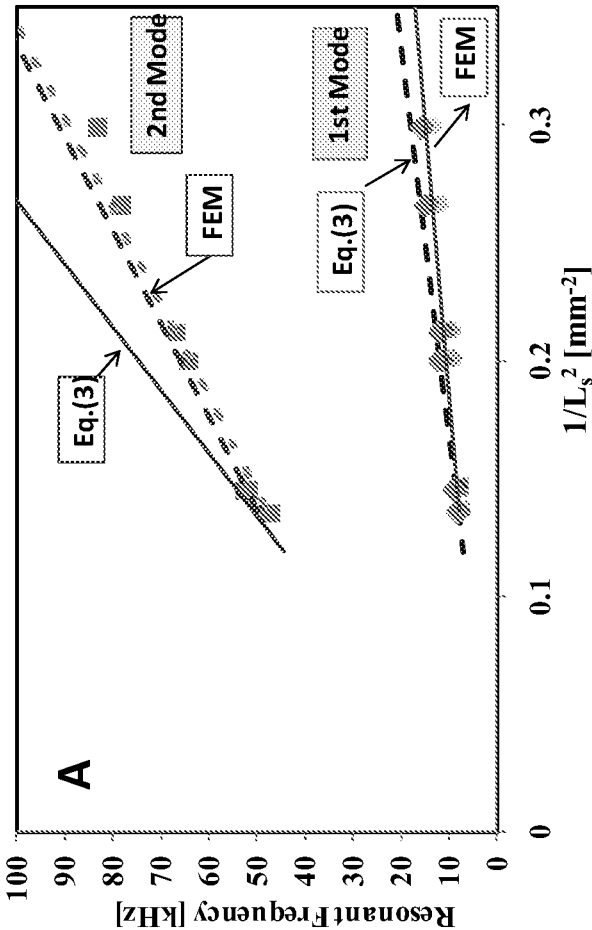


FIGURE 4A

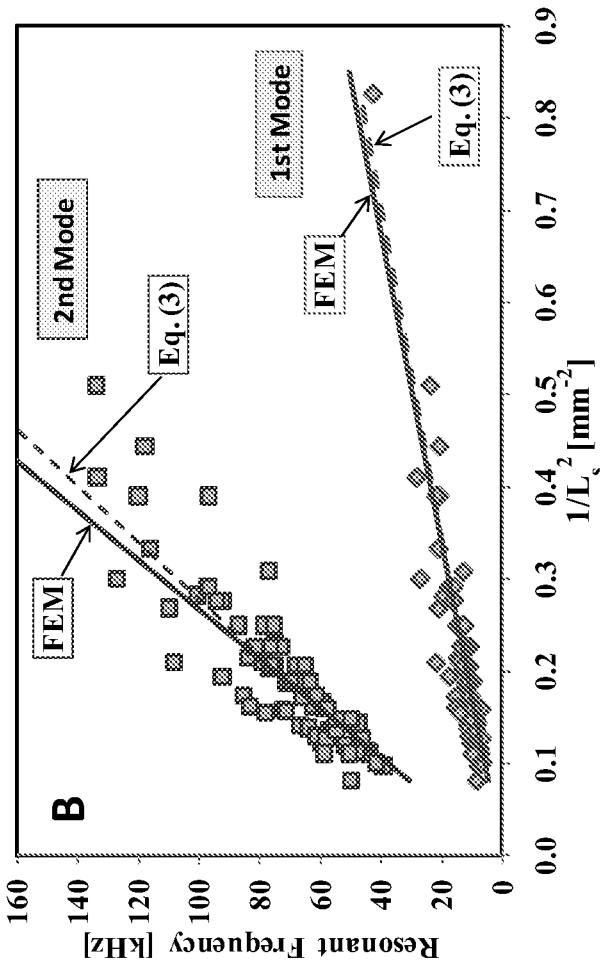


FIGURE 4B

FIGURE 4

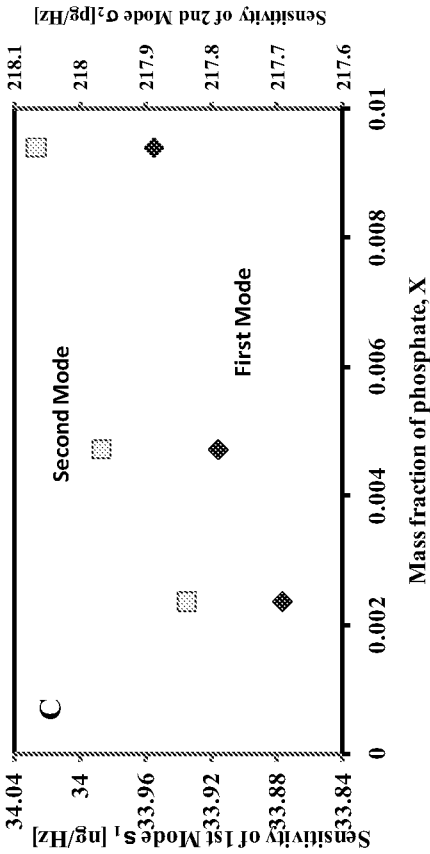
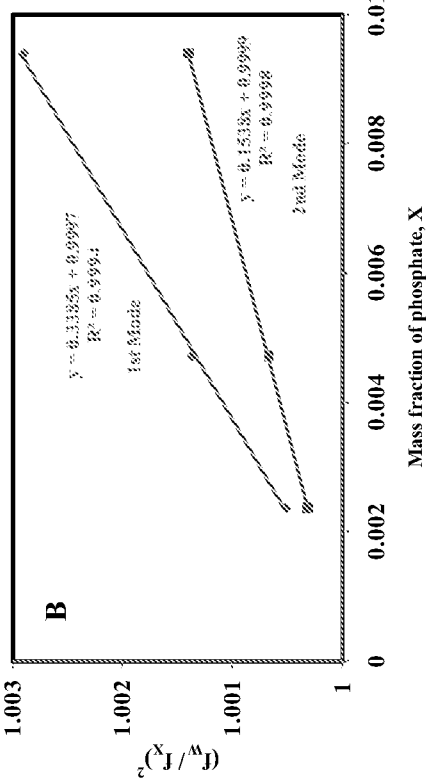
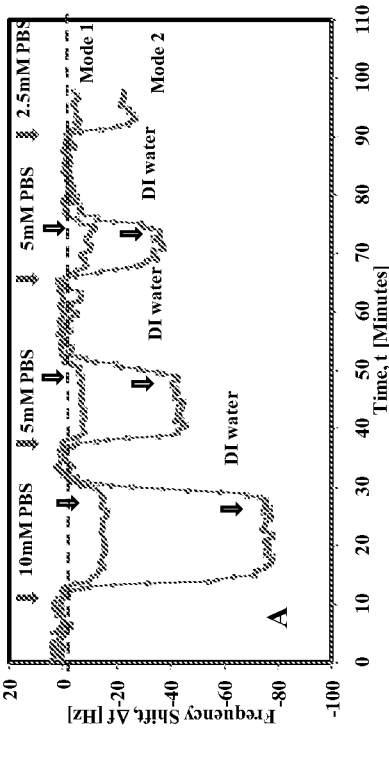


FIGURE 5

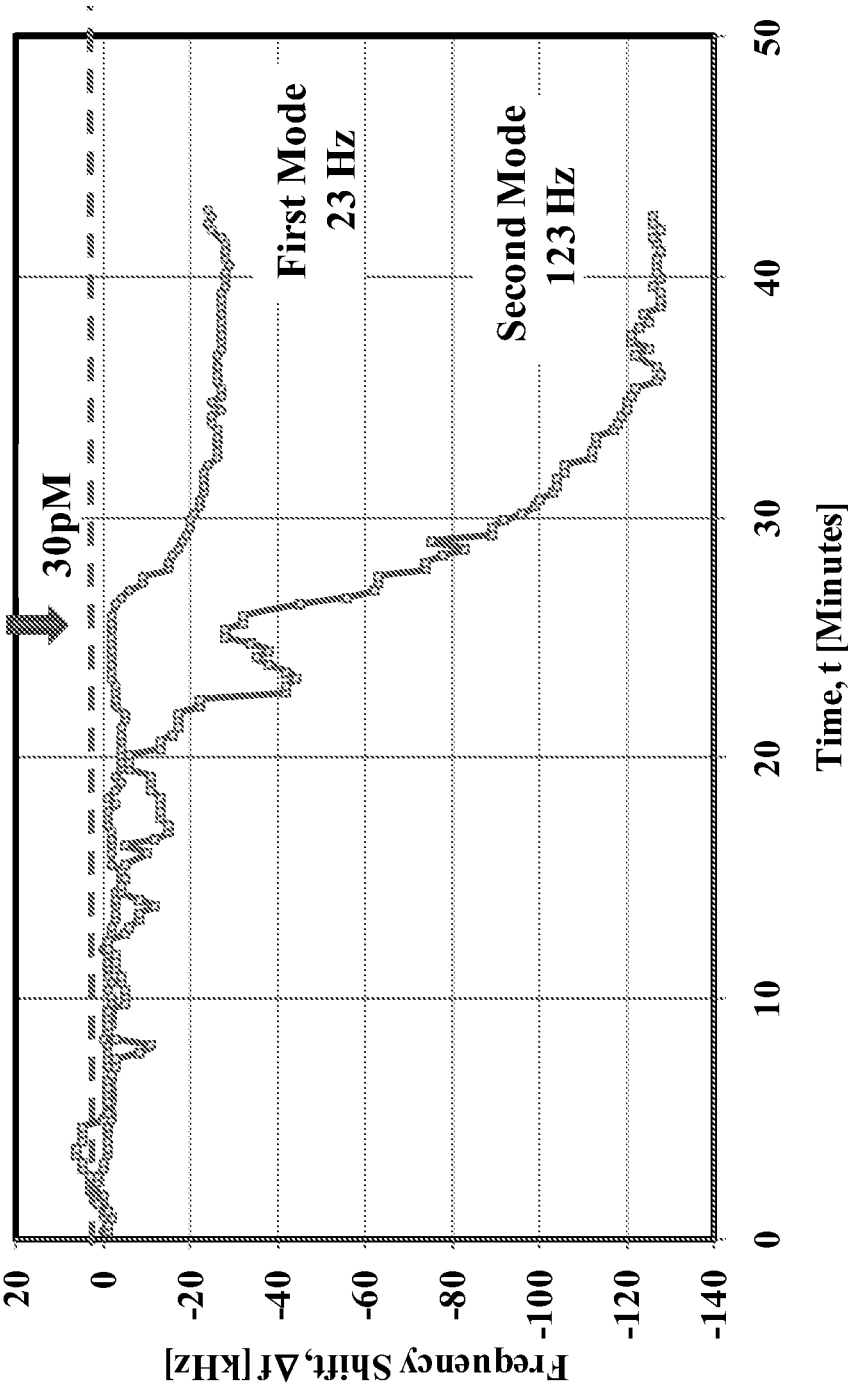


FIGURE 6

7/12

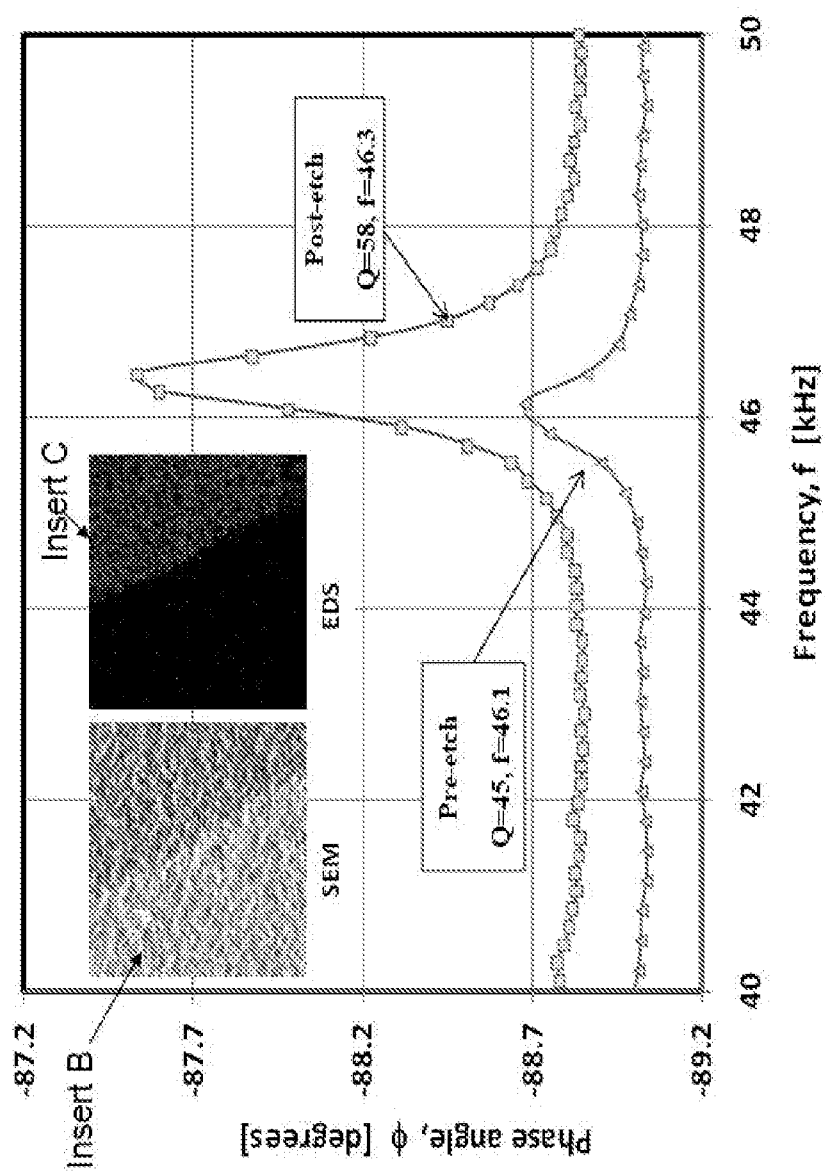


FIGURE 7

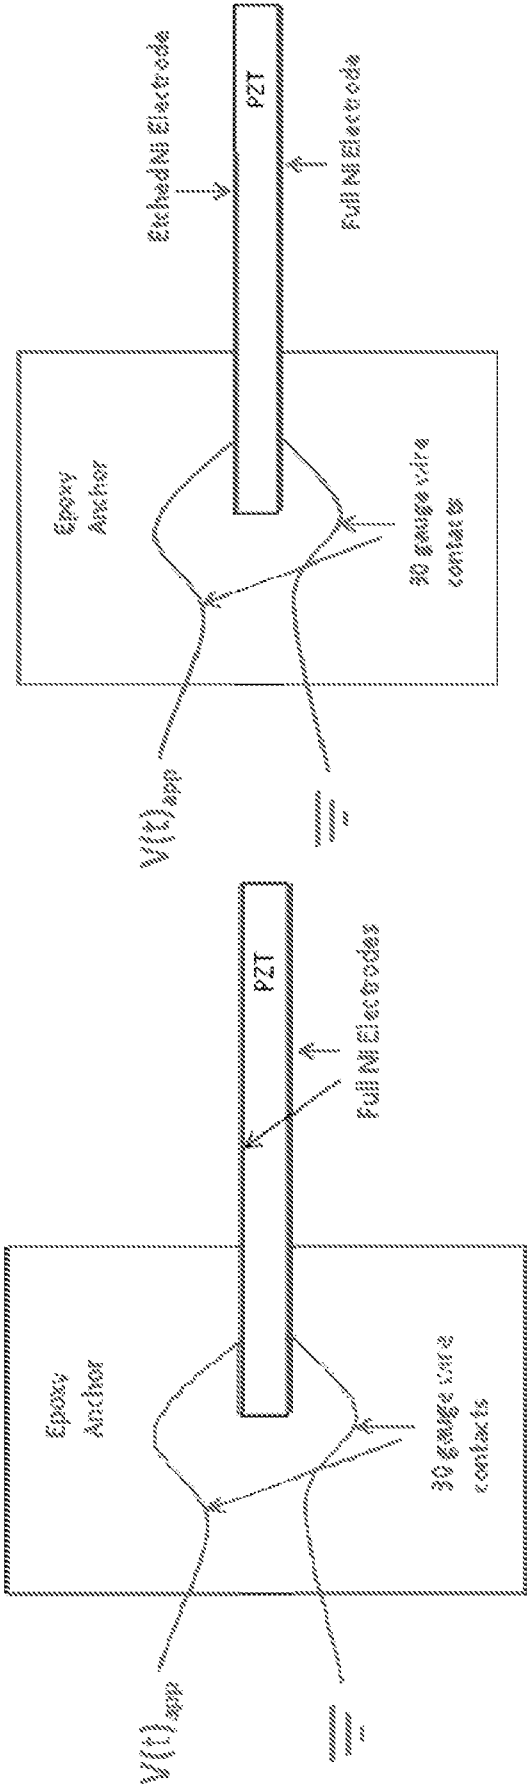


FIGURE 8B

FIGURE 8A

FIGURE 8

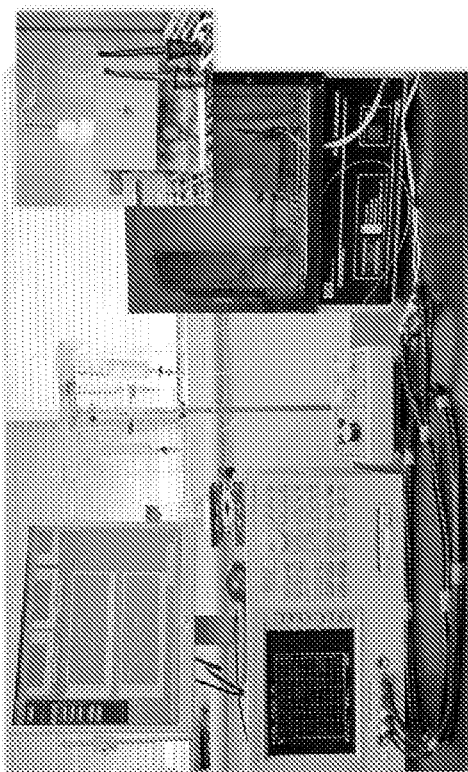
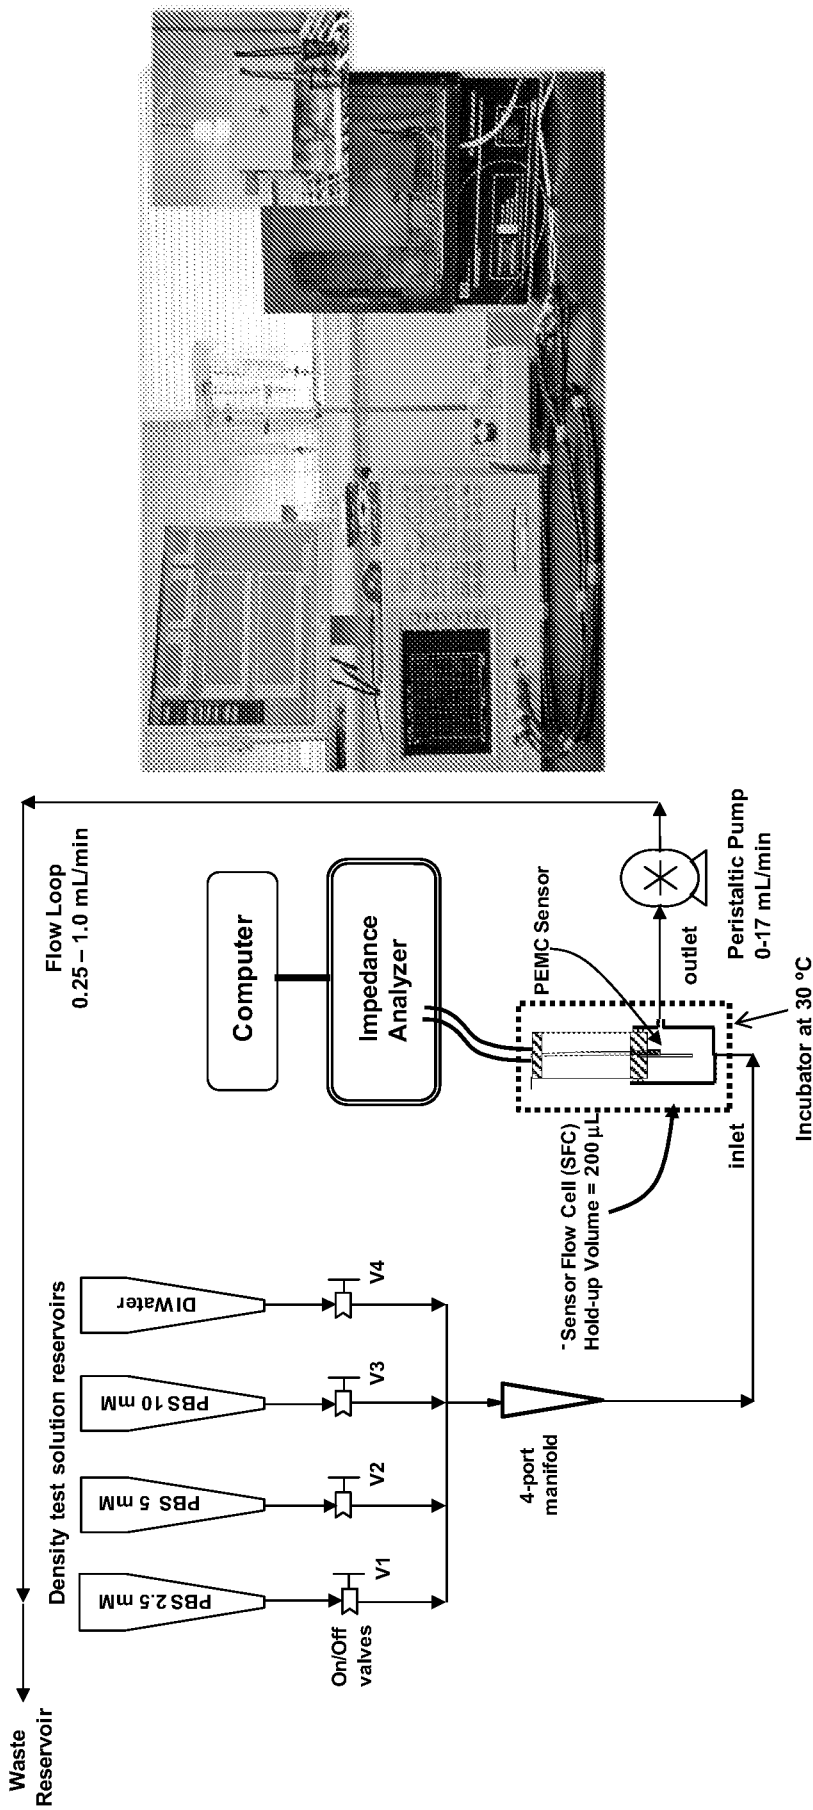


FIGURE 9

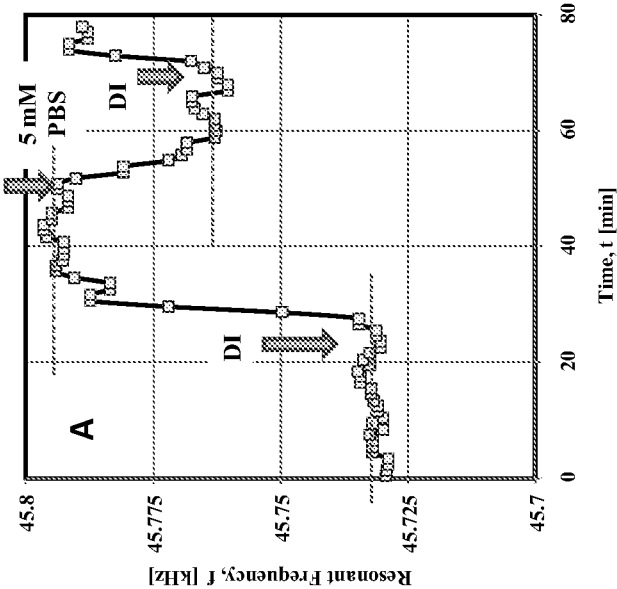


FIGURE 10A

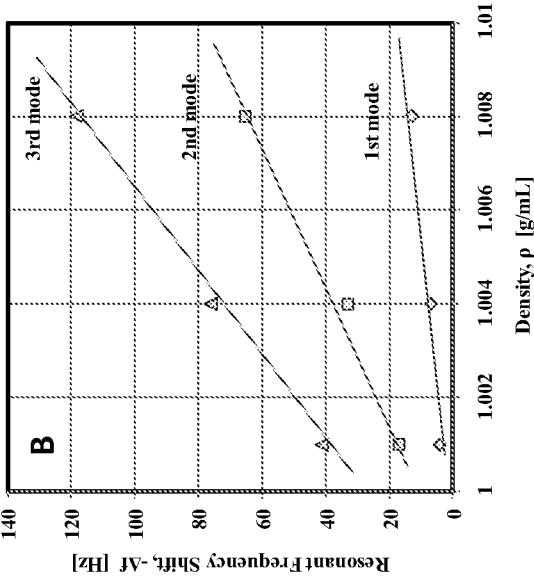


FIGURE 10B

FIGURE 10

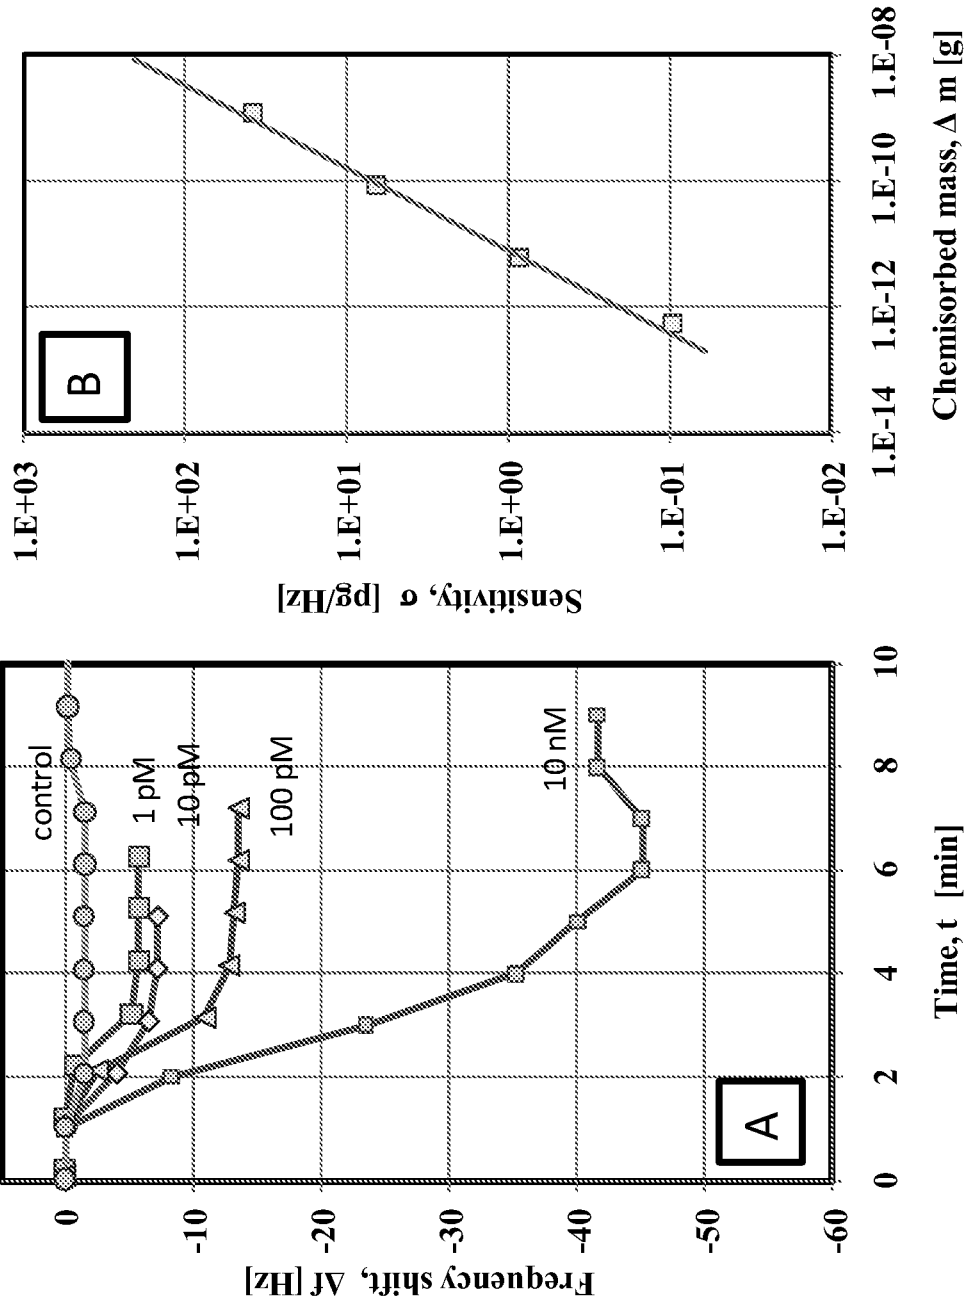


FIGURE 11A

FIGURE 11B

FIGURE 11

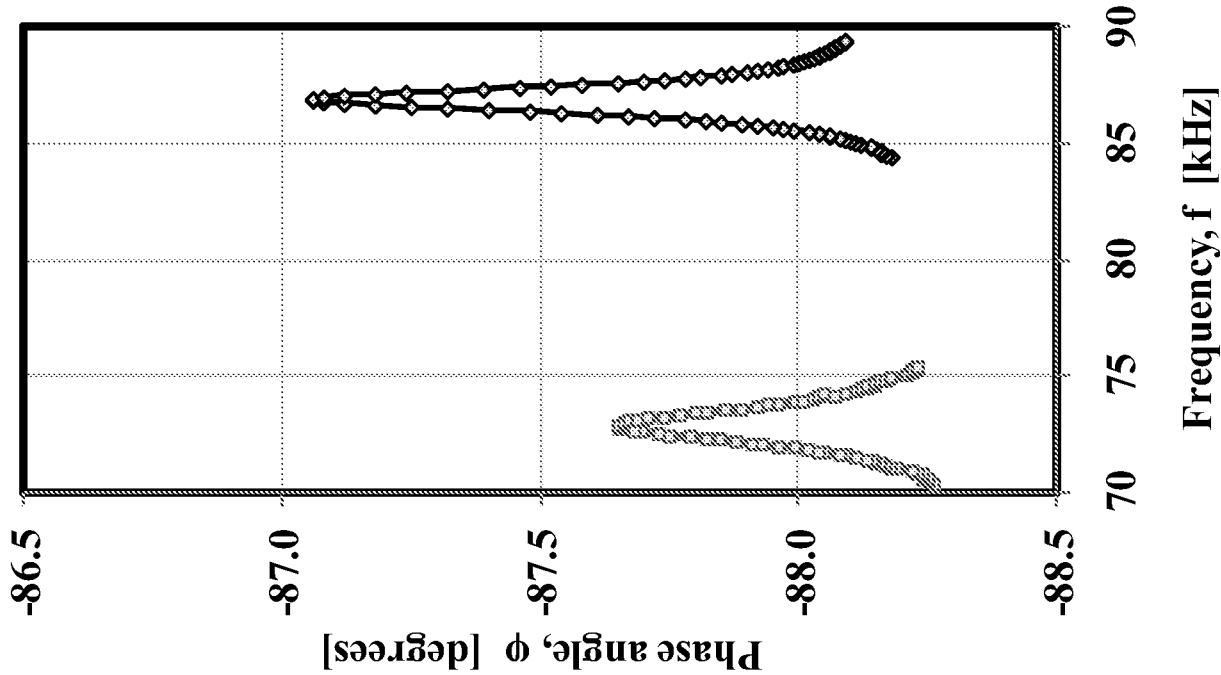


FIGURE 12

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 11/4324₄

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H02N 1/04 (201 1.01)

USPC - 310/323.21

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8): H02N 1/04 (201 1.01)

USPC: 310/323.21

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

IPC(8): H02N 1/04 (201 1.01)

USPC: 73/579; 73/862.639; 438/694; 438/49

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PubWEST; PGPB, USPT, EPAB, JPAB; Google Scholar; Google Patent; Search Terms: PZT piezoelectric sensor electrode cantilever symmetric asymmetric non-symmetric beam vibration frequency mode oscillation anchor bend resonance material zirconate titanate

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009/0053709 A1 (Mutharasan et al.) 26 February 2009 (26.02.2009) para. [0005] through [0074], Fig. 1-15	1-12
A	US 2007/0169553 A1 (Mutharasan et al.) 26 July 2007 (26.07.2007) entire document	1-12
A	US 2008/0087083 A1 (Nishizawa et al.) 17 April 2008 (17.04.2008) entire document	1-12
A	US 2009/0007645 A1 (Shih et al.) 08 January 2009 (08.01.2009) entire document	1-12

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 October 2011 (24.10.2011)

Date of mailing of the international search report

08 NOV 2011

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCTOSP: 571-272-7774