



(51) International Patent Classification:

H04B 7/0417 (2017.01)

H04B 7/06 (2006.01)

H04B 7/0456 (2017.01)

(21) International Application Number:

PCT/EP2020/060409

(22) International Filing Date:

14 April 2020 (14.04.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

19172422.8

02 May 2019 (02.05.2019)

EP

(71) Applicant: FRAUNHOFER-GESELLSCHAFT ZUR FÖRDERUNG DER ANGEWANDTEN FORSCHUNG E.V. [DE/DE]; Hansastrasse 27c, 80686 MÜNCHEN (DE).

(72) Inventors: RAMIREDDY, Venkatesh; C/O Fraunhofer-Institut für Integrierte Schaltungen IIS, Am Wolfsmantel 33, 91058 Erlangen (DE). GROSSMANN, Marcus; C/O Fraunhofer-Institut für Integrierte Schaltungen IIS, Am Wolfsmantel 33, 91058 ERLANGEN (DE). LANDMANN, Markus; C/O Fraunhofer-Institut für Integrierte Schaltungen IIS, Am Wolfsmantel 33, 91058 ERLANGEN (DE).

(74) Agent: GROTH & CO KB; P.O. Box 6107, 102 32 STOCKHOLM (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

(54) Title: METHODS AND APPARATUSES FOR CSI REPORTING IN A WIRELESS COMMUNICATION SYSTEM

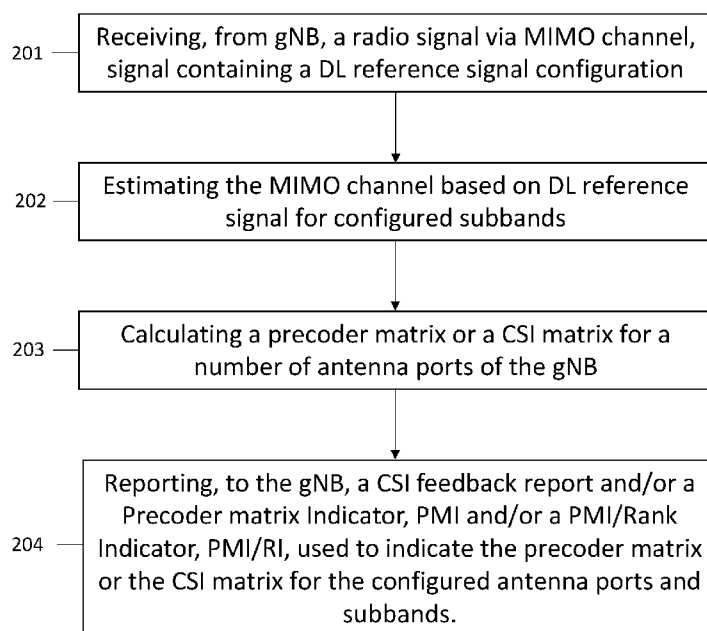


Figure 2

(57) Abstract: The present disclosure relates to methods and apparatuses (UE, network node or gNB) for CSI reporting. The method performed by a UE comprises: receiving (201) from the gNB, a radio signal via a MIMO channel, wherein the radio signal contains at least one DL-RS according to a DL-RS configuration; estimating (202) said MIMO channel based on said received at least one DL reference signal for configured subbands; calculating (203) a precoder matrix or a CSI matrix for a number of antenna ports of the gNB and configured subbands; the precoder matrix being based on a first codebook and on a second codebook and a set of combining coefficients for complex scaling/combining one or more of vectors selected from the first codebook and the second codebook; and reporting (204), to the gNB, a CSI feedback report and/or a PMI/RI, used to indicate the precoder matrix or the CSI matrix for the configured antenna ports and subbands.

OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

METHODS AND APPARATUSES FOR CSI REPORTING IN A WIRELESS COMMUNICATION SYSTEM

TECHNICAL FIELD

- 5 The present disclosure relates to the field of wireless communications, and in particular, to methods and apparatuses for efficient feedback reporting for at least a New Radio- (NR-) based wireless communication network system, which feedback includes Channel State Information (CSI).

BACKGROUND

- 10 In a wireless communications system, such as New Radio, also called 3GPP Fifth Generation wireless communications system or 5G for short, downlink (DL) and uplink (UL) signals convey data signals, control signals comprising DL control information (DCI) and/or uplink control information (UCI), and a number of reference signals (RSs) used for different purposes. A radio network node or a
15 radio base station or a gNodeB (or gNB or gNB/TRP (Transmit Reception Point)) transmits data and DCI through the so-called physical downlink shared channel (PDSCH) and the physical downlink control channel (PDCCH), respectively.

- A UE transmits data and UCI through the so-called physical uplink shared channel (PUSCH) and physical uplink control channel (PUCCH), respectively. Moreover,
20 the DL or UL signal(s) of the gNB respectively the user equipment (UE or a radio device) may contain one or multiple types of RSs including a channel state information RS (CSI-RS), a demodulation RS (DM-RS), and a sounding RS (SRS). The CSI-RS (SRS) is transmitted over a DL (UL) system bandwidth part and used at the UE (gNB) for CSI acquisition. The DM-RS is transmitted only in a bandwidth
25 part of the respective PDSCH/PUSCH and used by the UE/gNB for data demodulation.

- One of many key features of 5G is the use of multi-input multi-output (MIMO) transmission schemes to achieve high system throughput compared to previous
30 generations of mobile systems. MIMO transmission generally demands the

availability of accurate CSI used at the gNB for a signal precoding using a precoding matrix of the data and control information. The current third Generation Partnership Project Release 15 specification (3GPP Rel. 15) therefore provides a comprehensive framework for CSI reporting. The CSI is acquired in a first step at
5 the UE based on received CSI-RS signals transmitted by the gNB. The UE determines in a second step based on the estimated channel matrix a precoding matrix from a predefined set of matrices called 'codebook'. The selected precoding matrix is reported in a third step in the form of a precoding matrix identifier (PMI) and rank identifier (RI) to the gNB.

10 In the current Rel.-15 NR specification, there exist two types (Type-I and Type-II) for CSI reporting, where both types rely on a dual-stage (i.e., two components) $W_1 W_2$ codebook. The first codebook, or the so-called first stage precoder, W_1 , is used to select a number of beam vectors from a Discrete Fourier Transform-based (DFT-based) matrix which is also called the spatial codebook. The second
15 codebook, or the so-called second stage precoder, W_2 , is used to combine the selected beams. For Type-I and Type-II CSI reporting, W_2 contains phase-only combining coefficients and complex combining coefficients, respectively. Moreover, for Type-II CSI reporting, W_2 is calculated on a subband basis such that the number of columns of W_2 depends on the number of configured subbands. Here,
20 a subband refers to a group of adjacent physical resource blocks (PRBs). Although Type-II provides a significant higher resolution than Type-I CSI feedback, one major drawback is the increased feedback overhead for reporting the combining coefficients on a subband basis. The feedback overhead increases approximately linearly with the number of subbands and becomes considerably large for large
25 numbers of subbands. To overcome the high feedback overhead of the Rel.-15 Type-II CSI reporting scheme, it has recently been decided in 3GPP RAN#81 **Fel! Hittar inte referenskälla.** (3GPP radio access network (RAN) 3GPP RAN#81) to study feedback compression schemes for the second stage precoder W_2 .

Before going into the detailed description of the solution(s) of the present
30 embodiments, an informative description is provided in order to better understand the problems of the prior art followed by a described how said problems are solved according to the embodiments of the present disclosure.

3GPP Rel.-15 dual-stage precoding and CSI reporting

Assuming a rank- r (r may be up to two) transmission and a dual-polarized antenna array at the gNB with configuration $(N_1, N_2, 2)$, the Rel.-15 double-stage precoder for the CSI reporting for the s -th subband is given by:

$$\begin{aligned} \mathbf{W}(s) &= \mathbf{W}_1 \mathbf{w}_2(s), \\ &= \mathbf{W}_1 \mathbf{W}_A \hat{\mathbf{w}}_2(s) \end{aligned}$$

- 5 where the precoder matrix $\mathbf{W}$ has $2N_1N_2$ rows corresponding to the number of antenna ports, and S columns for the reporting subbands/PRBs. The matrix $\mathbf{W}_1^{(l)} \in \mathbb{C}^{PN_1N_2 \times 2U}$ is the wideband first-stage precoder containing $2U$ spatial beams for both polarizations which are identical for all S subbands, and $\mathbf{W}_A$ is a diagonal matrix containing $2U$ wideband amplitudes associated with the $2U$ spatial beams,
- 10 and $\hat{\mathbf{w}}_2(s)$ is the second-stage precoder containing $2U$ subband (subband amplitude and phase) complex frequency-domain combining coefficients associated with the $2U$ spatial beams for the s -th subband.

According to prior art [1], the reporting and quantization of wideband amplitude matrix $\mathbf{W}_A$ and subband combining coefficients in $\hat{\mathbf{w}}_2(s)$ are quantized and

15 reported as follows.

- The wideband amplitude corresponding to the strongest beam which has an amplitude value of 1 is not reported. The wideband amplitude values associated with the remaining $2U - 1$ beams are reported by quantizing each amplitude value with 3 bits.
- 20 - The subband amplitudes and phase values of the coefficients associated with the first leading beam are not reported (they are assumed to be equal to 1 and 0).
- For each subband, the amplitudes of the B coefficients associated with the first $B - 1$ leading beams (other than the first leading beam) are quantized
- 25 with 1 bit (quantization levels $[\sqrt{0.5}, 1]$). The amplitude values of the remaining $2U - B$ beams are not reported (they are assumed to be equal to 1).

- For each subband, the phase values of the $B - 1$ coefficients associated with the first $B - 1$ leading beams (other than the first leading beam) are quantized with 3 bits. The phase values of the remaining $2U - B$ beams are quantized with 2 bits.
- 5 - The number of leading beams for which the subband amplitude is reported is given by $B = 4, 4$ or 6 when the total number of configured spatial beams $U = 2, 3$, or 4 , respectively.

SUMMARY

10 In view of the drawbacks disclosed earlier, there is provided a communication device or a radio device or a user equipment (UE) and a method therein for providing a channel state information (CSI) feedback in a wireless communication system including at least the UE and a gNB or a radio network node. The UE comprising a processor and a memory, said memory containing instructions
 15 executable by said processor whereby said UE is operative perform method steps according to any one of claims 1-35.

There is also provided a network node or gNB comprising a processor and a memory, said memory containing instructions executable by said processor
 20 whereby said gNB is operative perform method steps as will be described.

According to an aspect of exemplary embodiments herein, the method performed by the UE includes: receiving from a network node, gNB, a radio signal via a Multiple Input Multiple Output, MIMO, channel, wherein the radio signal contains
 25 at least one DownLink, DL, reference signal according to a DL reference signal configuration; estimating said MIMO channel based on said received at least one DL reference signal for configured subbands; calculating a precoder matrix or a Channel State Information, CSI, matrix for a number of antenna ports of the gNB and configured subbands; the precoder matrix being based on a first codebook
 30 and on a second codebook and a set of combining coefficients for complex scaling/combining one or more of vectors selected from the first codebook and the second codebook; where, the first codebook contains one or more transmit-side spatial beam components of the precoder matrix, the second codebook contains

one or more delay components of the precoder matrix; determining a common delay domain (CDD) basis subset of the selected vectors associated with the delay components across all layers of the precoder matrix or CSI matrix, wherein the CDD basis subset is defined by a parameter $\bar{D}$ representing the number of elements of the CDD basis subset, and a parameter $\bar{D}_{in}$ representing the first index of the $\bar{D}$ delay vectors from the second codebook; and reporting, to the gNB, a CSI feedback report and/or a Precoder matrix Indicator (PMI) and/or a PMI/Rank Indicator (PMI/RI) used to indicate the precoder matrix or the CSI matrix for the configured antenna ports and subbands; wherein the selected vectors from the CDD basis subset are indicated in the reporting, for each layer, by a layer-specific delay domain (LDD) basis subset indicator.

According to another aspect, there is provided a method performed by a network node or a gNB, the method comprising: transmitting to a UE a radio signal via a MIMO channel, wherein the radio signal contains at least one DL reference signal according to a DL reference signal configuration, for enabling the UE to estimate said MIMO channel based on said received at least one DL reference signal for configured subbands and calculate a precoder matrix or a CSI matrix for a number of antenna ports of the gNB and configured subbands; the precoder matrix being based on a first codebook and on a second codebook and a set of combining coefficients for complex scaling/combining one or more of vectors selected from the first codebook and the second codebook; wherein the first codebook contains one or more transmit-side spatial beam components of the precoder matrix, the second codebook contains one or more delay components of the precoder matrix; determine a common delay domain (CDD) basis subset of the selected vectors associated with the delay components across all layers of the precoder matrix or CSI matrix, wherein the CDD basis subset is defined by a parameter $\bar{D}$ representing the number of elements of the CDD basis subset, and a parameter $\bar{D}_{in}$ representing the first index of the $\bar{D}$ delay vectors from the second codebook. The method further comprises: receiving, from the UE, a CSI feedback report and/or a PMI and/or a PMI/RI, used to indicate the precoder matrix or the CSI matrix for the configured antenna ports and subbands; wherein the selected

vectors from the CDD basis subset are indicated in the reporting, for each layer, by a LDD basis subset indicator.

5 An advantage with embodiments herein is to provide a feedback compression scheme for a second stage precoder that reduces the feedback overhead for reporting precoder coefficients.

10 Another advantage of the present embodiments is to provide several schemes for low-feedback overhead reporting for spatial domain and delay domain basis indicators and delay-domain combining coefficients.

Additional advantages will be described and explained in detail in the description part of this disclosure.

15 BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1A illustrates an example of a CDD basis subset configuration.

Figure 1B illustrates another example of a CDD basis subset configuration.

Figure 2 is a flowchart of a method performed by a UE according to embodiments herein.

20 Figure 3 is an exemplary block diagram depicting a UE according to exemplary embodiments herein.

DETAILED DESCRIPTION

25 As previously described, the embodiments herein provide a feedback compression scheme for the second stage precoder W_2 that drastically reduces the feedback overhead for reporting, by the UE, the precoder coefficients.

30 The UE comprises a transceiver which is configured to receive from a transmitter a radio signal via a MIMO channel, where the radio signal contains DL reference signals (e.g., CSI-RS) according to a DL reference signal configuration, and the UE, by means of a processor is operative to: estimate the MIMO channel between the gNB and the UE based on the received DL reference signals for the configured

subbands, calculate, based on a performance metric, a precoder matrix or a CSI matrix, for a number of gNB' antenna/ DL RS ports and configured subbands, that is based on two codebooks and a set of combining coefficients for complex scaling/combining the one or more of the vectors selected from the first and second
 5 codebook, where the first codebook contains one or more transmit-side spatial beam components of the CSI matrix, and the second codebook contains one or more delay components of the CSI matrix, and report the CSI feedback/PMI and RI to indicate the precoder matrix CSI matrix per layer for the configured antenna/DL-RS ports and subbands.

10

Throughout the present disclosure, the precoder matrix and the CSI matrix are used interchangeably meaning that they are equivalent.

In accordance with embodiments, the first codebook comprises a DFT matrix or
 15 oversampled DFT-matrix of size $N_1 N_2 \times O_{1,1} N_1 O_{1,2} N_2$ containing the spatial beam components ($N_1 N_2 \times 1$ vectors) of the precoder matrix. Here, N_1 and N_2 refer to the number of antenna ports of the same polarization in the first and second dimension of the antenna array, respectively. In general, for a two-dimensional (2D) antenna array, N_1 and N_2 are both greater than 1, whereas for a linear (1D (one-
 20 dimensional) either N_1 or N_2 is one. The total number of antenna ports for a dual-polarized antenna array is $2N_1 N_2$. Furthermore, $O_{1,1} \in \{1,2,3,\dots\}$ and $O_{1,2} \in \{1,2,3,\dots\}$ refer to the oversampling factors of the codebook matrix with respect to the first and second dimension, respectively.

25 The first codebook comprises a set of $P_{CSI-RS}/2 \times 1$ column vectors, where the m -th column vector contains a single 1 at the m -th position of the vector and zeros elsewhere. Here, the parameter P_{CSI-RS} denotes the total number of CSI-RS ports used by the UE for channel estimation and precoder coefficient calculation. This codebook may be called as port selection codebook and is used when a
 30 beamforming operation is performed by the gNB such that each antenna port corresponds to a beam-formed port. The parameter P_{CSI-RS} may be higher-layer configured by the gNB e.g. using an RRC (Radio Resource Control) signaling.

The second codebook comprises a second DFT, or oversampled DFT-codebook matrix of size $N_3 \times N_3 O_2$ containing the delay components (represented by $N_3 \times 1$ DFT-vectors) of the precoder matrix, where N_3 refers to the configured number of subbands, and O_2 refers to the oversampling factor $O_2 = 1, 2, \dots$ of the second codebook matrix. Each DFT vector models a linear phase increase over the N_3 subbands, and each vector is therefore associated with a delay in the transformed (delay) domain. Therefore, in the following, the DFT vectors of the second codebook are referred to as delay vectors or simply delays, and the combining coefficients used for the complex scaling/combining of the one or more of the vectors selected from the first and second codebook as delay-domain combining coefficients.

In accordance with embodiment, the UE is configured to determine a rank indicator (RI) from the MIMO channel estimate and to configure the CSI matrix (or precoder matrix) with RI layers. For the l -th layer of the CSI matrix, the UE may be configured to select a subset of $U^{(l)}$ beam vectors from the first codebook, a subset of $D^{(l)}$ delay vectors from the second codebook and $2U^{(l)}D^{(l)}$ combining coefficients, and to indicate in the CSI report the selected RI and the selected beam and delay vectors and combining coefficients of the CSI matrix.

In accordance with embodiments, the UE is configured to report for each layer of the CSI matrix a spatial domain (SD) basis indicator indicating the selected subset of $U^{(l)}$ beam vectors of the l -th layer and a delay domain (DD) basis indicator indicating the selected subset of $D^{(l)}$ delays vectors of the l -th layer.

In accordance with an embodiment, the CSI matrix used for CSI (PMI) reporting for the configured $2N_1 N_2$ (or P_{CSI-RS}) antenna/DL-RS ports and configured N_3 subbands may be represented for the first polarization of the antenna ports and l -th transmission layer as

$$\mathbf{G}_1^{(l)} = \alpha^{(l)} \sum_{u=0}^{U^{(l)}-1} \mathbf{b}_u^{(l)} \sum_{d=0}^{D^{(l)}-1} \gamma_{1,u,d}^{(l)} \mathbf{d}_d^{(l)H},$$

and for the second polarization of the antenna ports and l -th transmission layer as

$$\mathbf{G}_2^{(l)} = \alpha^{(l)} \sum_{u=0}^{U^{(l)}-1} \mathbf{b}_u^{(l)} \sum_{d=0}^{D^{(l)}-1} \gamma_{2,u,d}^{(l)} \mathbf{d}_d^{(l)H},$$

where $\mathbf{b}_u^{(l)}$ ($u = 0, \dots, U^{(l)} - 1$) represents the u -th spatial beam vector for the l -th layer selected from the first codebook, $\mathbf{d}_d^{(l)}$ ($d = 0, \dots, D^{(l)} - 1$) is the d -th delay vector associated with the l -th layer selected from the second codebook, $\gamma_{p,u,d}^{(l)}$ is the complex delay-domain combining coefficient associated with the u -th beam, d -th delay and p -th polarization, $U^{(l)}$ represents the number of spatial beam vectors, $D^{(l)}$ represents the number of delay vectors, and $\alpha^{(l)}$ is a normalizing scalar.

In contrast to the 3GPP Release 15 Type-II single-codebook CSI reporting, the herein proposed two-codebook CSI reporting scheme (based on matrices $\mathbf{G}_1^{(l)}$ and $\mathbf{G}_2^{(l)}$) is based on precoding operations in the delay-domain instead of the frequency domain. In this way, the UE may exploit the sparsity of the $2U^{(l)}$ beam-formed channel impulse responses (obtained by combining the selected beam vectors $\mathbf{b}_u^{(l)}$ and the MIMO channel impulse response) when optimizing for the delay domain combining coefficients $\gamma_{p,u,d}^{(l)}$.

Note that the precoding operation (by vectors $\mathbf{b}_u^{(l)}$ and $\mathbf{d}_d^{(l)}$) leads to an energy concentration of the MIMO channel impulse in both space and delay domain dimensions, such that each of the corresponding $2U^{(l)}$ beam-formed channel impulse response is characterized by only a few significant channel delays/taps. These channel delays are used by the UE for determining the delay domain combining coefficients $\gamma_{p,u,d}^{(l)}$. In this way, the number of combining coefficients per layer to be reported reduces from $2U^{(l)}N_3$ for the Rel. 15 Type-II CSI single-codebook reporting scheme to $2U^{(l)}D^{(l)}$, where $D^{(l)} \ll N_3$, for the proposed two-codebook CSI reporting scheme.

In the following sections, several schemes for low-feedback overhead reporting for the SD and DD basis indicators and delay-domain combining coefficients are proposed in according with some embodiments.

CSI report configuration

In accordance with some embodiments, the UE is configured from the gNB with a CSI report configuration, the CSI report configuration contains the higher-layer

(e.g., RRC) parameter(s) $U^{(l)}$ and $D^{(l)}$ representing the number of beam vectors and delay vectors, respectively, for the l -th layer of the CSI matrix.

In accordance with an embodiment, the UE is configured from the gNB with a CSI report configuration, the CSI report configuration contains the higher-layer (e.g.,
 5 RRC) parameter(s) $D^{(l)}$, representing the number of delays per beam for the l -th layer, used for the configuration of the CSI matrix (or precoder matrix). The number of configured delays $D^{(l)}$ per layer has a large influence on the feedback overhead for reporting the selected $2 \sum_l U^{(l)} D^{(l)}$ combining coefficients for the layers. In order to reduce the feedback overhead for reporting the combining coefficients for all
 10 layers and the UE complexity for calculating the CSI matrix, the UE may be configured with different number of delays $D^{(l)}$ per layer, or per layer-group (i.e., a subset of layers). In the following, some examples for the delay configuration are presented.

In one example, the number of delays $D^{(l)}$ is layer-independent and identical for
 15 all layers, such that $D^{(l)} = D$, and the gNB may configure/signal only a single parameter D for the configuration of the CSI matrix. For instance, for a rank (RI) of 2, $D = D^{(0)} = D^{(1)}$, for RI = 3, $D = D^{(0)} = D^{(1)} = D^{(2)}$, for RI = 4, $D = D^{(0)} = D^{(1)} = D^{(2)} = D^{(3)}$.

In another example, the number of delays $D^{(l)}$ is configured for subsets of layers,
 20 e.g., for a first subset of layers (e.g., the first and second layers), $D^{(1)} = \lceil \alpha_1 D^{(0)} \rceil$, and for a second subset of layers (the third layer or the third layer and fourth layer), $D^{(3)} = \lceil \alpha_2 D^{(2)} \rceil$, and the gNB signals two parameters $D^{(0)}$ and $D^{(2)}$ for the configuration of the CSI matrix. The parameters α_1 and α_2 are either higher-layer configured or fixed by specification or reported by the UE. Examples of α_1 and α_2
 25 are $\alpha_t \in \left\{ \frac{1}{8}, \frac{1}{4}, \frac{3}{8}, \frac{1}{3}, \frac{1}{2}, \frac{2}{3}, \frac{3}{4}, 1 \right\}$, $t \in \{1, 2\}$.

In another example, instead of configuring both $D^{(0)}$ and $D^{(2)}$, only $D^{(0)}$ is configured and $D^{(2)}$ is derived at /by the UE from $D^{(0)}$ as $D^{(2)} = \lceil \alpha_0 D^{(0)} \rceil$, where $\alpha_0 \in \mathbb{R}^+$. Possible values of α_0 are given by $\alpha_0 = \left\{ \frac{1}{8}, \frac{1}{4}, \frac{3}{8}, \frac{1}{3}, \frac{1}{2}, \frac{2}{3}, \frac{3}{4}, 1 \right\}$.

In another example, the gNB configures a single parameter $D^{(0)}$ for the first layer, and the UE derives the parameter(s) $D^{(l)}, l > 0$ for the remaining layers by e.g. a rule, although not necessarily.

Examples of a rule are given in the following.

- 5 In one instance $D^{(l)} = D^{(0)}, l > 0$ may be identical for all layers.

In another instance, $D^{(l)}$ may be identical for the first two layers, $D^{(0)} = D^{(1)}$, and different for the third and fourth layers, $D^{(3)} \geq D^{(2)} \geq D^{(0)}$, or $D^{(3)} \leq D^{(2)} \leq D^{(0)}$.

In another instance, $D^{(l)}$ may be identical for the first three layers and different for the fourth layer, $D^{(3)} \leq D^{(0)}$ or $D^{(3)} \geq D^{(0)}$.

- 10 In another instance, $D^{(l)}$ may be different for all layers, $D^{(l+1)} \neq D^{(l)}, l \in [0,2]$. In another instance, for RI = 2, the delays of the second layer may be derived from $D^{(1)} = \alpha_0 D^{(0)}$, where $\alpha_0 \in \mathbb{R}^+$. For RI = 3, the delays of the second layer and third may be derived from $D^{(1)} = \lceil \alpha_0 D^{(0)} \rceil$ and $D^{(2)} = \lceil \alpha_0 D^{(0)} \rceil$, where $\alpha_0 \in \mathbb{R}^+$.

- 15 For RI = 4, the delays of the second layer, third and fourth layers may be derived from $D^{(1)} = \lceil \alpha_0 D^{(0)} \rceil, D^{(2)} = \lceil \alpha_0 D^{(0)} \rceil$, and $D^{(3)} = \lceil \alpha_0 D^{(0)} \rceil$ where $\alpha_0 \in \mathbb{R}^+$.

In another instance, for RI = 3, the UE is configured by a single value $D^{(0)}$ and $D^{(0)} = D^{(1)} \neq D^{(2)}$ and the delays of the third layer may be derived from $D^{(2)} = \lceil \alpha_0 D^{(0)} \rceil$, where $\alpha_0 \in \mathbb{R}^+$.

- 20 In another instance, for RI = 3, the UE is configured by a single value $D^{(0)}$ and $D^{(0)} = D^{(2)} \neq D^{(1)}$ and the delays of the second layer may be derived from $D^{(1)} = \lceil \alpha_0 D^{(0)} \rceil$, where $\alpha_0 \in \mathbb{R}^+$.

In another instance, for RI = 4, the UE is configured by a single value $D^{(0)}$ and $D^{(0)} \neq D^{(1)} = D^{(2)} = D^{(3)}$ and the delays of the second, third and fourth layers may be derived from $D^{(1)} = D^{(2)} = D^{(3)} = \lceil \alpha_0 D^{(0)} \rceil$, where $\alpha_0 \in \mathbb{R}^+$.

In another instance, for $RI = 4$, the UE is configured by a single value $D^{(0)}$ and $D^{(0)} = D^{(1)} \neq D^{(2)} = D^{(3)}$ and the delays of the third and fourth layer may be derived from $D^{(2)} = D^{(3)} = \lceil \alpha_0 D^{(0)} \rceil$, where $\alpha_0 \in \mathbb{R}^+$.

5 In another instance, for $RI = 4$, the UE is configured by a single value $D^{(0)}$ and $D^{(0)} = D^{(1)} = D^{(2)} \neq D^{(3)}$ and the delays of the fourth layer may be derived from $D^{(3)} = \lceil \alpha_0 D^{(0)} \rceil$, where $\alpha_0 \in \mathbb{R}^+$.

In another instance, for $RI = 4$, the UE is configured by a single value $D^{(0)}$ and $D^{(0)} = D^{(1)} \neq D^{(2)} = D^{(3)}$ and the delays of the third and fourth layer may be derived from $D^{(2)} = D^{(3)} = \lceil \alpha_0 D^{(0)} \rceil$, where $\alpha_0 \in \mathbb{R}^+$.

10 In another instance, for $RI = 4$, the UE is configured by a single value $D^{(0)}$ and $D^{(0)} \neq D^{(1)} \neq D^{(2)} = D^{(3)}$ and the delays of the second layer may be derived from $D^{(1)} = \lceil \alpha_0 D^{(0)} \rceil$, and the delays of the third and fourth layer may be derived from $D^{(2)} = D^{(3)} = \lceil \alpha_0 D^{(0)} \rceil$, where $\alpha_0 \in \mathbb{R}^+$.

15 In another instance, for $RI = 4$, the UE is configured by a single value $D^{(0)}$ and $D^{(0)} \neq D^{(1)} = D^{(2)} \neq D^{(3)}$ and the delays of the fourth layer may be derived from $D^{(3)} = \lceil \alpha_0 D^{(0)} \rceil$, and the delays of the second and third layer may be derived from $D^{(1)} = D^{(2)} = \lceil \alpha_0 D^{(0)} \rceil$, where $\alpha_0 \in \mathbb{R}^+$.

20 In another instance, for $RI = 4$, the UE is configured by a single value $D^{(0)}$ and $D^{(0)} = D^{(1)} \neq D^{(2)} \neq D^{(3)}$ and the delays of the third layer may be derived from $D^{(2)} = \lceil \alpha_0 D^{(0)} \rceil$ and the delays of the fourth layer may be derived from $D^{(3)} = \lceil \alpha_0 D^{(0)} \rceil$, where $\alpha_0 \in \mathbb{R}^+$.

25 In accordance with an embodiment, a UE may be configured with a single parameter D which denotes the total number of delays across all layers. The UE is then configured to calculate the required number of delays per layer ($D^{(l)}$) based on any performance enhancement/feedback reduction criterion such that $\sum_{l=0}^{RI-1} D^{(l)} \leq D$. The UE may then report, to the gNB, the assigned number of delays to the gNB.

In accordance with an embodiment, the configuration of delays may be dependent on the rank (RI) of the CSI matrix. For example, let $D^{(l,r)}$ denote the number of delays for the l -th layer and the r -th rank. For example, the number of delays per layer for $RI \leq 2$ may be identical. For instance, $D^{(0,1)} = D^{(1,1)} = D^{(0,2)}$.

- 5 In another example, the number of delays of the l -th layer for $RI \leq 4$ may be identical to the number of delays of the l -th layer for $RI \geq 1$.

In one instance, $D^{(0,1)} = D^{(0,2)} = D^{(0,3)} = D^{(0,4)} = D^{(1,2)} = D^{(1,3)} = D^{(1,4)}$, and $D^{(2,3)} = D^{(2,4)} = D^{(3,4)}$ where $D^{(l,r)}$ denotes the number of delays per layer associated with each RI, $r \in \{1,2,3,4\}$.

- 10 In another instance, $D^{(0,1)} = D^{(0,2)} = D^{(0,3)} = D^{(0,4)} = D^{(1,2)} = D^{(1,3)} = D^{(1,4)}$ and the delays $D^{(2,3)}, D^{(2,4)}, D^{(3,4)}$ are derived from the delays of $RI \leq 2$ as $D^{(2,3)} = D^{(2,4)} = D^{(3,4)} = \alpha_0 D^{(0,1)}$.

- In another example, the number of delays per layer for $RI > 2$ may not be identical to the number of delays per layer for $RI \leq 2$. For instance, $D^{(0,1)} = D^{(0,2)} \neq D^{(0,3)} = D^{(0,4)}$ or $D^{(1,2)} \neq D^{(1,3)} = D^{(1,4)}$, and $D^{(2,3)} = D^{(2,4)} = D^{(3,4)}$.
- 15

In another example, the number of delays per layer $D^{(l,r)}, \forall l$, for $RI > 2$ may be derived from the number of delays of $RI \leq 2$. For instance, $D^{(0,1)} = D^{(0,2)} = D^{(1,2)}$ and the delays $D^{(l,r)}, \forall l, r > 2$ are given by $D^{(0,3)} = D^{(0,4)} = D^{(1,3)} = D^{(1,4)} = D^{(2,3)} = D^{(2,4)} = D^{(3,4)} = \alpha_0 D^{(0,1)}$, where $\alpha_0 \in \mathbb{R}^+$.

- 20 In another example, for $RI \geq 2$, the number of delays for each layer and RI are different, $D^{(l,r)} \neq D^{(l',r')}, l \neq l', r \neq r'$.

In accordance with an embodiment, the UE is configured to select the values $D^{(l,r)}$ or $D^{(l)}$ or $\alpha_i, i \in \{0,1,2\}$ and report the selected values of $D^{(l,r)}$ or $D^{(l)}$ or $\alpha_i, i \in \{0,1,2\}$.

- 25 In accordance with an embodiment, the higher-layer (e.g., RRC) parameter(s) $D^{(l)}$ (or $D^{(l,r)}$) may depend on the configured number of subbands N_3 by e.g. a known rule, e.g. $D^{(l)} = \lceil p^{(l)} N_3 \rceil$, $0 < p^{(l)} < 1$, such that the number of configured delays increases/decreases with increasing/decreasing values of N_3 . Examples for $p^{(l)}$

are $p^{(l)} \in \{\frac{1}{8}, \frac{1}{4}, \frac{3}{8}, \frac{1}{3}, \frac{1}{2}, \frac{2}{3}, \frac{3}{4}\}$. Instead of signaling the parameter(s) $D^{(l)}$, the gNB may signal parameter(s) $p^{(l)}$ for the configuration of the CSI matrix.

In accordance with an embodiment, the UE is configured to receive from the gNB the higher layer parameter N_3 , representing the number of configured subbands for the second codebook matrix. The number of subbands may depend on the number of CQI subbands N_{CQI} (used for the calculation of the CQI) by a known rule. For example, the parameter N_3 may linearly increase/decrease with respect to the configured number of CQI subbands, $N_3 = N_{CQI} \times R, R \geq 1$, where R is a parameter to control the UE calculation complexity.

In accordance with an embodiment, the higher layer parameter R may be a UE capability. A UE may have only a limited processing capability for the calculation of the CSI matrix, and it may not be able to apply large values of N_3 . In order to indicate that only a limited value range for N_3 is supported, the UE may indicate the supported value range for the parameter R to the gNB. For example, when $R \in \{1,2\}$, a UE may indicate $R = 1$ (limited processing capability), or $R = 2$ (larger processing capability).

In accordance with an embodiment, the UE is configured from the gNB with a CSI report configuration, the CSI report configuration contains the higher-layer (e.g., RRC) parameter(s) $U^{(l)}$, representing the number of spatial beams for the l -th layer, used for the configuration of the CSI matrix. In one example, the number of beams $U^{(l)}$ may be identical for all layers and rank-independent, such that $U^{(l)} = U$, and the gNB signals a single parameter U for the configuration of the CSI matrix. In one example, U may be given by a limited value range, e.g., $U \in \{2,4,6\}$.

In another example, the gNB may configure a single parameter U for the spatial beams of the first layer of the CSI matrix, and the remaining $U^{(l)}, l > 0$ are derived by the UE by a known rule. For instance, when $RI = 2$, and the gNB configures $U^{(0)} = 6$, the number of spatial beams for the first layer may be given by $U^{(0)} = 6$ and the number of spatial beams for the second layer is given by $U^{(1)} = 4$ or $U^{(1)} = 2$.

In another instance, when $RI = 3$, and the gNB configures $U^{(0)} = 6$, the number of spatial beams for the first layer may be given by $U^{(0)} = 6$, the number of spatial beams for the second layer is given by $U^{(1)} = 4$ or $U^{(1)} = 2$, and the number of spatial beams for the third layer is given by $U^{(2)} = 4$ or $U^{(2)} = 2$.

- 5 In another instance, when $RI = 4$ and the gNB configures $U = 6$, the number of spatial beams for the first layer may be given by $U^{(0)} = 6$, the number of spatial beams for the second layer is given by $U^{(1)} = 4$ or $U^{(1)} = 2$, the number of spatial beams for the third layer is given by $U^{(2)} = 4$ or $U^{(2)} = 2$, and the spatial beams for the third layer is given by $U^{(3)} = 4$ or $U^{(3)} = 2$.
- 10 In another example, the number of spatial beams $U^{(l)}$ is configured for subsets of layers, e.g., for a first subset of layers (e.g., the first and second layers), $U^{(1)} = \lceil \alpha_1 U^{(0)} \rceil$, and for a second subset of layers (the third or the third and fourth layers), $U^{(3)} = \lceil \alpha_2 U^{(2)} \rceil$ and the gNB may be configured to signal two parameters $U^{(0)}$ and $U^{(2)}$ for the configuration of the CSI matrix. The parameters α_1 and α_2 are either
- 15 higher-layer configured or fixed by specification or reported by the UE.

- In another example, the number of spatial beams $U^{(l)}$ is configured for subsets of layers, e.g., for a first subset of layers (e.g., the first and second layers), $U^{(1)} = \lceil \alpha_1 U^{(0)} \rceil$, and for a second subset of layers (the third or the third and fourth layers), $U^{(2)} = \lceil \alpha_2 U^{(1)} \rceil$ and $U^{(3)} = \lceil \alpha_3 U^{(2)} \rceil$, and the gNB signals only a parameter $U^{(0)}$ for
- 20 the configuration of the CSI matrix. Examples of α_1 , α_2 and α_3 are $\alpha_t \in \left\{ \frac{1}{8}, \frac{1}{4}, \frac{3}{8}, \frac{1}{3}, \frac{1}{2}, \frac{2}{3}, \frac{3}{4}, 1 \right\}, t \in \{1, 2, 3\}$.

In one instance, for $RI = 3$, the number of spatial beams for the first group of layers may be identical $U^{(0)} = U^{(1)} = 2$ and the subset of layers for the second subset is given by $U^{(2)} = 4$ or $U^{(2)} = 6$.

- 25 In another instance, for $RI = 3$, the number of spatial beams for the first group of layers may be identical $U^{(0)} = U^{(1)} = 4$ and the subset of layers for the second subset is given by $U^{(2)} = 6$ or $U^{(2)} = 2$.

In another instance, for $RI = 3$, the number of spatial beams for the first group of layers may be identical $U^{(0)} = U^{(1)} = 6$ and the subset of layers for the second subset is given by $U^{(2)} = 4$ or $U^{(2)} = 2$.

5 In another instance, for $RI = 4$, the number of spatial beams for the first group of layers may be identical $U^{(0)} = U^{(1)} = 2$, and the subset of layers for the second subset is given by $U^{(2)} = U^{(3)} = 6$ or $U^{(2)} = U^{(3)} = 2$.

In another instance, for $RI = 4$, the number of spatial beams for the first group of layers may be identical $U^{(0)} = U^{(1)} = 4$, and the subset of layers for the second subset is given by $U^{(2)} = U^{(3)} = 2$ or $U^{(2)} = U^{(3)} = 6$.

10 In another instance, for $RI = 4$, the number of spatial beams for the first group of layers may be identical $U^{(0)} = U^{(1)} = 6$, and the subset of layers for the second subset is given by $U^{(2)} = U^{(3)} = 2$ or $U^{(2)} = U^{(3)} = 4$.

In accordance with embodiments, the UE may be configured with $U = 6$ only for

15 $RI \leq 2$. Configuring the UE with a large value of U enhances the performance but at the cost of increased feedback overhead. Therefore, the gNB may control the feedback overhead by limiting the large value of U only for certain RI 's. In other words, the configuration of spatial beams can be rank-dependent.

In accordance with embodiments, the higher layer parameter U may be a UE capability. A UE may have only a limited processing capability for the calculation
20 of the CSI matrix, and it may not be able to apply large values of U . In order to indicate that only a limited value range for U is supported, the UE may indicate the supported value range for the parameter U to the gNB. For example, when $U \in \{2,4,6\}$, a UE may indicate $U = \{2,4\}$ (limited processing capability), or $U = \{2,4,6\}$ (larger processing capability).

25 In accordance with an embodiment, a UE may be configured with a single parameter U which denotes the total number of spatial beams across all layers. The UE is then configured to calculate the required number of spatial beams per layer ($U^{(l)}$) based on any performance enhancement/feedback reduction criterion

such that $\sum_{l=0}^{RI-1} U^{(l)} \leq U$. The UE may then be configured to report the assigned number of spatial beams per layer to the gNB.

In accordance with embodiments, the number of spatial beams for e layers ($e \geq 1$) may be apriori known to the UE, and the UE may be configured with a single
 5 parameter U which denotes the total number of spatial beams across $RI - e$ layers. The UE is then configured to calculate the required number of spatial beams per layer ($U^{(l)}$) based on any performance enhancement/feedback reduction criterion such that $\sum_{l=0}^{RI-e} U^{(l)} \leq U$. The UE maybe configured to report the assigned number of spatial beams for the $RI - e$ layers to the gNB.

10 In accordance with embodiments, a UE may be configured with one or more parameters, which denote(s) the total number of spatial beams across all layers in one or more subsets. Each subset may contain one or more number of layers. The UE then calculates the required number of spatial beams per layer ($U^{(l)}$) based on any performance enhancement/feedback reduction criterion. The assigned
 15 number of spatial beams per layer may then be reported to the gNB.

Reporting of combining coefficients

As explained above, each of the $2U^{(l)}$ beams of the CSI matrix is associated with only a small number of channel delays. Moreover, as each beam may point to a
 20 different direction in the channel, each beam may only be associated with a small number of delays/delay vectors from the selected $D^{(l)}$ -sized basis delay vector subset. This means the power of the combining coefficients of a beam may be concentrated at few delays such that some of the combining coefficients may have close to zero amplitude values. Since the close to zero-valued combining
 25 coefficients do not significantly affect the performance, the UE may be configured to indicate those coefficients in the CSI report and may not report them. The following embodiments provide proposals for the combining coefficient selection, indication and reporting in the CSI report.

In accordance with an embodiment, the UE is configured to select $K^{(l)}$ or less than
 30 $K^{(l)}$ non-zero combining coefficients for the l -th layer of the CSI matrix, to report

the selected non-zero combining coefficients for all layers of the CSI matrix, and to indicate the selected coefficients in the CSI report. The selected non-zero combining coefficients for the l -th layer may be indicated by a $2U^{(l)} \times D^{(l)}$ -sized bitmap, where each bit in the bitmap is associated with a polarization index ($p \in \{1,2\}$), beam index ($0 \leq u \leq U^{(l)} - 1$) and delay index ($0 \leq d \leq D^{(l)} - 1$). A “1” in the bitmap may indicate that the combining coefficient associated with the polarization index p , beam index u , and delay index d is non-zero, selected and reported by the UE. A “0” in the bitmap may indicate that the combining coefficient associated with the polarization index p , beam index u , and delay index d is zero and not reported by the UE.

In accordance with an embodiment, the UE may be configured by the gNB with the higher layer parameter(s) $K^{(l)}$, representing the maximum number of non-zero combining coefficients the UE reports for the l -th layer of the CSI matrix. The UE may be configured with different or identical $K^{(l)}$ per layer, or per layer-group (i.e., a subset of layers).

In the following, some examples for the parameter configuration $K^{(l)}$ are presented.

In one example, the parameter $K^{(0)}$ is configured for the first layer, and the parameters $K^{(l)}, l > 0$ for the higher layers are derived by the UE by e.g. a known rule. For example, for RI=1, the UE is configured by the gNB with $K^{(0)}$ and for RI=2, $K^{(1)} = K^{(0)}$. In another example, the UE is configured by a single parameter K that denotes the total number of non-zero combining coefficients across all layers. The UE is then configured to assign the number of non-zero combining coefficients per layer such that $\sum_{l=0}^{RI-1} K^{(l)} \leq K$ and is further configured to report the number of non-zero combining coefficients per layer or the total number of non-zero combining coefficients across all layers to the gNB. For instance, for RI = 1, the UE may be configured with a single parameter K and the UE assigns $K^{(0)} \leq K$ coefficients to layer 1 and reports the same to the gNB.

In another example, for RI > 1, the UE is configured by a single parameter K_1 that denotes the maximum number of non-zero combining coefficients for each layer. The UE is then configured to assign the number of non-zero combining coefficients

per layer such that $\sum_{l=0}^{RI-1} K^{(l)} \leq 2K_1$, and is further configured to report the number of non-zero combining coefficients per layer or the total number of non-zero combining coefficients across all layers to the gNB.

For instance, for $RI = 2$, the UE may be configured by a single value $K_1 = 28$ that
 5 denotes the maximum number of non-zero combining coefficients for each layer, and the number of reported non-zero combining coefficients calculated by the UE for the first and second layer is given by $K^{(0)} = 28$ and $K^{(1)} = 28$, respectively.

For instance, for $RI = 3$, the UE may be configured by a single value $K_1 = 42$ that
 10 denotes the maximum number of non-zero combining coefficients for each layer, and the number of reported non-zero combining coefficients calculated by the UE for the first, second and third layer is given by $K^{(0)} = 42$, $K^{(1)} = 28$, and $K^{(2)} = 12$, respectively.

For instance, for $RI = 4$, the UE may be configured by a single value $K_1 = 42$ that
 15 denotes a maximum number of non-zero combining coefficients for each layer, and the number of reported non-zero combining coefficients calculated by the UE for the first, second, third and fourth layers is given by $K^{(0)} = 32$, $K^{(1)} = 28$, $K^{(2)} = 14$, and $K^{(3)} = 10$, respectively.

In another example, for $RI > 1$, the UE is configured by a single parameter K_2 ,
 based on which the UE is configured to assign the number of non-zero combining
 20 coefficients per layer such that $\sum_{l=0}^{RI-1} K^{(l)} \leq 2K_2$, and is further configured to report the number of non-zero combining coefficients per layer or the total number of non-zero combining coefficients across all layers to the gNB.

In another example, for $RI > 1$, the UE is configured by a single parameter K_2 ,
 where the number of non-zero combining coefficients per layer can be greater than
 25 K_2 , and based on which the UE is configured to assign the number of non-zero combining coefficients per layer such that $\sum_{l=0}^{RI-1} K^{(l)} \leq 2K_2$, and is further configured to report the number of non-zero combining coefficients per layer or the total number of non-zero combining coefficients across all layers to the gNB.

For instance, for RI = 2, the UE may be configured by a single value $K_2 = 28$, and the number of reported non-zero combining coefficients calculated by the UE for the first and second layers is given by $K^{(0)} = 32$ and $K^{(1)} = 24$, respectively.

For instance, for RI = 3, the UE may be configured by a single value $K_2 = 28$, and
 5 the number of reported non-zero combining coefficients calculated by the UE for the first, second and third layers is given by $K^{(0)} = 30$, $K^{(1)} = 16$, and $K^{(2)} = 8$, respectively.

For instance, for RI = 4, the UE may be configured by a single value $K_1 = 28$ and the number of non-zero combining coefficients calculated at the UE for the first,
 10 second, third and fourth layers is given by $K^{(0)} = 30$, $K^{(1)} = 10$, $K^{(2)} = 9$, and $K^{(3)} = 6$, respectively.

Reporting of bitmap(s)

In accordance with embodiments, a UE may be configured to use a two-step approach to reduce the overall overhead for reporting the bitmaps of all layers. In
 15 a first step, the UE may be configured to determine a joint bitmap of size $U_g \times D_g$ by the union of the individual bitmaps across the layers, where $U_g = \max (2U^{(l)}), \forall l$ and $D_g = \max (D^{(l)}), \forall l$.

The joint bitmap may consist of Q_g '1's, where a "1" in the joint bitmap represents an index of a reported non-zero coefficient in at least one or more of the individual
 20 bitmaps of the layers. In a second step, the UE may report an indication of the indices of the selected non-zero combining coefficients associated with the joint bitmap. Different alternatives for the second step reporting are presented in the following.

25 In one example, the UE reports a Q_g -sized bitmap per layer. Each bit of the Q_g -sized bitmap indicates an index of a reported non-zero combining coefficient for the layer in CSI part 2.

In another example, the UE reports a $Q_g^{(l)}$ -sized bitmap per layer, where $Q_g^{(l)}$ denotes the number of 1's in the first $D^{(l)}$ columns and the first $U^{(l)}$ rows of the joint bitmap. Each bit of the $Q_g^{(l)}$ -sized bitmap indicates an index of a reported non-zero combining coefficient for the layer in CSI part 2.

5

In another example, the UE reports a $\left\lceil \log_2 \left(\frac{Q_g^{(l)}}{NZ_l} \right) \right\rceil$ -bit indicator per layer that indicates the indices of the reported non-zero combining coefficients for the layer.

In another example, the UE reports a $\left\lceil \log_2 \left(\frac{Q_g}{NZ_l} \right) \right\rceil$ -bit indicator per layer that indicates the indices of the reported non-zero combining coefficients for the layer.

10

In another example, the UE reports a $\max_l \left\lceil \log_2 \left(\frac{Q_g^{(l)}}{NZ_l} \right) \right\rceil$ -bit indicator per layer that indicates the indices of the reported non-zero combining coefficients for the layer.

In another example, the UE reports a $\max_l \left\lceil \log_2 \left(\frac{Q_g}{NZ_l} \right) \right\rceil$ -bit indicator per layer that indicates the indices of the reported non-zero combining coefficients for the layer.

15

In accordance with an embodiment, the UE may be configured to report the number of '1's in the joint bitmap, i.e., the value of $Q_g^{(l)}$ per layer, or layer group, in UCI part

20 1. In one example, $D^{(l)} = D, \forall l$, then $Q_g^{(l)} = Q_g$ and only a single value is reported in UCI part 1. In another example, $D^{(1)} = D^{(0)} = D_1$ and $D^{(3)} = D^{(2)} = D_2$, then $Q_g^{(1)} = Q_g^{(0)}$ and $Q_g^{(3)} = Q_g^{(2)}$ and two values are reported in UCI part 1.

In accordance with embodiments, the UE is configured to indicate the size of the second step bitmap(s), or the second step combinatorial bit indicator(s) in UCI part 1.

25

In the case of reporting Q_g -sized bitmap(s) in UCI part 2, the value of Q_g may be indicated (e.g., by a $\lceil \log_2(Q_g \times D_g) \rceil$ bit indicator) in UCI part 1.

In the case of reporting $\left\lceil \log_2 \left(\frac{Q_g}{NZ_l} \right) \right\rceil$ -bit indicator(s) in UCI part 2, the size(s) of the $\left\lceil \log_2 \left(\frac{Q_g}{NZ_l} \right) \right\rceil$ -bit indicator(s) (e.g., the value of Q_g) may be indicated in UCI part 1.

In the case of reporting $\max_l \left\lceil \log_2 \left(\frac{Q_g^{(l)}}{NZ_l} \right) \right\rceil$, or $\max_l \left\lceil \log_2 \left(\frac{Q_g}{NZ_l} \right) \right\rceil$ -bit indicator(s) in UCI part 2, the size of $\max_l \left\lceil \log_2 \left(\frac{Q_g^{(l)}}{NZ_l} \right) \right\rceil$ or $\max_l \left\lceil \log_2 \left(\frac{Q_g}{NZ_l} \right) \right\rceil$ may be indicated in UCI part 1.

In the case of reporting $Q_g^{(l)}$ -sized bitmap(s) in UCI part 2, the size(s) of the bitmap(s) per layer, or layer group, are indicated in UCI part 1. For example, $D^{(l)} = D, \forall l$, then $Q_g^{(l)} = Q_g$, and only a single value is reported that indicates the size of the second step bitmap(s) in UCI part 1. In another example, $D^{(1)} = D^{(0)} = D_1$ and $D^{(3)} = D^{(2)} = D_2$, then $Q_g^{(1)} = Q_g^{(0)}$ and $Q_g^{(3)} = Q_g^{(2)}$, and the values $Q_g^{(0)}$ and $Q_g^{(2)}$ are indicated (e.g., by a $\lceil \log_2(2U^{(0)} \times (D^{(0)} + D^{(2)})) \rceil$ bit indicator) in UCI part 1.

Similarly, in the case of reporting $\left\lceil \log_2 \left(\frac{Q_g^{(l)}}{NZ_l} \right) \right\rceil$ -bit indicators, the size(s) of the bit indicators per layer, or layer group, are indicated in UCI part 1.

In accordance with an embodiment, the UE may be configured to use a two-step approach to reduce the overall overhead for reporting of the bitmaps of the layers. In a first step, the UE may determine a joint bitmap of size $U_m \times D_m$ by the union of the individual bitmaps across the layers, where $U_m \leq 2U^{(l)}, \forall l$ and $D_m \leq D^{(l)}, \forall l$. A "1" in the joint bitmap represents a non-zero coefficient in at least one or more

of the bitmaps of the individual layers. In a second step, the UE may report an indication of the indices of the selected non-zero combining coefficients associated with the joint bitmap. Different alternatives for the second step reporting are presented in the following.

- 5 In one example, the UE reports a $\max_l \left\lceil \log_2 \left(\frac{U_m D_m}{NZ_l} \right) \right\rceil$ -bit indicator for the l -th layer, where NZ_l denotes the number of non-zero combining coefficients of the l -th layer. In another example, the UE reports a $U_m D_m$ -sized bitmap per layer, where each bit of the $U_m D_m$ -sized bitmap indicates an index of a reported non-zero combining coefficient for the layer in CSI part 2.

10

In accordance with an embodiment, the UE may be configured to report the size of the joint bitmap in UCI part 1.

- 15 In accordance with an embodiment, the size of $\max_l \left\lceil \log_2 \left(\frac{U_m D_m}{NZ_l} \right) \right\rceil$ -bit indicator may be indicated in UCI part 1.

- In accordance with an embodiment, the UE may be configured to report in UCI part 2, an indication of the selected SD and (or) FD basis vectors associated with the joint bitmap. For example, the SD basis vectors associated with the joint bitmap are indicated by a $\max_l 2U^{(l)}$ -sized bitmap, where each bit in the bitmap is associated with an index of a reported SD basis vector. Therefore, the $\max_l 2U^{(l)}$ -sized bitmap contains U_m '1's. Similarly, the Frequency Domain (FD) basis vectors associated with the joint bitmap are indicated by a $\max_l D^{(l)}$ -bitmap, where each bit in the bitmap is associated with an index of a reported FD basis vector. Therefore,
- 20 the $\max_l 2U^{(l)}$ -sized bitmap contains U_m '1's. Similarly, the Frequency Domain (FD) basis vectors associated with the joint bitmap are indicated by a $\max_l D^{(l)}$ -bitmap, where each bit in the bitmap is associated with an index of a reported FD basis vector. Therefore,
- 25 the $\max_l D^{(l)}$ -bitmap contains D_m '1's.

In accordance with an embodiment, the UE may be configured to reduce the overall overhead for reporting of the bitmaps of the layers. The UE may be configured to determine per layer an effective bitmap of size $U_e^{(l)} \times D_e^{(l)}$, where $U_e^{(l)} \leq 2U^{(l)}$ and

$D_e^{(l)} \leq D^{(l)}$. The effective bitmaps are reported in CSI part 2. Each effective bitmap contains only non-zero rows and/or non-zero columns.

Moreover, the UE is configured to indicate in the CSI part 2, an indication of the selected SD basis vectors associated with the effective bitmap per layer and/or an indication of the selected FD basis vectors associated with the effective bitmap per layer. For example, the indication of the Spatial Domain (SD) basis vectors associated with the effective bitmap for a layer is indicated by a $2U^{(l)}$ -sized bitmap, and may consist of $U_e^{(l)}$ '1's. Similarly, the FD basis associated with the effective bitmap per layer is reported by $D^{(l)}$ -sized bitmap, and may consist of $D_e^{(l)}$ '1's.

In accordance to an embodiment, the UE is configured to indicate the sizes of the effective bitmaps for all layers in UCI part 1. As an example, the sizes of the effective bitmaps may be represented by a $\lceil \log_2 \sum_{l=0}^{RI-1} U_e^{(l)} \times D_e^{(l)} \rceil$ bit indicator.

In accordance to an embodiment, the UE is configured to indicate the number of 1's in the $2U^{(l)}$ -sized bitmap across all layers (e.g., by a $\lceil \log_2(2 \sum_l U^{(l)}) \rceil$ bit indicator), indicating the selected SD basis vectors, in UCI part 1.

In accordance to an embodiment, the UE is configured to indicate the number of 0's in the $2U^{(l)}$ -sized bitmap across all layers, indicating the non-selected SD basis vectors, in UCI part 1.

In accordance to an embodiment, the UE is configured to indicate the number of 1's in the $D^{(l)}$ -sized bitmaps across all layers (e.g., by a $\lceil \log_2(\sum_l D^{(l)}) \rceil$ bit indicator), indicating the selected FD basis vectors, in UCI part 1.

In accordance to an embodiment, the UE is configured to indicate the number of 0's in the $D^{(l)}$ -sized bitmaps across all layers (e.g., by a $\lceil \log_2(\sum_l D^{(l)}) \rceil$ bit indicator), indicating the non-selected FD basis vectors, in UCI part 1.

In accordance with an embodiment, when the configured values of $K^{(l)}$ or K is small, the non-zero combining coefficients to be reported for a layer may only be associated with a single polarization. In such a case, one part of the bitmap of size $U^{(l)} \times D^{(l)}$ associated with a specific polarization and layer may contain only zeros.

5

To reduce the feedback overhead for reporting the bitmap(s) for the layers in such a case, the UE may be configured to report a layer indicator in UCI part 1 for which one part of the bitmap of size $U^{(l)} \times D^{(l)}$ associated with a specific polarization and layer contains only zeros. For example, the layer indicator may consist of 4 bits (for

10

a maximum RI of 4), where each bit is associated with a specific layer. When a bit of the layer indicator is set to '0', it may indicate that the corresponding bitmap associated with the specific layer is reported.

When a bit of the layer indicator is set to '1', it may indicate that only half of the bitmap associated with the layer is reported.

15

In order to indicate the polarization index associated with the reported bitmap, the UCI part 2 may contain for each layer, where the number of reported nonzero coefficients is zero for a specific polarization, a polarization indicator indicating the polarization of the reported non-zero combining coefficients. The polarization

20

indicator may consist of N bits, where N indicates the number of '1's indicated by the layer indicator. For example, when the layer indicator is given by '1010', it indicates that the number of non-zero coefficients for a specific polarization is zero and only half of

25

the bitmap may be reported for the first and third layer. The polarization indicator may be given by '01' indicating that for the first layer the reported non-zero combining coefficients and part of the bitmap are associated with the first polarization and for the third layer the reported non-zero combining coefficients and part of the bitmap are associated with the second polarization.

30

In accordance with an embodiment, the UE may be configured to report a layer indicator in UCI part 1 only for a subset of layers for which one part of the bitmap

of size $U^{(l)} \times D^{(l)}$ associated with a specific polarization and layer contains only zeros. For example, the layer indicator may only consist of 2 bits, where the first and second bit is associated with the third layer and fourth layer, respectively. In order to indicate the polarization index associated with the reported bitmap, the

5 UCI part 2 may contain for each layer from the subset of layers, where the number of reported nonzero coefficients is zero for a specific polarization, a polarization indicator indicating the polarization of the reported non-zero combining coefficients.

10 In accordance with an embodiment, the UE is configured to indicate the selected number of non-zero combining coefficients per layer or the selected number of non-zero combining coefficients over all layers in the CSI report.

CSI report – part 1 and part 2

In accordance with an embodiment, the CSI report may comprise two parts, where

15 the first part has a fixed size and is used to indicate the size of the payload of the second part. The two CSI parts are independently encoded. The second CSI part has a varying payload size and may contain at least the SD basis subset indicator(s), the DD basis subset indicator(s), the one or multiple bitmaps for the non-zero coefficient indication and the quantized combining coefficients for all

20 layers.

In order to indicate the payload size of the CSI part 2, the CSI part 1 may contain the information on the number of quantized combining coefficients across all layers in CSI part 1 and the rank of the CSI matrix.

Reporting number of non-zero combining coefficients

25 In an example, the CSI part 1 may contain the selected number of non-zero combining coefficients (NNZCC) for each of the RI layers. For a maximum of RI = 4, the CSI part 1 may contain four NNZCC bit-indicators for the four different layers.

As an example, each NNZCC bit-indicator is represented by a $\max_l \lceil \log_2(g^{(l)} + 1) \rceil$ or $\max_l \lceil \log_2(g^{(l)}) \rceil$ or $\lceil \log_2 g^{(l)} \rceil$ or $\lceil \log_2(g^{(l)} + 1) \rceil$ bit indicator, where $g^{(l)}$

30 represents the maximum number of reported coefficients for the l-th layer. In one

instance, $g^{(l)} = K_0$ for all layers. In another instance, $g^{(l)} = 2K_0$ for all layers. Here, K_0 refers to the number of non-zero combining coefficients that are higher-layer configured. In another example, each NNZCC bit-indicator is represented by a $\lceil \log_2(2U^{(l)}D^{(l)}) \rceil$ bit indicator. As the NNZCC is indicated per layer, the number of non-zero values of the NNZCC bit indicators implicitly indicate the RI of the CSI matrix (i.e., total number of layers). The rank (parameter RI) may therefore be removed from the CSI report (i.e., not reported).

In another example, the CSI part 1 may contain the sum of the selected NNZCC across all layers and hence it contains a single NNZCC bit-indicator for the different layers. As an example, the NNZCC bit-indicator is represented by a $\lceil \log_2 g \rceil$ indicator, where g represents the maximum number of reported coefficients across all layers.

In one instance $g = K_0$. In another instance, $g = 2K_0$. In another instance, $g = \sum_{l=0}^{RI-1} 2U^{(l)}D^{(l)}$ for the l -th layer. Since the value of the NNZCC bit indicator does not indicate the RI of the CSI matrix, the rank (parameter RI) may be contained in the CSI report.

Reporting of Strongest Coefficient Indicator

In accordance with an embodiment, the UE is configured to normalize the combining coefficients to be reported per layer with respect to the strongest coefficient, such that the normalized strongest coefficient is given by the value 1. Since the normalized strongest coefficient is always given by the same value, the UE is configured not to report the strongest coefficient (bit values for the amplitude and phase of the quantized coefficient) and to indicate per layer the strongest coefficient by a strongest coefficient indicator in the CSI report (part 2). The structure of the strongest coefficient indicator depends on the structure of the NNZCC bit indicators in CSI part 1. In the following different alternatives are discussed.

In an example, the strongest coefficient indicator associated with l -th layer is given by a $\lceil \log_2(NZ_l) \rceil$ or a $\max_l \lceil \log_2(NZ_l) \rceil$ bit indicator, and the CSI part 1 contains the selected number of non-zero combining coefficients (NNZCC) for each of the RI layers. Here, NZ_l represents the NNZCC indicated for the l -th layer in CSI part 1.

In an example, the strongest coefficient indicator associated with l-th layer is given by a $\lceil \log_2(K^{(l)}) \rceil$ or a $\max_l \lceil \log_2(K^{(l)}) \rceil$ bit indicator. Here, $K^{(l)}$ represents the maximum NNZCC configured per layer.

5 In another example, the strongest coefficient indicator associated with the l-th layer is given by a $\lceil \log_2(\sum_{l=0}^{RI-1} NZ_l) \rceil$ -bit indicator, and the CSI part 1 contains the selected number of non-zero combining coefficients (NNZCC) across all layers.

In another example, the strongest coefficient indicator associated with l-th layer is given by a $\lceil \log_2(2K_2) \rceil$ bit indicator, where K_2 is the NNZCC configured to the UE. In another example, the strongest coefficient indicator associated with l-th layer is
10 given by a $\lceil \log_2(K_1) \rceil$ bit indicator, where the maximum NNZCC to be reported is restricted to K_1 per layer.

In another example, the strongest coefficient indicator for all RI layers is jointly reported, by the UE, and represented by a $\lceil \log_2 \left(\sum_{l=0}^{RI-1} NZ_l \right) \rceil$ bit indicator. This bit indication along with the bitmap in UCI part 2 is used to identify the strongest
15 coefficients per layer.

Reporting of DD basis subset indicator(s)

In accordance with an embodiment, the UE is configured to report the DD basis subset indicator(s) indicating the selected delay vectors from the second codebook for each layer of the CSI matrix in part 2 of the CSI report. In an example, the DD
20 basis subset indicator for each layer is given by a N_3 -sized bitmap, where each bit in the bitmap is associated with a delay vector from the second codebook.

A “1” may indicate that the associated delay vector is selected, and a “0” may indicate that the associated delay vector is not selected. In another example, the DD basis subset indicator for the l-th layer is given by a $\lceil \log_2 \left(\frac{N_3}{D^{(l)}} \right) \rceil$ bit indicator.

25 In the following exemplary embodiments, different reporting schemes for the DD basis subset indicators that reduce the feedback overhead of the CSI report are presented.

In accordance with an embodiment, the UE is configured to determine a common delay domain (CDD) basis subset of the selected delay vectors across all layers, and to indicate the delay vectors of the CDD basis subset by a CDD basis subset indicator in the CSI report. Furthermore, the UE may be configured to indicate the selected delay vectors from the CDD basis subset for each layer by a layer-specific delay domain basis (LDD) subset indicator in the CSI report.

In an example, the CDD basis subset indicator is given by a N_3 -sized bitmap, where the bitmap contains $\bar{D}$ 1's and each bit in the bitmap is associated with a delay vector from the second codebook.

A "1" may indicate that the associated delay vector is selected, and a "0" may indicate that the associated delay vector is not selected.

In another example, the CDD basis subset indicator is given by a $\left\lceil \log_2 \left(\frac{N_3}{\bar{D}} \right) \right\rceil$ bit indicator, where $\bar{D} < N_3$ indicates the total number of selected delay vectors by the UE across all layers.

In another example, the CDD basis subset is represented by two values $\bar{D}$ and $\bar{D}_{in}$, where $\bar{D}$ defines the number of elements of the CDD basis subset, and $\bar{D}_{in}$ represents the first index of the selected $\bar{D}$ delay vectors $[\mathbf{d}_{\text{mod}(\bar{D}_{in}, N_3)}, \mathbf{d}_{\text{mod}(\bar{D}_{in}+1, N_3)}, \dots, \mathbf{d}_{\text{mod}(\bar{D}_{in}+\bar{D}-1, N_3)}]$ from the second codebook.

Examples of the CDD basis subset configured by $\bar{D}$ and $\bar{D}_{in}$ are shown in **Figures 1A and 1B**.

Figure 1A illustrates an example of a CDD basis subset for the values:

$N_3=13$, $\bar{D}=7$ and $\bar{D}_{in}=12$.

The CDD basis subset contains $\bar{D}=7$ FD basis vectors $[\mathbf{d}_{\text{mod}(\bar{D}_{in}, N_3)}, \mathbf{d}_{\text{mod}(\bar{D}_{in}+1, N_3)}, \dots, \mathbf{d}_{\text{mod}(\bar{D}_{in}+\bar{D}-1, N_3)}] = [\mathbf{d}_{12}, \mathbf{d}_{13}, \mathbf{d}_1, \mathbf{d}_2, \mathbf{d}_3, \mathbf{d}_4, \mathbf{d}_5]$,

selected from the second codebook of size $N_3=13$. The index of the first FD vector of the CDD subset is given by $\bar{D}_{in}=12$.

Figure 1B illustrates another example of a CDD basis subset for the values:

$N_3=13$, $\bar{D}=8$ and $\bar{D}_{in}=9$.

The CDD basis subset contains $\bar{D}=8$ FD basis vectors $[\mathbf{d}_{\text{mod}(\bar{D}_{in}, N_3)}, \mathbf{d}_{\text{mod}(\bar{D}_{in}+1, N_3)}, \dots, \mathbf{d}_{\text{mod}(\bar{D}_{in}+\bar{D}-1, N_3)}] = [\mathbf{d}_9, \mathbf{d}_{10}, \mathbf{d}_{11}, \mathbf{d}_{12}, \mathbf{d}_{13}, \mathbf{d}_1, \mathbf{d}_2, \mathbf{d}_3]$,

selected from the second codebook of size $N_3=13$. The index of the first FD vector of the CDD subset is given by $\bar{D}_{in}=9$.

In an example, the LDD subset indicator is given by a $\bar{D}$ -sized bitmap and each bit in the bitmap is associated with a delay vector from the CDD basis subset. A “1” may indicate that the associated delay vector is selected from the CDD basis subset, and a “0” may indicate that the associated delay vector is not selected from the CDD basis subset. In another example, the LDD subset indicator is given by a $\left\lceil \log_2 \left(\frac{\bar{D}}{D^{(l)}} \right) \right\rceil$ bit indicator.

In accordance with an embodiment, for the indication of the payload size of the CDD basis subset indicator in the CSI report part 2, the UE is configured to report the parameter $\bar{D}$ in CSI report part 1. Furthermore, the UE is configured to report (if available) the parameter $\bar{D}_{in}$ in CSI part 2.

In accordance with an embodiment, for reducing the feedback overhead of the CSI report part 1, the UE is configured with the parameter $\bar{D}$ by the gNB (and hence not reported in CSI part 1), or the parameter $\bar{D}$ is a priori known at the UE (and hence not reported in CSI part 1).

In accordance with an embodiment, for reducing the feedback overhead of the CSI report part 1, the UE is configured with the parameter(s) $\bar{D}_r$ by the gNB for each possible rank RI of the CSI matrix (and hence not to report the parameter $\bar{D}_r$ in CSI part 1), or the parameter(s) $\bar{D}_r$ are e.g. a priori known at the UE (and hence not reported).

In accordance with an embodiment, for reducing the feedback overhead of the CSI report part 1, the UE is configured with the parameter(s) $\bar{D}_{in,r}$ by the gNB for each possible rank RI of the CSI matrix (and hence not to report the parameter $\bar{D}_{in,r}$ in

CSI part 2), or the parameter(s) $\bar{D}_{in,r}$ are a priori known at the UE (and hence not reported). In an example, $\bar{D}_{in,r} = N_3 - \left\lfloor \frac{N'_3}{2} \right\rfloor + q$, where $q \in \{1, 2, \dots\}$ is an integer.

In accordance with an embodiment, for reducing the feedback overhead of the CSI report (part 1 and part 2), the UE is configured to receive the CDD basis subset indicator from the gNB, and not to report the CDD basis subset indicator in CSI part 2. The CDD basis subset indicator configured by the gNB may be rank-specific, and the gNB configures for each rank $RI \in \{1, 2, 3, 4\}$ of the CSI matrix a CDD basis subset indicator.

In an example, the CDD basis subset indicator configured by the gNB is given by a N_3 -sized bitmap, where the bitmap contains $\bar{D}$ 1's and each bit in the bitmap is associated with a delay vector from the second codebook.

A "1" may indicate that the associated delay vector is selected, and a "0" may indicate that the associated delay vector is not selected. In another example, the CDD basis subset indicator is configured by a $\left\lceil \log_2 \left(\frac{N_3}{\bar{D}} \right) \right\rceil$ bit indicator, where the parameter $\bar{D}$ indicates the total number of selected delay vectors by the UE across all layers and is configured by the gNB.

In accordance with an embodiment, for reducing the feedback overhead of the CSI report (part 1 and part 2), the UE is configured to select the delay vectors for each layer from an a-priori known CDD basis subset indicator (e.g. known by 3GPP standard specification), and not to report the CDD basis subset indicator in CSI part 2.

In accordance with an embodiment, for reducing the feedback overhead of the CSI report (part 2), the UE is configured to select the CDD basis subset indicator from a-priori known multiple CDD basis subsets of different sizes and to indicate in the CSI part 1 the size of the selected CDD basis subset. The CDD basis subset indicator sets are either higher layer configured or known at the UE (defined by specification).

In accordance with an embodiment, for reducing the feedback overhead of the CSI report (part 1 and part 2), the UE is configured to select the CDD basis subset

indicator from a-priori known N equal-sized CDD basis subset indicator set(s), and to indicate in the CSI report part 2 the selected CDD basis subset and in the CSI part 1 the size of the selected CDD basis subset. As an example, the selected CDD basis subset indicator in CSI part 2 may be represented by a $\lceil \log_2 N \rceil$ bit indicator.

- 5 In accordance with an embodiment, the UE is configured to perform a N_3 -modulo shift operation on all delay indices of the vectors in the selected DD basis subset of a layer with respect to the delay index associated with the strongest coefficient indicator of the layer. Note that this shift operation has no impact on the performance of the precoder defined by the CSI matrix and the shifted DD basis subset.
- 10 After this shift operation is applied, the delay index associated with the strongest coefficient is always associated with a known delay index, for example, the first delay index (and hence the first delay vector from the second codebook).

Consequently, the first delay index does not need to be reported and the DD basis subset indicator for the l -th layer is given by $(N_3 - 1)$ -sized bitmap, a

15 $\left\lceil \log_2 \binom{N_3}{D^{(l)} - 1} \right\rceil$ bit indicator, or a $\left\lceil \log_2 \binom{N_3 - 1}{D^{(l)} - 1} \right\rceil$ bit indicator. Furthermore, as the strongest coefficient is always be associated with the first delay, the strongest coefficient indicator may then be represented by a $\lceil \log_2(2U^{(l)}) \rceil$ bit indicator to indicate the row of the bitmap associated with the strongest coefficient.

- In accordance with an embodiment, the UE is configured to perform a $\bar{D}$ -modulo
- 20 shift operation on all delay indices of the vectors in the selected LDD basis subset with respect to the delay index associated with the strongest coefficient of the layer. Note that, similar to above, this shift operation has no impact on the performance of the precoder defined by the CSI matrix and the shifted LDD basis subset(s). After this shift operation is applied, the delay index associated with the strongest
- 25 coefficient is always associated with the first delay index.

Consequently, the first delay index does not need to be reported and the LDD basis subset indicator for the l -th Layer is given by $(\bar{D} - 1)$ -sized bitmap, or a

$\left\lceil \log_2 \binom{\bar{D}}{D^{(l)} - 1} \right\rceil$ bit indicator, or a $\left\lceil \log_2 \binom{\bar{D} - 1}{D^{(l)} - 1} \right\rceil$ bit indicator. Similarly, the CDD

basis subset indicator may be represented by a $\left\lceil \log_2 \left(\frac{N_3}{\bar{D}} - 1 \right) \right\rceil$ bit indicator, or a $\left\lceil \log_2 \left(\frac{N_3 - 1}{\bar{D}} - 1 \right) \right\rceil$ bit indicator.

Reporting of D'

In accordance to an embodiment, in order to further save the feedback overhead,
 5 the UE may report a value $D^{(l)'} (\leq D^{(l)})$ in UCI part 1 indicating that the associated bitmap of the l-th layer contains only $D^{(l)'}$ columns, instead of $D^{(l)}$ columns.

For example, if the configured value of $D^{(l)} = 7$, and the last 2 columns of the bitmap associated with the l-th layer contains only zeros, the part of the bitmap containing only zeros is dropped from UCI part 2, In this way, the size of the bitmap
 10 is reduced from $2U^{(l)} \times D^{(l)}$ to $2U^{(l)} \times D^{(l)'}$ and a feedback overhead saving is achieved. The value $D^{(l)'}$ may be indicated in UCI part 1.

In one example, $D^{(l)'}$ may be indicated by the UE by a 1-bit indicator per layer. Then, $D^{(l)'}$ may be restricted to $D^{(l)'} = \gamma D^{(l)}$, where $\gamma \in (0,1)$. Examples of γ are given by $\gamma = \{\frac{1}{2}, \frac{3}{4}\}$. When the 1-bit indicator is set, $D^{(l)'} = D^{(l)}$, otherwise, $D^{(l)'} =$
 15 $\gamma D^{(l)}$.

In another example, $D^{(l)'}$ may be indicated by the UE by a 1-bit indicator for all layers. When the 1-bit indicator is set, $D^{(l)'} = D^{(l)}$ for all layers, otherwise, $D^{(l)'} = \gamma D^{(l)}$ for all layers.

In accordance to an embodiment, the selected $D^{(l)'}$ may be indicated by the UE by
 20 unused code-points of other UCI 1 parameters. For example, the code-points used for the indication of the number of non-zero combining coefficients may be used to report in addition the 1-bit indicator for all layers. For instance, when $K_0 = 42$, the total number of non-zero combining coefficients across all four layers is given by 84, and 7 bits are used to indicate the number of non-zero combining coefficients.
 25 Out of the 128 code-points, 46 code-points are un-used and can be used for the indication of the selected value of $D^{(l)'}$. Different examples are provided in the following. In one instance, the code-points 1 to 84 indicate the selected number of non-zero combining coefficients and indicate that $D^{(l)'} = D^{(l)}$ for all layers, and the

remaining codepoints 85 to 128 indicate the selected numbers of non-zero combining coefficients 1 to 44, and that $D^{(l)'} = \gamma D^{(l)}$ for all layers. In another instance, the code-points 1 to 84 indicate the selected number of non-zero combining coefficients and indicate that $D^{(l)'} = D^{(l)}$ for all layers, and the remaining

5 codepoints 85 to 128 indicate the selected numbers of non-zero combining coefficients 1,3,5 to 83, and that $D^{(l)'} = \gamma D^{(l)}$ for all layers. In another instance, the code-points 1 to 84 indicate the selected number of non-zero combining coefficients and indicate that $D^{(l)'} = D^{(l)}$ for all layers, and the remaining codepoints 85 to 128 indicate the selected numbers of non-zero combining

10 coefficients 2,4,6 to 84, and that $D^{(l)'} = \gamma D^{(l)}$ for all layers.

Basis Sufficiency Indication

In accordance with an embodiment, the UE may be configured to report a FD basis sufficiency indicator in the CSI report, the FD basis sufficiency indicator indicates whether the configuration of the values K (or K_1 or K_2 or $K^{(l)}$) or $D^{(l)}$ or $(D^{(l,r)})$ or

15 N_3 is sufficient to calculate the CSI matrix.

When a delay spread of the propagation channel is large and the configured value of N_3 is too small, the calculation of the CSI matrix is influenced by aliasing. Also, when the configured values of K (or K_1 or K_2 or $K^{(l)}$) or $D^{(l)}$ or $(D^{(l,r)})$ may be too small, the UE may not be able to calculate the CSI matrix.

20 In the following, examples for the FD basis sufficiency indicator are presented.

In an example, the UE may be configured to report the basis sufficiency indicator explicitly in UCI part 1. For instance, the UE may be configured to explicitly indicate the basis sufficiency indicator using a 1-bit indicator in UCI part 1.

A '1' of the bit indicator may indicate that the configured values K (or K_1 or K_2 or $K^{(l)}$) and/or $D^{(l)}$ or $(D^{(l,r)})$ are sufficient, and a '0' may indicate that the values K (or K_1 or K_2 or $K^{(l)}$) and/or $D^{(l)}$ or $(D^{(l,r)})$ are not sufficient.

25

In another example, the UE may be configured to implicitly indicate the basis sufficiency indication by reporting a zero for the NNZCC in UCI part 1.

In another example, the UE may be configured to implicitly indicate the basis sufficiency indication by reporting a value of two for the NNZCC in UCI part 1.

- In accordance with an embodiment, when the UE may be configured to indicate via the basis sufficiency indicator in UCI part 1 that if one of the values of K (or K_1 or K_2 or $K^{(l)}$) and/or $D^{(l)}$ or $(D^{(l,r)})$ is not sufficient, the UE is configured to drop or partly drop the UCI part 2.

In an example, the UE may be configured to fully drop UCI part 2.

In another example, the UE may be configured to only report the selected SD basis subsets in UCI part 2.

- In another example, the UE may be configured to report a selected single SD basis vector along with the selected two non-zero combining coefficients per layer.

In another example, the UE may be configured to report a selected single SD basis vector along with the selected two non-zero combining coefficients only for the first layer.

- When the UE indicates a FD basis sufficiency indication in the UCI report, the UE may be configured by the gNB with larger values of K (or K_1 or K_2 or $K^{(l)}$) and/or $D^{(l)}$ or $(D^{(l,r)})$ or N_3 for future CSI reporting.

Reporting of SD basis subset indicator(s)

- In accordance with an embodiment, the UE is configured to determine a layer-specific space domain (LSD) basis subset of the selected beam vectors and to indicate the beam vectors in the CSI report (part 2). The LSD basis subset indicator is given by a $\left\lceil \log_2 \left(\frac{N_1 N_2}{U^{(l)}} \right) \right\rceil$ bit indicator for the l -th layer. When the UE is configured with a single parameter U , representing the number of beams per layer, the LSD basis subset indicator $\left\lceil \log_2 \left(\frac{N_1 N_2}{U} \right) \right\rceil$ is identical across all layers and reported once.

- As demonstrated several advantages are achieved by the embodiments herein.

Below is a summary of the method performed by a UE according to the described embodiments and with reference to **Figure 2** depicting a flowchart of a method performed by the UE. As shown, the method performed by the UE comprises:

5 (201) receiving from a network node, gNB, a radio signal via a MIMO channel, wherein the radio signal contains at least one DL reference signal according to a DL reference signal configuration;

(202) estimating said MIMO channel based on said received at least one DL reference signal for configured subbands;

10 (203) calculating a precoder matrix or a CSI matrix for a number of antenna ports of the gNB and configured subbands; the precoder matrix being based on a first codebook and on a second codebook and a set of combining coefficients for complex scaling/combining one or more of vectors selected from the first codebook and the second codebook;

where,

15 - the first codebook contains one or more transmit-side spatial beam components of the precoder matrix,

- the second codebook contains one or more delay components of the precoder matrix, and

20 (204) reporting, to the gNB, a CSI feedback report and/or a Precoder matrix Indicator, PMI and/or a PMI/Rank Indicator, PMI/RI, used to indicate the precoder matrix or the CSI matrix for the configured antenna ports and subbands.

According to an embodiment, and as previously described, the method comprises receiving a configuration from the gNB, said configuration comprising a CSI report configuration including at least one higher-layer parameters, $D^{(l)}$, representing a
25 number of delays per beam, used for the configuration of the precoder matrix or CSI matrix.

According to an embodiment, the number of delays $D^{(l)}$ is layer-independent and identical for all layers, such that $D^{(l)} = D$, and configuring the UE with only a single parameter D for the configuration of the precoder matrix or CSI matrix.

- 5 According to an embodiment, the number of delays $D^{(l)}$ is configured for subsets of layers, e.g., for a first subset of layers, e.g., a first and second layers), $D^{(1)} = [\alpha_1 D^{(0)}]$, and for a second subset of layers, e.g. a third layer or the third layer and a fourth layer), $D^{(3)} = [\alpha_2 D^{(2)}]$, and receiving from the gNB a signal including two parameters $D^{(0)}$ and $D^{(2)}$ for the configuration of the precoder matrix.

- 10 The method further comprises receiving a configuration from the gNB, which configuration includes a single parameter $D^{(0)}$ for a first layer, and deriving the parameter(s) $D^{(l)}$, $l > 0$ for the remaining layers.

According to an embodiment, the configuration of delays is dependent on the Rank Indicator (RI) of the precoder matrix or the CSI matrix.

15

According to another embodiment, the method comprises receiving a configuration from the gNB, said configuration comprising a CSI report configuration including at least one higher-layer parameters, $U^{(l)}$, representing the number of spatial beams for the l -th layer, used for the configuration of the precoder matrix or the CSI matrix.

20

As previously described, the higher layer parameter U is a UE capability; and the method comprises indicating the supported value range for the parameter U to the gNB.

- 25 According to an embodiment, for $RI > 1$, the method comprises receiving a configuration from the gNB indicating a single parameter K_1 that denotes the maximum number of non-zero combining coefficients for each layer; and assigning by the UE the number of non-zero combining coefficients per layer such that $\sum_{l=0}^{RI-1} K^{(l)} \leq 2K_1$, and reporting to the gNB the number of non-zero combining coefficients per layer or the total number of non-zero combining coefficients across

all layers. For $RI > 1$, the method comprises receiving a configuration from the gNB indicating a single parameter K_2 , based on which the UE assigning the number of non-zero combining coefficients per layer such that $\sum_{l=0}^{RI-1} K^{(l)} \leq 2K_2$, and reporting the number of non-zero combining coefficients per layer or the total number of non-zero combining coefficients across all layers to the gNB.

The method may further comprise using a two-step approach to reduce the overall overhead for reporting the bitmaps of all layers, wherein in a first step, the UE determining determine a joint bitmap of size $U_g \times D_g$ by the union of individual bitmaps across the layers, and reporting to the gNB the number of '1's in the joint bitmap, and wherein in a second step, reporting to the gNB an indication of the indices of the selected non-zero combining coefficients associated with the joint bitmap.

The method may further comprise reporting in an UCI (Uplink Control Information) part 2, an indication of selected Spatial Domain (SD) and/or Frequency Domain, (FD) basis vectors associated with the joint bitmap.

The method may further comprise determining per layer an effective bitmap of size $U_e^{(l)} \times D_e^{(l)}$, where $U_e^{(l)} \leq 2U^{(l)}$ and $D_e^{(l)} \leq D^{(l)}$, wherein the effective bitmaps are reported in CSI part 2 and wherein each effective bitmap contains only non-zero rows and/or non-zero columns, and indicating in the CSI part 2, an indication of the selected SD basis vectors associated with the effective bitmap per layer and/or an indication of the selected FD basis vectors associated with the effective bitmap per layer.

The method may further comprise indicating the sizes of the effective bitmaps for all layers in UCI part 1.

The method may further comprise determining a Common Delay Domain (CDD) basis subset of selected delay vectors across all layers, and indicating the delay vectors of the CDD basis subset by a CDD basis subset indicator in the CSI report.

The method may further comprise indicating the selected delay vectors from the CDD basis subset for each layer by a layer-specific delay domain basis, LDD, subset indicator in the CSI report.

The method may further comprise performing a N_3 -modulo shift operation on all delay indices of the vectors in a selected Delay Domain (DD) basis subset of a layer with respect to a delay index associated with the strongest coefficient indicator of the layer.

- 5 Additional embodiments relating to actions performed by the UE have already been described and need not be repeated.

In order to perform the methods steps and operations of the UE previously described, there is also provided a UE 300, as shown in **Figure 3**, which UE 300 comprises a processor 310 or processing circuit or a processing module or a
10 processor or means 310; a receiver circuit or receiver module 340; a transmitter circuit or transmitter module 350; a memory module 320 a transceiver circuit or transceiver module 330 which may include the transmitter circuit 350 and the receiver circuit 340. The UE 300 further comprises an antenna system 360 which includes antenna circuitry for transmitting and receiving signals to/from at least the
15 UE. The antenna system employs beamforming as previously described.

The UE 300 may operate in any radio access technology including 2G, 3G, 4G or LTE, LTE-A, 5G, WLAN, and WiMax etc. that support beamforming technology.

The processing module/circuit 310 includes a processor, microprocessor, an
20 application specific integrated circuit (ASIC), field programmable gate array (FPGA), or the like, and may be referred to as the "processor 310." The processor 310 controls the operation of the UE 300 and its components. Memory (circuit or module) 320 includes a random-access memory (RAM), a read only memory (ROM), and/or another type of memory to store data and instructions that may be
25 used by processor 310. In general, it will be understood that the UE 300 in one or more embodiments includes fixed or programmed circuitry that is configured to carry out the operations in any of the embodiments disclosed herein.

In at least one such example, the UE 300 includes a microprocessor,
30 microcontroller, DSP, ASIC, FPGA, or other processing circuitry that is configured to execute computer program instructions from a computer program stored in a non-transitory computer-readable medium that is in, or is accessible to the processing circuitry. Here, "non-transitory" does not necessarily mean permanent

or unchanging storage, and may include storage in working or volatile memory, but the term does connote storage of at least some persistence. The execution of the program instructions specially adapts or configures the processing circuitry to carry out the operations disclosed herein including any one of method claims 1-35.

- 5 Further, it will be appreciated that the UE 300 may comprise additional components not shown in Figure 3.

There is also provided a computer program comprising instructions which when executed on at least one processor of the UE according to claim 36, cause at least
10 said one processor to carry out the method according to any one of claim 1-35.

There is also provided a method performed by a network node or gNB as previously described. The method comprises: transmitting to a UE a radio signal via a MIMO channel, wherein the radio signal contains at least one DL, reference
15 signal according to a DL reference signal configuration, for enabling the UE to estimate said MIMO channel based on said received at least one DL reference signal for configured subbands and calculate a precoder matrix or a CSI matrix for a number of antenna ports of the gNB and configured subbands; the precoder matrix being based on a first codebook and on a second codebook and a set of
20 combining coefficients for complex scaling/combining one or more of vectors selected from the first codebook and the second codebook; where, the first codebook contains one or more transmit-side spatial beam components of the precoder matrix, the second codebook contains one or more delay components of the precoder matrix, and receiving, from the UE, a CSI feedback report and/or a
25 PMI and/or a PMI/RI, used to indicate the precoder matrix or the CSI matrix for the configured antenna ports.

Additional operations performed by the gNB or network node in terms of at least configuring the UE have already been described and need not be repeated.

30 There is also provided a network node or gNB (not shown) in order to perform the method steps and the previously described operations. The gNB comprises a processor or processing circuit or a processing module or a processor or means; a receiver circuit or receiver module; a transmitter circuit or transmitter module; a

memory module a transceiver circuit or transceiver module which may include the transmitter circuit and the receiver circuit. The gNB further comprises an antenna system which includes antenna circuitry for transmitting and receiving/transmitting signals to/from at least the UE. The antenna system employs beamforming as
5 previously described.

The gNB may operate in any radio access technology including 2G, 3G, 4G or LTE, LTE-A, 5G, WLAN, and WiMax etc. that support beamforming technology.

The processing module/circuit includes a processor, microprocessor, an
10 application specific integrated circuit (ASIC), field programmable gate array (FPGA), or the like, and may be referred to as the "processor." The processor controls the operation of the gNB and its components. Memory (circuit or module) includes a random-access memory (RAM), a read only memory (ROM), and/or another type of memory to store data and instructions that may be used by
15 processor. In general, it will be understood that the gNB in one or more embodiments includes fixed or programmed circuitry that is configured to carry out the operations in any of the embodiments disclosed herein.

In at least one such example, the gNB includes a microprocessor, microcontroller,
20 DSP, ASIC, FPGA, or other processing circuitry that is configured to execute computer program instructions from a computer program stored in a non-transitory computer-readable medium that is in, or is accessible to the processing circuitry. Here, "non-transitory" does not necessarily mean permanent or unchanging storage, and may include storage in working or volatile memory, but the term does
25 connote storage of at least some persistence. The execution of the program instructions specially adapts or configures the processing circuitry to carry out the operations disclosed in this disclosure. Further, it will be appreciated that the gNB may comprise additional components.

30 There is also provided a computer program comprising instructions which when executed on at least one processor of the gNB, cause at least said one processor to carry out the method described.

Throughout this disclosure, the word "comprise" or "comprising" has been used in

a non-limiting sense, i.e. meaning "consist at least of". Although specific terms may be employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation. The embodiments herein may be applied in any wireless systems including GSM, 3G or WCDMA, LTE or 4G, LTE-A (or LTE-Advanced),
5 5G, WiMAX, WiFi, satellite communications, TV broadcasting etc. that may employ beamforming technology.

References

- [1] 3GPP TS 38.214 V15.3.0: "3GPP; TSG RAN; NR; Physical layer
10 procedures for data (Rel. 15)," Sept. 2018
- [2] Samsung "Revised WID: Enhancements on MIMO for NR", RP-182067,
3GPP RAN#81, Gold Coast, Australia, Sept. 10-13, 2018.

CLAIMS

1. A method performed by a User Equipment, UE, the method comprising:
- receiving (201) from a network node, gNB, a radio signal via a Multiple
5 Input Multiple Output, MIMO, channel, wherein the radio signal contains at
least one DownLink, DL, reference signal according to a DL reference
signal configuration;
 - estimating (202) said MIMO channel based on said received at least one
10 DL reference signal for configured subbands;
 - calculating (203) a precoder matrix or a Channel State Information, CSI,
matrix for a number of antenna ports of the gNB and configured subbands;
the precoder matrix being based on a first codebook and on a second
15 codebook and a set of combining coefficients for complex
scaling/combining one or more of vectors selected from the first codebook
and the second codebook;
- where,
- the first codebook contains one or more transmit-side spatial beam
20 components of the precoder matrix or CSI matrix,
 - the second codebook contains one or more delay components of
the precoder matrix or CSI matrix,
 - determining a common delay domain, CDD, basis subset of the selected
25 vectors associated with the delay components across all layers of the
precoder matrix or CSI matrix, wherein the CDD basis subset is defined by
a parameter $\bar{D}$ representing the number of elements of the CDD basis
subset, and a parameter $\bar{D}_{in}$ representing the first index of the $\bar{D}$ delay
vectors from the second codebook; and
30
 - reporting (204), to the gNB, a CSI feedback report and/or a Precoder
matrix Indicator, PMI and/or a PMI/Rank Indicator, PMI/RI, used to indicate
the precoder matrix or the CSI matrix for the configured antenna ports and

subbands, wherein the selected vectors from the CDD basis subset are indicated in the reporting, for each layer, by a layer-specific delay domain, LDD, basis subset indicator.

- 5 2. The method according to claim 1 comprising receiving a configuration from the gNB, said configuration comprising a CSI report configuration including at least one higher-layer parameter, $D^{(l)}$, representing a number of delays per layer, used for the configuration of the precoder matrix or CSI matrix.
- 10 3. The method according to claim 2 wherein the number of delays $D^{(l)}$ is layer-independent and identical for all layers, such that $D^{(l)} = D$, and configuring the UE with only a single parameter D for the configuration of the precoder matrix or CSI matrix.
- 15 4. The method according to any preceding claim wherein the configuration of delays is dependent on the Rank Indicator, RI, of the precoder matrix or the CSI matrix.
- 20 5. The method according to claim 4 wherein the number of delays per layer for $RI \leq 2$ is identical.
- 25 6. The method according to claim 4 or claim 5 wherein for $RI > 2$ the number of delays for the l -th layer and the r -th rank is given by $D^{(l,r)} = \alpha_0 D^{(0,1)}$ with $\alpha_0 \in \mathbb{R}^+$ being a positive real value.
- 30 7. The method according to claim 1 comprising receiving a configuration from the gNB, said configuration comprising a CSI report configuration including at least one higher-layer parameter, $U^{(l)}$, representing the number of spatial beams for the l -th layer, used for the configuration of the precoder matrix or the CSI matrix.

8. The method according to claim 7 wherein the number of spatial beams $U^{(l)}$ is identical for all layers and rank-independent, such that $U^{(l)} = U$, and configuring the UE with only a single parameter U for the configuration of the precoder matrix or CSI matrix.
- 5
9. The method according to claim 7 or claim 8 wherein the higher layer parameter $U^{(l)}$ is a UE capability; and indicating the supported value range for the parameter $U^{(l)}$ to the gNB.
- 10
10. The method according to claim 8 or claim 9 wherein the UE is configured with $U = 6$ only for rank $RI \leq 2$.
11. The method according to any one of claims 1-10 comprising, for rank $RI = 1$, receiving a configuration from the gNB indicating a single parameter K ; and assigning by the UE the number of non-zero combining coefficients $K^{(0)}$, where $K^{(0)} \leq K$, and reporting to the gNB the total number of assigned non-zero combining coefficients.
- 15
12. The method according to any one of claims 1-10 comprising, for rank $RI > 1$, receiving a configuration from the gNB indicating a single parameter K_1 that denotes the maximum number of non-zero combining coefficients for each layer; and assigning by the UE the number of non-zero combining coefficients per layer ($K^{(l)}$) such that $\sum_{l=0}^{RI-1} K^{(l)} \leq 2K_1$ over all RI layers, and reporting to the gNB the total number of non-zero combining coefficients assigned across all layers.
- 20
- 25
13. The method according to claim 1 comprising performing a $\bar{D}$ -modulo shift operation on all delay indices of the vectors in the selected LDD basis subset of a layer with respect to a delay index associated with the strongest combining coefficient indicator of the layer.
- 30

14. The method according to claim 13, wherein the LDD basis subset indicator for a layer is given by a $\left\lceil \log_2 \left(\frac{\bar{D} - 1}{D^{(l)} - 1} \right) \right\rceil$ bit indicator.
15. The method according to any one of claims 1-14 wherein the first codebook comprises a Discrete Fourier Transform, DFT, matrix or an oversampled DFT matrix of size $N_1 N_2 \times O_{1,1} N_1 O_{1,2} N_2$ containing spatial beam components of the precoder matrix, wherein N_1 and N_2 refer to the number of antenna ports of a same polarization in a first and a second dimension of an antenna array of the gNB, respectively; and wherein $O_{1,1} \in \{1, 2, 3, \dots\}$ and $O_{1,2} \in \{1, 2, 3, \dots\}$ refer to oversampling factors of the codebook matrix with respect to the first and second dimension, respectively.
16. The method according to any one of claims 1-14 wherein the first codebook comprises a set of $P_{CSI-RS}/2 \times 1$ column vectors, wherein the parameter P_{CSI-RS} denotes the total number of CSI-RS ports used by the UE for channel estimation and precoder coefficient calculation; and wherein P_{CSI-RS} is configured via a higher-layer.
17. The method according to any one of claims 1-16 wherein the second codebook comprises a DFT, or an oversampled DFT matrix of size $N_3 \times N_3 O_2$ containing the delay components of the precoder matrix, where N_3 refers to the configured number of subbands, and O_2 refers to an oversampling factor $O_2 = 1, 2, \dots$ of the second codebook matrix.
18. The method according to any one of claims 1-17 comprising, reporting to the gNB, for each layer of the precoder matrix or CSI matrix, a spatial domain, SD, basis indicator indicating the selected subset of beam vectors for all layers and the LDD, basis indicator indicating the selected subset of $D^{(l)}$ delay vectors of the l-th layer.

19. The method according to claims 15-17, wherein the CSI matrix used for CSI reporting for the configured $2N_1N_2$ or P_{CSI-RS} antenna ports and configured N_3 subbands is represented for a first polarization of the antenna ports and l -th transmission layer as: $\mathbf{G}_1^{(l)} =$

$$\alpha^{(l)} \sum_{u=0}^{U^{(l)}-1} \mathbf{b}_u^{(l)} \sum_{d=0}^{D^{(l)}-1} \gamma_{1,u,d}^{(l)} \mathbf{d}_d^{(l)H},$$

and for a second polarization of the antenna ports and l -th transmission layer as

$$\mathbf{G}_2^{(l)} = \alpha^{(l)} \sum_{u=0}^{U^{(l)}-1} \mathbf{b}_u^{(l)} \sum_{d=0}^{D^{(l)}-1} \gamma_{2,u,d}^{(l)} \mathbf{d}_d^{(l)H},$$

where $\mathbf{b}_u^{(l)}$ ($u = 0, \dots, U^{(l)} - 1$) represents a u -th spatial beam vector for the l -th layer selected from the first codebook, $\mathbf{d}_d^{(l)}$ ($d = 0, \dots, D^{(l)} - 1$) is a d -th delay vector associated with the l -th layer selected from the second codebook, $\gamma_{p,u,d}^{(l)}$ is a complex delay-domain combination coefficient associated with the u -th beam, d -th delay and p -th polarization, $U^{(l)}$ represents the number of spatial beam vectors, $D^{(l)}$ represents the number of delay vectors, and $\alpha^{(l)}$ is a normalizing scalar.

20. The method according to claim 2 or claim 3 wherein the higher-layer parameter $D^{(l)}$ is dependent on the number of configured subbands, N_3 , as follows: $D^{(l)} = \lceil p^{(l)} N_3 \rceil$, where, $0 < p^{(l)} < 1$; and wherein a number of configured delays increases or decreases with increasing or decreasing values of N_3 .

21. The method according to claim 20 wherein the higher layer parameter $p^{(l)}$ is signaled to the UE for the configuration of the CSI matrix.

22. The method according to claim 20 wherein the number of configured subbands, N_3 depends on a number of Channel Quality Information, CQI subbands, N_{CQI} , and wherein the number of configured subbands, N_3 linearly increases or linearly decreases with the number of CQI subbands, $N_3 = N_{CQI} \times R$, $R \geq 1$, where R is a parameter to control the UE calculation complexity

23. The method according to claim 22 wherein R is a higher layer parameter and a UE capability.
- 5 24. The method according to any preceding claim comprising, selecting non-zero combining coefficients for the l -th layer and indicating the selected non-zero combining coefficients by a $2U^{(l)} \times D^{(l)}$ -sized bitmap, where each bit in the bitmap is associated with a polarization index ($p \in \{1,2\}$), beam index ($0 \leq u \leq U^{(l)} - 1$) and delay index ($0 \leq d \leq D^{(l)} - 1$).
- 10 25. The method according to claim 24 wherein a "1" in the bitmap indicates that the combining coefficient associated with the polarization index p , beam index u , and delay index d is non-zero, and reported by the UE to the gNB.
- 15 26. The method according to claim 24 wherein a "0" in the bitmap indicates that the combining coefficient associated with the polarization index p , beam index u , and delay index d is zero and not reported by the UE to the gNB.
- 20 27. The method according to any one of the preceding claims wherein the CSI report comprises two parts, where the first CSI part has a fixed size and is used to indicate the size of the payload of the second CSI part, and wherein the two parts are independently encoded.
- 25 28. The method according to claim 27 wherein the second CSI part has a varying payload size and includes quantized combining coefficients for all layers and one or multiple bitmap(s) for the non-zero coefficient indication and the first CSI part includes information on the total number of quantized combining coefficients across all layers and the rank of the CSI matrix.
- 30 29. The method according to claim 27 or claim 28 wherein the first part of the CSI includes a sum of selected non-zero combining coefficients, NNZCC, across all layers indicated by a single NNZCC bit-indicator.

30. The method according to claim 29 wherein the NNZCC bit-indicator is represented by a $\lceil \log_2 2K_0 \rceil$ indicator, where $2K_0$ represents the maximum number of reported combining coefficients across all layers.
- 5 31. The method according to claim 27 comprising reporting the parameter $\bar{D}_{in}$ in the second part of the CSI report.
32. The method according to claim 1 wherein the parameter $\bar{D}$ is a priori known at the UE or is received in a configuration from the gNB.
- 10 33. The method according to claim 27 wherein the second CSI part includes per layer a strongest coefficient indicator and wherein the bit values for the amplitude and phase of the quantized strongest combining coefficient is not contained in the second CSI part.
- 15 34. The method according to claim 33 wherein the strongest coefficient indicator is given by a $\lceil \log_2(2U^{(l)}) \rceil$ bit indicator to indicate the row of the bitmap associated with the strongest combining coefficient.
- 20 35. The method according to claim 33 wherein the strongest coefficient indicator associated with the l -th layer is given by a $\lceil \log_2(NZ_l) \rceil$ bit indicator, wherein NZ_l represents the maximum number of non-zero combining coefficients indicated for the l -th layer in CSI part 1.
- 25 36. A User Equipment, UE, (300) comprising a processor (310) and a memory (320), said memory (320) containing instructions executable by said processor (310) whereby said UE (300) is configured to perform any one of the subject-matter of method claims 1-35.
- 30 37. A method performed by a network node, gNB, the method comprising:
 - transmitting, to a user equipment, UE, a radio signal via a Multiple Input Multiple Output, MIMO, channel, wherein the radio signal contains at least

one DownLink, DL, reference signal according to a DL reference signal configuration; for enabling the UE to:

- estimate said MIMO channel based on said received at least one DL reference signal for configured subbands;

5 - calculate a precoder matrix or a Channel State Information, CSI, matrix for a number of antenna ports of the network node and configured subbands; the precoder matrix being based on a first codebook and on a second codebook and a set of combining coefficients for complex scaling/combining one or more of vectors selected from the first codebook and the second codebook;

where,

- the first codebook contains one or more transmit-side spatial beam components of the precoder matrix or CSI matrix,

15 - the second codebook contains one or more delay components of the precoder matrix or CSI matrix,

- determine a common delay domain, CDD, basis subset of the selected vectors associated with the delay components across all layers of the precoder matrix or CSI matrix, wherein the CDD basis subset is defined by a parameter $\bar{D}$ representing the number of elements of the CDD basis subset, and a parameter $\bar{D}_{in}$ representing the first index of the $\bar{D}$ delay vectors from the second codebook; and

25 - receiving, from the UE, a CSI feedback report and/or a Precoder matrix Indicator, PMI and/or a PMI/Rank Indicator, PMI/RI, used to indicate the precoder matrix or the CSI matrix for the configured antenna ports and subbands, wherein the selected vectors from the CDD basis subset are indicated in the report, for each layer, by a layer-specific delay domain, LDD, basis subset indicator.

30 38. A network node comprising a processor and a memory, said memory containing instructions executable by said processor whereby said network node is configured to perform the subject-matter of method claim 37.

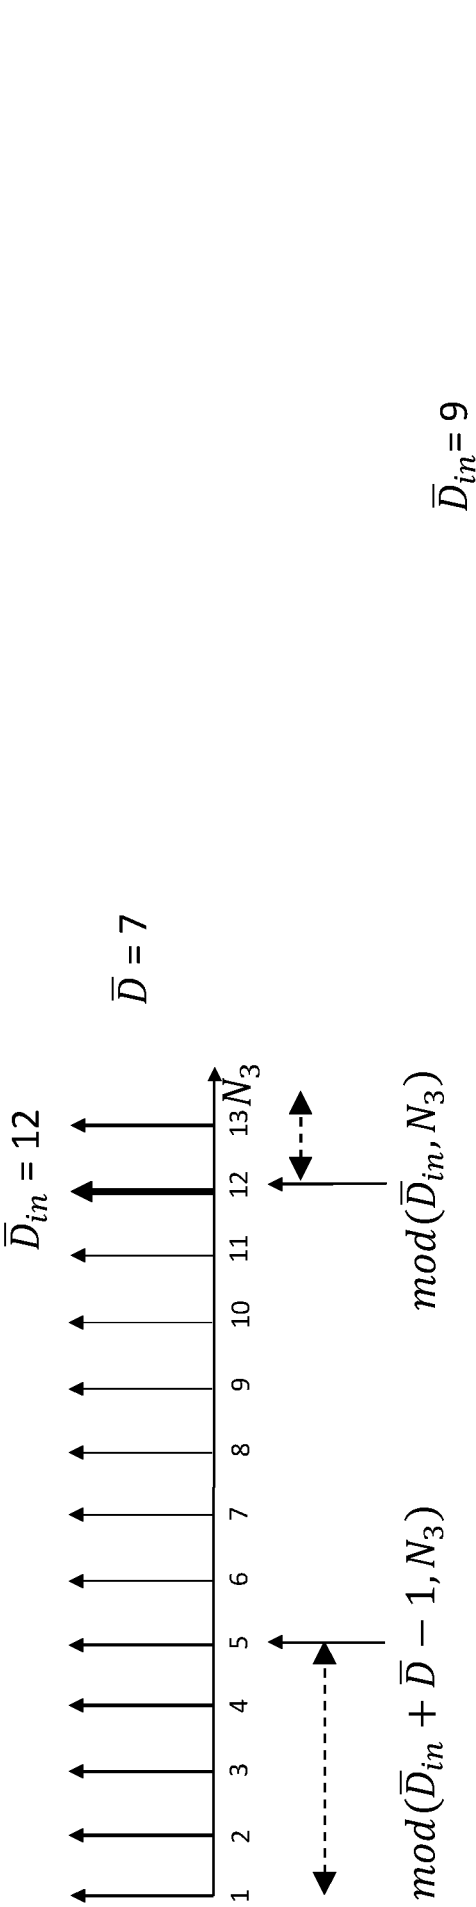


Figure 1A

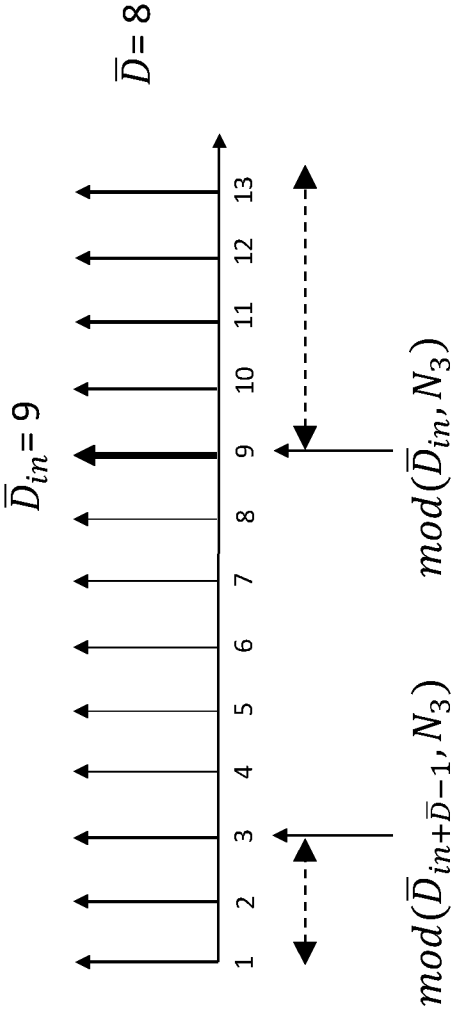


Figure 1B

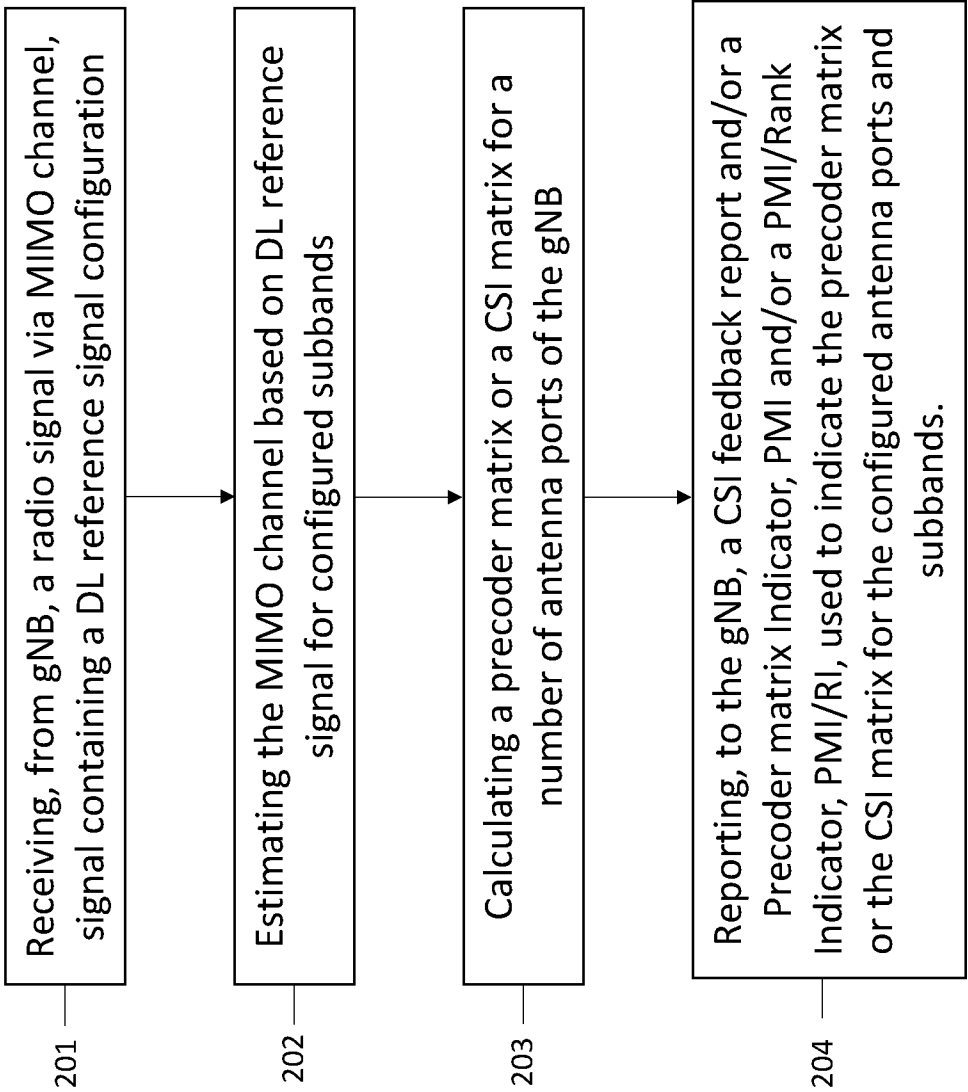


Figure 2

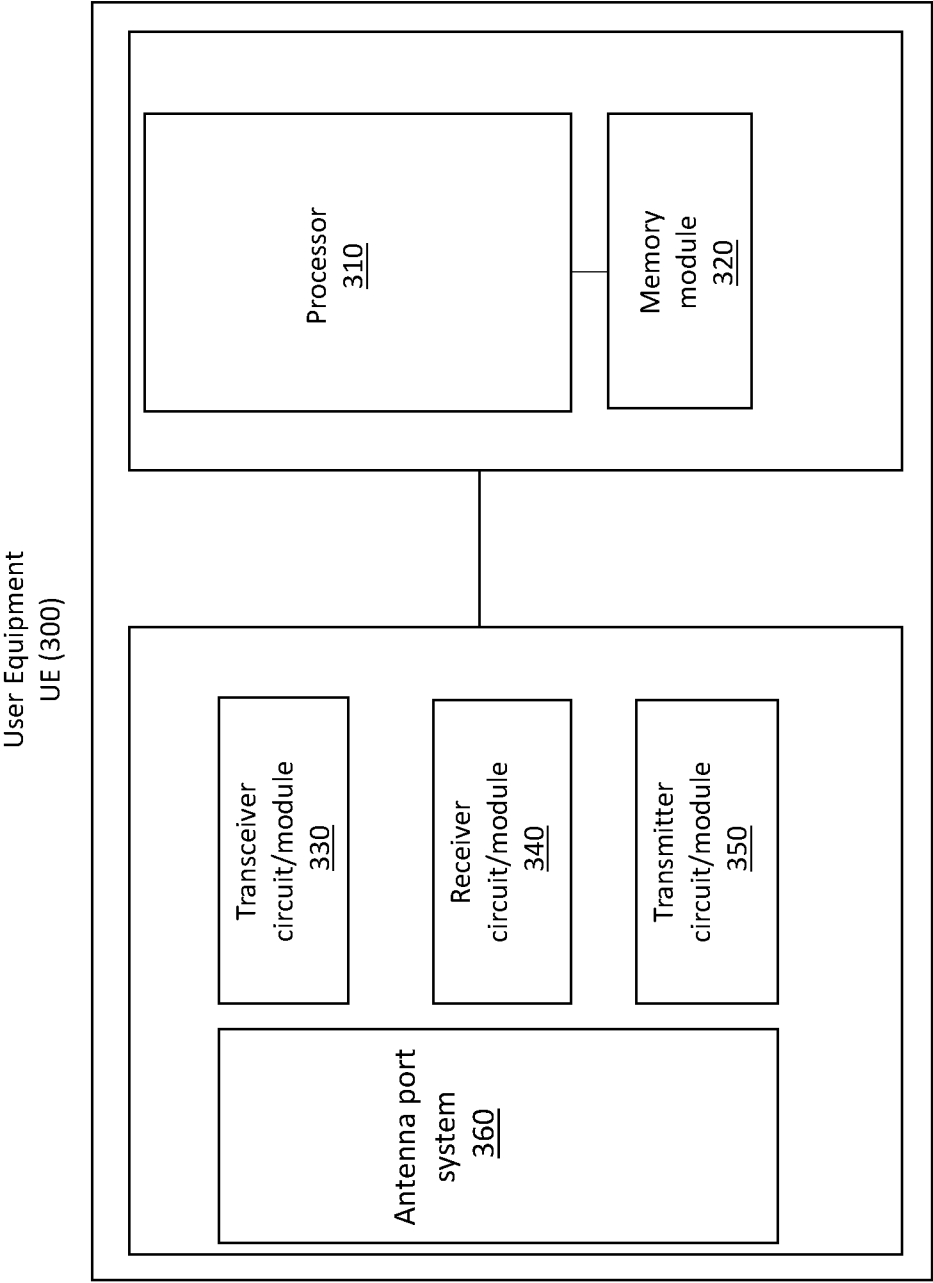


Figure 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2020/060409

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04B7/0417 H04B7/0456 H04B7/06
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FRAUNHOFER IIS ET AL: "Enhancements on Type-II CSI reporting", 3GPP DRAFT; R1-1813130, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE , vol. RAN WG1, no. Spokane, USA; 20181112 - 20181116 11 November 2018 (2018-11-11), XP051555112, Retrieved from the Internet: URL: http://www.3gpp.org/ftp/Meetings%5F3GP%5FSYNC/RAN1/Docs/R1%2D1813130%2Ezip [retrieved on 2018-11-11]	37,38
A	the whole document ----- -/--	1-36



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 May 2020

Date of mailing of the international search report

04/06/2020

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Kokkinos, Titos

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2020/060409

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	MEDIATEK INC: "CSI enhancement for MU-MIMO", 3GPP DRAFT; R1-1901286 TYPE II REVISED FINAL, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE , vol. RAN WG1, no. Taipei, Taiwan; 20190121 - 20190125 21 January 2019 (2019-01-21), XP051601232, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg%5Fran/WG1%5FRL1/TSGR1%5FAH/NR%5FAH%5F1901/Docs/R1%2D1901286%2Ezip [retrieved on 2019-01-21] page 3 - page 15 -----	1-38
A	ZTE: "CSI Enhancement for MU-MIMO Support", 3GPP DRAFT; R1-1903343 CSI ENHANCEMENT FOR MU-MIMO SUPPORT, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE , vol. RAN WG1, no. Athens, Greece; 20190225 - 20190301 22 February 2019 (2019-02-22), XP051601020, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg%5Fran/WG1%5FRL1/TSGR1%5F96/Docs/R1%2D1903343%2Ezip [retrieved on 2019-02-22] page 1 - page 12 -----	1-38
A	NEC: "Discussion on CSI Reporting", 3GPP DRAFT; R1-1904662 DISCUSSION ON CSI REPORTING, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE , vol. RAN WG1, no. Xi'an, China; 20190408 - 20190412 7 April 2019 (2019-04-07), XP051699865, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/Meetings%5F3GP%5FSYNC/RAN1/Docs/R1%2D1904662%2Ezip [retrieved on 2019-04-07] the whole document ----- -/--	1-38

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2020/060409

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	NTT DOCOMO: "Type II CSI Enhancement for MU-MIMO Support", 3GPP DRAFT; R1-1904965, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE , vol. RAN WG1, no. Xi'an, China; 20190408 - 20190412 30 March 2019 (2019-03-30), XP051691892, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg%5Fran/WG1%5FRL1/TSGR1%5F96b/Docs/R1%2D1904965%2Ezip [retrieved on 2019-03-30] the whole document -----	1-38