



US 20030236522A1

(19) **United States**

(12) **Patent Application Publication**

Long et al.

(10) **Pub. No.: US 2003/0236522 A1**

(43) **Pub. Date: Dec. 25, 2003**

(54) **PROSTHESIS CAVITY CUTTING GUIDE, CUTTING TOOL AND METHOD**

(22) Filed: **Jun. 21, 2002**

Publication Classification

(76) Inventors: **Jack Long**, Warsaw, IN (US); **Brian Maroney**, Ft. Wayne, IN (US); **Jose Guzman**, Ft. Wayne, IN (US); **Frank G. Alvine**, Sioux Falls, SD (US); **Stephen F. Conti**, Pittsburgh, PA (US); **Roy W. Sanders**, Tampa, FL (US)

(51) **Int. Cl.⁷ A61B 17/16**

(52) **U.S. Cl. 606/80; 606/96**


(57) **ABSTRACT**

A kit (10) for preparation of a bone cavity (12) in a bone (14) for implantation of a joint prosthesis (16) is provided. The kit (10) includes a guide (20) defining an opening (22) therethrough. The guide (20) is in cooperation with the prosthesis. The kit (10) also includes a rotatable tool (24) constrainable within the opening (22) of said guide (20). The tool (24) is adapted for removal of bone (14) to form the bone cavity (12).

Correspondence Address:

PHILIP S. JOHNSON
JOHNSON & JOHNSON
ONE JOHNSON & JOHNSON PLAZA
NEW BRUNSWICK, NJ 08933-7003 (US)

(21) Appl. No.: **10/177,966**

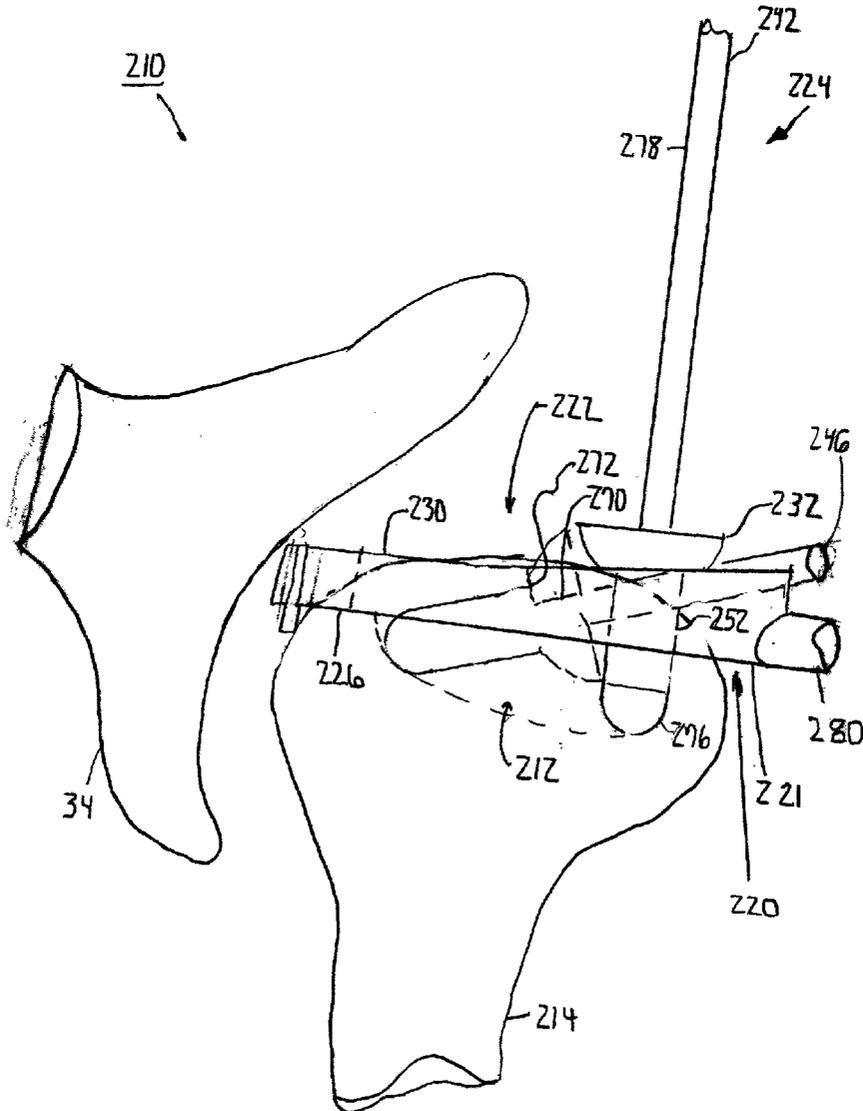

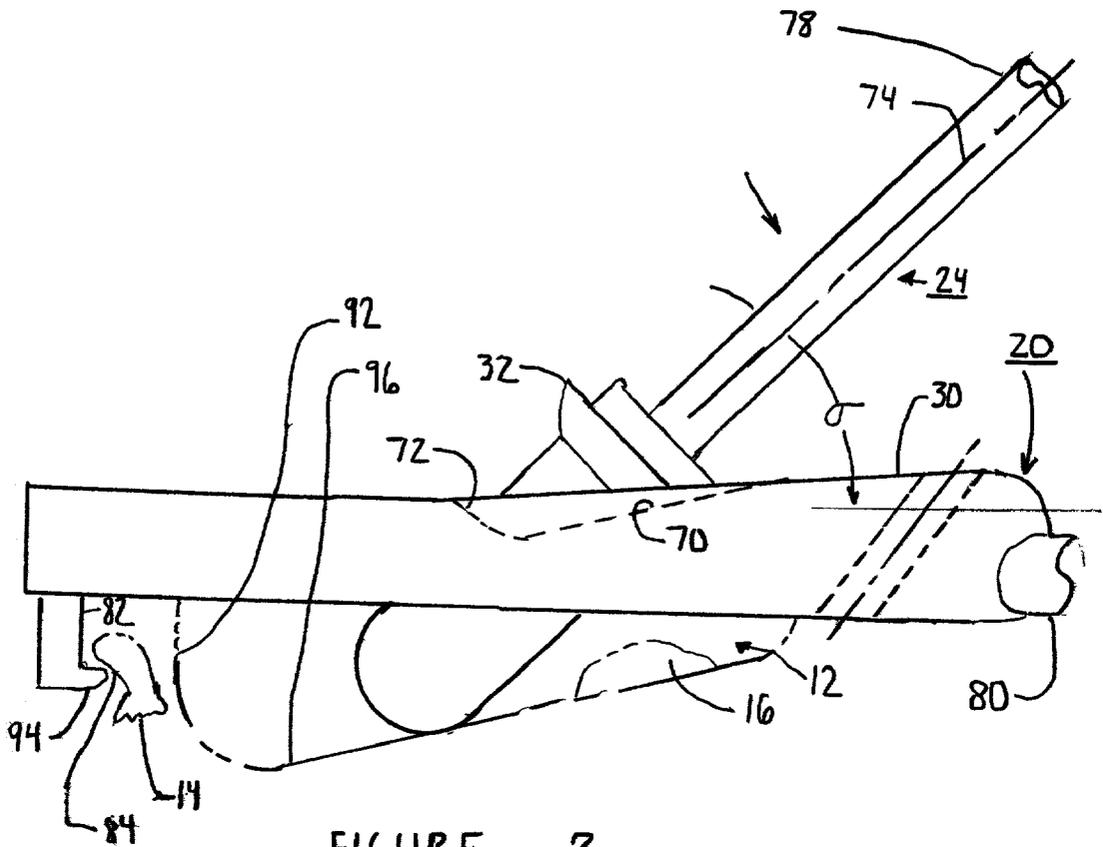


FIGURE 2

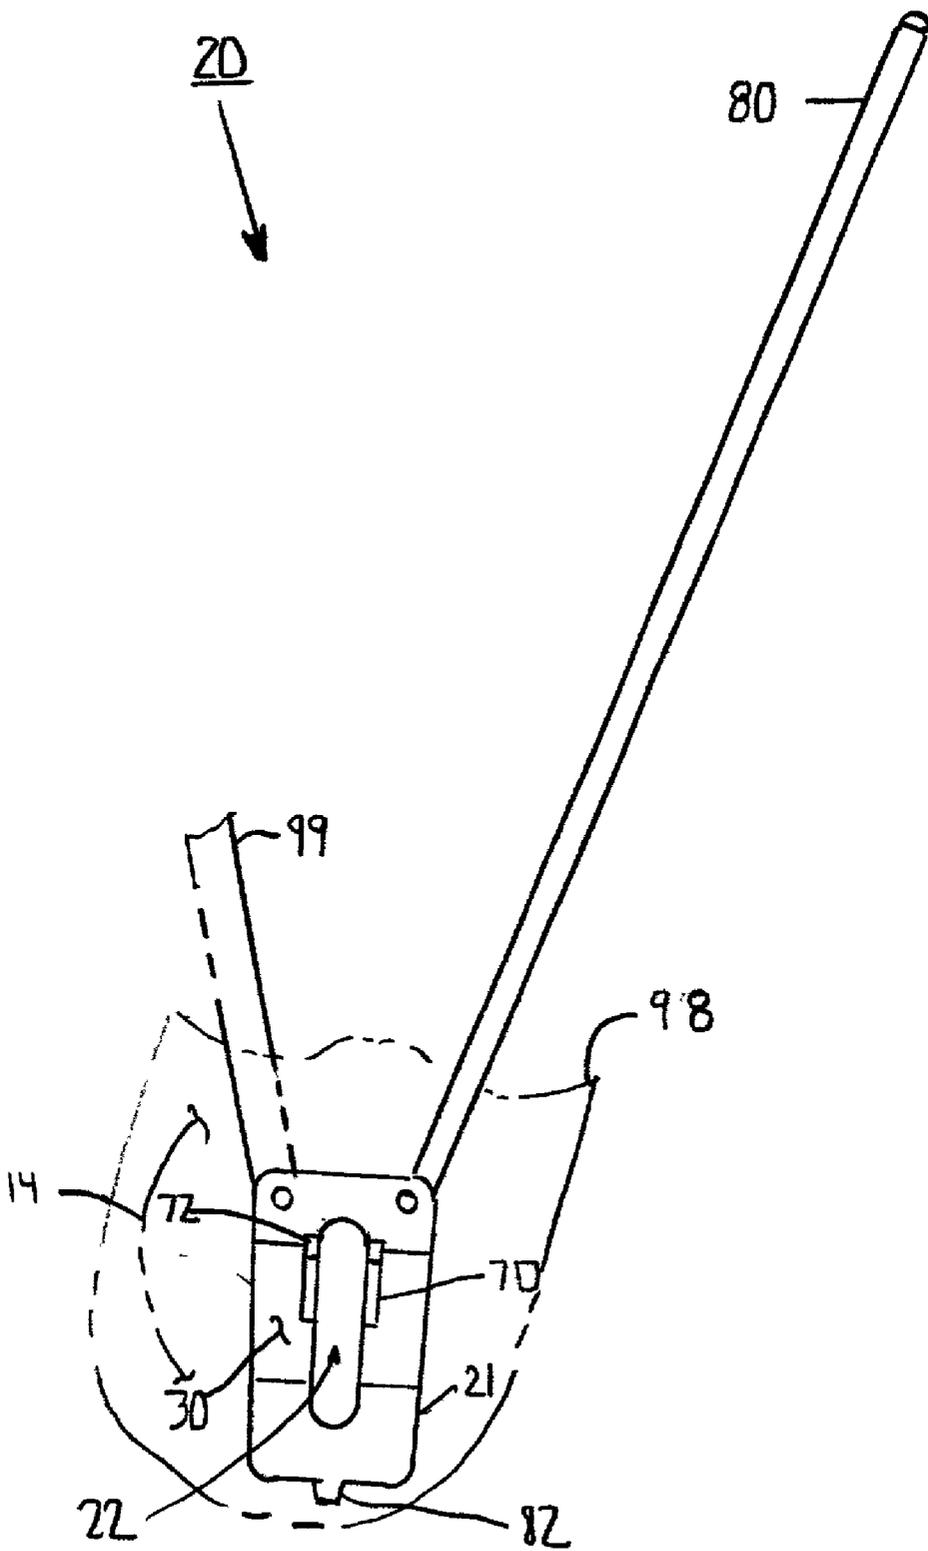


FIGURE 3

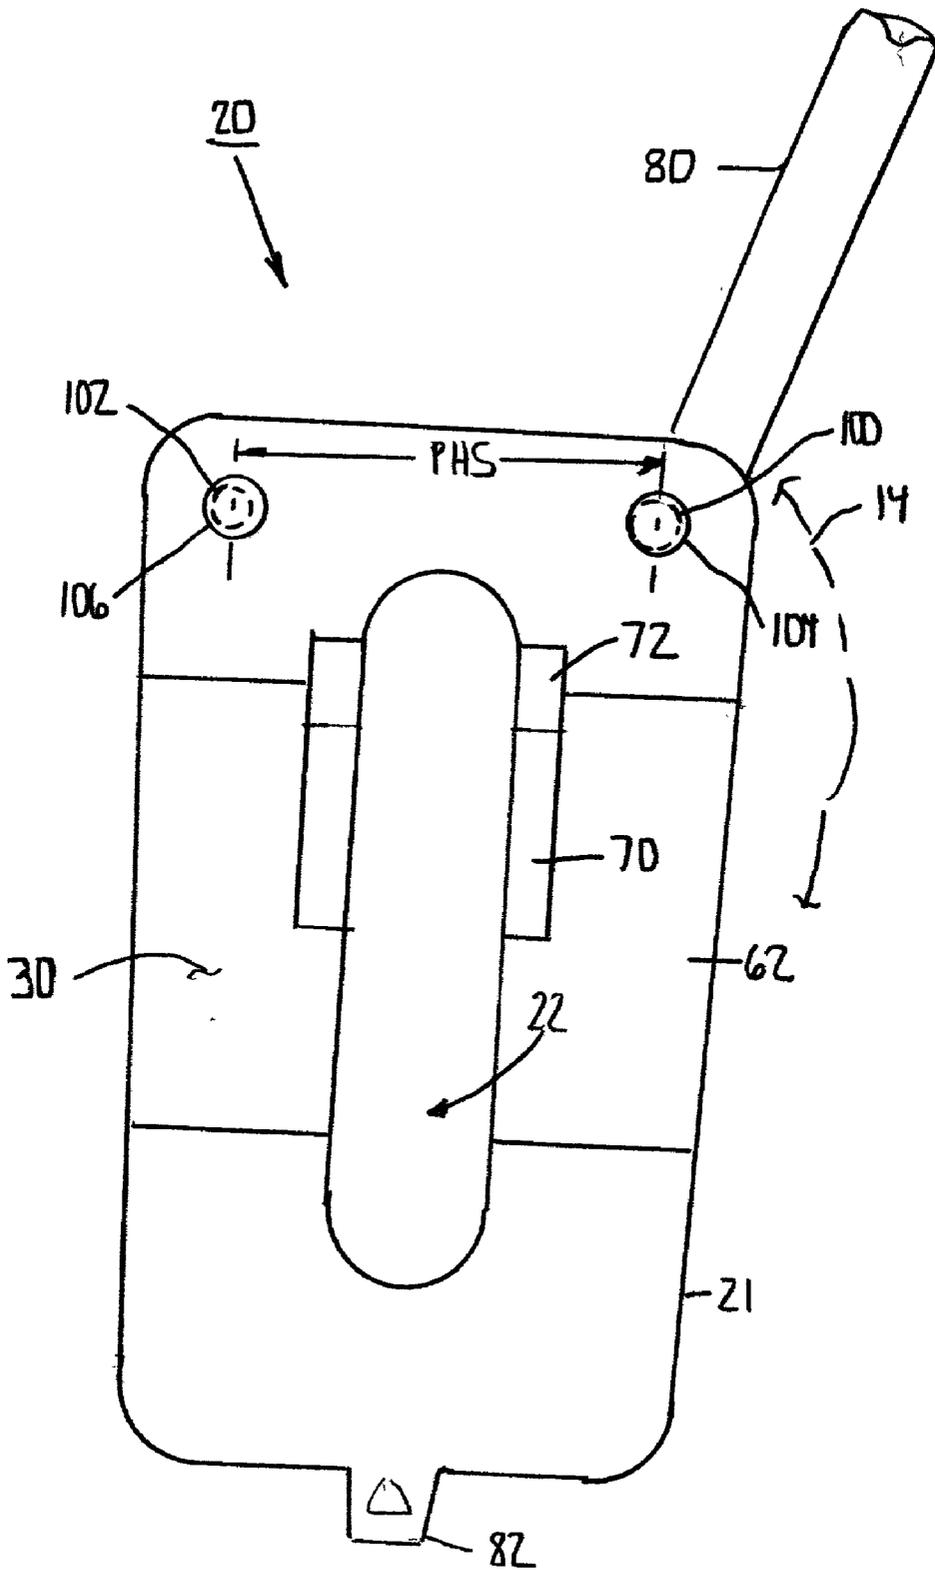


FIGURE 4

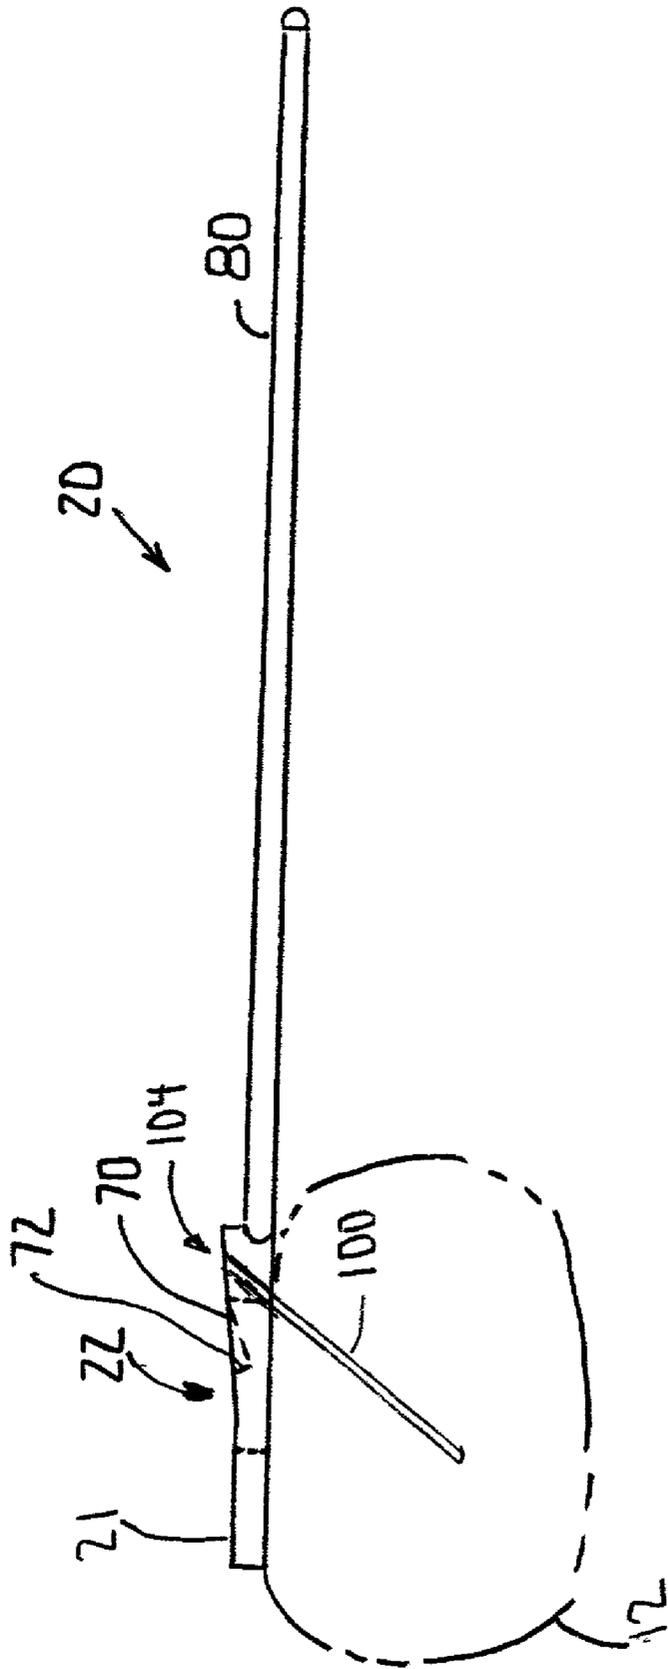


FIGURE 6

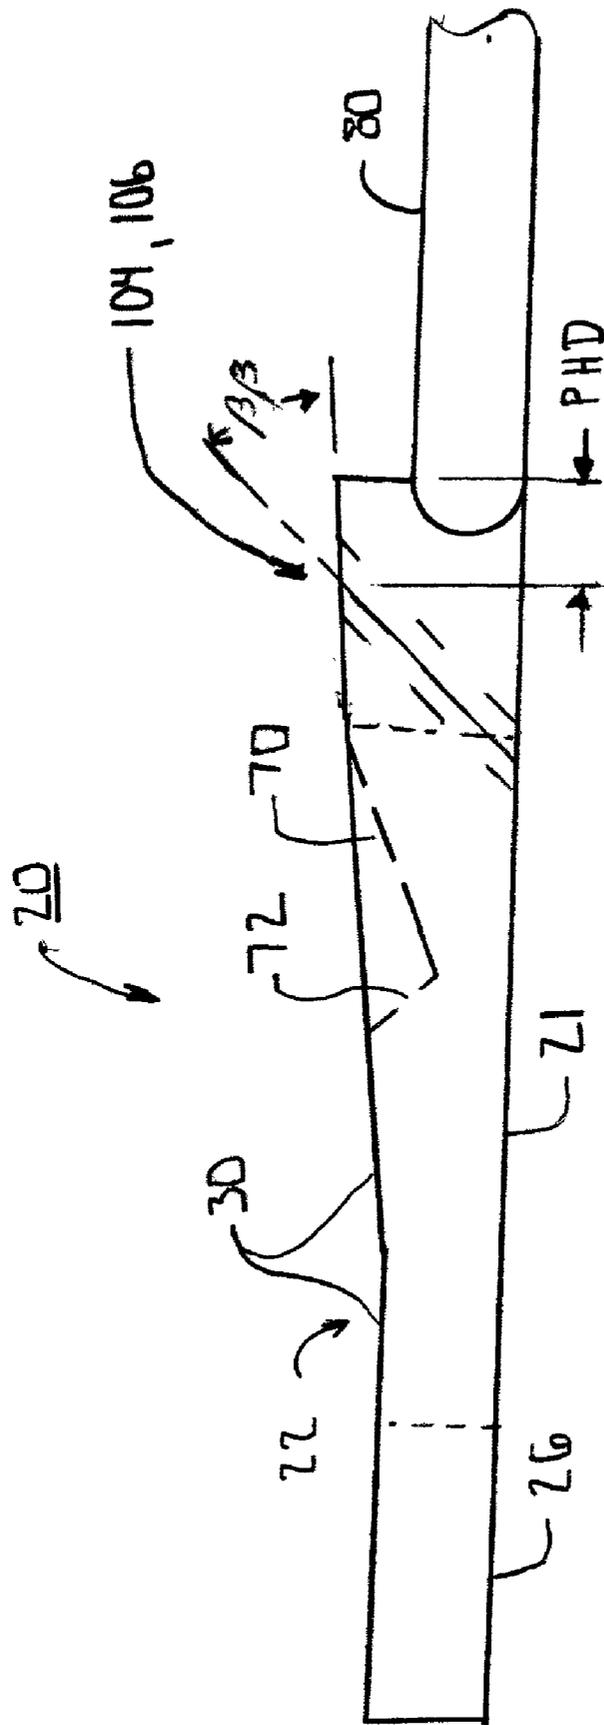


FIGURE 7

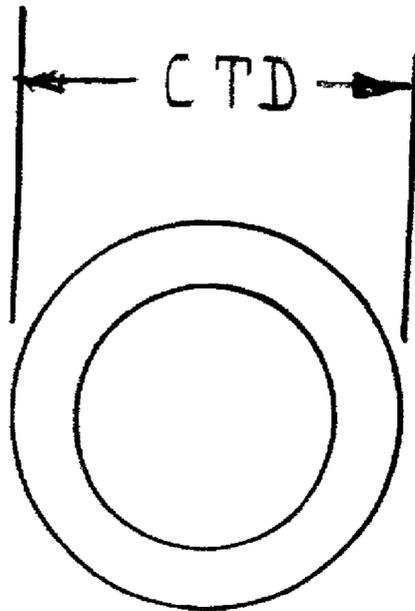


FIGURE 8

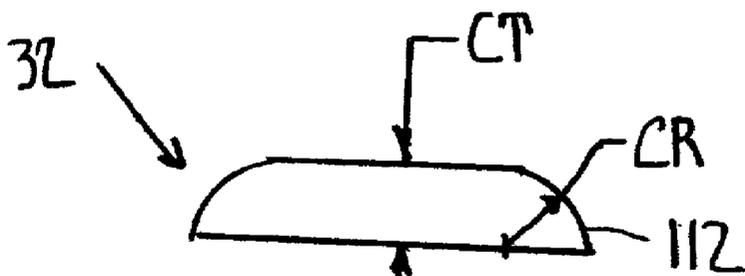


FIGURE 9

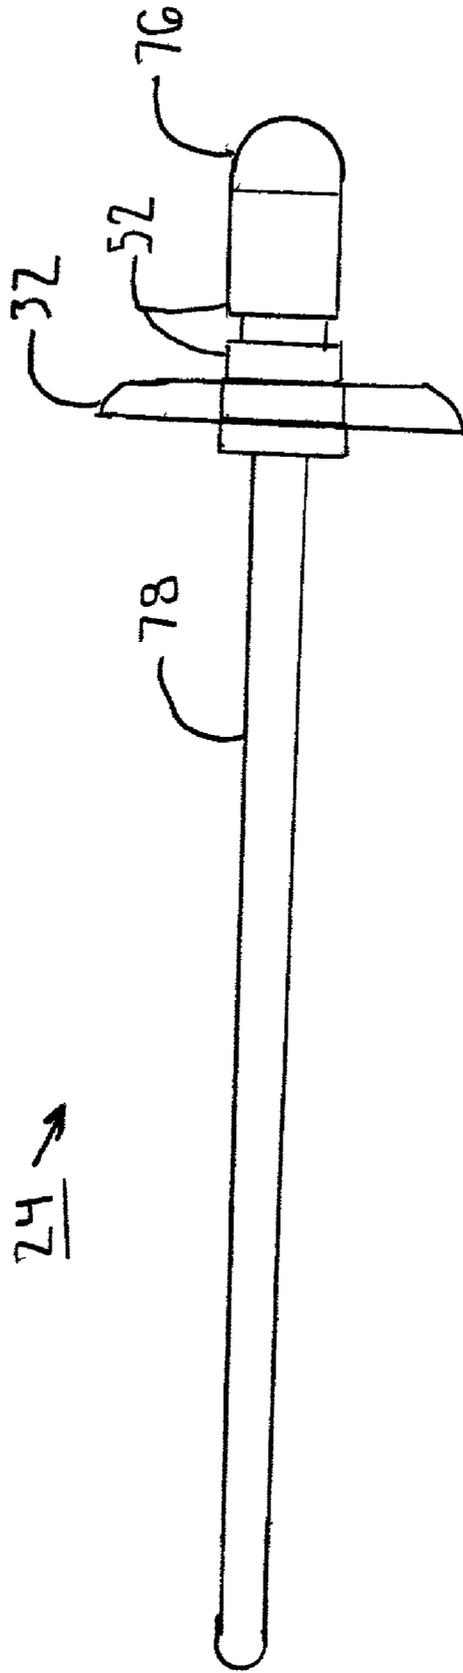


FIGURE 10

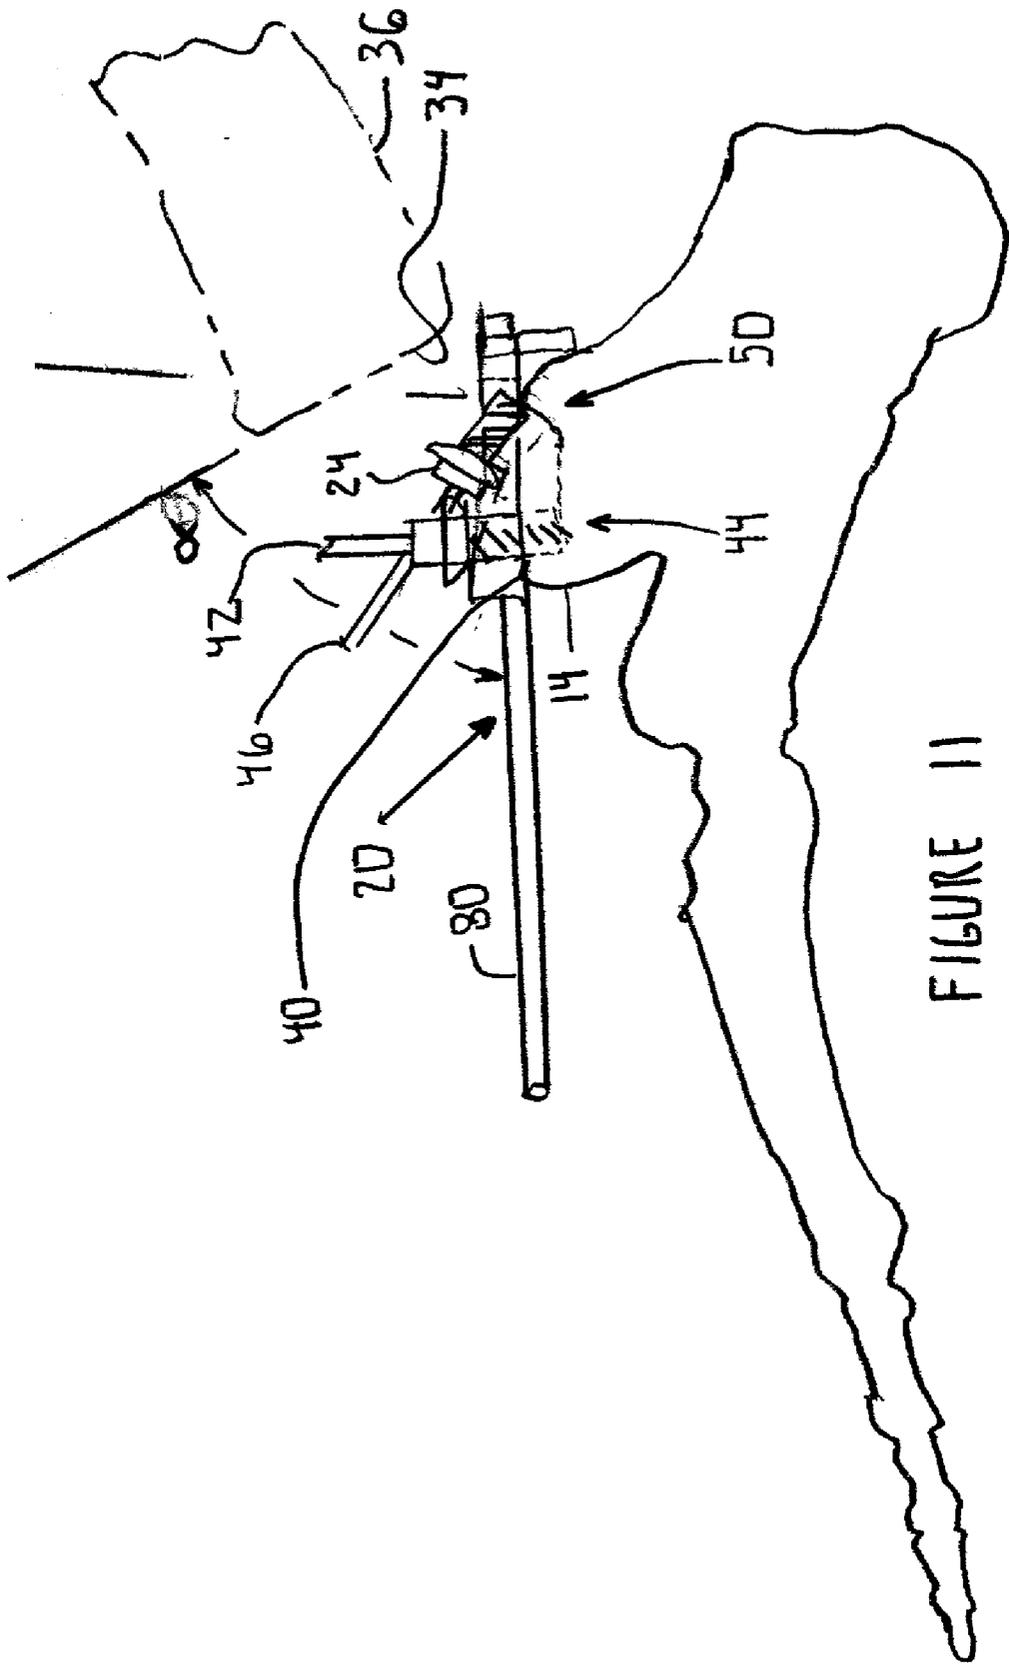


FIGURE 11

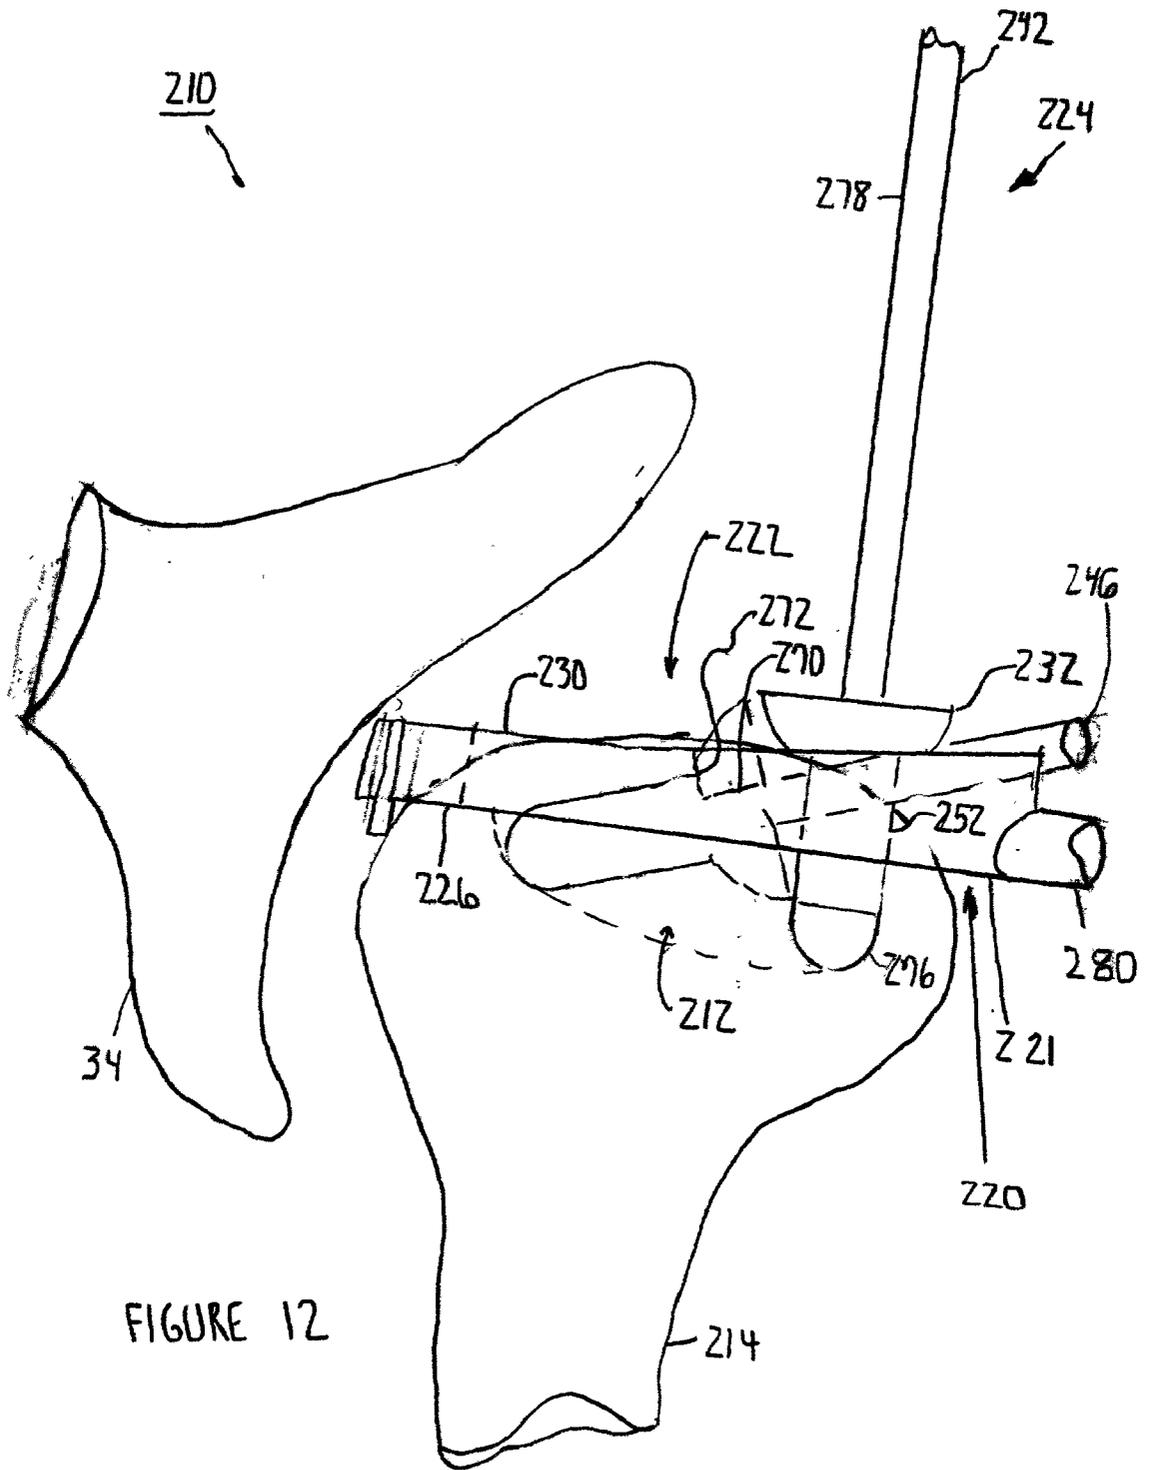


FIGURE 12

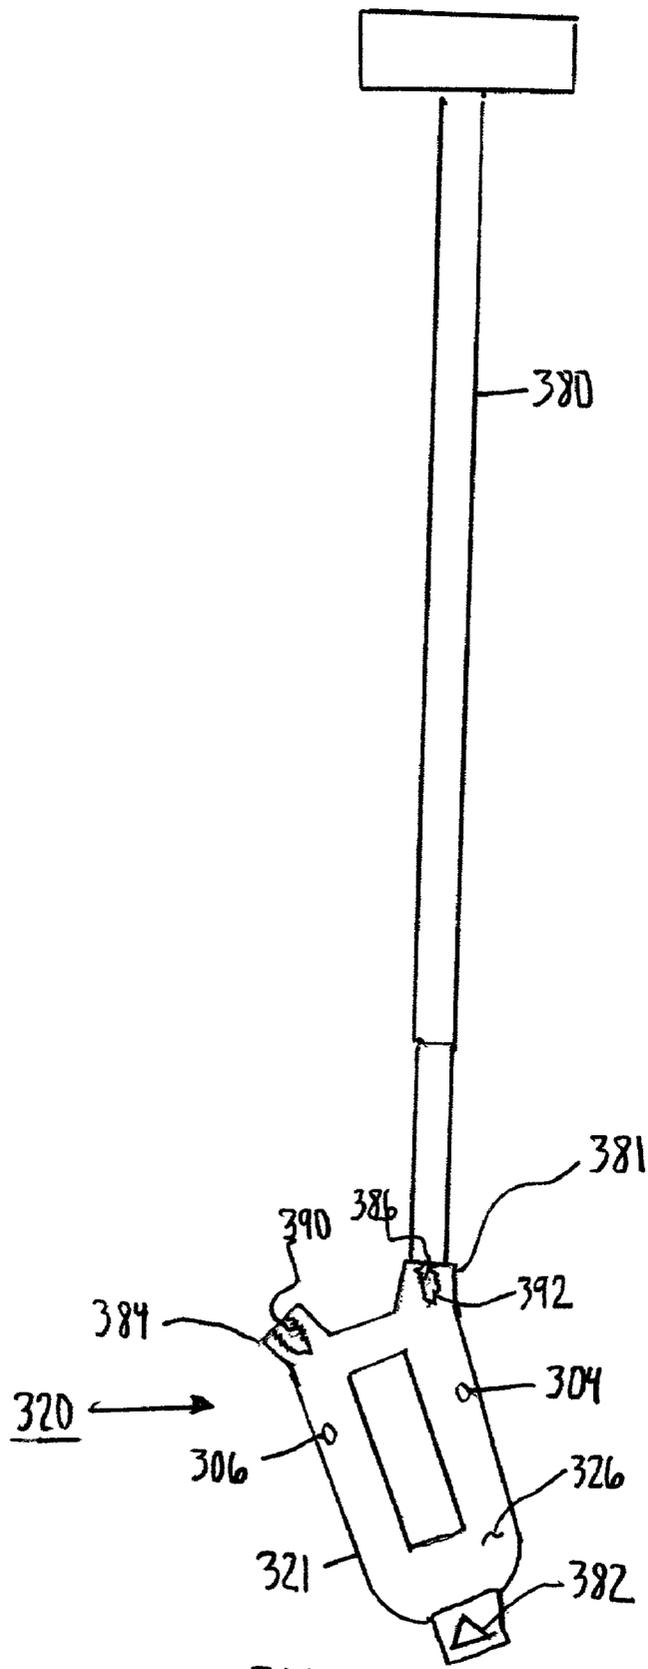


FIGURE 14

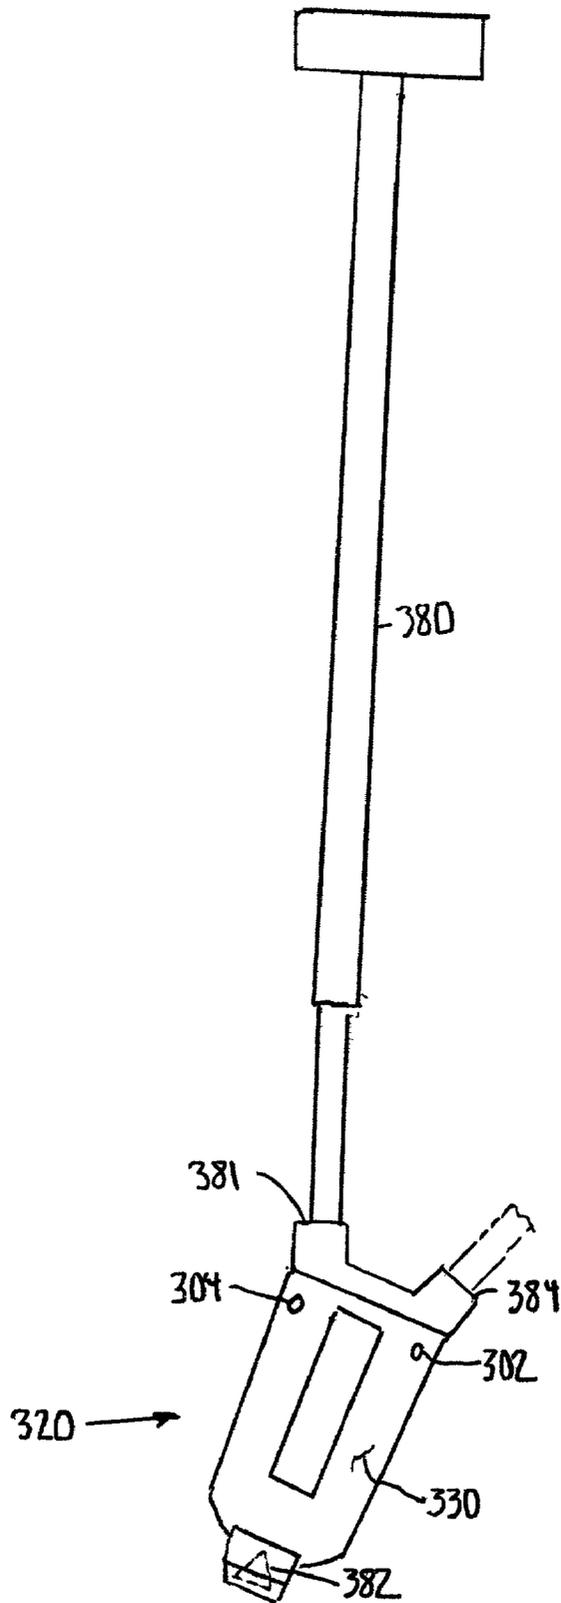
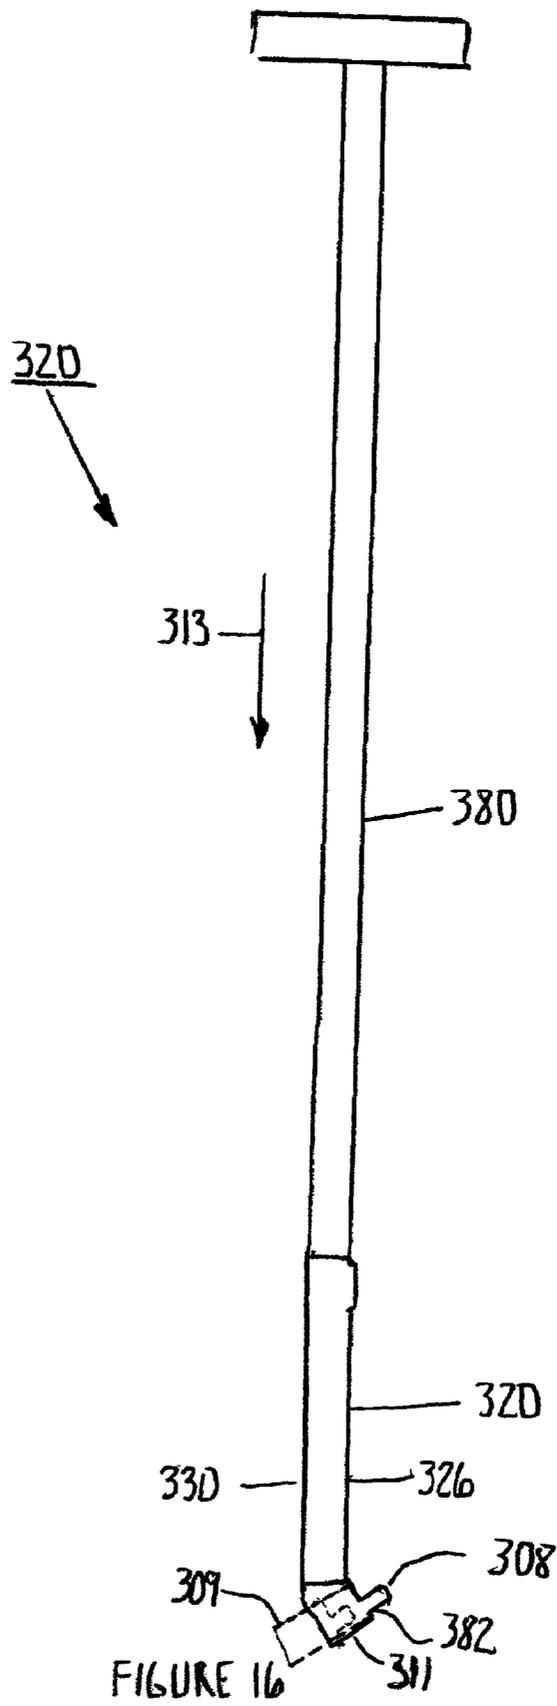


FIGURE 15



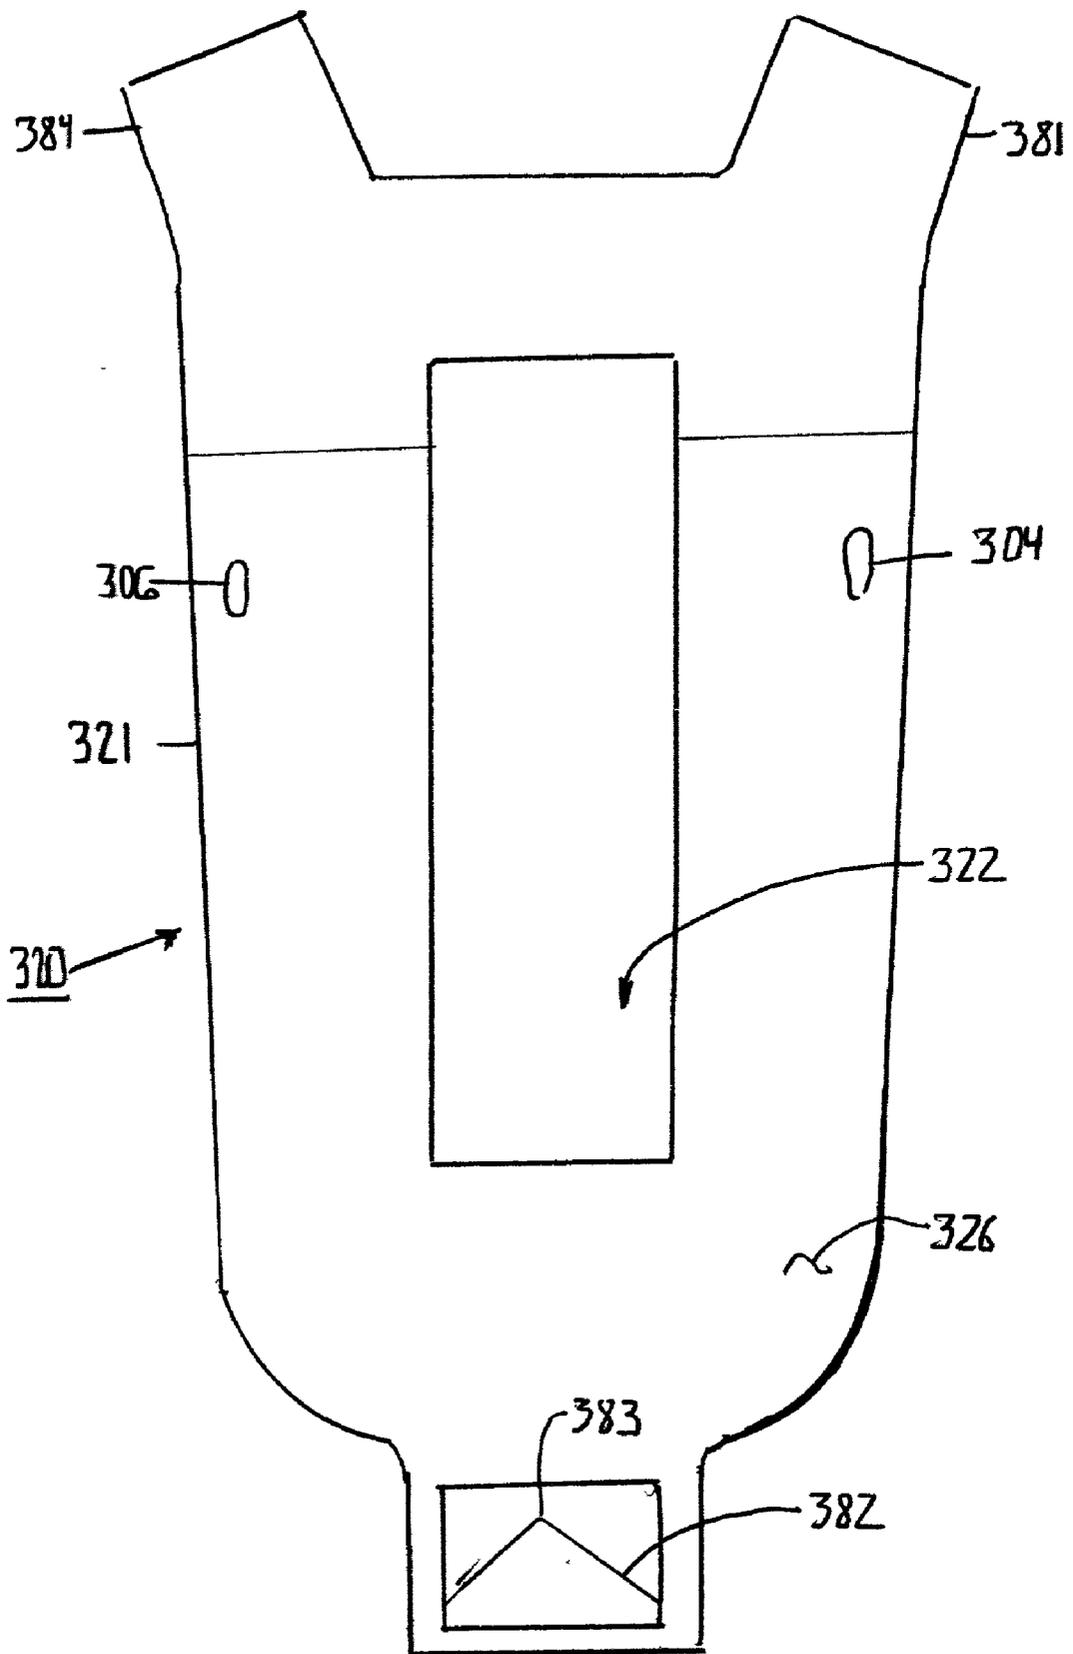


FIGURE 17

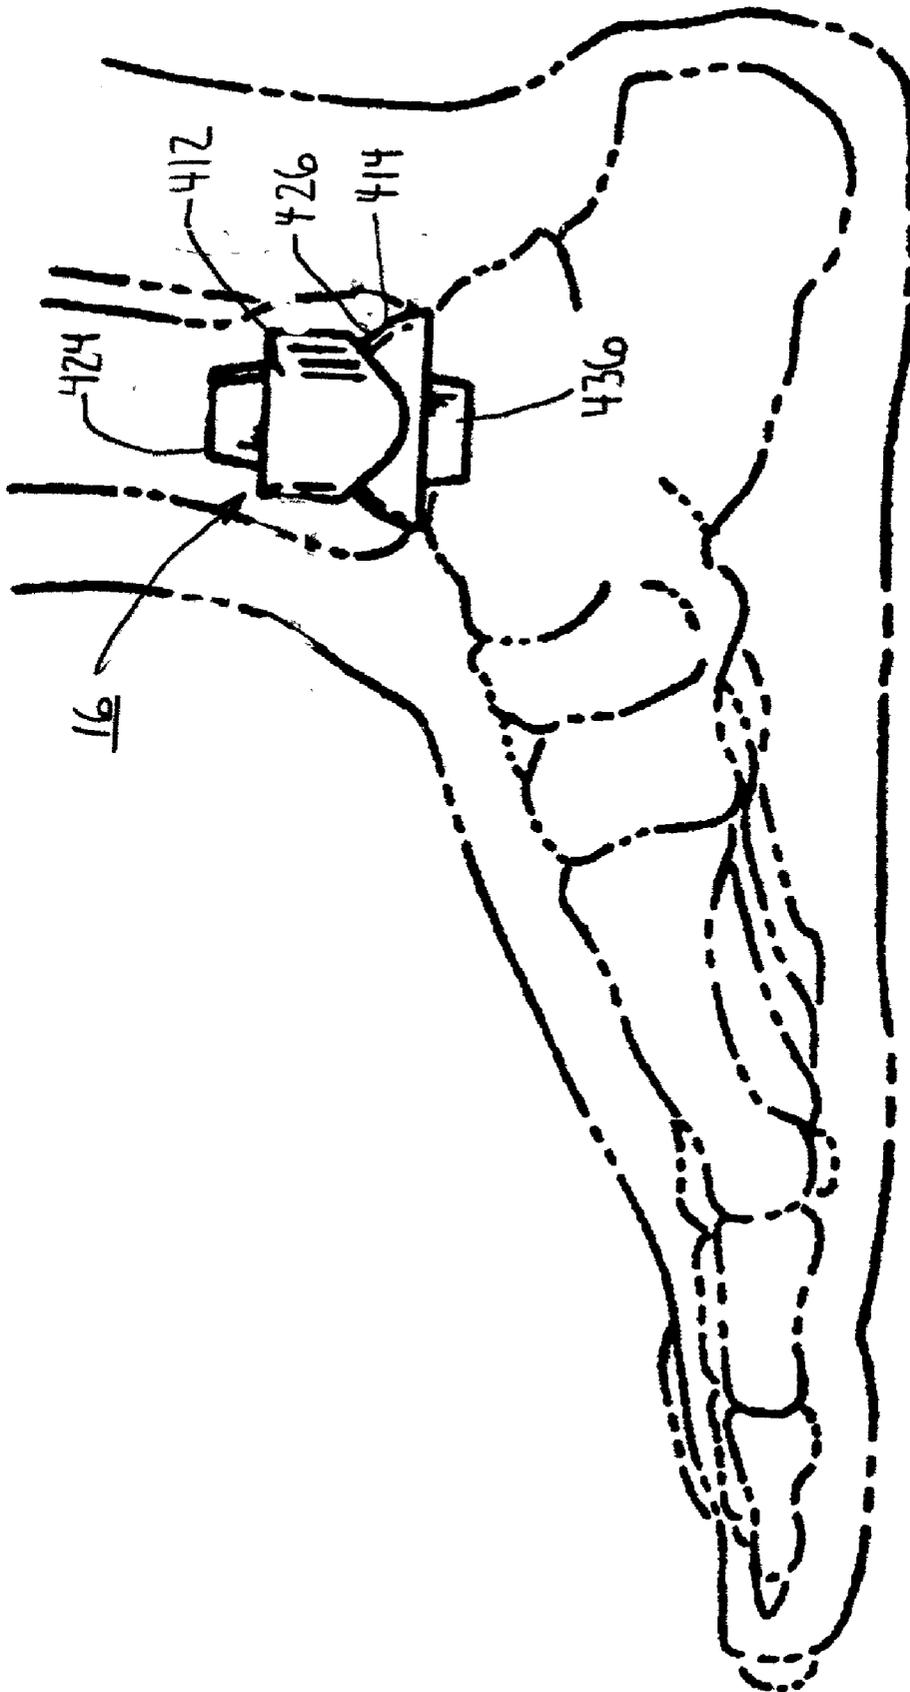


FIGURE 19

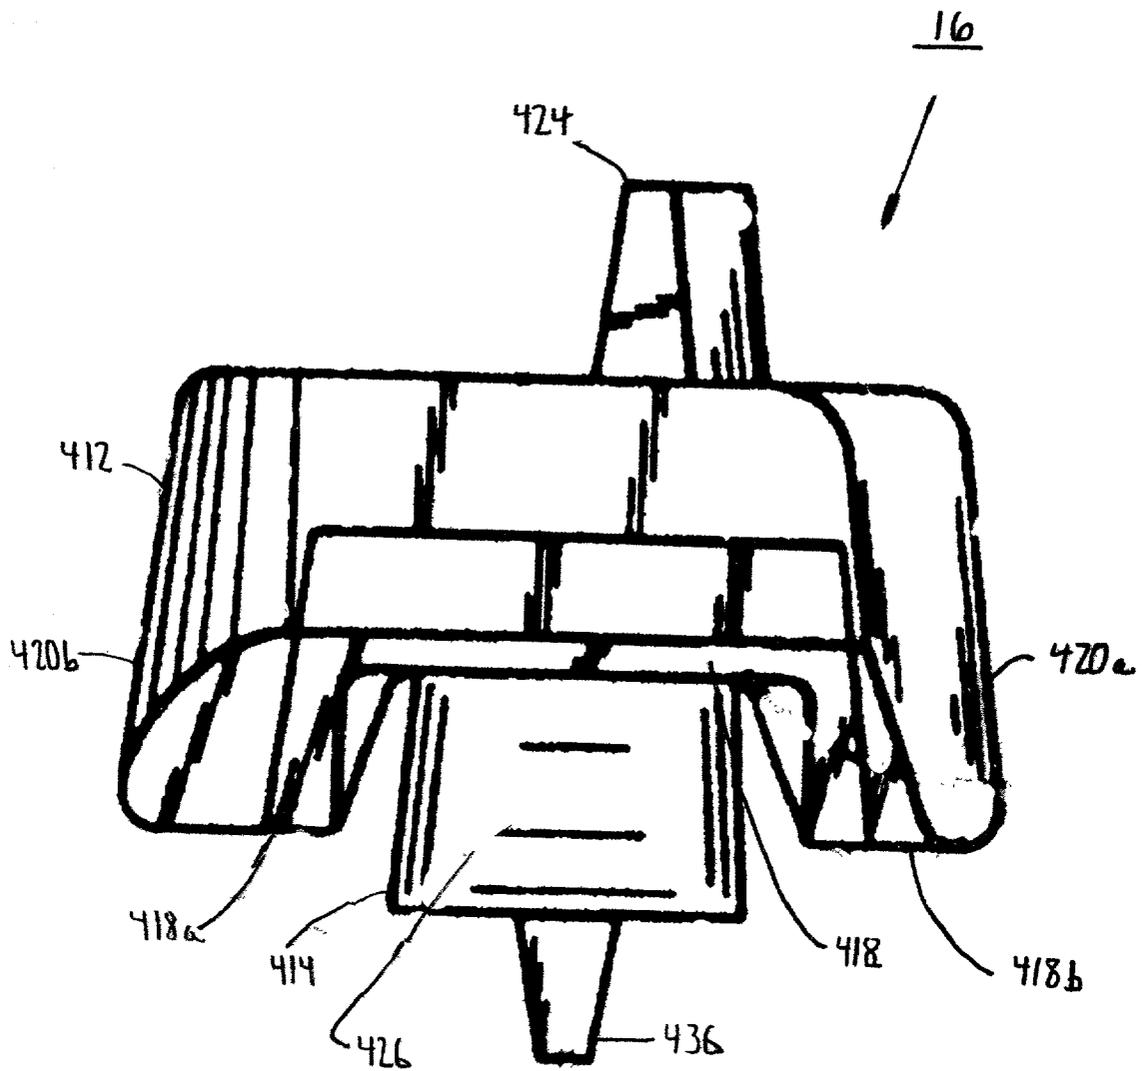


FIGURE 20

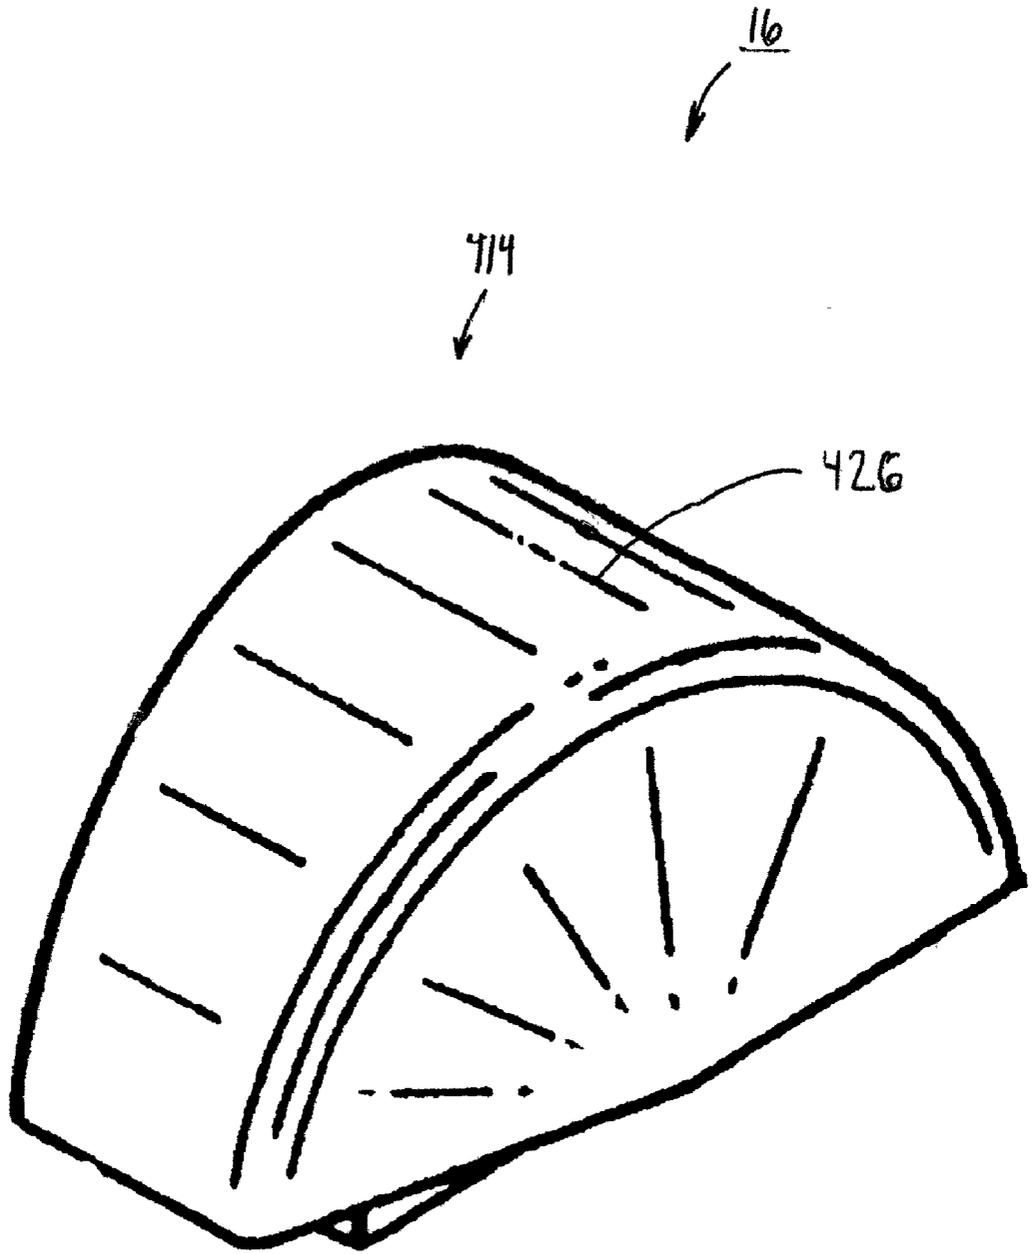


FIGURE 21

PROSTHESIS CAVITY CUTTING GUIDE, CUTTING TOOL AND METHOD

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] Cross reference is made to the following applications: DEP 624 entitled "PROSTHESIS REMOVAL CUTTING GUIDE, CUTTING TOOL AND METHOD" and DEP 704 entitled "PROSTHESIS CUTTING GUIDE, CUTTING TOOL AND METHOD" filed concurrently herewith which are incorporated herein by reference.

TECHNICAL FIELD OF THE INVENTION

[0002] The present invention relates generally to the field of orthopaedics, and more particularly, to an implant for use in arthroplasty.

BACKGROUND OF THE INVENTION

[0003] Prosthetic devices which are implanted for replacement of joints are well known. Such implants take the place of the bodies own joints which fail, such as may be required for patients suffering from rheumatism, degenerative or traumatic arthritis, including osteoarthritis. A number of problems are associated with joint replacement. The joint should function in a manner which simulates the natural joint, providing substantially the same degree of motion.

[0004] The ankle joint, or joint between the leg bones, tibia and fibula, and the talus, are frequently a source of osteo or rheumatoid arthritis. Typically, sufferers of rheumatoid and osteoarthritis at the ankle joint have been generally limited to a procedure called fusing. In a fusing procedure, the tibia, and typically the Talus, are fused or secured together with the palace to reduce the patient's pain and improve mobility. Clearly, the use of fusing does not provide the same degree of motion as a natural ankle joint.

[0005] For example, for ankle replacements, the joint should supply at least the same degree of motion as is required for walking. In addition, the joint should not occupy more space in the body than the natural joint. Problems arise in connection with the replacement joint to bone and tissue. The joint should also be easy to implant as possible so that intricate operations are not required, thus reducing the chance of complications. The joints must have sufficient strength and durability to withstand the weight and stresses which are applied.

[0006] Ankle joints pose additional problems due to the weight supported and range of motion required for walking. Attachment of the tibia, which extends substantially vertically is difficult, as portions of the fibula may also be removed for implants. Matching the pivot point of the joint is critical, as misalignment can lead to difficulty in walking and other motions, which may cause the patient considerable pain.

[0007] The durability of a replacement joint is also important, as the ankle experiences high stresses during walking, running, and jumping, as well as fatigue over time. These stresses may crack or fracture ankle components of replacement joints, which absorb a substantial amount of the pressures during the aforementioned activities.

[0008] A particularly successful ankle implant for use in total ankle arthroscopy is disclosed in U.S. Pat. No. 5,326,

365 to Alvine, and assigned to the same assignee as the instant application. U.S. Pat. No. 5,326,365 is hereby incorporated in its entirety by reference.

[0009] The total ankle implant, as disclosed in U.S. Pat. No. 5,326,365, is marketed by DePuy Orthopaedics, Inc. under the name Agility™ Ankle. The current surgical technique for the Agility™ Ankle and the associated instrument system for the Agility™ Ankle utilizes a reciprocating or oscillating saw and a freehand method for forming the talar component keel slot.

[0010] The utilization of a freehand method is very dependent upon surgeon skill and may provide for lack of accuracy and repeatability in the forming of the slot. For example, the slot may be too deep, too far posterior or too wide for the required geometry of the talar fin. The results of an inaccurate cut include disruption of the anterior and posterior cortex where sufficient bone support occurs. An inaccurate cut may result in the need for excess bone graft to fill the voids from the inaccurate cut. If the slot is cut too deep, talar fractures may occur over time based upon the type of activities of the patient.

[0011] It can be seen that an instrumentation system and surgical procedure is needed which is able to increase the precision, accuracy, and repeatability of forming the talar keel slot with the additional benefit of decreased operating room time for the surgeon.

SUMMARY OF THE INVENTION

[0012] The present invention is directed to an ankle joint surgical technique and related instrumentation for implanting an ankle joint during ankle replacement surgery. According to the present invention, a specifically designed burr with a round collar and full radius cutting end, may be provided.

[0013] Further, a specifically designed burr guide with a posterior hook may be designed to enable the user to locate all implant positional landmarks with respect to the posterior cortex.

[0014] Further, after the guide is positioned, the user can burr underneath the tibia by angling his hand and rotating the burr, thereby routing a specific talar implant keel profile track within the radius. This procedure is quick, easy and repeatable, and is done with great precision, plus it does not sacrifice the talar anterior cortex.

[0015] The current procedure utilizes a reciprocating saw which is difficult to do, is not repeatable and possibly removes too much bone and sacrifices the talus anterior cortex.

[0016] According to one embodiment of the present invention, a kit is provided for preparation of a bone cavity in a bone for implantation of a joint prosthesis. The kit includes a guide defining an opening therethrough. The guide is in cooperation with the prosthesis. The kit also includes a rotatable tool constrainable within the opening of said guide. The tool is adapted for removal of bone to form the bone cavity.

[0017] According to another embodiment of the present invention, a guide is provided for guiding a rotatable tool for use in bone preparation of a bone cavity for implantation of a joint prosthesis. The guide is adapted for cooperation with the prosthesis. The guide defines an opening through the

guide. The guide constrains the tool within the opening of the guide whereby the tool may be used for removal of bone to form the bone cavity.

[0018] According to yet another embodiment of the present invention, a burr tool is provided for use with a guide in joint arthroplasty. The burr tool includes a body, a cutting edge and a stem. A cutting edge extends from the body for cooperation with the guide to assist in positioning the tool with respect to the guide. The stem extends from the body.

[0019] According to a further embodiment of the present invention, a method for providing joint arthroplasty is provided, including the steps of resecting a portion of a bone with a tool to form a prosthetic mounting surface, placing a burr guide defining a through opening therein onto the mounting surface of the bone, traversing a rotatable burr tool having a collar longitudinally along the opening to form a slot in the mounting surface of the bone, and inserting a prosthetic component into the slot.

[0020] The technical advantage of the present invention includes a subsurface angled ramp and subsurface return arch which cradles and lets the burr rotate out of the burr guide. Another advantage of the present invention is the ability to utilize different burring angle positions to allow the user to burr under the tibia when the tibia and talar are at less than a 90° relative position.

[0021] In another aspect of an embodiment of the present invention, a flat bottom trough may be created with the burr and burring guide without the burr being perpendicular to the burring guide.

[0022] A further aspect of an embodiment of the present invention is that the anterior cortex of the talus may be preserved utilizing this surgical technique and related instrumentation. The technique leaves the cortices intact providing a sound bone construct for implant stability, and removes the chance of fracturing the anterior cortex.

[0023] Another aspect of an embodiment of the present invention is that accurate and repeatable keel slots may be provided without the same degree of experience and skill required for freehand reciprocating saw procedures.

[0024] Other technical advantages of the present invention will be readily apparent to one skilled in the art from the following figures, descriptions and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] For a more complete understanding of the present invention and the advantages thereof, reference is now made to the following description taken in connection with the accompanying drawings, in which:

[0026] FIG. 1 is a perspective view of a burr and guide in accordance with an embodiment of the present invention;

[0027] FIG. 2 is a partial plan view of the burr and guide of FIG. 1;

[0028] FIG. 3 is a top view of the burr guide of FIG. 1;

[0029] FIG. 4 is a partial top view of the burr guide of FIG. 1;

[0030] FIG. 5 is a partial perspective view of the burr guide of FIG. 1;

[0031] FIG. 6 is a plan view of the burr guide of FIG. 1;

[0032] FIG. 7 is a partial plan view of the burr guide of FIG. 1;

[0033] FIG. 8 is a top view of a collar for use with the burr and burr guide of FIG. 1;

[0034] FIG. 9 is a plan view of a collar for use with the burr and burr guide of FIG. 1;

[0035] FIG. 10 is a plan view of the burr guide of FIG. 1;

[0036] FIG. 11 is a plan view of the burr guide of FIG. 1 in position on a patient's foot;

[0037] FIG. 12 is a plan view of burr guide of FIG. 1 for use in partial knee arthroplasty with the guide in position on a patient's knee;

[0038] FIG. 13 is a partial perspective view of another embodiment of the kit, burr and burr guide of the present invention;

[0039] FIG. 14 is a bottom view of the burr guide of FIG. 13;

[0040] FIG. 15 is a top view of the burr guide of FIG. 13;

[0041] FIG. 16 is a plan view of the burr guide of FIG. 13;

[0042] FIG. 17 is a partial bottom view of the burr guide of FIG. 13;

[0043] FIG. 18 is a plan view of the burr guide of FIG. 13 in position on a patient's foot;

[0044] FIG. 19 is a side elevational view of an ankle joint which may be implanted utilizing either the burr guide of FIG. 1 or that of FIG. 13;

[0045] FIG. 20 is a rear elevational view of the ankle joint of FIG. 19; and

[0046] FIG. 21 is a perspective view of the talar member of the ankle joint of FIG. 19.

DETAILED DESCRIPTION OF THE INVENTION

[0047] Embodiments of the present invention and the advantages thereof are best understood by referring to the following descriptions and drawings, wherein like numerals are used for like and corresponding parts of the drawings.

[0048] According to the present invention and referring now to FIG. 1, an embodiment of the present invention is shown as kit 10. Kit 10 is utilized for preparation of bone cavity 12 for implementation of a joint prosthesis (see FIGS. 19-21). The kit 10 includes a guide 20 which defines an opening 22 through the guide 20. The kit 10 further includes a rotatable tool 24 adapted to be constrainable within the opening 22 of the guide 20. The tool 24 is adapted for removal of bone 14 to form the bone cavity 12.

[0049] The guide 20 may define a first surface 26 of the guide 20 for cooperation with the bone 14. The guide 20 may also include a second surface 30 which is spaced from and may be parallel to the first surface 26. The tool 24 may include a collar 32 for cooperation with the second surface 30 for assisting in positioning the tool 24.

[0050] The kit 10 can, according to the present invention, be utilized to prepare the bone cavity 12 when the room

between the talus 14 and tibia 34 is very limited. For example, and referring now to FIG. 11, the kit 10 is shown positioned between talus 14 and tibia 34.

[0051] As shown in FIG. 11, according to an aspect of the present invention, the bone cavity 12 may be prepared where bottom surface 36 of the tibia 34 and top surface 40 of talus 14 are separated by an acute angle α which is less than 90° . The space formed within the acute angle α provides for very limited access to top surface 40 of the talus 14 in order to prepare the bone cavity 12.

[0052] To permit the preparation of the bone cavity 12 within such confined space, according to an aspect of the present invention, the burr tool 24 or the burr guide 20 may be adapted to permit the burr tool 24 to be oriented in first direction or position 42 with respect to the burr guide 20 in a first portion 44 of the opening 22 and adapted to be oriented in a second direction or position 46 with respect to the burr guide 20 in a second portion 50 of the opening 22.

[0053] By providing the first position 42, as well as a second position 46 for the burr tool 24, the burr tool 24 may be utilized with an angle σ of less than 90° , thereby providing for greater access for the surgeon to the talus 14.

[0054] While the opening 22 of the burr guide 20 may have any suitable shape, preferably, and to cooperate with a circular burr tool 24, the opening 22 may have a generally oval shape. Referring again to FIGS. 1 and 11, the positioning of the burr tool 24, with respect to the burr guide 20, may be capable of being positioned in both first position 42 and second position 46 in a number of ways. For example, the opening 22 of the burr guide 20 may have a width BGW which is slightly larger than diameter BTD of burr tool body 52. With such a configuration, the burr tool 24 is free to move about along plane QQ in the direction of arrows 54 and 56. Further, with such a configuration, the burr tool 24 may be rotatable about plane QQ at a variety of angles σ .

[0055] The applicants have discovered that by varying the distance from first surface 26 to second surface 30, a desired shape of bone cavity 12 can be provided when confronted with a situation in which the burr tool 24 may need to be placed in positions such as first position 42 and second position 46 to accommodate the limited space between the tibia 34 and the talus 14.

[0056] For example, and as shown in FIG. 1, the second surface 30 may include a first portion 60 which is parallel with first surface 26 and a second portion 62 that is skewed from first surface 26. For example, the second portion 62 of second surface 30 may be placed at angle β with respect to first portion 60 of second surface 30. The angular orientation of the second portion 62 of the second surface 30 provides for a burr guide thickness T which may vary along the length of the burr guide 20. It can be readily apparent that by increasing the angle β , the thickness T may be increased further. Also, by varying the angle σ of the tool 24, while varying the angle β of surface 30, a bone cavity 12 may be provided with a large variety of shapes.

[0057] As shown in FIG. 1, the collar 32 on the burr tool 24 may be utilized to limit the motion of the tool 24 in the direction of arrow 64. The collar 32 may be utilized to stop the burr tool 24 against second surface 30 or, as shown in FIG. 1, the opening 22 may include a recess portion 66 which has a width LBGW which is wider than the width

BGW of the remainder of the opening 22. The width LBGW of the recess 66 may in fact be wider, as shown in FIG. 1, than diameter CTB of the collar 32. The collar 32 thus may move below second surface 30 and seat against subsurface ramp 70. The subsurface ramp 70 may have an angle π and permits the burr tool 24 to move in the direction of arrow 64 further than it would had the collar 32 been stopped by second surface 30. Further, and as shown in FIG. 1, the recess 66 may include a return ramp 72 with a return angle of δ .

[0058] While the burr tool 24 may have any suitable shape for rotatively removing material from the talus 14, as shown in FIG. 1, the burr tool 24 may include body 52. The collar 32 extends outwardly along axis 74. Extending diagonally/downwardly from the body 52 along axis 74 is a cutter 76. The cutter 76 may have any suitable shape and may, for example, as shown in FIG. 1, be generally spherical defined by radius R. Extending upwardly from the collar 32 along axis 74 is shaft 78. The shaft 78 may be suitable to secure the burr tool 24 to a power source (not shown).

[0059] As shown in FIG. 1, the burr guide 20 may further include a handle 80 extending outwardly from the burr guide 20. The burr guide 20 may also include a positioning feature 82 for cooperation with the talus 14 to properly locate the burr guide 20 with respect to the talus 14. For example, and as shown in FIG. 1, the positioning feature 82 may be in the form of a posterior hook. The posterior hook cooperates with talus posterior cortex 84 of the talus 14.

[0060] As shown in FIG. 1, the posterior hook 82 may be retractable and have, for example, a first position 86 which is extended to provide contact between the hook 82 and the talus 14 and a second position 90 as shown in phantom to assist in removal of the burr guide 20 from the talus 14.

[0061] Referring now to FIG. 2, the burr tool 24 is shown with the collar 32 in contact with subsurface ramp 70. As the collar 32 contacts subsurface ramp 70, the cutting surface 76 of the burr tool 24 contacts the talus 14 to form bone cavity 12. As the collar 32 moves first along subsurface ramp 70 and then return ramp 72, the cutting surface 76 moves along the talus 14 forming bone cavity profile 92.

[0062] As shown in FIG. 2, the positioning feature or posterior hook 82 may include a protrusion 94 extending from the hook 82 and engaging the talus posterior cortex 84. The bone cavity profile 92 preferably conforms to keel 96 of joint prosthesis 16 (see FIGS. 19, 20, and 21).

[0063] Referring now to FIG. 3, the burr guide 20 is shown in position on talus 14 of foot 98. The burr guide 20, as shown in FIG. 3, is for use with left foot 98. A separate burr guide (not shown) may be utilized for right foot (not shown) and may include a handle 99 as shown in phantom.

[0064] Referring now to FIG. 4, body 21 of the burr guide 20 is shown in greater detail. The body 21 defines the opening 22 through the body 21. To secure the body 21 against the talus 14, the burr guide 20 may include in addition to hook 82, right and left pins 100 and 102, respectively. The pins 100 and 102 are fitted into right and left pinholes 104 and 106, respectively. The pins 100 and 102 may be self-drilling and tapping pins which are secured to talus 14.

[0065] Referring now to FIG. 5, the body 21 of the burr guide 20 is shown in further detail. Referring to FIG. 5, the

subsurface ramp **70** and the return ramp **72** are shown recessed from ankle guide top surface **30**. The subsurface ramp **70** and return ramp **72** extend outwardly from opening **22** of the body **21**.

[0066] Referring now to **FIG. 6**, the burr guide **20** is shown with right pin **100** inserted in right pin hole **104**. The pins **100** and **102** serve to provide additional stability and support for the burr guide **20** during the forming of the bone cavity **12**.

[0067] Referring now to **FIG. 7**, the pinholes **104** and **106** are shown in greater detail in body **21**. The pinholes **104** and **106** may be spaced in any unique orientation and spacing suitable to assist in the supporting of the burr guide onto the talus. For example, and as shown in **FIGS. 4 and 7**, the pin holes **104** and **106** may have an angle $\beta\beta$ with respect to top surface **30** of, for example, $\beta\beta$ of approximately 45° and may be spaced a distance PHD of, for example, 0.2 inches from handle end **110** of the body **121**. The pinholes **104** and **106** may be spaced apart a distance PDS of, for example, one (1) inch (see **FIG. 4**).

[0068] Referring now to **FIGS. 8 and 9**, the collar **32** is shown in greater detail. The collar **32** may be generally circular and have a collar diameter CDT of, for example, one-half ($\frac{1}{2}$) inch. The collar may have a collar thickness CT of, for example, 0.2 inches and a collar radius CR of, for example, 0.2 inches. The collar **32** preferably has an arcuate periphery **112** for cooperation subsurface ramp **70** and return ramp **72** (see **FIG. 4**).

[0069] Referring generally to **FIGS. 1 through 9**, the burr guide **20** may be made of any suitable, durable material. For example, the burr guide **20** may be made of a metal, for example, a metal which may be sterilized and reutilized in an operating room procedure. For example, the burr guide **20** may be made of cobalt chrome steel, titanium or stainless steel.

[0070] The handle **80** may be integral with the body **21** or, for ease of manufacturing and minimizing of cost, the handle **80** may be made of a separate component from the body **21** and either pressed-fit or welded together. Alternatively, the handle **80** may have threadable engagement with the body **21**.

[0071] Referring now to **FIG. 10**, burr tool **24** is shown in greater detail. The burr tool **24** may include body **52** from which collar **32** extends. Extending beyond collar **32** is shank **78**. Extending from the opposite end of body **52** is cutter **76**. The burr tool **24** may be made of any suitable, durable material and may, for example, be made of stainless steel or cobalt chrome steel. The cutter **76** may be integral to the burr tool body or may be a separate component secured to the body by, for example, braising or welding.

[0072] While the kit **10**, including the burr guide **20** and the burr tool **24**, as shown in **FIGS. 1 through 11**, is designed and suitable for preparation for the keel of a total ankle prosthesis; it should be appreciated that the kit of the present invention, as well as the burr guide and the burr tool of the present invention, may be utilized to prepare a cavity for installation of a prosthesis at other joints of the human body. One particular wellsuited joint for use in this invention is the preparation of a unicondyle knee, femoral or tibial component.

[0073] For example, and as shown in **FIG. 12**, kit **210** may be utilized to prepare cavity **212** in femur **214**. Kit **210** may be similar to kit **10** of **FIGS. 1 through 11** but may be adapted to form the cavity **212** for the femur **214**. Like kit **10** of **FIGS. 1 through 11**, kit **210** of **FIG. 12** permits the forming of cavity **212** where the bones in this case, tibia **34** and femur **214**, provide for only limited access to the cavity **212**.

[0074] The kit **210** includes a burr tool **224** similar to the burr tool **24** of the kit **10** of **FIGS. 1 through 11**, as well as burr guide **220**, which is similar to burr guide **20** of the kit **10** of **FIGS. 1 through 11**.

[0075] The burr guide **220** includes a body **221** from which handle **280** extends. The body **221** defines opening **222** there through. The burr tool **224** matingly fits within opening **222**. The burr guide **220** includes a first surface **226** which is in contact with the femur **214** as well as an angled top surface **230** into which are formed subsurface ramp **270** and return ramp **272**. The burr tool **224** includes a first position **242** and a second position **246** which is skewed and spaced from the first position **242**. The burr tool **224** is permitted to move from first position **242** through second position **246** to form the cavity **212** in the femur **214**.

[0076] The burr tool **224**, similar to the burr tool **24** of the kit **10** of **FIGS. 1 through 11**, includes body **221**. A cutting tip **276** extends outwardly from the body **221**. Also extending from body **221** is a rounded collar **232**. A shank **278** extends outwardly from rounded collar **232**. While the kit **210**, as shown in **FIG. 12**, is shown for use in preparing one of two uni-condyle cavities **212**, it should be appreciated that the kit **210** may equally work to form the other cavity for the preparation of a medial condyle as well as for a lateral condyle. Further, it should be appreciated that the kit **210** or a similar kit, may be utilized to prepare cavities for uni-condyle knee portions for the tibia **34** as well.

[0077] Referring now to **FIGS. 13 through 18**, kit **310** is shown for preparing a bone cavity **376** for talus **314**. Kit **310** is similar to kit **10** of **FIGS. 1 through 11** except that kit **310** includes burr tool guide **320** and burr tool **324** adapted such that the axis **374** of the burr tool **324**, when utilized with the burr tool guide **320**, provides for the burr tool **324** to move first along axis **374** until the burr tool **324** is fully seated against the burr tool guide **320** and then to move along an axis parallel to the axis **374** and to then be removed from the burr tool guide along axis **374**. The kit **310** provides for a simpler burr tool guide **320** where there is ample room for the introduction of the burr tool **324** between the talus **314** and the tibia.

[0078] Referring to **FIG. 13**, the burr tool **324** includes a body **352** and a cutting tip **376** which extends from the body **352**. A collar **332** extends from the body **352** in a direction opposed to the cutting tip **376**. A shank **378** extends outwardly from collar **332**.

[0079] The burr tool guide **320** includes a body **321** which defines an opening or slot **322**. To provide for a well defined bone cavity **312**, the body **352** of the burr tool **324** may have a cylindrical shape with a diameter DD which is slightly smaller and may even be matingly fitted with width WW of the slot opening **322** of the body **321** of the burr tool guide **320**.

[0080] As shown in **FIG. 13**, bottom surface **326** and top surface **330** of the body **352** of the burr tool guide **320**,

unlike the burr tool guide **20** of **FIGS. 1 through 11**, are each planar and they are parallel to each other. The burr tool guide **320**, similar to the burr tool guide **20** of **FIGS. 1 through 11**, includes a posterior hook **382**. Posterior hook **382** of the burr tool guide **320** is similar to the hook **82** of the guide **20** and matingly contacts cortex **384** of the talus **314**. To avoid the need for both right-hand and left-hand burr tool guides, the burr tool guide **320** of **FIG. 13** may include a first handle position **38** and a second handle position **384** extending from the body **352** of the burr tool guide **320**. The first and second handle position **382** and **384** may include internal threads **386** and **390** which mate with external threads **392** on burr tool guide handle **380**.

[0081] Referring now to **FIG. 14**, the burr tool guide **320** is shown in greater detail. The burr tool guide **320** includes body **321** as well as burr tool guide handle **380**. The burr tool guide **320** includes posterior hook **382** which extends outwardly from bottom surface **326** of the burr tool guide **320**. The burr tool guide **320** preferably includes pinholes **304** and **306** for cooperation with pins (not shown) for securing the burr tool guide **320** to the talus **314**.

[0082] Referring now to **FIG. 15**, the burr tool guide **320** is shown with top surface **330** exposed. Referring to **FIG. 15**, the handle **380** is shown in solid in first handle position **381** and in phantom in second handle position **384**.

[0083] Referring now to **FIG. 16**, the burr tool guide **320** is shown with the posterior hook **382** in a first position **308** as shown in solid, and in a second retracted position **309** as shown in phantom. By providing the hook **382** which may be slidably fit within hook body **311**, the burr tool guide may be more easily slid into position along the direction of arrows **313** when the hook **382** is in the retracted second position **309** as shown in phantom.

[0084] Referring now to **FIG. 17**, the body **321** of the burr tool guide **320** is shown in greater detail. The posterior hook **382** is shown in greater detail. The posterior hook **382** may, for example as shown in **FIG. 17**, have a generally v-shape with an outer point or protrusion **383** which provides for secure penetration into the talus **314**.

[0085] Referring now to **FIG. 18**, the burr tool guide **320** is shown in position against the talus **314** of foot **389**. The burr tool **324** is utilized to form bone cavity **312**. The burr tool **324** is shown in solid in first position **393** and in phantom in second position **395**. The burr tool **392** moves within the opening **322** of the burr tool guide moving first in direction of arrow **397** until the burr tool **324** is into first position as shown in solid **393**. The burr tool **324** then moves in the direction of arrow **398** until the burr tool **324** is in second position **395** as shown in phantom. The burr tool **324** then moves in direction of arrow **399** until it is separated from the burr tool guide **322**. Thus, the burr tool **324** forms the bone cavity **312**.

[0086] Referring now to **FIGS. 19 through 21**, joint prosthesis **16** is shown in greater detail. While it should be appreciated that the kit, burr tool and burr tool guide of the present invention may be utilized to provide a bone cavity for any total arthroplasty joint, it should be appreciated that the invention is well suited to provide for ankle joint prosthesis **16**. Joint prosthesis **16** is more fully described in U.S. Pat. No. 5,326,365 to Alvine incorporated herein in its entirety by reference.

[0087] Referring to **FIGS. 19 through 21**, the implantable ankle device **16** is shown. The joint prosthesis **16** is configured for replacement surgery wherein the patient's ankle is replaced. The ankle device **16** has a tibial member **416** and a talar member **414** which interacts to provide flexion and tension similar to that of a normal ankle. The implanted ankle **16** has a compact shape which requires minimum removal of the patient's bone and tissue.

[0088] Referring to **FIG. 20**, tapering dome portion **426** of the talar member **414** fits in a complimentary manner with tibial bearing **418**. The concave surface of the tibial bearing **418** fits against the dome portion **426**. Side portions **418a** and **418b** of the tibia bearing proximate the positioning walls **420a** & **420b** and gate the sides of the dome portion **426**. The dome portion **426** slides and pivots relative to the tibial bearing **418**.

[0089] Referring now to **FIG. 21**, the dome portion **426** widens slightly from the anterior to posterior. The distance between the side portions **418a** and **418b** also widen in a similar manner, which keeps the members **412** and **414** aligned, but also provides clearance between sides of the dome portion **426** and the side portions **418a** and **418b** to allow turning of the joint to either side while restricting the lateral rotation with any range comparable to that of a natural ankle joint. A strut **424** extends upwardly from the tibial base plate **22** opposite the tibial bearing **18**.

[0090] The strut **424** is secured to the tibia.

[0091] A talar strut **436** extends downward into the talus to keep talar member **414** properly aligned when implanted.

[0092] By providing a burr tool with rounded shoulder stop collar, a profile may be obtained with a continually angularly rotating position of the burr tool during the cut.

[0093] By providing a burr tool guide with an outer-profile shape like the implant, an accurate repeatable and simple cut can be performed on the bone.

[0094] By providing a hook on the bone, as well as locating holes, an accurate position of the guide may be provided.

[0095] By providing subsurface angular burr ramp, as well as a subsurface return arch, the burr tool may be cradled and the burr tool may be permitted to come in and rotate out with any burr tool in a variety of angular positions to permit the removal of the bone cavity in areas in which the access to the joint is limited.

[0096] By providing different burring angular positions, a burr tool may be utilized under or between adjoining bones of a joint.

[0097] By providing subsurface angles and returns arches, a flat-bottomed trough may be provided without the burr being perpendicular during the cut.

[0098] By providing a burr guide to limit the removal of material from the talus, the anterior cortex of the talus may be maintained. By providing the cortex's intact, a sound bone construct can be provided for implant stability and the removal of the chances of fracturing the anterior cortex.

[0099] By replacing a free-handed reciprocal saw procedure with a rotating burr tool, confined within a burr tool guide, the quality and consistency of the bone cavity may be optimized.

[0100] Although the present invention and its advantages have been described in detail, it should be understood that various changes, substitutions, and alterations can be made therein without departing from the spirit and scope of the present invention as defined by the appended claims.

What is claimed:

1. A kit for preparation of a bone cavity in a bone for implantation of a joint prosthesis, said kit comprising:

a guide defining an opening therethrough, said guide being in cooperation with the prosthesis; and

a rotatable tool constrainable within the opening of said guide, said tool adapted for removal of bone to form the bone cavity.

2. The kit of claim 1:

wherein said guide defines a first surface thereof for cooperation with the bone and a second surface thereof, said second surface spaced from and parallel to said first surface; and

wherein said tool comprises a collar for cooperation with said second surface for assisting in positioning said tool.

3. The kit of claim 1, wherein at least one of said tool and said guide is adapted to permit said tool to be oriented in a first direction with respect to said guide in a first portion of said opening and to be oriented in a second direction with respect to said guide in a second portion of said opening.

4. The kit of claim 1, wherein the opening has a generally oval shape.

5. The kit of claim 1:

wherein said guide defines a first surface thereof for cooperation with the bone and a second surface thereof, said second surface spaced from and skewed with respect to said first surface; and

wherein said tool comprises a collar for cooperation with said second surface for assisting in positioning said tool.

6. The kit of claim 5:

further comprising a third surface spaced between said first surface and said second surface and skewed with respect to said first surface and said second surface; and wherein said collar cooperates with said second surface to assist in positioning said tool.

7. The kit of claim 1, wherein said tool further comprises a generally spherical cutting tip.

8. The kit of claim 1, wherein said guide further comprises a handle.

9. The kit of claim 1, wherein said guide further comprises a positioning feature for cooperation with the bone.

10. The kit of claim 9:

wherein the positioning feature comprises a posterior hook; and

wherein the bone comprises the talus posterior cortex.

11. The kit of claim 9, wherein the hook of said guide has a first position extending from the guide for cooperation with the talus posterior cortex and a second position retracted into said guide to prevent cooperation with the talus posterior cortex.

12. A guide for guiding a rotatable tool for use in bone preparation of a bone cavity for implantation of a joint

prosthesis, said guide adapted for cooperation with the prosthesis, said guide defining an opening therethrough, said guide adapted to constrain the tool within the opening of said guide, whereby the tool may be used for removal of bone to form the bone cavity.

13. The guide of claim 12:

wherein said guide defines a first surface thereof for cooperation with the bone and a second surface thereof, said second surface spaced from and parallel to said first surface; and

wherein said tool comprises a collar for cooperation with said second surface for assisting in positioning said tool.

14. The guide of claim 12 wherein said guide defines an opening therethrough, the opening adapted to constrain the tool therein.

15. The guide of claim 14, wherein said guide is adapted to permit the tool to be oriented in a first direction with respect to said guide in a first portion of said opening and to be oriented in a second direction with respect to said guide in a second portion of said opening.

16. The guide of claim 14, wherein the opening has a generally oval shape.

17. The guide of claim 12:

wherein said guide defines a first surface thereof for cooperation with the bone and a second surface thereof, said second surface spaced from and skewed with respect to said first surface.

18. The guide of claim 17:

further comprising a third surface spaced between said first surface and said second surface and skewed with respect to said first surface and said second surface.

19. The guide of claim 12, wherein said guide further comprises a handle.

20. The guide of claim 12, wherein said guide further comprises a posterior hook for cooperation with the talus posterior cortex.

21. The guide of claim 20, wherein the hook of said guide has a first position extending from the guide for cooperation with the talus posterior cortex and a second position retracted into said guide to prevent cooperation with the talus posterior cortex.

22. A burr tool for use with a guide in joint arthroplasty comprising:

a body;

a cutting edge extending from said body for cooperation with the guide for assisting in positioning said tool with respect to the guide; and

a stem extending from said body.

23. The burr tool of claim 22, wherein said cutting edge comprises a generally spherical cutting edge.

24. The burr tool of claim 22, further comprising a collar attached at least one of said body or said stem.

25. A method for providing joint arthroplasty comprising:

resecting a portion of a bone with a tool to form a prosthetic mounting surface;

placing a burr guide defining a through opening therein onto the mounting surface of the bone;

traversing a rotatable burr tool having a collar longitudinally along the opening to form a slot in the mounting surface of the bone; and

inserting a prosthetic component into the slot.

26. The method of claim 25, wherein the traversing the burr tool step comprises traversing the burr tool firstly in a direction along the rotational axis of the tool, secondly in a direction perpendicular to the rotational axis of the tool, and thirdly in a direction along the rotational axis of the tool.

27. The method of claim 25, wherein the traversing the burr tool step comprises traversing the burr tool firstly in a direction along the rotational axis of the tool, secondly in a direction perpendicular to the rotational axis of the tool, and thirdly in a direction causing rotational axis of the tool to pivot about the collar of the burr tool.

* * * * *